




(86) Date de dépôt PCT/PCT Filing Date: 2006/08/01
 (87) Date publication PCT/PCT Publication Date: 2007/02/15
 (85) Entrée phase nationale/National Entry: 2008/02/04
 (86) N° demande PCT/PCT Application No.: EP 2006/007612
 (87) N° publication PCT/PCT Publication No.: 2007/017161
 (30) Priorité/Priority: 2005/08/04 (MXPA/A/2005/008339)

(51) Cl.Int./Int.Cl. *C22C 38/44* (2006.01),
C21D 8/10 (2006.01), *C21D 9/08* (2006.01)
 (71) Demandeur/Applicant:
TENARIS CONNECTIONS AG, LI
 (72) Inventeurs/Inventors:
GARCIA, ALFONSO IZQUIERDO, MX;
CARMONA, HECTOR MANUEL QUINTANILLA, MX;
TIVELLI, MARCO MARIO, MX;
ANELLI, ETTORE, MX;
DI SCHINO, ANDREA, MX
 (74) Agent: BERESKIN & PARR

(54) Titre : ACIER A HAUTE RESISTANCE PERMETTANT D'OBTENIR DES TUYAUX SANS SOUDURE EN ACIER SOUDABLE
 (54) Title: HIGH-STRENGTH STEEL FOR SEAMLESS, WELDABLE STEEL PIPES

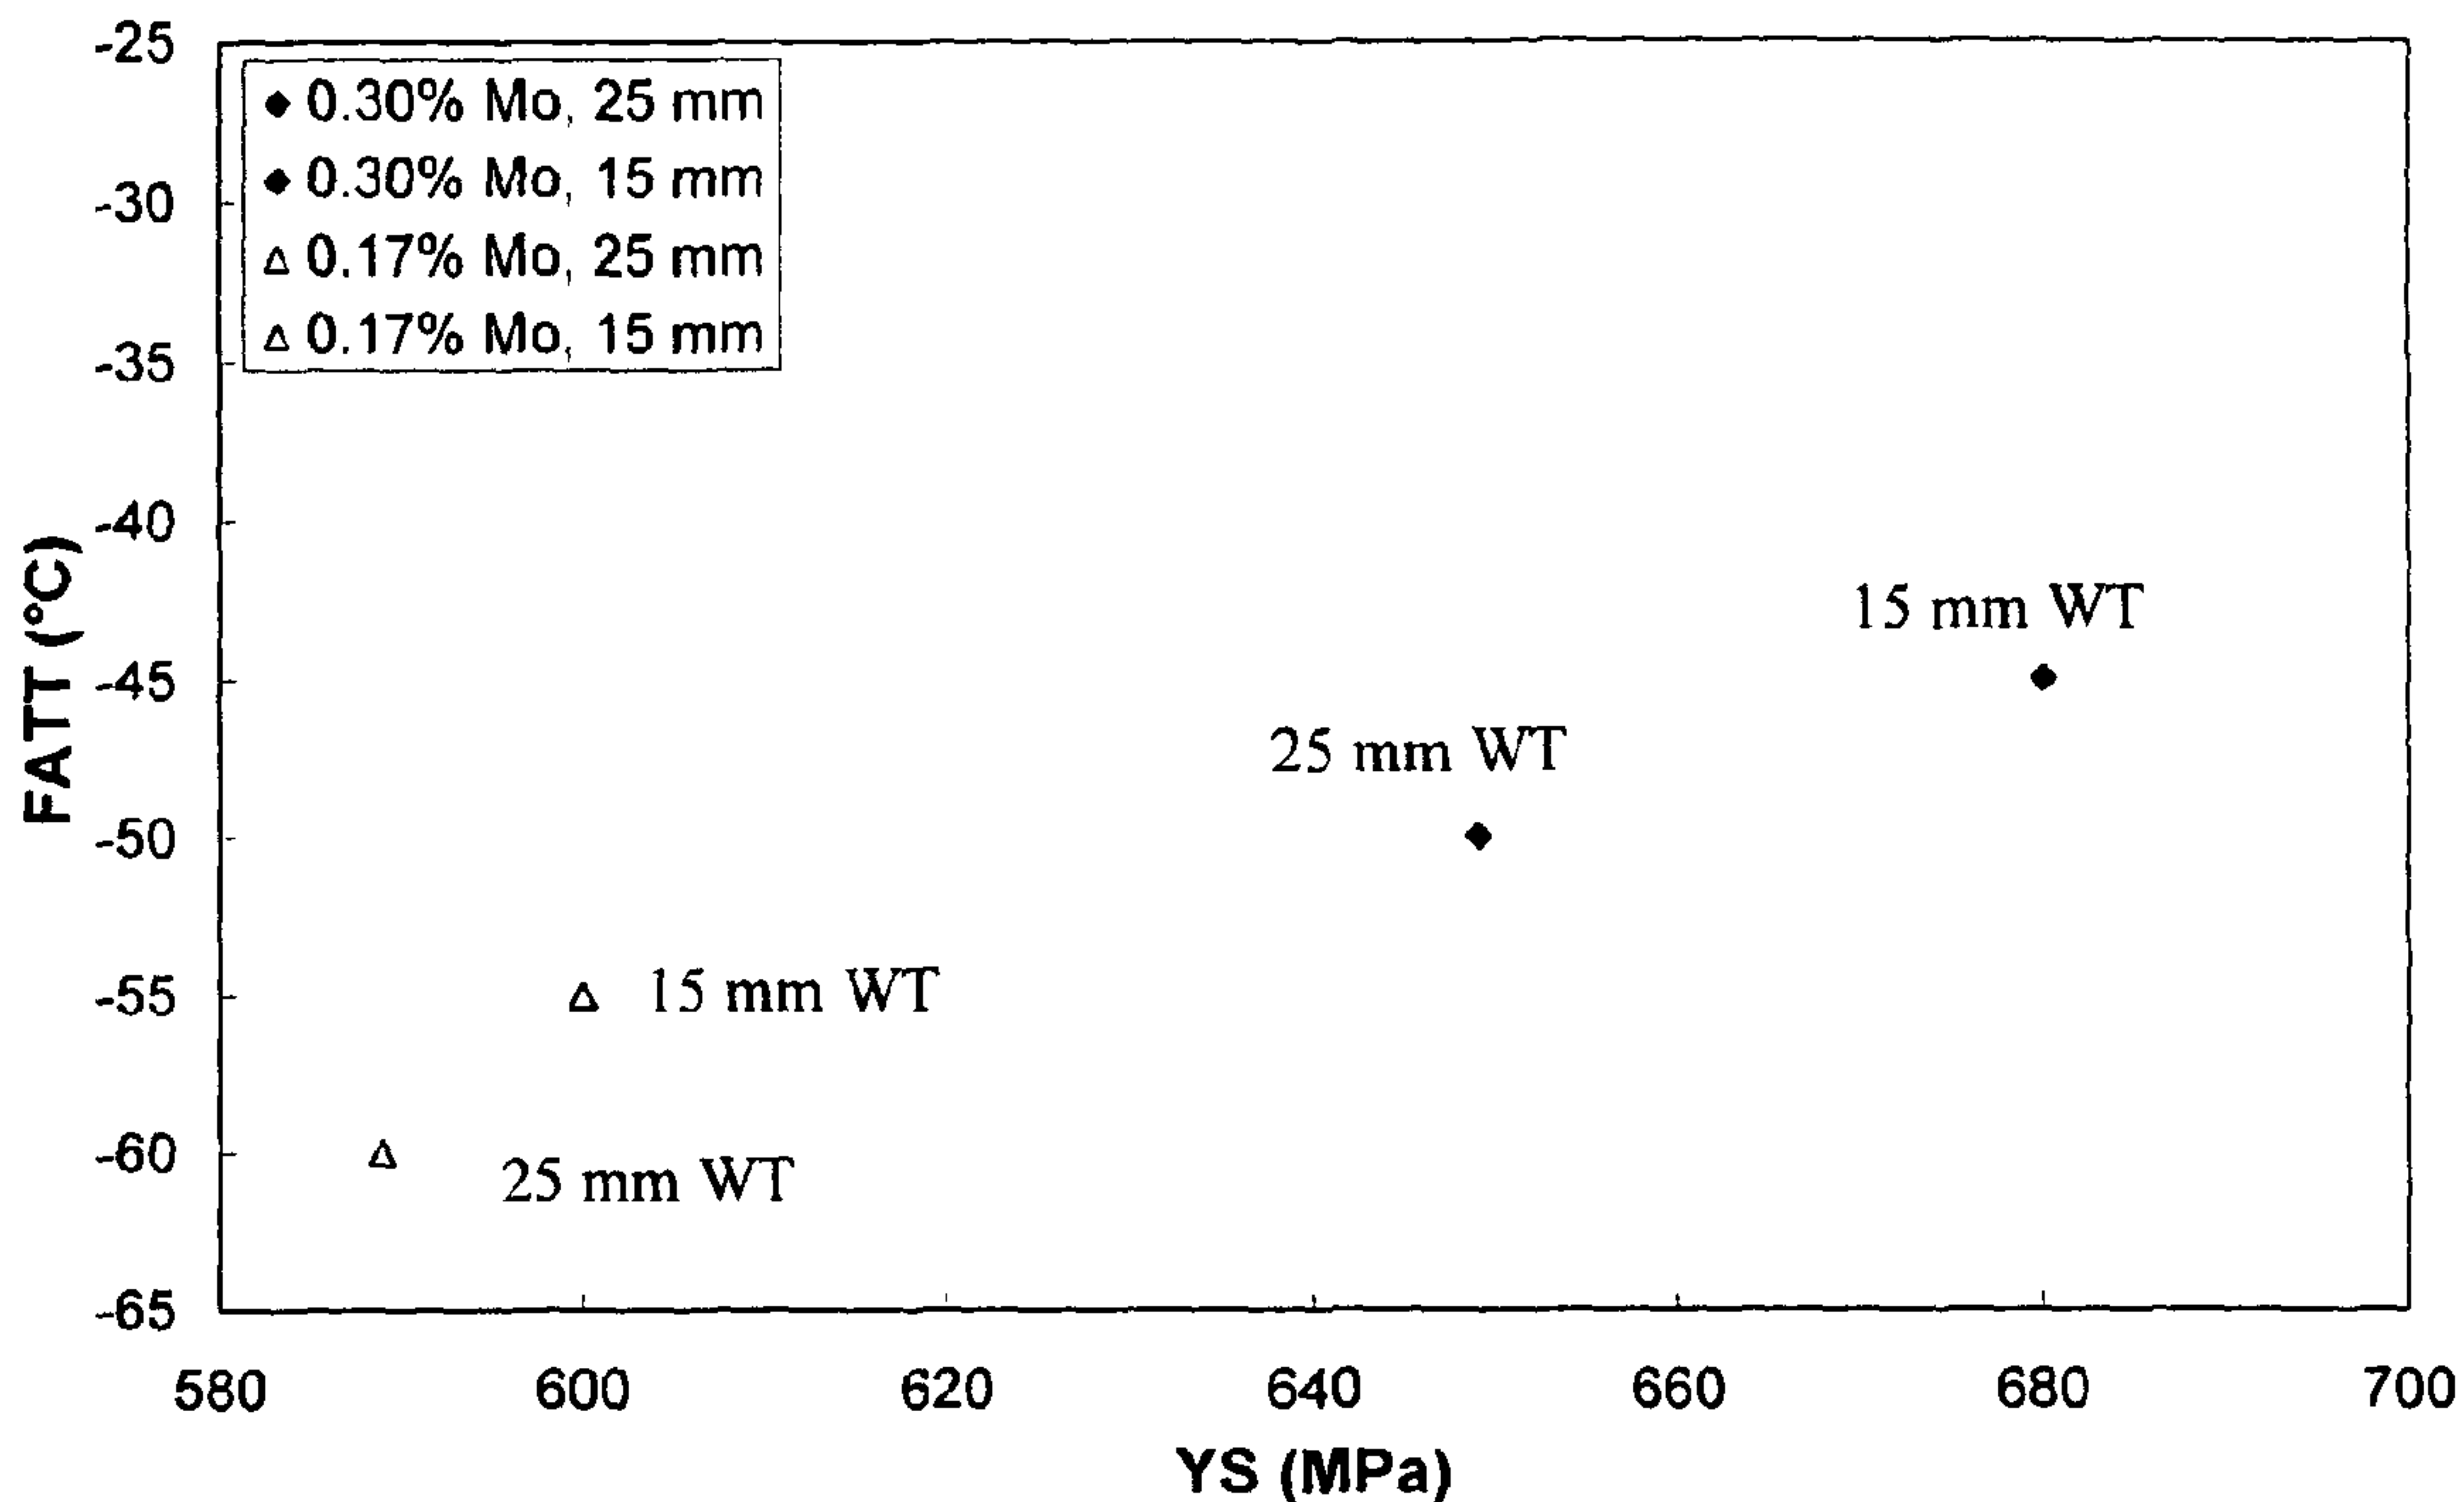

(57) Abrégé/Abstract:

A low-alloy steel containing, by weight percent, C 0.03-0.13%, Mn 0.90-1.80%, Si ≤ 0.40%, P ≤ 0.020%, S ≤ 0.005%, Ni 0.10-1.00%, Cr 0.20-1.20%, Mo 0.15-0.80%, Ca ≤ 0.040%, V ≤ 0.10%, Nb ≤ 0.040%, Ti < 0.020% and N ≤ 0.011% for making high-strength, weldable steel seamless pipe, characterized in that the microstructure of the alloy steel is a mixture of bainite and martensite and the yield stress is at least 621 MPa (90 Ksi). It is a second object of the present invention to provide a high-strength, weldable steel seamless pipe, comprising an alloy steel containing, by weight percent, C 0.03-0.13%, Mn 0.90-1.80%, Si < 0.40%, P ≤ 0.020%, S < 0.005%, Ni 0.10-1.00%, Cr 0.20-1.20%, Mo 0.15-0.80%, Ca ≤ 0.040%, V < 0.10%, Nb < 0.040%, Ti < 0.020% and N < 0.011% also characterized in that the microstructure of the alloy steel is predominantly martensite and the yield stress is at least 690 MPa (100 ksi).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
15 February 2007 (15.02.2007)

PCT

(10) International Publication Number
WO 2007/017161 A1

(51) International Patent Classification:

C22C 38/44 (2006.01) C21D 8/10 (2006.01)
C21D 9/08 (2006.01)[IT/MX]; Carretera México-Veracruz, Km 433.7, Via Jalapa, Veracruz, Ver. 91697 (MX). **DI SCHINO, Andrea** [IT/MX]; Carretera México-Veracruz, Km 433.7, Via Jalapa, Veracruz, Ver. 91697 (MX).

(21) International Application Number:

PCT/EP2006/007612

(74) Agent: **KNAUER, Reinhard**; Grünecker, Kinkeldey, Stockmair & Schwanhäusser, Maximilianstrasse 58, 80538 München (DE).

(22) International Filing Date: 1 August 2006 (01.08.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

PA/a/2005/008339 4 August 2005 (04.08.2005) MX

(71) Applicant (for all designated States except US): **TENARIS CONNECTIONS AG** [LI/LI]; Bahnhofstrasse 7, CH-9494 Schaan (LI).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **GARCIA, Alfonso, Izquierdo** [MX/MX]; Carretera México-Veracruz, Km 433.7, Via Jalapa, Veracruz, Ver. 91697 (MX). **CARMONA, Héctor, Manuel, Quintanilla** [MX/MX]; Carretera México-Veracruz, Km 433.7, Via Jalapa, Veracruz, Ver. 91697 (MX). **TIVELLI, Marco, Mario** [AR/MX]; Carretera México-Veracruz, Km 433.7, Via Jalapa, Veracruz, Ver. 91697 (MX). **ANELLI, Ettore**

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,

[Continued on next page]

(54) Title: HIGH-STRENGTH STEEL FOR SEAMLESS, WELDABLE STEEL PIPES

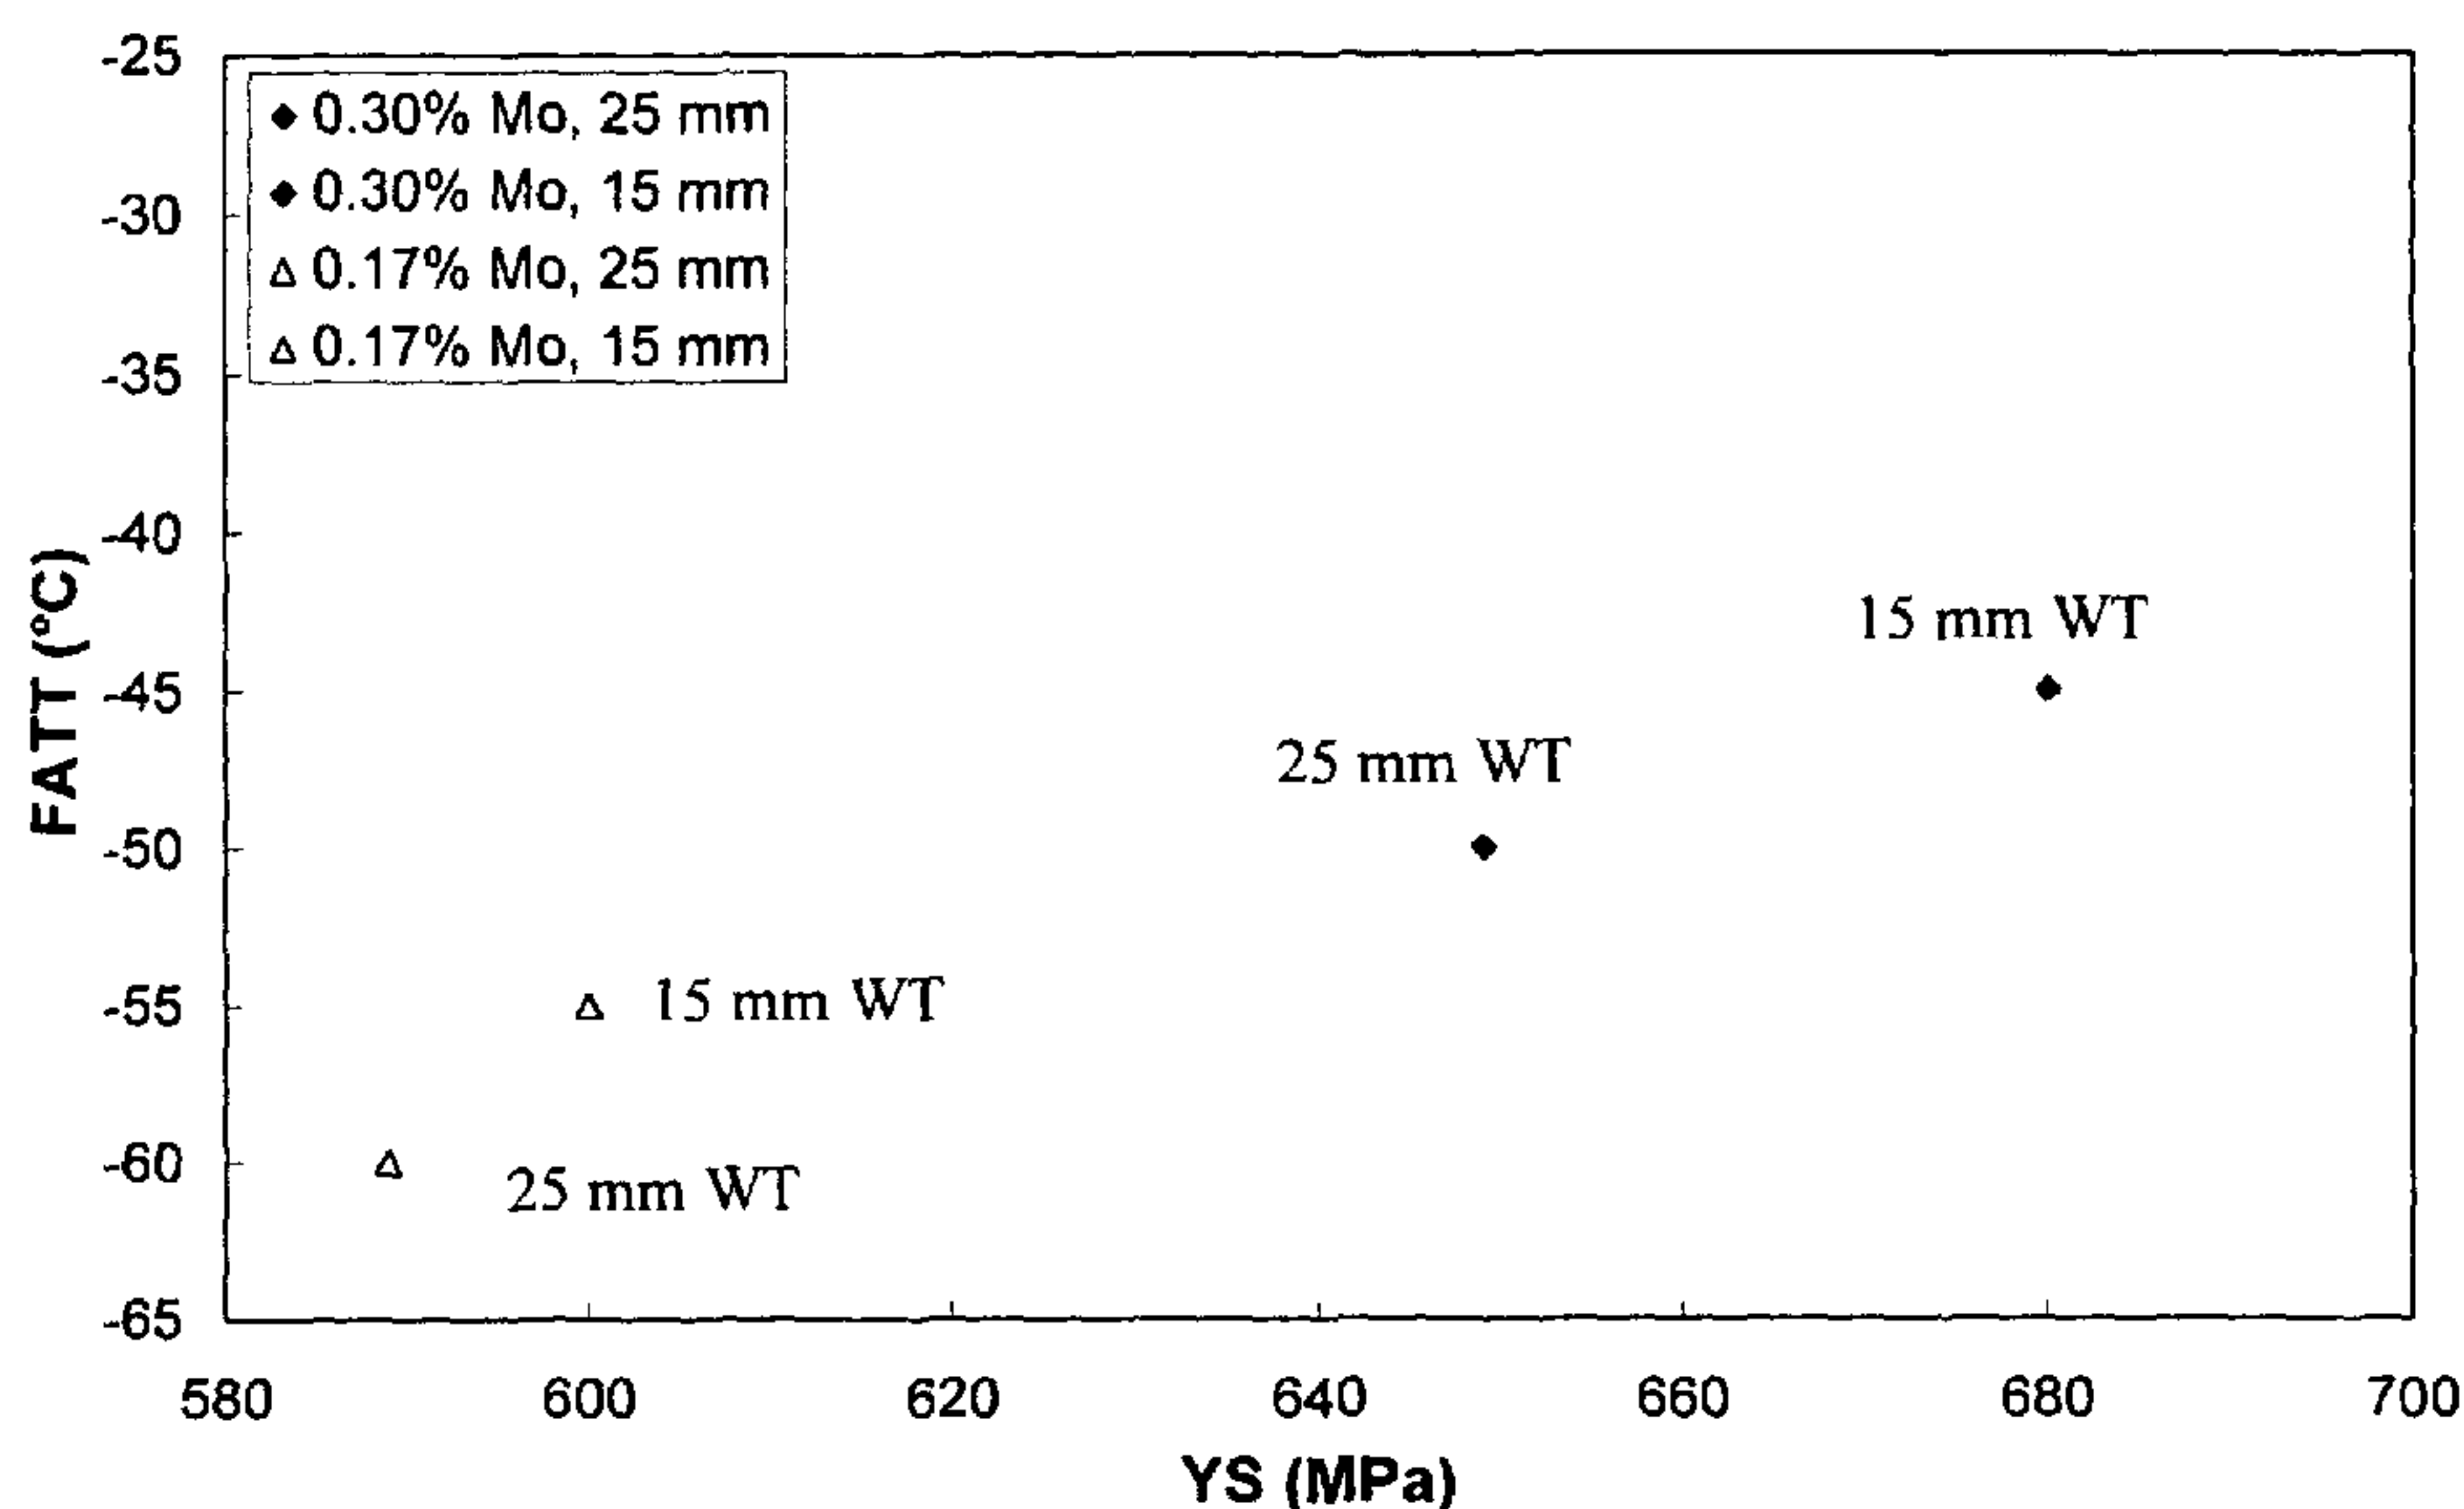

(57) Abstract: A low-alloy steel containing, by weight percent, C 0.03-0.13%, Mn 0.90-1.80%, Si \leq 0.40%, P \leq 0.020%, S \leq 0.005%, Ni 0.10-1.00%, Cr 0.20-1.20%, Mo 0.15-0.80%, Ca \leq 0.040%, V \leq 0.10%, Nb \leq 0.040%, Ti $<$ 0.020% and N \leq 0.011% for making high-strength, weldable steel seamless pipe, characterized in that the microstructure of the alloy steel is a mixture of bainite and martensite and the yield stress is at least 621 MPa (90 Ksi). It is a second object of the present invention to provide a high-strength, weldable steel seamless pipe, comprising an alloy steel containing, by weight percent, C 0.03-0.13%, Mn 0.90-1.80%, Si $<$ 0.40%, P \leq 0.020%, S $<$ 0.005%, Ni 0.10-1.00%, Cr 0.20-1.20%, Mo 0.15-0.80%, Ca \leq 0.040%, V $<$ 0.10%, Nb $<$ 0.040%, Ti $<$ 0.020% and N $<$ 0.011% also characterized in that the microstructure of the alloy steel is predominantly martensite and the yield stress is at least 690 MPa (100 ksi).

WO 2007/017161 A1

WO 2007/017161 A1



RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

HIGH-STRENGTH STEEL FOR SEAMLESS, WELDABLE STEEL

PIPES

The present invention refers generally to steel used for making a material of seamless steel pipes, such as oil well pipes or line pipes and, more specifically, to high-strength alloy steels used to manufacture weldable steel seamless pipes.

BACKGROUND OF THE INVENTION

The technological evolution in the offshore sector tends to an increasing use of high strength steels with yield strength in the range from 80 to 100 ksi for flowlines and risers. In this context, one key component is the riser system, which becomes a more significant factor as water depth increases. Riser system costs are quite sensitive to water depth.

Although in-service conditions and the sensitiveness of environmental loads (i.e. wave and current) are different for the two riser types Top Tension Risers (TTRs) and Steel Catenary Risers (SCRs) for ultra-deep environment, the requirement to reduce riser weight is extremely important. By reducing the weight of the line, there is a decrease in the cost of the pipe and a significant impact on the tensioning system used to support the riser.

In addition, using high-strength alloy steels can decrease the wall thickness of a pipe up to 30% due to the more efficient design. For riser systems, which rely on buoyancy in the form of aircans for top tension, the thinner wall pipe available with high strength steel

allows reduced buoyancy requirements which, in turn, can reduce the hydrodynamic loading on these components and, thus, improve riser response. Riser systems where the tension is reacted by the host facility benefit from high strength steel as the total payload is
5 reduced.

In the past years, there have been several types of high-strength alloy steels developed in the field of quenched and tempered (QT) seamless pipes. These seamless pipes combine both high strength with good toughness and good girth weldability. However,
10 these seamless pipes have wall thickness of up to 40 mm and outside diameter not greater than 22 inches and, thereby, are quite expensive and can only reach a yield strength below 100 ksi after quenching and tempering.

For example, high-strength, weldable steels for seamless pipes
15 have been known in US Patent No. 6,217,676 which describes an alloy steel that can reach grades of up to X80 after quenching and tempering and has excellent resistance to wet carbon dioxide corrosion and seawater corrosion, comprising in weight % more than 0.10 and 0.30 C, 0.10 to 1.0 Si, 0.1 to 3.0 Mn, 2.5 to less than 7.0 Cr
20 and 0.01 to 0.10 Al, the balance includes Fe and incidental impurities including not more than 0.03% P. However, these types of steels can not reach grades higher than X80 and are quite expensive due to the high content of Cr.

Likewise, US Patent Application 09/341,722 published January
25 31, 2002 describes a method for making seamless line pipes within

the yield strength range from that of grade X52 to 90 ksi, with a stable elastic limit at high application temperatures by hot-rolling a pipe blank made from a steel which contains 0.06-0.18% C, Si \leq 0.40%, 0.80-1.40% Mn, P \leq 0.025%, S \leq 0.010%, 0.010-0.060% Al, Mo \leq 5 0.50%, Ca \leq 0.040%, V \leq 0.10%, Nb \leq 0.10%, N \leq 0.015%, and 0.30-1.00%W. However, these types of steels can not reach yield strength higher than 100 ksi and are not weldable in a wide range of heat inputs.

It is, therefore, desirable and advantageous to provide an improved high-strength, weldable alloy steel for seamless pipes to be used in a riser system with yield strength well above 90 ksi and with a wall thickness (WT) to outside diameter (OD) ratio adequate to expected collapse performance which obviates prior art shortcomings and which is able to meet good mechanical properties in the pipe 15 body and weld.

BRIEF DESCRIPTION OF THE INVENTION

The characteristic details of the novel alloy steel of the present invention are clearly shown in the following description, tables and 20 drawings. It is a first object of the present invention to provide alloy steel containing, by weight percent, C 0.03-0.13%, Mn 0.90-1.80%, Si \leq 0.40%, P \leq 0.020%, S \leq 0.005%, Ni 0.10-1.00%, Cr 0.20-1.20%, Mo 0.15-0.80%, Ca \leq 0.040%, V \leq 0.10%, Nb \leq 0.040%, Ti \leq 0.020% and N \leq 0.011% for making high-strength, weldable steel seamless 25 pipe, characterized in that the microstructure of the alloy steel is a

mixture of bainite and martensite and the yield stress is at least 621 MPa (90 ksi), weldable in a wide range of heat inputs, comprising a chemical composition that is capable of achieving excellent mechanical properties of the pipe body and good mechanical characteristics of the girth weld.

It is a second object of the present invention to provide a high-strength, weldable steel seamless pipe, comprising an alloy steel containing, by weight percent, C 0.03-0.13%, Mn 0.90-1.80%, Si \leq 0.40%, P \leq 0.020%, S \leq 0.005%, Ni 0.10-1.00%, Cr 0.20-1.20%, Mo 0.15-0.80% , Ca \leq 0.040%, V \leq 0.10%, Nb \leq 0.040%, Ti \leq 0.020% and N \leq 0.011% also characterized in that the microstructure of the alloy steel is predominantly martensite and the yield stress is at least 690 MPa (100 ksi).

15 **DETAILED DESCRIPTION OF THE DRAWINGS**

The details being referred to in the drawings are described next for a better understanding of the present invention:

Figure 1 shows the effect of thickness and Mo content on yield strength (YS) and fracture appearance transition temperature (FATT) of materials of the present invention.

Figure 2 illustrates the effect of the cooling rate (CR) and Mo content on YS and FATT in a pipe of 15 mm wall thickness of the present invention.

Figure 3 shows the effect of mean sub-grain size on the yield strength of Q&T steels from the present invention.

Figure 4 shows the relationships between FATT change and the inverse square root of the packet size for Q&T steels with various amounts of martensite.

Figure 5 shows packet size for Q&T steels of the present invention with as-quenched microstructure constituted of martensite (M > 30%).

Figure 6 shows that in materials object of the present invention, with a predominant martensitic structure, the packet size is practically independent of the prior austenite grain size (PAGS).

10

DETAILED DESCRIPTION OF THE INVENTION

In accordance with a first aspect of the invention, an alloy steel comprising, by weight percent,

	C	0.03-0.13%
15	Mn	0.90-1.80%
	Si	≤ 0.40%
	P	≤ 0.020%
	S	≤ 0.005%
	Ni	0.10-1.00%
20	Cr	0.20-1.20%
	Mo	0.15-0.80%
	Ca	≤ 0.040%
	V	≤ ≤ 0.10%
	Nb	≤ 0.040%
25	Ti	≤ 0.020%

$$N \leq 0.011\%$$

for making high-strength steel seamless pipe, weldable in a wide range of heat inputs. The chemical composition of the present invention provides an improved high-strength, weldable alloy steel
5 seamless pipe to be used in a riser system with a yield strength greater than 90 ksi and with a wall thickness to outside diameter ratio that is high enough for the manufacturing limit of a welded pipe as a riser and where flowline wall thickness increases to provide sufficient resistance for operating pressures that more frequently are greater
10 than 10 ksi.

The reasons for selecting the chemical composition of the present invention are described below:

Carbon: 0.03%-0.13%

Carbon is the most inexpensive element and with the greatest
15 impact on the mechanical resistance of steel, therefore, its content percentage can not be too low. Furthermore, Carbon is necessary to improve hardenability of the steel and the lower its content in the steel, the more weldable is the steel and higher the level of alloying elements can be used. Therefore, the amount selected of carbon is
20 selected in the range of 0.03 to 0.13%.

Manganese: 0.90%-1.80%

Manganese is an element which increases the hardenability of steel. Not Less than 0.9% of manganese is necessary to improve the strength and toughness of the steel. However, more than 1.80%

decreases resistance to carbon dioxide corrosion, toughness and weldability of steel.

Silicon: Less than 0.40%

Silicon is used as a deoxidizing agent and its content below
5 0.40% contributes to increase strength and softening resistance during tempering. More than 0.40% has an unfavorable effect on the workability and toughness of the steel.

Phosphorus: Less than 0.020%

Phosphorus is inevitably contained in the steel. However, since
10 this element segregates on grain boundaries and decreases the toughness of the base material, heat affected zone (HAZ) and weld metal (WM), its content is limited to 0.020%.

Sulphur: Less than 0.005%

Sulphur is also inevitably contained in the steel and combines
15 with Manganese to form Manganese Sulfide which deteriorates the toughness of the base material, heat affected zone (HAZ) and weld metal (WM). Therefore, the content of sulphur is limited to not more than 0.005%.

Nickel: 0.10% to 1.00%

20 Nickel is an element which increases the toughness the base material, heat affected zone (HAZ) and weld metal (WM); however, above a given content this positive effect is gradually reduced due to saturation. Therefore, the optimum content range for nickel is from 0.10 to 1.00%.

Chromium: 0.20% to 1.20%

Chromium improves the hardenability of the steel to increase strength and corrosion resistance in a wet carbon dioxide environment and seawater. Large amounts of Chromium make the steel expensive and increase the risk of undesired precipitation of Cr rich nitrides and carbides which can reduce toughness and resistance to hydrogen embrittlement . Therefore, the preferred range is between 0.20 and 1.20%.

Molybdenum: 0.15% to 0.80%

Molybdenum contributes to increase strength by solid solution and precipitation hardening, and enhances resistance to softening during tempering of the steel. It prevents the segregation of detrimental tramp elements on the boundaries of the austenitic grain. Addition of Mo is essential for improving hardenability and hardening solid solution, and in order to exert the effect thereof, the Mo content must be 0.15% or more. If the Mo content exceeds 0.80%, toughness in the welded joint is particularly poor because this element promotes the formation of high C martensite islands, containing retained austenite (MA constituent). Therefore, the optimum content range for this element is 0.15% to 0.80%.

Calcium: Less than 0.040%

Calcium combines with sulfur and oxygen to create sulfides and oxides and then these transform the hard and high melting point oxide compounds into a low melting point and soft oxide compounds which improve the fatigue resistance of the steel. The excessive addition of

calcium causes undesired hard inclusions on steel product. Summing up these effects of calcium, when calcium is added, its content is limited to not more than 0.040%.

Vanadium: Less than 0.10%

5 Vanadium precipitates from solid solution as carbides and nitrides, therefore, increases the strength of the material by precipitation hardening. However, to avoid an excess of carbides or carbonitrides in the weld, its content is limited to not more than 0.10%.

10 **Niobium: Less than 0.040%**

Niobium also precipitates from solid solution in the form of carbides and nitrides and, therefore, increases the strength of the material. The precipitation of carbides or nitrides rich in niobium also inhibits excessive grain growth. However, when the Nb content
15 exceeds 0.04 %, undesirable excessive precipitation occurs with consequent detrimental effects on toughness. Thus the preferred content of this element should not exceed 0.040%.

Titanium: Less than 0.020%

Titanium is a deoxidizing agent which is also used to refine
20 grains through nitride precipitates, which hinder grain boundary movement by pinning. Amounts larger than 0.020% in the presence of elements such as Nitrogen and Carbon promote the formation of coarse carbonitrides or nitrides of Titanium which are detrimental to toughness (i.e. increase of the transition temperature). Therefore, the
25 content of this element should not exceed 0.020%.

Nitrogen: Less than 0.010%

The amount of Nitrogen should be kept below 0.010% to develop in the steel an amount of precipitates which does not decrease the
5 toughness of the material.

In accordance with a second aspect of the invention, a high-strength, weldable, steel seamless pipe, comprising an alloy steel containing, by weight percent,

	C	0.03-0.13%
10	Mn	0.90-1.80%
	Si	≤ 0.40%
	P	≤ 0.020%
	S	≤ 0.005%
	Ni	0.10-1.00%
15	Cr	0.20-1.20%
	Mo	0.15-0.80%
	Ca	≤ 0.040%
	V	≤ 0.10%
	Nb	≤ 0.040%
20	Ti	≤ 0.020%
	N	≤ 0.011%

also characterized in that the microstructure of the alloy steel is predominantly martensite and the yield stress is at least 690 MPa (100 ksi).

The seamless pipe is weldable in a heat input range between 15 KJ/in and 40KJ/in and shows good fracture toughness characteristics (Crack Tip Opening Displacement (CTOD)) in both pipe body and heat affected zone.

5 The present invention is capable to fulfill the mechanical requirements for shallow and deepwater projects and achieves the following mechanical properties of the pipe and of the girth weld, as shown in Tables 1 and 2 respectively, with respect to strength, hardness, and toughness.

10

TABLE 1 PARENT PIPE MECHANICAL PROPERTIES

Minimum Yield Strength	100 ksi
Minimum Ultimate Tensile Strength (UTS)	110 ksi
Yield to Tensile Ratio	≤ 0.95
Minimum Elongation	18%
Charpy V-Notch Absorbed Energy at -10°C (transverse)	80 Joules Minimum Individual
Minimum Crack Tip Opening Displacement (CTOD) at - 10° C	0.25 mm

TABLE 2 WELD MECHANICAL PROPERTIES

Minimum Yield Strength	115 ksi
Maximum Hardness	325 HV10
Minimum Crack Tip Opening Displacement (CTOD) at - 10° C	0.25 mm

The critical ranges of size, weight, pressure, mechanical and chemical composition apply to a seamless pipe of up to 16 inches outside diameter ranging between 12 mm to 30 mm wall thickness, respectively, for Quenching & Tempering (Q&T) seamless pipes with yield strength greater than 100 ksi. Said characteristics were achieved through a tailored metallurgical design of high-strength pipes by means of metallurgical modeling, laboratory tests, and industrial trials. The results show that the manufacture of Q&T seamless pipes with yield strength greater than 100 ksi is possible at least within a certain dimensional range.

To achieve the high-strength Q&T seamless pipe of the present invention, with yield strength greater than 100 ksi, in weldable steel, tests were conducted in steels of pipe geometry in the following range: outside diameter (OD) varying from 6 inches to 16 inches and wall thickness (WT) varying from 12 to 30 mm. The representative geometry was defined due to the fact that the chemical composition of the present invention is tied to the OD/WT ratio. The most promising steels were identified as having Nb microaddition with carbon content from 0.07 to 0.11%, where the lower the carbon content in the steel the higher the level of alloying elements to be used, 1-1.6% Mn, as well as optimized additions of Mo, Ni, Cr and V; carbon equivalent ($C_{eq} = C + Mn/6 + (Cr+Mo+V)/5 + (Cu+Ni)/15$) ranges from 0.45% to 0.59%.

Hot rolling and various Q&T treatments were carried on laboratory steels with base composition 0.085% C, 1.6% Mn, 0.4% Ni,

0.22% Cr, 0.05% V and 0.03% Nb and 0.17% Mo as well as 0.29% Mo content.

The results of the tests led to a yield to tensile (Y/T) ratio always below 0.95. Steel with 0.29% Mo allowed to produce a
 5 seamless Q&T steel with a yield strength (YS) close to 100 ksi (680 MPa) with a Fracture Appearance Transition Temperature (FATT) of – 50 °C (austenitizing at 920 °C and tempering at 600 °C to 620 °C).

As illustrated in Figures 1 and 2, mechanical properties are not so sensitive to tempering temperatures although toughness slightly
 10 improved with the increase of this parameter remaining strength to suitable levels. As shown in Figure 1, the FATT vs YS behavior is reported for samples of 15 mm and 25 mm of both 0.17% and 0.30% Mo content. These samples were quenched reproducing the same cooling rate. Test results showed that YS depends on the Mo content
 15 (as the higher the Mo content, the higher the Yield Strength) due to the improved hardenability, if the same cooling rate is considered.

The effect of the cooling rate was also evaluated on steels with 0.17% and 0.30% Mo after austenitization at 920 °C and tempering at 620 °C. As can be observed in Table 3, if the toughness, measured as
 20 FATT value normalized to a given yield strength, is considered, increasing cooling rate improves the strength without significant detrimental effects on toughness of the material for both Mo contents.

TABLE 3

Mo, %	CR, °C/s	YS, MPa	Normalized FATT, °C
-------	----------	---------	---------------------

0.30	30	680	-69.0
	60	732	-69.6
0.17	30	600	-55.0
	60	674	-57.2

According to this emerging picture, two industrial heats, coded T1 and D1 (Table 4), were produced with a similar chemical composition, comparable to that of the laboratory steel with high Mo.

5

TABLE 4

CHEMICAL COMPOSITION (mass %)																		
HEAT	C	Mn	Si	P	S (ppm)	Ni	Cr	Mo	Ca (ppm)	V	Nb	Ti (ppm)	N (ppm)	Cu	Al	Sn	As	B
T1	0.09	1.51	0.24	0.01	16	0.44	0.26	0.25	20	0.064	0.029	< 40	60	0.126	0.023	0.007	0.005	< 0.005
D1	0.10	1.44	0.28	0.01	20	0.44	0.21	0.23	< 5	0.070	0.026	< 40	50	0.15	0.022	0.007	0.005	< 0.005
T2	0.07	1.67	0.22	0.01	9	0.51	0.5	0.32	10	0.042	0.026	80	50	0.14	0.023	0.007	0.005	< 0.005
D2	0.11	1.48	0.25	0.02	20	0.53	0.53	0.31	< 5	0.058	0.026	< 40	48	0.12	0.024	0.007	0.005	< 0.005
T3	0.10	1.27	0.34	0.01	9	0.22	0.51	0.52	17	< 0.005	0.025	70	43	0.119	0.020	0.007	0.005	< 0.005

Pipes with OD = 323.9 mm and WT = 15-16 mm were produced. These pipes were austenitized at 900 – 920 °C and tempered at 610 – 630 °C. Likewise, 25 mm thick pipes were manufactured and austenitized at 900 °C and tempered at 600 °C.

On the basis of the results from the first trial, two other heats, coded T2 and D2 (Table 4), were cast with a similar richer chemical composition (0.3% Mo; 0.5% Cr; 0.5% Ni; 0.05% V; 0.026% Nb), except for C and Mn contents, which were respectively lower and higher in heat T2 (0.07%C; 1.67%Mn) compared with heat D2 (0.11%C; 1.48%Mn). Finally, a third heat (T3 in Table 4) was

specifically designed to achieve very high contents of martensite after quenching and, hence, yield strength values higher than 100 ksi in 25-30 mm WT seamless pipes.

One of the remarkable characteristics of the alloy steel according to the present invention is its microstructure characterized by the amount of martensite and the size of packets and sub-grains.

In order to relate the strength and toughness behavior to microstructure, materials from laboratory and industrial trials have been considered for a deeper metallographic investigation. Similarly, conventional X65 and X80 grade materials were included in this analysis.

Optical microscopy (OM) was used in order to measure the average size of the prior austenite grains (PAGS), whilst scanning electron microscopy (SEM) and transmission electron microscopy (TEM) were applied to recognize and assess the content of martensite. In addition to these techniques, Orientation Imaging Microscopy (OIM) was also applied to give quantitative information on local orientation and crystallography. In particular, this technique allowed to detect subgrains (low-angle boundaries with misorientation $< 5^\circ$) and packets (delimited by high-angle boundaries with misorientation $> 50^\circ$).

The mean sub-grain size is the key microstructural parameter in defining the yield strength of these materials according to an almost linear relationship with the inverse of square root of this parameter (Figure 3). On the other hand, the toughness of the different materials

was related to the inverse square root of the packet size. Particularly, a normalised FATT, referred to a same yield strength level, has been introduced using the relationship $\Delta\text{FATT}/\Delta\text{YS} = - 0.3 \text{ }^\circ\text{C}/\text{MPa}$. Results show an improvement of toughness with packet size refinement (Figure 4).

Finer packet sizes (Figure 5) are obtained when the as-quench microstructure comprises mainly low-C martensite ($M > 60\%$).

Figure 6 shows that the packet size is practically independent of the prior austenite grain size (PAGS) in materials with a predominant martensitic structure ($M > 60\%$). Therefore, a stringent control of austenitizing temperatures to maintain the PAGS fine is not required when the heat treatment is performed on steels that are able to develop a predominant martensitic structure.

All steels in Table 4 according to the examples of the present invention satisfy the yield strength of at least 90 ksi and good toughness level (i.e. $\text{FATT} \leq - 30 \text{ }^\circ\text{C}$) because they were designed to develop a microstructure with $M > 30\%$ during industrial quenching of seamless pipes of wall thickness from 12 to 30 mm.

Amounts of martensite greater than 60% were also developed to form after tempering a microstructure with sub-grains smaller than 1.1 μm capable to develop yield strength levels greater than 750 MPa and packets with size smaller than 3 μm that are suitable to reach very low FATT values ($< - 80 \text{ }^\circ\text{C}$).

Example 1

Using a heat with chemical composition comprising 0.09% C, 1.51% Mn, 0.24% Si, 0.010%P, 16 ppm S, 0.25% Mo, 0.26% Cr, 0.44% Ni, 0.06% V and 0.029% Nb and pipes with outside diameter of 323.9 mm and wall thickness of 15-16 mm, and austenitizing at 900°-920° C, quenching in a water tank (external and internal cooling of the pipe) and tempering at 610° – 630°C, it was found (Table 5) that the 15-16 mm wall thickness seamless Q&T pipe is suitable to develop YS > 95 ksi (660 MPa). Using a 25 mm wall thickness pipe with the same chemical composition and outside diameter and austenitizing at 900° C and tempering at 600° C, it was found that the 25 mm wall thickness seamless Q&T pipe is suitable to develop YS > 90 ksi (621 MPa). The FATT values were – 65 °C (Table 5).

TABLE 5

WT (mm)	YS (MPa)	UTS (MPa)	50%FATT (°C)
15	680	789	- 65
25	630	789	- 65

15

Example 2

Using a heat with chemical composition comprising 0.10% C, 1.44% Mn, 0.28% Si, 0.010% P, 20 ppm S, 0.230% Mo, 0.26% Cr, 0.070% V, 0.026% Nb, 0.44% Ni and pipes with outside diameter of

323.9 mm and wall thickness of 15-16 mm, austenitizing at 900°-920°C, quenching externally and internally a rotating pipe, and tempering at 610°- 630°C, it was found (Table 6) that the 15-16 mm wall thickness seamless Q&T pipe achieves a yield strength higher than 100 ksi (690 MPa).

TABLE 6

WT (mm)	YS (MPa)	UTS (MPa)	50%FATT (°C)
15	775	857	- 55
25	700	775	- 30

Example 3

Using a heat with chemical composition comprising 0.11% C, 1.48% Mn, 0.25% Si, 0.016% P, 20 ppm S, 0.31% Mo, 0.53% Cr, 0.058% V, 0.026% Nb, 0.53% Ni and pipes with outside diameter of 323.9 mm and wall thickness of 15-16 mm, and process conditions similar to that of example 2 the mechanical properties shown in Table 7 were developed.

TABLE 7

WT (mm)	YS (MPa)	UTS (MPa)	50%FATT (°C)
15	773	840	- 50

Compared to example 2 (Table 6), it was found that the Cr and Mo additions do not give additional benefits in terms of toughness, thereby, maintaining the required strength levels for the 15-16 mm wall thickness seamless Q&T pipe.

Example 4

Using a heat with chemical composition comprising 0.11% C, 1.48% Mn, 0.25% Si, 0.016% P, 20 ppm S, 0.31% Mo, 0.53% Cr, 0.058% V, 0.026% Nb, 0.53% Ni and pipes with outside diameter of 323.9 mm and wall thickness of 25 mm the mechanical properties shown in Table 8 were developed when the water quenching effectiveness was reduced on purpose.

TABLE 8

WT (mm)	YS (MPa)	UTS (MPa)	50%FATT (°C)
25	760	826	- 5

Compared with the case of example 2 (Table 6), it was found that the Cr and Mo additions give substantial strength increase (from 700 MPa to 760 MPa) but toughness decreased (FATT from – 30 °C to - 5 °C). This behavior was related to a low amount of martensite and consequently to a relatively coarse packet.

Example 5

Using a heat with chemical composition comprising 0.07% C, 1.67%Mn, 0.22% Si, 0.010% P, 0.042% V, 0.026% Nb, 0.51% Ni, 80 ppm Ti, 9 ppm S, and pipes with outside diameters of 323.9 mm and wall thickness of 15 mm, it was found (Table 9) that Cr and Mo additions (compare this example with example 1) for the same tempering temperature, i.e. 600° C, give higher strength (YS > 710 MPa and Δ YS = 40 MPa) maintaining good toughness levels (FATT = -60° C).

10

TABLE 9

WT (mm)	YS (MPa)	UTS (MPa)	50%FATT (°C)
15	710	798	- 60
25	690	788	- 65

Using a 25 mm wall thickness pipe with the same chemical composition and outside diameter, it was found that the Cr and Mo additions (compare this example with example 1, WT = 25 mm), for the same tempering temperature, i.e. 600 C, give a slightly strength increase (Δ YS = 30 MPa) without detrimental effect on toughness.

Example 6

Using a heat with chemical composition comprising 0.10% C, 1.27%Mn, 0.34% Si, 0.010% P, 0.025% Nb, 0.50% Mo, 0.32% Cr,

0.22% Ni, 70 ppm Ti, 9 ppm S, and pipes with outside diameter of 323.9 mm and wall thickness of 16 mm, it was found (Table 10) that further Mo additions (compare this example with example 5), even using a slightly higher tempering temperature (625 °C vs 600° C), give higher strength (YS = 760 MPa and Δ YS = 50 MPa) and also a better toughness (Δ FATT = - 60° C). This behavior, is related to an amount of martensite close to 100%.

TABLE 10

WT (mm)	YS (MPa)	UTS (MPa)	50%FATT (°C)
16	760	800	- 120
25	768	830	- 90

Using a 25 mm wall thickness pipe with the same chemical composition and outside diameter, it was found that Mo addition (compare this example with example 5, WT = 25 mm), for the same tempering temperature, i.e. 600 C, give again a strength increase (Δ YS = 80 MPa) with very good toughness (FATT = - 90 °C). This behavior is related to an amount of martensite higher than 65%.

While the invention has been illustrated and described as embodied, it is not intended to be limited to the details shown since various modifications and structural changes may be made without departing in any way from the spirit of the present invention. The

embodiments were chosen and described in order to best explain the principles of the invention and practical application to enable a person skilled in the art to best utilize the invention and various embodiments with various modifications as are suited to the particular
5 use contemplated.

Application No.: PCT/EP2006/007612
Applicant: Tenaris Connections AG
Our Ref.: PCT44183RKJHsto
Date: November 8, 2007

NEW CLAIMS 1 to 10

1. A weldable high strength seamless pipe comprising an alloy steel containing, by weigh per cent,

C	0.07-0.13%
Mn	0.90-1.40%
Si	≤ 0.40%
P	≤ 0.020%
S	≤ 0.005%
Ni	0.15-0.50%
Cr	0.25-0.60%
Mo	0.27-0.60%
Ca	≤ 0.035%
V	≤ 0.09%
Nb	≤ 0.030%
Ti	≤ 0.009%
N	≤ 0.011%

the balance being Fe and incidental impurities, characterized by the microstructure of the Q&T steel is more than 30% martensite and the yield stress is greater than 690 MPa for subgrains smaller than 1.5 μm and the packets with size smaller than 4.8 μm reach low FATT values ($< -30^{\circ}\text{C}$), weldable in a wide range of heat inputs with excellent pipe mechanical properties and good mechanical characteristics in the pipe body as well as of the girth weld.

2. A weldable high strength seamless pipe of claim 1, characterized by the microstructure of the alloy steel is more than 60% martensite and the yield stress is greater than 750 MPa for subgrains smaller than 1.1 μm and the packets with size smaller than 3 μm reach very low FATT values ($< -80^{\circ}\text{C}$),

3. The weldable high-strength seamless pipe of claim 1 or 2, characterized in having the alloy steel at least 70 ppm Ti.

4. The weldable high-strength seamless pipe of claim 1 or 2, characterized in having the alloy steel at least 0.27-wt% Mo.

5. The weldable high-strength seamless pipe of claim 1 or 2, characterized in having the alloy steel at least 0.022-wt% Nb.

6. The weldable high-strength seamless pipe of claim 1 or 2, characterized in having the alloy steel at least 0.01-wt% P.

7. The weldable high-strength seamless pipe of claim 1 or 2, characterized in having the alloy steel at least 0.25-wt% Cr.

8. The weldable high-strength seamless pipe of claim 1 or 2, characterized in having the alloy steel at least 0.15-wt% Ni.

9. A method for producing a weldable high-strength seamless pipe, comprising an alloy steel containing, by weight percent,

C	0.07-0.13%
Mn	0.90-1.40%
Si	≤ 0.40%
P	≤ 0.020%
S	≤ 0.005%
Ni	0.15-0.50%
Cr	0.25-0.60%
Mo	0.27-0.60%
Ca	≤ 0.035%
V	≤ 0.09%
Nb	≤ 0.030%
Ti	≤ 0.012%
N	≤ 0.011%

the balance being Fe and incidental impurities, characterized in the following steps:

- a) piercing and hot rolling
- b) austenitizing
- c) quenching in water tank with rotating pipe and tempering

obtaining a microstructure of a Q&T steel with more than 30% martensite and the yield stress is greater than 690 MPa for subgrains smaller than 1.5 μm and the packets with size smaller than 4.8 μm reach low FATT values ($\leq -30^\circ\text{C}$).

10. The use of an alloy steel comprising, by weight percent,

C	0.07-0.13%
Mn	0.90-1.40%
Si	$\leq 0.40\%$
P	$\leq 0.020\%$
S	$\leq 0.005\%$
Ni	0.15-0.50%
Cr	0.25-0.60%
Mo	0.27-0.60%
Ca	$\leq 0.035\%$
V	$\leq 0.09\%$
Nb	$\leq 0.030\%$
Ti	$\leq 0.012\%$
N	$\leq 0.011\%$

the balance being Fe and incidental impurities, for making weldable high-strength seamless pipes, also characterized in that the microstructure of the Q&T steel is more than 60% martensite and the yield stress is greater than 750 MPa for subgrains smaller than 1.1 μm and the packets with size smaller than 3 μm reach very low FATT values ($< -80^\circ\text{C}$).

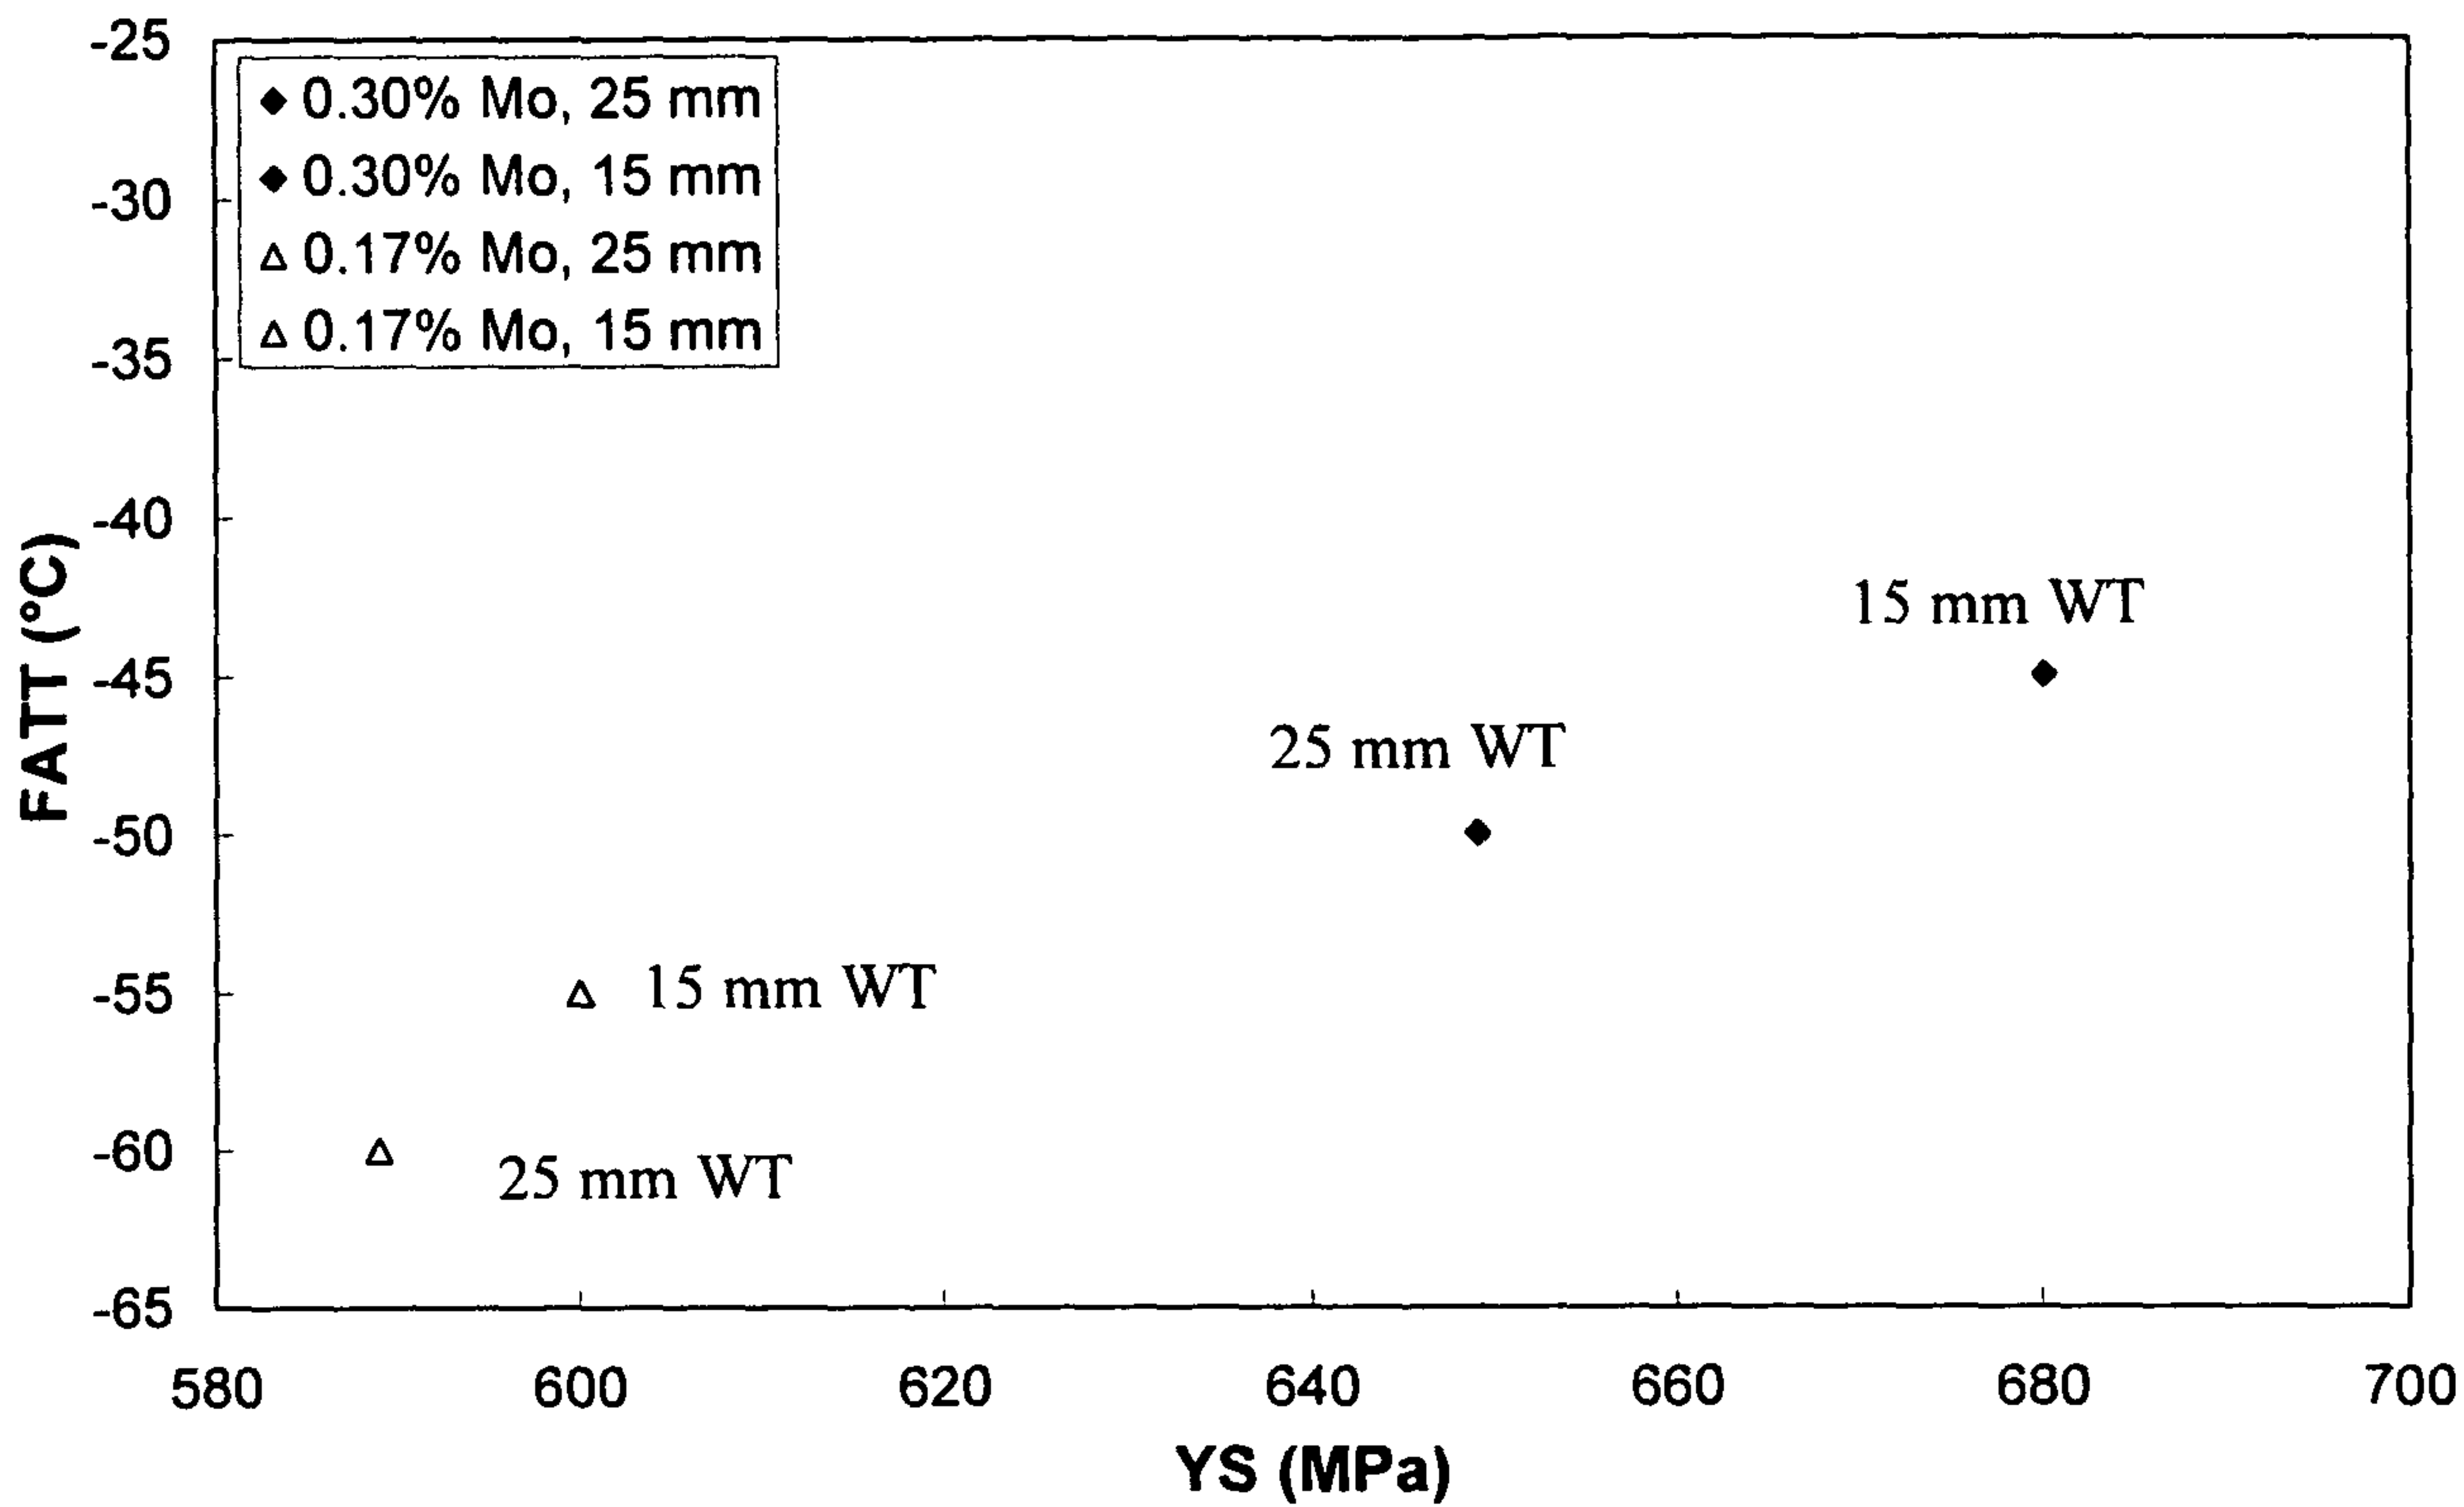


FIG. 1

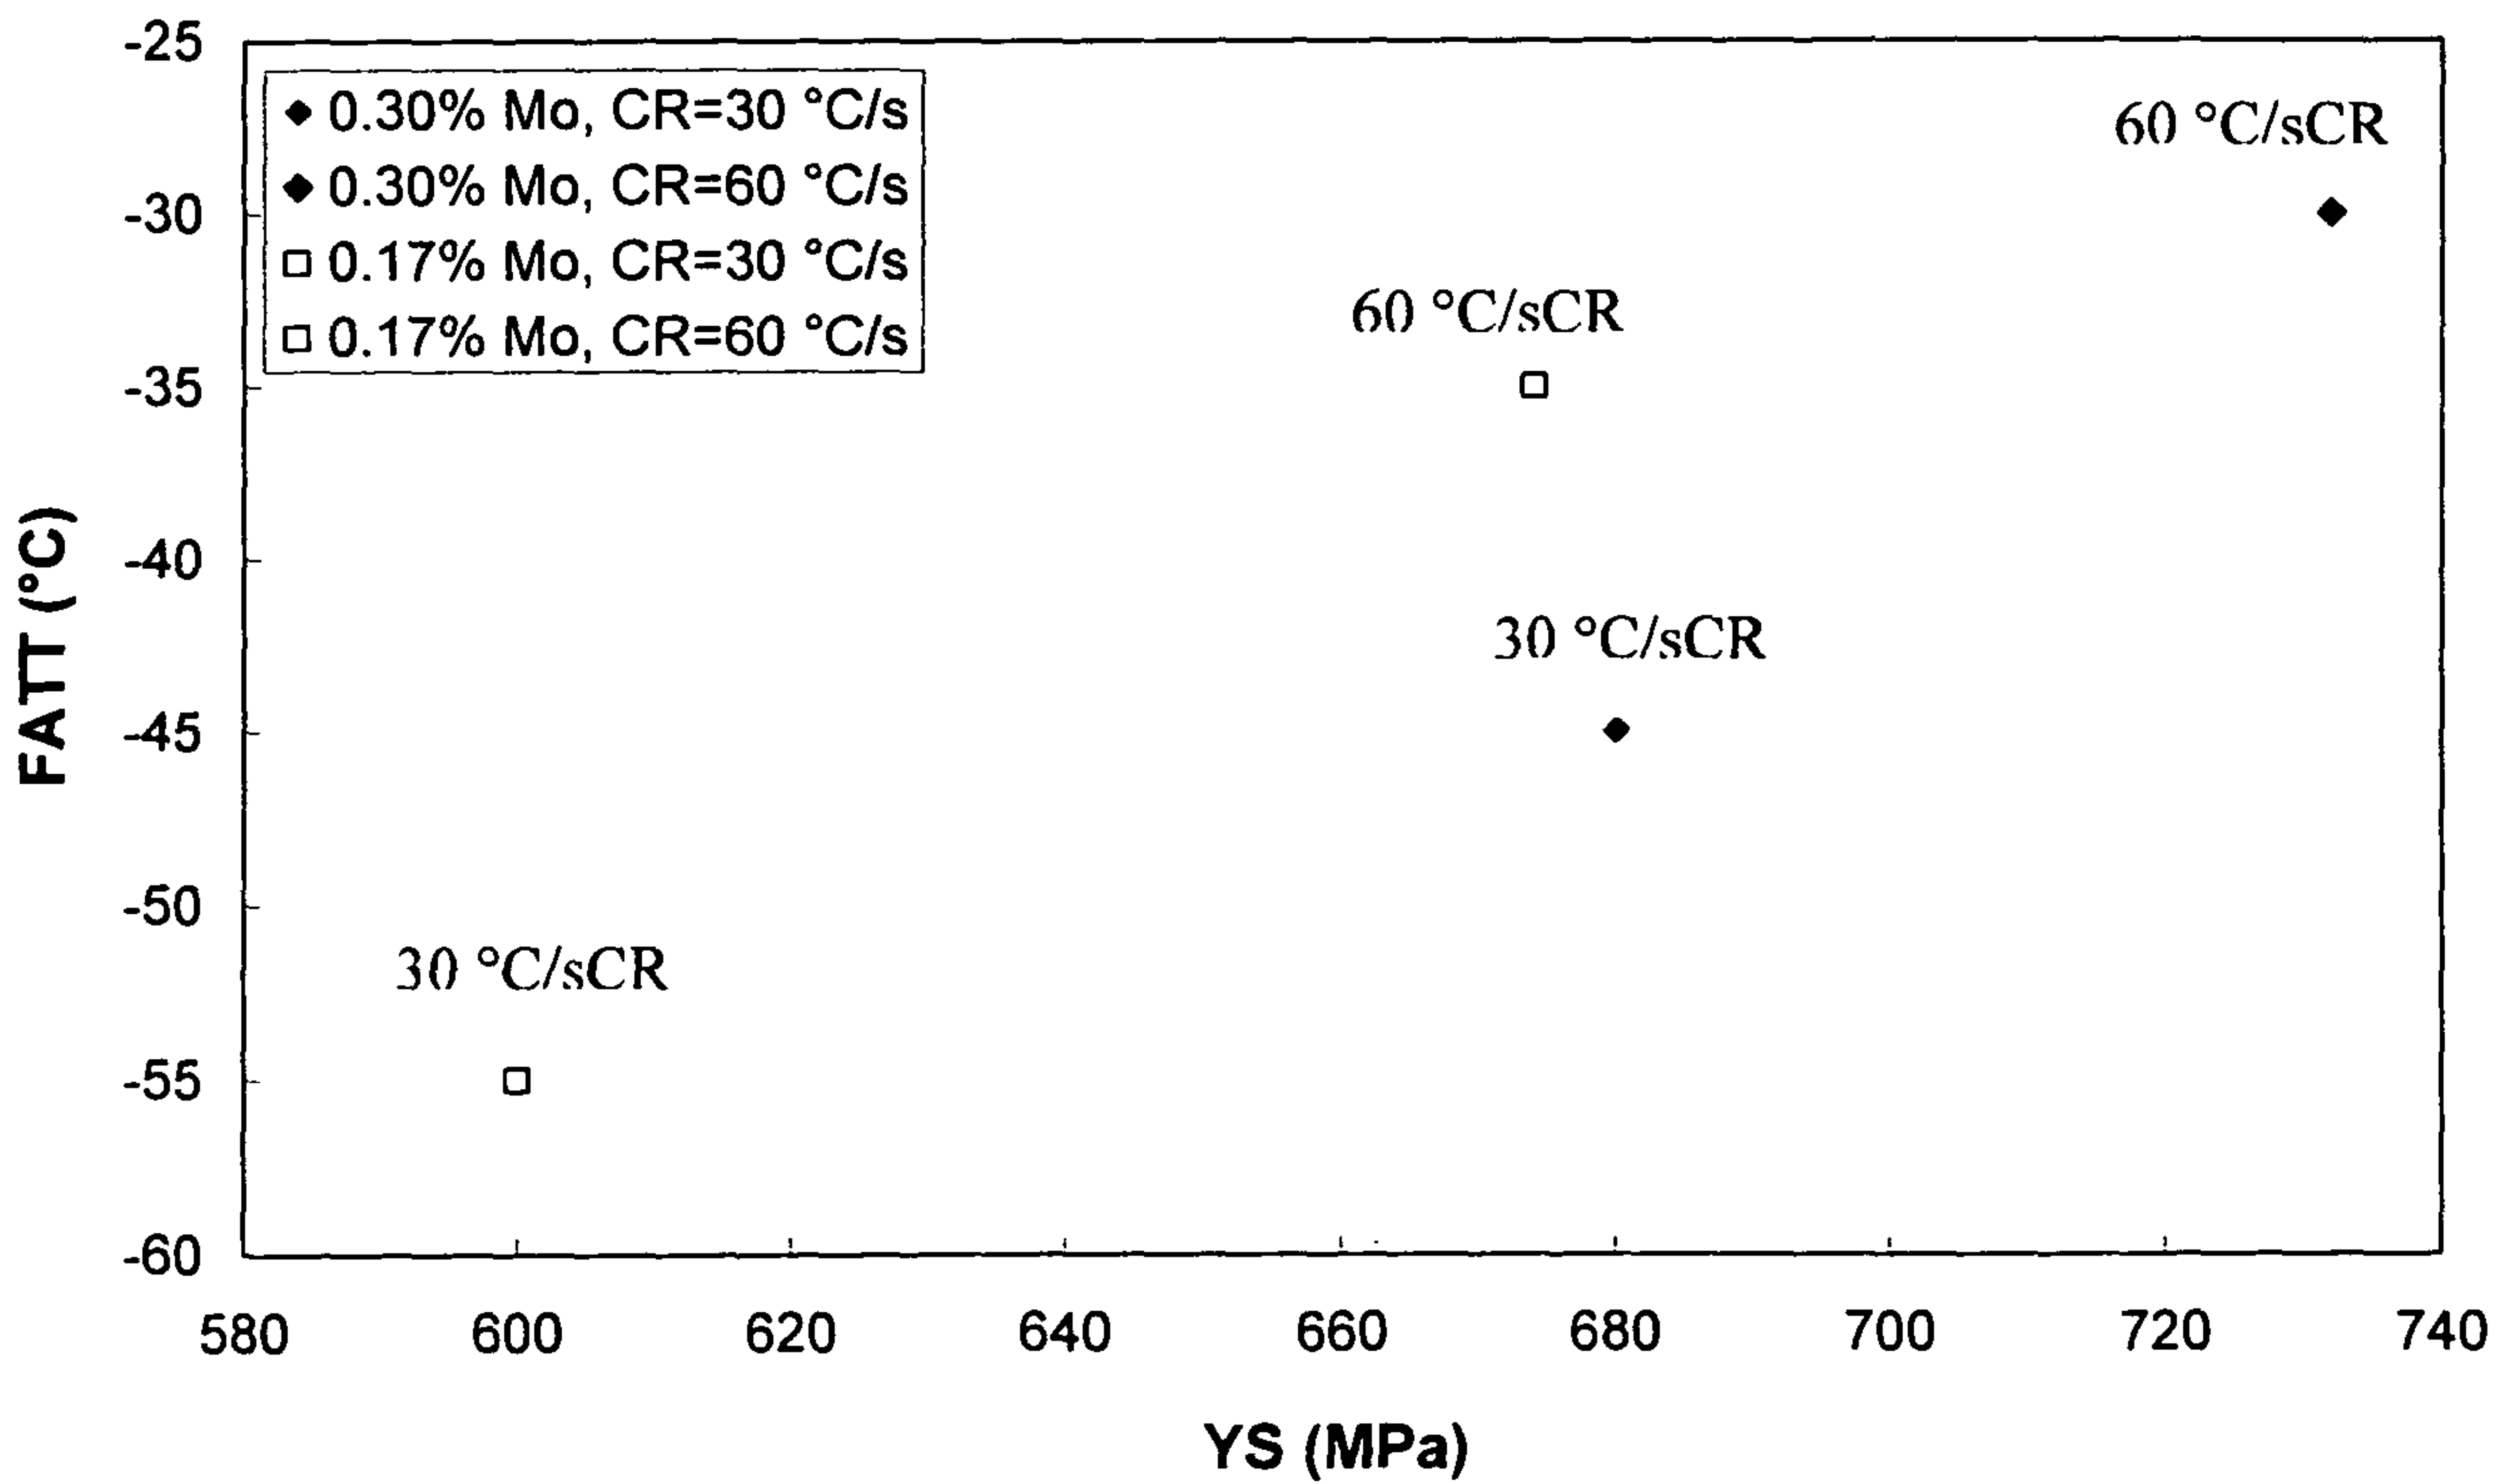


FIG. 2

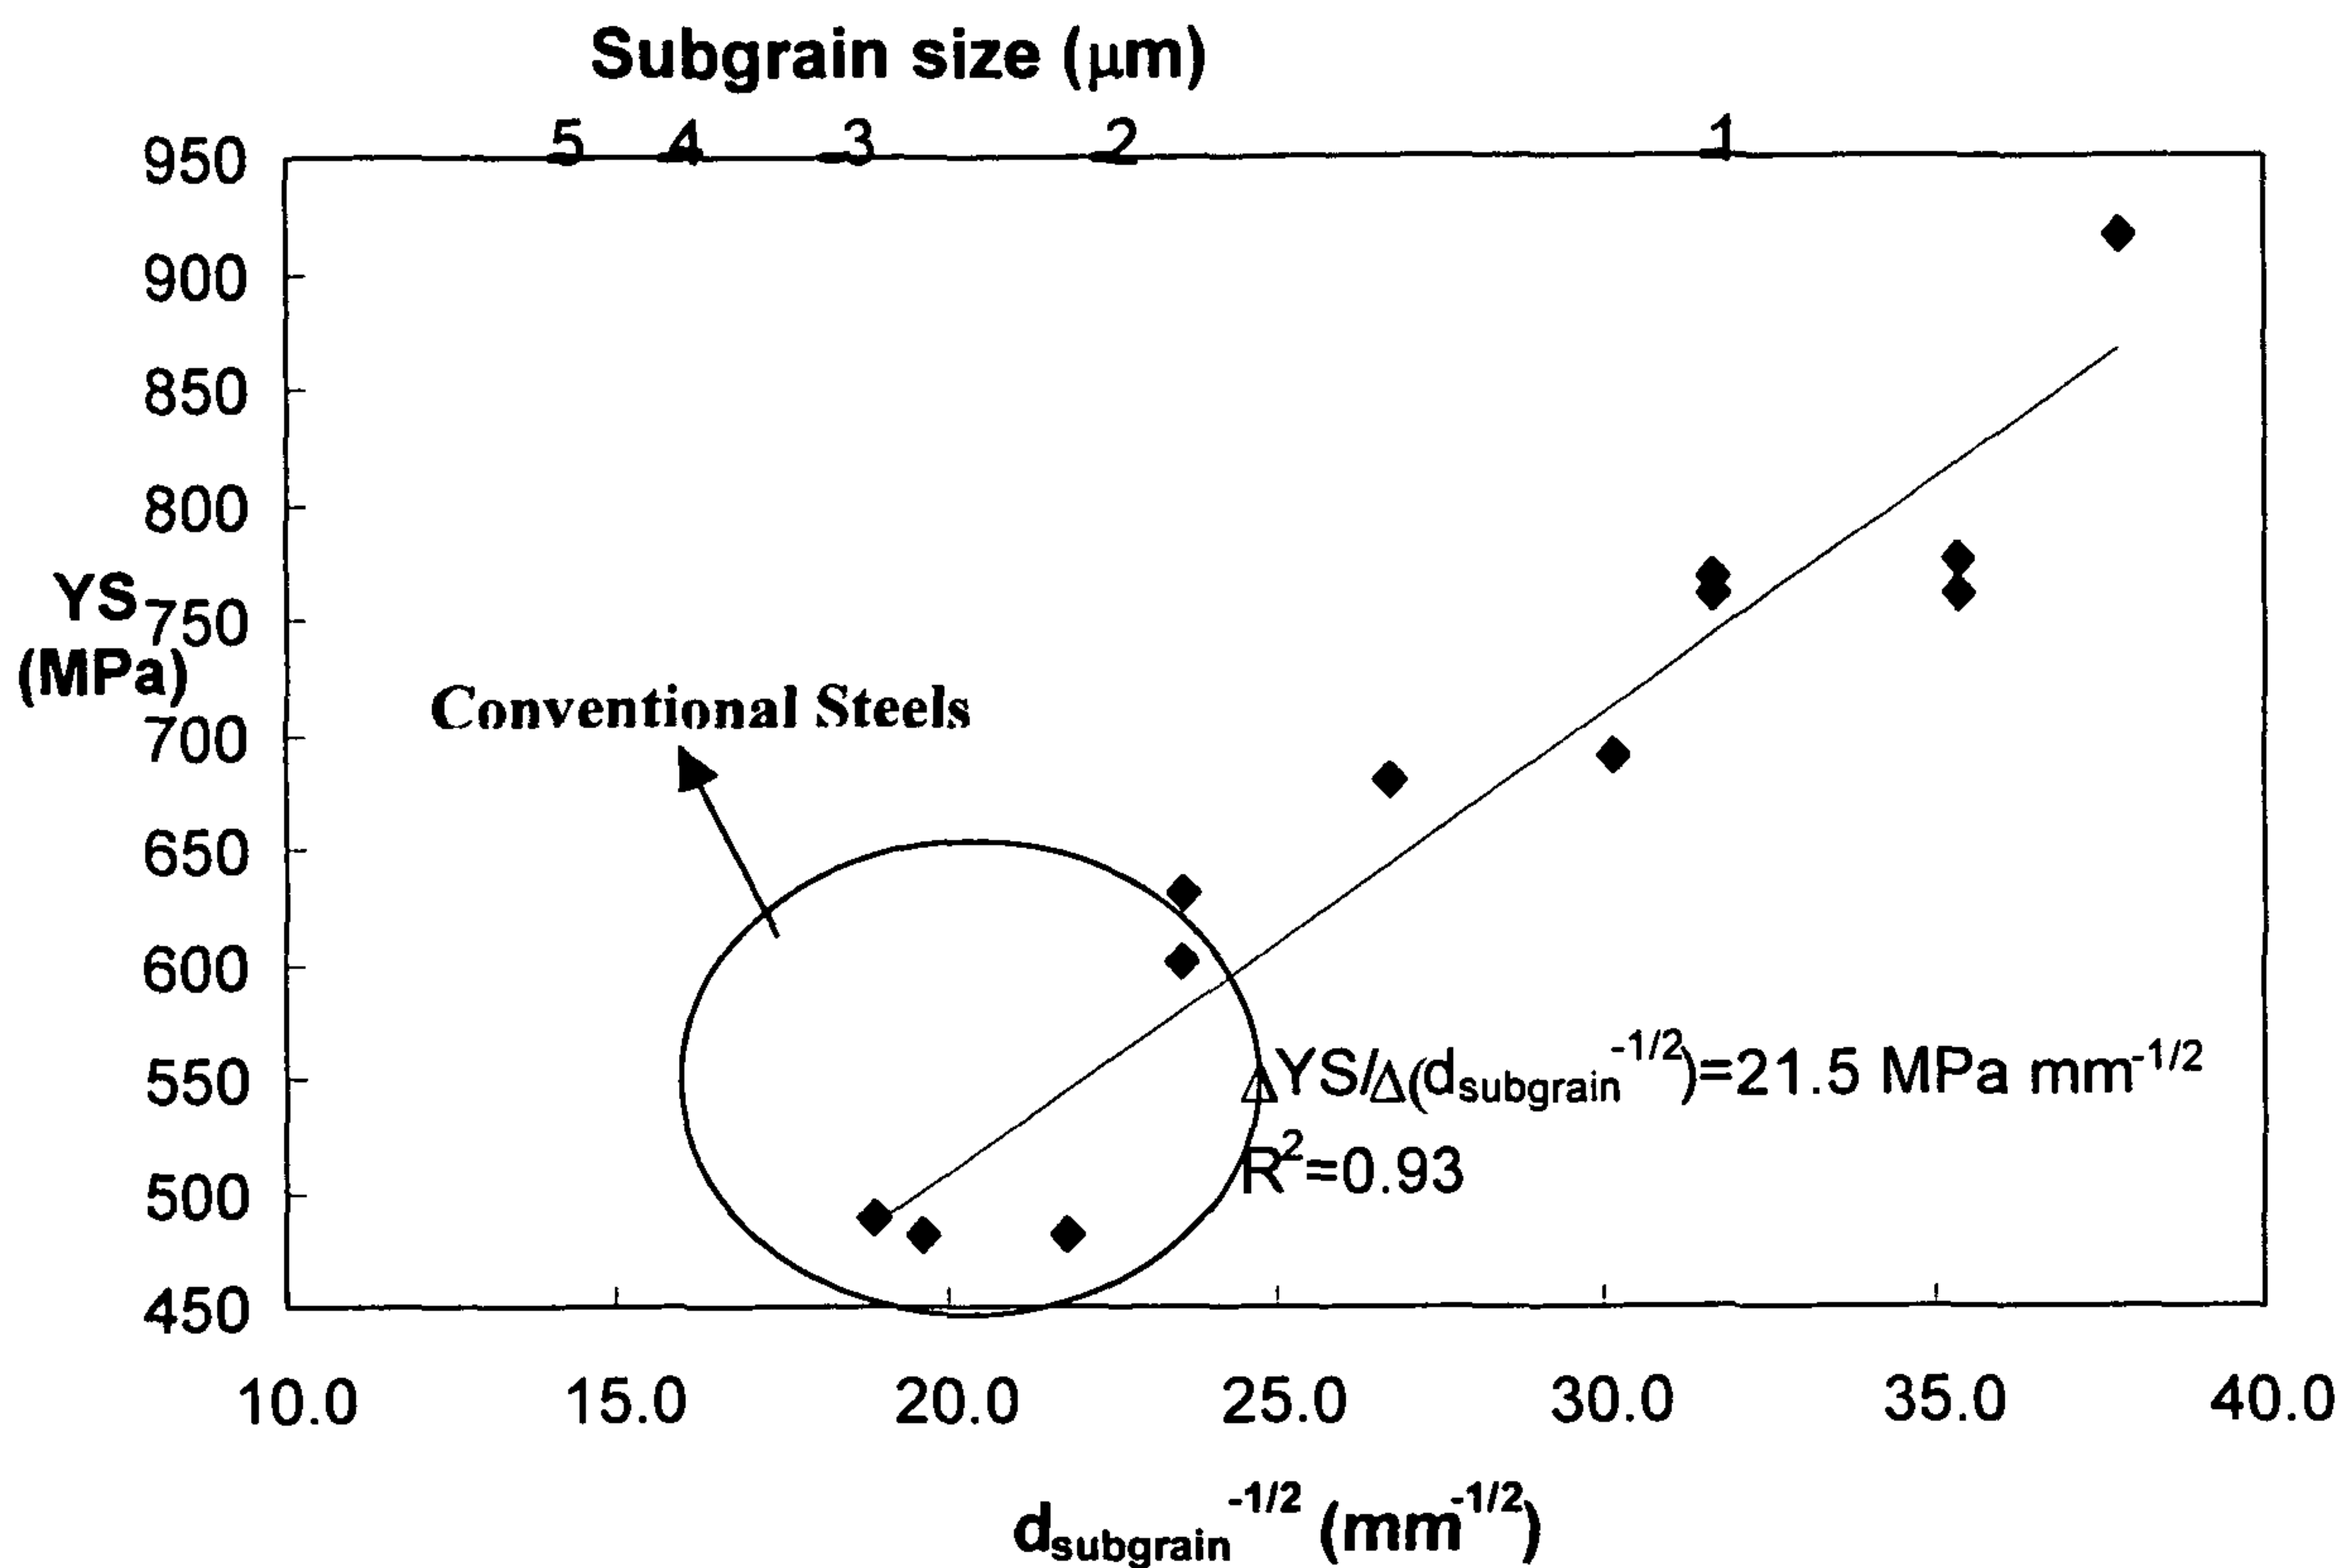


FIG. 3

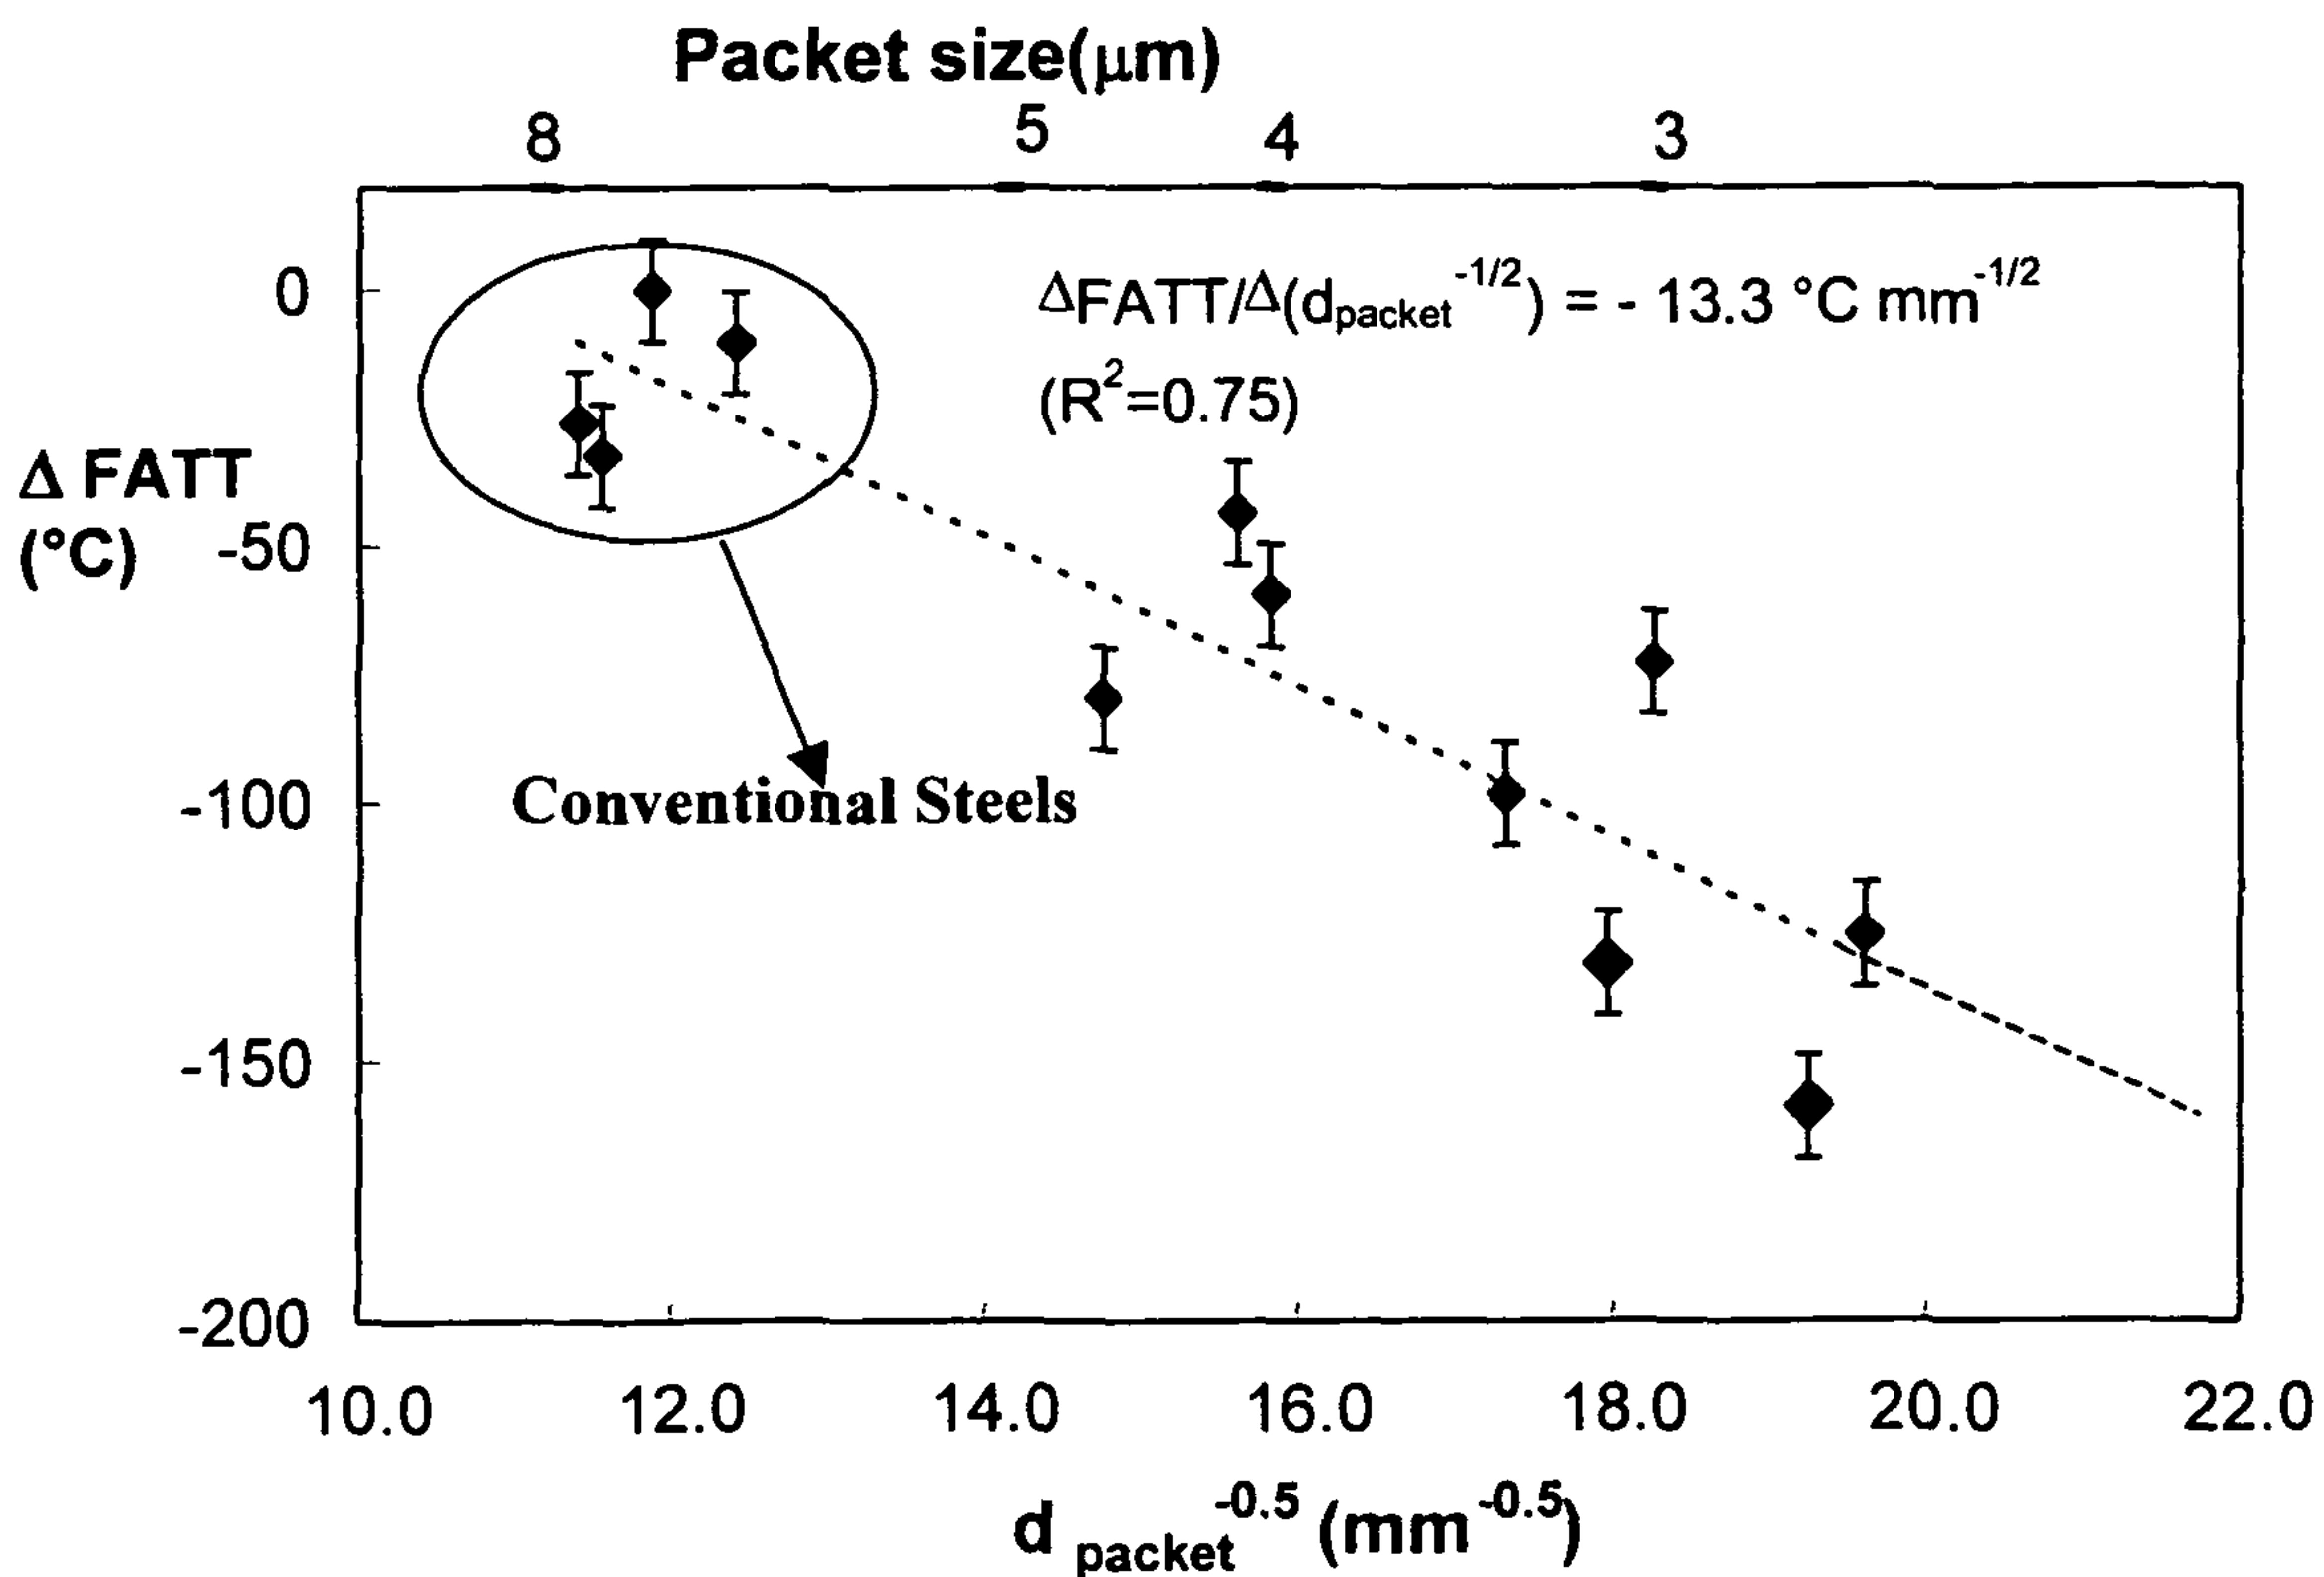


FIG. 4

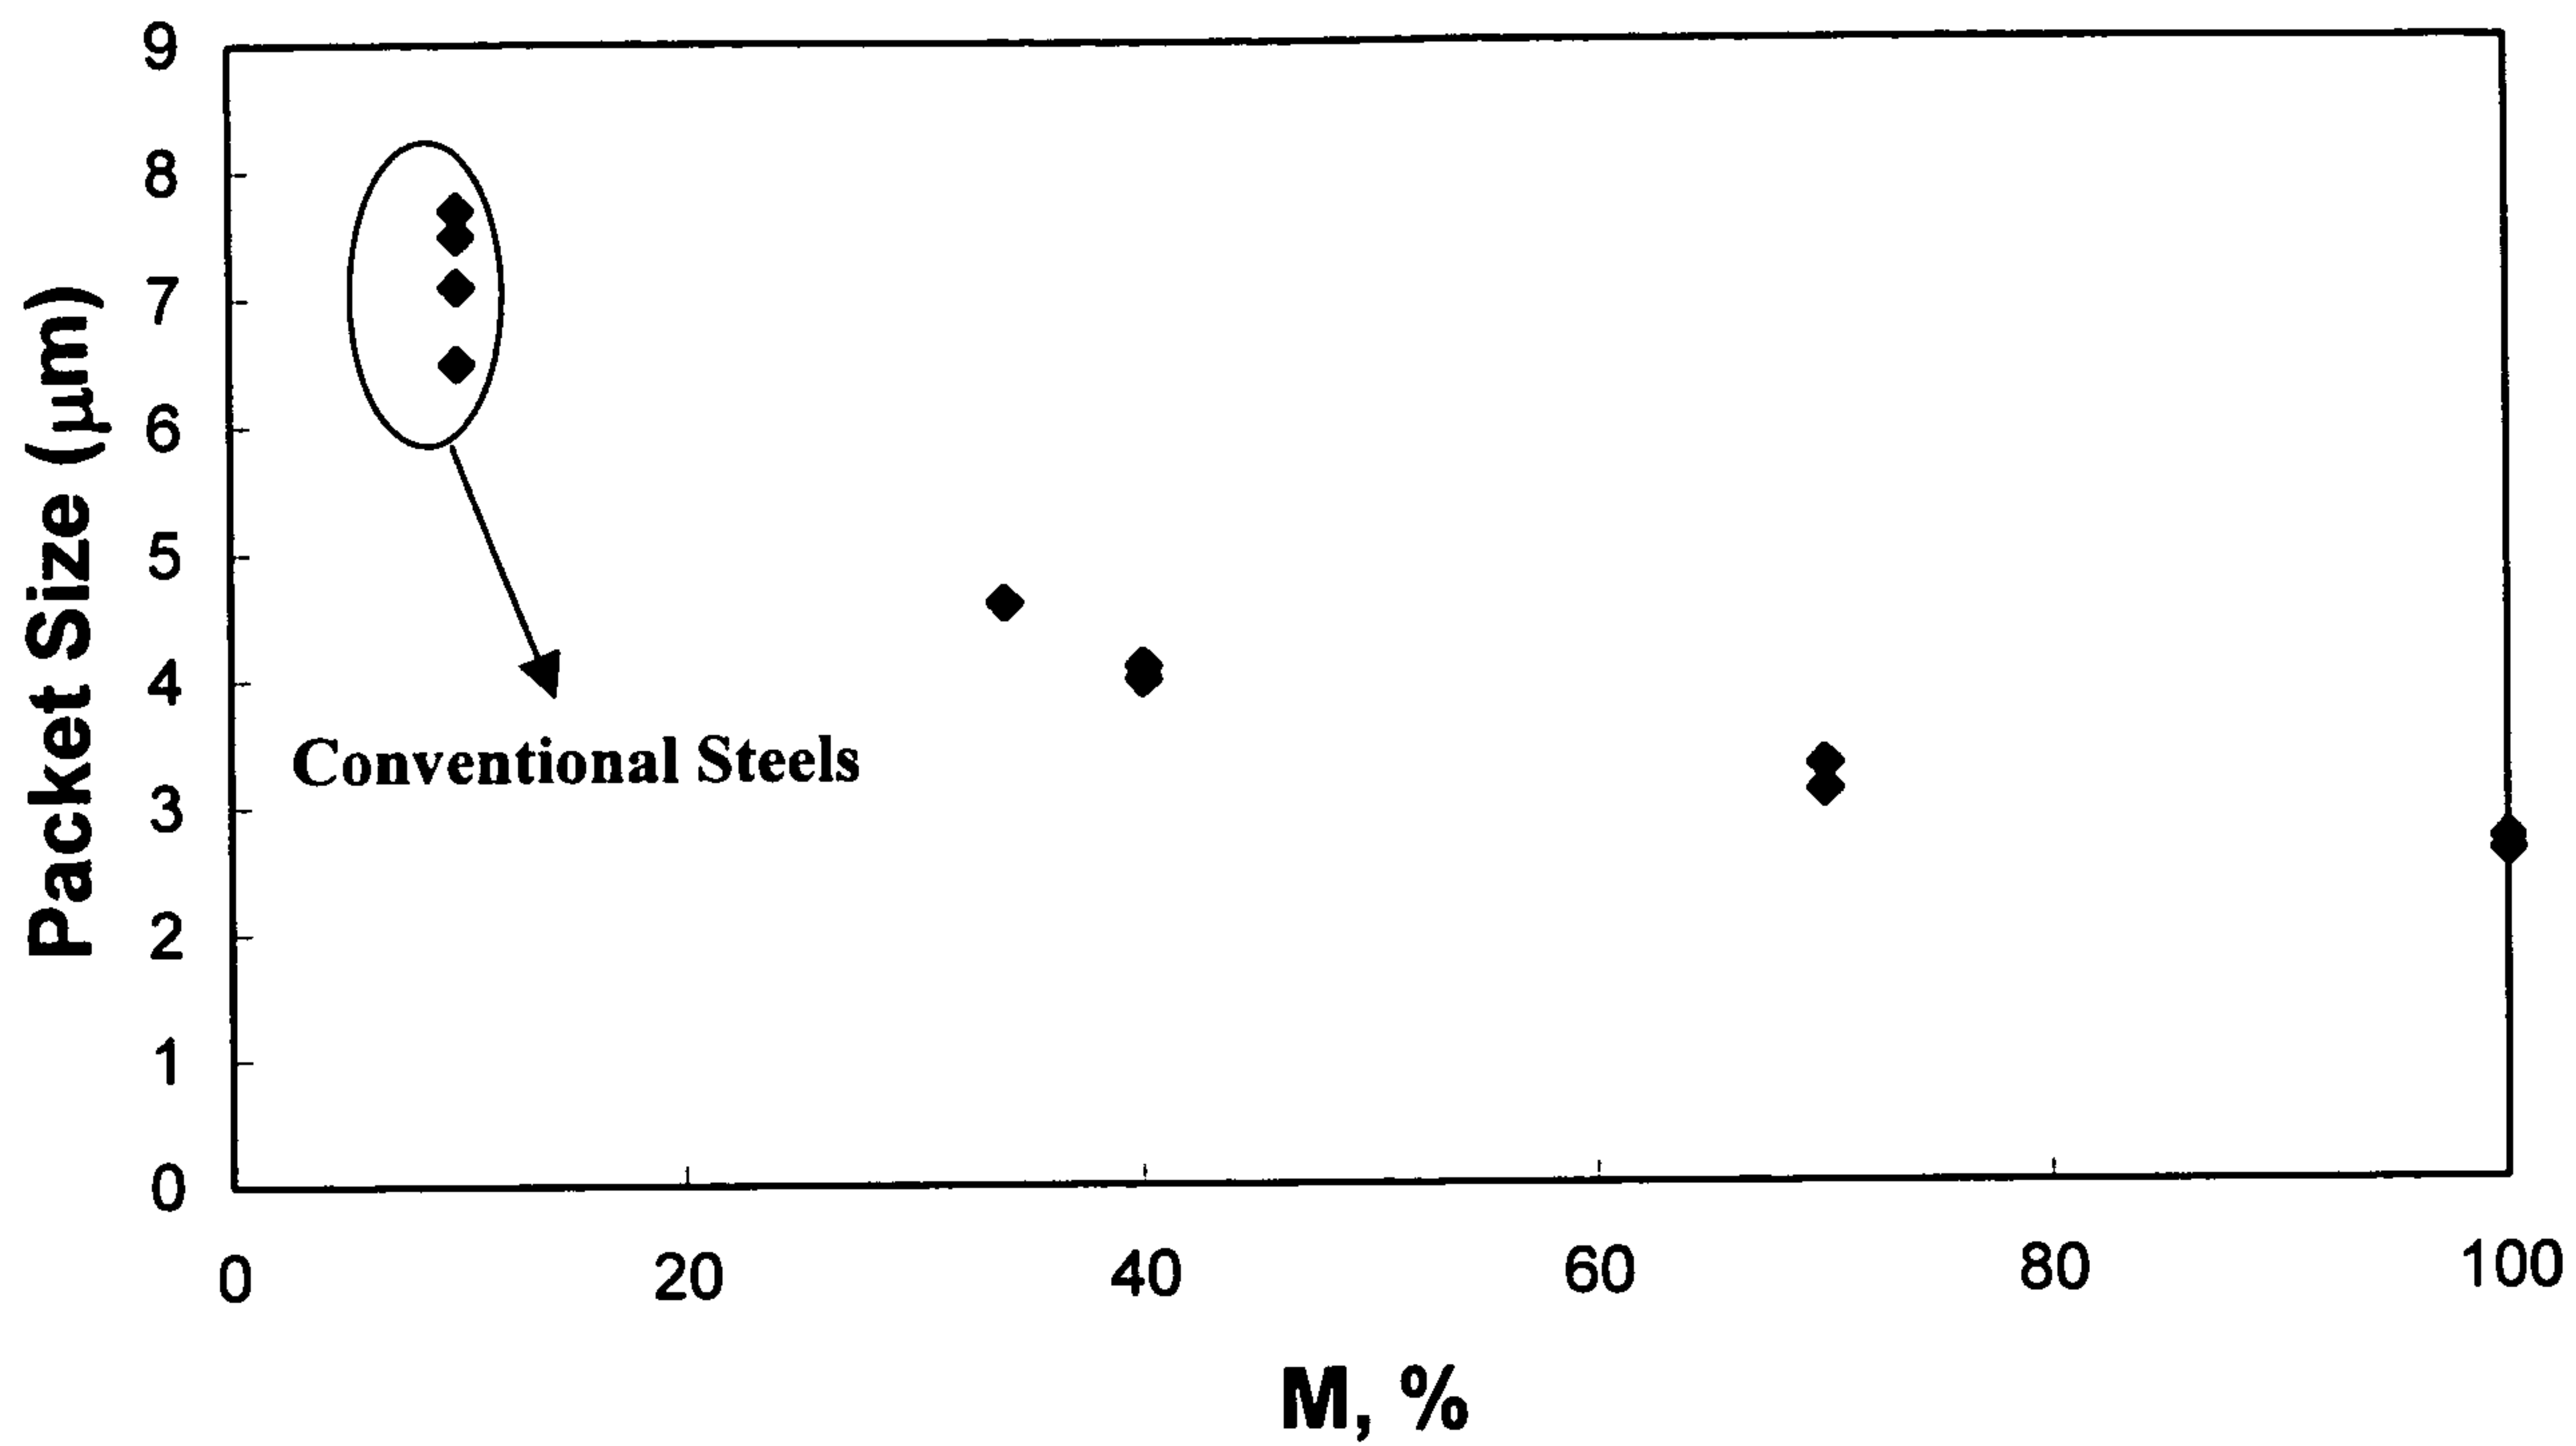


FIG. 5

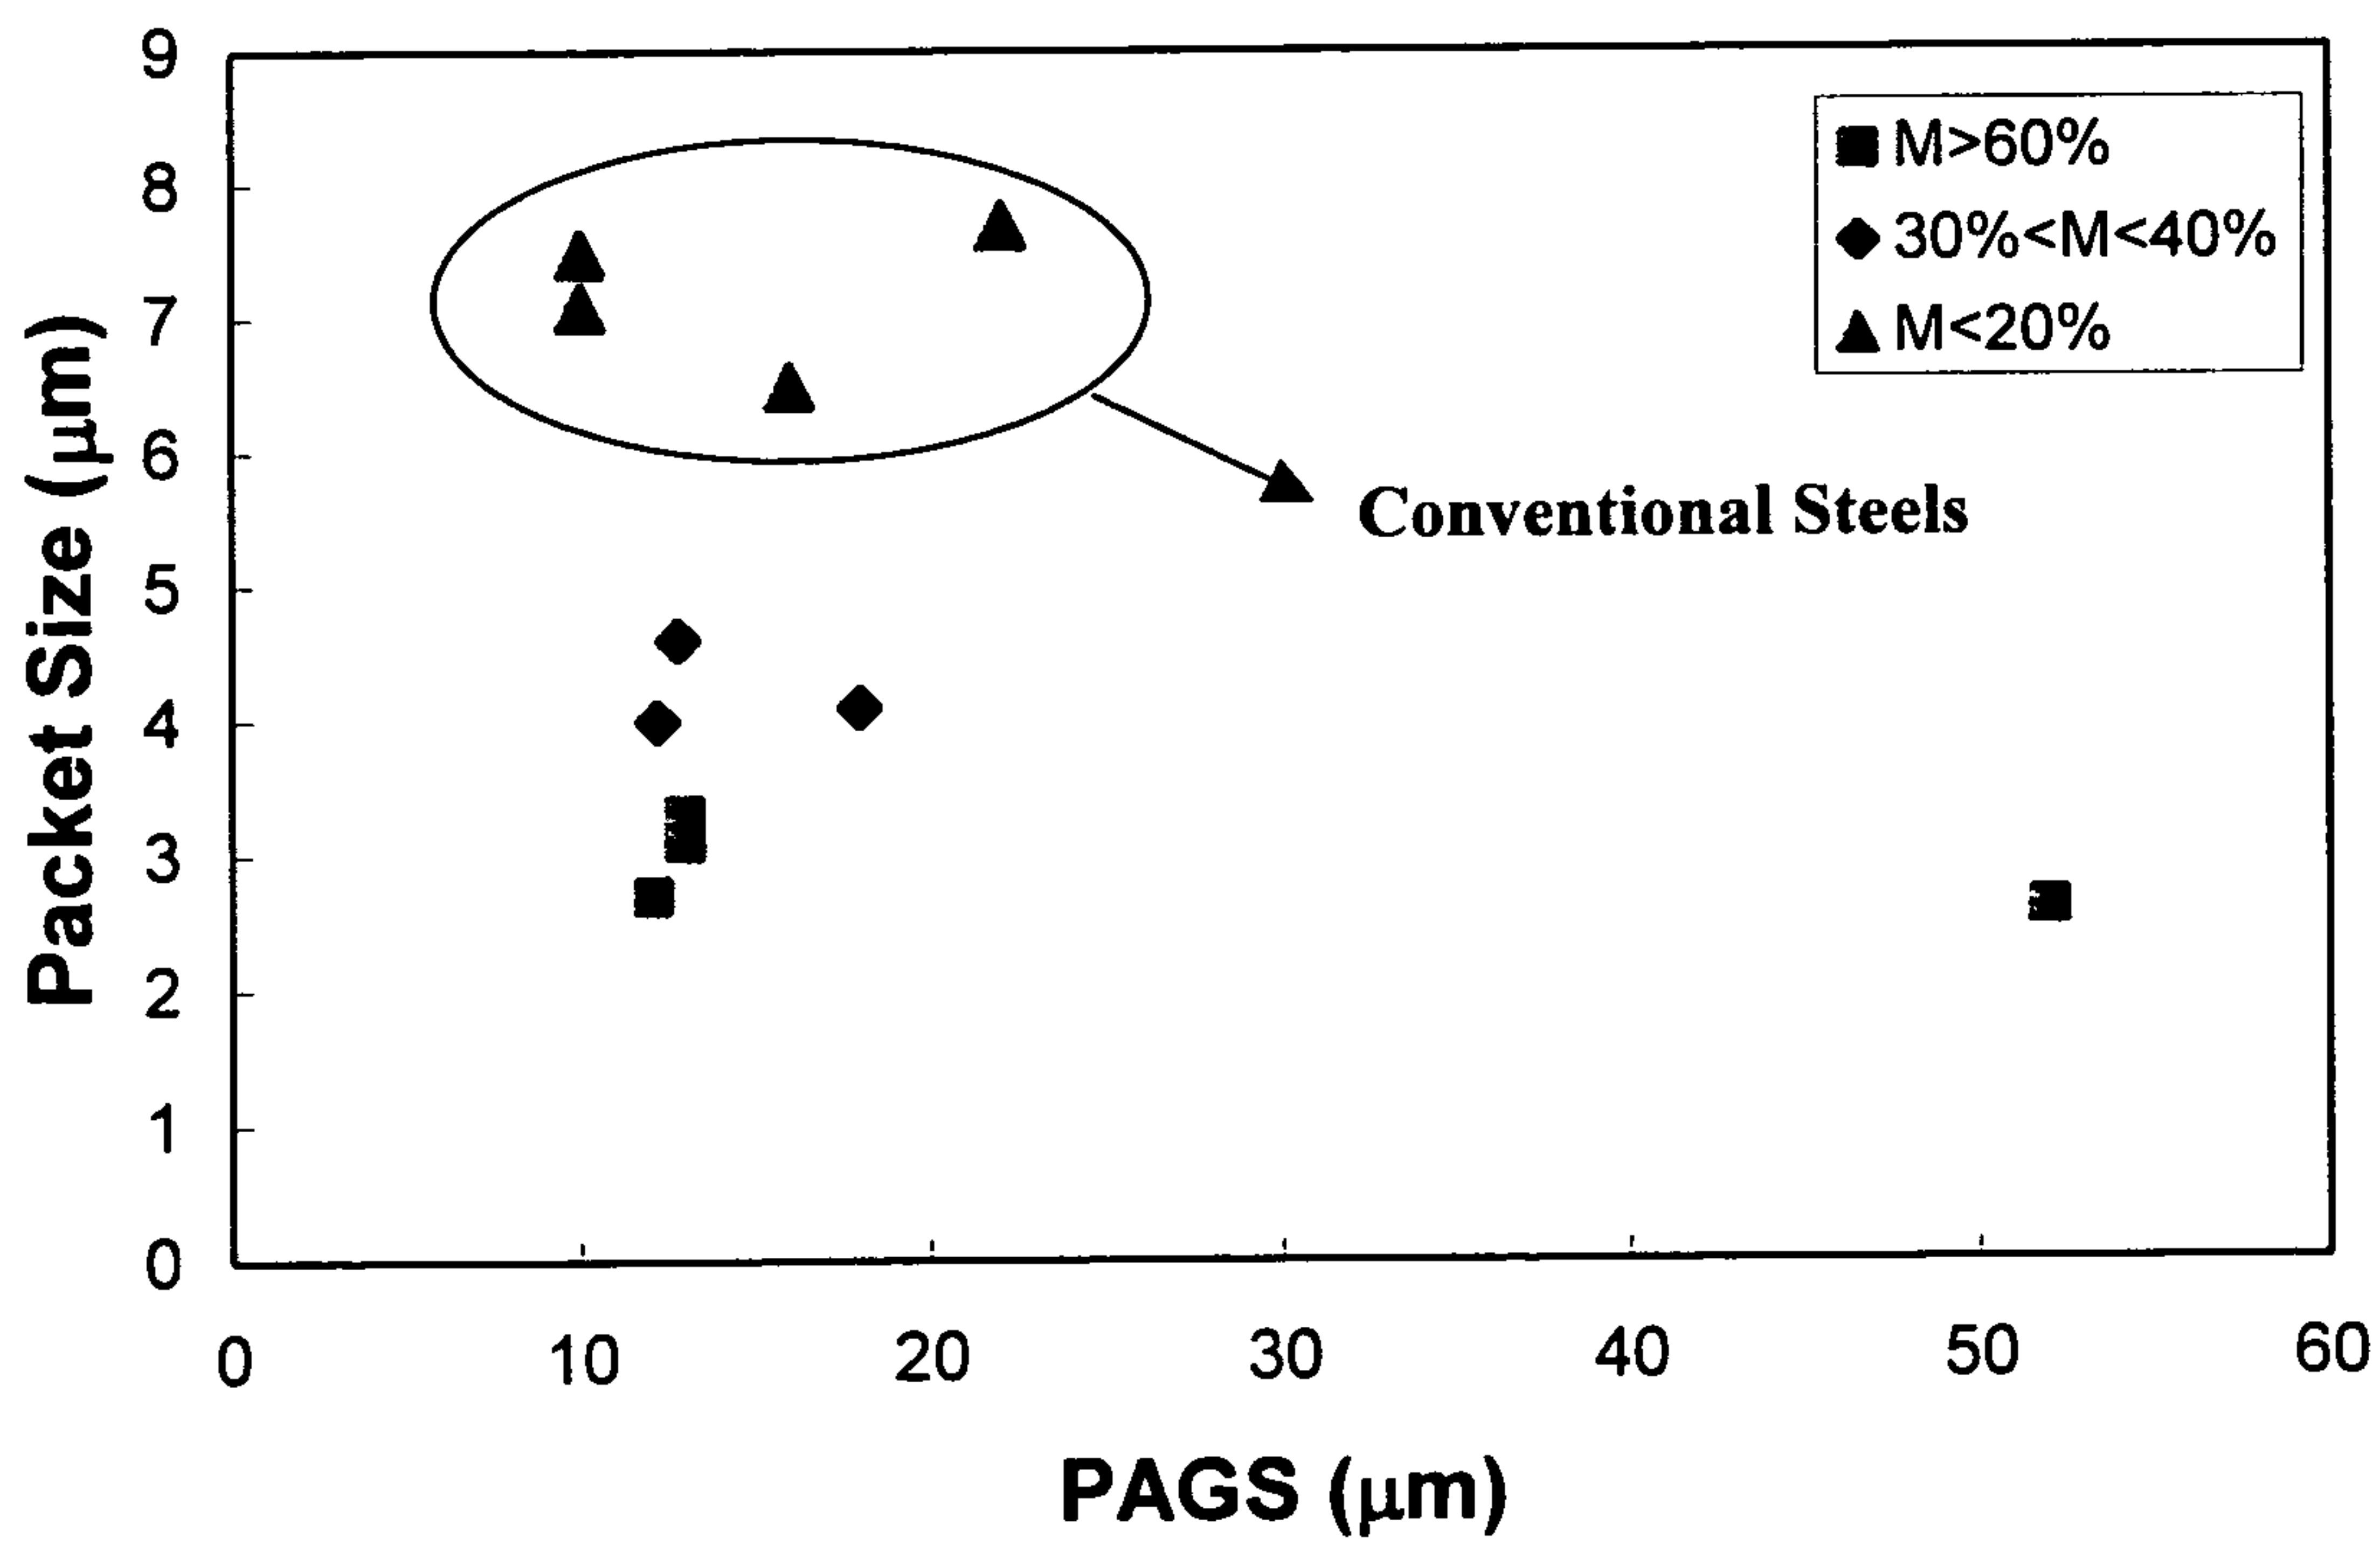


FIG. 6

