

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
23 September 2004 (23.09.2004)

PCT

(10) International Publication Number
WO 2004/080828 A1

(51) International Patent Classification⁷: **B65D 1/02**

(21) International Application Number:
PCT/US2003/035337

(22) International Filing Date:
5 November 2003 (05.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/387,242 12 March 2003 (12.03.2003) US

(71) Applicant (for all designated States except US): **CON-STAR INTERNATIONAL INC.** [US/US]; One Crown Way, Philadelphia, PA 19154-4599 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KAMINENI, Satya**

[IN/US]; 816 South Adams Street, #C504, Westmont, IL 60559 (US). **MOONEY, Michael** [US/US]; 21356 Bramble Drive, Frankfort, IL 60423 (US).


(74) Agent: **KNOBLE, John, L.**; Knoble & Yoshida, LLC, Suite 1350, Eight Penn Center, 1628 John F. Kennedy Boulevard, Philadelphia, PA 19103 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: CONTAINER EXHIBITING IMPROVED TOP LOAD PERFORMANCE

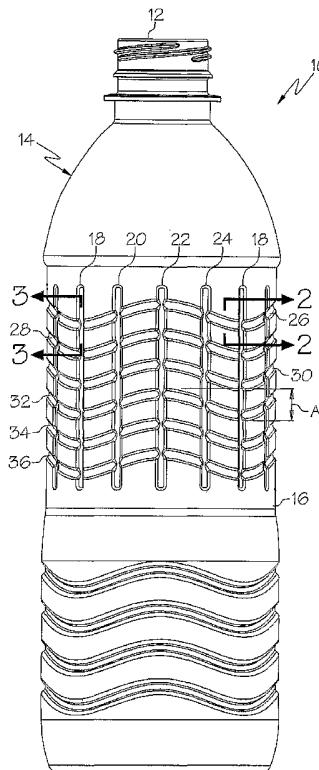

(57) Abstract: A plastic container (10) that exhibits an optimal ratio of hoop strength to top load strength includes a finish portion (12) and generally cylindrical main body portion (14). The main body portion includes a sidewall (16) that has a first plurality of generally vertical ribs (18, 20, 21, 24) defined therein. In addition, a second plurality of generally horizontal wave (26, 28, 30, 32, 34, 36) shaped ribs is defined in the sidewall. The generally horizontal wave shaped ribs intersect with the generally vertical ribs, thereby imparting enhanced strength characteristics to the container (10).

WO 2004/080828 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*

5 CONTAINER EXHIBITING IMPROVED TOP LOAD PERFORMANCE

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates generally to the field of consumer packaging. More 10 specifically, this invention relates to plastic containers of the type that are used to package consumer beverages, and the strength characteristics of such plastic containers.

2. Description of the Related Technology

Plastic containers are in wide use commercially throughout the world for packaging 15 liquids of all types, including consumer beverages. The most common type of plastic container that is used for packaging, for example, soft drinks, is fabricated from polyethylene terephthalate (PET) and is molded into a desired shape using a blowmolding process that is well known in the industry.

In the design of such containers, a number of factors are ordinarily considered. The 20 container must be chemically resistant and should be shaped to avoid concentration of stress that result in unwanted failure. In addition, the container must be strong enough to endure the packaging process and subsequent handling during the gross packaging, shipping and retail display stages.

One type of strength that plastic containers are regularly evaluated for it is that of top 25 load strength. Top load strength involves resistance to failure, typically sidewall buckling, when a vertical force is exerted onto the top of the container. Such vertical force is exerted onto the container during the filling process and when the closure is installed onto the container. In addition, a great deal of vertical force may be exerted onto filled containers when cases of the containers are stacked during shipping. Another type of strength that is

regularly evaluated in the design of plastic containers is hoop strength. Hoop strength is the resistance provided by the container against the tendency of the container sidewall to bow outwardly or deflect inwardly when the contents of the container are under pressurization or when external forces are applied to the outside of the container, which of course is a common 5 scenario in the packaging and transportation of carbonated soft drinks.

It is generally known in the industry that circumferential reinforcement such as ribbing tends to increase hoop strength, and that vertical reinforcement has a favorable effect on top load strength. However, it should be understood that there is a to economic disincentive to provide any more reinforcement to a plastic container design than is 10 absolutely necessary, because increased reinforcement tends to make the container heavier and thus more expensive to manufacture. A need exists, then, for a plastic container design that optimizes hoop strength and top load strength while minimizing the amount of plastic material that is necessary to fabricate the container.

15

SUMMARY OF THE INVENTION

Accordingly, it is an object of the invention to provide a plastic container design that optimizes hoop strength and top load strength while minimizing the amount of plastic material that is necessary to fabricate the container.

20 In order to achieve the above and other objects of the invention, a plastic container that is constructed according to a first aspect of the invention includes a finish portion; and a generally cylindrical main body portion, said main body portion comprising a sidewall having a first plurality of generally vertical ribs defined therein, the sidewall further having a second plurality of generally horizontal wave shaped ribs defined therein, at least one of the generally 25 horizontal wave shaped ribs intersecting with at least one of the generally vertical ribs, whereby enhanced strength characteristics are imparted to the container.

These and various other advantages and features of novelty that characterize the invention are pointed out with particularity in the claims annexed hereto and forming a part hereof. However, for a better understanding of the invention, its advantages, and the objects

obtained by its use, reference should be made to the drawings which form a further part hereof, and to the accompanying descriptive matter, in which there is illustrated and described a preferred embodiment of the invention.

5

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a side elevational view of a plastic container that is constructed according to a preferred embodiment of the invention;

FIGURE 2 is a cross-sectional view taken along lines 2-2 in FIGURE 1;

FIGURE 3 is a cross-sectional view taken along blinds 3-3 in FIGURE 1; and

10 FIGURE 4 is a diagrammatical depiction of one of the wave-shaped ribs with the circumference of the container represented along the x-axis.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

Referring now to the drawings, wherein like reference numerals designate

15 corresponding structure throughout the views, and referring in particular to FIGURE 1, a plastic container 10 that is constructed according to a preferred embodiment of the invention includes a finish portion 12 and a generally cylindrical main body portion 14 having an outer sidewall 16. Preferably, plastic container 10 is fabricated from a plastic material such as polyethylene terephthalate. As may be seen in FIGURE 1, body portion 14 has a first plurality of generally vertical ribs 18, 20, 22, 24 defined therein. Vertical ribs 18, 20, 22, 24, as shown in the cross-sectional view provided in FIGURE 3, are substantially concave, having a radius of depth R_2 , and extend generally radially inwardly toward the center axis of the container 10. The vertical ribs are preferably parallel to each other and evenly spaced from each other over the outer circumference of the main body portion 14 of the container 10.

25

As may further be seen in FIGURE 1, the sidewall 16 further has a second plurality of generally horizontal wave shaped ribs 26, 28, 30, 32, 34, 36 defined therein. The generally horizontal wave shaped ribs 26, 28, 30, 32, 34, 36 preferably extend so as to be parallel with each other and are substantially evenly spaced from each other. It follows, then, that each of

the wave shaped ribs has a common amplitude A and wavelength with each of the other wave shaped ribs, with the amplitude A being defined as the peak to peak vertical distance between the uppermost point of the wave crest to the lowermost point of the adjacent wave trough and the wavelength being defined as the circumferential peak to peak distance traveled by the rib 5 from wave crest to wave crest. Each horizontal wave shaped rib is substantially concave, having a radius of depth R_1 , and extending inwardly toward the center axis of the container 10. As may be seen in FIGURE 1, at least one of the generally horizontal wave shaped ribs intersects with at least one of said generally vertical ribs, whereby enhanced strength intersects with at least one of said generally vertical ribs, whereby enhanced strength characteristics are imparted to the container.

10 In the preferred embodiment, it will be seen that each of the generally horizontal wave shaped ribs 26, 28, 30, 32, 34, 36 intersects with each of the 16 vertical ribs. Preferably, a plurality, and more preferably at least three of the vertical ribs intersect each wave shaped rib within each wavelength. According to one important aspect of the invention, the location or placement of the vertical ribs is harmonized with respect to the waveform of at least one of 15 the horizontal ribs. In the preferred embodiment, the vertical ribs 18, 20, 22, 24 will intersect each of the generally horizontal wave shaped ribs 26, 28, 30, 32, 34, 36 in a repeating pattern such that each of the vertical ribs 18 intersects each wave shaped rib at the lowermost point of the wave trough, and so that each of the vertical ribs 20 intersects each wave shaped rib at a median location between the wave trough and an adjacent wave peak. Also, each vertical rib 20 will intersect each wave shaped rib at the wave peak and each vertical rib 24 will intersect each wave shaped rib at a median location between the wave peak and the next wave trough. Accordingly, at least one of the generally vertical ribs 18, 20, 22, 24 intersects at least one of 25 the generally horizontal wave shaped ribs 26, 28, 30, 32, 34, 36 at a location of maximum amplitude of the wave shaped rib, and another one of the generally vertical ribs intersects the horizontal wave shaped rib at a location of minimum amplitude. This is believed to maximize both the hoop strength and top load strength that is achievable by the structure.

As may be visualized in FIGURE 1, sidewall 16 of the generally cylindrical main body portion 14 has an outer circumference. As is shown in FIGURE 4, which is a diagrammatical depiction of one of the wave-shaped ribs with the circumference of the

container represented along the x-axis, each wave-shaped rib preferably has a repeating wavelength λ and a common amplitude A. An angle θ is defined by a triangle, two legs of which are equal to the amplitude A and one-half the wavelength λ . Preferably, the amplitude A of the wave shaped ribs is within a range of about 4.5 percent to about 30 percent of the wavelength λ , which corresponds to angle θ being within a range of about 5 degrees to about 30 degrees. The wavelength λ should preferably be about 6 percent to about 40 percent of the outer circumference of the container.

It is to be understood, however, that even though numerous characteristics and advantages of the present invention have been set forth in the foregoing description, together with details of the structure and function of the invention, the disclosure is illustrative only, and changes may be made in detail, especially in matters of shape, size and arrangement of parts within the principles of the invention to the full extent indicated by the broad general meaning of the terms in which the appended claims are expressed.

WHAT IS CLAIMED IS:

1. A plastic container, comprising:
 - a finish portion; and
 - a generally cylindrical main body portion, said main body portion comprising a sidewall having a first plurality of generally vertical ribs defined therein, said sidewall further having a second plurality of generally horizontal wave shaped ribs defined therein, at least one of said generally horizontal wave shaped ribs intersecting with at least one of said generally vertical ribs, whereby enhanced strength characteristics are imparted to the container.
2. A plastic container according to claim 1, wherein said container is fabricated from a plastic material comprising polyethylene terephthalate.
3. A plastic container according to claim 1, wherein said first plurality of generally vertical ribs comprise at least one rib that is inwardly oriented.
4. A plastic container according to claim 1, wherein said second plurality of generally horizontal wave shaped ribs comprise at least one rib that is inwardly oriented.
5. A plastic container according to claim 1, wherein said second plurality of generally horizontal wave shaped ribs comprise a plurality of wave shaped ribs that extend generally parallel to each other.
6. A plastic container according to claim 1, wherein said second plurality of generally horizontal wave shaped ribs are shaped so as to have a common amplitude and a common wavelength.
7. A plastic container according to claim 6, wherein said common amplitude A is within a range of about 4.5 percent to about 30 percent of the common wavelength.

8. A plastic container according to claim 6, wherein said sidewall has an outer circumference, wherein said wavelength is within a range of about 6 percent to about 40 percent of said outer circumference.
9. A plastic container according to claim 1, wherein at least one of said generally vertical ribs intersects at least one of said generally horizontal wave shaped ribs at a location of maximum amplitude of said wave shaped rib.
10. A plastic container according to claim 1, wherein at least one of said generally vertical ribs intersects at least one of said generally horizontal wave shaped ribs at a location of minimum amplitude of said wave shaped rib.
11. A plastic container according to claim 1, wherein at least one of said generally horizontal wave shaped ribs has a periodic wavelength, and wherein a plurality of said vertical ribs intersect said wave shaped rib within each wavelength.
12. A plastic container according to claim 11, wherein at least three of said vertical ribs intersect said wave shaped rib within each wavelength.
13. A plastic container according to claim 11, wherein the location of said vertical ribs is harmonized with respect the waveform of at least one of said horizontal ribs.
14. A plastic container according to claim 1, wherein the location of said vertical ribs is harmonized with respect the waveform of at least one of said horizontal ribs.

1 / 2

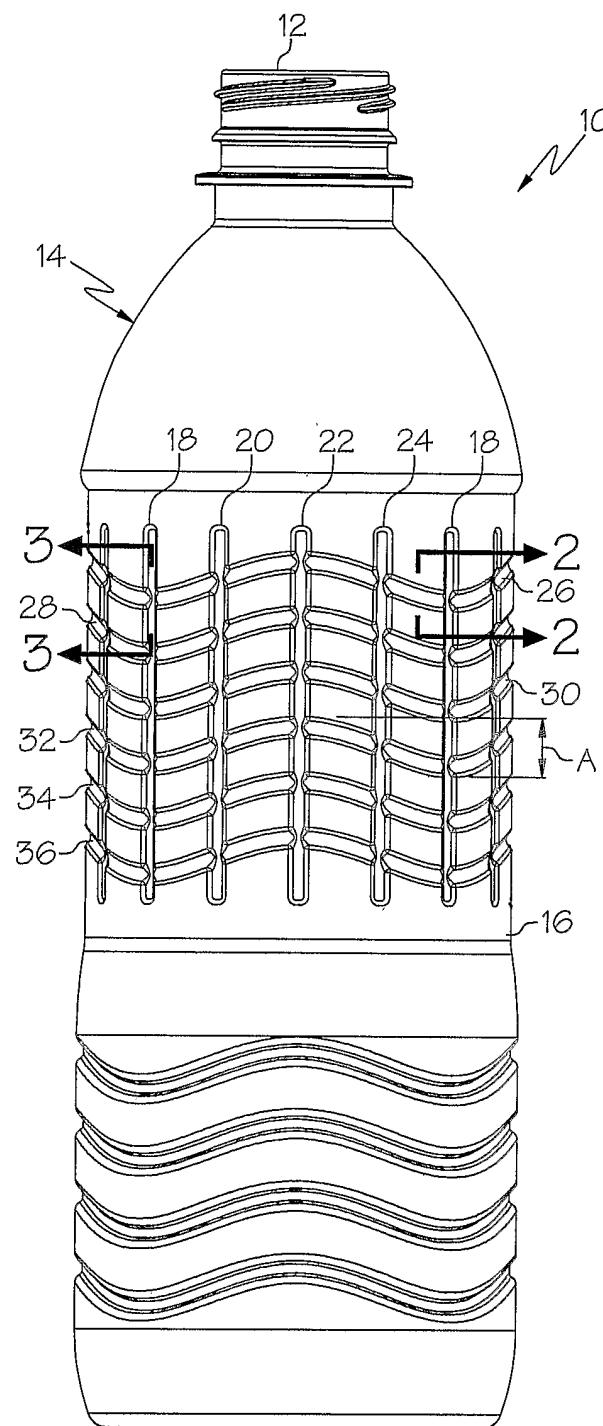


FIG. 1

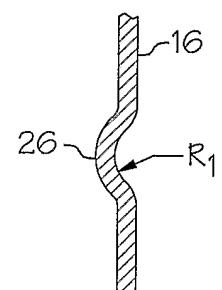


FIG. 2

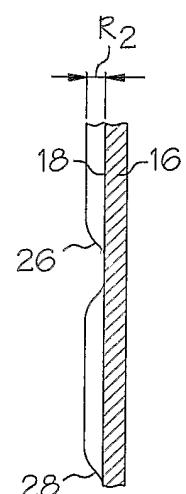


FIG. 3

2 / 2

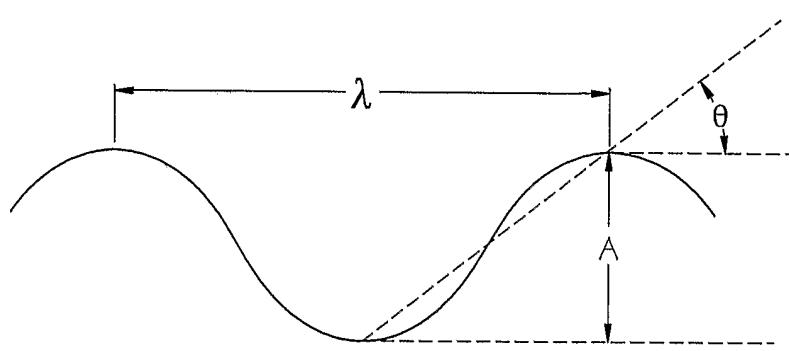


FIG. 4

INTERNATIONAL SEARCH REPORT

In **1st Application No**
PCT/US 03/35337

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B65D1/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>PATENT ABSTRACTS OF JAPAN vol. 1998, no. 13, 30 November 1998 (1998-11-30) -& JP 10 203519 A (DAINIPPON PRINTING CO LTD), 4 August 1998 (1998-08-04) abstract</p> <p>---</p> <p>PATENT ABSTRACTS OF JAPAN vol. 1998, no. 01, 30 January 1998 (1998-01-30) -& JP 09 240647 A (LION CORP), 16 September 1997 (1997-09-16) abstract</p> <p>---</p> <p style="text-align: right;">-/-</p>	1-6
A		1

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

1 April 2004

Date of mailing of the international search report

13/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized office:

Fournier, J

INTERNATIONAL SEARCH REPORTIn Application No
PCT/US 03/35337**C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT**

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 10, 31 August 1999 (1999-08-31) -& JP 11 130035 A (YOSHINO KOGYOSHO CO LTD), 18 May 1999 (1999-05-18) abstract ---	1
A	GB 2 330 125 A (ACQUA VERA SPA) 14 April 1999 (1999-04-14) figures -----	1

INTERNATIONAL SEARCH REPORTInt'l Application No
PCT/US 03/35337

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
JP 10203519	A	04-08-1998	NONE			
JP 09240647	A	16-09-1997	KR	217297 B1		01-09-1999
JP 11130035	A	18-05-1999	NONE			
GB 2330125	A	14-04-1999	IT DE FR	RM970216 U1 29817500 U1 2769587 A3		12-04-1999 10-12-1998 16-04-1999