
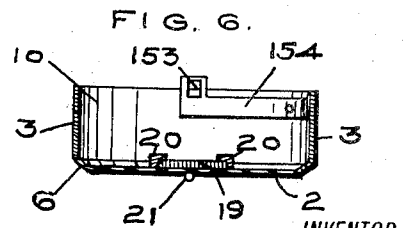
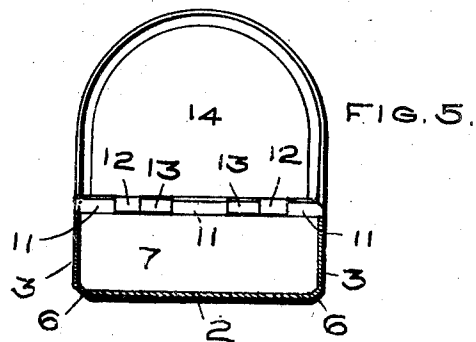


O. A. VON S. BUCKOW.
COMBINATION PIPE AND TOBACCO CASE.
APPLICATION FILED AUG. 16, 1910.

1,039,892.

Patented Oct. 1, 1912.

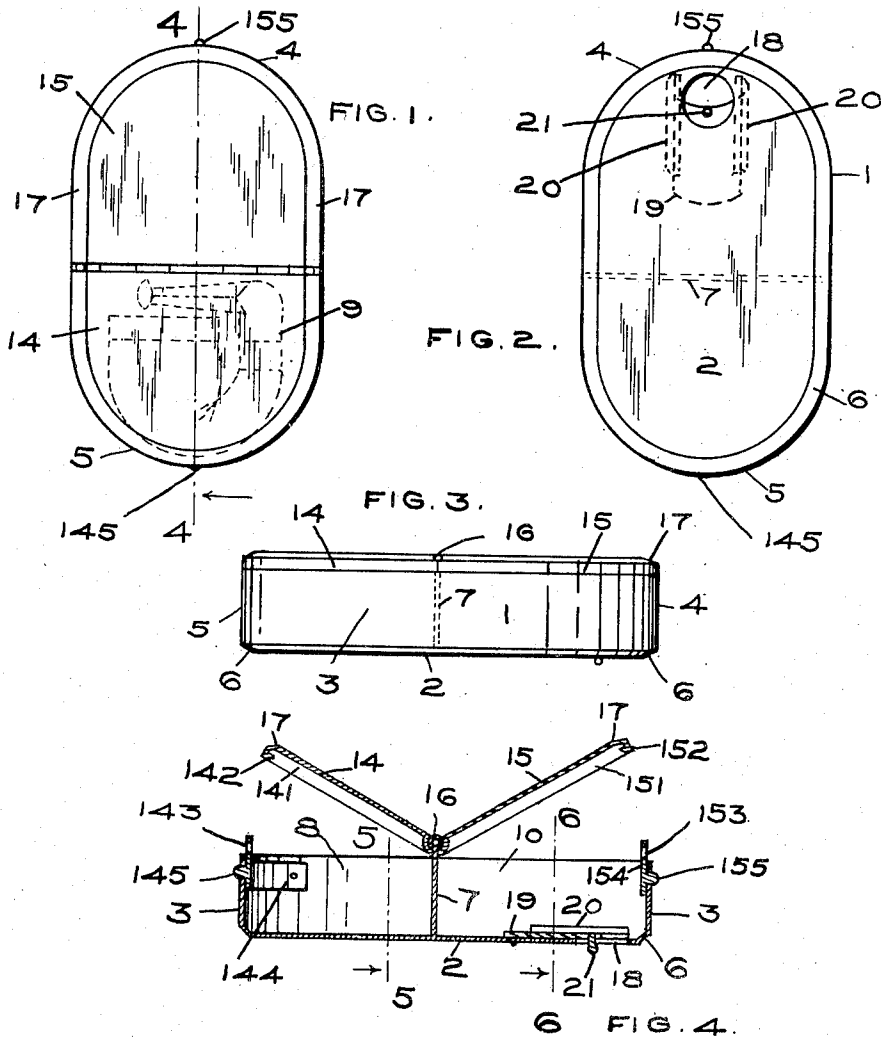

WITNESSES:
Cornelius Gabriels
Wallace Wyllie

Oscar A. von S. Buckow,
BY
Russell W. Everett,
ATTORNEY.

UNITED STATES PATENT OFFICE.

OSCAR A. VON S. BUCKOW, OF NEWARK, NEW JERSEY.

COMBINATION PIPE AND TOBACCO CASE.

1,039,892.

Specification of Letters Patent.

Patented Oct. 1, 1912.

Application filed August 16, 1910. Serial No. 577,498.

To all whom it may concern:

Be it known that I, OSCAR A. VON S. BUCKOW, a citizen of the United States, residing at Newark, in the county of Essex and State of New Jersey, have invented certain Improvements in Combination Pipe and Tobacco Cases, of which the following is a specification.

The objects of this invention are to provide a holder or case which shall contain a smoking pipe and also a quantity of tobacco for smoking in said pipe; to provide such a case or holder which shall lie easily and comfortably in one's pocket; to enable the pipe and the tobacco to be inclosed each independent of the other, and to be independently accessible; to enable the pipe to be removed from the holder or case without disturbing the tobacco, and to be conveniently filled with such tobacco; to secure a strong, durable construction of pleasing appearance, and to obtain other advantages and results as may be brought out in the following description.

Referring to the accompanying drawings, in which like numerals of reference indicate the same parts throughout the several figures, Figure 1 is a plan of my improved pipe and tobacco holder; Fig. 2 is a bottom view of the same; Fig. 3 is an edge view; Fig. 4 is a longitudinal section on line 4—4 of Fig. 1, with the lids raised a little; Fig. 5 is a cross-section on line 5—5, Fig. 4, with the adjacent lid wide open, and Fig. 6 is a section on line 6—6 of Fig. 4, looking in the direction indicated by the arrow.

In said drawings, 1 indicates the body portion or shell of my improved holder or case, said shell being formed out of any suitable light strong material, preferably by stamping or pressing and providing a cavity or chamber with a closed bottom 2 and side walls 3 at substantially right angles thereto, the top of said shell or body being open. In plan, said body portion is rounded at its ends 4, 5, and its bottom corner edges are preferably beveled, as at 6, so as to conveniently fit the hand and cause less frictional wear in the pocket.

The case or holder is somewhat longer than it is wide, as clearly shown in the drawings, and substantially midway between its opposite ends 4 and 5 the interior chamber is divided by a transverse partition 7. The compartment 8 between said partition and the end 5 of the holder is

adapted to receive a smoking pipe 9, while the end of the body portion on the other side of the partition 7 is adapted to contain tobacco, as at 10. The said partition 7 is soldered or otherwise suitably secured in place, and at its upper edge provides sleeves 11, 11, 11, adapted to lie in alinement with other sleeves 12, 12 and 13, 13 upon covers or lids 14 and 15 for the compartments 8 and 10 respectively, a hinge pin 16 being slid through all said sleeves. These sleeves are preferably formed by ears projecting from the covers and the partition, each in the plane of its respective part, at their edges which meet in a common line, said ears being rolled into the rounded sleeves just referred to. Said covers 14 and 15 are thus hinged to the body portion, and since the partition 7 extends substantially into the plane of the top of the body portion 1 of the holder, said covers are adapted to close the compartments of the holder. Each cover has a marginal flange 141, or 151, adapted to abut at its edges against the edges of the side walls 3, and preferably the corner edges of said covers are beveled as at 17. Furthermore, each lid has at its end farthest from the line of hinging a projection 142, or 152, adapted to snap into the aperture 143, or 153, of a spring tongue 144, or 154, secured upon the inside of the wall 3 of the compartment, and having a finger piece 145, or 155, protruding through said wall for releasing purposes.

The chamber 8 which is closed by the lid or cover 14 is adapted to contain the pipe 9, and the other chamber 10 forms a reservoir or container for the tobacco, as stated. The bottom of said tobacco chamber 10 has adjacent to the end 4 of the case or holder an aperture 18 adapted to be closed by a slide 19 working on the inside of said bottom and held in place with respect thereto by slideways 20 therefor upon said bottom. A finger piece 21 projects from said slide through the aperture 18 and by contact with the opposite edges of said aperture limits movement of the slide in opening and closing. The slide works longitudinally of the case or holder, and is held against movement by the friction of its slideways 20 until the handle 21 is pressed. It will be understood that by pushing this slide 19 into open position by means of the finger piece 21, the tobacco which is inside the compartment 10 of the holder can be readily poured into the

pipe in a stream of the desired size. The cover 15 of the tobacco compartment 10 does not need to be opened, therefore, except when it is necessary to refill the said compartment, the tobacco at all other times being discharged through the opening 18. The other compartment 8, or its cover 14, is of course opened and closed whenever it is necessary to take the pipe 9 out of said chamber or to replace it therein.

Obviously, when a pipe is filled with tobacco from my improved holder, the holder is held with the end 4 downward, and said end being rounded or tapered and the outlet 18 located thereat, the tobacco is readily discharged into the pipe bowl.

Having thus described the invention, what I claim as new is:—

The hereindescribed case or holder, comprising a chambered body portion which is broad and flat and has an end which is tapered or rounded edgewise of the plane of the body portion, said body portion having an aperture in its broad bottom closely adjacent to the middle of said tapered or rounded end, a slide working longitudinally of the body portion upon the inside of its bottom for closing said aperture, means for operating said slide through said aperture from the outside of the body portion, and means for closing the top of said body portion, whereby the case held flatwise in the palm of the hand will discharge its contents through said aperture and the said slide may be operated by one of the digits and the stream of tobacco from said aperture also guided into a pipe bowl by the same said digit.

OSCAR A. VON S. BUCKOW.

Witnesses:

RUSSELL M. EVERETT,
CORNELIUS ZALUSKIE.