




(86) Date de dépôt PCT/PCT Filing Date: 2007/09/21
(87) Date publication PCT/PCT Publication Date: 2008/03/27
(45) Date de délivrance/Issue Date: 2014/05/20
(85) Entrée phase nationale/National Entry: 2009/03/16
(86) N° demande PCT/PCT Application No.: US 2007/020471
(87) N° publication PCT/PCT Publication No.: 2008/036394
(30) Priorité/Priority: 2006/09/21 (US60/846,300)

(51) Cl.Int./Int.Cl. *F04B 39/16* (2006.01),
B01D 45/14 (2006.01), *B04C 9/00* (2006.01)
(72) Inventeur/Inventor:
MAIER, WILLIAM C., US
(73) Propriétaire/Owner:
DRESSER-RAND COMPANY, US
(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : ENSEMBLE SEPARATEUR A TAMBOUR ET ROTOR DE COMPRESSEUR
(54) Title: SEPARATOR DRUM AND COMPRESSOR IMPELLER ASSEMBLY

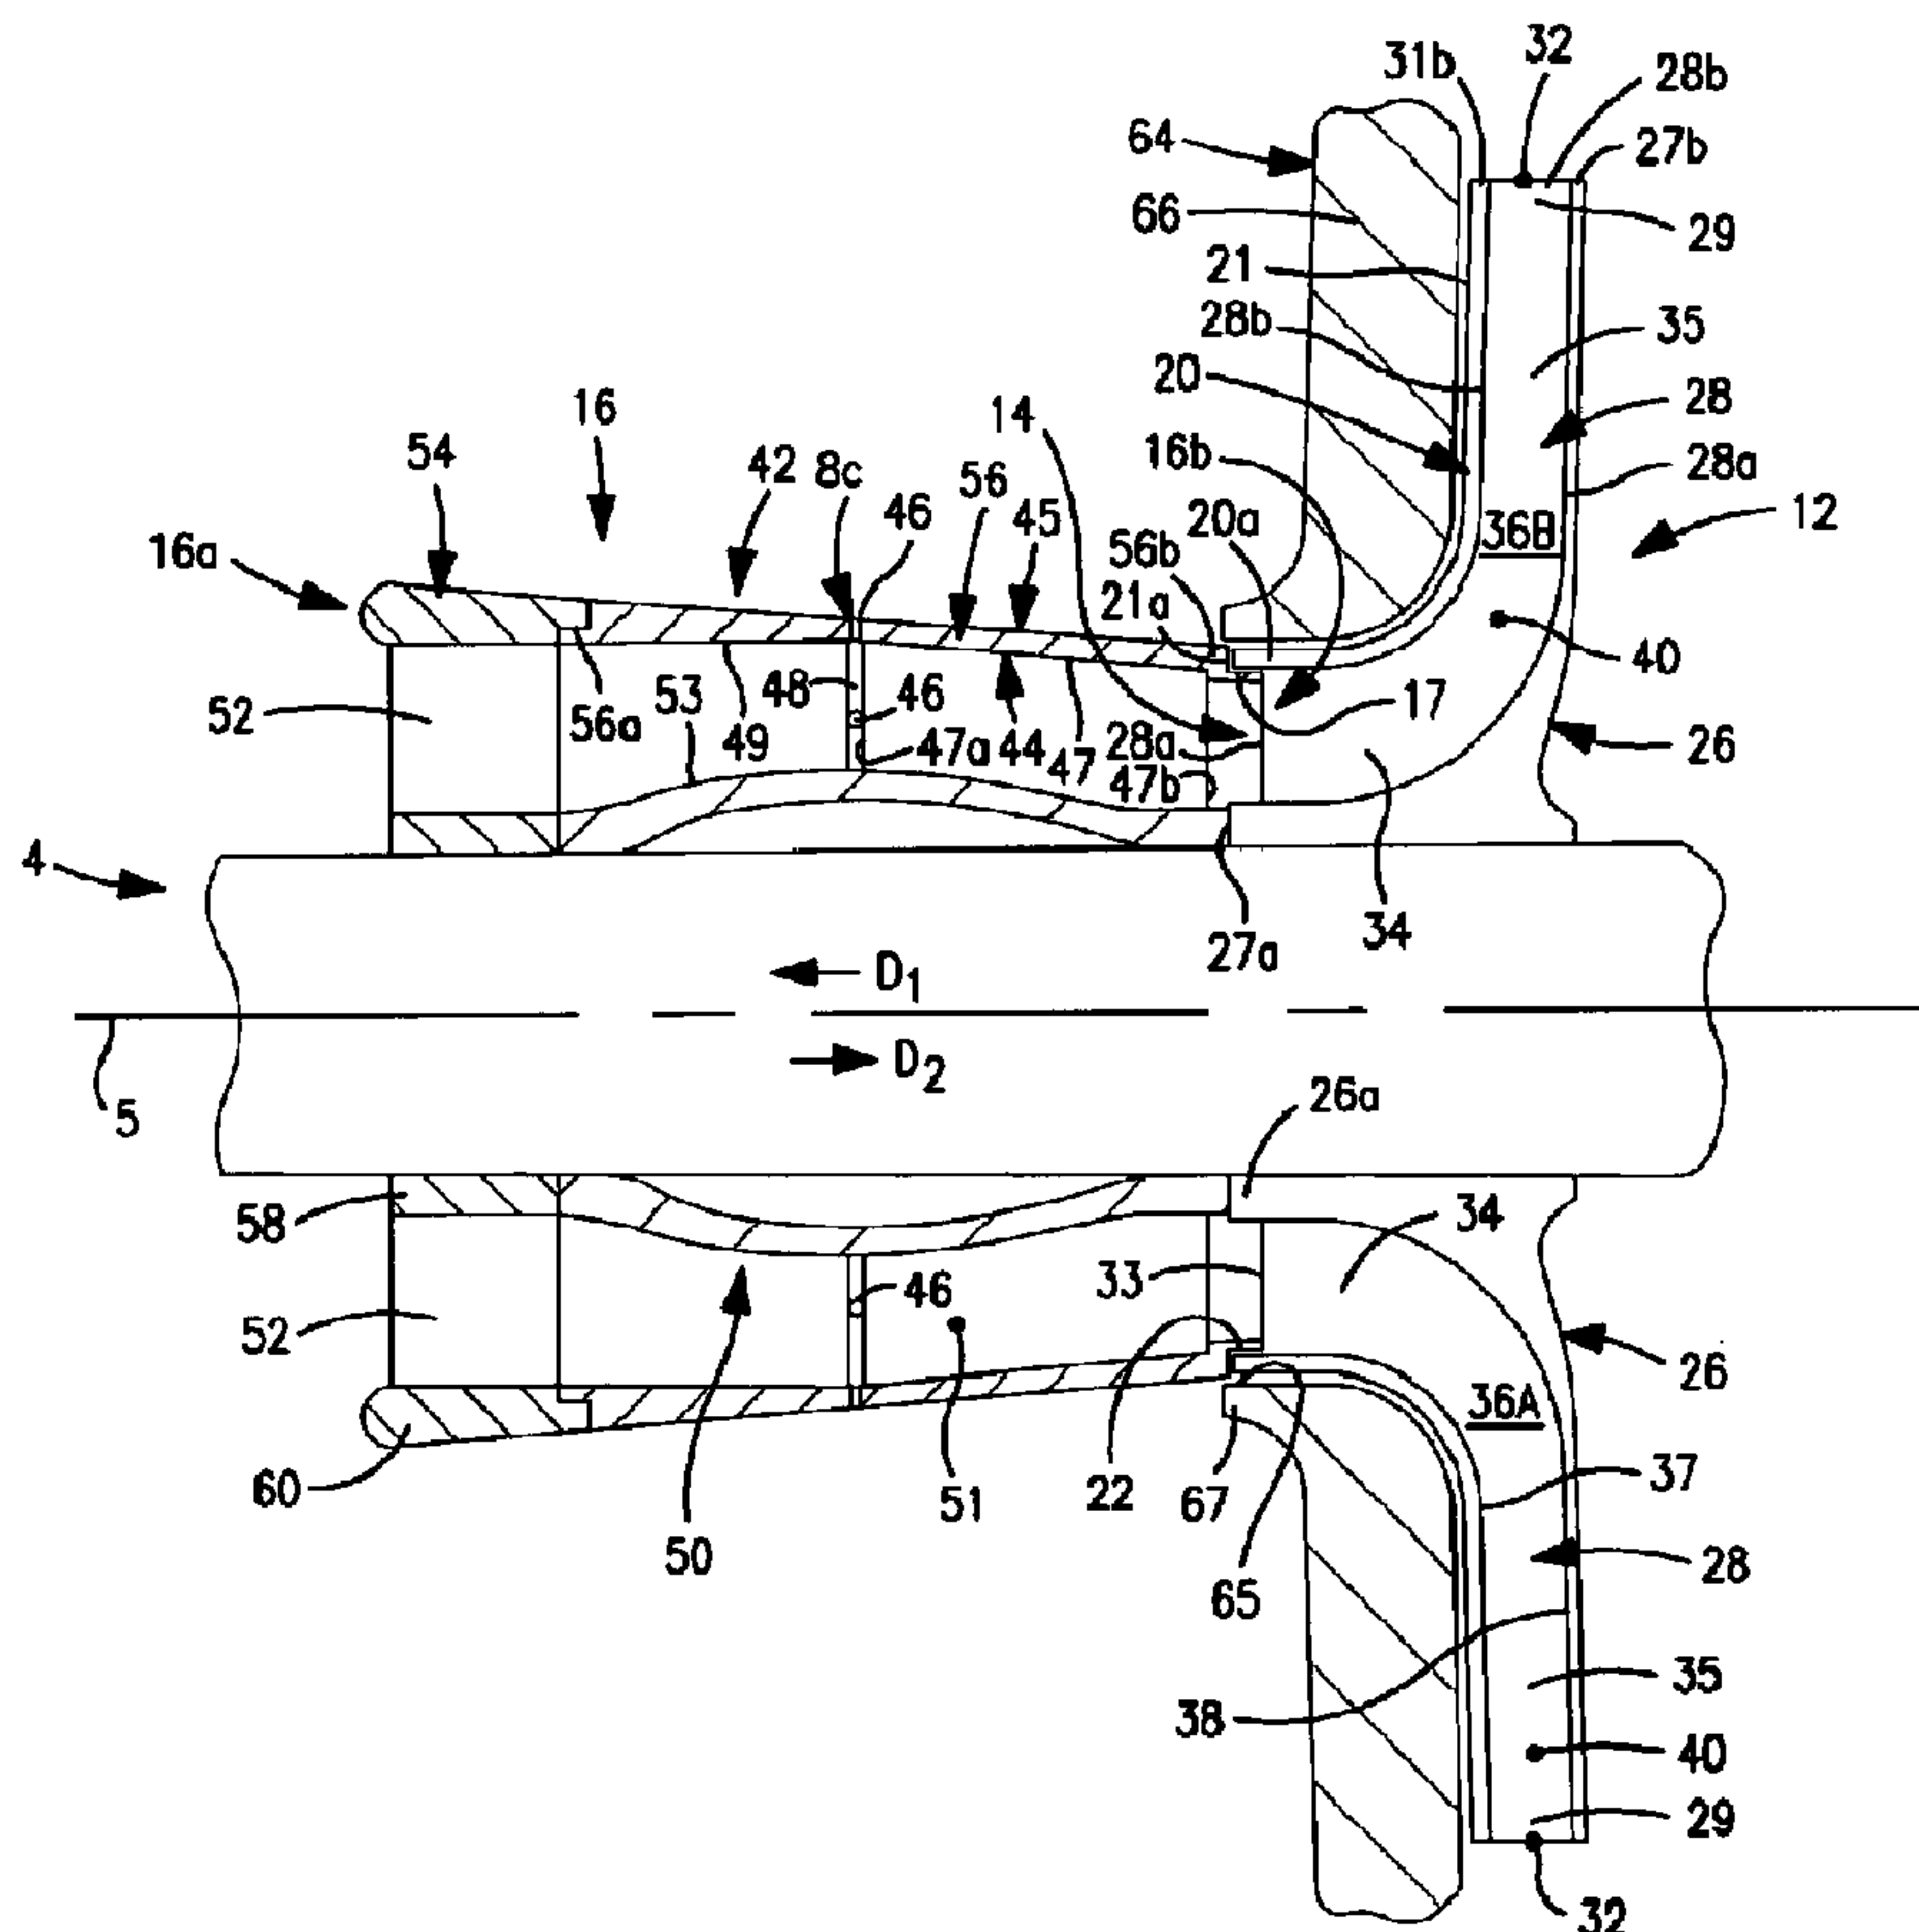

(57) Abrégé/Abstract:

A fluid handling assembly is for a fluid machine that includes a casing and a shaft disposed within the casing so as to be rotatable about a central axis. An impeller is mounted on the shaft and has an inlet and a rotary separator is mounted on the shaft and has



(57) **Abrégé(suite)/Abstract(continued):**

axially spaced apart inlet and outlet ends and an interior separation chamber. The separator is coupled with the impeller such that the separator and the impeller generally rotate as a single unit about the shaft axis and fluid within the separation chamber flows from the separator outlet end directly into the impeller inlet. Preferably, the separator includes a plurality of generally radially-extending blades disposed proximal to the separator inlet end and spaced circumferentially about the axis, the plurality of blades being configured to accelerate fluid flowing into the separator inlet end during rotation of the separator.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 March 2008 (27.03.2008)

PCT

(10) International Publication Number
WO 2008/036394 A3

(51) International Patent Classification:
B01D 35/00 (2006.01)

(21) International Application Number:
PCT/US2007/020471

(22) International Filing Date:
21 September 2007 (21.09.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/846,300 21 September 2006 (21.09.2006) US

(71) Applicant (for all designated States except US):
DRESSER-RAND COMPANY [US/US]; Paul Clark
Drive, P.O. Box 560, Olean, NY 14760-0560 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MAIER, William, C.**
[US/US]; 6959 Schuyler Road, Almond, NY 14804 (US).

(74) Agent: **USSAI, Mark, A.**; Michael Best & Friedrich LLP,
100 East Wisconsin Avenue, Suite 3300, Milwaukee, WI
53202-4108 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(88) Date of publication of the international search report:
3 July 2008

(54) Title: SEPARATOR DRUM AND COMPRESSOR IMPELLER ASSEMBLY

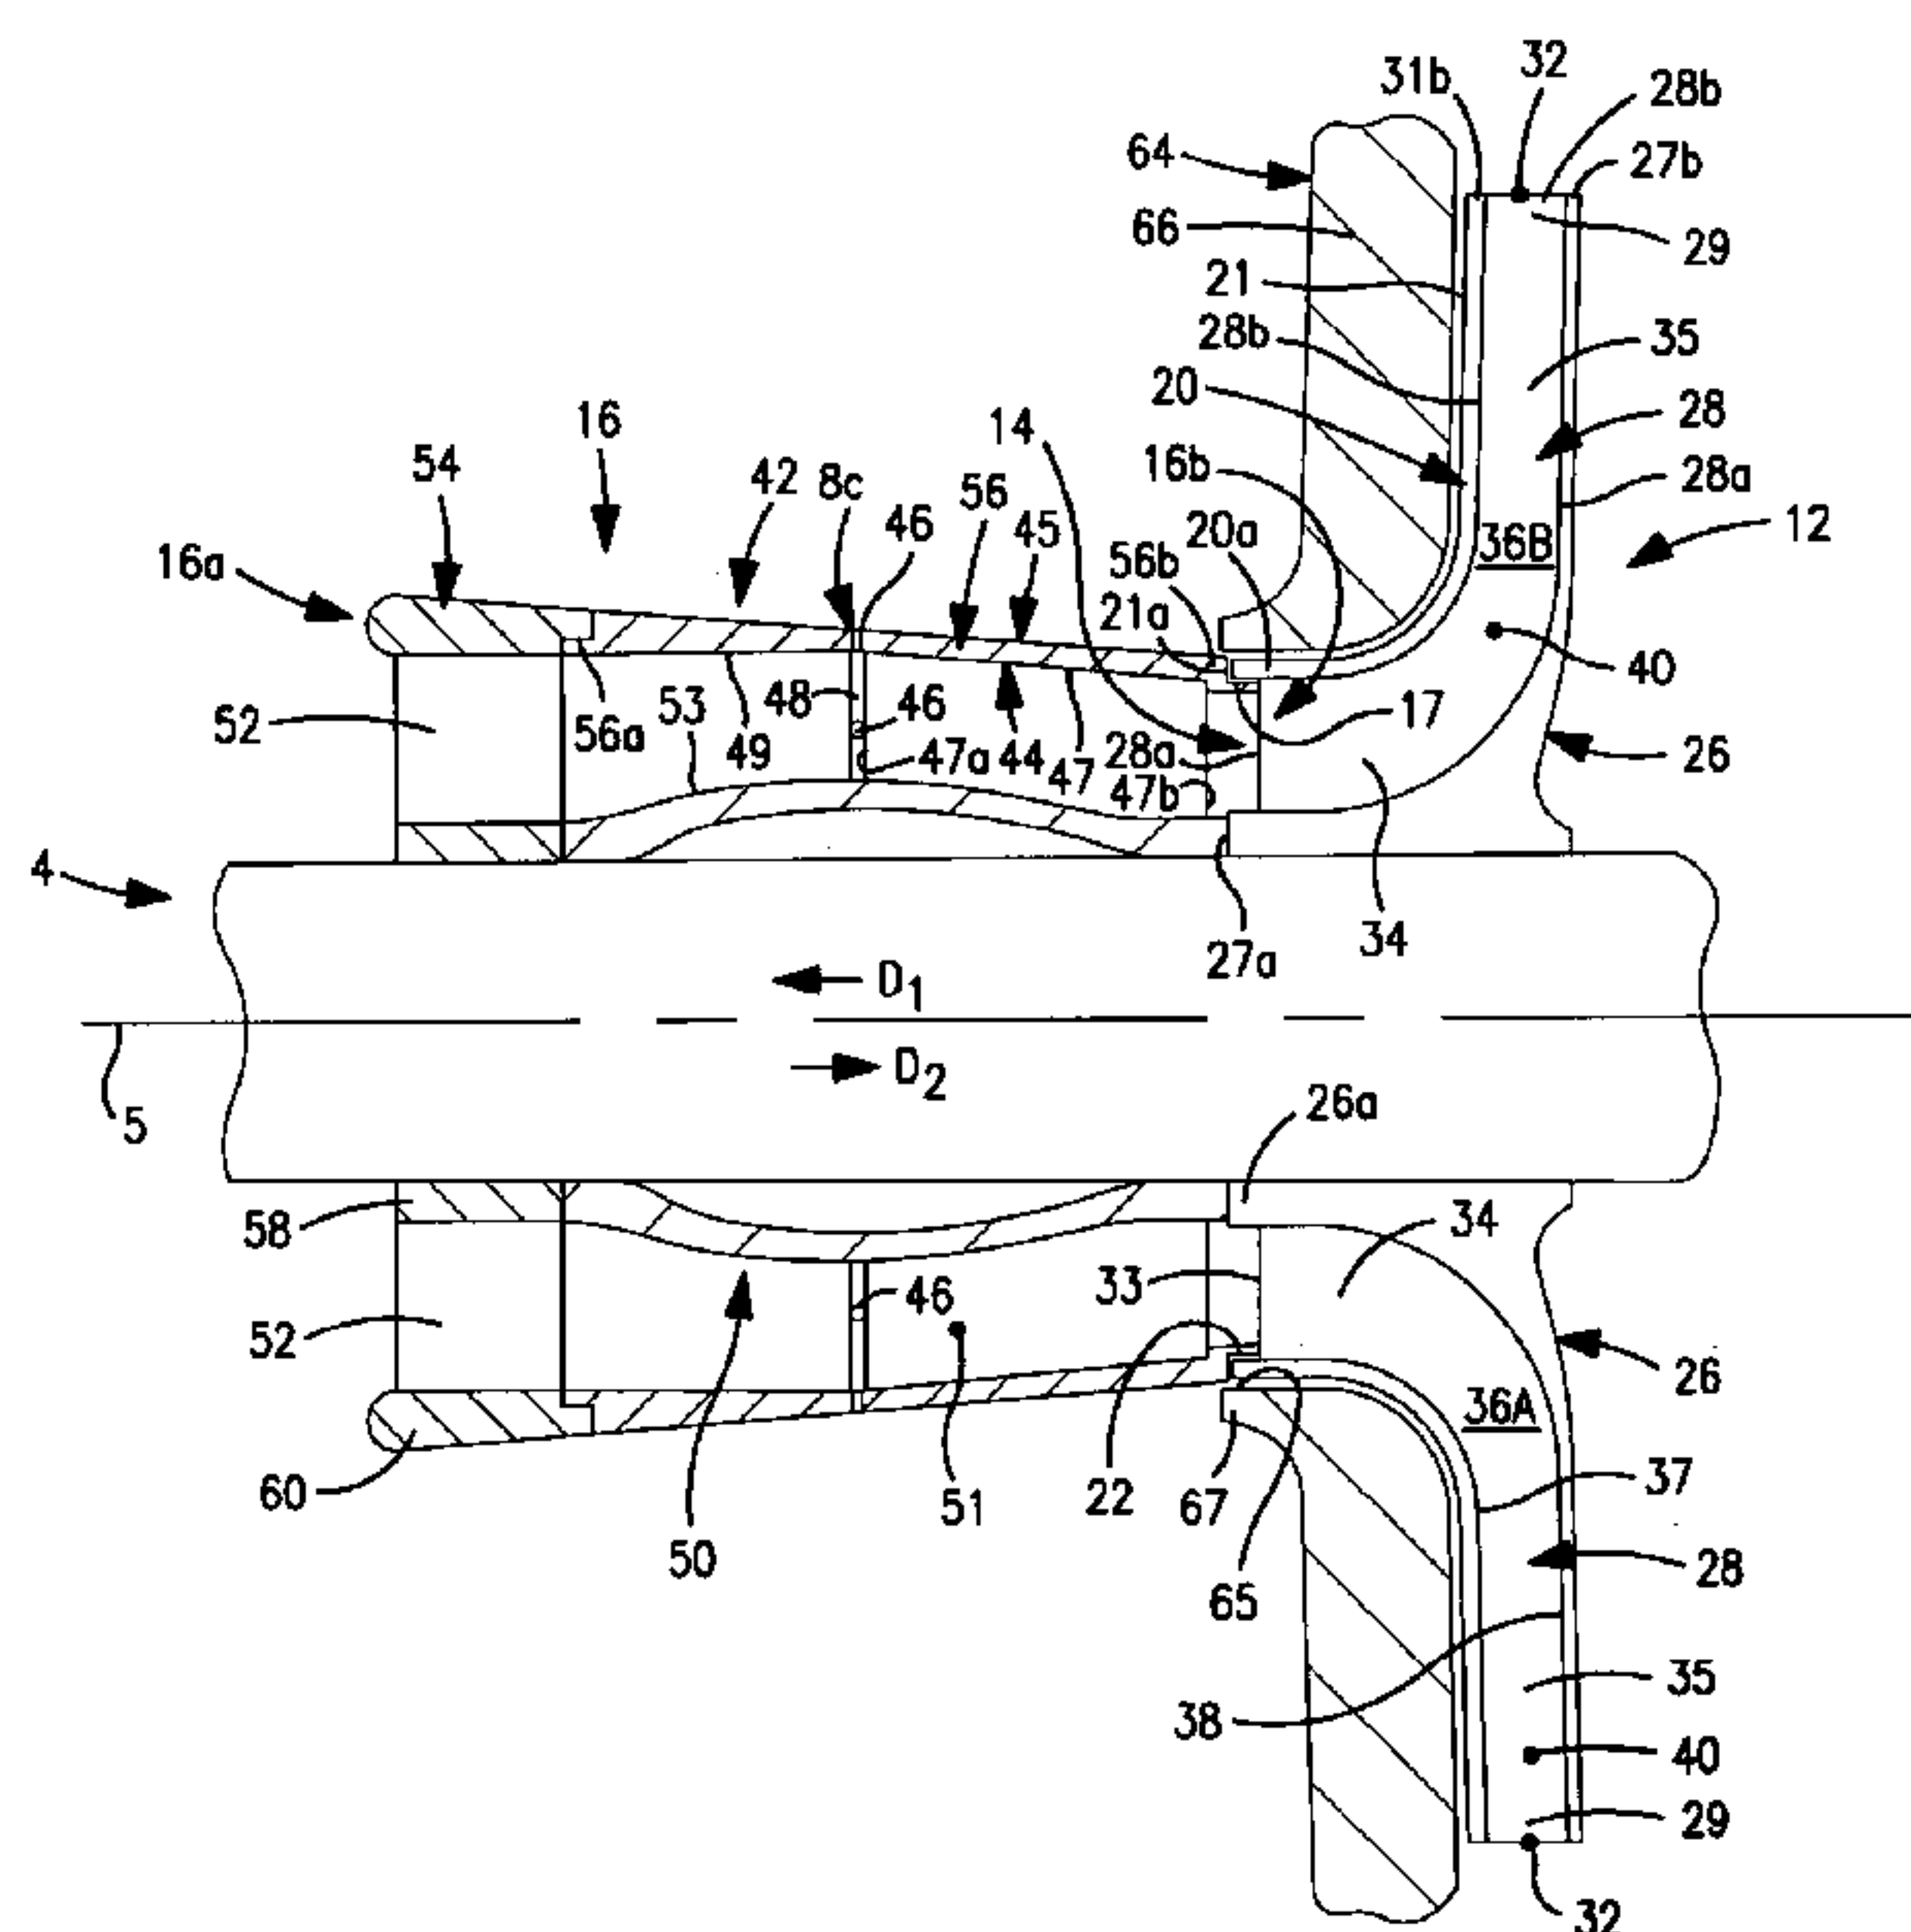

(57) Abstract: A fluid handling assembly is for a fluid machine that includes a casing and a shaft disposed within the casing so as to be rotatable about a central axis. An impeller is mounted on the shaft and has an inlet and a rotary separator is mounted on the shaft and has axially spaced apart inlet and outlet ends and an interior separation chamber. The separator is coupled with the impeller such that the separator and the impeller generally rotate as a single unit about the shaft axis and fluid within the separation chamber flows from the separator outlet end directly into the impeller inlet. Preferably, the separator includes a plurality of generally radially-extending blades disposed proximal to the separator inlet end and spaced circumferentially about the axis, the plurality of blades being configured to accelerate fluid flowing into the separator inlet end during rotation of the separator.

WO 2008/036394 A3

TITLE OF THE INVENTION

Separator Drum and Compressor Impeller Assembly

The present invention relates to fluid machinery, and more particularly to
5 combination separator and compressor devices.

Centrifugal compressors are known and typically include one or more impellers mounted on a driven shaft and configured to pressurize gas drawn into a central inlet and to discharge the fluid radially outwardly through one or more outlets located at an outer circumferential perimeter thereof. In order to properly function, only gas should be
10 directed into the compressor inlet, such that any liquids should be removed from a fluid stream prior to entry into the compressor. As such, compressors are often used in conjunction with a separator device to remove liquids from the fluid stream prior to entry into the compressor inlet.

One type of separator is a rotary separator that uses centrifugal force to separate
15 out heavier liquids from the gases in a fluid stream and generally includes a rotating drum with an interior flow chamber. Such separators typically utilize static swirl vanes to increase or induce circumferential motion of the fluid stream prior to entry into the drum inner chamber, so as to increase the likelihood of the liquid coming into contact with the inner surface of the drum. However, to increase the effectiveness of the compressor
20 operations, such prior art rotary separators are typically used in combination with a "de-swirl" device which increases the pressure of the gaseous stream and "straightens" or redirects the flow to a more axial direction. That is, the flow exiting the separator drum generally flows through a plurality of static de-swirl vanes and then into the impeller inlet. Although this manner of operating a compressor has been relatively effective, the
25 processes of swirling and then "de-swirling" the fluid flow are believed to cause unrecovered energy losses in a gaseous stream passing through the compressor.

SUMMARY OF THE INVENTION

In one aspect, the present invention is a fluid handling assembly for a fluid
30 machine, the machine including a casing and a shaft disposed within the casing so as to be rotatable about a central axis. The fluid handling assembly comprises an impeller mounted on the shaft and having an inlet and a rotary separator mounted on the shaft. The separator has axially spaced apart inlet and outlet ends and an interior separation chamber.

-2-

The separator is coupled with the impeller such that fluid within the separation chamber flows from the separator outlet end directly into the impeller inlet.

In another aspect, the present invention is a compressor comprising a casing, a shaft disposed within the casing and rotatable about a central axis, an impeller mounted on the shaft and having a central inlet, and a rotary separator mounted on the shaft. The separator has axially spaced apart inlet and outlet ends and an interior separation chamber. The separator is coupled with the impeller such that fluid within the separation chamber flows through the separator outlet end directly into the impeller inlet.

In a further aspect, the present invention is a fluid handling assembly for a fluid machine including a casing and a shaft disposed within the casing so as to be rotatable about a central axis. The fluid handling assembly comprises an impeller mounted on the shaft and having an inlet and an outlet, the impeller being configured to compress fluid flowing into the inlet and to discharge compressed fluid through the outlet. A rotary separator is mounted on the shaft and has axially spaced apart inlet and outlet ends and an interior separation chamber extending generally between the inlet and outlet ends. The separator is coupled with the impeller such that the separator and impeller rotate as a single unit about the shaft axis and the separation chamber is fluidly connected with the impeller inlet. Further, the separator is configured to remove at least a portion of liquid from fluid passing through the separation chamber from the inlet end and to discharge the fluid through the outlet end and directly into the impeller inlet.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

The foregoing summary, as well as the detailed description of the preferred embodiments of the present invention, will be better understood when read in conjunction with the appended drawings. For the purpose of illustrating the invention, there is shown in the drawings, which are diagrammatic, embodiments that are presently preferred. It should be understood, however, that the present invention is not limited to the precise arrangements and instrumentalities shown. In the drawings:

Fig. 1 is a broken away, perspective view of a combination separator and compressor device having a fluid handling assembly in accordance with the present invention;

Fig. 2 is an enlarged, broken-away axial cross-sectional view of the fluid handling assembly; and

-3-

Fig. 3 is a more enlarged, broken-away axial cross-sectional view of the fluid handling assembly.

DETAILED DESCRIPTION OF THE INVENTION

5 Certain terminology is used in the following description for convenience only and is not limiting. The words "right", "left", "lower", "upper", "upward", "down" and "downward" designate directions in the drawings to which reference is made. The words "inner", "inwardly" and "outer", "outwardly" refer to directions toward and away from, respectively, a designated centerline or a geometric center of an element being described, 10 the particular meaning being readily apparent from the context of the description. Further, as used herein, the word "connected" is intended to include direct connections between two members without any other members interposed therebetween and indirect connections between members in which one or more other members are interposed therebetween. The terminology includes the words specifically mentioned above, 15 derivatives thereof, and words of similar import.

Referring now to the drawings in detail, wherein like numbers are used to indicate like elements throughout, there is shown in Figs. 1-3 a fluid handling assembly 10 for a fluid machine 1. The machine 1 is preferably a compressor 2 including a casing 3 and a shaft 4 disposed within the casing 3 and rotatable about a central axis 5. The fluid 20 handling assembly 10 basically comprises an impeller 12 mounted on the shaft 4 and having a central inlet 14 and a rotary separator 16 disposed about the shaft 4. The separator 16 has axially spaced inlet and outlet ends 16a, 16b, respectively, and an interior separation chamber 18 extending generally axially between the two ends 16a, 16b. The separator 16 is coupled with the impeller 12 such that the separator 16 and impeller 12 25 generally rotate as a single unit about the shaft axis 5 and the separation chamber 18 is fluidly connected with the impeller inlet 14. As such, fluid flowing through the separation chamber 18 passes through the separator outlet end 16b and directly into the impeller inlet 14. Further, the separator 16 is fluidly connectable with a source S_F (Fig. 1) of fluid such that fluid enters the separator inlet end 16a, the separator 16 being configured to remove at 30 least a portion of liquid from fluid flowing through the separation chamber 18 from the inlet end 16a and to discharge the fluid through the outlet end 16 and into the impeller inlet 18.

Preferably, the impeller 12 has an end contact surface 15 located proximal to the inlet 14 and extending circumferentially about the axis 15 and the separator 16 has an end

-4-

contact surface 17 located proximal to the outlet end 16b and extending circumferentially about the axis 15. The separator contact surface 17 is disposed against the impeller contact surface 13 so as to define an interface I_{SI} , the separator outlet end 16b being sealingly coupled with the impeller 12 so as to prevent fluid flow through the interface I_{SI} .

5 Thereby, separated or "dried" gas is prevented from flowing outwardly through the interface I_{SI} instead of into the impeller inlet 14, but more importantly, separated liquid externally of the separator 16 is prevented from entering the impeller inlet 14 through the interface I_{SI} .

More specifically, the impeller 12 preferably includes a shroud 20 having a
10 generally radially-extending outer surface 21 and central opening 22, which is preferably at least partially defined by the impeller contact surface 13, the central opening 22 at least partially defining the impeller inlet 14, as described above and in further detail below. The separator outlet end 16b is either disposed against the shroud outer surface 21, so as to extend generally about the inlet opening 14, or is preferably partially disposed within the
15 shroud central opening 22. Most preferably, the separator outlet end 16b has an inwardly stepped or offset lip 19 extending axially toward the impeller 12 and circumferentially about the axis 5. The lip 19 at least partially provides the separator contact surface 17 and is sized to fit within the inlet opening 14 of the impeller 12 such that the separator contact surface 17 is disposed within and against the impeller contact surface 13. With this
20 arrangement, radially-outward expansion of the separator 16 during rotation thereof causes the lip 19 to seal against the inner surface 13 of the impeller 12, to thereby substantially prevent flow through the interface I_{SI} . However, the separator 16 may be connected with the impeller 12 in any other appropriate manner (e.g., by radial flanges on the separator 16 and/or impeller 12) or may even be integrally connected or formed with the impeller 12, as
25 discussed below.

Referring particularly to Fig. 2, the impeller 12 is preferably generally similar to a conventional centrifugal compressor impeller and includes a hub 26 mounted on the shaft 4, a plurality of vanes 28 spaced circumferentially about the axis 5, and the shroud 20 as discussed above. Each vane 28 has a first side edge 28a connected with the hub 26 and an
30 opposing second side edge 28b, the shroud 20 being connected with the second edges 28b of all of the vanes 28 so as to be spaced axially from the hub 26 and spaced radially outwardly from the shaft 4. The central opening 22 is spaced radially outwardly from the shaft 4 so as to define the impeller inlet opening 14, which is thus preferably generally annular. Further, the hub 26 and the shroud 20 each has inner and outer edges 27a, 27b

-5-

and 31a, 31b, respectively extending circumferentially about the central axis 5 and each vane 28 has inner and outer ends 28a, 28b, respectively. Each vane inner end 28a is located generally proximal to the inner edges 27a, 31a of the hub 26 and the shroud 20, and each vane outer end 28b is located generally proximal to the outer edges 27, 31b of the hub 26 and the shroud 20. Furthermore, each vane 28 is preferably formed so as to have a generally axial inner portion 34 extending from the first end 28a and a generally radial outer portion 35 extending from the axial portion 34 to the outer end 28b, and has opposing side surfaces 36A, 36B extending between the two ends 28a, 28b and along the inner and outer blade portions 34, 35.

10 With this structure, the impeller 12 further has a plurality of flow channels 40, each flow channel 40 being defined between a separate one of a plurality of pairs of the vanes 28 and extending between the blade inner and outer ends 28a, 28b. Each flow channel 40 has an inlet end 33 fluidly coupled with the impeller inlet 14 and an outlet 32 defined generally between the hub and shroud outer circumferential edges 27b, 31b. As such, fluid
15 entering the impeller inlet 14 flows through the inlet(s) 33 of at least one and preferably a plurality of the flow channels 40, and thereafter radially outwardly through one or more outlets 32 and generally beyond the hub and shroud outer edges 27b, 31b.

As mentioned above, the impeller 12 is at least generally similar to conventional centrifugal impellers, but preferably modified as follows. The hub 26 and the shroud 20
20 preferably each have an inlet end 26a, 20a, respectively, that has a greater axial length in comparison with conventional impellers, so as to extend through a static inlet member 64, as described below, and the blade inner ends 33 are also correspondingly axially lengthened. However, the impeller 12 may alternatively be constructed substantially identically to a conventional compressor impeller, with the inlet member 64 and/or
25 separator 16 being appropriately modified to enable connection of the separator 16 with the impeller 12.

Referring to Figs. 1 and 2, the separator 16 preferably includes a generally tubular body 42 having inner and outer circumferential surfaces 44, 45, the inner surface 44 defining the separator chamber 18 and being configured to separate liquid from a mixed
30 fluid flow F contacting the surface 44 during rotation of the separator 16. As best shown in Fig. 3, the tubular body 42 includes at least one and preferably a plurality of discharge openings 46 extending generally radially between the inner and outer surfaces 44, 45 and spaced circumferentially about the axis 5. The discharge openings 46 are configured to provide a liquid discharge or outlet passage for channeling liquids out of the separator

-6-

interior chamber 18. Further, the tubular body 42 preferably also includes a generally annular groove 48 extending radially outwardly from the inner surface 44, with the plurality of the discharge openings 46 preferably extending radially between the groove 48 and the outer surface 45. The annular groove 48 provides a collection trough for liquids
5 on the separator inner surface 44, such liquid subsequently flowing out of the separator 16 through the discharge openings 46, as discussed in greater detail below.

Referring to Figs. 2 and 3, the separator body inner surface 44 includes a generally frustaconical section 47 having a first, radially-smaller circumferential edge 47a located at least generally proximal to the separator outlet end 16b and a second, radially-larger
10 circumferential edge 47b spaced axially from the first edge 47a. The frustaconical surface section 47 faces generally away from the outlet end 16b so as to be configured to direct liquid L contacting the surface section 47 generally radially outwardly and away from the separator outlet end 16b during rotation of the separator 16, as indicated in Fig 3. Further, the frustaconical surface section 47 has an inside diameter that varies generally constantly
15 along the central axis 5 from a minimum value ID_{MIN} at the surface section first edge 47a and a maximum value ID_{MAX} at the surface section second edge 47b, such that the surface section 47 tapers outwardly or generally widens in a direction D_1 from the outlet end 16b inwardly toward the inlet end 16a. Preferably, the second or inner edge 47b of the tubular body frustaconical surface section 47 is located at a central "transition" position or point
20 B_C along the central axis 5 that is disposed generally between the body inlet and outlet ends 16a, 16b, with the groove 48 being located adjacent to the surface second, inner end 47b. However, the surface section 47 may alternatively extend substantially entirely through the body 42, such that the surface section second end 47b is located at the separator inlet end 16a.

Furthermore, the body inner surface 44 preferably further has a generally
25 cylindrical, constant diameter section 49 extending between the central position B_C and the inlet end 16a, the cylindrical surface section 49 having an inside diameter ID_S that is at least generally constant (i.e., equal to the maximum value ID_{MAX}), as indicated in Fig. 3. Thus, the body inner surface 44 preferably formed having both the frustaconical, tapering
30 diameter section 47 and the cylindrical, constant diameter section 49. With this surface structure, liquid contacting the tapering section 47 of the inner surface 44 during rotation of the separator 16 is directed or "forced" to flow generally toward the body central position B_C , and then flows into the groove 48 and out of the separator 16, as described above.

-7-

Referring again to Figs. 1-3, the separator 16 also preferably includes a generally tubular inner deflector member 50 mounted on the shaft 4 and disposed within the separation chamber 18. The deflector member 50 has a radially outwardly curved outer circumferential surface 53 spaced radially inwardly from the tubular body inner surface 44, such that a generally annular flow channel 49 through the rotary separator 16 is defined between the facing surfaces 44, 53. The deflector member 50 is configured to direct liquids contacting the curved outer surface 53 generally toward the separator body inner surface 44 (as indicated in Fig. 3) for subsequent removal from the separator 16 as described above. More specifically, the deflector member 50 includes a generally tubular body 51 having opposing ends 51a, 51b and a through bore 55 extending between the ends 51a, 51b, the bore 55 being sized to receive a portion of the shaft 4. Further, the deflector tubular body 51 has an enlarged central portion 51c, such that the body outer surface 53 has an outside diameter that varies between about a minimum value OD_{MIN} proximal to each body end 51, 51b to a maximum value OD_{MAX} within the body central portion 51c. As such, liquids contacting the deflector body 50 are directed generally radially outwardly toward the separator body inner surface 44 by the curve shape of the deflector outer surface 53.

Referring again to Figs. 1-3, the separator 16 preferably includes a plurality of generally radially extending flow blades 52 disposed proximal to the inlet end 16a and spaced circumferentially about the axis 5. The blades 52 also extend generally parallel with the shaft axis 5 and are configured to accelerate fluid flowing into the separator inlet end 16a. More specifically, energy of the rotating shaft 4 is transferred to fluid flowing into the inlet end 16a when the fluid contacts the rotating flow blades 52, such that the blades 52 transmit momentum to the fluid. This transferred energy/momentum causes the fluid to accelerate to the speed of the rotating shaft 4, which increases the efficiency of the compression process when the separated fluid flows into the impeller 12. As such, the downstream inducer portion of a conventional impeller inlet may be eliminated.

Preferably, the separator body 42 includes an inlet member 54 providing the inlet end 16a and the preferred flow blades 52 and a generally tubular drum member 56 connected with the inlet member 54 and the impeller 12 and providing the outlet end 16b. The inlet member 54 includes an annular hub 58 mounted on the shaft 4 and a generally annular outer wall 60 spaced radially outwardly from the hub 58, the plurality of blades 52 extending radially between the hub 58 and the annular wall 60. Further, the tubular drum member 56 has a first end 56a connected with the inlet member 54, a second end 56b

-8-

spaced axially from the first end 56a (which provides the separator outlet end 16b) and an
connected with the impeller 12, and an inner surface providing surface a substantial
portion of the separator inner surface 44, as described above. The drum member 56
includes the inwardly offset circumferential lip 19 at the second end 56b and preferably
5 also includes a generally axially extending circumferential tongue 57 engageable with a
mating, overlapping tongue 59 of the inlet member 54. As such, the drum 56 is preferably
"sandwiched" between the inlet member 54 and the impeller shroud 20 so as to be axially
retained thereby. Further, the inner deflector member 50 is preferably sandwiched
between the inlet member hub 58 and the impeller hub 26, and thus axially retained.

10 Although the two-piece structure 54, 56 as described above is presently preferred,
the separator 16 may alternatively be formed of a single generally tubular body or of three
of more connected together members/pieces (neither shown). Further, as mentioned
above, the rotary separator 16 may alternatively be integrally formed with the impeller 12
as opposed to being fixedly or removably connected. The scope of the present invention
15 includes these and all other appropriate constructions of the separator 16 and/or the
impeller 12 which function generally as described herein.

Referring to Figs. 1 and 2, the fluid machine 1 or compressor 2 also preferably
includes a static compressor inlet member 64 having a central opening 65 configured to
receive at least a portion of the impeller 12 with clearance, so as to preferably avoid
20 contact between the inlet member 64 and the impeller 12. The static member 64 is
configured to partially bound the compressor first or inlet stage, and is fixedly supported
by the casing 3. Further, the static member 64 preferably includes a generally disk-like
circular body 66 with a generally axially-extending, circular ridge 67 extending about the
central opening 65, which generally overlaps the interface I_{SI} of the separator 16 and the
25 impeller 12, and a generally circular groove 68 (Fig. 1) spaced radially outwardly from the
ridge 67 and extending circumferentially about the axis 5. The static member groove 68 is
configured to receive an end portion of a static separator member 70, as discussed below.

Referring particularly to Fig. 1, the preferred compressor 2 is preferably a
"multistage" compressor that further includes at least one and preferably two or more other
30 impellers (none shown) spaced axially from the "first stage" impeller 12, such that the first
stage impeller 12 is disposed generally axially between the separator 16 and the other or
"latter stage" impeller(s). The plurality of outlets 32 of the first stage impeller 12 are
fluidly coupled with an inlet (not shown) of an adjacent impeller, and each latter stage
impeller is at least generally similarly constructed as the inlet impeller 12. However, the

-9-

combination separator compressor device 2 may alternatively include only the single impeller 12.

Preferably, the compressor 2 further comprises a static separator 70 disposed about the rotary separator 16 and having an inner circumferential separation surface 71 spaced
5 radially outwardly from the separator so as to define a generally annular flow passage 72 fluidly coupled with the rotary separator inlet end 16a. The static separator 70 is preferably constructed such that fluid F flows through the annular flow passage 72 in a first axial direction D_1 , with the static member separation surface 71 being configured to remove liquid from fluid contacting the surface 71. Further, a generally annular casing
10 inlet passage 74 is fluidly connected with the separator passage 72, preferably through a radial port 76. A plurality of fluid vanes 78 are preferably disposed within the radial port 76 and are configured to initiate swirling motion within the separator passage 72, such that the liquid flow is directed generally onto an inner surface 71 of the static separator 70. Furthermore, the static separator 70 also preferably includes a generally radially-extending
15 wall 80 spaced axially from the separator inlet end 16a, the radial wall 80 being configured to direct fluid F exiting the annular flow passage 72 to flow generally in a second, opposing direction D_2 into the separator inlet end 16a.

With the above structure, a fluid stream F first flows generally radially through the vanes 78 and is deflected to flow generally axially about in the first direction D_1 within the
20 annular inlet passage 74, such that at least larger fluid particles are preferably separated by contact with the static separator inner surface 71. Next, the fluid is directed to flow radially about the rotatable separator inlet end 16a and then axially in the opposing direction D_2 into the flow blades 52, such that the fluid stream is accelerated by contact with the blades 52. Portions of flow proximal to the shaft 4 contact the rotatable deflector
25 50 and are directed toward the separator inner surface 44, whereas other stream portions flow directly into contact with the separator surface 44. Due to such contact with the rotating, angled surface 44, liquid in the fluid stream F first adheres to the surface 44, flows generally in the first axial direction D_1 to the collection groove 48, and thereafter out of the separator 16 through the discharge openings 46. The substantially gaseous portions
30 of the fluid stream F then flows out of the separator chamber 18 and directly into the impeller inlet 14. Any remaining small liquid droplets or mist in the gas flow stream are centrifuged out to the separator surface 44 by the swirling motion of the gas relative to the central rotational axis 5.

-10-

The fluid handling assembly 10 of the present invention provides a number of benefits over previously known separator-compressor assemblies/devices. By eliminating the static swirl and de-swirl vanes at the separator inlet and outlet, respectively, the assembly 10 reduces the total axial space (i.e., along the shaft 4) required for the various components of the combination separator and compressor device 2. Also, by connecting the rotary separator 16 with the impeller 12, such that both components 12, 16 rotate generally as a single unit, the need to seal the outlet end 16b of the rotary separator 16 against a static component of the fluid machine 1 is eliminated. Thereby, a potential flow path for the reintroduction of liquid into the separated gas stream F is also eliminated.

10 Further, as discussed above, due to the fact that the fluid stream F flowing through the separator 16 is not swirled at the separator inlet 16a and then de-swirled prior to entry into the impeller 12, energy losses are reduced and compressor efficiency is increased.

It will be appreciated by those skilled in the art that changes could be made to the embodiments described above without departing from the broad inventive concept thereof.

15 It is understood, therefore, that this invention is not limited to the particular embodiments disclosed, but it is intended to cover modifications within the spirit and scope of the present invention as generally defined in the appended claims.

- 11 -

CLAIMS

1. A fluid handling assembly for a fluid machine, comprising:
an impeller mounted on a shaft and having an impeller inlet; and
a rotary separator mounted on the shaft and having a separator inlet end, a
5 separator outlet end axially spaced apart from the separator inlet end, and an interior
separation chamber, wherein the rotary separator is coupled with the impeller such that a
fluid within the interior separation chamber flows from the separator outlet end directly
into the impeller inlet.
2. The fluid handling assembly of claim 1, wherein the rotary separator and the
10 impeller rotate as a single unit about a central axis of the fluid machine.
3. The fluid handling assembly of claim 1, wherein the rotary separator is configured
to remove at least a portion of a liquid from the fluid flowing through the separator inlet
end, the interior separation chamber, and the separator outlet end, and into the impeller
inlet.
- 15 4. The fluid handling assembly of claim 1, wherein:
the impeller has an impeller end surface located proximal to the impeller inlet and
extending circumferentially about a central axis of the fluid machine; and
the rotary separator has a separator end surface located proximal to the separator
outlet end, extending circumferentially about the central axis, disposed against the
20 impeller end surface so as to define an interface, wherein the rotary separator is sealingly
coupled with the impeller at the interface.
5. The fluid handling assembly of claim 1, wherein:
the impeller includes a shroud having a radially-extending shroud outer surface
and a shroud central opening that at least partially defines the impeller inlet; and

- 12 -

the separator outlet end is disposed against the radially-extending shroud outer surface, or at least partially disposed within the shroud central opening.

6. The fluid handling assembly of claim 5, wherein the rotary separator further comprises:

5 a tubular body having a tubular body inner surface; and
an annular ledge spaced radially inward from the tubular body, disposed within the shroud central opening, extending axially from the tubular body, and defining the separator outlet end.

7. The fluid handling assembly of claim 6, wherein:

10 the shroud has a shroud edge surface defining the shroud central opening;
the tubular body has a tubular body outer surface;
the annular ledge has an outer circumferential surface spaced radially inward from the tubular body outer surface, such that a radial shoulder surface extends between the tubular body outer surface and the outer circumferential surface; and
15 the shroud edge surface is disposed against the radial shoulder surface.

8. The fluid handling assembly of claim 1, wherein the impeller further comprises:
a hub mounted on the shaft;

a plurality of vanes each having a first side edge connected with the hub and a second side edge that opposes the first side edge, wherein the plurality of vanes are
20 spaced circumferentially apart around a central axis of the fluid machine; and

a shroud connected to the second side edge of each of the plurality of vanes, spaced axially from the hub and radially outward from the shaft, the shroud having a shroud central opening spaced radially outward from the shaft so as to define the impeller inlet, wherein the separator outlet end is connected with the shroud such that the interior
25 separation chamber is fluidly coupled with the shroud central opening.

- 13 -

9. The fluid handling assembly of claim 8, wherein:
the hub and the shroud each have inner and outer edges extending circumferentially about the central axis;
each of the plurality of vanes has an inner end located proximal to the inner edge of the hub and the inner edge of the shroud, and an outer end located proximal to the outer edge of the hub and the outer edge of the shroud; and
the impeller further comprises a plurality of flow channels each defined between the plurality of vanes and extending between the inner and outer ends of each of the plurality of vanes such that the fluid entering the impeller inlet flows through at least one of the plurality of flow channels and radially outward beyond the outer edge of the hub and the outer edge of the shroud.
10. The fluid handling assembly of claim 1, wherein the rotary separator further comprises a separator tubular body having inner circumferential surface at least partially defining the interior separation chamber, and an outer circumferential surface, wherein the inner circumferential surface is configured to separate a liquid from the fluid contacting the inner circumferential surface during rotation of the rotary separator.
11. The fluid handling assembly of claim 10, wherein the rotary separator further comprises a deflector member mounted to the shaft and having an outer surface spaced radially inward from the inner circumferential surface of the separator tubular body, wherein the deflector member is configured to direct liquids contacting the outer surface toward the inner circumferential surface.
12. The fluid handling assembly of claim 11, wherein:
the deflector member further comprises a deflector tubular body having opposing ends, a body outer surface, a through bore extending between the opposing ends and sized to receive a portion of the shaft, and an enlarged central portion; and

- 14 -

the body outer surface has an outside diameter that varies between a minimum value proximal to each of the opposing ends and a maximum value at the enlarged central portion.

13. The fluid handling assembly of claim 10, wherein the separator tubular body
5 includes at least one opening extending radially between the inner and outer circumferential surfaces and providing a liquid outlet passage for directing the liquid out of the interior separation chamber.

14. The fluid handling assembly of claim 13, wherein the separator tubular body further comprises:

10 an annular groove extending radially inward from the inner circumferential surface; and

a plurality of openings extending radially between the annular groove and the outer circumferential surface and spaced circumferentially apart around a central axis of the fluid machine.

15 15. The fluid handling assembly of claim 10, wherein the inner circumferential surface of the separator tubular body further comprises a frustoconical section facing away from the separator outlet end and having a first circumferential edge located proximal to the separator outlet end and a second circumferential edge that is radially larger than the first circumferential edge and is spaced axially from the first
20 circumferential edge, wherein the frustoconical section is configured to direct fluid contacting the frustoconical section radially outward and away from the separator outlet end during rotation of the rotary separator.

- 15 -

16. The fluid handling assembly of claim 1, wherein the rotary separator further comprises a plurality of blades disposed proximal to the separator inlet end and spaced circumferentially about a central axis of the fluid machine, wherein the plurality of blades are configured to accelerate the fluid flowing into the separator inlet end during rotation
5 of the rotary separator.

17. The fluid handling assembly of claim 1, wherein the rotary separator further comprises:

an inlet member providing the separator inlet end and including an annular hub mounted on the shaft, an annular outer wall spaced radially outward from the annular
10 hub, and a plurality of blades extending radially between the annular hub and the annular outer wall; and

a tubular drum member having a first end connected to the inlet member, a second end spaced axially from the first end, providing the separator outlet, and connected with the impeller, and an inner circumferential surface defining the interior separation
15 chamber and fluidly connected to the impeller inlet.

18. The fluid handling assembly of claim 1, further comprising a static separator disposed about the rotary separator and having a static separator inner circumferential surface spaced radially outward from the rotary separator so as to define an annular flow passage that is fluidly coupled with the separator inlet end.

20 19. The fluid handling assembly of claim 18, wherein the static separator further comprises a radially extending wall spaced axially apart from the separator inlet end, wherein the fluid flows through the annular flow passage in a first axial direction, and the radially extending wall is configured to direct fluid exiting the annular flow passage to flow in a second, opposing direction into the separator inlet end.

- 16 -

20. A fluid handling assembly, comprising:

an impeller mounted on a shaft and having an impeller inlet and an impeller outlet;

5 a rotary separator mounted on the shaft and having a separator inlet end, a separator outlet end that is axially spaced apart from the separator inlet end and is attached to the impeller inlet, and an interior separation chamber extending between the separator inlet end and the separator outlet end, wherein the rotary separator and the impeller rotate on the shaft as a single unit; and

10 a static separator defined around the rotary separator, fluidly connected with the separator inlet end, and having a static separator inner circumferential surface spaced radially apart from the rotary separator defining an annular passage therebetween, and an annular wall disposed at an axial end of the static separator such that a fluid traveling through the static separator proceeds through the static separator in a first axial direction and is turned by the annular wall to travel through the rotary separator in a second axial
15 direction that opposes the first axial direction.

1/3

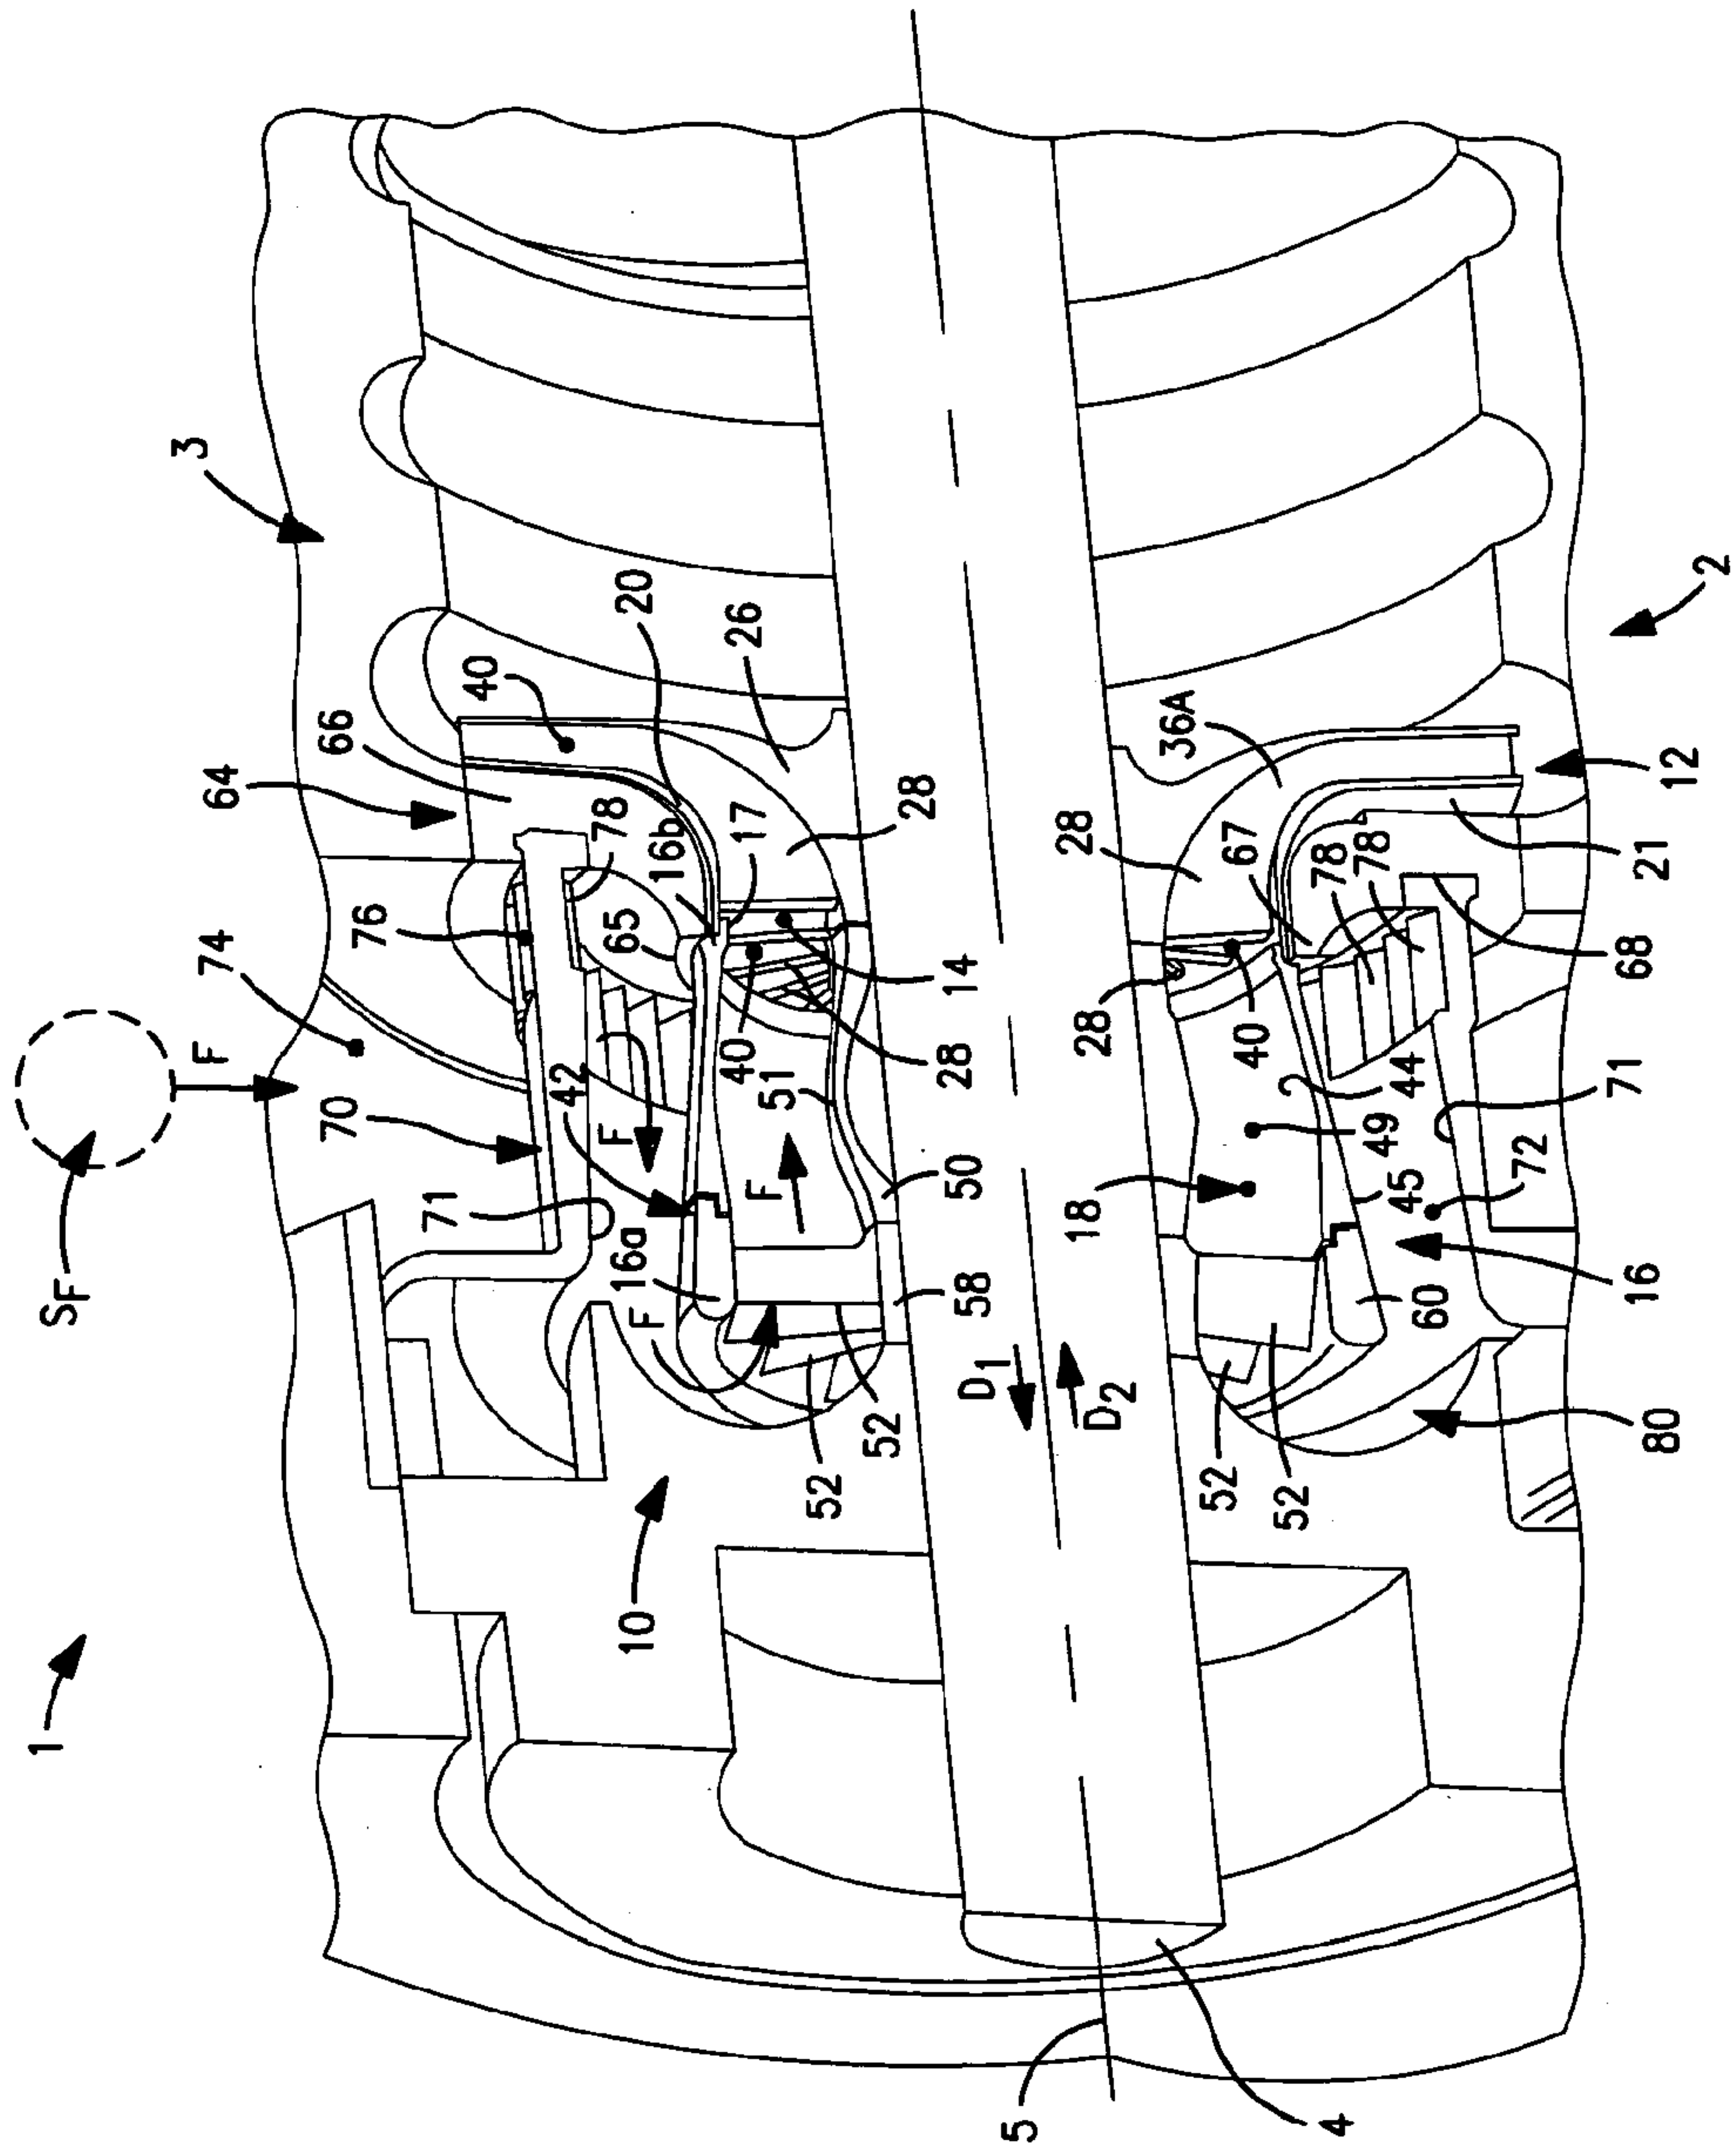


FIG. 1

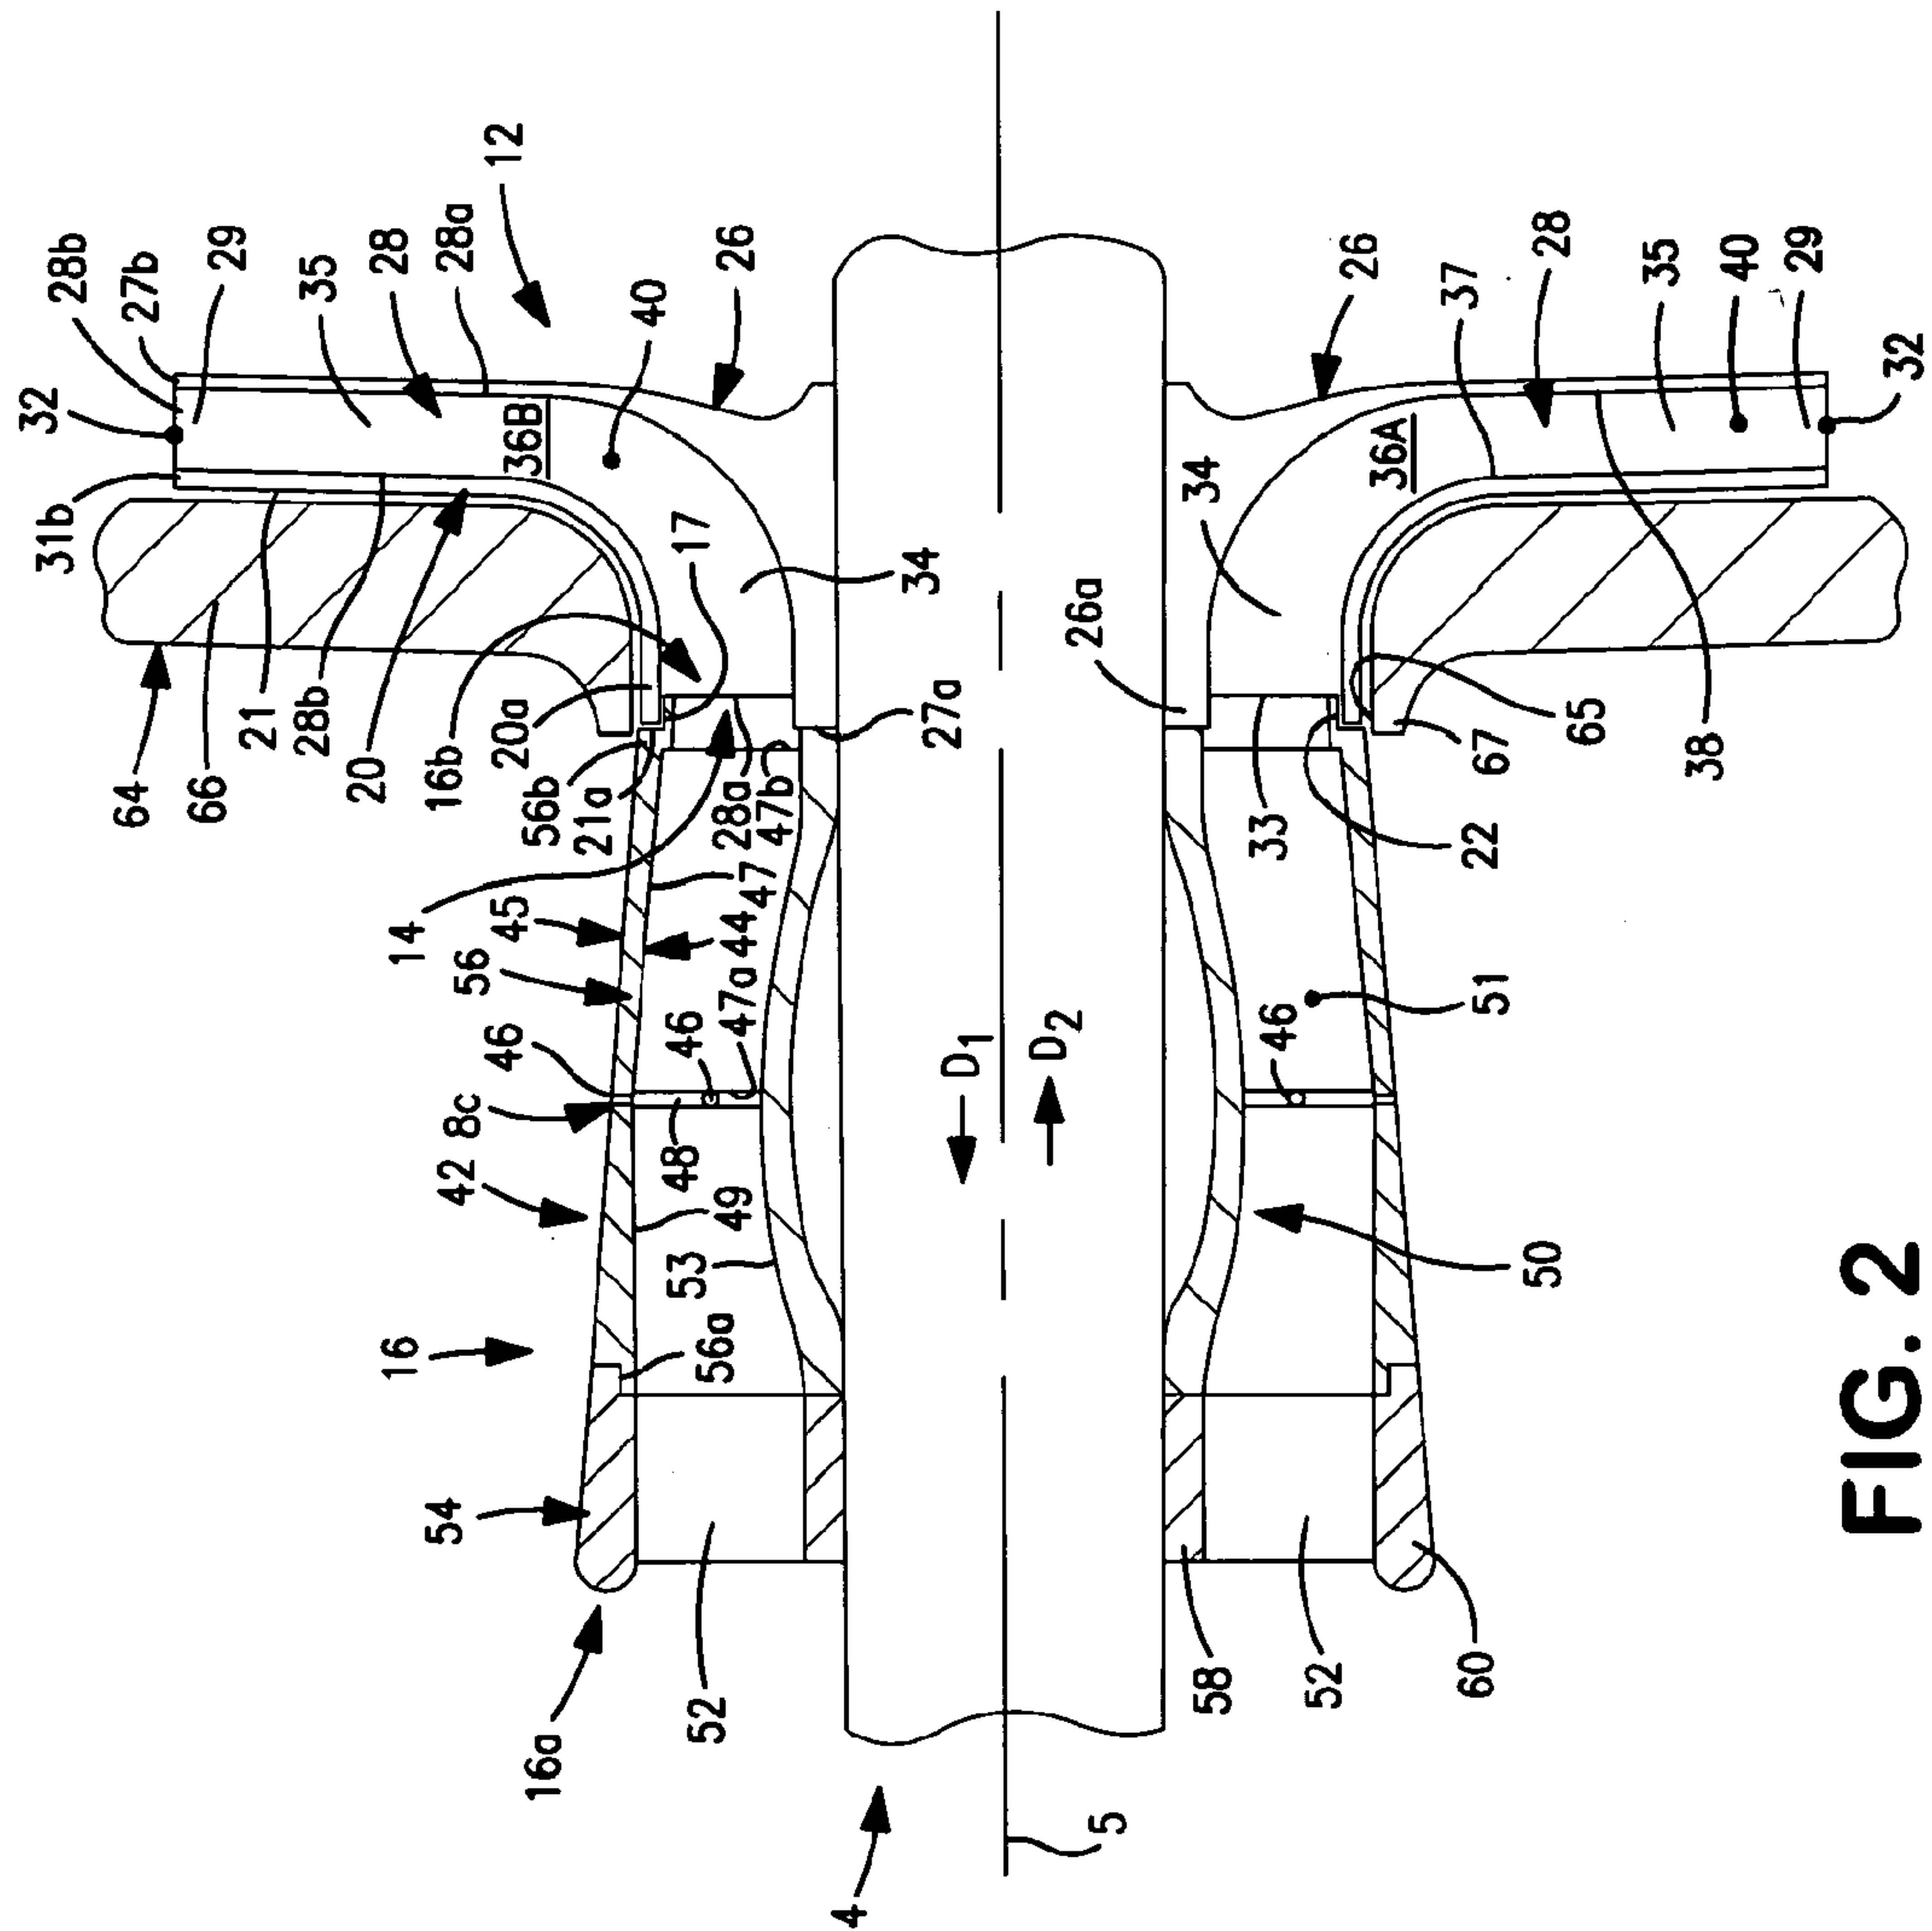


FIG. 2

3/3

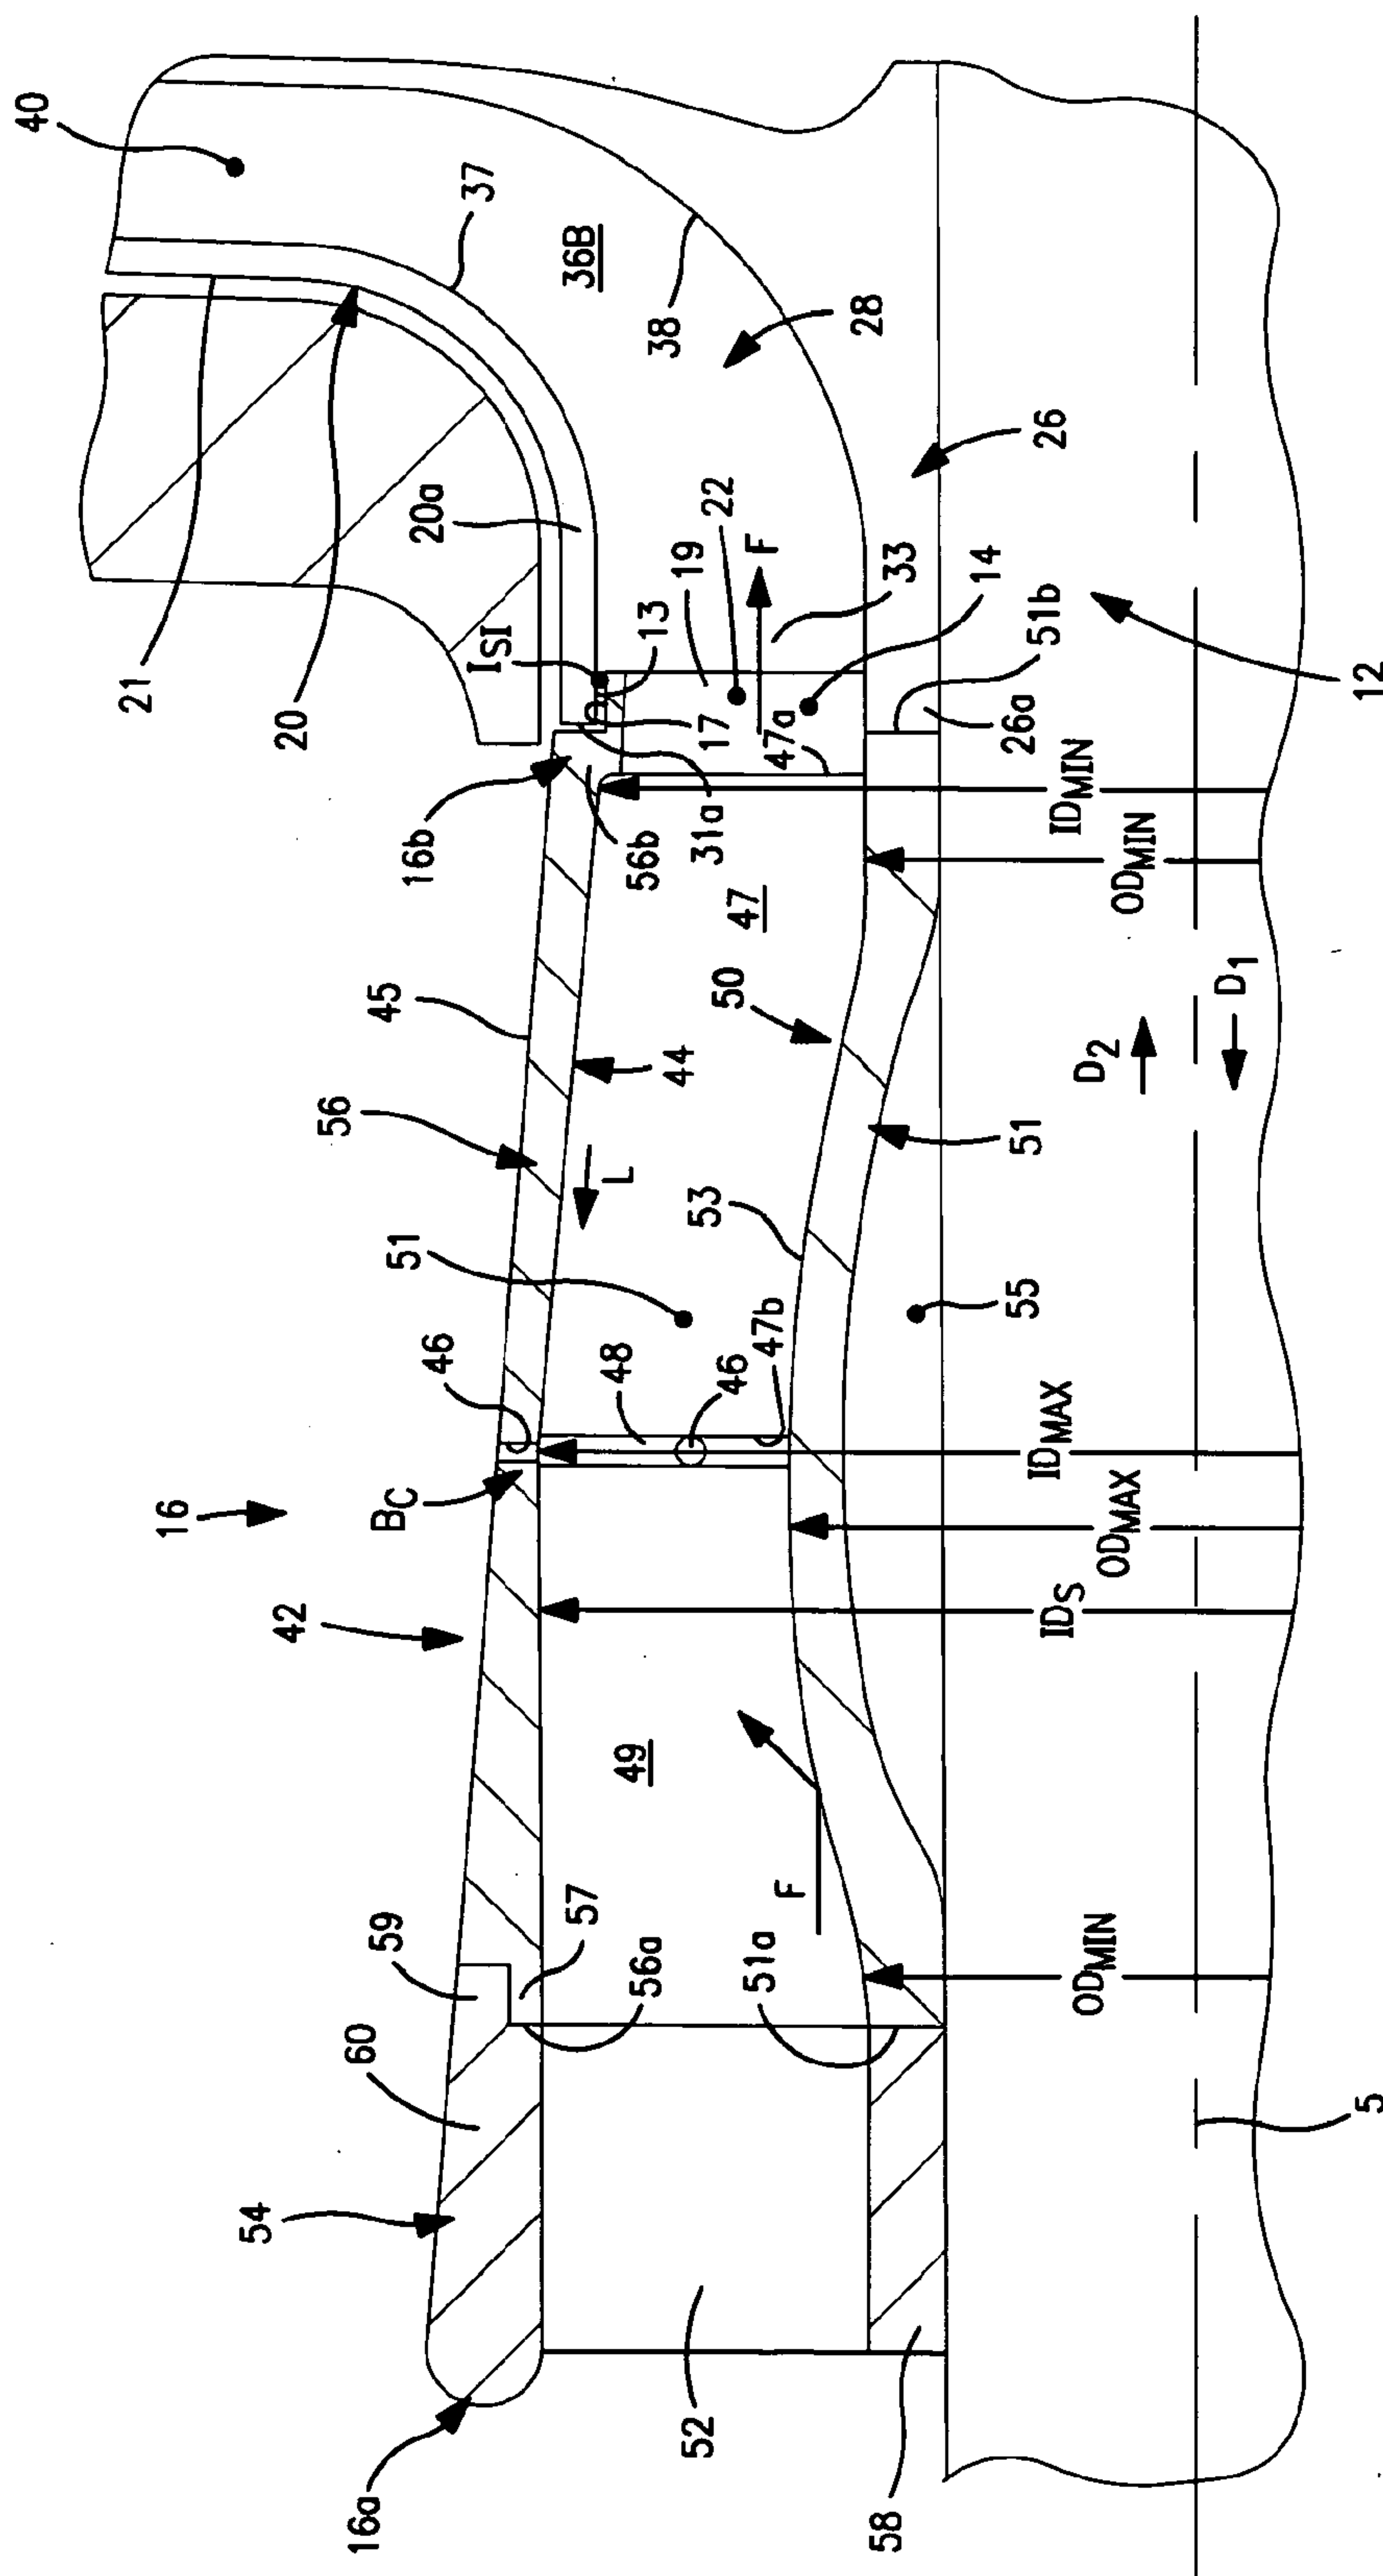


FIG. 3

