United States Patent [19]

Corl

[11] **3,915,398**

[45] **Oct. 28, 1975**

[54] **AUTOMATIC DOFFING APPARATUS**

[75] Inventor: **James G. Corl,** La Vale, Md.

[73] Assignee: **Celanese Corporation,** Charlotte, N.C.

[22] Filed: **July 31, 1972**

[21] Appl. No.: **276,869**

[52] **U.S. Cl.** ..... **242/35.5 A;** 242/18 DD; 242/19

[51] **Int. Cl.²** **B65H 67/04**

[58] **Field of Search** ..... 242/35.5 A, 35.5 R, 35.6 R, 242/18 R, 18 A, 18 PW, 19, 18 DD; 57/34 R, 53

[56] **References Cited**

UNITED STATES PATENTS

3,224,692	12/1965	Nugent	242/19
3,476,328	11/1969	Shimai et al.	242/35.5 R
3,559,903	2/1971	McDermott et al.	242/18 PW
3,682,403	8/1972	Willis	242/18 A
3,761,029	9/1973	Seney	242/18 A
3,791,126	2/1974	Kose et al.	242/35.5 A X
3,801,030	4/1974	Kobatake et al.	242/35.5 A X
3,811,631	5/1974	Mayer et al.	242/35.5 A X

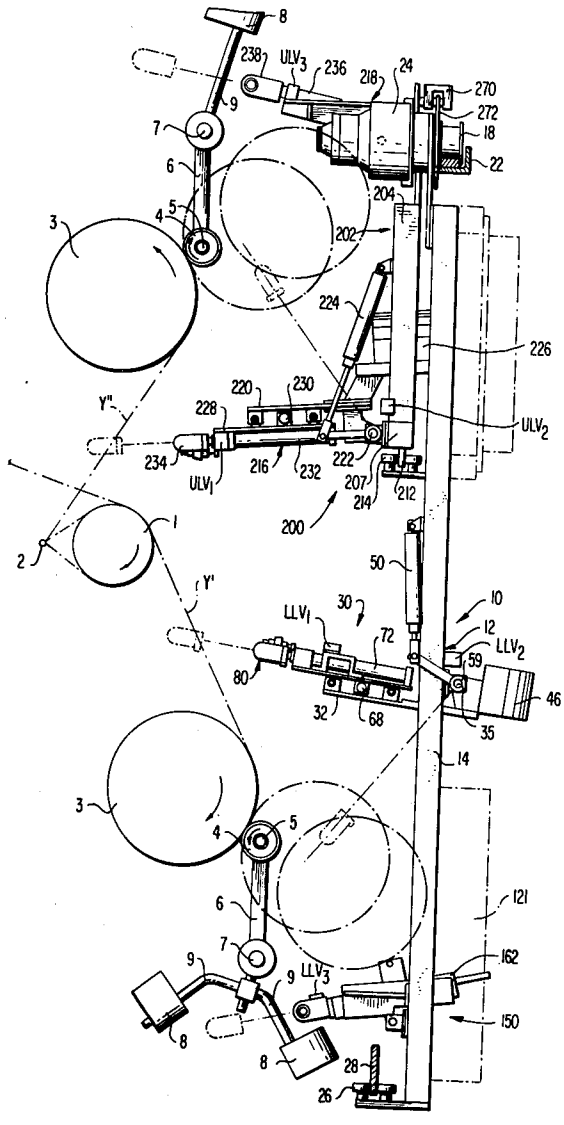
Primary Examiner—Stanley N. Gilreath

Attorney, Agent, or Firm—Robert J. Blanke

[57] **ABSTRACT**

Method and apparatus for doffing filled yarn packages from a metier and donning empty package is disclosed. The apparatus includes an upper frame and a lower frame which are mounted together on a track extending along the length of the metier. Each frame includes an arm operable to swing the package away from the cam and an arm for engaging the yarn, severing the yarn and throwing on the yarn ends after the filled package has been replaced with an empty package. The apparatus includes controls for coordinating the movements of the various components.

6 Claims, 30 Drawing Figures



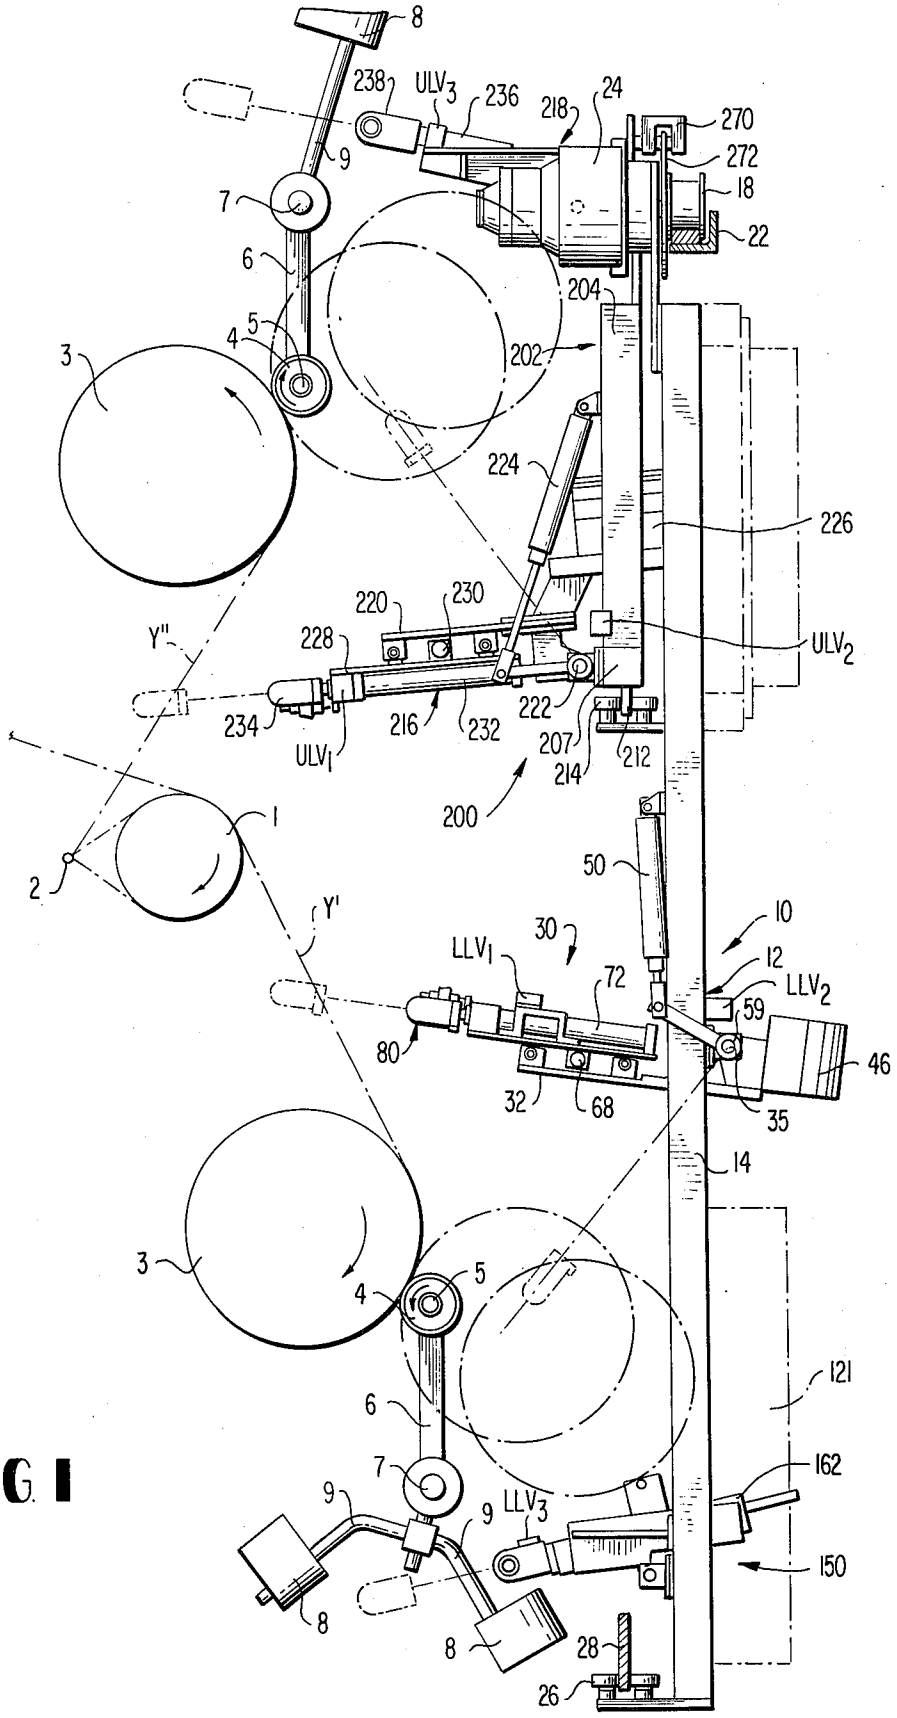

8
238
ULV3
236
218
24
270
272
18
22
9
7
6
5
4
3
204
202
224
226
220
230
228
Y"
ULV2
234
ULV1
216
232
222
207
214
212
200
1
2
50
Y'
10
30
LLV1
12
LLV2
72
59
80
46
32
68
35
14
121
162
150
LLV3
28
26

FIG. 1

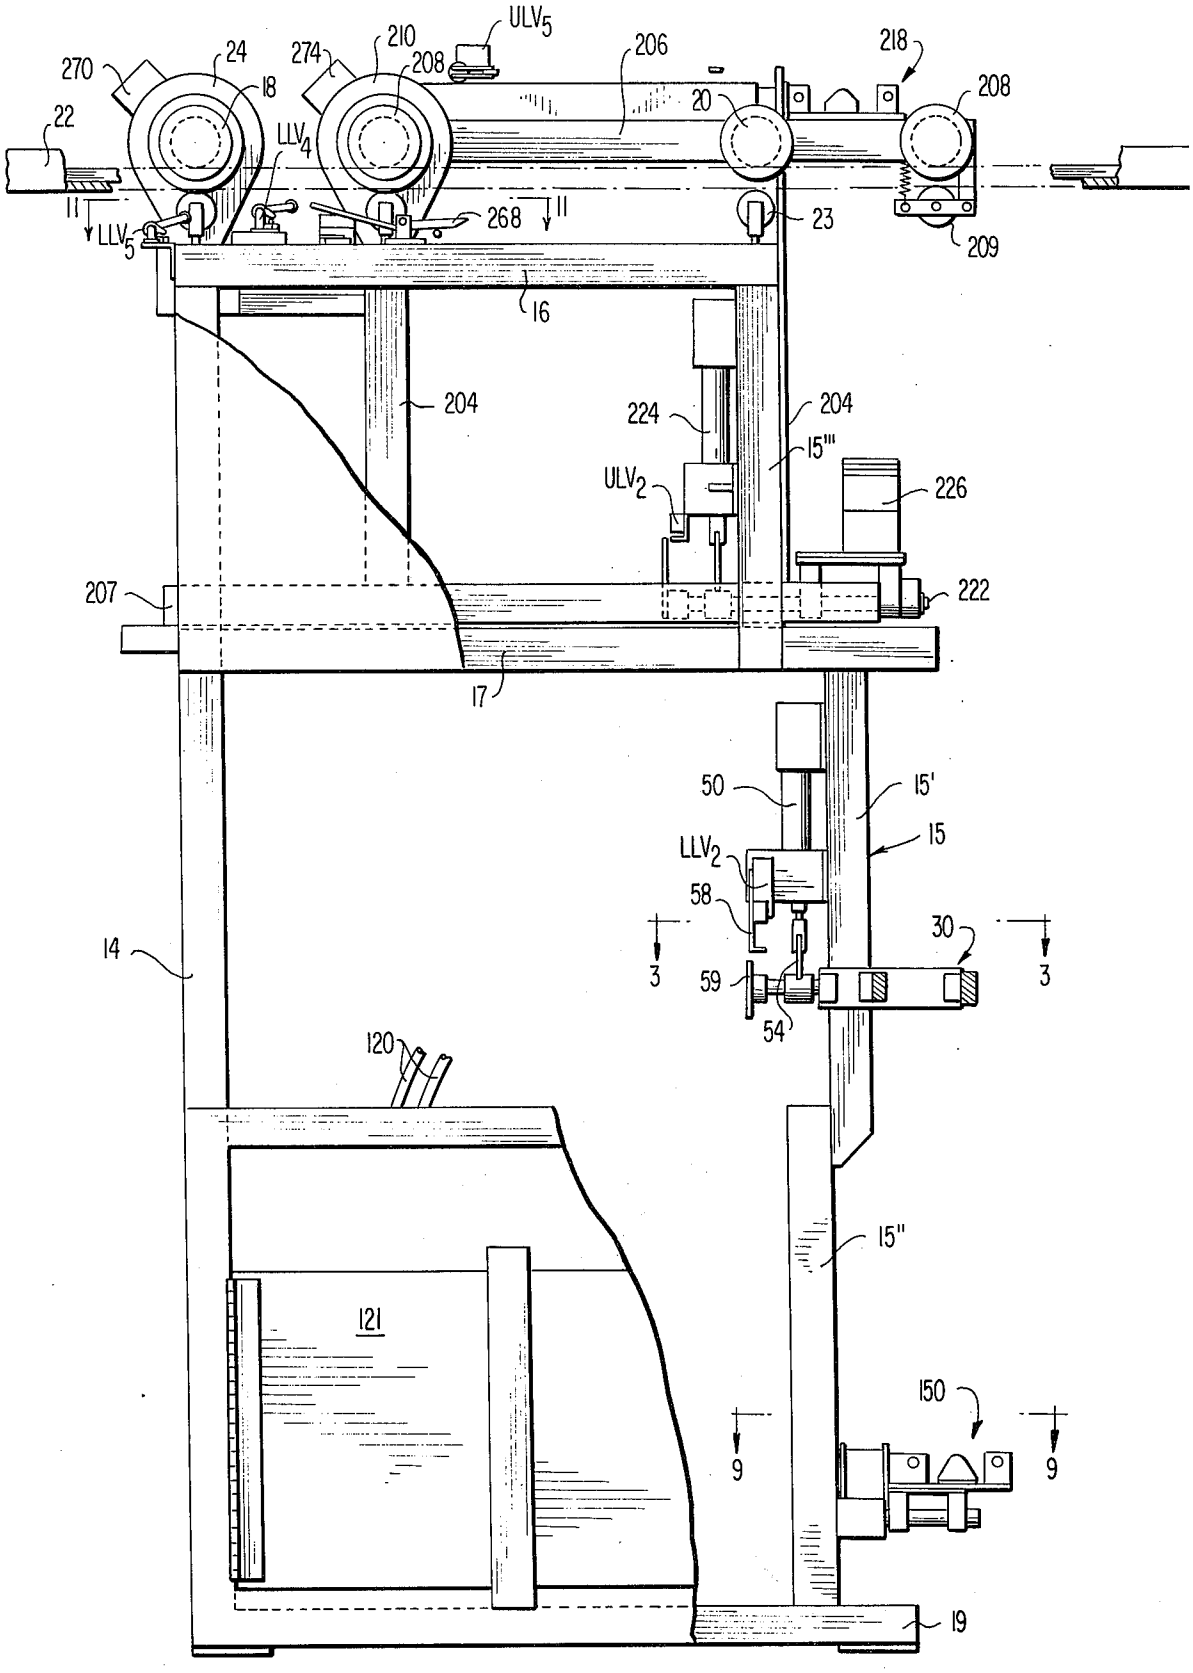

ULV5
206
218
270
24
274
210
208
208
18
20
22
LLV4
268
23
209
16
204
224
204
15'''
ULV2
226
207
222
17
50
15'
LLV2
15
58
30
3
3
59
54
14
120
15''
121
150
9
9
19

FIG. 2

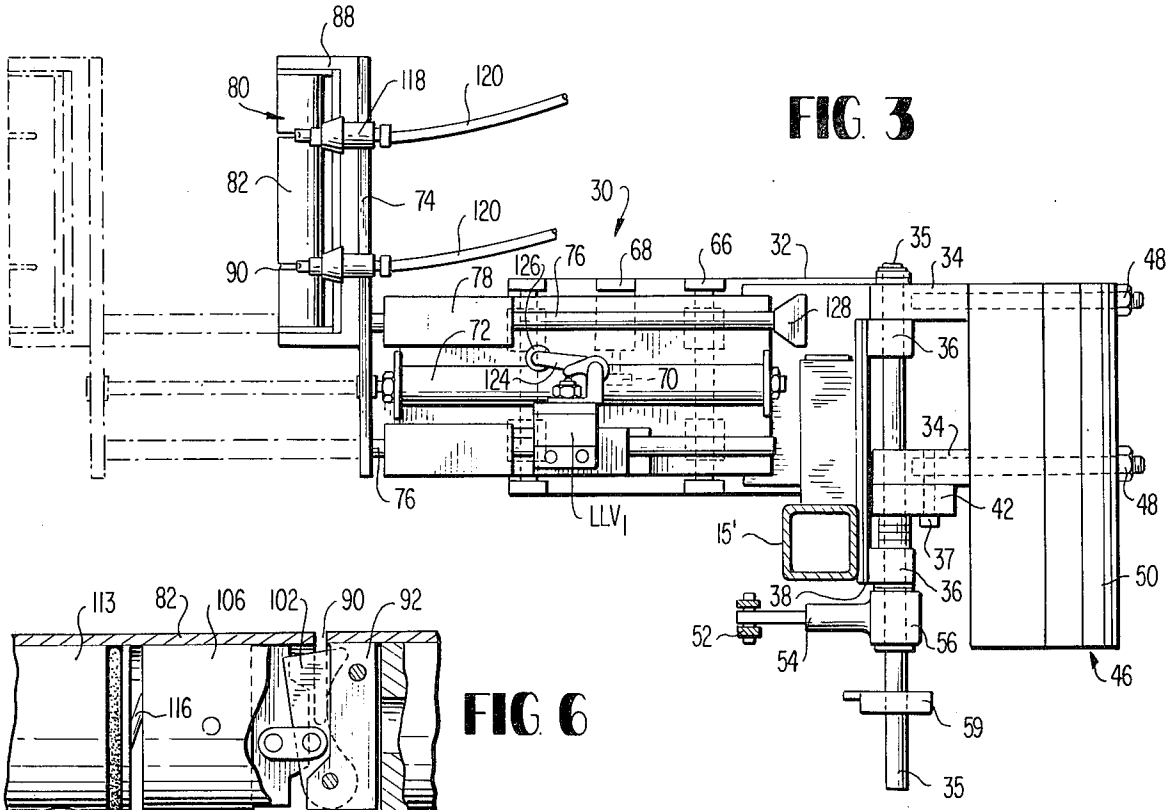


FIG. 3

FIG. 6

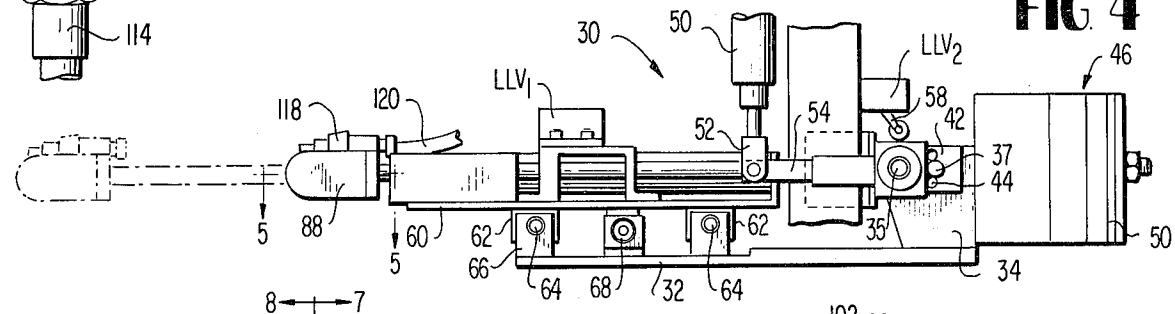


FIG. 4

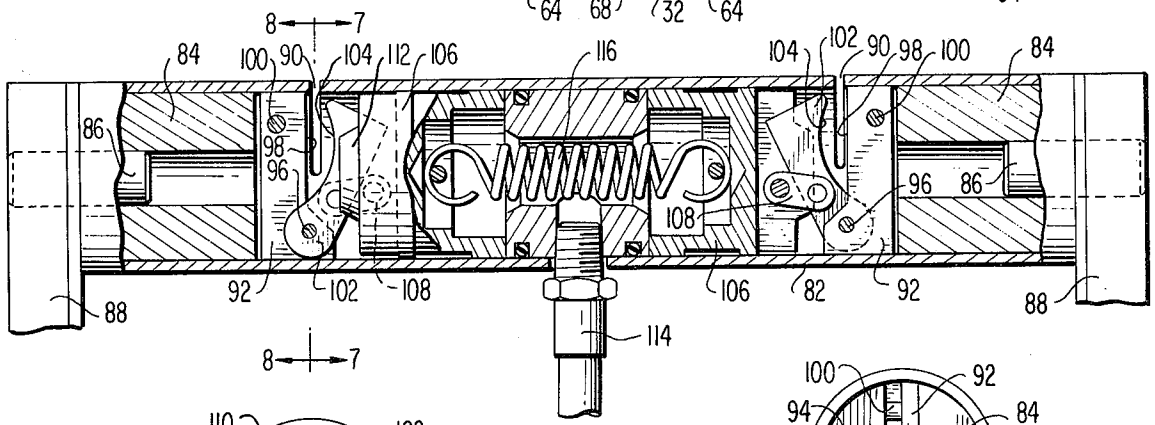


FIG. 5




FIG. 7




FIG. 8

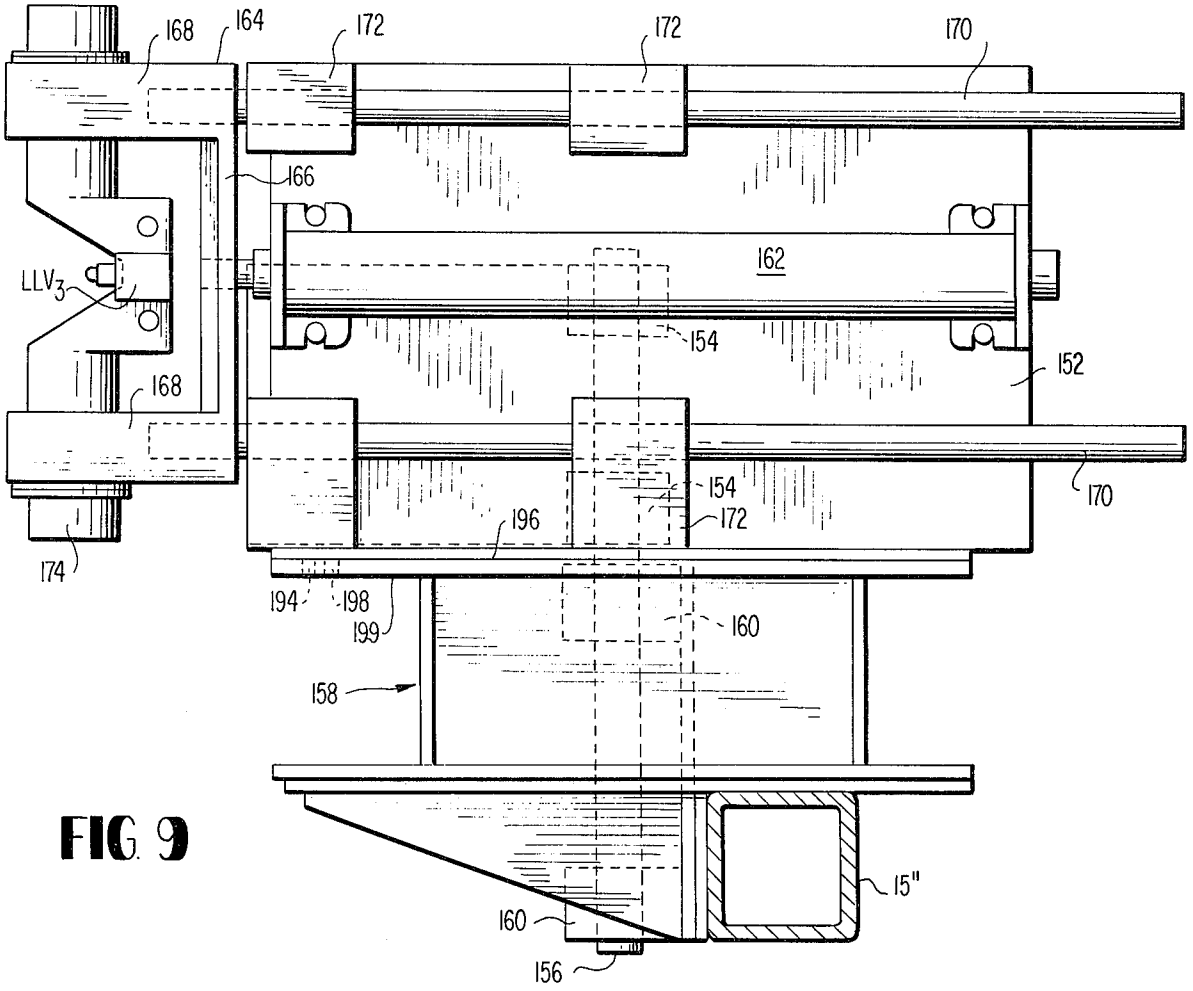

168
164
172
172
170
166
162
LLV3
154
152
168
154
170
196
172
174
194
198
199
160
158
160
15"
156

FIG. 9

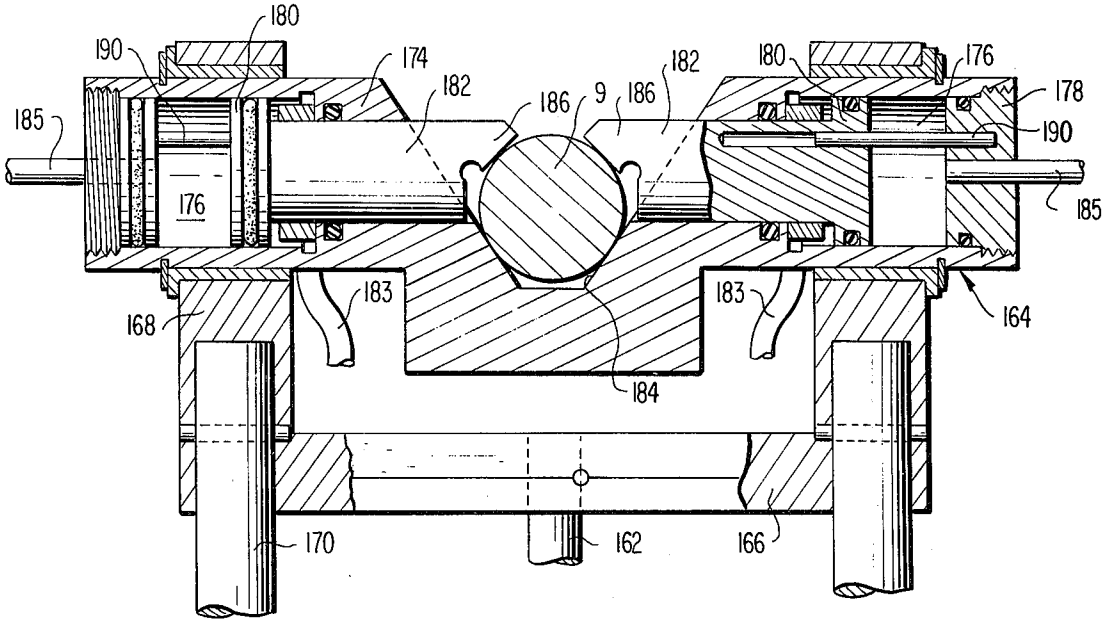

180
190
174
182
186
9
186
182
180
176
178
185
176
190
185
183
183
168
164
184
170
162
166

FIG. 10

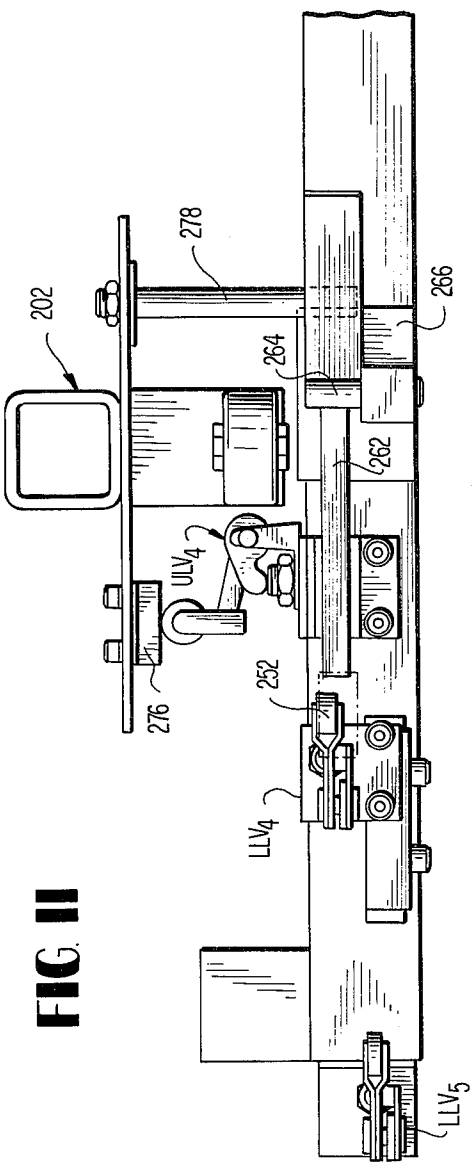


FIG. 11

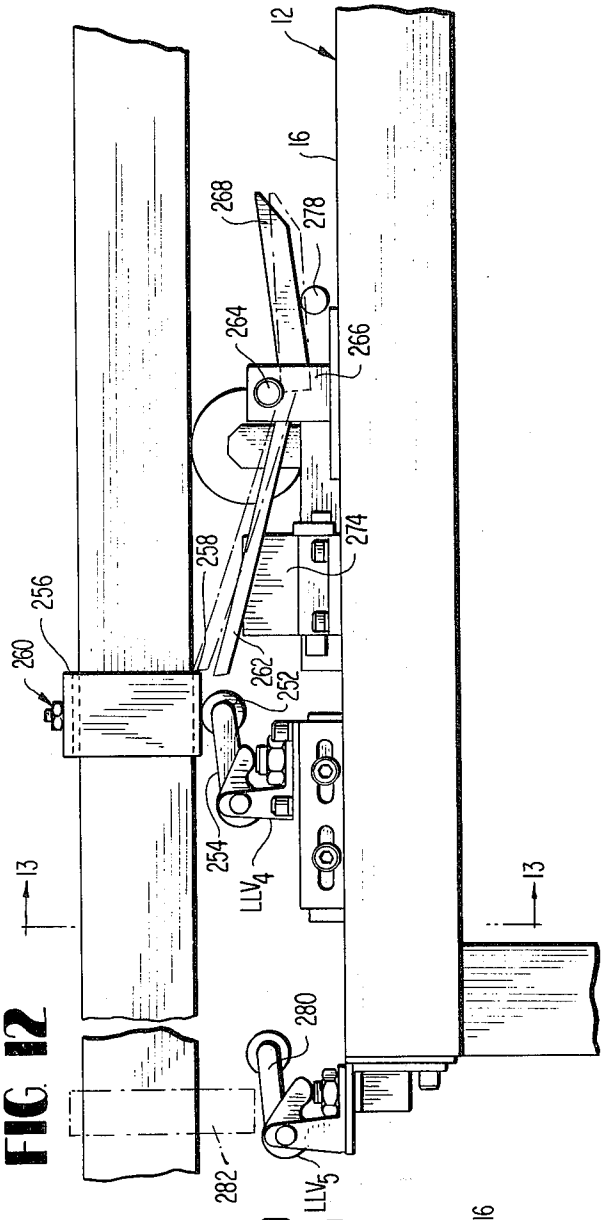


FIG. 12

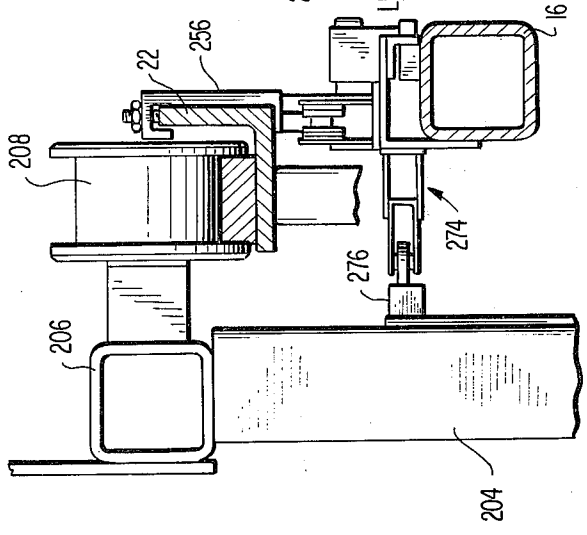


FIG. 13

FIG. 14D

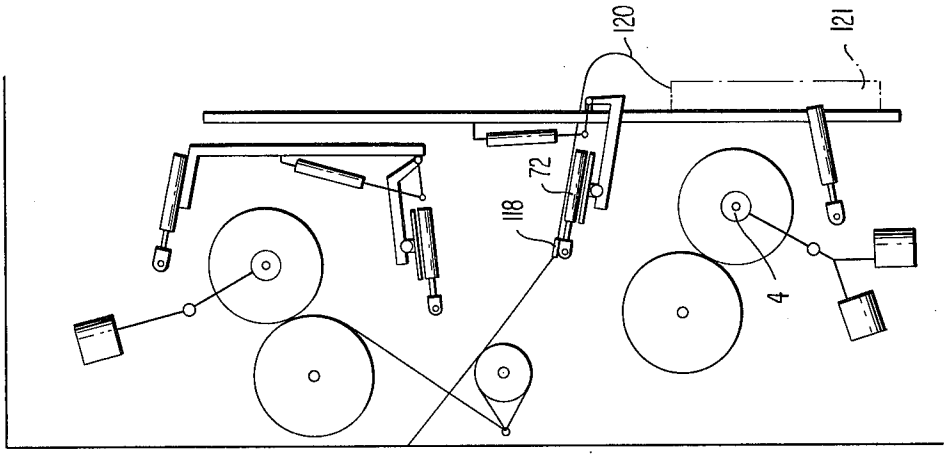


FIG. 14C

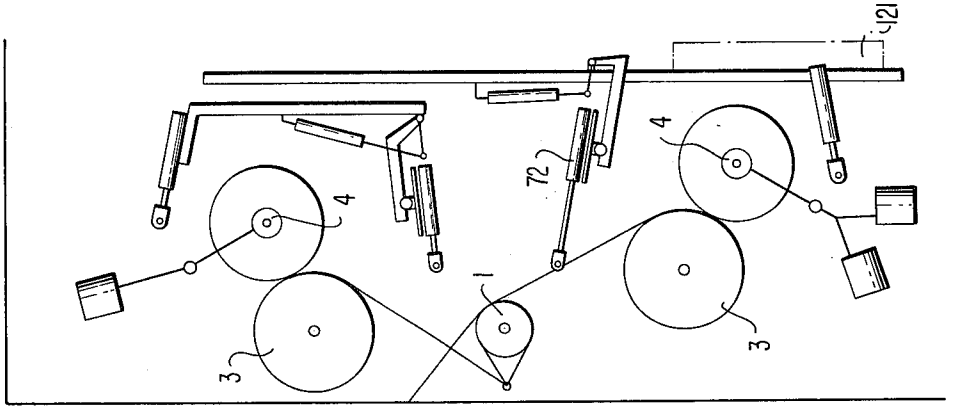


FIG. 14B

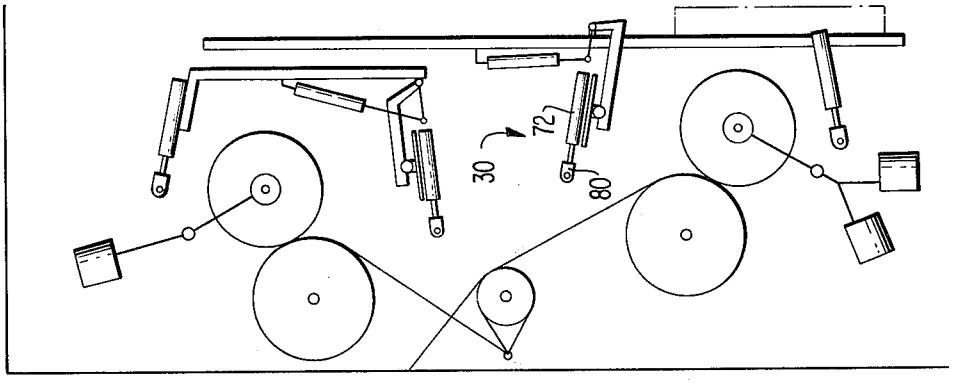


FIG. 14A

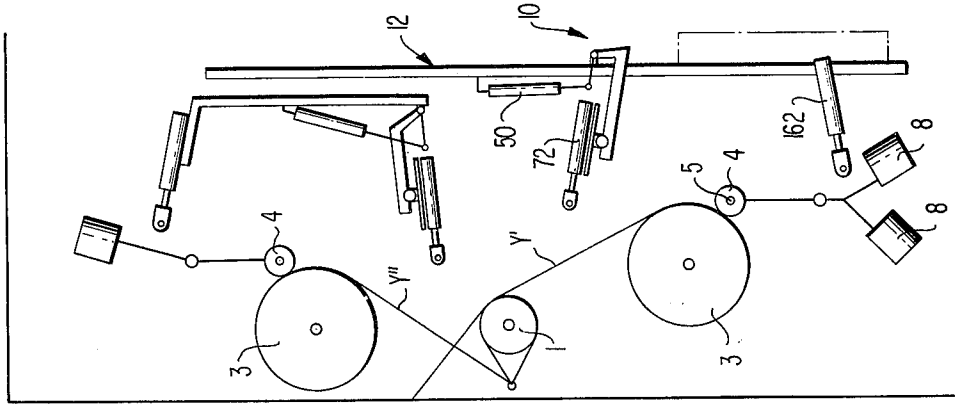


FIG. 14H

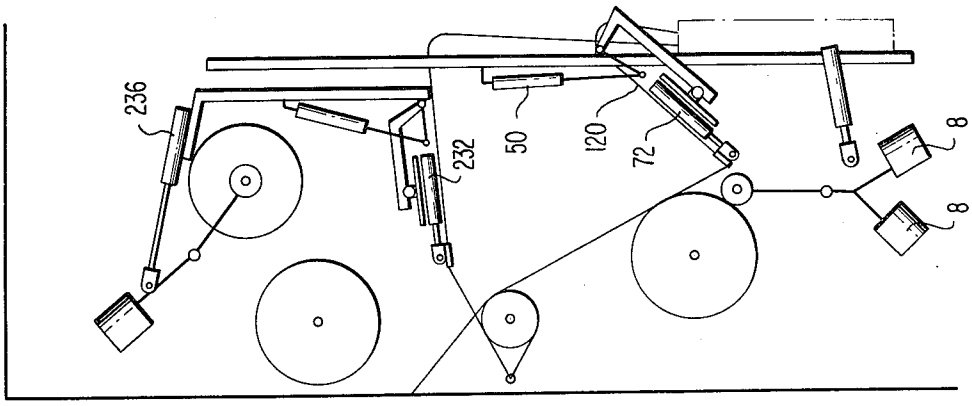


FIG. 14G

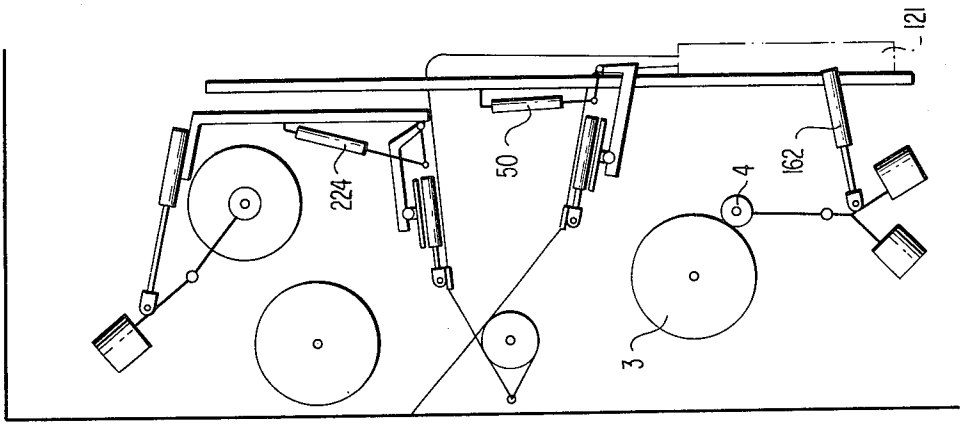


FIG. 14F

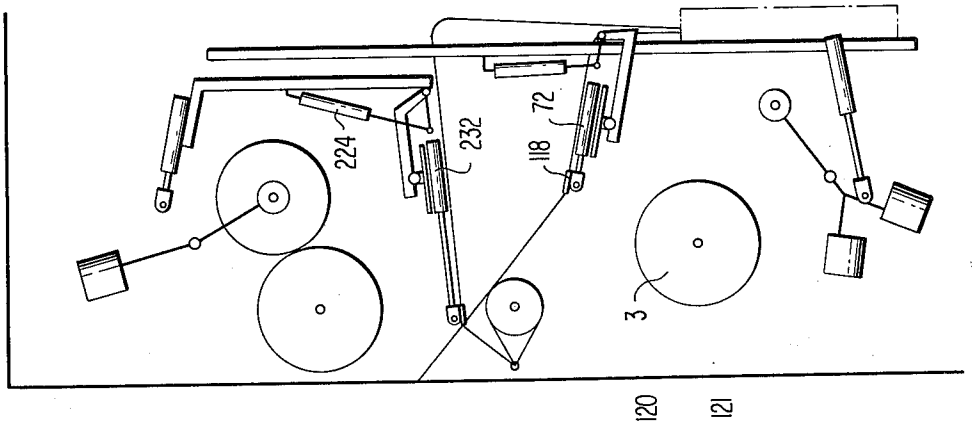


FIG. 14E

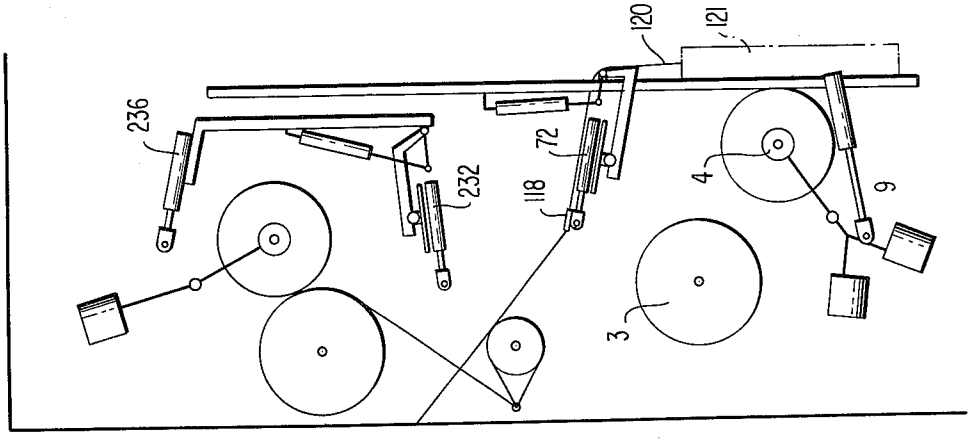


FIG. 14L

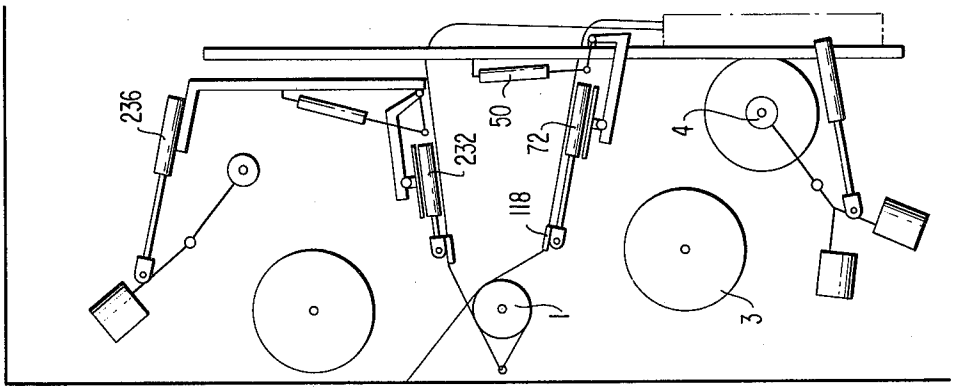


FIG. 14K

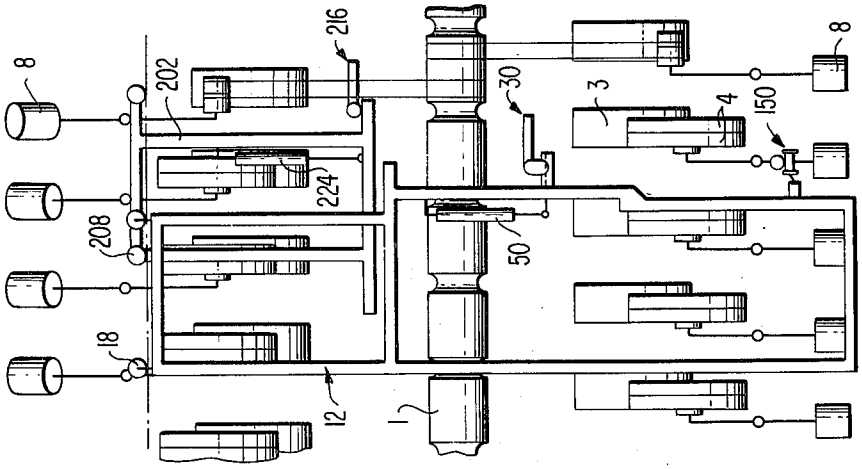


FIG. 14J

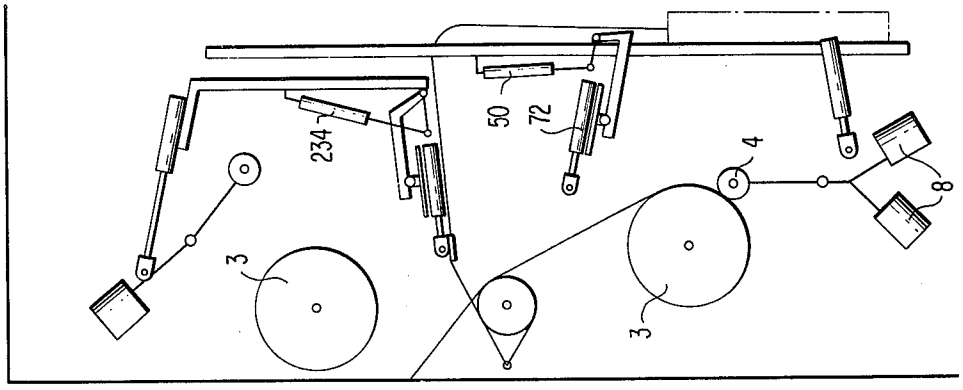


FIG. 14I

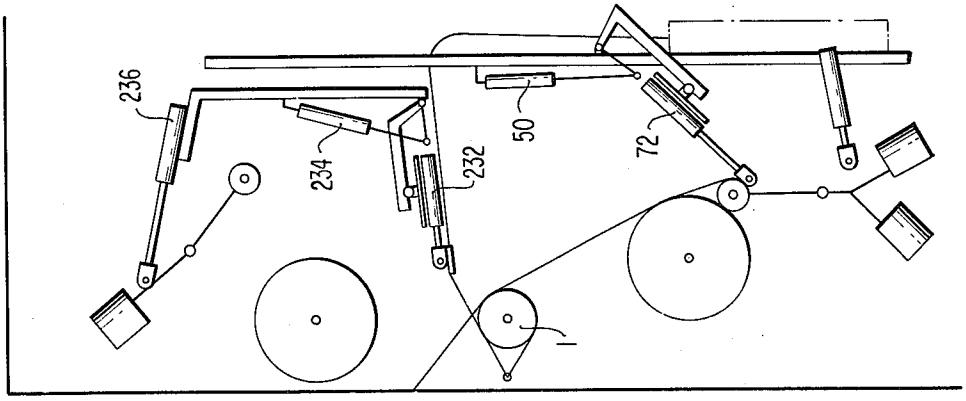


FIG. 14P

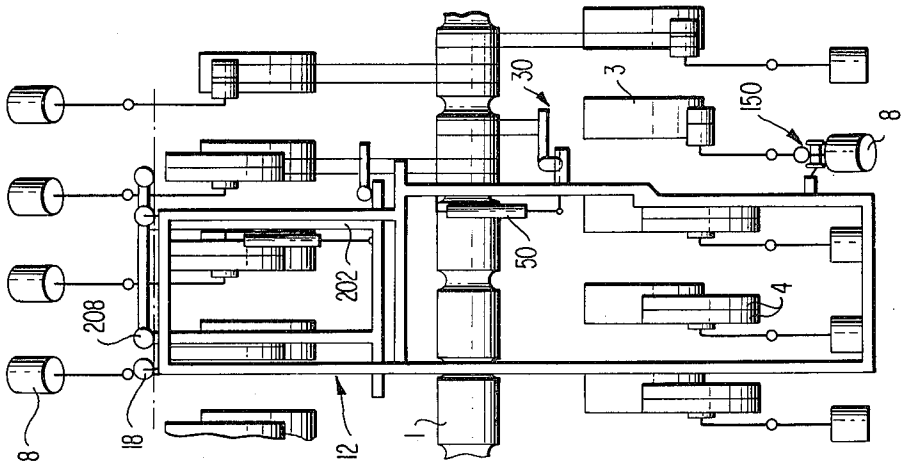


FIG. 14O

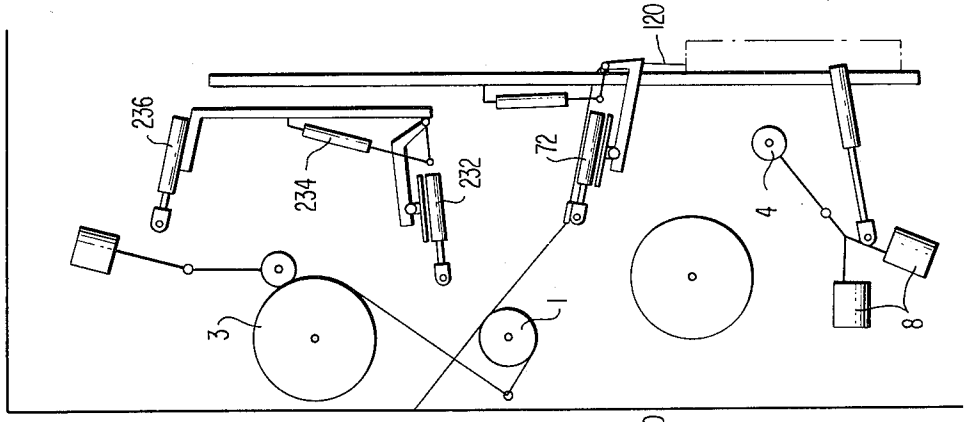


FIG. 14M

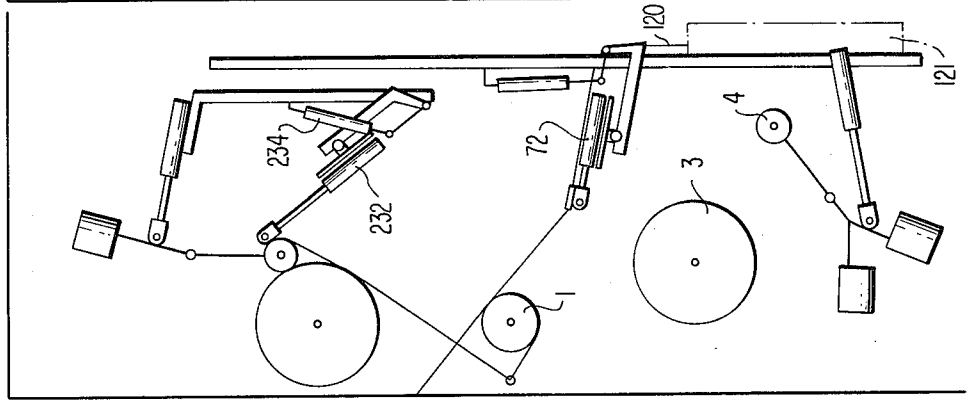


FIG. 14M

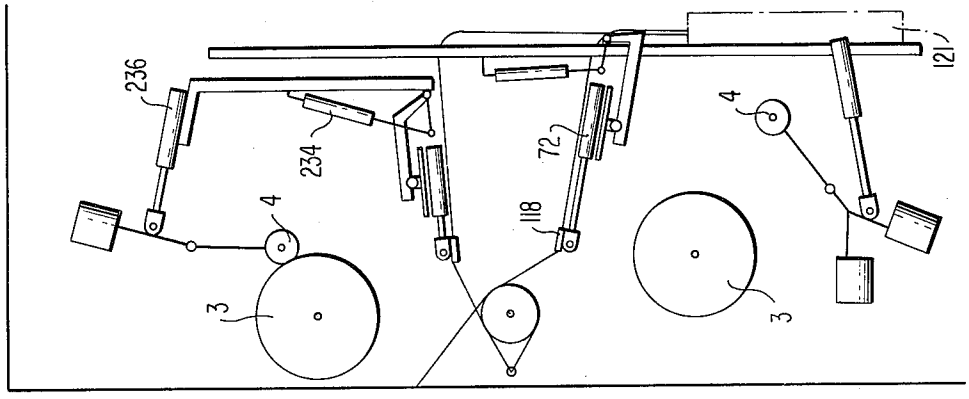
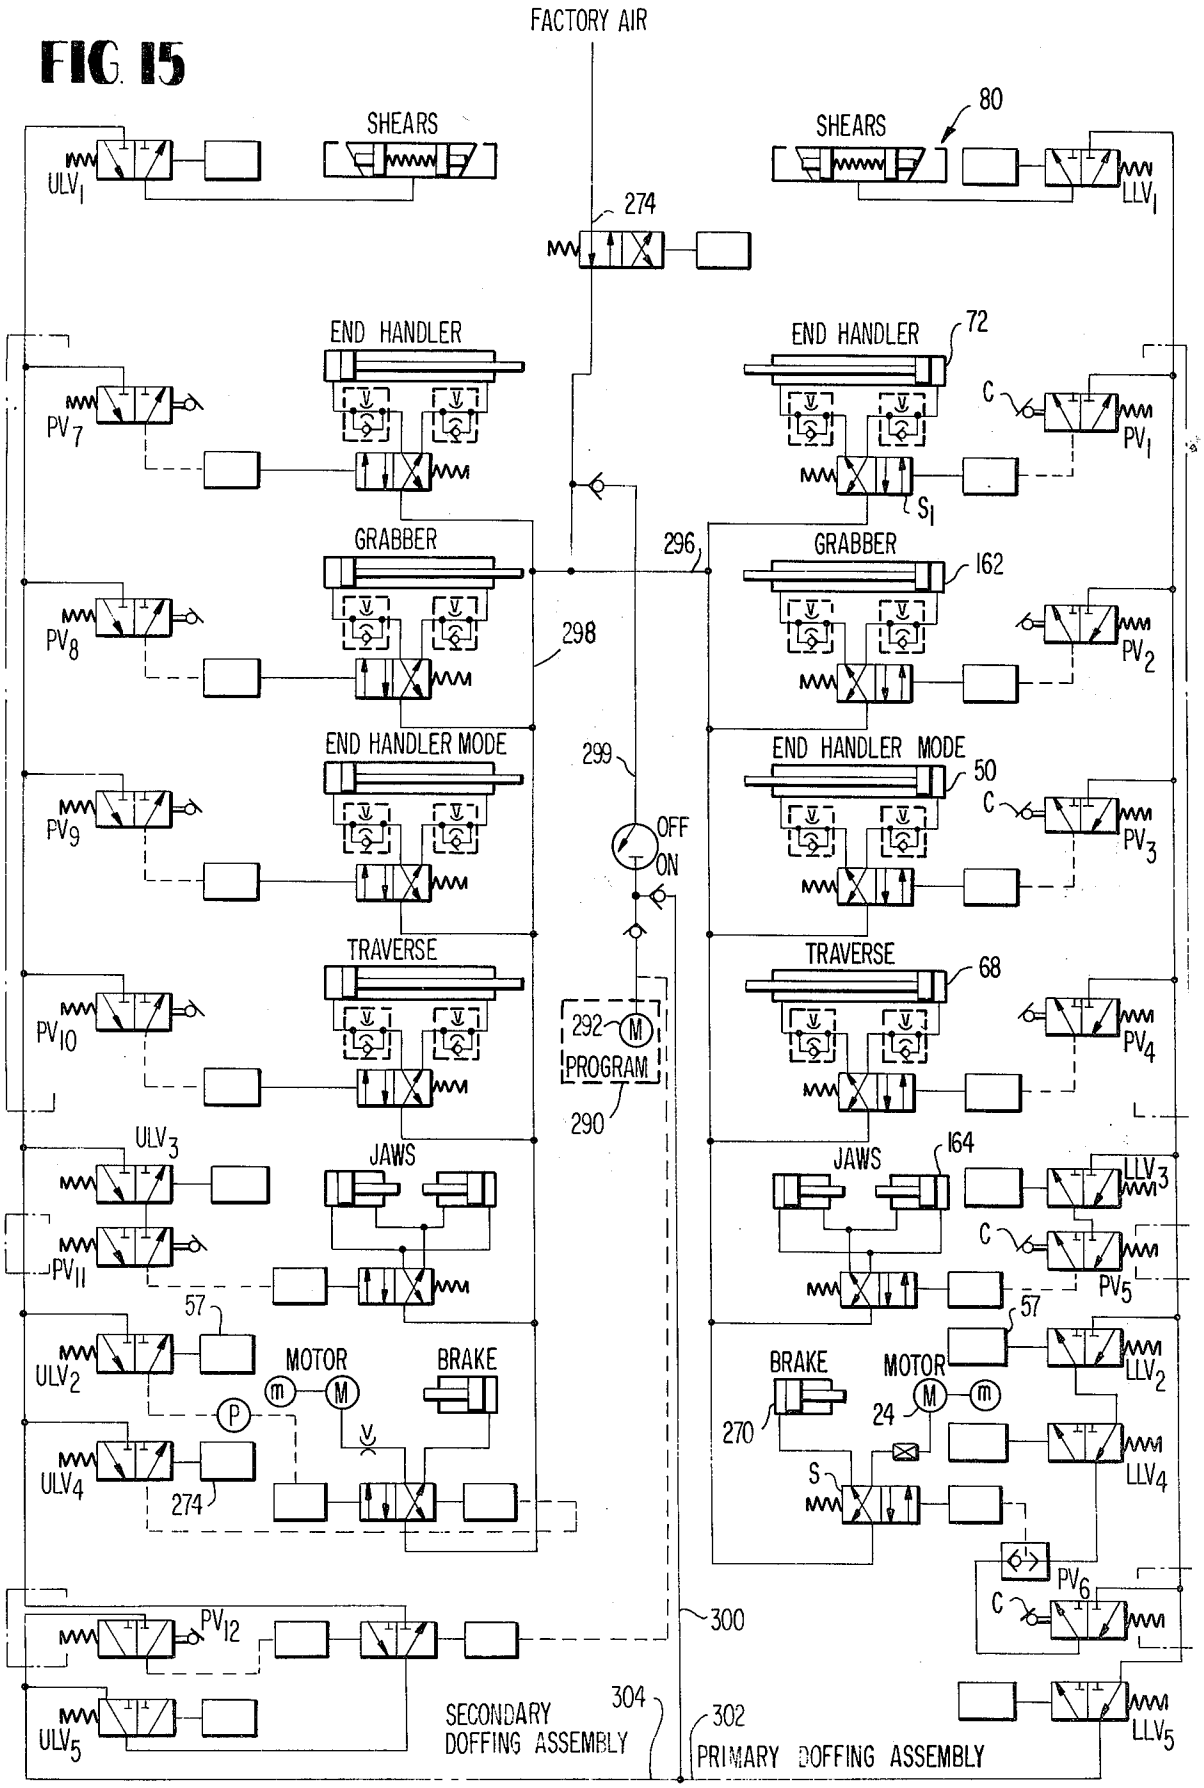


FIG. 15


FACTORY AIR
SHEARS
SHEARS
80
ULV1
LLV1
274
END HANDLER
END HANDLER
72
PV7
C
PV1
S1
GRABBER
GRABBER
162
296
PV8
298
PV2
END HANDLER MODE
END HANDLER MODE
50
299
PV9
OFF
ON
C
PV3
TRAVERSE
TRAVERSE
68
PV10
292
PROGRAM
290
PV4
ULV3
JAWS
JAWS
164
LLV3
PV11
C
PV5
57
57
ULV2
MOTOR
BRAKE
BRAKE
MOTOR
LLV2
P
270
24
ULV4
274
S
LLV4
PV6
C
300
PV12
ULV5
304
302
SECONDARY DOFFING ASSEMBLY
PRIMARY DOFFING ASSEMBLY
LLV5

AUTOMATIC DOFFING APPARATUS

BACKGROUND OF THE INVENTION

This invention relates to yarn winding and, more particularly, to methods and apparatus for doffing and donning yarn packages on a metier.

In accordance with conventional practice, synthetic yarns, such as cellulose acetate, are extruded through dies and pass downwardly through a drying cabinet assembly as continuous filaments. The ends emerge from the drying cabinet assembly at the winding stations which are spaced at uniform intervals along the length of the metier. One type of metier that has been in use for many years has a rotary shaft that extends along the length of the metier. Feed rolls are fixed on the shaft at each winding station. The shaft turns continuously and the ends are wrapped on the feed roll, which maintains a substantially constant tension in the yarn ends. At each winding station, a rotary cam is positioned above the feed roll for winding two of the ends on tubular packages which are mounted on a mandrel or the upper package spindle. Another rotary cam is mounted below the feed roll for winding the other two yarn ends on packages mounted on the lower package spindle. Both of the cams rotate continuously and each cam has a pair of spiral grooves which cause the yarn to traverse across the package during a winding operation. As the yarn builds on the bobbins, the spindles move progressively away from the cam, although the surface of the package remains in driving engagement with the cam.

Typically, many winding stations are provided on each metier and operators are employed to doff the filled packages periodically and to donn the take-up tubes or packages on the mandrels. In order to accomplish this, the operator must sever the yarn ends between the cam and the feed roll, remove the yarn package, replace the yarn package with an empty take-up package and throw on the yarn ends. During this process, the ends that have been severed accumulate on the feed roll and after making the throw on, the operator removes the waste yarn. It may take the operator as long as one to two hours, or more, to complete the doffing of an entire metier, depending upon the denier of the yarn and the size of the yarn packages, and the number of yarn ends being extruded on the metier.

In a plant that has many metiers, it is necessary to maintain a schedule for the operators to make maximum use of their time. Significant savings in labor costs could be realized if the time required for making the doff could be significantly reduced. This would provide greater flexibility in scheduling the individual operators. Furthermore, automation of the doffing operation would permit the use of less skilled labor, without reducing the percentage of successful doffs.

Previous attempts to design equipment for automatically doffing metiers typically are prohibitively expensive. A factor in contributing to the high cost of this prior equipment is the means for positioning accurately the apparatus relative to each winding station. Alignment of the apparatus is necessary to provide the proper interaction between the components on the metier and the components on the doffing apparatus. Another handicap in designing doffing apparatus is the presence of a potentially explosive atmosphere around the metiers, which prohibits the use of electrical equipment in which sparking may occur. Thus, for protection against this hazard, electrical equipment should not be used.

SUMMARY OF THE INVENTION

It is a principal object of the invention to provide an improved doffing method and apparatus for automatically severing yarn ends while they are being wound on a yarn package and, after manual removal of a filled package and replacement of an empty package automatically throwing on the yarn ends to resume winding of a new package.

It is yet another principal object of the invention to provide a doffing method and apparatus which is capable of automatically travelling from one winding station to the next along the length of the metier while aligning itself at each successive station.

In accordance with a preferred embodiment of the invention, the apparatus includes a primary frame which is supported between an upper track and a lower track for movement along the length of the metier. An actuating means is provided on the primary frame for displacing the lower package spindle away from the cam when the frame is aligned with one of the winding stations. Yarn engaging means is also provided on the primary frame for severing both of the yarn ends being wound in packages on the lower package spindle. The ends are severed between the feed roll and the lower cam. The severing means includes means for drawing the waste yarn into a receptacle on the primary frame. The severing means also accomplishes the throw-on after the operator has removed the packages and placed a pair of empty take-up tubes on the lower mandrel.

A secondary frame is supported on the primary frame and the upper track and is movable relative to the primary frame. The primary frame is movable a sufficient distance along the upper track to be aligned with the next winding station while the secondary frame is aligned with the preceding winding station. The secondary frame has an actuator positioned for displacing the upper mandrel away from the cam and severing means for severing the yarns between the feed roll and the upper cam. The severing means on the secondary frame also includes means for drawing the yarn to a waste receptacle on the primary frame after the ends have been severed. The severing means on the secondary frame is movable to accomplish throw-on of the yarns after the empty take-up tubes have been placed on the mandrel.

The sequence of operation of the components of the apparatus is controlled by a timer which operates various valves controlling air flow in a pneumatic circuit. The primary and secondary frames are driven by air motors engaging the upper track and the frames are provided with stop means to maintain a predetermined spacing between them as they progress along the track. The apparatus accommodates for dimensional variations longitudinally of the metier and does not require close tolerances in aligning the frames with the winding stations. When positioned at one end of the metier, the doffing apparatus progresses automatically from one winding station to the next along the full length of the metier and when it reaches the opposite end, the apparatus stops.

Important features of the invention include the severing means which has a severing head which is movable laterally of the yarn ends. The severing head is extend-

able toward yarn ends being fed to position the ends in slots where they are severed by cutters within the head. The severed end from the feed roll is drawn to waste through the head. Subsequently, the throw-on is made by positioning the head adjacent the empty packages and moving the head laterally to align both ends with the respective grooves in the packages. The timer controls the movements of the actuator and the severing head and the motors controlling the movement of the frames. Thus, it is unnecessary to provide indexing cams or other guides on the metier except for the upper and lower tracks.

DETAILED DESCRIPTION OF THE DRAWINGS

This preferred embodiment of the invention is illustrated in the accompanying drawings in which:

FIG. 1 is a side elevational view, partially schematic, of a doffing machine according to the invention;

FIG. 2 is a front elevational view, partly broken away, of the doffing machine;

FIG. 3 is a cross-sectional view along the line 3—3 in FIG. 2 illustrating the primary handling assembly;

FIG. 4 is an enlarged side elevational view of the primary handling assembly;

FIG. 5 is an enlarged cross-sectional view of the primary handling head along the line 5—5 of FIG. 4;

FIG. 6 is an enlarged, fragmental view of the primary handling head as in FIG. 5, but showing the knife displaced for cutting;

FIG. 7 is a cross-sectional view along the line 7—7 in FIG. 5;

FIG. 8 is a cross-sectional view along the line 8—8 in FIG. 5;

FIG. 9 is a cross-sectional view of the doffing machine along the line 9—9 in FIG. 2, illustrating the primary grabber assembly;

FIG. 10 is a transverse cross-sectional view of the primary grabber head;

FIG. 11 is a cross-sectional view of the doffing machine along the line 11—11 in FIG. 2, illustrating the frame traversing and indexing mechanism;

FIG. 12 is an enlarged, elevational detail view of the traversing and indexing mechanism as in FIG. 11;

FIG. 13 is a cross-sectional view of the doffing machine along the line 13—13 in FIG. 12;

FIGS. 14A through 14P are schematic views depicting the sequence of operation of the doffing machine, with FIGS. 14A through 14j and FIGS. 14M through 14O being side elevational views, and FIGS. 14K and 14P being front elevational views; and

FIG. 15 is a diagrammatical representation of the pneumatic control circuit employed in operating the doffing machine.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT OF THE INVENTION

FIG. 1 illustrates a yarn winding station of a metier which comprises a continuously rotating feed roll 1 on which are wrapped a plurality of yarns Y received from the dies at the base of the extruder. The term "yarn" is used herein to mean synthetic monofilaments, or filament yarn, or other filamentary material that is suitable for winding into packages on a metier of the type disclosed herein. Preferably, four yarns are supplied to the feed roll and spaced apart on the surface of the roll. Two yarns Y' pass through guides 2 and are transferred to a lower yarn winding assembly. The remaining two yarns Y'' pass through similar guides disposed adjacent the guides 2 and are transferred to an upper yarn winding assembly.

Each of the winding assemblies comprises a power-driven, rotary cam 3 and a pair of take-up tubes or packages 4 mounted side-by-side over a mandrel which is journalled for rotation on a spindle 5. The spindle 5 is fixed to a lever 6 which is pivotally mounted on a shaft 7. Crank arms 9 are fastened to the lever 6 to support counterweights 8. The counterweights 8 serve to bias the packages 4 into driven engagement with the cam 3.

The packages 4 are of a conventional tube type and each tube has a length equal to about one-half the width of the cam 3. One of the yarns is wound on one tube and the other is wound on the other tube. Each tube has a circumferential groove about midway of its length for picking up a yarn end from the cam to make the throw-on. The cam 3 includes a pair of helical grooves (not shown) on its outer periphery for guiding the yarn in an axially reciprocal path along the respective packages during the winding operation.

A typical metier has a large number of winding stations which are situated in side-by-side relationship. According to the invention, an automated yarn package doffing machine is provided, including primary and secondary doffing frame assemblies 10 and 200 which traverse the metier, from station to station. The frame assemblies include means for handling the yarn and the bobbin supporting mechanism to enable filled packages to be doffed and empty packages to be donned in sequence.

PRIMARY FRAME ASSEMBLY

The primary doffing frame assembly 10 comprises a primary frame 12 which includes vertical end braces 14 and 15 (FIGS. 1 and 2). The brace 15 includes a plurality of brace portions 15', 15'', and 15'''. Interconnecting the vertical braces are a plurality of horizontal braces 16, 17, and 19. The horizontal and vertical braces are thus interconnected to function as a unitary frame 12. Secured to brackets extending upwardly from the horizontal brace 16 are a pair of spaced support wheels 18 and 20 which roll along a stationary overhead track 22. Guide rollers 23 on the brace 16 engage the lower surface of the track. The guide rollers 23 may be slightly spring biased to increase the traction forces between the driving wheels 18 and 20 and the track 22, and constrain the machine from "jumping" the track.

A motor 24, preferably of the pneumatic fluid-driven type, drives the support wheel 18. In this fashion, the primary frame 12 is suspended from the track 22 by the wheels 18 and 20 and may be propelled along the metier by the motor 24. The bottom of the primary frame 12 may be provided with pairs of horizontally spaced wheels 26 (FIG. 1) which straddle a stationary rail 28, thus providing additional stabilization of the primary frame.

YARN HANDLING

The primary doffing assembly 10 includes a primary yarn handling assembly 30 which is illustrated principally in FIGS. 1 to 8. The primary handling assembly includes a base plate 32 which has a pair of bearing blocks 34 mounted on a horizontal pivot rod 35. The pivot rod 35 is rotatably attached to the vertical brace

portion 15' by means of a pair of bearing blocks 36 on a plate 38, which is fixed to the brace portion 15'.

A bracket 42 is fixedly secured to the pivot rod 35 and extends outwardly therefrom. The bracket 42 includes a plurality of apertures 44 which may be selectively aligned with an aperture in the adjacent block 34. A bolt 37, passing through the aligned apertures, serves to interconnect the base plate 32 and the pivot rod 35 which may be swung vertically as a unit.

A counterweight 46 is attached to the bearing blocks 34 by means of bolts 48. The counterweight 46 is adapted to removably carry a selective number of shims 50 to enable the mass thereof to be varied.

An extendable link, in the form of a swing cylinder 50 driven preferably by pneumatic pressure, is mounted on the brace portion 15' and is connected at its rod end 52 to a crank arm 54. The crank arm 54 is provided with a collar 56 affixed to the pivot rod 35 and thereby functions as a crank arm for the pivot rod 35 and the base plate 32. Extension and retraction of the cylinder 50 induces vertical swinging movement of the handling assembly 30 between a raised position, as shown in full lines in FIG. 1, and a lowered position, as shown in phanton lines in FIG. 1. A mechanical limit valve LLV_2 is mounted on the brace portion 15' and includes an actuator lever 58 which contacts a cam 59 mounted on the pivot rod 35. Rotary movement of the pivot rod 35 will be sensed by the valve LLV_2.

The handling assembly further includes a shift plate 60 (FIGS. 3, 4). The shift plate 60 is provided with a pair of downwardly extending brackets 62 which house horizontal guide pins 64. The guide pins 64 are slidably supported within a pair of ears 66 which project upwardly from the base plate 32. A pneumatically-operated shift cylinder 68 is mounted on the base plate 32 beneath the shift plate 60. The rod end of the shift cylinder is attached to a bracket 70 which projects downwardly from the shift plate 60. The spacing between the brackets 62 and the ears 66 is arranged to permit the shift plate 60 to be shifted laterally upon expansion and retraction of the shift cylinder 68.

Fastened to the top of the shift plate 60, by means of brackets 70, is an extensible member in the form of a pneumatic cylinder 72. The cylinder 72 has, secured to its rod end, a transverse arm 74. The transverse arm 74 is provided with a pair of guide rods 76 which are slidably receivable within sleeves 78 carried by the shift plate 60. The provision of guide rods 76 within the sleeves 78 assures that the arm 74 will travel in a substantially straight, predetermined path upon extension of the cylinder 72, as shown in broken lines in FIG. 3.

Mounted on the outer face of the arm 74 is an end handling head 80. As shown primarily in FIGS. 5–8, the handling head 80 comprises a generally cylindrical housing 82. The housing 82 is closed at its ends by means of plugs 84. A pair of connecting pins 86 are mounted in the plugs 84 and are fastened to the legs of a U-shaped bracket 88, the latter being fixed to the arm 74.

The housing 82 is provided with a pair of slots 90 facing generally in the direction of movement of the arm 74. Mounted within the housing 82 adjacent the slots 90 are identical yarn severing mechanisms. The severing mechanisms each comprises a stationary blade member 92 which is secured to the plug 84 within a groove 94 formed in the plug (FIG. 8). An extended portion 84 of the plug receives a securing pin 96 passing through the stationary blade 92. The stationary blade is provided with a sharpened edge 98 and a stop pin 100 projects across the groove 94.

Pivotally mounted on the pin 96 is a reciprocal or swingable shearing knife 102. The knife 102 is provided with a sharpened edge 104 which cooperates in a shearing relationship with the sharpened edge 98 of the blade member 92. The knife 102 is connected to a reciprocal piston 106 by means of a pivoted link 108. The knife 102 and the link 108 are received within a groove 110 of the piston 106 and are guided for movement by a pair of guide shoulders 112 which project from the piston 106.

A block 113 is mounted in the interior of the tubular housing 82 between the pistons 106. The block 113 is held stationary by a threaded end of an inlet conduit 114. The piston 106 is shiftable toward the stationary blade member 92 in response to air under pressure received from the inlet conduit 114. The pistons 106 of the respective severing mechanisms are interconnected by means of a spring 116 which biases the pistons and the knives 102, to a retracted non-severing position abutting the block 113. It is apparent that air pressure in the interior of the block 113 causes the knives 102 to shift in a scissoring motion (FIG. 6).

Mounted on the housing 82 of the handling head 80 is a pair of suction elements, preferably in the form of aspirators 118 (FIGS. 3 and 4). Each aspirator 118 is disposed in generally vertical alignment with a respective one of the slots 90. The aspirators 118 are provided with suitable discharge conduits, such as flexible tubes 120, which place the aspirators in communication with a waste container 121 mounted on the primary frame 12 (FIG. 2).

The handling head 80 moves toward the pair of yarn ends Y' by extension of the cylinder 72 to allow each yarn to pass through one of the slots 90 as the yarn passes from the feed roll. At the proper time, air is conducted under pressure to the interior of the block 113 to displace the pistons 106 outwardly, thereby causing the knives 102 to cut the yarn ends Y'. After the ends have been cut, the end from the feed roll 1 is drawn into the waste container 121 by the aspirator 118.

The cylinder 72 is arranged such that, upon extension of the handling head 80 the tubular housing 82 engages the yarn ends. Since the yarn ends are oscillating between the feed roll 1 and the cam 3, the yarn ends will travel into alignment with the slots 90 such that the yarn ends will enter the slots 90.

In order to provide an actuation signal for the knife actuating pistons 106 at the end of the stroke of the cylinder 72, a limit valve LLV_1 is mounted on the shift plate 60 and is provided with a pivotal arm 124 having a roller 126 at its end. An abutment 128 is disposed on the end of one of the guide rods 64 and is arranged to contact the roller 126 and actuate the valve LLV_1 at the end of the stroke of the cylinder 72.

PACKAGE HANDLING

The primary doffing assembly 10 also includes a grabber assembly 150, as is chiefly illustrated in FIGS. 1, 2, 9, and 10. The function of the grabber assembly 150 is to automatically shift the packages 4 of the lower winding assembly toward and away from the cam 3 in coordinated, or timed, relation to the operation of the yarn handling assembly 30. In this fashion, replacement

of the filled packages with empty packages may easily be accomplished by the operator.

The primary grabber assembly **150** comprises a support plate **152** which is pivotally mounted, by means of apertured ears **154,** to a pivot bar **156.** The pivot bar **156** is secured to the lower brace portion **15''** of the vertical brace **15** by means of a suitable bracket arrangement **158,** including a pair of apertured legs **160.** A fluid-actuated grabber cylinder **162** is fastened to the upper side of the support plate **152.** Secured to the rod end of the grabber cylinder **162** is a grabber head **164.** The grabber head **164** includes a U-shaped mounting frame which comprises a back element **166** and a pair of legs **168** projecting therefrom. The rod end of the grabber cylinder **162** is secured to the back element **166.** A pair of guide rods **170** are slidably fastened to a plurality of brackets **172** mounted on the support plate **152.** The legs **168** are fixed to slidably disposed guide rods **70** to facilitate linear travel of the grabber head **164.**

Affixed within apertures of the legs **168** is a generally transversely arranged grabber housing **174.** The ends of the grabber housing are generally cylindrical in configuration, defining interior chambers **176** which are closed by means of end plugs **178.** Slidably disposed within the chamber **176** is a pair of pistons **180.** Attached to the pistons are jaw elements **182** which are slidable toward and away from one another in the grabber housing **174.** Suitable air conduits **183** and **185** are provided to selectively conduct air under pressure to either side of the piston **180** to reciprocate the jaws **182.** Alternatively, the pistons **180** could be air actuated in one direction only, and spring biased in the other direction.

The central part of the grabber housing **174** has a V-shaped notch **184.** This notch is dimensioned to receive the crank arm **9** of the lower winding assembly. The outer ends of the jaws **182** are provided with projections **186** which prevent movement of the crank arm **9** out of the notch **184** when the jaws **182** are extended to the position shown in FIG. **10.** Guide pins **190** may be fixed to the plugs **178** and slidably received within the jaws **182** to guide the jaws as they are being displaced.

The grabber head **164** may be extended toward the crank arm **9** by the grabber cylinder **162** until the crank arm engages the bottom of the notch **184.** The jaw elements **182** are then extended to grasp the crank arm **9.** Further extension of the grabber head **164** by the grabber cylinder causes the lever **6** supporting the bobbins **4** to be displaced away from the cam **3,** as shown in phanton lines in FIG. **1.** Retracting the grabber cylinder **162** brings the packages into contact with the cam **3.** As soon as the counterweights **8** are in a position to urge the packages **4** into engagement with the cam **3,** the jaw elements are retracted and the grabber head returns to the position shown in FIG. **1.**

In order to limit the amount of pivoting which is afforded the grabber cylinder **162,** the support plate **152** may be provided with a stop element **194.** This stop element is fixed to a wall **196** which is attached to the support plate **152.** The stop element **194** is disposed for limited sliding movement within a slot **198** which is carried by a stationary frame member **199.**

A limit valve LLV3 is provided in association with the grabber cylinder **162** to sense the presence of the crank arm **9** and activate the jaws **182** when the grabber head has been extended (FIG. **10**). At some time during the winding of a package, one or more of the yarn ends being extruded on the metier may break. When this occurs, a patrolling operator removes the particular package affected and initiates the winding of a new package after correcting the condition that caused the break. Consequently, there may be several small (i.e. unfilled) packages on the metier when the predetermined doff time arrives. Where these occurs the crank arm **9** will be at a location other than normal for a full doff. Since the crank arm should be under control when being moved, the limit valve LLV3 will be actuated upon contacting the crank arm, to extend the jaws **182.**

A brief description of the operation of the primary handling and grabbing assemblies will now be presented with respect to FIGS. **14***a* through **14***j*. When the packages of the lower winding assembly are filled, the handling cylinder **72** is extended to bring the handling head **80** into engagement with the yarn ends Y' (FIGS. **3** and **14**c). Oscillation of the yarn ends, as caused by the cam **3,** will cause the yarn ends to enter the slots **90.** The knives **102** are then actuated to sever the yarn ends which are then captured and drawn to waste by the aspirators **118** (FIG. **14***d*). The handling cylinder **72** is then retracted, with the yarn from the feed roll **1** being conducted from the aspirators **118** through the conduits **120** to the waste container **121.** The grabber cylinder **162** is then extended to more filled packages **4** out of driven engagement with the cam **3** (FIG. **14***e*). The filled packages are then manually removed by the operator and replaced by empty packages (FIGS. **14***f* and **14***g*). The swing cylinder **50** is extended to swing the handling cylinder **72** to a lowered position (FIG. **14***h*), whereupon the handling cylinder is extended generally toward the empty packages. The yarn ends are picked up by the pinch grooves of the empty tubular packages, thus accomplishing the throw-on, as in conventional practice. As the yarn begins to wind on the packages, it breaks at the aspirator **118.** In this manner, the waste yarn is effectively separated from the yarn being wound (FIG. **14**i).

SECONDARY DOFFING ASSEMBLY

A secondary doffing assembly **200** is preferably provided for the doffing of the upper winding assembly of each winding station. As shown in FIGS. **1** and **2,** the secondary doffing assembly comprises a secondary frame **202** which includes a pair of vertical braces **204** and a pair of horizontal braces **206** and **207.** The frame **202** is provided with a pair of spaced support wheels **208** which serve to suspend the frame **202** from the track **22.** Underlying rollers **209** are provided on the frame **202** to bear against the underside of the track. A fluid driven motor **210** is drivingly connected to one of the support wheels **208** for propelling the frame **202** along the track **22.** A rail **212** extends from the horizontal brace **207** and is engaged on opposite sides by a pair of wheels **214** (FIG. **1**) which are secured to the primary frame **12.** In this manner, the secondary frame **202** is movable along the track **22** independently of the primary frame **12,** while being partially supported and stabilized by the primary frame.

The secondary doffing assembly **200** includes a secondary handling assembly **216** and a secondary grabber assembly **218.** The upper handling assembly **216** is substantially similar to the primary handling assembly **30**

in that it includes a base plate **220** which is secured to a pivot rod **222.** A swing cylinder **224** is attached between the secondary frame **202** and the pivot rod **222** to swing the secondary handling arm assembly between a severing and a throw-on position. This swinging movement is sensed by a limit valve ULV_2, in a manner similar to that of the valve LLV_2 associated with the primary doffing assembly.

The base plate **220** is provided with a counterweight **226** in its upper side and a shift plate **228** on its underside. A shift cylinder **230** is connected between the base plate and the shift plate to slide the shift plate laterally with respect to the base plate.

A secondary handling cylinder **232** is mounted beneath the shift plate **228** and is provided with a secondary handling head **234** comprising a severing and aspirating mechanism which is similar in structure and operation to that of the primary doffing assembly **10.** Also, a limit value ULV_1, similar in operation of the valve LLV_1, is provided for actuating the severing mechanism.

A secondary grabber arm assembly **218** is provided and includes a grabber cylinder **236** and a grabber head **238** similar in structure and operation to those of the primary doffing assembly. In addition, a limit valve ULV_3, similar to the valve LLV_3, is provided to sense movement of the secondary grabber head.

The operation of the primary and secondary doffing assemblies **10** and **200** are sequentially staggered in order that an operator in charge of manually substituting the packages may make efficient use of his time. Thus, the lower packages will be displaced from the cam prior to displacement of the upper packages.

It should also be noted that the upper and lower winding assemblies are not arranged in precise vertical alignment, but are slightly offset horizontally, as may be viewed in FIG. 14*k*.

In order that the primary and secondary frames will be properly aligned with respect to the individual winding stations as the doffing machine traverses the metier, an aligning system is provided. Referring to FIGS. **11–13** it can be seen that the primary frame **12** has mounted thereon a limit valve LLV_4 which includes a roller **252** mounted on a pivoted lever **254.** A cam bracket **256** is mounted on the track **22** and includes an abutment **258** which extends downwardly below the track. An adjustment screw **260** is provided to enable the cam bracket **256** to be at selected positions along the track **22.**

A stop finger **262** is pivotally mounted by means of a pivot pin **264** to a bracket **266** which is attached to the primary frame **12.** Projecting from the stop finger **262** is a weighted lever **268** which serves to bias the stop finger upwardly into engagement with the abutment ledge, as shown in FIG. **12.**

The primary frame is arranged to travel beneath the track **22** such that the valve LLV_4 and the stop finger **262** will sequentially contact the cam bracket **256.** The valve LLV_4 is operatively connected to a brake **270** which engages opposite sides of a disk **272** on the power shaft of the motor **24** (FIG. **1**).

As the primary frame is being propelled along the track **22** toward a winding station (toward the left, as viewed in FIG. **12**), the valve LLV_4 will immediately actuate the brake **270** and the primary frame will be substantially slowed. Momentarily thereafter, the stop finger **262** will contact the abutment ledge **258** to stop the primary doffing assembly at a predetermined location relative to the winding station. The primary doffing assembly will be held in this position by means of the brake **270,** since the valve LLV_4 remains depressed. Consequently, the operations described previously in connection with FIG. **14** can be carried out, with the primary frame being secured in a substantially aligned manner adjacent the winding station.

The primary frame **12** travels ahead of the secondary frame **202.** That is, the primary frame **12** propels itself to subsequent winding station prior to the secondary frame. After the primary doffing has begun the doffing operation, the secondary frame travels from the preceding station to the same station as the primary frame.

In order to provide a braking and aligning of the secondary frame **202,** the motor **210** is provided with a brake **274** (FIG. **2**), similar to the brake **270** of the motor **18.** To actuate the brake **274** associated with the motor **210** a valve ULV_4 is provided (FIG. **11**). This valve ULV_4 is mounted on the primary frame **12** and has a follower which extends toward the path of travel of the secondary frame. The secondary frame is provided with an adjustably positionable cam block **276** which engages the follower of valve ULV_4 and servies to activate the valve ULV_4 upon contact therewith. Thus, as the secondary frame arrives at its new destination, i.e., a subsequent winding station, the cam block **276** activates the valve ULV_4 to impart a braking action to the secondary frame. Due to the fact that the secondary frame **202** is considerably lighter in weight than than the primary frame, the brake **274** is sufficient to halt the secondary frame in an aligned position, in the absence of a positive stop engagement.

The secondary frame is provided with a stop pin **278.** This stop pin **278** is fixedly attached to the secondary frame and overlaps the horizontal frame member **16** of the primary frame. The stop pin is positioned to travel beneath the weighted lever **268** and to cam the weighted lever upwardly until the pin **278** becomes wedged under the lever **268** (FIG. **12**). In this fashion, the stop finger **262** will be released from engagement with the abutment **258** as the weighted lever is raised by the stop pin **278.** The primary frame will not be moved, however, as it is being held by the brake **270,** but will be free to move upon release of the brake **270** and activation of the motor **24.**

In order to admit pressurized air to the pneumatic control circuit, for actuating the pneumatic power devices of the primary doffing assembly, a limit valve LLV_5 is mounted on the primary frame **12** and is provided with an actuating lever **280.** The valve LLV_5 is normally disposed in an open position as the primary doffing assembly traverses the metier, admitting air to the pneumatic power devices. Attached to the track **22** at the end of the metier is a cam rail **282** (FIG. **12**) which projects downwardly into the path of travel of the actuating lever **280.** As the primary doffing assembly reaches the end of the metier, the lever **280** will be depressed as it contacts the stop rail, and the primary doffing assembly will become deactivated. A similar valve ULV_5 is provided for the secondary doffing assembly and functions in the same manner with respect thereto.

An important feature of the invention concerns the use of a timer-controlled master programmer **290** mounted on the primary frame **12,** which functions to operate valves for controlling some of the pneumatic

power devices. In this fashion, sequential operation of the doffing mechanism is provided without requiring numerous limit switches which would make the apparatus rather cumbersome to operate.

The master programmer **290** includes a plurality of valves PV_1–PV_{13} and a plurality of rotary cams C operatively associated therewith. The cams are fixed to a rotatable shaft which is driven by a pneumatic motor **292.** Rotation of the shaft at a constant, pre-selected, rate causes the cams C to actuate the valves PV_1—PV_{13} sequentially. The valves PV_1–PV_{11} are arranged in timed sequence and in conjunction with the operation of the limit valves LLV_1–LLV_5.

The pneumatic circuit includes main air inlet conduits **296, 298,** and **299.** The secondary conduits **296** and **298** direct working air to the various pneumatic power devices of the primary and secondary doffing assemblies, respectively. The secondary conduit **299** directs air to the pneumatic motor **292** for operation of the master programmer, and to a valve feed line **300.** The valve feed line **200** divides into a pair of branches **302** and **304** which supply valve-actuating air pressure to the primary and secondary doffing assemblies, respectively.

The use of a pneumatic circuit for operating the doffing machine serves, as noted previously, to minimize the hazards of explosion due to the explosive atmosphere around the metier.

OPERATION

The operation of the doffing machine will be described primarily in connection with FIGS. **14***a*–**14***p*.

The overhead tracks **22** extend along the length of the metier from a terminal position at one end of the metier to a starting position at the opposite end of the metier. Preferably, a hose reel is mounted adjacent the terminal position and air hoses are carried on hangers which move along the tracks to supply air to operate the components of the machine as the frames **10** and **200** travel along the metier. The reel automatically rewinds the hoses as the frames move progressively from the starting position to the terminal position.

FIG. **14**a illustrates a condition where the yarn ends Y′ and Y″ are being wound upon the packages **4** from the feed roll **1** at the initial winding station. The doffing machine at this point is in a non-activated condition. As the packages **4** become filled with yarn, the spindles **5** are gradually shifted away from the cams **3** against the bias of the counterweights (FIG. **14***b*). During the winding operation, the helical grooves in the cam periphery cause the yarn ends Y′ to be reciprocated axially along the respective packages to provide a uniform filling of the packages.

When the lower packages have been filled, an operator activates the pneumatic control circuit. Air pressure is thus supplied to the main supply conduits **296,** 298, 302, and **304** and the cam shaft motor **292** of the master programmer (FIG.**15**).

Following a pre-selected rotation of the cam shaft, the valve PV_1 is activated to cause air to be admitted to the piston side of the handling cylinder **72.** The handling cylinder is extended and carries the handling head **80** into contact with the yarn ends Y′ (FIGS. **3** and **14**c). The yarn ends are caused to be slightly tensioned against the peripheral surface of the housing **82** in this condition.

Oscillation of the yarn ends by the cam **3** causes the yarn aligned with ends to become aligned with the slots **90,** at which time they will enter the slots. The valve LLV_1 is actuated by the cam **128** which is connected to the handling cylinder **72,** and causes air to be directed against the knifeactuating pistons **106** within the housing **82.** The ensuing extension of the pistons imparts a scissoring motion to the knives **102** whereby the yarn ends Y′ are severed. The severed yarn ends are immediately captured by suction from the aspirator **118.** The waste yarn which continues to be fed by the feed roll **1** is drawn by the aspirator **118** into the waste container **121.** Following a pre-selected interval, the valve PV_1 is deactivated and its associated spool S returns to a position whereby air is suitable directed to retract the handling cylinder **72** (FIG. **14***j*).

The programmer next causes the valve PV_2 to be cammed into a position causing the grabber cylinder **162** to be extended into engagement with the crank arm **9.** The limit valve LLV_3 is activated in response to contact with the crank arm **9** to cause the jaws **182** to be extended into the notch to retain the crank arm **9** (FIG. **10**). Further extension of the grabber cylinder **162** causes the packages **4** to be displaced from driven engagement with the cam **3** (FIG. **14***e*). At this point the operator is able to manually remove the filled packages **4** and replace them with empty packages (FIG. **14***f*).

Also at this point the secondary handling cylinder **232** is caused to extend and shear the yarn ends Y″ by sequential operation of the valves PV_7 and ULV_1. The severed ends are captured by the secondary aspirators and are drawn into the waste container (FIG. **14***g*).

Following the insertion of the empty packages, the primary grabber cylinder **162** is retracted, bringing the empty packages into driven engagement with the cam **3.** The valve PV_5, meanwhile, overrides the valve LLV_3, causing the jaws **182** to be retracted and enabling the grabber cylinder to return to its initial or neutral position (FIG. **14***h*).

The upperpackages have, meanwhile, been displaced from the upper cam **3** by the secondary grabber cylinder. The operator is now able to exchange the upper packages.

In order to initiate a new winding operation at the lower winding assembly, the swing cylinder **50** is actuated by the valve PV_3 to swing the primary handling cylinder to a downwardly projecting mode (FIG. **14***h*). The valve PV_1 induces a reextension of the primary handling cylinder to guide the yarn ends Y′ into engagement with the bobbins **4.** The shift cylinder **68** is again actuated by the programmer to shift the yarn ends Y′ laterally across the pinch grooves in the bobbins. This insures that the yarn ends will be picked up by the pinch grooves to accomplish the throw-on. The suction force imparted to the yarn ends Y′ by the aspirators **118** will be overcome by the winding force of the packages causing the yarn to break (FIG. **14***i*). Subsequently, the programmer causes the primary handling cylinder to retract and to be swung to a neutral position by the swing cylinder **50** (FIG. **14***j*).

With the primary doffing assembly having completed its doffing operation, the programmer **290** automatically activates the valve PV_6 to shift its associated spool valve S into a position for directing air to the air motor **24.** The motor **24** rotates the wheel **18** and advances the primary frame **12** towards the next winding station,

with the secondary frame **202** remaining stationary. As the primary frame arrives at the next winding station, the valve LLV_4 is activated by engagement with the cam bracket **256** and causes the brake **270** to be applied (FIG. **12**). The primary frame is thus slowed and the stop finger **262** contacts the ledge **258** to stop the primary frame in a suitably aligned position facing the lower winding assembly, as illustrated in FIGS. **12** and **14***k*. Once in this position, the primary handling and grabber assemblies repeat the doffing operation.

Following the insertion of the empty packages onto the upper spindle **5**, the secondary grabber cylinder **236** is retracted to reposition the upperpackages into driven engagement against the upper cam (FIG. **14**). The secondary cylinder is then swung upwardly and extended to accomplish the throw-on in generally the same manner as the primary handling cylinder (FIG. **14***n*), and is returned to a neutral position. With the secondary doffing assembly having completed its doff, the motor **210** is actuated by the programmer to advance the secondary frame to the upper winding assembly of the next winding station.

As the secondary frame approaches the primary frame, the cam bracket **256** contacts the valve ULV_4 which projects from the primary frame (FIG. **12**). This actuates the brake associated with the motor **210** and slows the secondary frame to a stop. The stop pin **278** engages and lifts the weighted lever **268** as the secondary frame is slowing to a stop. Consequently, the stop finger **262** will be released from engagement with the ledge **258.** In this position the secondary frame will be suitably aligned with the next winding assembly (FIG. **14***p*).

The primary doffing assembly will then complete its doffing operation and the secondary doffing assembly will begin a new doffing operation.

It will be apparent that in view of the teachings of the invention, the yarn handling assembly **30,** in lieu of being mounted on a movable frame, could be fixed to a stationary frame. In such a case, each winding assembly would be provided with an individual handling assembly located adjacent thereto which would be operable to sever, capture, and accomplish a throw-on with respect to the bobbins. Each winding station would be provided individually with a mechanism for displacing the packages relative to the cam in conjunction with the operation of the handling assembly.

If desired, some form of automated device could be utilized in conjunction with the disclosed apparatus for mechanically removing and replacing the packages.

ADVANTAGES AND SCOPE OF THE INVENTION

The present invention provides a yarn handling assembly which is capable of severing, capturing, and accomplishing a throw-on all without operator assistance.

The self-propelling and self-aligning features of the disclosed doffing machine enables the machine to automatically traverse an entire metier while aligning itself automatically at successive winding stations.

The doffing machine of the instant invention enables a single operator to doff an entire metier while merely removing and replacing packages.

The timed pneumatic circuit disclosed for operating the doffing machine affords an automatic functioning of the apparatus with a minimal number of limit valves. In addition, the pneumatic circuit reduces the risk of explosion.

Although the invention has been described in connection with a preferred embodiment thereof, it will be appreciated by those skilled in the art that additions, modifications, substitutions and deletions not specifically described may be made without departing from the spirit and scope of the invention as defined in the appended claims.

What is claimed is:

1. A bobbin doffing assembly for use with synthetic yarn extrusion positions including a plurality of winding stations spaced along the extrusion positions; each winding station including rotary feed roll means, rotary cam means, and package carrier means rotatably carrying a yarn-receiving package; said cam means guiding yarn from said feed-roll means onto said bobbin while rotating said package by surface engagement between said cam means and surface layer of yarns in said package; said doffing assembly comprising: track means extending the length of said extrusion position; frame means including a primary frame means mounted on said track means and secondary frame means mounted on and movable relative to said primary frame means; yarn handling means mounted on said frame means and including: a primary yarn handling means for effecting a doffing operation of a first winding station mounted on said primary frame means; a secondary yarn handling means for effecting a doffing operation of a second winding station mounted on said secondary frame means, said primary and said secondary yarn handling means each including means for severing yarn between said feed roll means and said rotary cam means while capturing the yarn from a respective feed roll means after severing and means for guiding said yarn along a predetermined path to accomplish a throw-on; and timer means operatively connected to said yarn handling means for controlling the sequence of operations of said yarn handling means according to a predetermined schedule, said doffing assembly including aligning means on said track means and said primary frame means for locating said primary frame means at selected doffing positions along said track means; said secondary frame means including means for engaging said aligning means and for locating said secondary frame means at selected doffing positions along said track means.

2. A package doffing assembly according to claim **1** wherein said primary and said secondary yarn handling means includes a base and a housing on said base, said housing having slot means for receiving yarn whereby yarn received in said slot means may be severed by said severing means.

3. A package doffing assembly according to claim **2** wherein said severing means comprises a stationary blade mounted on said housing adjacent said slot, a movable blade mounted on said housing for scissoring movement across said slot toward said stationary blade, and fluid-actuated piston means for selectively moving said movable blade toward said stationary blade, and said guide means including means for shifting said housing laterally relative to said base to align said yarn and said slot during a severing operation and to align said yarn and said package to accomplish a throw-on.

4. A package doffing assembly according to claim **1** wherein said aligning means includes brake means and brakeactivating means on said primary frame means, cam means on said track means for engaging said brake-activating means to activate said brake means in

response to a transfer of said primary frame means to a subsequent doffing position, stop means on said track means and movable arm means on said primary frame means engageable with said stop means to maintain said primary frame means in said subsequent doffing position; said means on said secondary frame means including means for releasing said arm means from its stopping engagement position upon transfer of said secondary frame to a subsequent doffing position, and brake means actuable in response to contact between elements of said primary and secondary frame means to maintain said secondary frame means in its subsequent doffing position.

5. A package doffing assembly according to claim **1** and including actuating means on each of said primary and secondary frame means for sequentially displacing the package carrier means away from said surface engaging position; said timer means being operatively connected to said actuating means to control the operation of said actuating means in sequential relation with the operation of said handling means.

6. A package doffing assembly according to claim **1** wherein said primary handling means and said secondary handling means each include air aspirator means for capturing the waste yarn from the feed roll after severing, and a waste container mounted on said frame means for receiving waste yarn from the air aspirator means.

* * * * *