

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 November 2005 (03.11.2005)

PCT

(10) International Publication Number
WO 2005/103405 A2

(51) International Patent Classification⁷: **E04C 3/30**

(21) International Application Number:
PCT/US2005/007428

(22) International Filing Date: 9 March 2005 (09.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/811,333 26 March 2004 (26.03.2004) US
10/913,674 6 August 2004 (06.08.2004) US

(71) Applicant (for all designated States except US): **S-T-N HOLDINGS, INC.** [US/US]; 2255-A Renaissance Drive, Suite 20, Las Vegas, NV 89119 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BINGEL, Nelson,**


G., III [US/US]; 28 Burning Bush Way, Orchard Park, NY 14127 (US). **GEITNER, Lawrence, J.** [US/US]; 4713 Clifton Parkway, Hamburg, NY 14075 (US). **REED, Brian, E.** [US/US]; 3053 Hillbrook Drive, Eden, NY 14057 (US).

(74) Agent: **SNYDER, George, L., Jr.**; Hodgson Russ LLP, One M & T Plaza, Suite 2000, Buffalo, NY 14203-2391 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: POLE REINFORCEMENT TRUSS

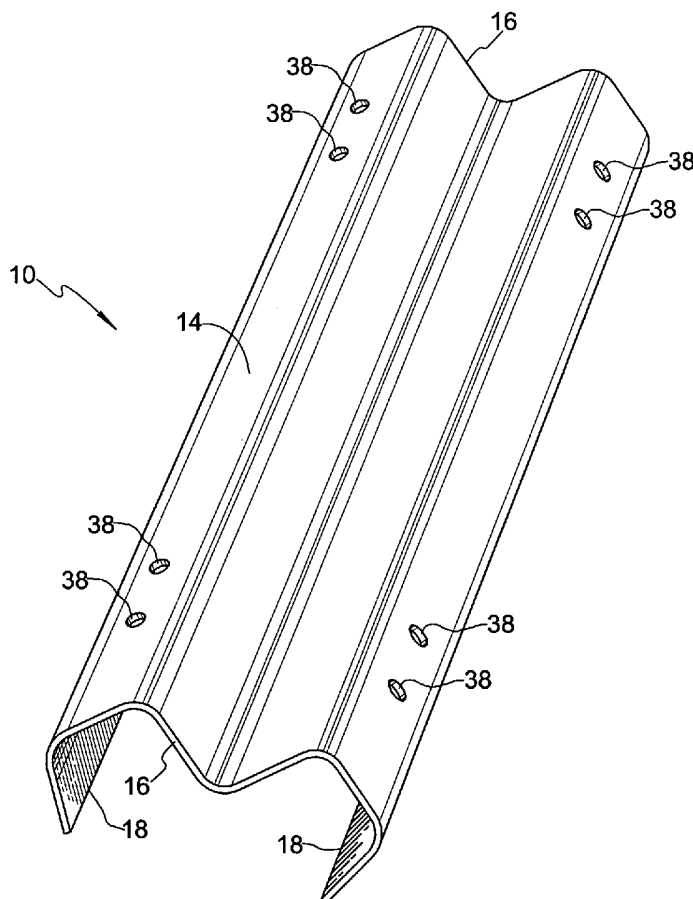

(57) Abstract: A pole reinforcement truss has an open cross-sectional configuration characterized by opposite side flanges that diverge with respect to one another as they extend from respective opposite side edges of the truss body. In one embodiment, the cross-sectional configuration has an intermediate curved bend through an excluded bend angle and a pair of curved bridge bends on opposite sides of the intermediate curved bend each through an included bend angle, wherein all three curved bends have the same radius of curvature. The truss maintains its geometry in an improved manner after the onset of yielding, thereby increasing ultimate strength of the pole truss assembly.



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

POLE REINFORCEMENT TRUSS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims priority of U.S. Patent Application Serial No. 10/811333 filed March 26, 2004 and U.S. Patent Application Serial No. 10/913,674 filed August 6, 2004.

FIELD OF THE INVENTION

[0002] The invention relates to the field of trusses for reinforcing poles, especially wooden utility poles, telephone poles, and the like, to increase their useful lifetime and allow them to withstand environmental forces.

BACKGROUND OF THE INVENTION

[0003] Utility lines, such as those carrying electrical power, cable television signals or telephone signals, have traditionally been supported above ground using poles, and especially wooden poles. As used herein, the term "pole" includes various forms and definitions of elongated support members, e.g., posts and pilings, whether or not constructed of wood. Such poles must be capable of withstanding not only the columnar load applied by the weight of the objects supported thereon but also the transverse or horizontal load imposed by transverse winds or unbalanced wire tensions from angled or dead end wires that cause the upper end of the pole to deflect relative to the buried bottom end of the pole.

[0004] After some years in service, wooden utility poles tend to experience decay and rotting just below and/or slightly above ground level. While the decayed region is normally relatively small and the penetration of the decay may be limited, the pole is nonetheless structurally weakened and may not be sufficiently strong to withstand wind and other environmental factors. Under these conditions, wind forces can result in a pole breaking and toppling, sometimes without warning.

[0005] Therefore, it is necessary to periodically replace older wooden poles. The demand for replacement poles, in combination with the demand for new poles, has

become increasingly difficult to meet. This demand presents environmental concerns related to deforestation and the toxic effects of preservative chemicals used to treat the poles. In addition, replacement of existing poles is expensive and may require interruption of service to users of the utility. To overcome these and other problems associated with pole replacement, various methods and apparatus for reinforcing in-

5 service poles have been developed to extend their useful life.

[0006] One technique for reinforcing utility poles is that of coupling an elongated truss to the pole, in effect splinting or bridging across the weakened area of the pole. Such trusses are customarily adapted to extend at least partway along the pole parallel

10 to its longitudinal axis to provide support against transverse wind forces and other loading conditions. The steel truss has been used to strengthen wooden utility poles for more than forty years.

[0007] One such pole reinforcing apparatus is the OSMOSE® Osmo-C-Truss™ system. This truss helps to restore the groundline strength of utility poles at a fraction

15 of the cost of pole replacement. The Osmo-C-Truss™ system comprises a C-shaped galvanized steel reinforcing truss which is secured to a pole by a plurality of galvanized steel bands fastened around the perimeter of the truss/pole assembly. The Osmo-C-Truss™ system can extend the life of a pole for many years and is installed without interrupting service to utility customers.

20 [0008] In spite of the many advantages of the Osmo-C-Truss™ system, some performance issues are inherent in the use of a "C" or channel shaped reinforcing apparatus. One significant performance issue is related to the ability of a "C" or channel shaped design to withstand bending loads from a pole without twisting or rotating about the pole. One solution in the prior art is to increase or "beef up" the

25 capacity of the apparatus by increasing its dimensions or the yield strength of the material of construction. However, these approaches fail to consider the underlying mechanical principles that govern the performance of such devices under load. Because the shear centers and the elastic axes of the reinforcing apparatus reside well outside the locus of the applied transverse load, there results significant torsional

30 forces acting upon the reinforcing apparatus in addition to the expected bending forces. Specifically, "C" or channel shaped designs do not account for the

relationship between the location of the shear center of the truss and the location of the transverse applied load. The further the applied load is from the shear center and elastic axis, the greater the torsional forces that act upon the truss in combination with the bending forces. Torsional forces may cause the truss to shift its position about the circumference of the pole, i.e., rotate about the pole, to a disadvantageous position wherein the truss is no longer loaded in the direction of maximum strength. Further, the reinforcing apparatus itself may twist and experience shape distortion when subjected to torsional forces, causing a reduction in performance; possibly less than the theoretical strength of the material of construction would afford.

[0009] Without a corresponding decrease in torsional rotation of the apparatus about the pole, or a reduction in the torsional forces themselves, the increased theoretical resistance to bending forces supplied by a truss having increased dimensions or higher yield material may be of little practical value. In fact, the use of higher strength materials to increase truss capacity is accompanied by a generally proportional increase in the truss rotations and deflections that occur when the truss is loaded beyond the capacity of a similarly-dimensioned truss formed of lower strength material. The reinforced truss will undergo unacceptable rotation or twisting deformation, causing premature failure before its theoretical bending capacity, as determined using the undistorted shape, is reached. Further, while measures such as adding material of higher yield strength may increase theoretical bending support, they represent significant added costs, in many cases without yielding proportionate benefits or expected results.

[0010] In an effort to address the problems mentioned above, several improved truss embodiments are described in U.S. Patent No. 6,079,165 sharing common inventors herewith. The embodiments involve various cross-sectional configurations intended to bring the elastic axis and shear center of the open truss section closer to the pole and to the point where load is transferred from the pole to the truss, thereby reducing torsional loading on the truss.

[0011] While the truss configurations described in U.S. Patent No. 6,079,165 offer improved performance relative to prior trusses, there is still a tendency for all prior art trusses to rotate about the pole to a position where the load is no longer

acting along an intended direction relative to the truss section, and is instead acting along a weak axis of the truss section. It has been observed that this problem actually gets worse as higher yield strength steel is used, thereby defeating the purpose of using higher yield steel. At the onset of yielding, there is a tendency for buckling to occur in pole-engaging side flanges of prior art trusses. Consequently, the geometry of the truss cross-section changes, thereby decreasing the effectiveness of the truss and leading to ultimate failure rather rapidly after the onset of first yielding. Generally speaking, prior art trusses have been designed for elastic capacity, and have not been designed to resist buckling.

[0012] Accordingly, there is a need for a pole reinforcement truss that better maintains its cross-sectional geometry after the onset of yielding.

SUMMARY OF THE INVENTION

[0013] Therefore, it is an object of the present invention to provide a pole reinforcement truss that resists buckling to exhibit greater strength beyond yielding trusses of the prior art.

[0014] It is another object of the present invention to provide a pole reinforcement truss that exhibits improved strength when loaded in an "off-axis" direction offset from a strong axis of the truss section.

[0015] It is another object of the present invention to provide a pole reinforcement truss that resists rotation around the pole when banded to the pole.

[0016] It is a further object of the present invention to provide a pole reinforcement truss having the above-mentioned qualities that is simple and inexpensive to manufacture.

[0017] These and other objects are achieved by a pole reinforcement truss of the present invention that generally comprises an elongated body having a pair of opposite ends connected by a pair of longitudinal edges, wherein the body has an open cross-sectional configuration characterized by a pair of side flanges each extending from a respective one of the longitudinal edges in a direction diverging from the other side flange, and an intermediate section connecting the pair of side flanges.

[0018] In one embodiment, the intermediate section includes a pair of bridge portions associated one with each of the pair of side flanges, and a pair of apex portions associated one with each of the pair of bridge portions. Each bridge portion extends in a direction forming an included obtuse angle with the direction of the associated flange, and each apex portion extends in a direction forming an included obtuse angle with the direction of the associated bridge portion. The pair of apex portions converge toward one another to form an excluded obtuse angle. In an embodiment exhibiting desired results, the excluded angle between the apex portions, the included angle between each bridge portion and its associated apex portion, and the included angle between each side flange and its associated bridge portion are equal, preferably about 100 degrees, and are defined by way of curved bends.

[0019] The invention also extends to a method of manufacturing a pole reinforcement truss from a length of plate of sheet material by forming a first curved bend along a longitudinal first axis to give the material a generally V-shaped cross-sectional configuration; forming a pair of second curved bends of opposite bearing to the first curved bend along a pair of longitudinal second axes arranged on opposite sides of the first axis, the pair of second curved bends defining a pair of side flanges each limited by an associated one of the pair of second curved bends and an associated side edges; and forming a pair of third curved bends of opposite bearing to the first curved bend along a pair of longitudinal third axes arranged on opposite sides of the first axis between the pair of second axes. The first curved bend, the pair of second curved bends, and the pair of third curved bends are formed so that the pair of side flanges converge toward one another as they extend from the pair of second curved bends toward the pair of edges.

[0020] In another embodiment, the intermediate section is configured differently to include an intermediate curved bend about a radius of curvature external to the open cross-sectional configuration and a pair of curved bridge bends each for connecting the intermediate curved bend to an associated one of the pair of side flanges. A pair of straight apex portions may be provided, each for joining a respective one of the pair of curved bridge bends with the intermediate curved bend.

Thus, the alternative embodiment provides a cross-sectional configuration having only three curved bends, rather than five curved bends found in the first embodiment.

[0021] The invention also provides a method of manufacturing a pole reinforcement truss from a length of plate or sheet material by forming a first curved bend along a longitudinal first axis to give the material a generally V-shaped cross-sectional configuration, and forming a pair of second curved bends of opposite bearing to the first curved bend along a pair of longitudinal second axes arranged on opposite sides of the first axis, the pair of second curved bends defining a pair of side flanges each limited by an associated one of the pair of second curved bends and an associated one of the pair of edges, wherein the first curved bend and the pair of second curved bends are formed so that the pair of side flanges converge toward one another as they extend from the pair of second curved bends toward the pair of edges.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The nature and mode of operation of the present invention will now be more fully described in the following detailed description of the invention taken with the accompanying drawing figures, in which:

Fig. 1 is a perspective view showing a truss formed in accordance with one embodiment of the present invention;

Fig. 2 is an elevational view showing the installation of the truss on a utility pole;

Fig. 3 is a view showing the cross-sectional configuration of the truss as the truss is installed in a first orientation relative to a pole;

Fig. 4 is a view similar to that of Fig. 3, however showing the truss installed in a second orientation relative to the pole;

Figs. 5A-5C illustrate steps for manufacturing the truss from a piece of material;

Fig. 6 is a cross sectional view of the truss with dimensional reference characters for describing a truss of an advantageous scale;

Fig. 7 is a view showing the cross-sectional configuration of a truss formed in accordance with an alternative embodiment of the present invention as the truss is installed in a first orientation relative to a pole;

5 Fig. 8 is a view similar to that of Fig. 7, however showing the truss installed in a second orientation relative to the pole;

Figs. 9A-9B illustrate steps for manufacturing the truss from a piece of material; and

Fig. 10 is a cross sectional view of the truss of the alternative embodiment with dimensional reference characters for describing a truss of an advantageous scale.

10 DETAILED DESCRIPTION OF THE INVENTION

[0023] Fig. 1 shows a truss 10 formed in accordance with an embodiment of the present invention. Truss 10 generally comprises an elongated body 14 having a pair of opposite ends 16 connected by a pair of longitudinal edges 18. As illustrated in Fig. 2, truss 10 is useful for reinforcing a utility pole 2 sunk at its lower end into ground 4 and configured to support utility wires 6. The truss 10 reinforces pole 2 against transverse winds 8 or other environmental forces, including unbalanced wire tensions, and is attached to a lower portion of the pole using circumferential bands 12 and/or bolts 13. Although truss 10 of the present invention is shown and described in the context of a utility pole, it is suitable to reinforce other types of poles as well.

20 [0024] Body 14 of truss 10 has an open cross-sectional configuration, shown in Fig. 3, which can be constant over the length of the truss, or which can change in scale over the length of the truss to provide a tapered truss. The cross-sectional configuration is characterized by a pair of side flanges 20 each extending from a respective one of the longitudinal edges 18 in a direction diverging from the other side flange 20, and an intermediate section connecting the pair of side flanges 20 and comprising a central first curved bend 30, a pair of apex portions 24 joined by the first curved bend 30, a pair of bridge portions 22 respectively joined to the pair of side flanges 20 by a pair of second curved bends 32, and a pair of third curved bends 34 each joining a respective bridge portion 22 to an associated apex portion 24. The

cross-sectional configuration has an axis of symmetry 40 midway between the pair of edges 18 through a center of curvature of first curved bend 30.

[0025] Reference is made to Fig. 6 to further describe the cross-sectional configuration of truss body 14. Each bridge portion 22 extends in a direction forming an obtuse included angle A2 with the direction of the associated side flange 20. Each apex portion 24 extends in a direction forming an obtuse included angle A3 with the direction of the associated bridge portion 22, wherein the pair of apex portions 24 converge toward one another to form an excluded angle A1. As used herein, "included angle" refers to an angle measured on the inside of the truss section, and "excluded angle" refers to an angle measured on the outside of the truss section. From a general standpoint, the angles A1, A2, and A3 are chosen to satisfy the following relation:

$$180-A2 - A3 + \frac{1}{2}*A1 >0$$

where A1, A2, and A3 are expressed in degrees. By satisfying this relationship, the side flanges 20 are caused to diverge from one another as they extend from their respective edges 18.

[0026] By way of non-limiting example, Table 1 below gives presently preferred dimensions of the cross-sectional configuration of Fig. 6 for a truss designed to be used with poles ranging from 27.5 inches (69.85 centimeters) to 36.5 inches (92.71 centimeters) in circumference.

[0027] Table 1

Dimension	Inches	Centimeters	Degrees
A1			100
A2			100
A3			100
L1	1.8485	4.6952	
L2	1.6969	4.3101	
L3	2.0094	5.1039	
R (all bends)	0.75	1.905	
T	0.1875	0.4763	

[0028] Figs. 5A through 5C illustrate a preferred method of fabricating truss 10 in accordance with the present invention. To begin, a flat piece of metal sheet or plate stock material of appropriate width is cut to length; a preferred length suitable for most applications is ten feet (3.048 meters), however another length may be chosen depending upon the application. In the example represented by Table 1 above, a length of 3/16-inch thick steel plate seventeen inches wide was used. The material is preferably alloy steel having a yield strength on the order of 100,000 psi (689,476 kPa). The workpiece, which may be tapered or rectangular, is then formed using a press brake. The first curved bend 30 is formed along a central longitudinal axis of the workpiece to give the sheet material a generally V-shaped cross-sectional configuration as shown in Fig. 5A. Next, the pair of second curved bends 32 are formed along a pair of longitudinal second axes located one on each opposite side of the central first axis at equal distances therefrom, thereby defining the pair of side flanges 20 each limited by an associated one of the pair of second curved bends 32 and an associated one of the pair of edges 18. As can be seen in Fig. 5B, the second curved bends 32 are of opposite bearing to the first curved bend 30. Finally, the pair of third curved bends 34, also of opposite bearing to first curved bend 30, are formed along a pair of longitudinal third axes located one on each opposite side of the central first axis at equal distances from the central axis, wherein the pair of third axes are between the pair of second axes. The result of this step can be seen in Fig. 5C. If bolts 13 will be used to secure truss 10 to pole 2, then bolt holes 38 (shown in Fig. 1) can be drilled before all bending steps, between bending steps, or after all bending steps.

[0029] Returning now to Fig. 3, a first installation orientation of truss 10 relative to pole 2 is shown, wherein an open mouth of the truss section faces the pole such that edges 18 engage the pole. Bolts 13 are preferably arranged to extend through holes 38 in each bridge portion 22 for securing truss 10 to pole 2, and it is also contemplated to arrange bolts to extend through centrally located bolt holes through curved bend 30 in addition to, or in place of, bolts through bridge portions 22. Bolts 13 are preferably through-bolts extending through pole 2, however shorter lag screws may also be used.

[0030] As shown in Fig. 4, truss 10 can be installed in an opposite orientation wherein the mouth of the truss section faces away from pole 2. In this orientation, bolts 13 are arranged to extend through centrally located bolt holes through curved bend 30, and could also be arranged to extend through holes 38 in apex portions 24.

5 The fact that truss 10 is reversible in this manner makes installation possible in cases where the orientation of Fig. 3 cannot be used due to interfering hardware already on the pole, an important advantage over non-reversible trusses.

[0031] Fig. 2 shows truss 10 installed adjacent the bottom buried end of pole 2 such that it bridges from the buried portion of the pole to the exposed portion of the pole, thereby providing reinforcement where localized rotting and weakening of the pole is most likely to occur or to have occurred. Of course, installation at other segments of the pole may be advisable, particularly in locations where the pole has sustained localized damage that might weaken the pole.

10 [0032] Figs. 7, 8, and 10 depict a pole reinforcement truss 50 in accordance with another embodiment of the present invention. Truss 50 is similar to truss 10 described above in that it generally comprises an elongated body having a pair of opposite ends connected by a pair of longitudinal edges 18. The body of truss 50 has an open cross-sectional configuration which can be constant over the length of the truss, or which can change in scale over the length of the truss to provide a tapered truss. Similar to the first embodiment, the cross-sectional configuration is characterized by a pair of side flanges 60 each extending from a respective one of the longitudinal edges 18 in a direction diverging from the other side flange 60, and an intermediate section connecting the pair of side flanges 60. The intermediate section differs from that of the first embodiment, and includes an intermediate curved bend 70 through a first bend angle BA1 about a radius of curvature R1 external to the open cross-sectional configuration, and a pair of curved bridge bends 62 each through a second bend angle BA2 about a radius of curvature R2 internal to the open cross-sectional configuration for connecting the intermediate curved bend 70 to an associated one of the pair of side flanges 60. In a preferred cross-sectional configuration, a pair of straight apex portions 64 respectively connect the intermediate curved bend 70 to the pair of curved bridge bends 62, however it is possible to merge

the intermediate curved bend 70 directly into each of the curved bridge bends 62 and eliminate the pair of apex portions 64. In order to cause the side flanges 60 to diverge from one another as they extend from their respective edges 18, the bend angles BA1 and BA2 are chosen to satisfy the following relation:

$$2*BA2 - BA1 - 180 > 0$$

where BA1 and BA2 are expressed in degrees. It is also possible to omit one or both of the side flanges 60 such that each curved bridge bend 62 terminates at an edge 18, in which case satisfying the above relationship will provide a cross-sectional configuration wherein curved bridge bends 62 will initially diverge from one another traveling from edges 18, before the curvature brings about convergence.

[0033] Table 2A below shows presently preferred dimensions of the cross-sectional configuration of Fig. 10 for a truss designed to be used with poles ranging from 36.5 inches (92.71 centimeters) to 40.5 inches (102.87 centimeters) in circumference.

[0034] **Table 2A**

Dimension	Inches	Centimeters	Degrees
S1	5.9423	15.0934	
S2	10.3173	26.2059	
S3	3.9971	10.1526	
BA1			80
BA2			160
L1	0.8266	2.0996	
L3	0.3649	0.9268	
R1	2.00	5.08	
R2	2.00	5.08	
T	0.1875	0.4763	

[0035] Table 2B below shows presently preferred dimensions of the cross-sectional configuration of Fig. 10 for a truss designed to be used with poles ranging from 30 inches (76.2 centimeters) to 37.5 inches (95.25 centimeters) in circumference.

[0036] Table 2B

Dimension	Inches	Centimeters	Degrees
S1	5.3357	13.5527	
S2	9.2107	23.3952	
S3	3.4914	8.8682	
BA1			80
BA2			160
L1	0.6756	1.7160	
L3	0.3885	0.9868	
R1	1.75	4.445	
R2	1.75	4.445	
T	0.1875	0.4763	

[0037] Figs. 9A and 9B illustrate a preferred method of fabricating truss 50 in accordance with the present invention. To begin, a flat piece of metal sheet or plate stock material of appropriate width is cut to length; a preferred length suitable for most applications is ten feet (3.048 meters), however another length may be chosen depending upon the application. In the example represented by Table 2A above, a length of 3/16-inch thick steel plate seventeen inches wide was used. The material is preferably alloy steel having a yield strength on the order of 100,000 psi (689,476 kPa). The workpiece, which may be tapered or rectangular, is then formed using a press brake. The intermediate curved bend 70 is formed along a central longitudinal axis of the workpiece to give the sheet material a generally V-shaped cross-sectional configuration as shown in Fig. 9A. Next, the pair of curved bridge bends 62 are formed along a pair of longitudinal second axes located one on each opposite side of the central first axis at equal distances therefrom, thereby defining the pair of side flanges 60 each limited by an associated curved bridge bend 62 and an associated edge 18. As can be seen in Fig. 9B, the curved bridge bends 62 are of opposite bearing to the intermediate curved bend 70. If bolts 13 will be used to secure truss 50 to pole 2, then bolt holes 38 (shown in Figs. 7 and 8) can be drilled before all bending steps, between bending steps, or after all bending steps.

[0038] Returning now to Fig. 7, a first installation orientation of truss 50 relative to pole 2 is shown, wherein an open mouth of the truss section faces the pole such that edges 18 engage the pole. Bolts 13 are preferably arranged to extend through holes 38 in each curved bridge bend 62 for securing truss 50 to pole 2, and it is also contemplated to arrange bolts to extend through centrally located bolt holes 38 through intermediate curved bend 70 in addition to, or in place of, bolts through curved bridge bends 62. Fig 8 shows truss 50 installed in an opposite orientation to that of Fig. 7 such that the mouth of the truss section faces away from pole 2. In this orientation, bolts 13 are arranged to extend through centrally located bolt holes 38 through intermediate curved bend 70, and could also be arranged to extend through non-central holes through apex portions 64, outer lateral portions of intermediate curved bend 70 and/or curved bridge bends 62. Holes 38 at a portion of the truss section generally tangential to pole 2 are shown in Fig. 8. The fact that truss 50 is reversible in this manner makes installation possible in cases where the orientation shown in Fig. 7 cannot be used due to interfering hardware already on the pole. Truss 50 is positioned along and about pole 2 in the same manner as described above for truss 10 with reference to Fig. 2.

[0039] As will be appreciated, each of the cross-sectional configurations of trusses 10 and 50 has a shear center that is located close to pole 2 and thus to the location at which force is transmitted to the truss, so as to minimize torsional loading on the truss. Moreover, by angling side flanges 20 and 60 inward toward the pole as shown in Figs. 3 and 7, the flanges are shorter and are optimized between inward and outward buckling to help the truss maintain its original cross-sectional geometry after the onset of yielding. Because the trusses resist buckling and better maintain their original geometry, they have improved plastic capacity (strength beyond yielding) relative to trusses of the prior art. The trusses of the present invention are designed to increase the ultimate strength of the pole-truss assembly, as distinguished from the yield strength, to provide greater benefit to utility companies. The trusses also exhibit better "off-axis" strength relative to prior art trusses in situations where the truss must be installed at a less than ideal position on the pole, for example if a riser or communications box is in the way.

[0040] Another benefit realized by trusses 10 and 50 when they are installed as shown in Figs. 3 and 7 is that the side flanges 20 and 60 provide a better grip on the pole to help prevent the truss from rotating about the pole if the truss is mounted to the pole solely by bands 12, which are less expensive to use than bolts 13.

5 [0041] It will also be appreciated that trusses 10 and 50 of the present invention are economical to manufacture. In the embodiment represented by Table 1, all five curved bends (curved bend A1, both curved bends A2, and both curved bends A3) have the same radius of curvature and define the same angle between joined straight portions of the cross-section. Consequently, press brake setup is extremely simple. It
10 is preferred to keep the angles A1, A2, and A3 constant and provide different size trusses by changing lengths L1, L2, and L3, which can be accomplished by choosing stock of a different width and/or altering the locations of the second and third curved bends 32 and 34. In the embodiment represented by Tables 2A and 2B, only three curved bends are required, preferably all having the same radius of curvature for easy
15 manufacturing setup. This embodiment is readily scaled by changing the radii of curvature R1 and R2 of the curved bends and by using a piece of stock sheet or plate material having a different width.

REFERENCE NUMERALS

	[0042]	2	Pole
	[0043]	4	Ground
	[0044]	6	Utility lines
5	[0045]	8	Wind
	[0046]	10	Truss
	[0047]	12	Bands
	[0048]	13	Bolts
	[0049]	14	Truss body
10	[0050]	16	Truss ends
	[0051]	18	Longitudinal edges
	[0052]	20	Side flanges
	[0053]	22	Bridge portions
	[0054]	24	Apex portions
15	[0055]	30	First curved bend
	[0056]	32	Second curved bends
	[0057]	34	Third curved bends
	[0058]	38	Bolt holes
	[0059]	40	Axis of symmetry
20	[0060]	50	Truss
	[0061]	60	Side flanges
	[0062]	62	Curved bridge bends
	[0063]	64	Apex portions
	[0064]	70	Intermediate curved bend
25	[0065]	A1	Excluded angle
	[0066]	A2	Second included angle
	[0067]	A3	First included angle
	[0068]	BA1	Excluded bend angle
	[0069]	BA2	Included bend angle
30	[0070]	L1	Cross-sectional length of side flange

	[0071]	L2	Cross-sectional length of bridge portion
	[0072]	L3	Cross-sectional length of apex portion
	[0073]	R	Radius of curved bend
	[0074]	R1	Radius of intermediate curved bend
5	[0075]	R2	Radius of curved bridge bend
	[0076]	S1	Distance between centers of curved bridge bends
	[0077]	S2	Overall length dimension of cross-section
	[0078]	S3	Overall width dimension of cross-section
	[0079]	T	Thickness

WHAT IS CLAIMED IS:

1. A truss for reinforcing a pole, the truss comprising:
 - an elongated body having a pair of opposite ends connected by a pair of longitudinal edges;
 - 5 the body having an open cross-sectional configuration characterized by a pair of side flanges each extending from a respective one of the longitudinal edges in a direction diverging from the other side flange, and an intermediate section connecting the pair of side flanges.
2. The truss according to claim 1, wherein the intermediate section of the cross-sectional configuration includes:
 - 10 a pair of bridge portions associated one with each of the pair of side flanges, each bridge portion extending in a direction forming an obtuse angle with the direction of the associated flange; and
 - 15 a pair of apex portions associated one with each of the pair of bridge portions, each apex portion extending in a direction forming an obtuse angle with the direction of the associated bridge portion, wherein the pair of apex portions converge toward one another.
3. The truss according to claim 2, wherein the pair of apex portions are joined by a curved bend.
- 20 4. The truss according to claim 2, wherein each of the pair of flanges is joined to its associated bridge portion by a curved bend.
5. The truss according to claim 2, wherein each of the pair of bridge portions is joined to its apex portion by a curved bend.
- 25 6. The truss according to claim 2, wherein fastener holes are provided through each of the pair of bridge portions.

7. The truss according to claim 2, wherein fastener holes are provided through each of the pair of apex portions.
8. The truss according to claim 3, wherein fastener holes are provided through the curved bend joining the pair of apex portions.
- 5 9. A truss for reinforcing a pole, the truss comprising:
an elongated body having a pair of opposite ends connected by a pair of longitudinal edges;
the body having an open cross-sectional configuration characterized by:
10 a pair of straight apex portions forming an excluded angle A1 with one another;
a pair of straight bridge portions each forming a first included angle A3 with an associated one of the pair of apex portions;
a pair of straight side flanges each forming a second included
15 angle A2 with an associated one of the pair of bridge portions;
wherein the angles A1, A2, and A3 are chosen to satisfy the following relationship:
$$180 - A2 - A3 + \frac{1}{2} * A1 > 0$$

in which angles A1, A2, and A3 are expressed in degrees.
- 20 10. The truss according to claim 9, wherein the cross-sectional configuration is further characterized by an axis of symmetry midway between the pair of edges, and the pair of apex portions are symmetrical about the axis of symmetry, the pair of bridge portions are symmetrical about the axis of symmetry, and the pair of side flanges are symmetrical about the axis of symmetry.
- 25 11. The truss according to claim 9, wherein the excluded angle A1, the first included angle A3, and the second included angle A2 are equal to one another.

12. The truss according to claim 11, wherein the excluded angle A1, the first included angle A3, and the second included angle A2 are all equal to 100°.
13. The truss according to claim 9, wherein the pair of apex portions are joined to one another by a curved bend, each of the pair of bridge portions is joined to an associated one of the pair of apex portions by a curved bend, and each of the pair of side flanges is joined to an associated one of the pair of bridge portions by a curved bend.
14. A method of making a truss for reinforcing a pole, the method comprising the steps of:
- A) providing an elongated piece of material having a pair of opposite ends connected by a pair of longitudinal edges, a longitudinal first axis extending between the edges, a pair of longitudinal second axes located one on each opposite side of the first axis, and a pair of longitudinal third axes located one on each opposite side of the first axis, the pair of third axes being between the pair of second axes;
- B) forming a first curved bend along the first axis to give the material a generally V-shaped cross-sectional configuration;
- C) forming a pair of second curved bends of opposite bearing to the first curved bend along the pair of second axes, the pair of second curved bends defining a pair of side flanges each limited by an associated one of the pair of second curved bends and an associated one of the pair of edges; and
- D) forming a pair of third curved bends of opposite bearing to the first curved bend along the pair of third axes, wherein the first curved bend, the pair of second curved bends, and the pair of third curved bends are formed so that the pair of side flanges converge toward one another as they extend from the pair of second curved bends toward the pair of edges.

15. The method according to claim 14, wherein the first curved bend, the pair of second curved bends, and the pair of third curved bends are angularly equivalent bends.
- 5 16. The method according to claim 15, wherein the first curved bend, the pair of second curved bends, and the pair of third curved bends have the same radius of curvature.
17. A truss for reinforcing a pole, the truss comprising:
an elongated body having a pair of opposite ends connected by a pair of longitudinal edges;
10 the body having an open cross-sectional configuration characterized by a pair of side flanges each extending from a respective one of the longitudinal edges in a direction diverging from the other side flange, and an intermediate section connecting the pair of side flanges, wherein the intermediate section of the cross-sectional configuration includes:
15 an intermediate curved bend about a radius of curvature external to the open cross-sectional configuration; and
a pair of curved bridge bends each for connecting the intermediate curved bend to an associated one of the pair of side flanges.
- 20 18. The truss according to claim 17, wherein the intermediate section further includes a pair of straight apex portions each for joining a respective one of the pair of curved bridge bends with the intermediate curved bend.
19. The truss according to claim 17, wherein fastener holes are provided through each of the pair of curved bridge bends.
- 25 20. The truss according to claim 18, wherein fastener holes are provided through the intermediate curved bend.

21. A truss for reinforcing a pole, the truss comprising:
an elongated body having a pair of opposite ends connected by a pair
of longitudinal edges;
the body having an open cross-sectional configuration characterized
5 by:
an intermediate curved bend through an excluded bend angle
BA1;
a pair of curved bridge bends one on each opposite side of the
intermediate curved bend, wherein each curved bridge bend is through
10 an included bend angle BA2;
wherein the bend angles BA1 and BA2 are chosen to satisfy the following
relationship:
$$2*BA2 - BA1 - 180 > 0$$

in which bend angles BA1 and BA2 are expressed in degrees.
- 15 22. The truss according to claim 21, wherein the cross-sectional configuration is
further characterized by an axis of symmetry midway between the pair of edges,
the bend angle BA1 is bisected by the axis of symmetry, and the pair of curved
bridge bends are symmetrically arranged with respect to one another about the
axis of symmetry.
- 20 23. The truss according to claim 22, wherein the excluded bend angle BA1 is equal
to 80° and the included bend angle BA2 is equal to 160°.
24. The truss according to claim 21, wherein the intermediate curved bend and the
pair of curved bridge bends have the same radius of curvature.

25. A method of making a truss for reinforcing a pole, the method comprising the steps of:

A) providing an elongated piece of material having a pair of opposite ends connected by a pair of longitudinal edges, a longitudinal first axis extending between the edges, and a pair of longitudinal second axes located one on each opposite side of the first axis;

B) forming a first curved bend along the first axis to give the material a generally V-shaped cross-sectional configuration; and

C) forming a pair of second curved bends of opposite bearing to the first curved bend along the pair of second axes, the pair of second curved bends defining a pair of side flanges each limited by an associated one of the pair of second curved bends and an associated one of the pair of edges, wherein the first curved bend and the pair of second curved bends are formed so that the pair of side flanges converge toward one another as they extend from the pair of second curved bends toward the pair of edges.

26. The method according to claim 25, wherein the pair of second curved bends are angularly equivalent bends.

27. The method according to claim 25, wherein the first curved bend and the pair of second curved bends have the same radius of curvature.

1/7


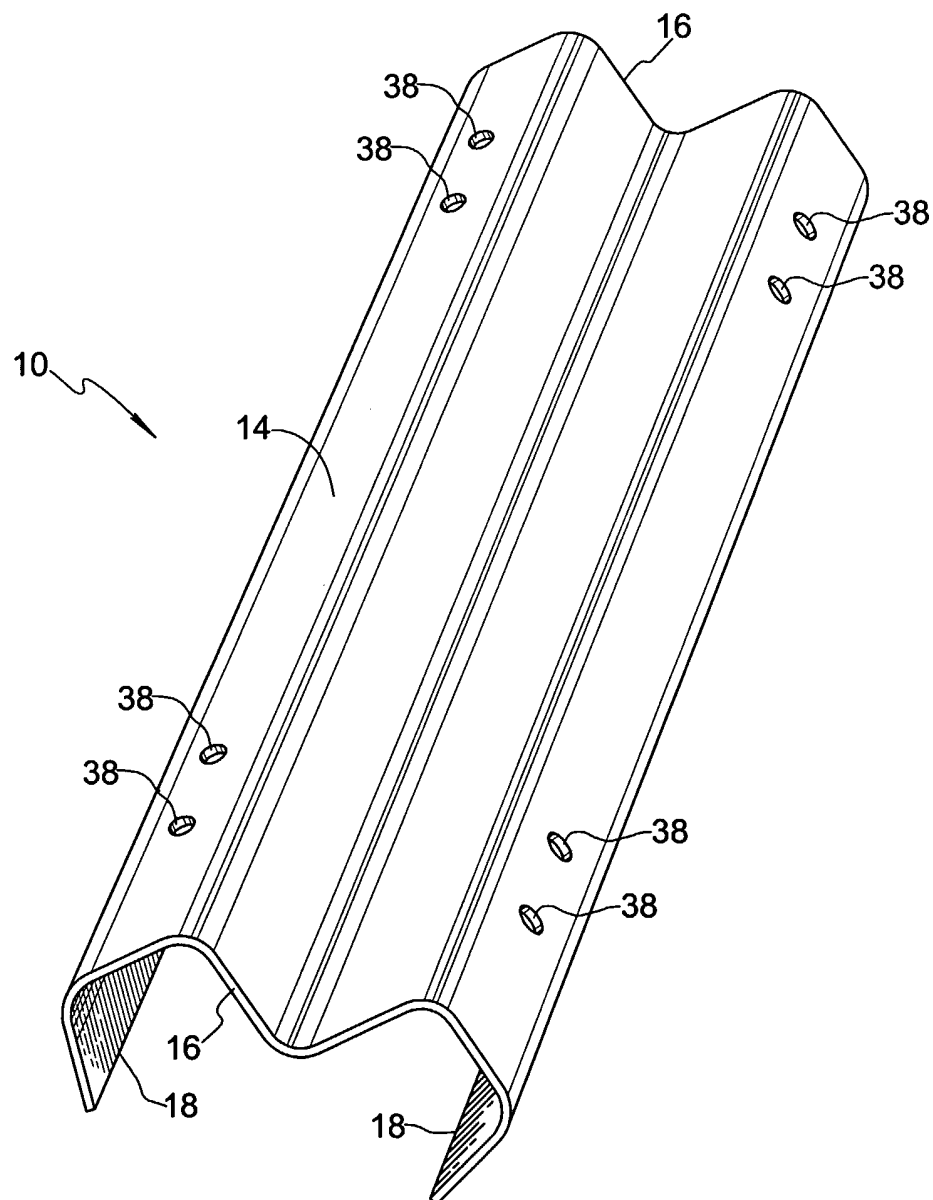


FIG. 1

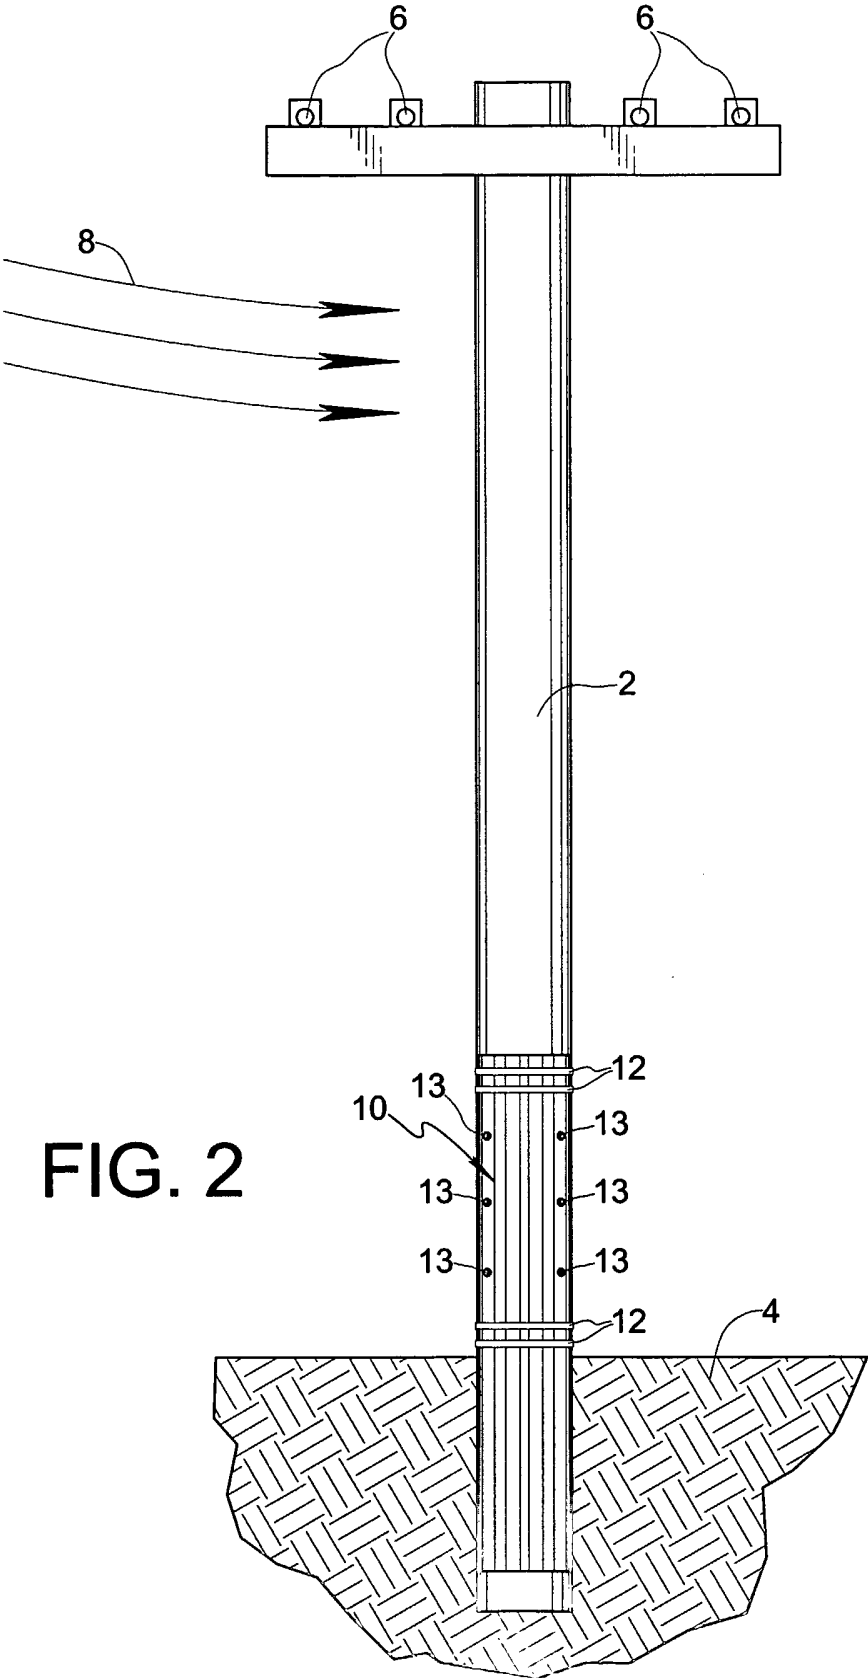

3/7

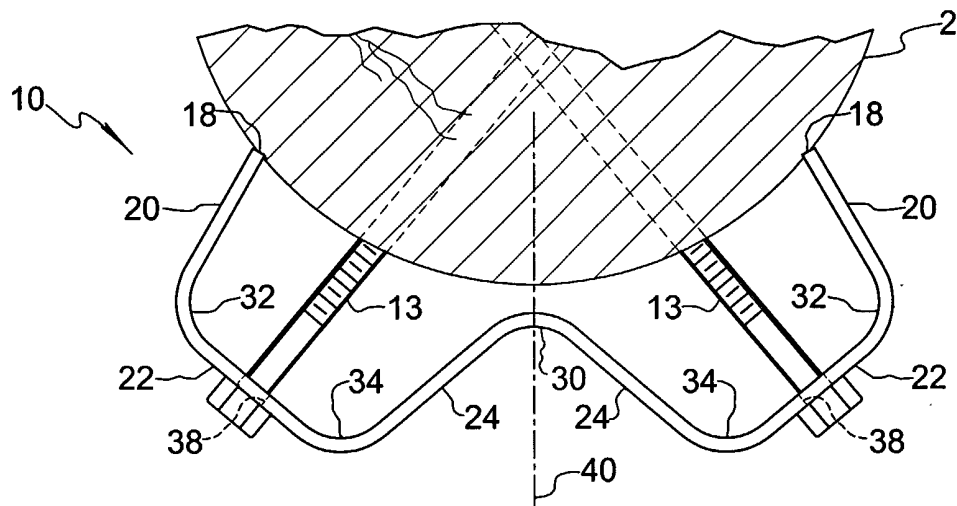


FIG. 3

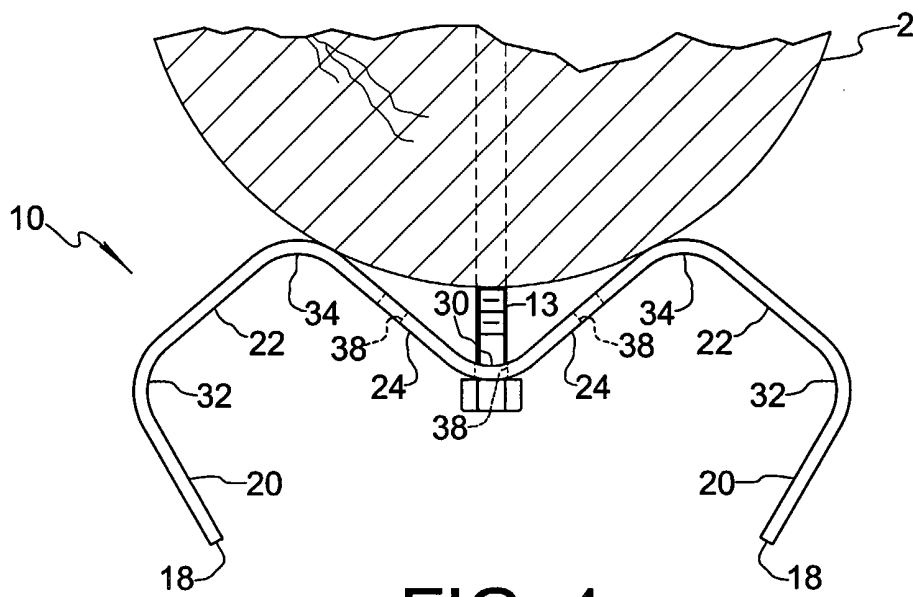


FIG. 4

4/7

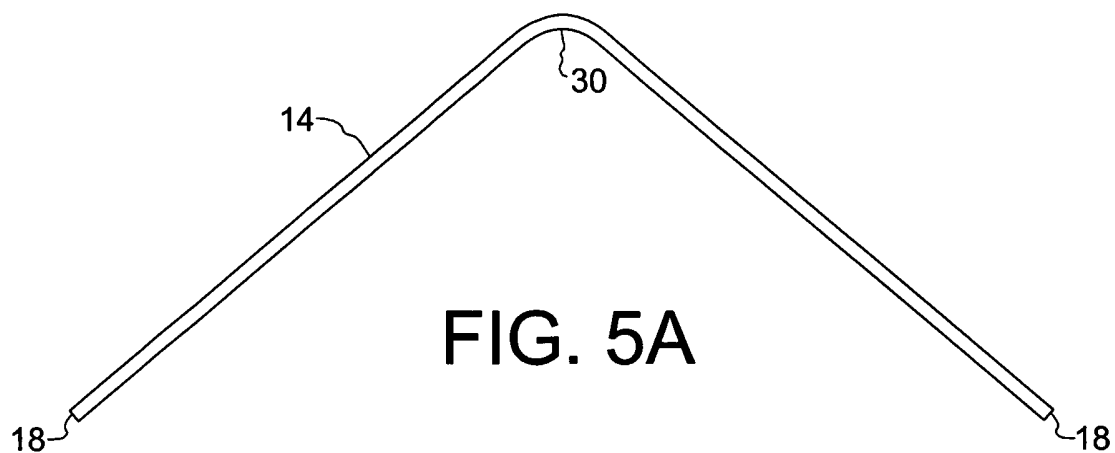


FIG. 5A

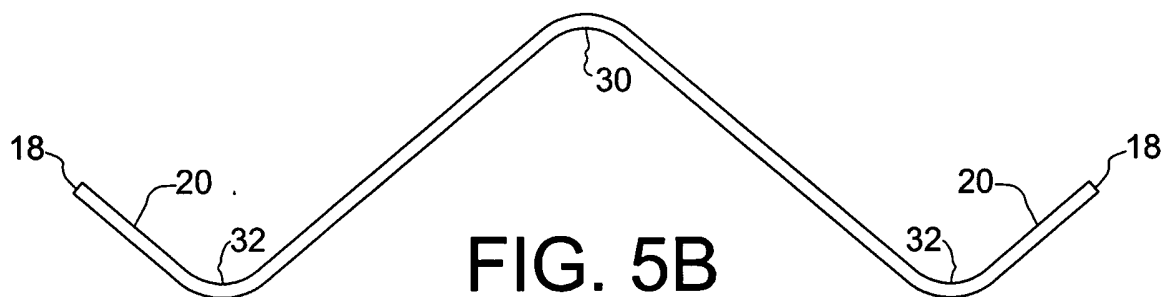


FIG. 5B

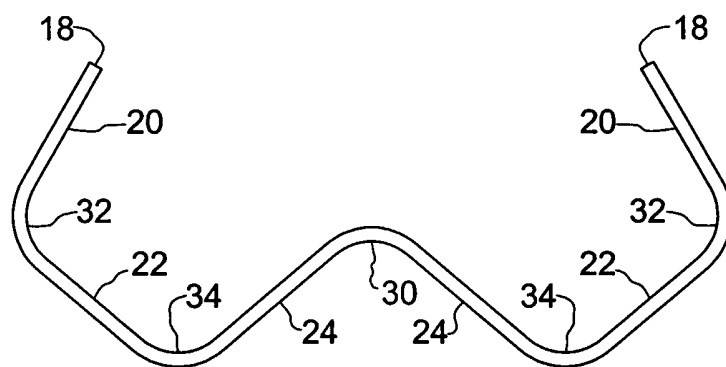


FIG. 5C

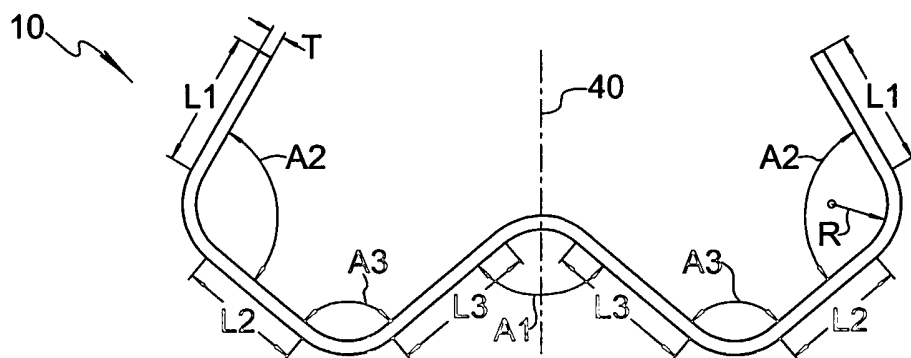


FIG. 6

5/7

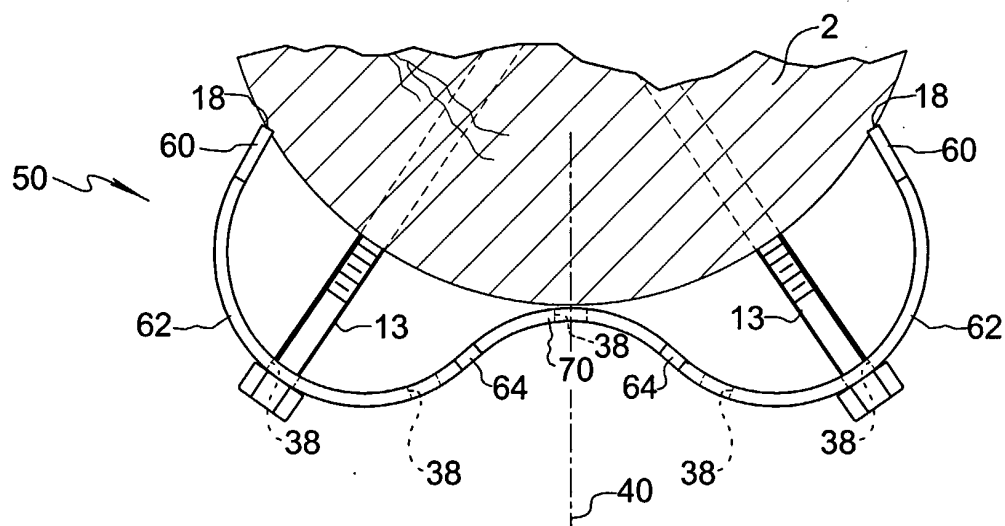


FIG. 7

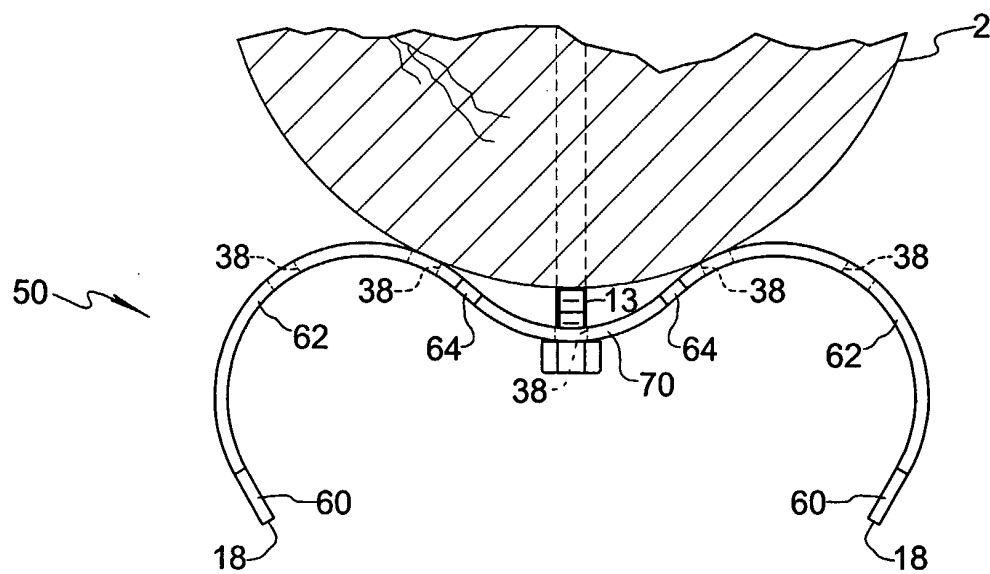


FIG. 8

6/7

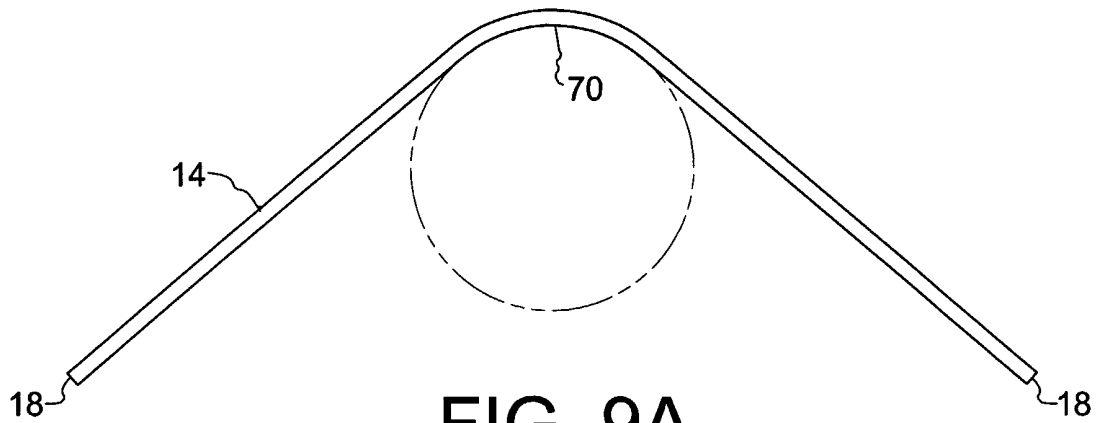


FIG. 9A

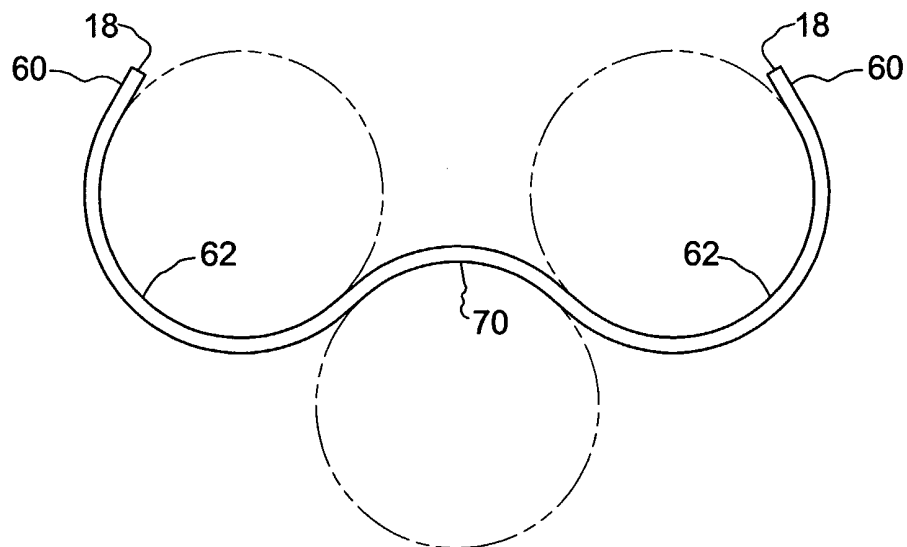


FIG. 9B

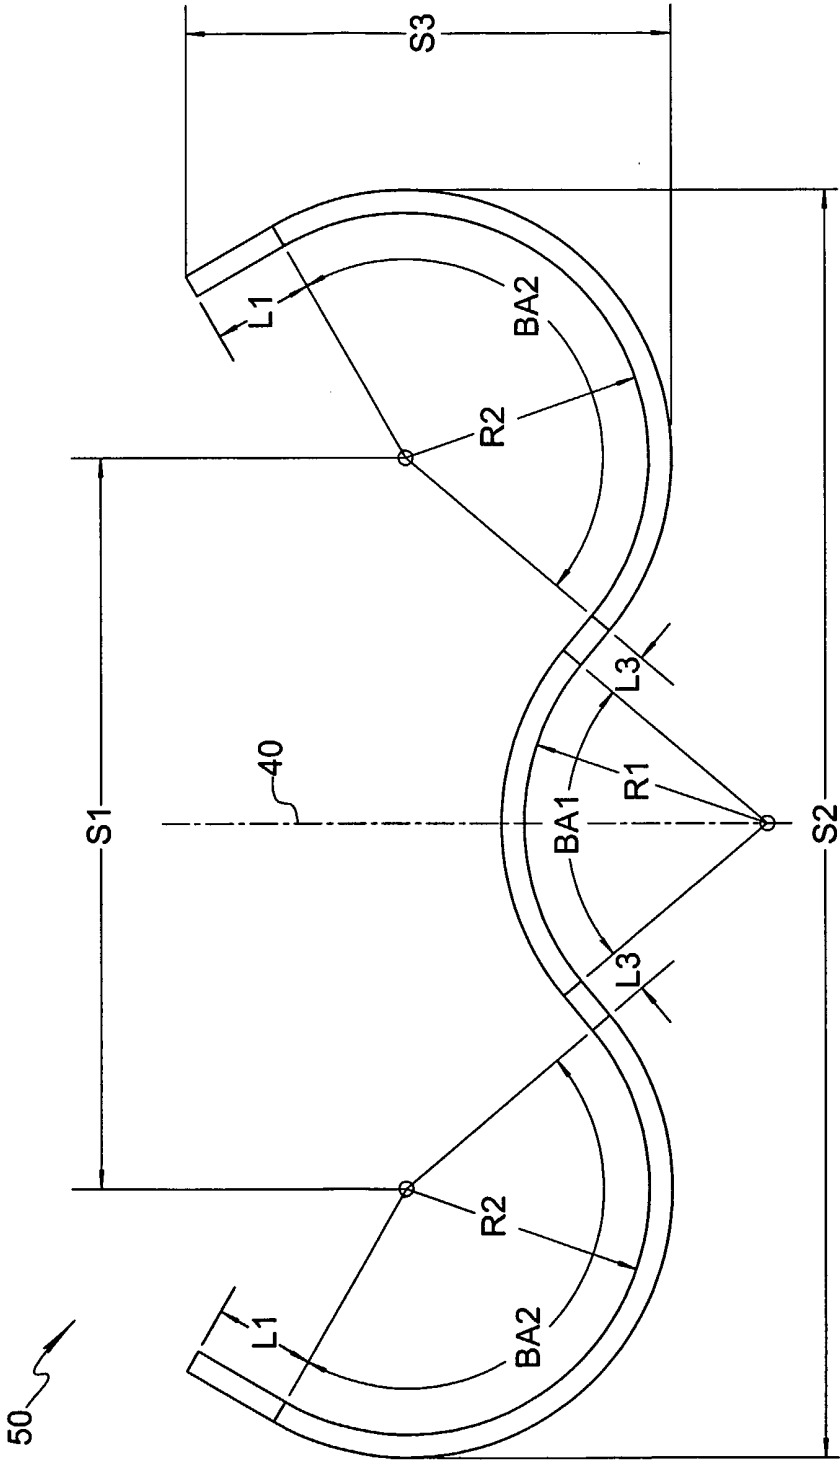


FIG. 10