

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2013/142957 A1

(43) International Publication Date
3 October 2013 (03.10.2013)

WIPO | PCT

(51) International Patent Classification:

C01F 7/38 (2006.01) *C01F 7/56* (2006.01)
A62D 3/36 (2007.01) *C22B 21/02* (2006.01)
A62D 3/40 (2007.01) *C22B 3/10* (2006.01)
B01D 53/14 (2006.01) *C22B 3/44* (2006.01)
B01D 53/46 (2006.01) *C22B 7/02* (2006.01)
C01B 7/00 (2006.01)

(21) International Application Number:

PCT/CA2013/000218

(22) International Filing Date:

11 March 2013 (11.03.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/617,422 29 March 2012 (29.03.2012) US
61/706,028 26 September 2012 (26.09.2012) US

(71) Applicant: **ORBITE ALUMINAE INC.** [CA/CA]; 6505 route Transcanadienne, Bureau 610, St-Laurent, Québec H4T 1S3 (CA).

(72) Inventors: **BOUDREAU, Richard**; 2723 Luce-Guilbeault, St-Laurent, Québec H4R 2T3 (CA). **FOURNIER, Joël**; 1761 des Amarantes, Carignan, Québec J3L 4Z8 (CA). **PRIMEAU, Denis**; 2166 Place de l'Église, Ste-Julie, Québec J3E 2G5 (CA).

(74) Agent: **BERESKIN & PARR LLP/S.E.N.C.R.L., S.R.L.**; 40th Floor, 40 King Street West, Toronto, Ontario M5H 3Y2 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PROCESSES FOR TREATING FLY ASHES

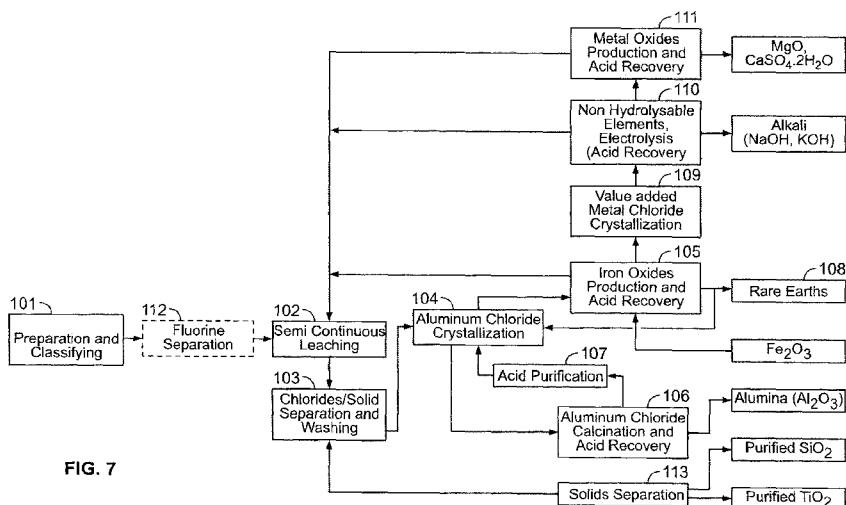


FIG. 7

(57) Abstract: There are provided processes for treating fly ash. For example, the processes can comprise leaching fly ash with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating the solid from the leachate; reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising the aluminum ions in the form of $AlCl_3$, and separating the precipitate from the liquid; and heating the precipitate under conditions effective for converting $AlCl_3$ into Al_2O_3 and optionally recovering gaseous HCl so-produced.

WO 2013/142957 A1

PROCESSES FOR TREATING FLY ASHES

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims priority on US 61/617,422 filed on March 29, 2012; and on US 61/706,028 filed on September 26, 2012. These documents are hereby incorporated by reference in their entirety.

TECHNICAL FIELD

[0002] The present disclosure relates to improvements in the field of processes for treating industrial waste materials. For example, it relates to processes for treating fly ash. For example, these processes can be effective for extracting various materials from fly ash such as alumina and various metal oxides, silica, and rare earths, etc.

BACKGROUND OF THE DISCLOSURE

[0003] Fly ash is one of the residues generated in combustion. It comprises fine particles that rise with the flue gases. Ash which does not rise is termed bottom ash. Fly ash material can solidify while suspended in the exhaust gases and is collected by electrostatic precipitators or filter bags. Since the particles solidify while suspended in the exhaust gases, fly ash particles can be generally spherical in shape and range in size from 0.5 μm to 100 μm . Fly ash can comprise silicon dioxide (SiO_2) (which can be present in two forms: amorphous, which is rounded and smooth, and crystalline, which is sharp, pointed and hazardous); aluminium oxide (Al_2O_3) and iron oxide (Fe_2O_3). Fly ashes can also comprise calcium oxide (CaO). Fly ashes can also be highly heterogeneous. They can comprise a mixture of glassy particles with various identifiable

[0004] For example, fly ash can refer to ash produced during combustion of coal. Depending upon the source and makeup of the coal being burned, the components of fly ash vary considerably.

[0005] In the past, fly ash was generally released into the atmosphere, but pollution control equipment mandated in recent decades now require that it be captured prior to release. Fly ash is generally captured by electrostatic precipitators or other particle filtration equipment before the flue gases reach the chimneys of coal-fired power plants, and together with bottom ash removed from the bottom of the furnace is in this case jointly known as coal ash. For example, in the US, fly ash can be generally stored at coal power plants or placed in landfills. About 43 percent is recycled,^[3] often used to supplement Portland cement in concrete production. However, some researchers have expressed health concerns about this.

[0006] In the past, fly ash produced from coal combustion was simply entrained in flue gases and dispersed into the atmosphere. This created environmental and health concerns that prompted laws which have reduced fly ash emissions to less than 1 percent of ash produced. Worldwide, more than 65% of fly ash produced from coal power stations is disposed of in landfills and ash ponds. The recycling of fly ash has become an increasing concern in recent years due to increasing landfill costs and current interest in sustainable development. As of 2005, U.S. coal-fired power plants reported producing 71.1 million tons of fly ash, of which 29.1 million tons were reused in various applications. If the nearly 42 million tons of unused fly ash had been recycled, it would have reduced the need for approximately 27,500 acre·ft (33,900,000 m³) of landfill space.

[0007] There is thus a need for at least an alternative process for treating, recycling and/or valorizing fly ash.

SUMMARY OF THE DISCLOSURE

[0008] According to one aspect, there is provided a process for preparing alumina and optionally other products, the process comprising :

leaching an aluminum-containing material with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating the solid from the leachate;

reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising the aluminum ions in the form of AlCl_3 , and separating the precipitate from the liquid;

heating the precipitate under conditions effective for converting AlCl_3 into Al_2O_3 and recovering gaseous HCl so-produced; and

recycling the gaseous HCl so-produced by contacting it with water so as to obtain a composition having a concentration higher than HCl azeotrope concentration (20.2 weight %) and reacting the composition with a further quantity of aluminum-containing material so as to leaching it.

[0009] According to another aspect, there is provided a process for preparing alumina and optionally other products, the process comprising :

leaching an aluminum-containing material with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating the solid from the leachate;

reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising the aluminum ions in the form of AlCl_3 , and separating the precipitate from the liquid;

heating the precipitate under conditions effective for converting AlCl_3 into Al_2O_3 and recovering gaseous HCl so-produced; and

recycling the gaseous HCl so-produced by contacting it with water so as to obtain a composition having a concentration of about 18 to about 45 weight % or about 25 to about 45 weight % and reacting the

composition with a further quantity of aluminum-containing material so as to leaching it.

[0010] According to another aspect, there is provided a process for preparing alumina and optionally other products, the process comprising :

leaching an aluminum-containing material with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating the solid from the leachate;

reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising the aluminum ions in the form of AlCl_3 , and separating the precipitate from the liquid;

heating the precipitate under conditions effective for converting AlCl_3 into Al_2O_3 and recovering gaseous HCl so-produced; and

recycling the gaseous HCl so-produced by contacting it with water so as to obtain a composition having a concentration of about 18 to about 45 weight % or about 25 to about 45 weight % and using the composition for leaching the aluminum-containing material.

[0011] According to another aspect, there is provided a process for preparing alumina and optionally other products, the process comprising :

leaching an aluminum-containing material with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating the solid from the leachate;

reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising the aluminum ions in the form of AlCl_3 , and separating the precipitate from the liquid;

heating the precipitate under conditions effective for converting AlCl_3 into Al_2O_3 and recovering gaseous HCl so-produced; and

recycling the gaseous HCl so-produced by contacting it with the leachate so as to precipitate the aluminum ions in the form of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$.

[0012] According to another aspect, there is provided a process for preparing alumina and optionally other products, the process comprising :

leaching an aluminum-containing material with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating the solid from the leachate;

reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising the aluminum ions in the form of AlCl_3 , and separating the precipitate from the liquid; and

heating the precipitate under conditions effective for converting AlCl_3 into Al_2O_3 .

[0013] According to another aspect, there is provided a process for preparing alumina and optionally other products, the process comprising :

leaching an aluminum-containing material with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating the solid from the leachate;

reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising the aluminum ions in the form of AlCl_3 , and separating the precipitate from the liquid; and

heating the precipitate under conditions effective for converting AlCl_3 into Al_2O_3 and optionally recovering gaseous HCl so-produced.

[0014] According to one aspect, there is provided a process for preparing aluminum and optionally other products, the process comprising :

leaching an aluminum-containing material with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating the solid from the leachate;

reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising the aluminum ions in the form of AlCl_3 , and separating the precipitate from the liquid;

heating the precipitate under conditions effective for converting AlCl_3 into Al_2O_3 ; and

converting Al_2O_3 into aluminum.

[0015] According to another aspect, there is provided a process for preparing aluminum and optionally other products, the process comprising :

leaching an aluminum-containing material with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating the solid from the leachate;

reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising the aluminum ions in the form of AlCl_3 , and separating the precipitate from the liquid;

heating the precipitate under conditions effective for converting AlCl_3 into Al_2O_3 and optionally recovering gaseous HCl so-produced; and

converting Al_2O_3 into aluminum.

[0016] According to another aspect, there is provided a process for preparing various products, the process comprising :

leaching an aluminum-containing material comprising a first metal with HCl so as to obtain a leachate comprising ions of the first metal and a solid, and separating the solid from the leachate;

reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising a chloride of the first metal, and separating the precipitate from the liquid; and

heating the precipitate under conditions effective for converting the chloride of the first metal into an oxide of the first metal.

[0017] According to another aspect, there is provided a process for preparing various products, the process comprising :

leaching an aluminum-containing material comprising a first metal with an acid so as to obtain a leachate comprising ions of the first metal and a solid, and separating the solid from the leachate;

substantially selectively removing ions of the first metal from the leachate, thereby obtaining a composition; and

substantially selectively removing ions of a second metal from the composition.

[0018] According to another aspect, there is a process for treating an aluminum-containing material comprising :

leaching fly ash with an acid so as to obtain a leachate and a solid residue, and separating the leachate from the solid residue;

at least partially removing iron ions from the leachate by substantially selectively precipitating the iron ions at a pH greater than 10 by reacting the leachate with a base and at least partially removing the precipitated iron ions from the leachate, thereby obtaining an Al-rich composition comprising Al^{3+} ions;

optionally purifying the Al^{3+} ions; and

converting the Al^{3+} ions into alumina.

[0019] According to another aspect, there is a process for treating an aluminum-containing material comprising :

leaching the aluminum-containing material with an acid so as to obtain a leachate and a solid residue, and separating the leachate from the solid residue;

at least partially removing iron ions from the leachate by substantially selectively precipitating the iron ions at a pH of about 3 to about 6 by reacting the leachate with a base and at least partially removing the precipitated iron ions from the leachate, thereby obtaining an Al-rich composition comprising Al^{3+} ions;

optionally purifying the Al^{3+} ions; and

converting the Al^{3+} ions into alumina.

BRIEF DESCRIPTION OF DRAWINGS

[0020] In the following drawings, which represent by way of example only, various embodiments of the disclosure :

[0021] Fig. 1 shows a bloc diagram of an example of process for preparing alumina and various other products according to the present disclosure;

[0022] Fig. 2 is an extraction curve for Al and Fe in which the extraction percentage is expressed as a function of a leaching time in a process according to an example of the present application;

[0023] Fig. 3 shows a bloc diagram of another example of process for preparing alumina and various other products according to the present disclosure;

[0024] Fig. 4 is a schematic representation of an example of a process for purifying/concentrating HCl according to the present disclosure;

[0025] Fig. 5 is a schematic representation of an example of a process for purifying/concentrating HCl according to the present disclosure;

[0026] Fig. 6 shows another bloc diagram of an example of process for preparing alumina and various other products according to the present disclosure; and

[0027] Fig. 7 shows another bloc diagram of an example of process for preparing alumina and various other products according to the present disclosure.

DETAILED DESCRIPTION OF VARIOUS EMBODIMENTS

[0028] The following non-limiting examples further illustrate the technology described in the present disclosure.

[0029] The aluminum-containing material can be for example chosen from aluminum-containing ores (such as aluminosilicate minerals, clays, argillite, nepheline, mudstone, beryl, cryolite, garnet, spinel, bauxite, kaolin or mixtures thereof can be used). The aluminum-containing material can also be a recycled industrial aluminum-containing material such as slag, red mud or fly ash.

[0030] The expression “red mud” as used herein refers, for example, to an industrial waste product generated during the production of alumina. For example, such a waste product can comprise silica, aluminum, iron, calcium, and optionally titanium. It can also comprise an array of minor constituents such as Na, K, Cr, V, Ni, Ba, Cu, Mn, Pb, and/or Zn etc. For example, red mud can comprises about 15 to about 80 % by weight of Fe_2O_3 , about 1 to about 35 % by weight Al_2O_3 , about 1 to about 65 % by weight of SiO_2 , about 1 to about 20 % by weight of Na_2O , about 1 to about 20 % by weight of CaO , and from 0 to about 35 % by weight of TiO_2 . According to another example, red mud can comprise about 30 to about 65 % by weight of Fe_2O_3 , about 10 to about 20 % by weight Al_2O_3 , about 3 to about 50 % by weight of SiO_2 ,

about 2 to about 10 % by weight of Na_2O , about 2 to about 8 % by weight of CaO , and from 0 to about 25 % by weight of TiO_2 .

[0031] The expression "fly ashes" or "fly ash" as used herein refers, for example, to an industrial waste product generated in combustion. For example, such a waste product can contain various elements such as silica, oxygen, aluminum, iron, calcium. For example, fly ash can comprise silicon dioxide (SiO_2) and aluminium oxide (Al_2O_3). For example, fly ash can further comprises calcium oxide (CaO) and/or iron oxide (Fe_2O_3). For example fly ash can comprise fine particles that rise with flue gases. For example, fly ash can be produced during combustion of coal. For example, fly ash can also comprise at least one element chosen from arsenic, beryllium, boron, cadmium, chromium, chromium VI, cobalt, lead, manganese, mercury, molybdenum, selenium, strontium, thallium, and/or vanadium. For example, fly ash can also comprise rare earth elements and rare metals. For example, fly ash can be considered as an aluminum-containing material. For example, fly ash can comprise about 40 to about 50% by weight SiO_2 , about 20 to about 30% by weight Al_2O_3 , about 15 about 25% by weight Fe_2O_3 , about 1 to about 6% by weight Ca_2O , about 0 to about 2% by weight MgO , about 0 to about 2% Na_2O and about 1 to about 4% K_2O

[0032] The expression "rare earth element" (also described as "REE") as used herein refers, for example, to a rare element chosen from scandium, yttrium, lanthanum, cerium, praseodymium, neodymium, promethium, samarium, europium, gadolinium, terbium, dysprosium, holmium, erbium, thulium, ytterbium, and lutetium. The expression "rare metals" as used herein refers, for example, to rare metals chosen from indium, zirconium, lithium, and gallium. These rare earth elements and rare metals can be in various form such as the elemental form (or metallic form), under the form of chlorides, oxides, hydroxides etc. The expression "rare earths" as used in the present disclosure as a synonym of "rare earth elements and rare metals" that is described above.

[0033] The expression "at least one iron chloride" as used herein refers to FeCl_2 , FeCl_3 or a mixture thereof.

[0034] The term "hematite" as used herein refers, for example, to a compound comprising $\alpha\text{-Fe}_2\text{O}_3$, $\gamma\text{-Fe}_2\text{O}_3$, $\beta\text{-FeO.OH}$ or mixtures thereof.

[0035] The expression "iron ions" as used herein refers, for example to ions comprising to at least one type of iron ion chosen from all possible forms of Fe ions. For example, the at least one type of iron ion can be Fe^{2+} , Fe^{3+} , or a mixture thereof.

[0036] The expression "aluminum ions" as used herein refers, for example to ions comprising to at least one type of aluminum ion chosen from all possible forms of Al ions. For example, the at least one type of aluminum ion can be Al^{3+} .

[0037] The expression "at least one aluminum ion", as used herein refers, for example, to at least one type of aluminum ion chosen from all possible forms of Al ions. For example, the at least one aluminum ion can be Al^{3+} .

[0038] The expression "at least one iron ion", as used herein refers, for example, to at least one type of iron ion chosen from all possible forms of Fe ions. For example, the at least one iron ion can be Fe^{2+} , Fe^{3+} , or a mixture thereof.

[0039] The expression "at least one precipitated iron ion", as used herein refers, for example, to at least one type of iron ion chosen from all possible forms of Fe ions that was precipitated in a solid form. For example, the at least one iron ion present in such a precipitate can be Fe^{2+} , Fe^{3+} , or a mixture thereof.

[0040] Terms of degree such as "about" and "approximately" as used herein mean a reasonable amount of deviation of the modified term such that the end result is not significantly changed. These terms of degree should be construed as including a deviation of at least $\pm 5\%$ or at least $\pm 10\%$ of the modified term if this deviation would not negate the meaning of the word it modifies.

[0041] For example, the material can be leached with HCl having a concentration of about 10 to about 50 weight %, about 15 to about 45 weight %, of about 18 to about 45 weight % of about 18 to about 32 weight %, of about 20 to about 45 weight %, of about 25 to about 45 weight %, of about 26 to about 42 weight %, of about 28 to about 40 weight %, of about 30 to about 38 weight %, or between 25 and 36 weight %. For example, HCl at about 18 wt % or about 32 wt % can be used.

[0042] Leaching can also be carried out by adding dry highly concentrated acid (for example, 85 %, 90 % or 95 %) in gas phase into the aqueous solution. Alternatively, leaching can also be carried out by using a weak acid solution (for example < 3 wt %).

[0043] For example, leaching can be carried out by using HCl having a concentration of about 18 to about 32 wt % in a first reactor and then, by using HCl having concentration of about 90 to about 95 % (gaseous) in a second reactor.

[0044] For example, leaching can be carried out by using HCl having a concentration of about 18 to about 32 wt % in a first reactor then, by using HCl having concentration of about 90 to about 95 % (gaseous) in a second reactor; and by using HCl having concentration of about 90 to about 95 % (gaseous) in a third reactor.

[0045] For example, leaching can be carried out under an inert gas atmosphere (for example argon or nitrogen).

[0046] For example, leaching can be carried out under an atmosphere of NH₃.

[0047] For example, the material can be leached at a temperature of about 125 to about 225 °C, about 150 to about 200 °C, about 160 to about 190 °C, about 185 to about 190 °C, about 160 to about 180 °C, about 160 to about 175 °C, or about 165 to about 170 °C.

[0048] For example, the material can be leached at a pressure of about 4 to about 10 barg, about 4 to about 8 barg, or about 5 to about 6 barg.

[0049] The leaching can be carried out under pressure (for example greater than atmospheric pressure) into an autoclave. For example, it can be carried out at a pressure of about 5 KPa to about 850 KPa, about 50 KPa to about 800 KPa, about 100 KPa to about 750 KPa, about 150 KPa to about 700 KPa, about 200 KPa to about 600 KPa, or about 250 KPa to about 500 KPa. The leaching can be carried out at a temperature of at least 80 °C, at least 90 °C, or about 100 °C to about 110 °C. In certain cases, it can be done at higher temperatures.

[0050] The leaching can also be carried out under pressure. For example, the pressure can be about 100 to about 300 or about 150 to about 200 psig. The leaching can be carried out for about 30 minutes to about 5 hours. It can be carried out at a temperature of about 60 °C to about 200 °C.

[0051] For example, the processes can further comprise recycling the gaseous HCl so-produced by contacting it with water so as to obtain a composition having a concentration of about 18 to about 45 weight % or 25 to about 45 weight %.

[0052] For example, the processes can further comprise recycling the gaseous HCl so-produced by contacting it with water so as to obtain a composition having a concentration of about 18 to about 45 weight %, about 26 to about 42 weight %, about 28 to about 40 weight %, about 30 to about 38 weight %, between 18 and 36 weight %, between 19 and 36 weight %, between 25 and 36 weight % or about 25 to about 45 weight % and optionally using the composition for leaching the material.

[0053] For example, the liquid can comprise iron chloride. Iron chloride can comprise at least one of FeCl_2 , FeCl_3 , and a mixture thereof.

[0054] For example, the liquid can have an iron chloride concentration of at least 30% by weight; and can then be hydrolyzed at a temperature of about 155 to about 350 °C.

[0055] For example, the liquid can be concentrated to a concentrated liquid having an iron chloride concentration of at least 30% by weight; and then the iron chloride can be hydrolyzed at a temperature of about 155 to about 350 °C

while maintaining a ferric chloride concentration at a level of at least 65% by weight, to generate a composition comprising a liquid and precipitated hematite, and recovering the hematite.

[0056] For example, non-hydrolysable elements with hematite can be concentrated back to a concentration of about 0.125 to about 52 % wt. in circulation loop in view of selective extraction.

[0057] For example, the liquid can be concentrated to a concentrated liquid having a concentration of the at least one iron chloride of at least 30% by weight; and then hydrolyzed at a temperature of about 155 to about 350 °C.

[0058] For example, the liquid can be concentrated to a concentrated liquid having a concentration of the at least one iron chloride of at least 30% by weight; and then the at least one iron chloride is hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least 65% by weight, to generate a composition comprising a liquid and precipitated hematite, and recovering the hematite.

[0059] For example, the liquid can be concentrated to a concentrated liquid having a concentration of the at least one iron chloride of at least 30% by weight; and then the at least one iron chloride is hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least 65% by weight, to generate a composition comprising a liquid and precipitated hematite; recovering the hematite; and recovering rare earth elements and/or rare metals from the liquid.

[0060] For example, the at least one iron chloride can be hydrolyzed at a temperature of about, 150 to about 175, 155 to about 170 or 165 to about 170 °C.

[0061] For example, the liquid can be concentrated to a concentrated liquid having an iron chloride concentration of at least 30% by weight; and then the iron chloride can be hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least 65% by weight, to generate a composition comprising a liquid and precipitated

hematite; recovering the hematite; and recovering rare earth elements and/or rare metals from the liquid.

[0062] For example, the processes can further comprise, after recovery of the rare earth elements and/or rare metals, reacting the liquid with HCl so as to cause precipitation of $MgCl_2$, and recovering same.

[0063] For example, the processes can further comprise calcining $MgCl_2$ into MgO and optionally recycling HCl so-produced.

[0064] For example, the processes can further comprises, after recovery of the rare earth elements and/or rare metals, reacting the liquid with HCl, and substantially selectively precipitating Na_2SO_4 . For example, Na_2SO_4 can be precipitated by reacting the liquid with H_2SO_4 .

[0065] For example, the processes can further comprises, after recovery of the rare earth elements and/or rare metals, reacting the liquid with HCl, and substantially selectively precipitating K_2SO_4 . For example, K_2SO_4 can be precipitated by adding H_2SO_4 .

[0066] For example, the liquid can be concentrated to a concentrated liquid having an iron chloride concentration of at least 30% by weight; and then the iron chloride can be hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least 65% by weight, to generate a composition comprising a liquid and precipitated hematite; recovering the hematite; and reacting the liquid with HCl. For example, such processes can further comprises reacting the liquid with H_2SO_4 so as to substantially selectively precipitate Na_2SO_4 . The processes can also comprise further reacting the liquid with H_2SO_4 so as to substantially selectively precipitating K_2SO_4 .

[0067] For example, the processes can comprise reacting dry individual salts (for example Na or K salts) obtained during the processes with H_2SO_4 and recovering HCl while producing marketable K_2SO_4 and Na_2SO_4 and recovering hydrochloric acid of about 15 to about 90 % wt.

[0068] For example, sodium chloride produced in the processes can undergo a chemical reaction with sulfuric acid so as to obtain sodium sulfate and regenerate hydrochloric acid. Potassium chloride can undergo a chemical reaction with sulfuric acid so as to obtain potassium sulfate and regenerate hydrochloric acid. Sodium and potassium chloride brine solution can alternatively be the feed material to adapted small chlor-alkali electrolysis cells. In this latter case, common bases (NaOH and KOH) and bleach (NaOCl and KOCl) are produced.

[0069] For example, the processes can further comprise, after recovery of the rare earth elements and/or rare metals, recovering NaCl from the liquid, reacting the NaCl with H₂SO₄, and substantially selectively precipitating Na₂SO₄.

[0070] For example, the processes can further comprise, downstream of recovery of the rare earth elements and/or rare metals, recovering KCl from the liquid, reacting the KCl with H₂SO₄, and substantially selectively precipitating K₂SO₄.

[0071] For example, the processes can further comprise, downstream of recovery of the rare earth elements and/or rare metals, recovering NaCl from the liquid, carrying out an electrolysis to generate NaOH and NaOCl.

[0072] For example, the processes can further comprise, downstream of recovery of the rare earth elements and/or rare metals, recovering KCl from the liquid, reacting the KCl, carrying out an electrolysis to generate KOH and KOCl.

[0073] For example, the liquid can be concentrated to a concentrated liquid having a concentration of the at least one iron chloride of at least 30% by weight; and then the at least one iron chloride is hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least 65% by weight, to generate a composition comprising a liquid and precipitated hematite; recovering the hematite; and extracting NaCl and/or KCl from the liquid.

[0074] For example, the processes can further comprise reacting the NaCl with H₂SO₄ so as to substantially selectively precipitate Na₂SO₄.

[0075] For example, the processes can further comprise reacting the KCl with H₂SO₄ so as to substantially selectively precipitate K₂SO₄.

[0076] For example, the processes can further comprise carrying out an electrolysis of the NaCl to generate NaOH and NaOCl.

[0077] For example, the processes can further comprise carrying out an electrolysis of the KCl to generate KOH and KOCl.

[0078] For example, the processes can comprise separating the solid from the leachate and washing the solid so as to obtain silica having a purity of at least 95 %, at least 96%, at least 97%, at least 98%, at least 99%, at least 99.5 % or at least 99.9%.

[0079] For example, AlCl₃ can be in the form of AlCl₃•6H₂O.

[0080] For example, the processes can comprise reacting the leachate with gaseous HCl so as to obtain the liquid and the precipitate comprising the aluminum ions in the form of AlCl₃•6H₂O.

[0081] For example, the processes can comprise reacting the leachate with dry gaseous HCl so as to obtain the liquid and the precipitate comprising the aluminum ions in the form of AlCl₃•6H₂O.

[0082] For example, the processes can comprise reacting the leachate with acid of at least 30% wt. that was recovered, regenerated and/or purified as indicated in the present disclosure so as to obtain the liquid and the precipitate comprising the aluminum ions in the form of AlCl₃•6H₂O.

[0083] For example, the processes can comprise reacting the leachate with gaseous HCl so as to obtain the liquid and the precipitate comprising the aluminum ions, the precipitate being formed by crystallization of AlCl₃•6H₂O.

[0084] For example, the processes can comprise reacting the leachate with dry gaseous HCl so as to obtain the liquid and the precipitate comprising

the aluminum ions, the precipitate being formed by crystallization of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$.

[0085] For example, aluminum ions can be precipitated under the form of AlCl_3 (for example $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$) in a crystallizer, for example, by adding HCl having a concentration of about 26 to about 32 wt % or about 24 to about 26% wt.

[0086] For example, the gaseous HCl can have a HCl concentration of at least 85 % wt. or at least 90 % wt.

[0087] For example, the gaseous HCl can have a HCl concentration of about 90 % wt. or about 90 % to about 95 % wt..

[0088] For example, during the crystallization of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$, the liquid can be maintained at a concentration of HCl of about 25 to about 35 % by weight, about 30 to about 32 % by weight or about 23 to about 26 % by weight.

[0089] For example, the crystallization can be carried out at a temperature of about 45 to about 65 °C or about 50 to about 60 °C.

[0090] For example, the HCl can be obtained from the gaseous HCl so-produced.

[0091] For example, in the processes of the present disclosure, a given batch or quantity of the aluminum-containing material will be leached, will then be converted into $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ and when the HCl generated during calcination of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 will be used for example to leach another given batch or quantity of the aluminum-containing material.

[0092] For example, the processes can comprise heating the precipitate at a temperature of at least 850, 900, 925, 930, 1000, 1100, 1200 or 1250 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .

[0093] For example, converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 can comprise calcination of AlCl_3 .

[0094] For example, calcination is effective for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into beta- Al_2O_3 .

[0095] For example, calcination is effective for converting $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ into alpha- Al_2O_3 .

[0096] For example, converting $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ into Al_2O_3 can comprise carrying out a calcination via a two-stage circulating fluid bed reactor or via a single stage circulating fluid bed, or via any arrangement fluid bed, kiln, or a plasma system.

[0097] For example, converting AlCl_3 into Al_2O_3 can comprise carrying out a calcination via a two-stage circulating fluid bed reactor that comprises a preheating system.

[0098] For example, converting $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ into Al_2O_3 can comprise carrying out a calcination at low temperature, for example, of at least about 350 °C, at least 375 °C about 300 to about 600 °C, about 325 to about 550 °C, about 350 to about 500 °C, about 375 to about 450 °C, about 375 to about 425 °C, or about 385 to about 400 °C and/or injecting steam.

[0099] For example, converting $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ into Al_2O_3 can comprise carrying out a calcination at low temperature, for example, at least 350 °C and/or injecting steam.

[00100] For example, converting $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ into Al_2O_3 can comprise carrying out a calcination at low temperature, for example, less than 600 °C and/or injecting steam.

[00101] For example, converting $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ into Al_2O_3 can comprise carrying out a calcination by using coal as combustion source and by using a degasification unit.

[00102] For example, steam (or water vapor) can be injected at a pressure of about 200 to about 700 psig, about 300 to about 700 psig, about 400 to about 700 psig, about 550 to about 650 psig, about 575 to about 625 psig, or about 590 to about 610 psig.

[00103] For example, steam (or water vapor) can be injected and a plasma torch can be used for carrying fluidization.

[00104] For example, the steam (or water vapor) can be overheated.

[00105] For example, the steam (or water vapor) can be at a temperature of about 300 to about 400 °C.

[00106] For example, acid from the offgases generated during calcination can be then treated via a gas phase purification process.

[00107] For example, converting $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ into Al_2O_3 can comprise carrying out a calcination by means of carbon monoxide (CO).

[00108] For example, converting $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ into Al_2O_3 can comprise carrying out a calcination by means of a Refinery Fuel Gas (RFG).

[00109] For example, calcination can be carried out by injecting water vapor or steam and/or by using a combustion source chosen from fossil fuels, carbon monoxide, a Refinery Fuel Gas, coal, or chlorinated gases and/or solvents.

[00110] For example, the processes can comprise converting $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ into Al_2O_3 by carrying out a calcination of $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ that is provided by the combustion of gas mixture that is a an incoming smelter gas or a reducer offgas.

[00111] For example, the processes can comprise converting $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ into Al_2O_3 by carrying out a calcination of $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ that is provided by the combustion of gas mixture that is a an incoming smelter gas or a reducer offgas.

[00112] For example, the processes can comprise converting $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ into Al_2O_3 by carrying out a calcination of $\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ that is provided by the combustion of gas mixture that comprises :

CH_4 : 0 to about 1% vol;

C_2H_6 : 0 to about 2% vol;

C_3H_8 : 0 to about 2% vol;

C_4H_{10} : 0 to about 1% vol;

N₂ : 0 to about 0.5% vol;

H₂ : about 0.25 to about 15.1 % vol;

CO : about 70 to about 82.5 % vol; and

CO₂ : about 1.0 to about 3.5% vol.

[00113] For example, O₂ can be substantially absent from the mixture.

[00114] For example, calcination can be carried out by injecting water vapor or steam and/or by using a combustion source chosen from natural gas or propane.

[00115] For example, calcination can be carried out by providing heat by means of electric heating, gas heating, microwave heating and plasma heating.

[00116] The obtained alumina can be washed by demineralized water so as to at least partially remove NaCl and/or KCl.

[00117] For example, the fluid bed reactor can comprise a metal catalyst chosen from metal chlorides.

[00118] For example, the fluid bed reactor can comprise a metal catalyst that is FeCl₃, FeCl₂ or a mixture thereof.

[00119] For example, the fluid bed reactor can comprise a metal catalyst that is FeCl₃.

[00120] For example, the preheating system can comprise a plasma torch.

[00121] For example, steam can be used as the fluidization medium heating. Heating can also be electrical.

[00122] For example, a plasma torch can be used for preheating the calcination reactor.

[00123] For example, a plasma torch can be used for preheating air entering in the calcination reactor.

[00124] For example, a plasma torch can be used for preheating a fluid bed.

[00125] For example, the plasma torch can be effective for generating steam that is injected into a calcination reactor.

[00126] For example, the plasma torch can be effective for generating steam that is as fluidization medium in a fluid bed reactor.

[00127] For example, the calcination medium can be substantially neutral in terms of O₂ (or oxidation). For example, the calcination medium can favorize reduction (for example a concentration of CO of about 100 ppm).

[00128] For example, the calcination medium is effective for preventing formation of Cl₂.

[00129] For example, the processes can comprise converting AlCl₃•6H₂O into Al₂O₃ by carrying out a calcination of AlCl₃•6H₂O that is provided by the combustion of gas mixture that comprises :

CH₄ : 0 to about 1% vol;

C₂H₆ : 0 to about 2% vol;

C₃H₈ : 0 to about 2% vol;

C₄H₁₀ : 0 to about 1% vol;

N₂ : 0 to about 0.5% vol;

H₂ : about 0.25 to about 15.1 % vol;

CO : about 70 to about 82.5 % vol; and

CO₂ : about 1.0 to about 3.5% vol.

[00130] Such a mixture can be efficient for reduction in off gas volume of 15.3 to 16.3%; therefore the capacity increases of 15.3 to 16.3 % proven on practical operation of the circulating fluid bed. Thus for a same flow it represents an Opex of 0.65*16.3% = 10.6%.

[00131] For example, the air to natural gas ratio of (Nm³/h over Nm³/h) in the fluid bed can be about 9.5 to about 10

[00132] For example, the air to CO gas ratio of (Nm³/h over Nm³/h) in the fluid bed can be about 2 to about 3.

[00133] For example, the processes can comprise, before leaching the aluminum-containing material, a pre-leaching removal of fluorine optionally contained in the aluminum-containing material.

[00134] For example, the processes can comprise leaching of the aluminum-containing material with HCl so as to obtain the leachate comprising aluminum ions and the solid, separating the solid from the leachate; and further treating the solid so as to separate SiO₂ from TiO₂ that are contained therein.

[00135] For example, the processes can comprise leaching the aluminum-containing material with HCl so as to obtain the leachate comprising aluminum ions and the solid, separating the solid from the leachate; and further treating the solid with HCl so as to separate Si from Ti that are contained therein.

[00136] For example, the processes can comprise leaching the aluminum-containing material with HCl so as to obtain the leachate comprising aluminum ions and the solid, separating the solid from the leachate; and further treating the solid with HCl at a concentration of less than 20 % wt., at a temperature of less than 85 °C, in the presence of MgCl₂, so as to separate Si from Ti that are contained therein.

[00137] For example, the processes can comprise leaching said fly ash with HCl so as to obtain the leachate comprising aluminum ions and the solid, separating the solid from the leachate; and further treating the solid so as to separate SiO₂ from TiO₂ that are contained therein.

[00138] For example, the processes can comprise comprising leaching the fly ash with HCl so as to obtain the leachate comprising aluminum ions and the solid, separating the solid from the leachate; and further treating the solid with HCl so as to separate SiO₂ from TiO₂ that are contained therein.

[00139] For example, the processes can comprise leaching the fly ash with HCl so as to obtain the leachate comprising aluminum ions and the solid, separating the solid from the leachate; and further treating the solid with HCl at a concentration of less than 20 % by weight, at a temperature of less than 85 °C, in the presence of MgCl, so as to separate SiO₂ from TiO₂ that are contained therein.

[00140] For example, converting AlCl₃•6H₂O into Al₂O₃ can comprise carrying out a one-step calcination.

[00141] For example, the processes can comprise converting AlCl₃•6H₂O into Al₂O₃ by carrying out a calcination of AlCl₃•6H₂O, the calcination comprising steam injection.

[00142] For example, calcination can be carried out at different temperatures with steam. Temperature applied of superheated steam can be of about 350°C to about 550°C or about 350°C to about 940°C or about 350°C to about 1200°C.

[00143] For example, multi stage evaporation step of the hydrolyser can be carried out to reduce drastically energy consumption.

[00144] For example, the processes can be effective for providing an Al₂O₃ recovery yield of at least 93 %, at least 94 %, at least 95 %, about 90 to about 95 %, about 92 to about 95 %, or about 93 to about 95 %.

[00145] For example, the processes can be effective for providing a Fe₂O₃ recovery yield of at least 98 %, at least 99 %, about 98 to about 99.5 %, or about 98.5 to about 99.5 %.

[00146] For example, the processes can be effective for providing a MgO recovery yield of at least 96 %, at least 97 %, at least 98 %, or about 96 to about 98 %.

[00147] For example, the processes can be effective for providing a HCl recovery yield of at least 98 %, at least 99 %, about 98 to about 99.9 % or about 98 to about 99.99 %.

[00148] For example, the processes can be effective for providing chlorides of rare earth elements (REE-Cl) and chlorides of rare metals (RM-Cl) in recovery yields of about 75 % to about 96.5 % by using internal processes via an internal concentration loop.

[00149] For example, the processes can be effective for providing hydrochloric acid recovery yield of about 99.75 % with non-hydrolysable elements.

[00150] For example, the aluminum-containing material can be argillite.

[00151] For example, the aluminum-containing material can be bauxite.

[00152] For example, the aluminum-containing material can be red mud.

[00153] For example, the aluminum-containing material can be fly ash.

[00154] For example, the aluminum-containing material can be chosen from industrial refractory materials.

[00155] For example, the aluminum-containing material chosen from aluminosilicate minerals.

[00156] For example, the processes can be effective for avoiding producing red mud.

[00157] For example, the alumina and the other products are substantially free of red mud.

[00158] For example, HCl can be recycled. For example, such a recycled HCl can be concentrated and/or purified.

[00159] For example, gaseous HCl can be concentrated and/or purified by means of H₂SO₄. For example, gaseous HCl can be treated with H₂SO₄ so as to reduce the amount of water present in the gaseous HCl. For example, gaseous HCl can be passed through a packed column where it is contacted with a H₂SO₄ countercurrent flow. For example, by doing so, concentration of HCl can be increased by at least 50 % wt., at least 60 % wt., at least 70 % wt., at least 75 % wt., at least 80 % wt., about 50 % wt. to about 80 % wt., about 55 % wt. to about 75 % wt., or about 60 % wt. For example, the column

can be packed with a polymer such as polypropylene(PP) or polytrimethylene terephthalate (PTT).

[00160] For example, gaseous HCl can be concentrated and/or purified by means of CaCl₂ or LiCl. For example, gaseous HCl can be passed through a column packed with CaCl₂ or LiCl.

[00161] For example, the concentration of gaseous HCl can be increased from a value below the azeotropic point before treatment to a value above the azeotropic point after treatment.

[00162] For example, the various products obtained by the processes of the present disclosure such as alumina, hematite, titanium oxides, magnesium oxides, rare earth elements and rare metals can be further purified by means of a plasma torch. For example, the rare earth elements and rare metals, once isolated, can be individually injected into a plasma torch so as to further purify them.

[00163] For example, the acid can be chosen from HCl, HNO₃, H₂SO₄ and mixtures thereof.

[00164] For example, the first metal can be aluminum or iron. For example, the second metal can be aluminum or iron.

[00165] For example, when the first metal is aluminum, the aluminum ions can be removed from said leachate by reacting the leachate with an acid (such as HCl) so as to obtain a liquid and a precipitate comprising said aluminum ions (for example in the form of AlCl₃), and separating said precipitate from said liquid. Then, iron ions can be recovered from the liquid by precipitation, hydrolysis, purification etc.

[00166] For example, when the first metal is iron, the iron ions can be removed from said leachate by leachate with a base (such as NaOH or KOH) so as to obtain a liquid and a precipitate comprising said iron ions, and separating said precipitate from said liquid. Then, aluminum ions can be recovered from the liquid by precipitation, hydrolysis, purification etc.

[00167] For example, the processes can comprise precipitating said Al³⁺ ions under the form of Al(OH)₃. For example, wherein precipitating said Al³⁺ under the form of Al(OH)₃ is carried out at a pH of about 7 to about 10, about 9 to about 10, about 9.2 to about 9.8, about 9.3 to about 9.7, about 9.5, about 7.5 to about 8.5, about 7.8 to about 8.2 or about 8.

[00168] For example, the iron ions can be precipitated at a pH greater than 11, a pH greater than 12, a pH comprised between 10 and 11, a pH of about 11.5 to about 12.5 or of about 11.8 to about 12.0.

[00169] For example, the iron ions can be precipitated at a pH of about 3.0 to about 5.5, about 3 to about 5, about 3 to about 4, about 3.0 to about 3.5, about 3.5 to about 4.0, about 4 to about 5, about 4.5 to about 5.0, about 5 to about 6 by adding said base.

[00170] For example, when the first metal to be removed is iron, the processes can be carried out in a manner similar as described in WO2008/141423 or in WO2012/065253 and by using, for example, using an aluminum-containing material as described in the present disclosure as starting material. These document are hereby integrated by reference in their entirety.

[00171] For example, the Al³⁺ ions can be purified.

[00172] For example, the processes can further comprise converting alumina (Al₂O₃) into aluminum. Conversion of alumina into aluminum can be carried out, for example, by using the Hall–Héroult process. References is made to such a well known process in various patents and patent applications such as US 20100065435; US 20020056650; US 5,876,584; US 6,565,733. Conversion can also be carried out by means of other methods such as those described in US 7,867,373; US 4,265,716; US 6,565,733 (converting alumina into aluminum sulfide followed by the conversion of aluminum sulfide into aluminum.). For example, aluminium can be produced by using a reduction environment and carbon at temperature below 200°C. Aluminum can also be

produced by reduction using potassium and anhydrous aluminum chloride (Wohler Process).

[00173] For example, converting AlCl_3 into Al_2O_3 can be done under an inert gas atmosphere.

[00174] For example, converting AlCl_3 into Al_2O_3 can be done under a nitrogen atmosphere.

[00175] For examples, the processes of the present disclosure can be continuous processes or semi-continuous processes.

[00176] According to one example as shown in Fig. 1, the processes can involve the following steps (the reference numbers in Fig. 1 correspond to the following steps) :

1- The aluminum-containing material is reduced to an average particle size of about 50 to about 80 μm .

2- The reduced and classified material is treated with hydrochloric acid which allows for dissolving, under a predetermined temperature and pressure, the aluminum with other elements like iron, magnesium and other metals including rare earth elements and/or rare metals. The silica and titanium (if present in raw material) remain totally undissolved.

3- The mother liquor from the leaching step then undergoes a separation, a cleaning stage in order to separate the purified silica from the metal chloride in solution. The purified silica can then optionally undergo one or two additional leaching stages (for example at a temperature of about 150 to about 160 °C) so as to increase the purity of silica above 99.9 %. TiO_2 contained in silica can be separated from silica through a leach made by using HCl and MgCl_2 as a lixiviant composition.

4- The spent acid (leachate) obtained from step 1 is then brought up in concentration with dry and highly concentrated gaseous hydrogen chloride by sparging this one into a crystallizer. This results into the crystallization of aluminum chloride hexahydrate (precipitate) with a minimum

of other impurities. Depending on the concentration of iron chloride at this stage, further crystallization step(s) can be required. The precipitate is then separated from the liquid.

5- The aluminum chloride hexahydrate is then calcined (for example by means of a rotary kiln, fluid bed, etc) at high temperature in order to obtain the alumina form. Highly concentrated gaseous hydrogen chloride is then recovered and excess is brought in aqueous form to the highest concentration possible so as to be used (recycled) in the acid leaching step. Acid can also be directly sent in gas phase to the acid purification stage to increase HCl concentration from about 30 wt % to about 95 wt %. This can be done, for example, during drying stage.

6- Iron chloride (the liquid obtained from step 4) is then pre-concentrated and hydrolyzed at low temperature in view of the Fe_2O_3 (hematite form) extraction and acid recovery from its hydrolysis. All heat recovery from the calcination step (step 5), the leaching part exothermic reaction (step 1) and other section of the processes is being recovered into the pre-concentrator.

10- After the removal of hematite, a solution rich in rare earth elements and/or rare metals can be processed. As it can be seen in Fig.3, an internal recirculation can be done (after the removal of hematite) and the solution rich in rare earth elements and/or rare metals can be used for crystallization stage 4. Extraction of the rare earth elements and/or rare metals can be done as described in PCT/CA2012/000253 and/or PCT/CA2012000419. These two documents are hereby integrated by reference in their entirety.

Other non-hydrolysable metal chlorides (Me-Cl) such as MgCl_2 and others then undergo the following steps:

7- The solution rich in magnesium chloride and other non-hydrolysable products at low temperature is then brought up in concentration

with dry and highly concentrated gaseous hydrogen chloride by sparging it into a crystallizer. This results into the precipitation of magnesium chloride as an hexahydrate, for example after sodium and potassium chloride removal.

8- Magnesium chloride hexahydrate is then calcined (either through a rotary kiln, fluid bed, etc.) and hydrochloric acid at very high concentration is thus regenerated and brought back to the leaching step.

9- Other Me-Cl undergo a standard pyrohydrolysis step where mixed oxides (Me-O) can be produced and hydrochloric acid at the azeotropic point (20.2% wt.) is regenerated.

[00177] NaCl can undergo chemical reaction with H₂SO₄ to produce Na₂SO₄ and HCl at a concentration at or above azeotropic concentration. Moreover, KCl can undergo chemical reaction with H₂SO₄ to produce K₂SO₄ and HCl having a concentration that is above the azeotropic concentration. Sodium and potassium chloride brine solution can be the feed material to adapted small chlor-alkali electrolysis cells. In this latter case, common bases (NaOH and KOH) and bleach (NaOCl and KOCl) are produced as well as HCl.

[00178] For example, the liquid can be concentrated to a concentrated liquid having an iron chloride concentration of at least 30% by weight; and then the iron chloride can be hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least 65% by weight, to generate a composition comprising a liquid and precipitated hematite, and recovering the hematite.

[00179] For example, the liquid can be concentrated to a concentrated liquid having an iron chloride concentration of at least 30% by weight; and then the iron chloride can be hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least 65% by weight, to generate a composition comprising a liquid and precipitated hematite; recovering the hematite; and recovering rare earth elements and/or rare metals from the liquid. For example, the processes can further comprise,

after recovery of the rare earth elements and/or rare metals, reacting the liquid with HCl so as to cause precipitation of $MgCl_2$, and recovering same.

[00180] However, the person skilled in the art will understand that the continuous processes can handle high percentages of silica (>55%) and impurities as well as relatively low percentages of aluminum (for example as low as about 15%) and still being economically and technically viable. Satisfactory yields can be obtained (>93-95%) on Al_2O_3 and greater than 75%, 85 or 90 % on rare earth elements and/or rare metals. No pre-thermal treatment in most cases are required. The processes disclosed in the present disclosure involve special techniques on leaching and acid recovery at very high strength, thereby offering several advantages over alkaline processes.

[00181] In step 1 the mineral, whether or not thermally treated is crushed, milled, dried and classified to have an average particle size of about 50 to about 80 μm .

[00182] In step 2, the milled raw material is introduced into the reactor and will undergo the leaching phase.

[00183] The leaching hydrochloric acid used in step 2 can be a recycled or regenerated acid from steps 5, 6, 8, 9, 10 and 11 (see Fig. 3) its concentration can vary from 15% to 45% weight percent. Higher concentration can be obtained using membrane separation, cryogenic and/or high pressure approach. The acid leaching can be carried out under pressure and at temperature close to its boiling point thus, allowing a minimal digestion time and extended reaction extent (90%-100%). Leaching (step 2) can be accomplished in a semi-continuous mode where spent acid with residual free hydrochloric acid is replaced, following pressurization, by highly concentrated acid at a certain stage of the reaction or allowing a reduced acid/mineral ratio, thereby reducing reaction time and improving reaction kinetics. For example, kinetic constant k can be : 0.5 – 0.75 g/mole.L, or 0.65-0.82 g/mole.L.

[00184] As previously indicated, alkali metals, iron, magnesium, sodium, calcium, potassium, rare earth elements and other elements will also be in a chloride form at different stages. Silica and optionally titanium can remain

undissolved and will undergo (step 3) a liquid/solid separation and cleaning stage. The processes of the present disclosure tend to recover maximum amount of free hydrochloric acid left and chlorides in solution in order to maximize hydrochloric acid recovery yield, using techniques such as rake classifying, filtration with band filters, centrifugation, and others. Pure SiO₂ (one additional leaching stage) cleaning with nano water purity 99% min. Mother liquor free of silica is then named as spent acid (various metal chlorides and water) and goes to the crystallization step (step 4).

[00185] In step 4, the spent acid (or leachate) with a substantial amount of aluminum chloride is then saturated with dry and highly concentrated gaseous hydrogen chloride obtained or recycled from step 5 or with aqueous HCl > 30% wt., which results in the precipitate of aluminum chloride hexahydrate (AlCl₃•6H₂O). The precipitate retained is then washed and filtered or centrifuged before being fed to the calcination stage (step 5). The remaining of the spent acid from step 4 is then processed to acid recovery system (steps 6 to 8) where pure secondary products will be obtained.

[00186] In step 5, aluminum oxide (alumina) is directly obtained from high temperature conditions. The highly concentrated hydrogen chloride in gaseous form obtained can be fed to steps 4 and 7 for crystallization where it can be treated through hydrophobic membranes. The excess hydrogen chloride is absorbed and used as regenerated acid to the leaching step 2 as highly concentrated acid, higher than the concentration at the azeotropic point (>20.2%). For example, such a concentration can be about 18 to about 45 weight %, about 25 to about 45 weight % or between 25 and 36 weight %. Acid can also be redirected in gas phase directly (> 30 wt %) to acid purification.

[00187] After step 4, various chlorides derivatives (mainly iron with magnesium and rare earth elements and rare metals) are next subjected to an iron extraction step. Such a step can be carried out for example by using the technology disclosed in WO 2009/153321, which is hereby incorporated by

reference in its entirety. Moreover, hematite can be seeded for crystal growth. For example, hematite seeding can comprise recirculating the seeding.

[00188] In step 6, a hydrolysis at low temperature (155-350°C) is carried out and pure Fe₂O₃ (hematite) is being produced and hydrochloric acid of at least 15% concentration is being regenerated. The method as described in WO 2009/153321 is processing the solution of ferrous chloride and ferric chloride, possible mixtures thereof, and free hydrochloric acid through a series of steps pre-concentration step, oxidation step where ferrous chloride is oxidized into ferric form, and finally through an hydrolysis step into an operational unit called hydrolyser where the ferric chloride concentration is maintained at 65 weight % to generate a rich gas stream where concentration ensures a hydrogen chloride concentration of 15-20.2% and a pure hematite that will undergo a physical separation step. Latent heat of condensation is recovered to the pre-concentration and used as the heating input with excess heat from the calcination stage (step 5).

[00189] The mother liquor from the hydrolyser (step 6) can be recirculated partially to first step crystallization process where an increase in concentration of non-hydrolysable elements is observed. After iron removal, the liquor is rich in other non-hydrolysable elements and mainly comprises magnesium chloride or possible mixture of other elements (various chlorides) and rare earth elements and rare metals.

[00190] Rare earth elements and rare metals in form of chlorides are highly concentrated in percentage into the hydrolyser operational unit (step 6) and are extracted from the mother liquor (step 10) where various known techniques can be employed to extract a series of individual RE-O (rare earth oxides). Among others, the processes of the present disclosure allows to concentrate to high concentration the following elements, within the hydrolyser: scandium (Sc), gallium (Ga), yttrium (Y), dysperosium (Dy), cerium (Ce), praseodymium (Pr), neodymium (Nd), europium (Eu), lanthanum (La), samarium (Sm), gadolinium, (Gd), erbium (Er), zirconium (Zr) and mixtures of thereof. Technologies that can be used for extracting rare earth elements

and/or rare metals can be found, for example, in Zhou et al. in RARE METALS, Vol. 27, No. 3, 2008, p223-227, and in US 2004/0042945, hereby incorporated by reference in their entirety. The person skilled in the art will also understand that various other processes normally used for extracting rare earth elements and/or rare metals from the Bayer process can also be used. For example, various solvent extraction techniques can be used. For certain elements, a technique involving octylphenyl acid phosphate (OPAP) and toluene can be used. HCl can be used as a stripping agent. This can be effective for recovering Ce_2O_3 , Sc_2O_3 , Er_2O_3 etc. For example, different sequence using oxalic acid and metallic iron for ferric chloride separation can be used.

[00191] The spent acid liquor from steps 6 and 10 rich in value added metals, mainly magnesium, is processed to step 7. The solution is saturated with dry and highly concentrated gaseous hydrogen chloride from step 5, which results in the precipitation of magnesium chloride hexahydrate. For example, same can be accomplished with HCl in aqueous form over 30% wt. The precipitate retained, is fed to a calcination stage step 8 where pure MgO (>98% wt.) is obtained and highly concentrated hydrochloric acid (for example of at least 38 %) is regenerated and diverted to the leaching step (step 2). An alternative route for step 7 is using dry gaseous hydrochloric acid from step 8.

[00192] In step 9, metal chlorides unconverted are processed to a pyrohydrolysis step (700-900°C) to generate mixed oxides and where hydrochloric acid from 15-20.2% wt. concentration can be recovered.

[00193] According to another example as shown in Fig. 3, the processes can be similar to the example shown in Fig. 1 but can comprise some variants as below discussed.

[00194] In fact, as shown in Fig. 3, the processes can comprise (after step 6 or just before step 10) an internal recirculation back to the crystallization step 4. In such a case. The mother liquor from the hydrolyser (step 6) can be recirculated fully or partially to the crystallization of step 4 where a

concentration increase will occur with respect to the non-hydrolysable elements including rare earth elements and/or rare metals.

[00195] Such a step can be useful for significantly increasing the concentration of rare earth elements and/or rare metals, thereby facilitating their extraction in step 10.

[00196] With respect to step 7, the solution rich in magnesium chloride and other non-hydrolysable products at low temperature is, as previously discussed, then brought up in concentration with dry and highly concentrated gaseous hydrogen chloride by sparging it into a crystallizer. This can result into the precipitation of magnesium chloride as an hexahydrate (for example after sodium and potassium chloride removal). This can also be accomplished with HCl in aqueous form.

[00197] As shown in Fig. 3, an extra step 11 can be added. Sodium chloride can undergo a chemical reaction with sulfuric acid so as to obtain sodium sulfate and regenerate hydrochloric acid at a concentration at or above the azeotropic point. Potassium chloride can undergo a chemical reaction with sulfuric acid so as to obtain potassium sulfate and regenerate hydrochloric acid at a concentration above the azeotropic concentration. Sodium and potassium chloride brine solution can be the feed material to adapted small chlor-alkali electrolysis cells. In this latter case, common bases (NaOH and KOH) and bleach (NaOCl and KOCl) are produced and can be reused to some extent in other areas of the processes of the present disclosure (scrubber, etc.).

[00198] The following are non-limitative examples.

Example 1

Preparation of alumina and various other products

[00199] As a starting material a sample of clay was obtained from the Grande Vallée area in Québec, Canada.

[00200] These results represent an average of 80 tests carried out from samples of about 900 kg each.

[00201] Crude clay in the freshly mined state after grinding and classification had the following composition:

Al_2O_3 : 15% - 26%;

SiO_2 : 45% - 50%;

Fe_2O_3 : 8% - 9%;

MgO : 1% – 2%;

Rare earth elements and/or rare metals : 0.04% - 0.07%;

LOI : 5% - 10%.

[00202] This material is thereafter leached in a two-stage procedure at 140-170 °C with 18-32 weight % HCl. The HCl solution was used in a stoichiometric excess of 10-20% based on the stoichiometric quantity required for the removal of the acid leachable constituents of the clay. In the first leaching stage of the semi-continuous operation (step 2), the clay was contacted for 2.5 hours with required amount or certain proportion of the total amount of hydrochloric acid. After removal of the spent acid, the clay was contacted again with a minimum 18 weight % hydrochloric acid solution for about 1.5 hour at same temperature and pressure.

[00203] A typical extraction curve obtained for both iron and aluminum for a single stage leaching is shown in Fig. 2.

[00204] The leachate was filtered and the solid was washed with water and analyzed using conventional analysis techniques (see step 3 of Fig. 1). Purity of obtained silica was of 95.4% and it was free of any chlorides and of HCl.

[00205] In another example, the purity of the silica was 99.67 % through an extra leaching step.

[00206] After the leaching and silica removal, the concentration of the various metal chlorides was :

AlCl_3 : 15-20%;

FeCl_2 : 4-6%;

FeCl_3 : 0.5-2.0%;

MgCl_2 : 0.5-2.0 %;

REE-Cl : 0.1 – 2 %

Free HCl : 5-50 g/l

[00207] Spent acid was then crystallized using about 90 to about 98% pure dry hydrochloric acid in gas phase in two stages with less than 25 ppm iron in the aluminum chloride hexahydrate formed. The concentration of HCl in solution (aqueous phase) was about 22 to about 32% or 25 to about 32 %, allowing 95.3 % of Al_2O_3 recovery. The recovered crystallized material (hydrate form of AlCl_3 having a minimum purity of 99.8 %) was then calcined at 930°C or 1250°C, thus obtaining the α form of the alumina. Heating at 930°C allows for obtaining the beta-form of alumina while heating at 1250°C allows for obtaining the alpha-form.

[00208] Another example was carried out at low temperature (decomposition and calcination at about 350 °C) and the α form of the alumina was less than 2 %.

[00209] HCl concentration in gas phase exiting the calcination stage was having a concentration greater than 30% and was used (recycled) for crystallization of the AlCl_3 and MgCl_2 . Excess of hydrochloric acid is absorbed at the required and targeted concentration for the leaching steps.

[00210] Iron chloride (about 90 to about 99.5 %% in ferric form) is then sent to a hydrothermal process in view of its extraction as pure hematite (Fe_2O_3). This can be done by using the technology described in WO 2009/153321 of

low temperature hydrolysis with full heat recovery from calcining, pyrohydrolysis and leaching stage.

[00211] Rare earth elements and rare metals are extracted from the mother liquor of the hydrolyzer where silica, aluminum, iron and a great portion of water have been removed and following preconcentration from hydrolyser to crystallization. It was measured that rare earth elements can be concentrated by a factor of about 4.0 to 10.0 on average within the hydrolyzer itself on a single pass through it i.e. without concentration loop. The following concentration factors have been noted within the hydrolyzer (single pass):

Ce > 6

La > 9

Nd > 7

Y > 9

[00212] Remaining magnesium chloride is sparged with dry and highly concentrated hydrochloric acid and then calcinated to MgO while recovering high concentration acid (for example up to 38.4%).

[00213] Mixed oxides (Me-O) containing other non-hydrolysable components were then undergoing a pyrohydrolysis reaction at 700-800°C and recovered acid (15-20.2% wt.) was rerouted for example to the leaching system.

Overall yields obtained:

Al₂O₃ : 93.0-95.03% recovery;

Fe₂O₃ : 92.65-99.5% recovery;

Rare earth elements : 95% minimum recovery (mixture);

MgO : 92.64-98.00% recovery;

Material discarded : 0-5% maximum;

HCl global recovery : 99.75% minimum;

HCl strength as feed to leaching 15-32% (aqueous); 95 % (gas)

Red mud production : none.

Example 2

Preparation of alumina and various other products

[00214] A similar feed material (bauxite instead of clay) was processed as per in example 1 up to the leaching stage and revealed to be easily leachable under the conditions established in example 1. It provided an extraction percentage of 100% for the iron and over 90-95% for aluminum. The technology was found to be economically viable and no harmful by-products (red mud) were generated. Samples tested had various concentrations of Al_2O_3 (up to 51%), Fe_2O_3 (up to 27%) and MgO (up to 1.5%). Gallium extraction of 97.0 % was measured. Scandium extraction was 95 %.

Example 3

HCl gas enrichment and purification: H_2SO_4 route

[00215] H_2SO_4 can be used for carrying out purification of HCl. It can be carried out by using a packing column with H_2SO_4 flowing counter currently (see Fig. 4). This allows for converting the recovered HCl into HCl having a concentration above the azeotropic point (20.1% wt) and increase its concentration by about 60 to about 70% at minimum.

[00216] Water is absorbed by H_2SO_4 and then H_2SO_4 regeneration is applied where H_2SO_4 is brought back to a concentration of about 95 to about 98% wt. Water release at this stage free of sulphur is recycled back and used for crystallization dissolution, etc. Packing of the column can comprise polypropylene or polytrimethylene terephthalate (PTT).

[00217] Combustion energy can be performed with off gas preheating air and oxygen enrichment. Oxygen enrichment: +2% represents flame temperature increase by: 400°C maximum.

Example 4

HCl gas enrichment and purification: calcium chloride to calcium chloride hexahydrate (absorption / desorption process)

[00218] As shown in Fig. 5, CaCl_2 can be used for drying HCl. In fact, CaCl_2 can be used for absorbing water contained into HCl. In such a case, CaCl_2 is converted into its hexachloride form ($\text{CaCl}_2 \cdot 6\text{H}_2\text{O}$) and one saturated system is eventually switched into regeneration mode where hot air recovered from calcination off gas of alumina and magnesium oxide spray roasting is introduced to regenerate the fixed bed. Alternatively, other absorbing agent such as LiCl can be used instead of CaCl_2 . Such an ion / exchange type process can be seen in Fig. 4 and the cycle can be inversed to switch from one column to another one.

[00219] The person skilled in the art would understand that the processes described in examples 3 and 4 can be used in various different manners. For example, these processes can be combined with the various processes presented in the present disclosure. For example, such purifications techniques can be integrated to the processes shown in Figs. 1, 3 or 6. For example, these techniques can be used downstream of at least one of step chosen from steps 5, 6, 8, 9, 10 and 11 (see Figs. 1 and 3). They can also be used downstream of step 4 and/or step 7. They can also be used downstream of at least one of step chosen from steps 104 to 111 (see Fig. 6)

Example 5**Preparation of alumina and various other products**

[00220] This example was carried out by using a process as represented in Figs. 6 and 7. It should be noted that the processes represented in Figs. 6 and 7 differ only by the fact that Fig. 7 show two additional stages i.e. stages 112 and 113.

Raw material preparation

[00221] Raw material, clay for example, was processed in a secondary crusher in the clay preparation plant 101. Dry milling and classifying occurs on a dry basis in vertical roller mills (for example Fuller-Loesche LM 30.41). The

clay preparation 101 included three roller mills; two running at a capacity of approximately 160-180 tph and one on standby. Raw material, if required, can be reduced to 85% less than 63 microns. Processed material was then stored in homogenization silos before being fed to the acid leaching plant 102. Below in Table 1 are shown results obtained during stage 101. If the ore contains the fluorine element, a special treatment can be applied before carrying out the 102 stage. In presence of hydrochloric acid, fluorine can produce hydrofluoric acid. This acid is extremely corrosive and damaging for human health. Thus, before leaching 102, an optional treatment fluorine separation 112 can be done. Stage 112 can comprise treating the processed material coming from stage 101 with an acid in a pre-leaching treatment so as to remove hydrofluoric acid. Therefore, depending on the composition of the raw material, a fluorine separation stage 112 (or pre-leaching stage 112) can be carried out.

Table 1.

Clay preparation		
Rate	290 tph	
Composition feed (main constituents)	SiO ₂ :	50.9%
	Al ₂ O ₃ :	24.0%
	Fe ₂ O ₃ :	8.51%
	CaO:	0.48%
	MgO:	1.33%
	Na ₂ O:	1.06%
	K ₂ O:	2.86%
	MnO:	0.16%
	Cr ₂ O ₃ :	0.01%
	TiO ₂ :	0.85%
	P ₂ O ₅ :	0.145%
	SrO:	0.015%
	BaO:	0.05%
	V ₂ O ₅	0.0321%
Other (including H ₂ O and REE):		9.63%
Obtained particle size	85% < 63 µm	
Residual moisture	0.5-0.7%	

Clay preparation	
Yield	99.5% min

Acid Leaching

[00222] Next, acid leaching 102 was performed semi-continuously in an 80 m³ glass-lined reactor. Semi-continuous mode comprises replacing reacted acid 1/3 in the reaction period with higher concentration regenerated acid, which greatly improves reaction kinetics. The reactor arrangement comprises for example, a series of three reactors.

[00223] Leaching was performed at high temperature and pressure (about 160 to about 195°C and pressures of about 5 to about 8 barg) for a fixed period of time. Reaction time was a function of the reaction extent targeted (98% for Al₂O₃), leaching mode, acid strength, and temperature/pressure applied.

[00224] Spent acid recovered out of the acid leaching 102 was then filtered 103 from unreacted silica and titanium dioxide and washed through an automated filter press where all free HCl and chloride are recovered. This allows, for example, a maximum quantity of about 30 ppm SiO₂ going into spent liquor. Cleaned silica at a concentration of ≈96 % + SiO₂ is then produced. Various options are possible at that point. For example, the 96% silica can undergo final neutralization through caustic bath, cleaning, and then bricketing before storage. According to another example, the silica purified by adding another leaching step followed by a solid separation step that ensures TiO₂ removal (see stage 113 in Fig. 7). In that specific case, high purity silica 99.5%+ is produced. In stage 113, titanium and silicium can be separated from one another in various manners. For example, the solid obtained from stage 103 can be leached in the presence of MgCl₂ at a temperature below 90 or 80 °C and at low acid concentration. For example, acid concentration can be below 25 or 20 %. The acid can be HCl or H₂SO₄. In such a case, titanium remains soluble after such a leaching while titanium is still in a solid form. These solid and liquid obtained after stage 113 are thus separated to provide

eventually TiO_2 and SiO_2 . Water input and flow for silica cleaning is in a ratio of 1:1 (silica/water) (150 t/h SiO_2 / 150 t/h H_2O), but comprises of wash water circulation in closed loop in the process and limited amount of process water for final cleaning of the silica and recovery of all chlorides and free HCl generated at the leaching stage. Below in Table 2 are shown results obtained during stage 102.

Table 2.

Acid Leaching		
Equivalent solid feed rate	259.6 tph	
Operation mode	Semi-continuous	
Acid to clay ratio	3.10 @ 23% wt (Equivalent to 3.35 with semi-continuous at 18.0 % wt)	
Regenerated acid concentration	18.0-32.0%	
Operating temperature	150-155°C (Pilot) 165-200°C (Plant)	
MAWP	120 psig	
Typical chemical reactions	$Fe_2O_3 + 6 HCl \rightarrow 2 FeCl_3 + 3 H_2O$	
	$Al_2O_3 + 6 HCl \rightarrow 2 AlCl_3 + 3 H_2O$	
	$MgO + 2 HCl \rightarrow MgCl_2 + H_2O$	
	$K_2O + 2 HCl \rightarrow 2 KCl + H_2O$	
	$Re_2O_3 + 6 HCl \rightarrow 2 ReCl_3 + 3 H_2O$	
Spent acid flow to crystallization	600-1100 m ³ /h	
Practical chemical composition after step 102 without solid (SiO_2)	$FeCl_3$	4.33%
	$FeCl_2$	0.19%
	$AlCl_3$	16.6%
	$MgCl_2$	0.82%
	$NaCl$	1.1%
	KCl	1.2%
	$CaCl_2$	0.26%
Extraction yields	Iron	100%
	Al_2O_3	98%
SiO_2 Recovery	99.997%	

AlCl₃ Crystallization

[00225] Spent acid, with an aluminum chloride content of about 20 to about 30 %, was then processed in the crystallization stage 104. Dry and highly concentrated HCl (> 90% wt.) in gas phase was sparged in a two-stage crystallization reactor, which allows the crystallization of aluminum chloride hexahydrate.

[00226] The flow rate of acid through these reactors is about 600 to about 675 m³/h and the reactor was maintained at about 50 to about 60°C during this highly exothermic reaction. Heat was recovered and exchanged to the acid purification 107 part of the plant thus ensuring proper heat transfer and minimizing heat consumption of the plant. Aluminum chloride solubility decreases rapidly, compared to other elements, with the increase in concentration of free HCl in the crystallization reactor. The concentration of AlCl₃ for precipitation/crystallization was about 30%

[00227] The HCl concentration during crystallization was thus about 30 to about 32 % wt.

[00228] The aqueous solution from the crystallization stage 104 was then submitted to the hydrothermal acid recovery plant 105, while the crystals are processed through the decomposition/calcination stage in the calcination plant 106.

[00229] A one-step crystallization stage or a multi-step crystallization stage can be done. For example, a two-steps crystallization stage can be carried out.

[00230] Below in Tables 3A and 3B are shown results obtained during stage 104.

Table 3A.

Aluminum chloride crystallization	
Number of crystallization steps	2
Operating temperature	50-60°C
Sparging HCl concentration	90% (gaseous)
Typical chemicals formed	$\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ (s) Metal chlorides (aq)
$\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$ residual	< 5% (practical); 8%

Table 3B.

Typical crystals composition main constituents obtained at pilot scale and feeding calcination

Component	Weight distribution (%)
$\text{AlCl}_3 \cdot 6\text{H}_2\text{O}$	99.978
$\text{BaCl}_2 \cdot 2\text{H}_2\text{O}$	0.0000
$\text{CaCl}_2 \cdot 6\text{H}_2\text{O}$	0.0009
CrCl_4	0.0022
$\text{CuCl}_2 \cdot 2\text{H}_2\text{O}$	0.0000
$\text{FeCl}_3 \cdot 6\text{H}_2\text{O}$	0.0019
KCl	0.0063
$\text{MgCl}_2 \cdot 6\text{H}_2\text{O}$	0.0093
$\text{MnCl}_2 \cdot 4\text{H}_2\text{O}$	0.0011
NaCl	0.0021
SiCl_4	0.0004
$\text{SrCl}_2 \cdot 6\text{H}_2\text{O}$	0.0000
TiCl_4	0.0001
VCl_4	0.0000
Free Cl^-	0.0000

Calcination and hydrothermal acid recovery

[00231] The calcination 106 comprises the use of a two-stage circulating fluid bed (CFB) with preheating systems. The preheating system can comprise a plasma torch to heat up steam to process. It processes crystals in the decomposition/calcination stage. The majority of the hydrochloric acid was released in the first stage which was operated at a temperature of about 350°C, while the second stage performs the calcination itself. Acid from both stages (about 66 to about 68% of the recovered acid from the processes) was

then recovered and sent to either to the acid leaching 102 or to the acid purification 107. In the second reactor, which was operated at a temperature of about 930°C, acid was recovered through the condensation and absorption into two columns using mainly wash water from the acid leaching sector 102. Latent heat from this sector was recovered at the same time as large amounts of water, which limits net water input.

[00232] In the iron oxides productions and acid recovery 105 system, which comprises, aqueous solution from the crystallization 104 first undergoes a pre-concentration stage followed by processing in the hydrolyzer reactor. Here, hematite was produced during low temperature processing (about 165°C). A recirculation loop was then taken from the hydrolyzer and is recirculated to the pre-concentrator, allowing the concentration of REE, Mg, K, and other elements. This recirculation loop, allows rare earth element chlorides and/or rare metal chlorides and various metal chlorides concentration to increase without having these products precipitating with hematite up to a certain extent.

[00233] Depending on acid balance in the plant, recovered acid is sent either directly to the 102 or 107 stage. Table 4 shows results obtained in stage 105.

Table 4.

Hydrothermal acid recovery	
Flowrate from crystallization to HARP	592 m ³ /h (design) 600 m ³ /h (design)
Operating hydrolyser temperature	155-170°C
Regenerated acid concentration	27.4%
Regenerated acid flowrate	205.2 tph HCl
Hematite total production rate	24 TPH (design)
HCl recovery	> 99.8%
Reflux (recirculation loop) rate in between hydrolyzer and pre-concentrator	56 tph
Rare earth element chlorides and/or rare metal chlorides rate in recirculation loop	≈ 12.8 t/h

Hematite quality obtained and/or projected	
Fe ₂ O ₃ purity	> 99.5%
Hydrolysable chlorides	< 0.2%
Moisture	Max 20% after filtration
PSD	25-35 microns
Density (bulk)	2-3 kg/l

Typical chemical reaction in stage 105
2FeCl ₃ + 3H ₂ O → Fe ₂ O ₃ + 6 HCl 155-170°C

[00234] Table 5 shows results obtained in stage 106.

Table 5.

Calcination Plant 106	
Process characteristics:	<ul style="list-style-type: none"> Two-stage circulating fluid bed (CFB) with pre-heating system Two-stage hydrochloric acid regeneration
Production rate (practical)	About 66 tph
CFB feed rate	371 tph

Typical chemical reaction occurring
2(AlCl ₃ · 6 H ₂ O) + Energy → Al ₂ O ₃ + 6 HCl + 9H ₂ O

Typical alumina chemical composition obtained from aluminum chloride hexahydrate crystals being fed to calcination	
Component	Weight distribution (%)
Al ₂ O ₃	99.938
Fe ₂ O ₃	0.0033
SiO ₂	0.0032
Cr ₂ O ₃	0.0063
V ₂ O ₅	0.0077
Na	0.0190
MgO	0.0090
P ₂ O ₅	0.0039

K	0.0053
Ca	0.0020
MnO	0.0002
Free Cl ⁻	Undetectable

Rare earth elements and rare metals extractions

[00235] The stream that was taken out of 105 recirculation then was treated for rare earth elements and rare metals extraction 108, in which the reduction of the remaining iron back to iron 2 (Fe^{2+}), followed by a series of solvent extraction stages, was performed. The reactants were oxalic acid, NaOH, DEHPA (Di-(2-ethylhexyl)phosphoric acid) and TBP (tri-n-butyl phosphate) organic solution, kerosene, and HCl were used to convert rare earth element chlorides and rare metals chlorides to hydroxides. Countercurrent organic solvent with stripping of solution using HCl before proceeding to specific calcination from the rare earth elements and rare metals in form of hydroxide and conversion to high purity individual oxides. An ion exchange technique is also capable of achieving same results as polytrimethylene terephthalate (PET) membrane.

[00236] Iron powder from 105, or scrap metal as FeO, can be used at a rate dependent on Fe^{3+} concentration in the mother liquor. HCl (100% wt) at the rate of 1 tph can be required as the stripped solution in REE Solvent Extraction (SX) separation and re-leaching of rare earth elements and/or rare metals oxalates.

[00237] Water of very high quality, demineralized or nano, at the rate of 100 tph was added to the strip solution and washing of precipitates.

[00238] Oxalic acid as di-hydrate at a rate of 0.2 tph was added and contributes to the rare earth elements and rare metals oxalates precipitation. NaOH or MgOH at a rate of 0.5 tph can be used as a neutralization agent.

[00239] DEHPA SX organic solution at the rate of 500 g/h was used as active reagent in rare earth elements separation while TBP SX organic solution at the rate of 5 kg/h is used as the active reagent for gallium recovery

and yttrium separation. Finally, a kerosene diluent was used at the rate of approximately 2 kg/h in all SX section. Calcination occurs in an electric rotary furnace via indirect heating to convert contents to REE_2O_3 (oxides form) and maintain product purity.

[00240] Results of various tests made regarding stage 108 are shown in Table 6.

One line divided in subsections (5) to isolate the following elements using solvent extraction:

- Ga_2O_3
- Y_2O_3
- Sc_2O_3
- $\text{Eu}_2\text{O}_3 + \text{Er}_2\text{O}_3 + \text{Dy}_2\text{O}_3$
- $\text{Ce}_2\text{O}_3 + \text{Nd}_2\text{O}_3 + \text{Pr}_2\text{O}_3$

Equivalent output earths oxides	166.14 kg/h			
Projected production as per pilot testing results				
Feed	Incoming (kg/h)	Final extraction individual (kg/h)		
Ga_2O_3	15.66	11.98		
Sc_2O_3	9.06	8.11		
Y_2O_3	22.56	20.22		
La_2O_3	32.24	25.67		
Ce_2O_3	61.37	51.82		
Pr_2O_3	8.08	6.18		
Nd_2O_3	30.3	27.24		
Sm_2O_3	5.7	4.51		
Eu_2O_3	1.06	0.95		
Gd_2O_3	4.5	4.06		
Dy_2O_3	3.9	3.55		
Er_2O_3	2.1	1.86		
Total	196.55	166.14		

Global yield : 84.53%

[00241] Alternatively, stage 108 can be carried out as described in PCT/CA2012/000253 and/or PCT/CA2012000419.

[00242] The solution after stages 108 and 109 contained mainly $MgCl_2$, $NaCl$, KCl , $CaCl_2$, $FeCl_2/FeCl_3$, and $AlCl_3$ (traces), and then follows stage 111. Na , K , Ca that follows the MgO can be extracted in stage 110 by crystallization in a specific order; Na first, followed by K , and then Ca . This technique can be employed for example in the Israeli Dead Sea salt processing plant to produce MgO and remove alkali from the raw material.

HCl regeneration

[00243] Alkali (Na , K), once crystallized, was sent and processed in the alkali hydrochloric acid regeneration plant 110 for recovering highly concentrated hydrochloric acid (HCl). The process chosen for the conversion can generate value-added products

[00244] Various options are available to convert $NaCl$ and KCl with intent of recovering HCl. One example can be to contact them with highly concentrated sulfuric acid (H_2SO_4), which generates sodium sulphate (Na_2SO_4) and potassium sulfate (K_2SO_4), respectively, and regenerates HCl at a concentration above 90% wt. Another example, is the use of a sodium and potassium chloride brine solution as the feed material to adapted small chlor-alkali electrolysis cells. In this latter case, common bases ($NaOH$ and KOH) and bleach ($NaOCl$ and $KOCl$) are produced. The electrolysis of both $NaCl$ and KCl brine is done in different cells where the current is adjusted to meet the required chemical reaction. In both cases, it is a two-step process in which the brine is submitted to high current and base ($NaOH$ or KOH) is produced with chlorine (Cl_2) and hydrogen (H_2). H_2 and Cl_2 are then submitted to a common flame where highly concentrated acid in gas (100% wt.) phase is produced and can be used directly in the crystallization stage 104, or to crystallization stages requiring dry highly concentrated acid.

Magnesium oxide

[00245] The reduced flow, which was substantially free of most elements (for example $AlCl_3$, $FeCl_3$, REE-Cl, $NaCl$, KCl) and rich in $MgCl_2$, was then

submitted to the magnesium oxides plant 111. In the MgO, pyrohydrolysis of MgCl₂ and any other leftover impurities were converted into oxide while regenerating acid. The first step was a pre-evaporator/crystallizer stage in which calcium is removed and converted into gypsum (CaSO₄·2H₂O) by a simple chemical reaction with sulfuric acid, for which separation of MgO is required. This increases the capacity of MgO roasting and also energy consumption slightly, while substantially recovering HCl. The next step was the specific pyrohydrolysis of MgO concentrated solution by spray roasting. Two (2) main products were generated; MgO that was further treated and HCl (about 18% wt.), which was either recycled back to the upstream leaching stage 102 or to the hydrochloric acid purification plant (107). The MgO-product derived from the spray roaster can require further washing, purification, and finally calcining depending on the quality targeted. The purification and calcining can comprise a washing-hydration step and standard calcining step.

[00246] The MgO from the spray roaster is highly chemically active and was directly charged into a water tank where it reacts with water to form magnesium hydroxide, which has poor solubility in water. The remaining traces of chlorides, like MgCl₂, NaCl, dissolved in water. The Mg(OH)₂ suspension, after settling in a thickener, was forwarded to vacuum drum filters, which remove the remaining water. The cleaned Mg(OH)₂ is then forwarded into a calcination reactor where it is exposed to high temperatures in a vertical multi-stage furnace. Water from hydration is released and allows the transformation of the Mg(OH)₂ to MgO and water. At this point, the magnesium oxide was of high purity (> 99%).

HCl purification

[00247] The hydrochloric acid purification stage 107 is effective for purifying HCl regenerated from different sectors (for example 105, 106, 111) and to increase its purity for crystallization, whereas dry highly concentrated acid (> 90% wt.) can be used as the sparging agent. Stage 107 also allowed for controlling the concentration of the acid going back to stage 102 (about 22 to about 32% wt.) and allows total acid and water balance. Total plant water

balance is performed mainly by reusing wash water as absorption medium, as quench agent or as dissolution medium at the crystallization stages

[00248] For example, purification can be carried out by means of a membrane distillation process. The membrane distillation process applied here occurs when two aqueous liquids with different temperatures are separated through a hydrophobic membrane. The driving force of the process was supplied by the partial pressure vapour difference caused by the temperature gradient between these solutions. Vapour travels from the warm to the cold side. Without wishing to be bound to such a theory, the separation mechanism was based on the vapour/liquid equilibrium of the HCl/water liquid mixture. Practical application of such a technology has been applied to HCl/water, H₂SO₄/water systems and also on large commercial scales on aqueous solution of sodium chloride with the purpose of obtaining potable water from seawater and nano water production. Therefore membrane distillation was a separation process based on evaporation through a porous hydrophobic membrane. The process was performed at about 60°C and was effective to recover heat from the 104 and 102 stage with an internal water circulation loop, in order to maintain a constant incoming temperature to the membranes. For example, eight membranes of 300,000 m² equivalent surface area can be used per membrane to obtain a concentration of HCl well above the azeotropic point (i.e. > 36%) of the ≈ 750 m³/h and final 90% concentration is then obtained through pressure distillation (rectification column).

[00249] Purification of HCl by processing thus regenerated acid through hydrophobic membrane and separating water from HCl; therefore increasing HCl concentration up to about 36% (above azeotropic point) and therefore allowing with a single stage of rectification through a pressure stripping column to obtain >90% in gaseous phase, for crystallization stage (sparging); and therefore controlling acid concentration into crystallization stages up to 30-35 %_(aq).

[00250] As indicated stage 107 was operated at about 60°C and heat input provided by heat recovery from stages 102 to 110. Rectification column was

operated at about 140°C in the reboiler part. Net energy requirement was neutral (negative in fact at -3.5 Gj/t Al₂O₃) since both systems were in equilibrium and in balance.

[00251] For example, the acid purification can be carried out by using adsorption technology over an activated alumina bed. In continuous mode, at least two adsorption columns are required to achieve either adsorption in one of them and regeneration in the other one. Regeneration can be performed by feeding in counter-current a hot or depressurized gas. This technology will result in a purified gas at 100% wt.

[00252] For example, the acid purification can be made by using calcium chloride as entrainer of water. A lean hydrochloric acid solution is contacted with a strong calcium chloride solution through a column. The water is then removed from the hydrochloric acid solution and 99.9% gaseous HCl comes out of the process. Cooling water and cryogenic coolant is used to condense water traces in the HCl. The weak CaCl₂ solution is concentrated by an evaporator that ensures the recuperation of calcium chloride. Depending on the impurities in the incoming HCl solution feed to the column, some metals can contaminate the calcium chloride concentrated solution. A precipitation with Ca(OH)₂ and a filtration allows the removal of those impurities. The column can operate for example at 0.5 barg. This technology can allow for the recuperation of 98% of the HCl.

[00253] Table 7 shows the results obtained concerning the process shown in Fig. 6.

Composition (% wt)	Stage 101 Yield (%)	Stage 102 Yield (%)	Stage 106 Yield (%)	Stage 105 Yield (%)	MgO tpy	Yield (%)	TOTAL PRODUCED	
							Stage 107 Yield (%)	Stage 108 Yield (%)
Main constituents								
SiO ₂	--	99.997%	--	--	--	--	--	99.997%
Al	--	98.02%	95.03%	--	--	--	--	95.03%
Fe	--	100.00%	--	92.65%	--	--	--	92.65%
Mg	--	99.998%	--	--	29.756	92.64%	--	92.64%
Ca	--	99.998%	--	--	--	--	--	98.28%
Na	--	99.998%	--	--	--	--	--	97.76%
K	--	100.00%	--	--	--	--	--	93.97%
Others incl. H ₂ O	--	--	--	--	--	--	--	--
RE/M	--	99.98%	--	92.32%	--	--	84.67%	84.67%
By-Products								
NaOH	--	--	--	--	68.556	--	--	--
NaOCl	--	--	--	--	9.269	--	--	--
KOH	--	--	--	--	73.211	--	--	--
KOCl	--	--	--	--	9.586	--	--	--
CaSO ₄	--	--	--	--	46.837	--	--	--
Reactants								
H ₂ SO ₄ (*)	--	--	--	--	19.204	--	--	--
Fresh HCl M-up	--	--	--	--	--	9.75%	--	99.75%
Total	--	98.55%	--	95.03%	256.419	92.64%	99.75%	84.67%

[00254] Tables 8 to 26 show results obtained concerning the products made in accordance with the process shown in Fig. 6 in comparison with standard of the industry.

Table 8.

Chemical composition of obtained alumina		
Element	% Weight	Standard used in industry
Al ₂ O ₃	99.938	98.35 min
Fe ₂ O ₃	0.0033	0.0100
SiO ₂	0.0032	0.0150
TiO ₂	0.0003	0.0030
V ₂ O ₅	0.0008	0.0020
ZnO	0.0005	0.0030
Cr ₂ O ₃	0.0003	N/A
MgO	0.0090	N/A
MnO	0.0002	N/A
P ₂ O ₅	0.0039	0.0010
Cu	0.0030	N/A
Ca	0.0020	0.0030
Na	0.0190	0.4000
K	0.0053	0.0150
Li	0.0009	N/A
Ba	< 0.00001	0.0000
Th	< 0.000001	0.0000
U	< 0.000001	0.0000
Free Cl ⁻	Not detectable	0.0000
LOI	< 1.0000	< 1.0000

Table 9.

Physical properties of obtained alumina		
Property	Orbite Alumina	Standard used in industry
PSD < 20 μm	5-10%	N/A
PSD < 45 μm	10-12%	< 10%
PSD > 75 μm	50-60%	N/A
SSA (m ² /g)	60-85	60-80
Att. Index	10-12%	< 10%
α Al ₂ O ₃	2-5%	< 7-9%

Table 10.

Chemical composition of obtained hematite	
Element	% Weight
Fe ₂ O ₃	> 99.5%
Hydrolysable elements	< 0.2%

Table 11.

Physical properties of obtained hematite*	
Property	Orbite hematite
PSD _{mean}	25-35 μm
Density (bulk)	2000-3000 kg/m ³
Humidity after filtration	< 10%

* Material can be produced as bricks

Table 12.

Chemical composition of obtained silica	
Element	% Weight
SiO ₂	> 99.7
Al ₂ O ₃	< 0.25%
MgO	≈ 0.1%
Fe ₂ O ₃	≈ 0.1%
CaO	≈ 0.01%
Na ₂ O	< 0.1%
K ₂ O	< 0.1%

Note: Product may have unbleached cellulose fiber filter aid. Cellulose wood flour.

Table 13.

Physical properties of obtained silica	
Property	Orbite silica
PSD _{mean}	10-20 µm
Specific surface area	34 m ² /g
Density (bulk)	2000-2500 kg/m ³
Humidity after filtration	< 40%

Table 14.

Purity of obtained rare earth element oxides	
Element	Purity (%)
Ga ₂ O ₃	
Sc ₂ O ₃	
Y ₂ O ₃	
La ₂ O ₃	
Ce ₂ O ₃	
Pr ₂ O ₃	
Nd ₂ O ₃	
Sm ₂ O ₃	
Eu ₂ O ₃	
Gd ₂ O ₃	
Dy ₂ O ₃	
Er ₂ O ₃	

Physical properties of obtained REE-O/RM-O	
Property	Orbite REE-O/RM-O
PSD _{mean}	2-30 µm
Density	5500-13000 kg/m ³
LOI	< 1%

Table 15.

Chemical composition of obtained MgO		
Element	Typical	Specification
MgO	99.0 ⁺	98.35 min
CaO	0.0020	0.83
SiO ₂	0.0000	0.20 max
B ₂ O ₃	0.0000	0.02 max
Al ₂ O ₃	0.0300	0.12 max
Fe ₂ O ₃	0.0160	0.57 max
MnO ₂	< 0.14	0.14 max
LOI	0.7%	< 1%

Table 16.

Physical properties of obtained MgO	
Property	Orbite MgO
PSD _{mean}	10 µm
Density	N/A
LOI	650 kg/m ³

Table 17.

Chemical composition of obtained NaOH	
Element	% Weight
Sodium hydroxide	32%
Water	68%

Table 18.

Physical properties of obtained NaOH	
Property	Sodium hydroxide (NaOH)
Physical state	Liquid
Vapour pressure	14 mmHg
Viscosity	> 1
Boiling point	100°C
Melting point	0°C
Specific gravity	1.0

Table 19.

Chemical composition of obtained sodium hypochlorite (bleach)	
Element	% Weight
Sodium hypochlorite	12%
Sodium hydroxide	< 1%
Water	> 80%

Table 20.

Physical properties of obtained NaOCl	
Property	Sodium hypochlorite (NaOCl)
Physical state	Liquid
Vapour pressure	1.6 kPa
Viscosity	N/A
Boiling point	100 °C
Melting point	-3 °C
Specific gravity	1.2

Table 21.

Chemical composition of obtained potassium hydroxide	
Element	% Weight
Potassium hydroxide	32%
Water	68%

Table 22.

Physical properties of obtained potassium hydroxide	
Property	KOH
Physical state	Liquid
Vapour pressure	17.5 mmHg
Viscosity	N/A
Boiling point	100 °C
Melting point	N/A
Specific gravity	1.18

Table 23.

Chemical composition of obtained potassium hypochlorite (KOCl)	
Element	% Weight
Potassium hypochlorite	12%
Potassium hydroxide	< 1%
Water	> 80%

Table 24.

Physical properties of obtained potassium hypochlorite	
Property	KOCl
Physical state	Liquid
Vapour pressure	N/A
Viscosity	N/A
Boiling point	103 °C
Melting point	N/A
Specific gravity	> 1.0

Table 25.

Chemical composition of obtained calcium sulphate dihydrate	
Element	% Weight
Calcium sulphate dihydrate	100%

Table 26.

Physical properties of obtained calcium sulphate dihydrate	
Property	Orbite $\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$
Physical state	Solid
Specific gravity	2.32

[00255] In order to demonstrate the versatility of the processes of the present disclosure, several other tests have been made so as to show that these processes can be applied to various sources of starting material.

Example 6

[00256] Another starting material has been used for preparing acidic compositions comprising various components. In fact, a material that is a concentrate of rare earth elements and rare metals (particularly rich in zirconium) has been tested. Table 27 shows the results of the leaching carried out on such a starting material using a similar process as shown in Figs. 1, 3, 6 and 7 and as detailed in Examples 1, 2 and 5. It can thus be inferred from the results shown in Table 27 that the various components present in the leaching (various metals such as aluminum, iron, magnesium as well as rare earth elements and rare metals) can be extracted from the obtained leaching composition and that they can eventually be isolated by the processes of the present disclosure such as, for example, those presented in Examples 1, 2 and 5.

Example 7

[00257] Other tests have been made in a similar manner as described in Example 6. In the present example, carbonatite has been used as a starting material. (see Table 28 below).

Table 27. Tests made on a zirconium rich material.

Raw material	Composition measured and/or evaluated (% wt.)	Average measured for testing (% wt.)	Extraction rate measured (ALP) (%)	Overall Orbite process recovery (%)
Al ₂ O ₃	6.12	6.12	89.65	86.97
Fe ₂ O ₃	15.80	15.80	99.50	97.51
SiO ₂	36.00	36.00	0.000	99.997
MgO	3.08	3.08	99.75	92.66
Na ₂ O	1.13	1.13	99.50	99.50
K ₂ O	2.12	2.12	99.50	99.50
CaO	6.10	6.10	99.50	99.00
S total	0.22	0.22		100.00
F	1.98	1.98	99.50	99.00
TiO ₂	0.13	0.13	0.000	99.03
V ₂ O ₅	0.00	0.00	98.00	96.04
P ₂ O ₅	1.10	1.10	98.00	96.04
MnO	0.43	0.43	98.00	96.04
ZrO ₂	12.43	12.43	22.70	20.43
Cr ₂ O ₃	0.00	0.00	0.00	0.00
Ce ₂ O ₃	3.05	3.045	97.31	92.98
La ₂ O ₃	1.34	1.337	99.55	92.68
Nd ₂ O ₃	1.55	1.551	98.40	94.79
Pr ₂ O ₃	0.37	0.375	99.75	97.52
Sm ₂ O ₃	0.15	0.151	88.75	84.80
Dy ₂ O ₃	0.09	0.089	80.35	76.77
Er ₂ O ₃	0.03	0.030	72.60	69.37
Eu ₂ O ₃	0.03	0.027	85.57	81.76
Gd ₂ O ₃	0.21	0.205	82.85	79.16
Ho ₂ O ₃	0.01	0.013	77.10	73.67
Lu ₂ O ₃	0.00	0.003	60.15	57.47
Tb ₂ O ₃	0.02	0.022	78.05	74.58
Th	0.02	0.022	88.10	84.18
Tm ₂ O ₃	0.00	0.004	66.85	63.88
U	0.01	0.014	81.90	78.26
Y ₂ O ₃	0.30	0.300	72.70	69.46
Yb ₂ O ₃	0.02	0.023	62.80	60.01
Ga ₂ O ₃	0.02	0.016	96.90	92.59
Sc ₂ O ₃	0.00	0.003	95.00	90.77
LOI (inc. water)	6.122023973	6.12		

Table 28. Tests made on carbonatite

Raw material	Composition measure and/or evaluated (% wt.)	Average measured for testing (% wt.)	Extraction rate measured (ALP) (%)	0 All Orbite process recovery (%)
Al ₂ O ₃	0.70	0.70	84.31	81.61
Fe ₂ O ₃	11.22	11.22	94.14	92.15
SiO ₂	2.11	2.11	0.00003	99.997
MgO	6.50	6.500	100	96.25
Na ₂ O	0.07	0.07	92.54	90.55
K ₂ O	0.18	0.181	37.33	37.33
CaO	16.51	16.51	100	98.00
TiO ₂	0.00	0.000	0.00000	100.000
V ₂ O ₅	0.00	0.000	0	100.000
P ₂ O ₅	0.00	0.000	0	100.000
MnO	0.00	0.000	0	100.000
ZrO ₂	0.00	0.000	0	100.000
Cr ₂ O ₃	0.00	0.000	0	100.000
Ce ₂ O ₃	1.19	1.195	64.04	61.190
La ₂ O ₃	0.46	0.463	63.86	61.018
Nd ₂ O ₃	0.45	0.448	81.46	77.835
Pr ₂ O ₃	0.14	0.142	67.59	64.582
Sm ₂ O ₃	0.03	0.033	65.32	62.413
Dy ₂ O ₃	0.00	0.000	78.12	74.644
Er ₂ O ₃	0.00	0.000	86.15	82.316
Eu ₂ O ₃	0.01	0.007	66.45	63.493
Gd ₂ O ₃	0.01	0.013	54.46	52.037
Ho ₂ O ₃	0.00	0.000	83.12	79.421
Lu ₂ O ₃	0.00	0.000	88.86	84.906
Tb ₂ O ₃	0.00	0.001	41.42	39.577
Th	0.06	0.065		
Tm ₂ O ₃	0.00	0.000	90.70	86.664
U	0.01	0.007		
Y ₂ O ₃	0.00	0.000	84.68	80.912
Yb ₂ O ₃	0.00	0.000	85.11	81.323
Ga ₂ O ₃	0.00	0.000	0	0.000
Sc ₂ O ₃	0.00	0.000	0	0.000
LOI (inc. water)		60.33		

[00258] It can thus be inferred from the results shown in Table 28 that the various metals, rare earth elements and rare metals extracted present in the obtained leaching composition can eventually be isolated by the processes of the present disclosure such as, for example, those presented in Examples 1, 2 and 5.

Example 8

[00259] Test have been made for using fly ash as starting material. The results are shown below in Tables 29, 30 and 31.

Table 29. Leaching conditions for fly ash

Leaching Operating Conditions				
Pressure	Temperature	Processing Time	Acid Ratio	Reactor Volume
75-80 psi	150-165 °C	420 minutes	Stoichiometry + 30%	16 gallons

Table 30. Fly ash used

Fly Ash	
Masse In	2600
Masse Out	302
% H ₂ O	30%

Table 31. Results – leaching of fly ash

Recovery Yield %							* 0% MgO initially
		Al	K	Na	Fe	Ca	
Initial compound	% kg	8.02 208.52	1.21 31.46	0.42 10.92	8.27 215.02	1.65 42.9	13.9 361.4
Cake	% kg	9.15 19.3431	1.15 2.4311	0.26 0.54964	1.75 3.6995	0.3 0.6342	36.9 78.0066
	% recovery	90.72%	92.27%	94.97%	98.28%	98.52%	78.42%

[00260] It can thus be seen that fly ash has been successfully leached with HCl, thereby allowing for good yields with respect to the recovery of the various components present in Fly ash. These various products or components present in the obtained leachate can thus be all isolated and eventually transformed as previously indicated in the processes of the present disclosure. The obtained leachate can then be treated as described in the processes of the present disclosure. The leaching of example 8 can be considered, for example, as the leaching 2 of Fig. 1 or Fig. 3; the leaching 102 of Fig. 6 or Fig. 7, etc.. For example, the leachate obtained in Example 8 can then be treated as shown in Figs. 1, 3, 6 and 7.

Example 9

[00261] Other tests have been made for using another alternative source of fly ash. A similar process was used. The initial measured conditions were:

Table 32. Fly Ash initial composition

Element	Composition measured (% wt)
SiO ₂	29.73
Al ₂ O ₃	15.15
Fe ₂ O ₃	11.82
CaO	2.31
Na ₂ O	0.57
K ₂ O	1.46

[00262] The samples were leached in batch mode at 75 psig (150°C) for a 6 hours duration at stoichiometry +5% excess HCl (20% wt).

The following extraction yields were measured at the leaching stage :

Table 33. Leaching extraction yield measured

Raw element	Extraction measured (% wt)
Al ₂ O ₃	96.1
Fe ₂ O ₃	98.5
N	95.7
Na ₂ O	
K ₂ O	93.4
CaO	98.7

[00263] After processing through main steps of process (see for example Figure 6), the following yields were measured.

Table 34. Global recovery yield

Element	Global recovery (%wt)
Al ₂ O ₃	93.4
Fe ₂ O ₃	96.5
SiO ₂	99.99
Na ₂ O	93.7
K ₂ O	93.4
CaO	96.8

Main characteristics of produced alumina were:

- Chemical composition: 99.4%;
- PSD dp₅₀: 63 um;
- α Al₂O₃: 2%; and
- Bulk density: 0.63.

Example 10

[00264] Other tests was performed on another alternative source of material always using the same process as per previous examples. The initial composition measured was:

Table 35. Fly Ash initial composition

Element	Composition measured (%t wt)
SiO ₂	44.9
Al ₂ O ₃	22.1
Fe ₂ O ₃	21.0
CaO	4.1
Na ₂ O	0.7
K ₂ O	2.4

[00265] The samples were leached in batch mode at 160°C (80 psig) for a 6 hours duration at stoichiometry +10% HCl excess (20% wt).

The following extraction yields were measured at the leaching stage.

Table 36. Leaching extraction yield measured

Raw element	Extraction measured (% wt)
Al ₂ O ₃	97.6
Fe ₂ O ₃	99.5
Na ₂ O	91.1
K ₂ O	93.3
CaO	94.9

[00266] After processing through main steps of continuous process (see Figure 6) the following yield were measured:

Table 37. Global recovery yield

Element	Global recovery (% wt)
Al ₂ O ₃	94.9
Fe ₂ O ₃	97.5
SiO ₂	99.99
Na ₂ O	89.1
K ₂ O	93.3
CaO	93.0

[00267] The applicants have now discovered fully integrated and continuous processes with substantially total hydrochloric acid recovery for the extraction of alumina and other value added products from various materials that contain aluminum (clay, bauxite, aluminosilicate materials, slag, red mud, fly ash etc.)

containing aluminum. In fact, the processes allows for the production of substantially pure alumina and other value added products purified such as purified silica, pure hematite, pure other minerals (ex: magnesium oxide) and rare earth elements products. In addition, the processes do not require thermal pre-treatment before the acid leach operation. Acid leach can be carried out using semi-continuous techniques with high pressure and temperature conditions and very high regenerated hydrochloric acid concentration. The processes can also be carried out at atmospheric pressure. In addition, the processes do not substantially generate any residues not sellable, thus eliminating harmful residues to environment like in the case of alkaline processes.

[00268] The advantage of the high temperature calcination stage, in addition for allowing to control the α -form of alumina required, can be effective for providing a concentration of hydrochloric acid in the aqueous form (>38%) that is higher than the concentration of HCl at the azeotropic point and thus providing a higher incoming HCl concentration to the leaching stage. The calcination stage hydrochloric acid network can be interconnected to two (2) crystallization systems and by pressure regulation excess HCl can be being absorbed at the highest possible aqueous concentration. The advantage of having a hexahydrate chloride with low moisture content (< 2%) incoming feed allows for a continuous basis to recover acid at a concentration that is higher than the azeotropic concentration. This HCl balance and double usage into three (3) common parts of the processes and above azeotropic point is a substantial advance in the art.

[00269] Another advantage is when the use is made of the incoming chemistry (ferric chloride) to the iron oxide and hydrochloric acid recovery unit where all excess heat load from any calcination part, pyrohydrolysis and leaching part is being recovered to preconcentrate the mother liquor in metal chloride, thus allowing, at very low temperature, the hydrolysis of the ferric chloride in the form of very pure hematite and the acid regeneration at the same concentration than at its azeotropic point.

[00270] A further major advantage of the processes of the present disclosure at the ferric chloride hydrolysis step can be the possibility to concentrate rare earth elements in form of chlorides at very high concentration within the hydrolyser reactor through an internal loop between hydrolyzer and crystallization. The advantage is that the processes of the present disclosure benefit from the various steps where gradual concentration ratios are applied. Thus, at this stage, in addition to an internal concentration loop, having the silica, the aluminum, the iron and having in equilibrium a solution close to saturation (large amount of water evaporated, no presence of free hydrochloric acid) allows for taking rare earth elements and non-hydrolysable elements in parts per million into the incoming feed and to concentrate them in high percentage directly at the hydrolyser after ferric chloride removal. Purification of the specific oxides (RE-O) can then be performed using various techniques when in percentage levels. The advantage can be doubled here: concentration at very high level of rare earth elements using integrated process stages and most importantly the approach prevents from having the main stream (very diluted) of spent acid after the leaching step with the risk of contaminating the main aluminum chloride stream and thus affecting yields in Al_2O_3 . Another important improvement of the art can be that on top of being fully integrated, selective removal of components allows for the concentration of rare earth elements to relatively high concentration (percentages).

[00271] Another advantage of the processes can be again a selective crystallization of MgCl_2 through the sparging of HCl from either the alumina calcination step or the magnesium oxide direct calcination where in both cases highly concentrated acid both in gaseous phase or in aqueous form are being generated. As per aluminum chloride specific crystallization, the direct interconnection with the calcination reactor, the HCl gas very high concentration (about 85 to about 95 %, about 90 to 95 % or about 90 % by weight) allows for exact adjustment in continuous of the crystallizer based on quality of magnesium oxide targeted. Should this process step (MgO production or other value added metal oxide) be required based on incoming

process feed chemistry, the rare earth elements extraction point then be done after this additional step; the advantage being the extra concentration effect applied.

[00272] The pyrohydrolysis can allow for the final conversion of any remaining chloride and the production of refined oxides that can be used (in case of clay as starting material) as a fertilizer and allowing the processing of large amount of wash water from the processes with the recovery of hydrochloric acid in close loop at the azeotropic point for the leaching step. The advantage of this last step can be related to the fact that it does totally close the process loop in terms of acid recovery and the insurance that no residues harmful to the environment are being generated while processing any type of raw material, as previously described.

[00273] A major contribution to the art can be that the proposed fully integrated processes of the present disclosure are allowing, among others, the processing of bauxite in an economic way while generating no red mud or harmful residues. In addition to the fact of being applicable to other natural or raw materials (any suitable aluminum-containing material or aluminous ores), the fact of using hydrochloric acid total recovery and a global concentration that can be higher than the concentration at the azeotropic point (for example about 21% to about 38%), the selective extraction of value added secondary products and compliance (while remaining highly competitive on transformation cost) with environmental requirements, represent major advantages in the art.

[00274] The processes of the present disclosure can provide fully continuous and economical solutions that can successfully extract alumina from various type of materials while providing ultra pure secondary products of high added value including highly concentrated rare earth elements and rare metals. The technology described in the present disclosure can allow for an innovative amount of total acid recovery and also for a ultra high concentration of recovered acid. When combining it to the fact that combined with a semi-continuous leaching approach that favors very high extraction

yields and allows a specific method of crystallization of the aluminum chloride and concentration of other value added elements. These processes can also allow for preparing aluminum with such a produced alumina.

[00275] For example, through the type of equipment that can be used (for example vertical roller mill) and its specific operation, raw material grinding, drying and classifying can be applicable to various kinds of material hardness (furnace slag for example), various types of humidity (up to 30%) and incoming particle sizes. The particle size established can provide the advantage, at the leaching stage, of allowing efficient contact between the minerals and the acid and then allowing faster kinetics of reaction. Particles size employed can be effective to reduce drastically the abrasion issue and allows for the use of a simplified metallurgy/lining when in contact with hydrochloric acid.

[00276] A further advantage of the processes of the present disclosure can be the combined high temperature and high incoming hydrochloric acid concentration. Combined with a semi continuous operation where the free HCl driving force can be used systematically, iron and aluminum extraction yields do respectively reach 100% and 98% in less than about 40 % of the reference time of a basic batch process. Another advantage of higher HCl concentration than the concentration at azeotropic point can be the potential of capacity increase. Again a higher HCl concentration than the concentration of HCl at the azeotropic point and the semi-continuous approach can represent a substantial advance in the art.

[00277] Another advantage in that technique used for the mother liquor separation from the silica after the leaching stage countercurrent wash, can be that band filters provide ultra pure silica with expected purity exceeding 96%.

[00278] The crystallization of AlCl_3 into $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ using dried, cleaned and highly concentrated gaseous HCl as the sparging agent can allow for a pure aluminum chloride hexahydrate with only few parts per million of iron and

other impurities. A minimal number of stages can be required to allow proper crystal growth.

[00279] The direct interconnection with the calcination of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 which can produce very high concentration of gas allows the exact adjustment in continuous of the HCl concentration within the crystallizer and thus proper control of the crystal growth and crystallization process.

[00280] It was thus demonstrated that the present disclosure provides fully integrated processes for the preparation of pure aluminum oxide using a hydrochloric acid treatment while producing high purity and high quality products (minerals) and extracting rare earth elements and rare metals.

[00281] While a description was made with particular reference to the specific embodiments, it will be understood that numerous modifications thereto will appear to those skilled in the art. Accordingly, the above description and accompanying drawings should be taken as specific examples and not in a limiting sense.

WHAT IS CLAIMED IS:

1. A process for treating fly ash, said process comprising :
 - leaching fly ash with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating said solid from said leachate;
 - reacting said leachate with HCl so as to obtain a liquid and a precipitate comprising said aluminum ions in the form of AlCl_3 , and separating said precipitate from said liquid; and
 - heating said precipitate under conditions effective for converting AlCl_3 into Al_2O_3 and optionally recovering gaseous HCl so-produced.
2. The process of claim 1, wherein said fly ash is leached with HCl having a concentration of about 25 to about 45 weight %.
3. The process of claim 1, wherein said fly ash is leached with HCl having a concentration of about 25 to about 45 weight % at a temperature of about 125 to about 225 °C.
4. The process of claim 1, wherein said fly ash is leached with HCl having a concentration of about 25 to about 45 weight % at a temperature of about 160 to about 190 °C.
5. The process of claim 1, wherein said fly ash is leached with HCl having a concentration of about 25 to about 45 weight % at a temperature of about 160 to about 175 °C.
6. The process of claim 1, wherein said fly ash is leached with HCl having a concentration of about 25 to about 45 weight % at a temperature of about 185 to about 190 °C.

7. The process of claim 1, wherein said fly ash is leached with HCl having a concentration of about 18 to about 45 weight %.
8. The process of claim 1, wherein said fly ash is leached with HCl having a concentration of about 18 to about 45 weight % at a temperature of about 125 to about 225 °C.
9. The process of claim 1, wherein said fly ash is leached with HCl having a concentration of about 18 to about 45 weight % at a temperature of about 160 to about 190 °C.
10. The process of claim 1, wherein said fly ash is leached with HCl having a concentration of about 18 to about 45 weight % at a temperature of about 160 to about 175 °C.
11. The process of claim 1, wherein said fly ash is leached with HCl having a concentration of about 18 to about 45 weight % at a temperature of about 185 to about 190 °C.
12. The process of claim 1, wherein said fly ash is leached with HCl having a concentration of about 18 to about 32 weight % at a temperature of about 125 to about 225 °C.
13. The process of claim 1, wherein said fly ash is leached with HCl having a concentration of about 18 to about 32 weight % at a temperature of about 160 to about 190 °C.
14. The process of claim 1, wherein said fly ash is leached with HCl having a concentration of about 18 to about 32 weight % at a temperature of about 160 to about 175 °C.

15. The process of claim 1, wherein said fly ash is leached with HCl having a concentration of about 18 to about 32 weight % at a temperature of about 185 to about 190 °C.
16. The process of any one of claims 1 to 15, wherein said process further comprises recycling said gaseous HCl so-produced by contacting it with water so as to obtain a composition having a concentration of about 25 to about 45 weight % and using said composition for leaching said fly ash.
17. The process of claim 16, wherein said recycled gaseous HCl so-produced is contacted with water so as to obtain said composition having a concentration of about 26 to about 42 weight % and said composition is reacted, at a temperature of about 125 to about 225 °C, with said fly ash is so as to leaching it.
18. The process of claim 16, wherein said recycled gaseous HCl so-produced is contacted with water so as to obtain said composition having a concentration of about 28 to about 40 weight % and said composition is reacted, at a temperature of about 150 to about 200 °C, with said fly ash is so as to leaching it.
19. The process of claim 16, wherein said recycled gaseous HCl so-produced is contacted with water so as to obtain said composition having a concentration of about 30 to about 38 weight % and said composition is reacted, at a temperature of about 150 to about 200 °C, with said fly ash is so as to leaching it.
20. The process claim 19, wherein said recycled gaseous HCl so-produced is contacted with water so as to obtain said composition having a concentration between 18 and 36 weight %.

21. The process claim 19, wherein said recycled gaseous HCl so-produced is contacted with water so as to obtain said composition having a concentration between 25 and 36 weight %.
22. The process of claim 19, wherein said composition is reacted, at a temperature of about 160 to about 180 °C with said fly ash so as to leaching it.
23. The process of claim 19, wherein said composition is reacted, at a temperature of about 160 to about 175 °C with said fly ash so as to leaching it.
24. The process of claim 19, wherein said composition is reacted, at a temperature of about 165 to about 170 °C with said fly ash so as to leaching it.
25. The process of any one of claims 1 to 24, wherein said liquid comprises at least one iron chloride.
26. The process of claim 25, wherein said at least one iron chloride is FeCl_2 , FeCl_3 or a mixture thereof.
27. The process of claim 25 or 26, wherein said liquid is concentrated to a concentrated liquid having a concentration of said at least one iron chloride of at least 30% by weight; and then hydrolyzed at a temperature of about 155 to about 350 °C.
28. The process of claim 25 or 26, wherein said liquid is concentrated to a concentrated liquid having a concentration of said at least one iron chloride of at least 30% by weight; and then said at least one iron chloride is hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least

65% by weight, to generate a composition comprising a liquid and precipitated hematite, and recovering said hematite.

29. The process of claim 25 or 26, wherein said at least one iron chloride is hydrolyzed at a temperature of about 165 to about 170 °C.
30. The process of claim 25 or 26, wherein said liquid is concentrated to a concentrated liquid having a concentration of said at least one iron chloride of at least 30% by weight; and then said at least one iron chloride is hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least 65% by weight, to generate a composition comprising a liquid and precipitated hematite; recovering said hematite; and recovering rare earth elements and/or rare metals from said liquid.
31. The process of claim 30, wherein said at least one iron chloride is hydrolyzed at a temperature of about 155 to about 170 °C.
32. The process of claim 30 or 31, further comprising, after recovery of said rare earth elements and/or said rare metals, reacting said liquid with HCl so as to cause precipitation of $MgCl_2$, and recovering same.
33. The process of claim 30 or 31, further comprising calcining $MgCl_2$ into MgO .
34. The process of claim 30 or 31, further comprising calcining $MgCl_2$ into MgO and recycling the gaseous HCl so-produced by contacting it with water so as to obtain a composition having a concentration of about 25 to about 45 weight % and using said composition for leaching said fly ash.
35. The process of claim 30 or 31, further comprising calcining $MgCl_2$ into MgO and recycling the gaseous HCl so-produced by contacting it with

water so as to obtain a composition having a concentration of about 18 to about 45 weight % and using said composition for leaching said fly ash.

36. The process of any one of claims 30 to 35, further comprising, downstream of recovery of said rare earth elements and/or rare metals, recovering NaCl from said liquid, reacting said NaCl with H₂SO₄, and substantially selectively precipitating Na₂SO₄.
37. The process of any one of claims 30 to 36, further comprising, downstream of recovery of said rare earth elements and/or rare metals, recovering KCl from said liquid, reacting said KCl with H₂SO₄, and substantially selectively precipitating K₂SO₄.
38. The process of any one of claims 30 to 35, further comprising, downstream of recovery of said rare earth elements and/or rare metals, recovering NaCl from said liquid, carrying out an electrolysis to generate NaOH and NaOCl.
39. The process of any one of claims 30 to 35 and 38, further comprising, downstream of recovery of said rare earth elements and/or rare metals, recovering KCl from said liquid, reacting said KCl, carrying out an electrolysis to generate KOH and KOCl.
40. The process of claim 25 or 26, wherein said liquid is concentrated to a concentrated liquid having a concentration of said at least one iron chloride of at least 30% by weight; and then said at least one iron chloride is hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least 65% by weight, to generate a composition comprising a liquid and precipitated hematite; recovering said hematite; and extracting NaCl and/or KCl from said liquid.

41. The process of claim 40, further comprising reacting said NaCl with H₂SO₄ so as to substantially selectively precipitate Na₂SO₄.
42. The process of claim 40, further comprising reacting said KCl with H₂SO₄ so as to substantially selectively precipitate K₂SO₄.
43. The process of claim 40, further comprising carrying out an electrolysis of said NaCl to generate NaOH and NaOCl.
44. The process of claim 40, further comprising carrying out an electrolysis of aid KCl to generate KOH and KOCl.
45. The process of any one of claims 1 to 44, wherein said process comprises separating said solid from said leachate and washing said solid so as to obtain silica having a purity of at least 95 %.
46. The process of any one of claims 1 to 44, wherein said process comprises separating said solid from said leachate and washing said solid so as to obtain silica having a purity of at least 98 %.
47. The process of any one of claims 1 to 44, wherein said process comprises separating said solid from said leachate and washing said solid so as to obtain silica having a purity of at least 99 %.
48. The process of any one of claims 1 to 47, wherein said process comprises reacting said leachate with gaseous HCl so as to obtain said liquid and said precipitate comprising said aluminum ions, said precipitate being formed by crystallization of AlCl₃•6H₂O.
49. The process of any one of claims 1 to 47, wherein said process comprises reacting said leachate with dry gaseous HCl so as to obtain said liquid and said precipitate comprising said aluminum ions, said precipitate being formed by crystallization of AlCl₃•6H₂O.

50. The process of claim 48 or 49, wherein said gaseous HCl has a HCl concentration of at least 85 % by weight.
51. The process of claim 48 or 49, wherein said gaseous HCl has a HCl concentration of at least 90 % by weight.
52. The process of claim 48 or 49, wherein said gaseous HCl has a HCl concentration of about 90 % by weight.
53. The process of claim 48 or 49, wherein said gaseous HCl has a concentration of about 90 % to about 95 % by weight.
54. The process of any one of claims 48 to 53, wherein during said crystallization of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$, said liquid is maintained at a concentration of HCl of about 25 to about 35 % by weight.
55. The process of any one of claims 48 to 53, wherein during said crystallization of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$, said liquid is maintained at a concentration of HCl of about 30 to about 32 % by weight.
56. The process of any one of claims 48 to 55, wherein said HCl is obtained from said gaseous HCl so-produced.
57. The process of any one of claims 1 to 56, wherein said process comprises reacting said leachate with HCl recovered during said processs and having a concentration of at least 30 % as to obtain said liquid and said precipitate comprising said aluminum ions, said precipitate being formed by crystallization of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$.
58. The process of any one of claims 48 to 57, wherein said crystallization is carried out at a temperature of about 45 to about 65 °C.

59. The process of any one of claims 48 to 57, wherein said crystallization is carried out at a temperature of about 50 to about 60 °C.
60. The process of any one of claims 1 to 59, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 by carrying out a calcination of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$.
61. The process of any one of claims 1 to 60, wherein said process comprises heating said precipitate at a temperature of at least 1200 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .
62. The process of any one of claims 1 to 60, wherein said process comprises heating said precipitate at a temperature of at least 1250 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .
63. The process of any one of claims 1 to 60, wherein said process comprises heating said precipitate at a temperature of at least 900 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .
64. The process of any one of claims 1 to 63, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into alpha- Al_2O_3 .
65. The process of any one of claims 1 to 60, wherein said process comprises heating said precipitate at a temperature of at least 350 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .
66. The process of any one of claims 1 to 60, wherein said process comprises heating said precipitate at a temperature of about 350 °C to about 500 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .
67. The process of any one of claims 1 to 60, wherein said process comprises heating said precipitate at a temperature of about 375 °C to about 450 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .

68. The process of any one of claims 1 to 60, wherein said process comprises heating said precipitate at a temperature of about 375 °C to about 425 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .
69. The process of any one of claims 1 to 60, wherein said process comprises heating said precipitate at a temperature of about 385 °C to about 400 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .
70. The process of any one of claims 66 to 70, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into beta- Al_2O_3 .
71. The process of any one of claims 1 to 70, wherein converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 comprises carrying out a calcination via a two-stage circulating fluid bed reactor.
72. The process of any one of claims 1 to 70, wherein converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 comprises carrying out a calcination via a two-stage circulating fluid bed reactor that comprises a preheating system.
73. The process of claim 72, wherein said preheating system comprises a plasma torch.
74. The process of claim 73, wherein said plasma torch is effective for preheating air entering into a calcination reactor.
75. The process of claim 73, wherein said plasma torch is effective for generating steam that is injected into a calcination reactor.
76. The process of claim 73, wherein said plasma torch is effective for generating steam that is as fluidization medium in a fluid bed reactor.

77. The process of process of any one of claims 1 to 76, wherein converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 comprises carrying out a one-step calcination.
78. The process of process of any one of claims 1 to 77, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 by carrying out a calcination of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$, said calcination comprising steam injection.
79. The process of claim 78, wherein steam is injected at a pressure of about 200 to about 700 psig.
80. The process of claim 78, wherein steam is injected at a pressure of about 300 to about 700 psig.
81. The process of claim 78, wherein steam is injected at a pressure of about 400 to about 700 psig.
82. The process of claim 78, wherein steam is injected at a pressure of about 550 to about 650 psig.
83. The process of claim 78, wherein steam is injected at a pressure of about 575 to about 625 psig.
84. The process of claim 78, wherein steam is injected at a pressure of about 590 to about 610 psig.
85. The process of any one of claims 78 to 84, wherein steam is injected and a plasma torch is used.
86. The process of any one of claims 78 to 84, wherein steam is injected and a plasma torch is used for carrying fluidization.

87. The process of any one of claims 78 to 86, wherein said steam is overheated.
88. The process of any one of claims 1 to 87, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 by carrying out a calcination of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ in which is provided by the combustion of a fossil fuel, carbon monoxide, propane, natural gas, a Refinery Fuel Gas, coal, or chlorinated gases and/or solvents.
89. The process of any one of claims 1 to 87, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 by carrying out a calcination of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ that is provided by the combustion of gas mixture that is an incoming smelter gas or a reducer offgas.
90. The process of any one of claims 1 to 87, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 by carrying out a calcination of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ that is provided by the combustion of gas mixture that comprises :

CH_4 : 0 to about 1% vol;

C_2H_6 : 0 to about 2% vol;

C_3H_8 : 0 to about 2% vol;

C_4H_{10} : 0 to about 1% vol;

N_2 : 0 to about 0.5% vol;

H_2 : about 0.25 to about 15.1 % vol;

CO : about 70 to about 82.5 % vol; and

CO_2 : about 1.0 to about 3.5% vol.
91. The process of claim 90, wherein O_2 is substantially absent from said mixture.

92. The process of any one of claims 1 to 87, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 by carrying out a calcination of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ in which is provided by electric heating, gas heating, microwave heating.
93. The process of any one of claims 1 to 92, wherein converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 comprises carrying out a calcination by means of fluid bed reactor.
94. The process of claim 93, wherein the fluid bed reactor comprises a metal catalyst chosen from metal chlorides.
95. The process of claim 93, wherein the fluid bed reactor comprises FeCl_3 , FeCl_2 or a mixture thereof.
96. The process of claim 93, wherein the fluid bed reactor comprises FeCl_3 .
97. The process of any one of claims 1 to 96, wherein said process is a semi-continuous process.
98. The process of any one of claims 1 to 96, wherein said process is a continuous process.
99. The process of any one of claims 1 to 98, wherein said process is effective for providing an Al_2O_3 recovery yield of at least 93 %.
100. The process of any one of claims 1 to 98, wherein said process is effective for providing an Al_2O_3 recovery yield of about 90 % to about 95 %.
101. The process of any one of claims 1 to 100, wherein said process is effective for providing a Fe_2O_3 recovery yield of at least 98 %.

102. The process of any one of claims 1 to 100, wherein said process is effective for providing a Fe_2O_3 recovery yield of about 98 % to about 99.5 %.
103. The process of any one of claims 1 to 102, wherein said process is effective for providing a MgO recovery yield of at least 96 %.
104. The process of any one of claims 1 to 102, wherein said process is effective for providing a MgO recovery yield of about 96 to about 98 %.
105. The process of any one of claims 1 to 104, wherein said process is effective for providing a HCl recovery yield of at least 98 %.
106. The process of any one of claims 1 to 104, wherein said process is effective for providing a HCl recovery yield of at least 99 %.
107. The process of any one of claims 1 to 104, wherein said process is effective for providing a HCl recovery yield of about 98 to about 99.9 %.
108. The process of any one of claims 1 to 107, wherein said fly ash is leached at a pressure of about 4 to about 10 barg.
109. The process of any one of claims 1 to 107, wherein said fly ash is leached at a pressure of about 4 to about 8 barg.
110. The process of any one of claims 1 to 107, wherein said fly ash is leached at a pressure of about 5 to about 6 barg.
111. The process of any one of claims 1 to 110, further comprising, before leaching said fly ash, a pre-leaching removal of fluorine optionally contained in said fly ash.

112. The process of any one of claims 1 to 111, comprising leaching said fly ash with HCl so as to obtain said leachate comprising aluminum ions and said solid, separating said solid from said leachate; and further treating said solid so as to separate SiO_2 from TiO_2 that are contained therein.
113. The process of any one of claims 1 to 111, comprising leaching said fly ash with HCl so as to obtain said leachate comprising aluminum ions and said solid, separating said solid from said leachate; and further treating said solid with HCl so as to separate SiO_2 from TiO_2 that are contained therein.
114. The process of any one of claims 1 to 111, comprising leaching said fly ash with HCl so as to obtain said leachate comprising aluminum ions and said solid, separating said solid from said leachate; and further treating said solid with HCl at a concentration of less than 20 % by weight, at a temperature of less than 85 °C, in the presence of MgCl , so as to separate SiO_2 from TiO_2 that are contained therein.
115. The process of any one of claims 1 to 114, wherein said process is effective for avoiding producing red mud.
116. The process of any one of claims 1 to 115, wherein the recovered HCl is purified and/or concentrated.
117. The process of claim 116, wherein the recovered HCl is purified by means of a membrane distillation process.
118. The process of claim 116, wherein the recovered HCl is gaseous HCl and is treated with H_2SO_4 so as to reduce the amount of water present in the gaseous HCl.

119. The process of claim 118, wherein the recovered HCl is gaseous HCl and is passed through a packed column so as to be in contact with a H₂SO₄ countercurrent flow so as to reduce the amount of water present in the gaseous HCl.
120. The process of claim 119, wherein the column is packed with polypropylene or polytrimethylene terephthalate.
121. The process of any one of claims 1116 and 118 to 120, wherein the concentration of gaseous HCl is increased by at least 50 %.
122. The process of any one of claims 116 and 118 to 120, wherein the concentration of gaseous HCl is increased by at least 60 %.
123. The process of any one of claims 116 and 118 to 120, wherein the concentration of gaseous HCl is increased by at least 70 %.
124. The process of claim 116, wherein the recovered HCl is gaseous HCl and is treated with CaCl₂ or LiCl so as to reduce the amount of water present in the gaseous HCl.
125. The process of claim 124, wherein the recovered HCl is gaseous HCl and is passed through a column packed with CaCl₂ LiCl so as to reduce the amount of water present in the gaseous HCl.
126. The process of any one of claims 116 to 125, wherein the concentration of gaseous HCl is increased from a value below the azeotropic point before treatment to a value above the azeotropic point after treatment.

127. A process for preparing aluminum, said process comprising :
 - leaching a fly ash with HCl so as to obtain a leachate comprising aluminum ions and a solid, and separating said solid from said leachate;
 - reacting said leachate with HCl so as to obtain a liquid and a precipitate comprising said aluminum ions in the form of AlCl_3 , and separating said precipitate from said liquid;
 - heating said precipitate under conditions effective for converting AlCl_3 into Al_2O_3 and optionally recovering gaseous HCl so-produced; and
 - converting said Al_2O_3 into aluminum.
128. The process of claim 127, wherein said fly ash is leached with HCl having a concentration of about 25 to about 45 weight %.
129. The process of claim 127, wherein said fly ash is leached with HCl having a concentration of about 25 to about 45 weight % at a temperature of about 125 to about 225 °C.
130. The process of claim 127, wherein said fly ash is leached with HCl having a concentration of about 25 to about 45 weight % at a temperature of about 160 to about 190 °C.
131. The process of claim 127, wherein said fly ash is leached with HCl having a concentration of about 25 to about 45 weight % at a temperature of about 160 to about 175 °C.

132. The process of claim 127, wherein said fly ash is leached with HCl having a concentration of about 25 to about 45 weight % at a temperature of about 185 to about 190 °C.
133. The process of claim 127, wherein said fly ash is leached with HCl having a concentration of about 18 to about 45 weight %.
134. The process of claim 127, wherein said fly ash is leached with HCl having a concentration of about 18 to about 45 weight % at a temperature of about 125 to about 225 °C.
135. The process of claim 127, wherein said fly ash is leached with HCl having a concentration of about 18 to about 45 weight % at a temperature of about 160 to about 190 °C.
136. The process of claim 127, wherein said fly ash is leached with HCl having a concentration of about 18 to about 45 weight % at a temperature of about 160 to about 175 °C.
137. The process of claim 127, wherein said fly ash is leached with HCl having a concentration of about 18 to about 45 weight % at a temperature of about 185 to about 190 °C.
138. The process of claim 127, wherein said fly ash is leached with HCl having a concentration of about 18 to about 32 weight % at a temperature of about 125 to about 225 °C.
139. The process of claim 127, wherein said fly ash is leached with HCl having a concentration of about 18 to about 32 weight % at a temperature of about 160 to about 190 °C.

140. The process of claim 127, wherein said fly ash is leached with HCl having a concentration of about 18 to about 32 weight % at a temperature of about 160 to about 175 °C.
141. The process of claim 127, wherein said fly ash is leached with HCl having a concentration of about 18 to about 32 weight % at a temperature of about 185 to about 190 °C.
142. The process of any one of claims 127 to 141, wherein said process further comprises recycling said gaseous HCl so-produced by contacting it with water so as to obtain a composition having a concentration of about 25 to about 45 weight % and using said composition for leaching said fly ash.
143. The process of claim 142, wherein said recycled gaseous HCl so-produced is contacted with water so as to obtain said composition having a concentration of about 26 to about 42 weight % and said composition is reacted, at a temperature of about 125 to about 225 °C, with said fly ash so as to leaching it.
144. The process of claim 142, wherein said recycled gaseous HCl so-produced is contacted with water so as to obtain said composition having a concentration of about 28 to about 40 weight % and said composition is reacted, at a temperature of about 150 to about 200 °C, with said fly ash so as to leaching it.
145. The process of claim 142, wherein said recycled gaseous HCl so-produced is contacted with water so as to obtain said composition having a concentration of about 30 to about 38 weight % and said composition is reacted, at a temperature of about 150 to about 200 °C, with said fly ash so as to leaching it.

146. The process claim 145, wherein said recycled gaseous HCl so-produced is contacted with water so as to obtain said composition having a concentration between 18 and 36 weight %.
147. The process claim 145, wherein said recycled gaseous HCl so-produced is contacted with water so as to obtain said composition having a concentration between 25 and 36 weight %.
148. The process of claim 145, wherein said composition is reacted, at a temperature of about 160 to about 180 °C with said fly ash so as to leaching it.
149. The process of claim 145, wherein said composition is reacted, at a temperature of about 160 to about 175 °C with said fly ash so as to leaching it.
150. The process of claim 145, wherein said composition is reacted, at a temperature of about 165 to about 170 °C with said fly ash so as to leaching it.
151. The process of any one of claims 1 to 150, wherein said liquid comprises at least one iron chloride.
152. The process of claim 151, wherein said at least one iron chloride is FeCl_2 , FeCl_3 or a mixture thereof.
153. The process of claim 151 or 152, wherein said liquid is concentrated to a concentrated liquid having a concentration of said at least one iron chloride of at least 30% by weight; and then hydrolyzed at a temperature of about 155 to about 350 °C.
154. The process of claim 151 or 152, wherein said liquid is concentrated to a concentrated liquid having a concentration of said at least one

iron iron chloride of at least 30% by weight; and then said at least one iron chloride is hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least 65% by weight, to generate a composition comprising a liquid and precipitated hematite, and recovering said hematite.

155. The process of claim 151 or 152, wherein said at least one iron chloride is hydrolyzed at a temperature of about 165 to about 170 °C.
156. The process of claim 151 or 152, wherein said liquid is concentrated to a concentrated liquid having a concentration of said at least one iron chloride of at least 30% by weight; and then said at least one iron chloride is hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least 65% by weight, to generate a composition comprising a liquid and precipitated hematite; recovering said hematite; and recovering rare earth elements and/or rare metals from said liquid.
157. The process of claim 156, wherein said at least one iron chloride is hydrolyzed at a temperature of about 155 to about 170 °C.
158. The process of claim 156 or 157, further comprising, after recovery of said rare earth elements and/or said rare metals, reacting said liquid with HCl so as to cause precipitation of $MgCl_2$, and recovering same.
159. The process of claim 157 or 158, further comprising calcining $MgCl_2$ into MgO .
160. The process of claim 158 or 159, further comprising calcining $MgCl_2$ into MgO and recycling the gaseous HCl so-produced by contacting it with water so as to obtain a composition having a concentration of about 25 to about 45 weight % and using said composition for leaching said fly ash.

161. The process of claim 158 or 159, further comprising calcining $MgCl_2$ into MgO and recycling the gaseous HCl so-produced by contacting it with water so as to obtain a composition having a concentration of about 18 to about 45 weight % and using said composition for leaching said fly ash.
162. The process of any one of claims 156 to 161, further comprising, downstream of recovery of said rare earth elements and/or rare metals, recovering NaCl from said liquid, reacting said NaCl with H_2SO_4 , and substantially selectively precipitating Na_2SO_4 .
163. The process of any one of claims 156 to 162, further comprising, downstream of recovery of said rare earth elements and/or rare metals, recovering KCl from said liquid, reacting said KCl with H_2SO_4 , and substantially selectively precipitating K_2SO_4 .
164. The process of any one of claims 156 to 161, further comprising, downstream of recovery of said rare earth elements and/or rare metals, recovering NaCl from said liquid, carrying out an electrolysis to generate NaOH and NaOCl.
165. The process of any one of claims 156 to 161 and 164, further comprising, downstream of recovery of said rare earth elements and/or rare metals, recovering KCl from said liquid, reacting said KCl, carrying out an electrolysis to generate KOH and KOCl.
166. The process of claim 151 or 152, wherein said liquid is concentrated to a concentrated liquid having a concentration of said at least one iron chloride of at least 30% by weight; and then said at least one iron chloride is hydrolyzed at a temperature of about 155 to about 350 °C while maintaining a ferric chloride concentration at a level of at least 65% by weight, to generate a composition comprising a liquid and

precipitated hematite; recovering said hematite; and extracting NaCl and/or KCl from said liquid.

167. The process of claim 165, further comprising reacting said NaCl with H₂SO₄ so as to substantially selectively precipitate Na₂SO₄.
168. The process of claim 165, further comprising reacting said KCl with H₂SO₄ so as to substantially selectively precipitate K₂SO₄.
169. The process of claim 165, further comprising carrying out an electrolysis of said NaCl to generate NaOH and NaOCl.
170. The process of claim 165, further comprising carrying out an electrolysis of said KCl to generate KOH and KOCl.
171. The process of any one of claims 127 to 170, wherein said process comprises separating said solid from said leachate and washing said solid so as to obtain silica having a purity of at least 95 %.
172. The process of any one of claims 127 to 170, wherein said process comprises separating said solid from said leachate and washing said solid so as to obtain silica having a purity of at least 98 %.
173. The process of any one of claims 127 to 170, wherein said process comprises separating said solid from said leachate and washing said solid so as to obtain silica having a purity of at least 99 %.
174. The process of any one of claims 127 to 173, wherein said process comprises reacting said leachate with gaseous HCl so as to obtain said liquid and said precipitate comprising said aluminum ions, said precipitate being formed by crystallization of AlCl₃•6H₂O.

175. The process of any one of claims 127 to 173, wherein said process comprises reacting said leachate with dry gaseous HCl so as to obtain said liquid and said precipitate comprising said aluminum ions, said precipitate being formed by crystallization of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$.
176. The process of claim 174 or 175, wherein said gaseous HCl has a HCl concentration of at least 85 % by weight.
177. The process of claim 174 or 175, wherein said gaseous HCl has a HCl concentration of at least 90 % by weight.
178. The process of claim 174 or 175, wherein said gaseous HCl has a HCl concentration of about 90 % by weight.
179. The process of claim 174 or 175, wherein said gaseous HCl has a concentration of about 90 % to about 95 % by weight.
180. The process of any one of claims 174 to 179, wherein during said crystallization of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$, said liquid is maintained at a concentration of HCl of about 25 to about 35 % by weight.
181. The process of any one of claims 174 to 179, wherein during said crystallization of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$, said liquid is maintained at a concentration of HCl of about 30 to about 32 % by weight.
182. The process of any one of claims 174 to 179, wherein said HCl is obtained from said gaseous HCl so-produced.
183. The process of any one of claims 125 to 182, wherein said process comprises reacting said leachate with HCl recovered during said processs and ahaving a concentration of at least 30 % as to obtain said liquid and said precipitate comprising said aluminum ions, said precipitate being formed by crystallization of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$.

184. The process of any one of claims 174 to 183, wherein said crystallization is carried out at a temperature of about 45 to about 65 °C.
185. The process of any one of claims 174 to 183, wherein said crystallization is carried out at a temperature of about 50 to about 60 °C.
186. The process of any one of claims 127 to 185, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 by carrying out a calcination of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$.
187. The process of any one of claims 127 to 185, wherein said process comprises heating said precipitate at a temperature of at least 1200 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .
188. The process of any one of claims 127 to 185, wherein said process comprises heating said precipitate at a temperature of at least 1250 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .
189. The process of any one of claims 127 to 185, wherein said process comprises heating said precipitate at a temperature of at least 900 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .
190. The process of any one of claims 127 to 185, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into alpha- Al_2O_3 .
191. The process of any one of claims 127 to 185, wherein said process comprises heating said precipitate at a temperature of at least 350 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .

192. The process of any one of claims 127 to 185, wherein said process comprises heating said precipitate at a temperature of about 350 °C to about 500 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .
193. The process of any one of claims 172 to 185, wherein said process comprises heating said precipitate at a temperature of about 375 °C to about 450 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .
194. The process of any one of claims 127 to 185, wherein said process comprises heating said precipitate at a temperature of about 375 °C to about 425 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .
195. The process of any one of claims 172 to 185, wherein said process comprises heating said precipitate at a temperature of about 385 °C to about 400 °C for converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 .
196. The process of any one of claims 191 to 195, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into beta- Al_2O_3 .
197. The process of any one of claims 127 to 196, wherein converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 comprises carrying out a calcination via a two-stage circulating fluid bed reactor.
198. The process of any one of claims 127 to 197, wherein converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 comprises carrying out a calcination via a two-stage circulating fluid bed reactor that comprises a preheating system.
199. The process of claim 198, wherein said preheating system comprises a plasma torch.
200. The process of claim 198, wherein said plasma torch is effective for preheating air entering into a calcination reactor.

201. The process of claim 198, wherein said plasma torch is effective for generating steam that is injected into a calcination reactor.
202. The process of claim 198, wherein said plasma torch is effective for generating steam that is as fluidization medium in a fluid bed reactor.
203. The process of process of any one of claims 127 to 202, wherein converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 comprises carrying out a one-step calcination.
204. The process of process of any one of claims 127 to 203, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 by carrying out a calcination of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$, said calcination comprising steam injection.
205. The process of claim 204, wherein steam is injected at a pressure of about 200 to about 700 psig.
206. The process of claim 204, wherein steam is injected at a pressure of about 300 to about 700 psig.
207. The process of claim 204, wherein steam is injected at a pressure of about 400 to about 700 psig.
208. The process of claim 204, wherein steam is injected at a pressure of about 550 to about 650 psig.
209. The process of claim 204, wherein steam is injected at a pressure of about 575 to about 625 psig.
210. The process of claim 204, wherein steam is injected at a pressure of about 590 to about 610 psig.

211. The process of any one of claims 204 to 210, wherein steam is injected and a plasma torch is used for carrying fluidization.
212. The process of any one of claims 204 to 210, wherein steam is injected and a plasma torch is used for carrying fluidization.
213. The process of any one of claims 204 to 210, wherein said steam is overheated.
214. The process of any one of claims 127 to 213, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 by carrying out a calcination of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ in which is provided by the combustion of a fossil fuel, carbon monoxide, propane, natural gas, a Refinery Fuel Gas, coal, or chlorinated gases and/or solvents.
215. The process of any one of claims 127 to 213, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 by carrying out a calcination of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ that is provided by the combustion of gas mixture that is an incoming smelter gas or a reducer offgas.
216. The process of any one of claims 127 to 213, wherein said process comprises converting $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ into Al_2O_3 by carrying out a calcination of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$ that is provided by the combustion of gas mixture that comprises :

 CH_4 : 0 to about 1% vol;

 C_2H_6 : 0 to about 2% vol;

 C_3H_8 : 0 to about 2% vol;

 C_4H_{10} : 0 to about 1% vol;

 N_2 : 0 to about 0.5% vol;

 H_2 : about 0.25 to about 15.1 % vol;

CO : about 70 to about 82.5 % vol; and

CO₂ : about 1.0 to about 3.5% vol.

217. The process of claim 216, wherein O₂ is substantially absent from said mixture.
218. The process of any one of claims 127 to 213, wherein said process comprises converting AlCl₃•6H₂O into Al₂O₃ by carrying out a calcination of AlCl₃•6H₂O in which is provided by electric heating, gas heating, microwave heating.
219. The process of any one of claims 127 to 218, wherein converting AlCl₃•6H₂O into Al₂O₃ comprises carrying out a calcination by means of fluid bed reactor.
220. The process of claim 219, wherein the fluid bed reactor comprises a metal catalyst chosen from metal chlorides.
221. The process of claim 219, wherein the fluid bed reactor comprises FeCl₃, FeCl₂ or a mixture thereof.
222. The process of claim 219, wherein the fluid bed reactor comprises FeCl₃.
223. The process of any one of claims 127 to 222, wherein said process is a semi-continuous process.
224. The process of any one of claims 127 to 222, wherein said process is a continuous process.
225. The process of any one of claims 127 to 224, wherein said process is effective for providing an Al₂O₃ recovery yield of at least 93 %.

226. The process of any one of claims 127 to 224, wherein said process is effective for providing an Al_2O_3 recovery yield of about 90 % to about 95 %.
227. The process of any one of claims 127 to 226, wherein said process is effective for providing a Fe_2O_3 recovery yield of at least 98 %.
228. The process of any one of claims 127 to 226, wherein said process is effective for providing a Fe_2O_3 recovery yield of about 98 % to about 99.5 %.
229. The process of any one of claims 127 to 228, wherein said process is effective for providing a MgO recovery yield of at least 96 %.
230. The process of any one of claims 127 to 228, wherein said process is effective for providing a MgO recovery yield of about 96 to about 98 %.
231. The process of any one of claims 127 to 230, wherein said process is effective for providing a HCl recovery yield of at least 98 %.
232. The process of any one of claims 127 to 230, wherein said process is effective for providing a HCl recovery yield of at least 99 %.
233. The process of any one of claims 127 to 230, wherein said process is effective for providing a HCl recovery yield of about 98 to about 99.9 %.
234. The process of any one of claims 127 to 233, wherein said fly ash is leached at a pressure of about 4 to about 10 barg.
235. The process of any one of claims 127 to 233, wherein said fly ash is leached at a pressure of about 4 to about 8 barg.

236. The process of any one of claims 127 to 233, wherein said fly ash is leached at a pressure of about 5 to about 6 barg.
237. The process of any one of claims 127 to 236, further comprising, before leaching said fly ash, a pre-leaching removal of fluorine optionally contained in said fly ash.
238. The process of any one of claims 127 to 237, comprising leaching said fly ash with HCl so as to obtain said leachate comprising aluminum ions and said solid, separating said solid from said leachate; and further treating said solid so as to separate SiO_2 from TiO_2 that are contained therein.
239. The process of any one of claims 127 to 237, comprising leaching said fly ash with HCl so as to obtain said leachate comprising aluminum ions and said solid, separating said solid from said leachate; and further treating said solid with HCl so as to separate SiO_2 from TiO_2 that are contained therein.
240. The process of any one of claims 127 to 239, comprising leaching said fly ash with HCl so as to obtain said leachate comprising aluminum ions and said solid, separating said solid from said leachate; and further treating said solid with HCl at a concentration of less than 20 % by weight, at a temperature of less than 85 °C, in the presence of MgCl_2 , so as to separate SiO_2 from TiO_2 that are contained therein.
241. The process of any one of claims 127 to 240, wherein said process is effective for avoiding producing red mud.
242. The process of any one of claims 127 to 240, wherein the recovered HCl is purified and/or concentrated.

243. The process of claim 242, wherein the recovered HCl is purified by means of a membrane distillation process.
244. The process of claim 242, wherein the recovered HCl is gaseous HCl and is treated with H_2SO_4 so as to reduce the amount of water present in the gaseous HCl.
245. The process of claim 244, wherein the recovered HCl is gaseous HCl and is passed through a packed column so as to be in contact with a H_2SO_4 countercurrent flow so as to reduce the amount of water present in the gaseous HCl.
246. The process of claim 245, wherein the column is packed with polypropylene or polytrimethylene terephthalate.
247. The process of any one of claims 242 to 246, wherein the concentration of gaseous HCl is increased by at least 50 %.
248. The process of any one of claims 242 to 246, wherein the concentration of gaseous HCl is increased by at least 60 %.
249. The process of any one of claims 242 to 246, wherein the concentration of gaseous HCl is increased by at least 70 %.
250. The process of claim 242, wherein the recovered HCl is gaseous HCl and is treated with $CaCl_2$ so as to reduce the amount of water present in the gaseous HCl.
251. The process of claim 242, wherein the recovered HCl is gaseous HCl and is passed through a column packed with $CaCl_2$ so as to reduce the amount of water present in the gaseous HCl.

252. The process of any one of claims 242 to 251, wherein the concentration of gaseous HCl is increased from a value below the azeotropic point before treatment to a value above the azeotropic point after treatment.
253. The process of any one of claims 127 to 252, wherein said conversion of Al_2O_3 into aluminum is carried out by means of the Hall-Héroult process.
254. The process of any one of claims 127 to 252, wherein said conversion of Al_2O_3 into aluminum is carried out by using a reduction environment and carbon at temperature below 200°C.
255. The process of any one of claims 127 to 254, wherein said conversion of Al_2O_3 into aluminum is carried out by means of the Wohler Process.
256. The process of any one of claims 127 to 254, wherein said conversion of Al_2O_3 into aluminum is carried out by converting Al_2O_3 into Al_2S_3 and then converting Al_2S_3 into aluminum.
257. A process for treating fly ash, the process comprising :

leaching said fly ash comprising a first metal with HCl so as to obtain a leachate comprising ions of said first metal and a solid, and separating the solid from the leachate;

reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising a chloride of the first metal, and separating the precipitate from the liquid; and

heating the precipitate under conditions effective for converting the chloride of the first metal into an oxide of the first metal.

258. A process for treating fly ash comprising :

leaching fly ash with an acid so as to obtain a leachate and a solid residue, and separating said leachate from said solid residue;

at least partially removing iron ions from said leachate by substantially selectively precipitating said iron ions at a pH greater than 10 by reacting said leachate with a base and at least partially removing said precipitated iron ions from said leachate, thereby obtaining an Al-rich composition comprising Al^{3+} ions;

optionally purifying said Al^{3+} ions; and

converting said Al^{3+} ions into alumina.

259. The process of claim 258, wherein said acid is HCl.

260. The process of claim 258 or 259, wherein said process comprises precipitating said Al^{3+} ions under the form of $Al(OH)_3$.

261. The process of claim 260, wherein precipitating said Al^{3+} under the form of $Al(OH)_3$ is carried out at a pH of about 7 to about 10;

262. The process of claim 261, wherein said pH is about 9 to about 10.

263. The process of claim 261, wherein said pH is about 9.2 to about 9.8.

264. The process of claim 261, wherein said pH is about 9.3 to about 9.7.

265. The process of claim 261, wherein said pH is about 9.5.

266. The process of claim 261, wherein said pH is about 7.5 to about 8.5.

267. The process of claim 261, wherein said pH is about 7.8 to about 8.2.

268. The process of claim 261, wherein said pH is about 8.
269. The process of any one of claims 258 to 268, wherein said iron ions are precipitated at a pH greater than 11.
270. The process of any one of claims 258 to 268, wherein said iron ions are precipitated at a pH greater than 12.
271. The process of any one of claims 258 to 268, wherein said iron ions are precipitated at a pH comprised between 10 and 11.
272. The process of any one of claims 258 to 268, wherein said iron ions are precipitated at a pH about 11.5 to about 12.5.
273. The process of any one of claims 258 to 268, wherein said iron ions are precipitated at a pH about 11.8 to about 12.0.
274. A process for treating fly ash comprising :

leaching fly ash with an acid so as to obtain a leachate and a solid residue, and separating said leachate from said solid residue;

at least partially removing iron ions from said leachate by substantially selectively precipitating said iron ions at a pH of about 3 to about 6 by reacting said leachate with a base and at least partially removing said precipitated iron ions from said leachate, thereby obtaining an Al-rich composition comprising Al^{3+} ions;

optionally purifying said Al^{3+} ions; and

converting said Al^{3+} ions into alumina.

275. The process of claim 274, wherein said iron ions are at least partially removed from said leachate by substantially selectively precipitating said iron ions at a pH of about 3.0 to about 5.5 by adding said base.
276. The process of claim 274, wherein said iron ions are at least partially removed from said leachate by substantially selectively precipitating said iron ions at a pH of about 3 to about 5 by adding said base.
277. The process of claim 274, wherein said iron ions are at least partially removed from said leachate by substantially selectively precipitating said iron ions at a pH of about 3 to about 4 by adding said base.
278. The process of claim 274, wherein said iron ions are at least partially removed from said leachate by substantially selectively precipitating said iron ions at a pH of about 3.0 to about 3.5 by adding said base.
279. The process of claim 274, wherein said iron ions are at least partially removed from said leachate by substantially selectively precipitating said iron ions at a pH of about 3.5 to about 4.0 by adding said base.
280. The process of claim 274, wherein said iron ions are at least partially removed from said leachate by substantially selectively precipitating said iron ions at a pH of about 4 to about 5 by adding said base.
281. The process of claim 274, wherein said iron ions are at least partially removed from said leachate by substantially selectively precipitating said iron ions at a pH of about 4.5 to about 5.0 by adding said base.
282. The process of claim 274, wherein said iron ions are at least partially removed from said leachate by substantially selectively precipitating said iron ions at a pH of about 5 to about 6 by adding said base.

283. The process of any one of claims 258 to 282, wherein said Al^{3+} ions are purified.
284. The process of claim 282, wherein said process comprises precipitating Al^{3+} ions under the form of AlCl_3 so as to purify the Al^{3+} ions.
285. The process of claims 284, wherein precipitating said AlCl_3 is carried out by crystallizing said AlCl_3 under the form of $\text{AlCl}_3 \bullet 6\text{H}_2\text{O}$.
286. The process of any one of claims 258 to 285, wherein said process comprises converting AlCl_3 into Al_2O_3 .
287. The process of any one of claims 258 to 286, wherein said process comprises converting AlCl_3 into Al_2O_3 under an inert gas atmosphere.
288. The process of any one of claims 258 to 285, wherein said process comprises converting AlCl_3 into Al_2O_3 under a nitrogen atmosphere.
289. A process for preparing aluminum comprising:
 - obtaining alumina produced by a process as defined in any one of claims 1 to 126 and 258 to 288; and
 - treating said alumina under conditions effective for converting it into aluminum.

1/7

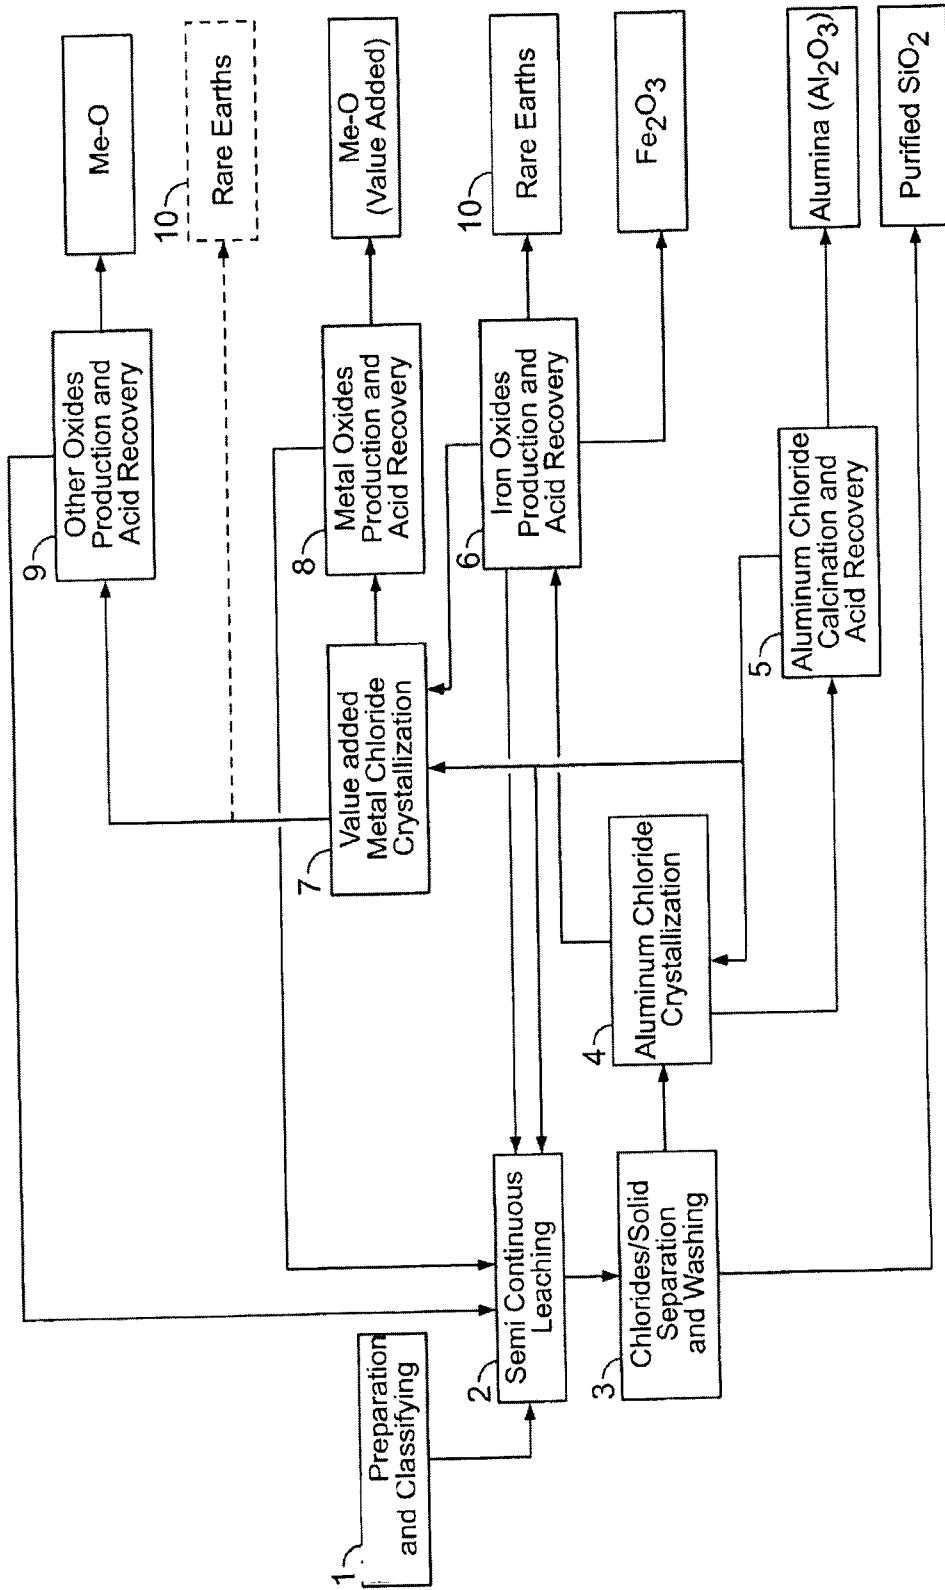


FIG. 1

2/7

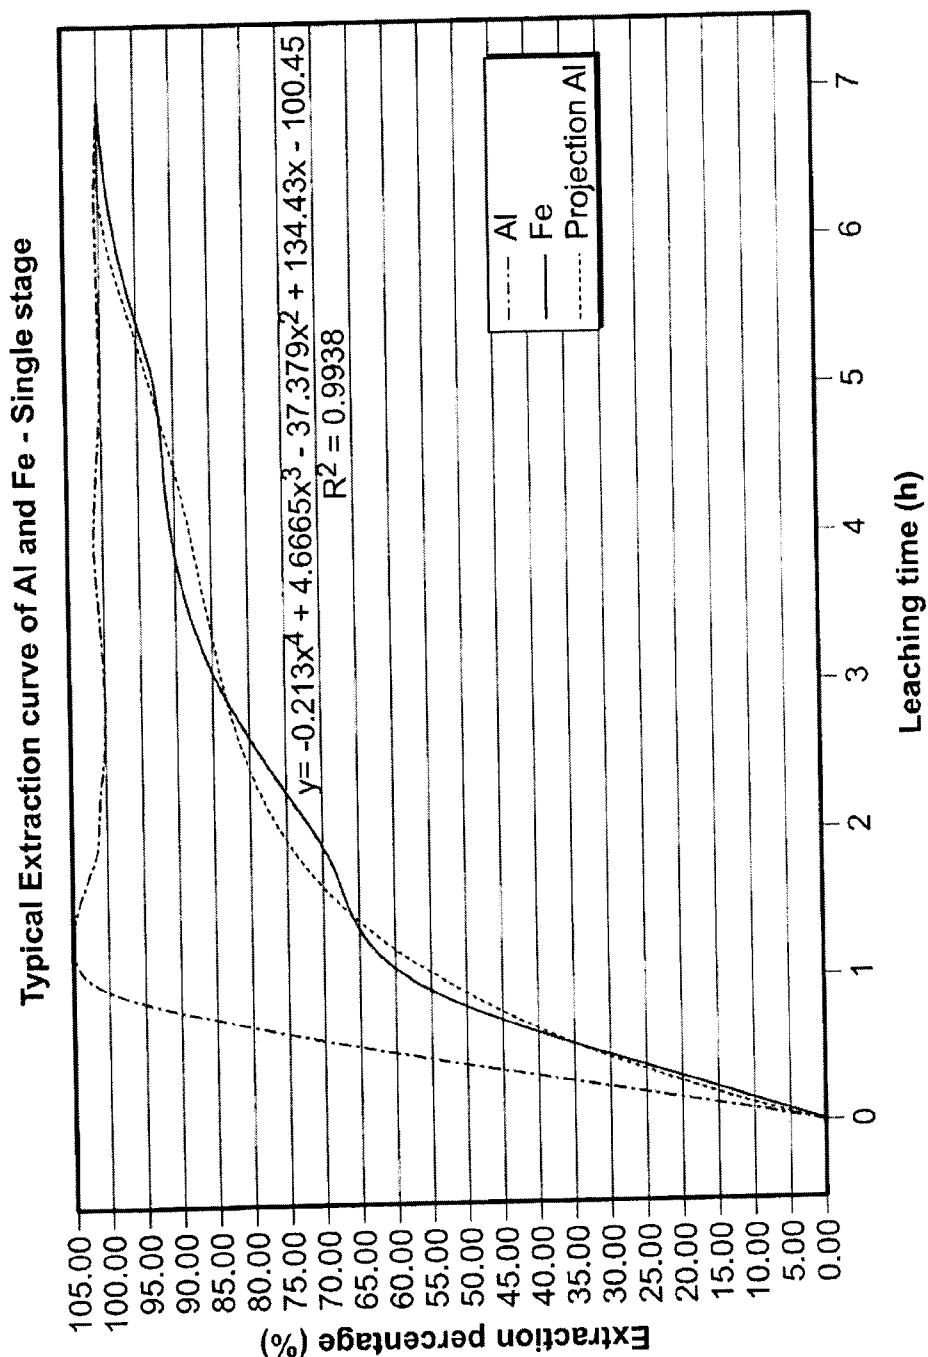


FIG. 2

3/7

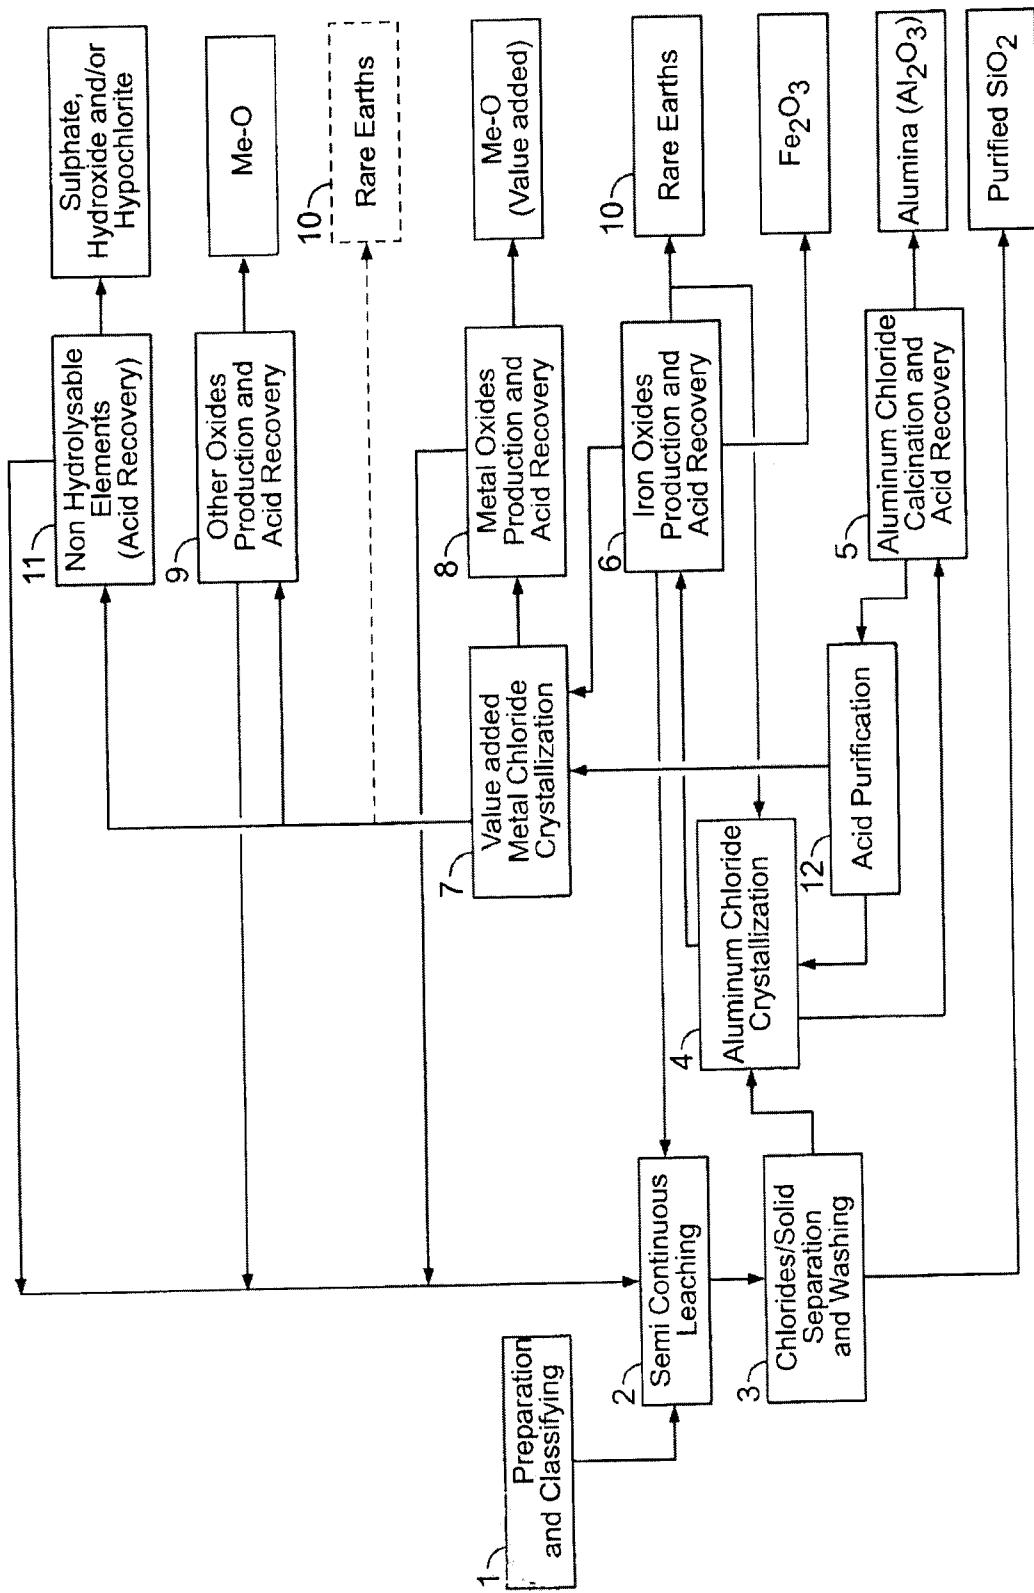


FIG. 3

4/7

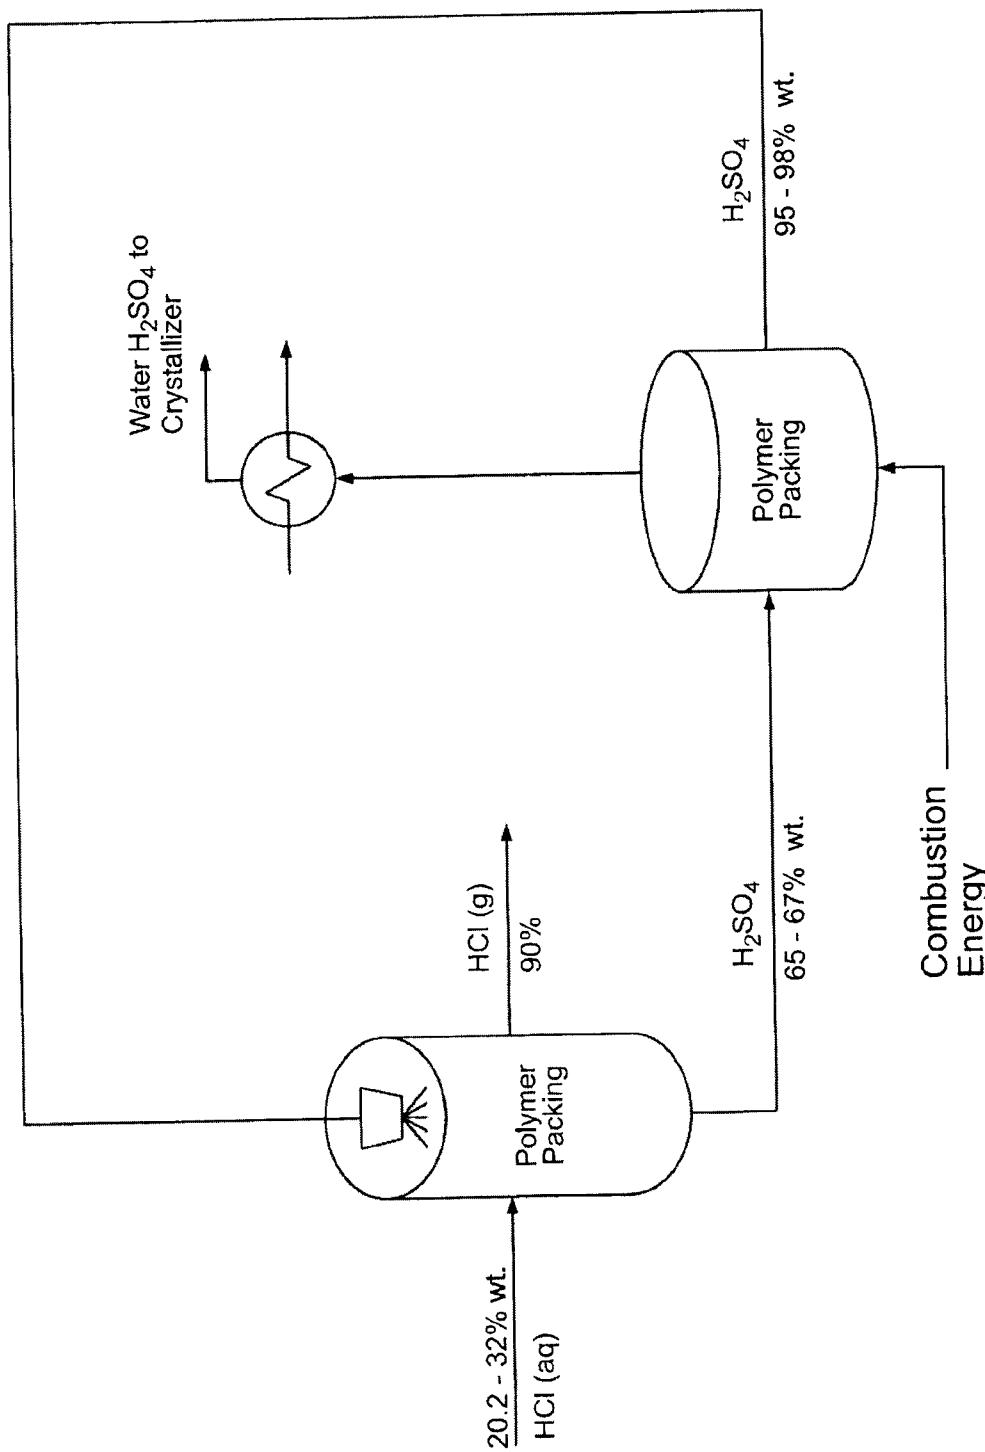


FIG. 4

5/7

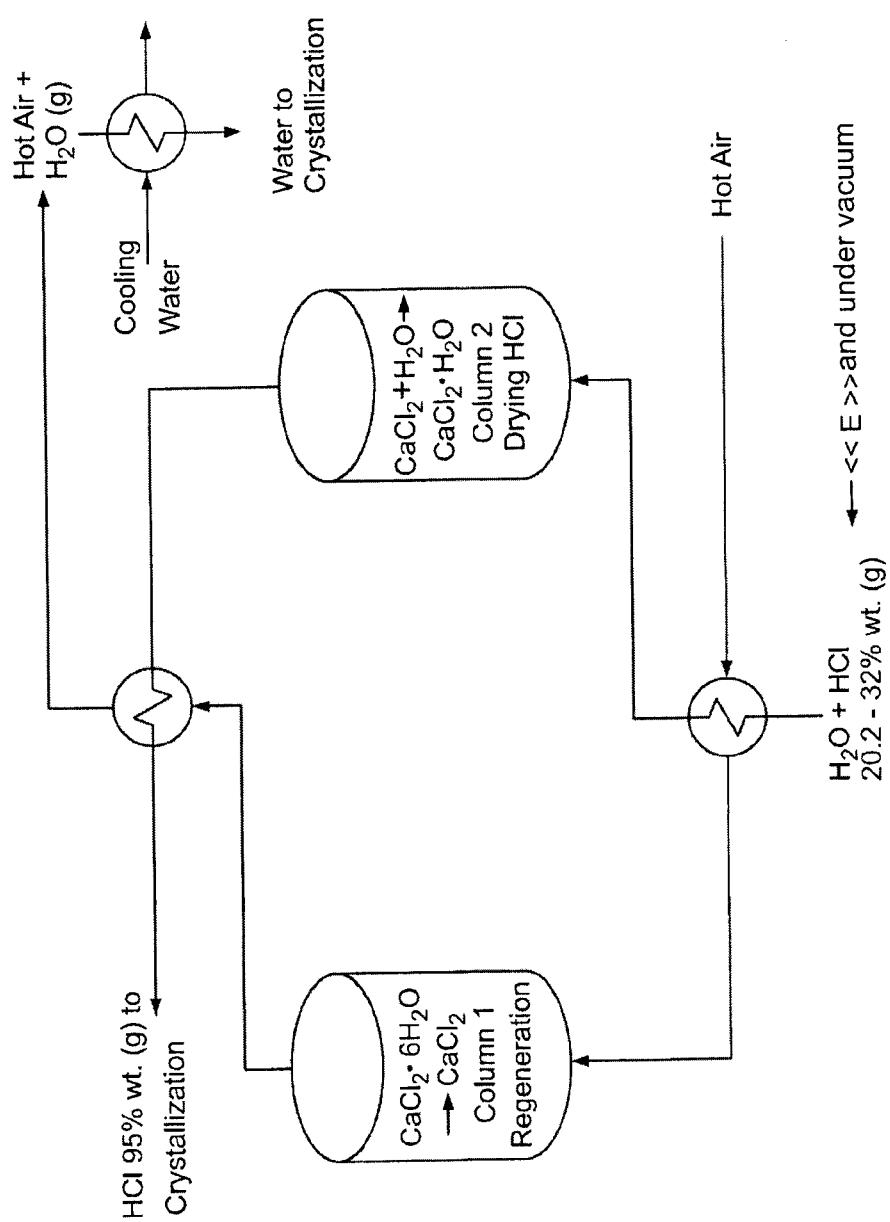


FIG. 5

6/7

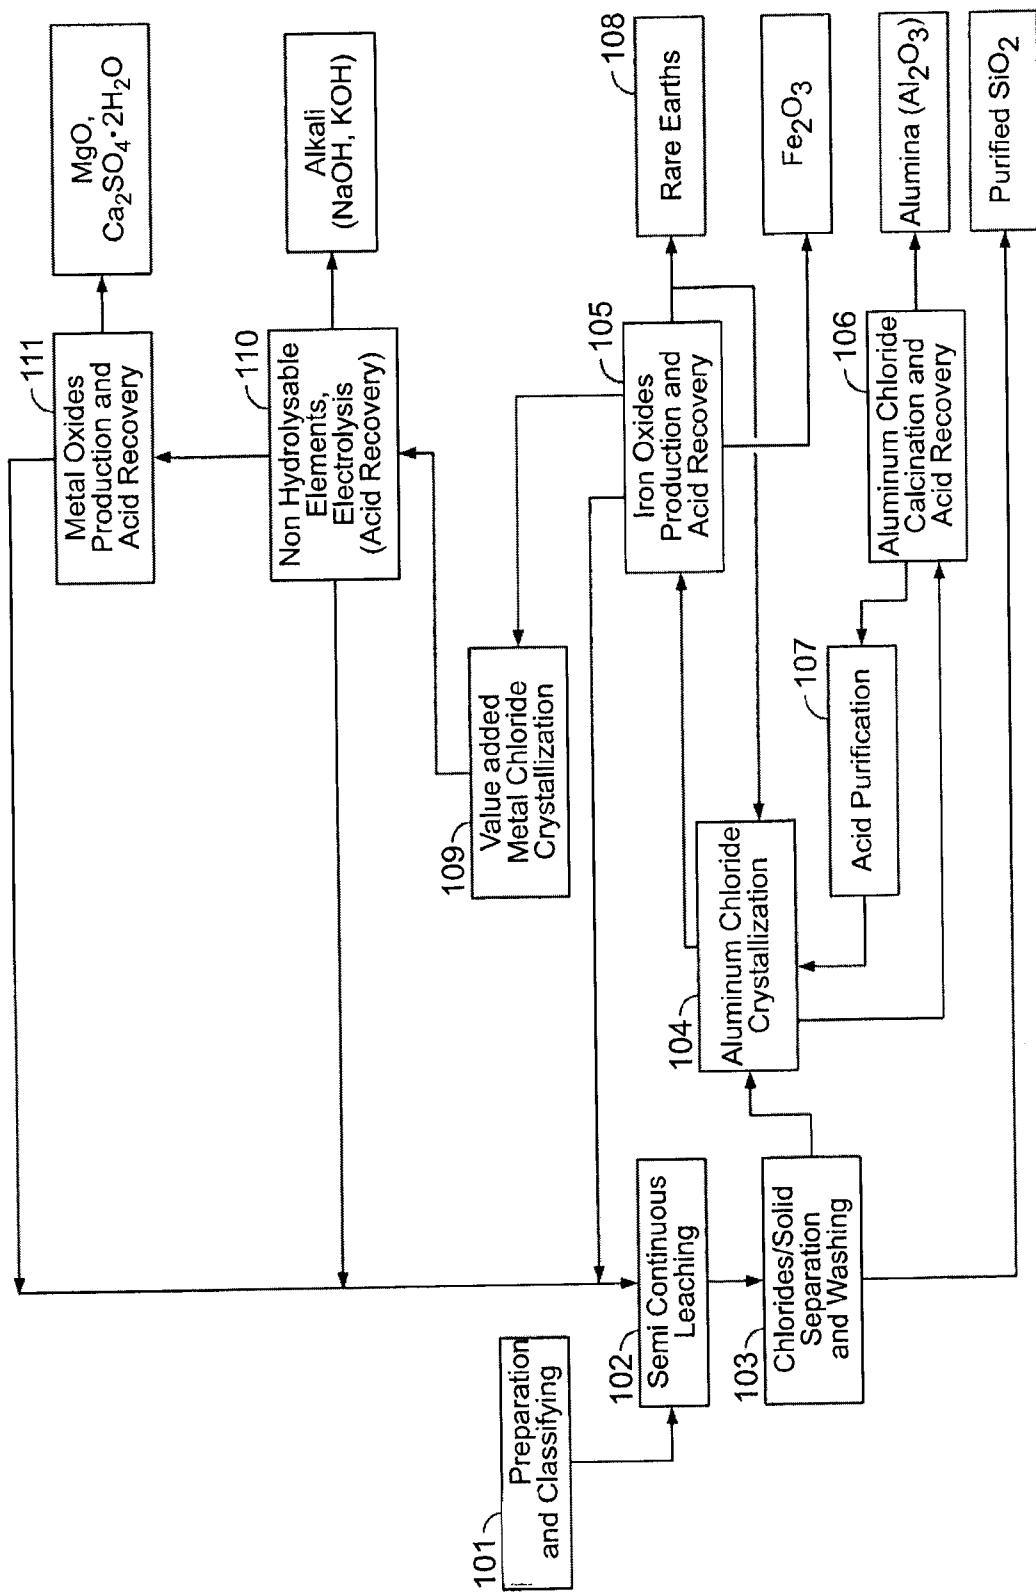


FIG. 6

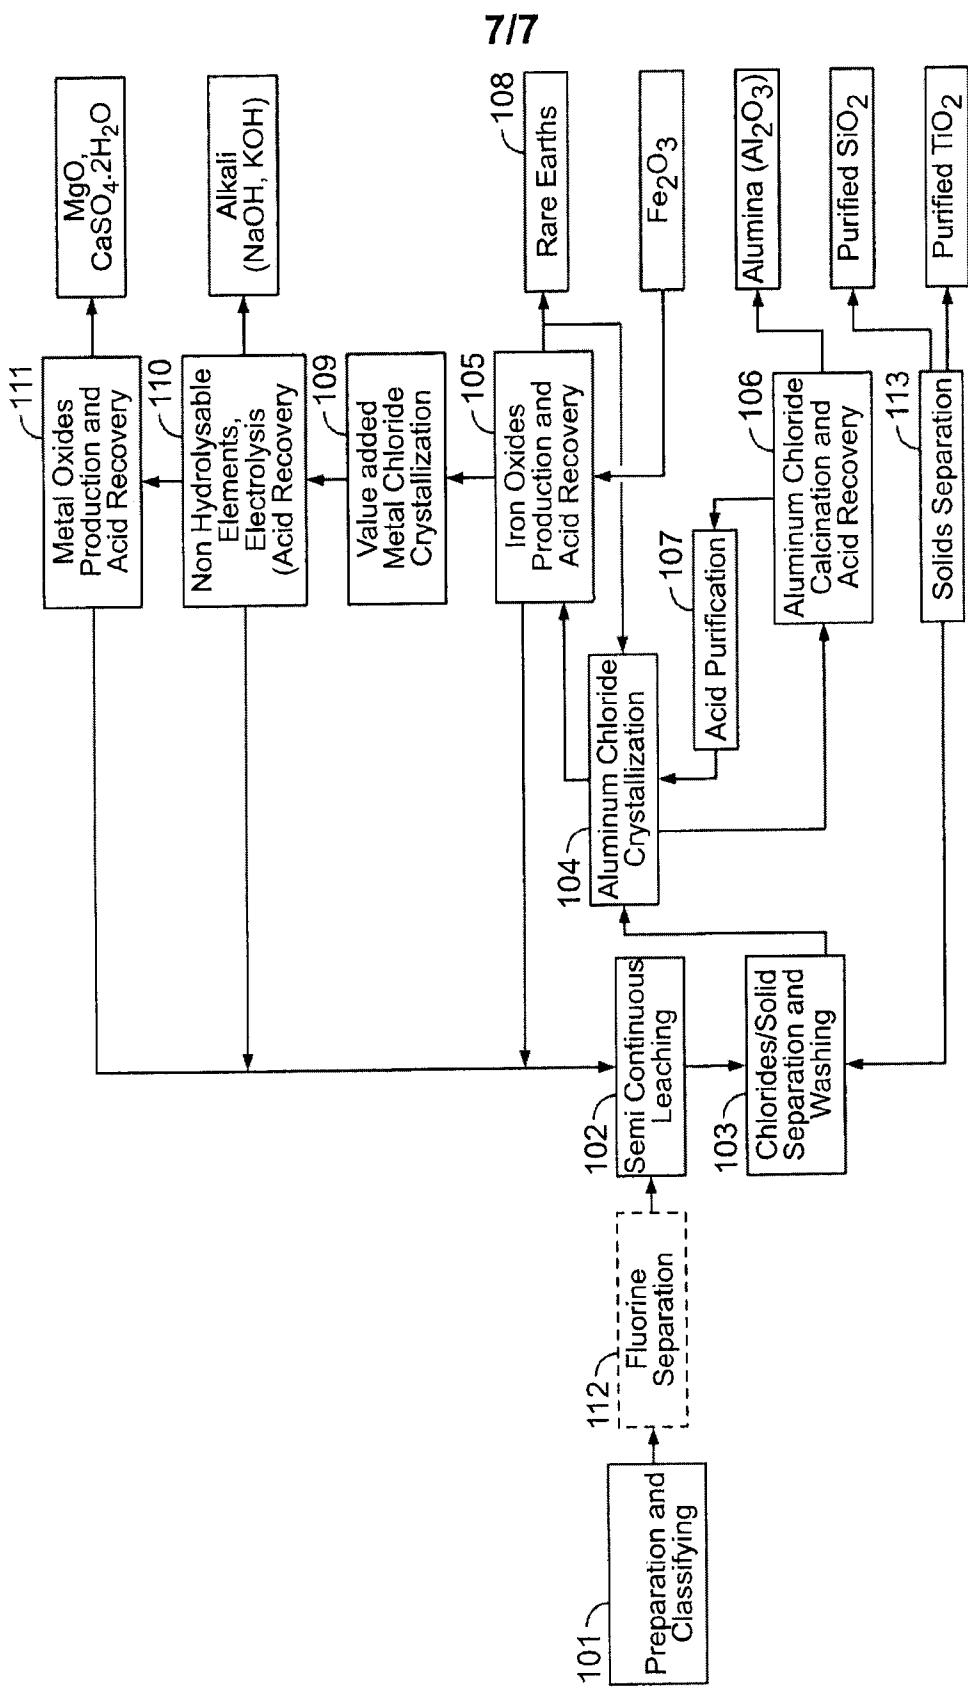


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2013/000218

A. CLASSIFICATION OF SUBJECT MATTER

IPC: **C01F 7/38** (2006.01), **A62D 3/36** (2007.01), **A62D 3/40** (2007.01), **B01D 53/14** (2006.01), **B01D 53/46** (2006.01), **C01B 7/00** (2006.01) (more IPCs on the last page)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: **C01F** (2006.01), **A62D** (2007.01), **B01D** (2006.01), **C01B** (2006.01), **C22B** (2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms)

Databases: Canadian Patent Database (CPD), TotalPatent, Scopus, EPODOC

Keywords: (fly or coal or flue) w/2 ash, alumina or al2o3 or (alumin?um w/2 chloride) or alcl3, HCl or hydrochloric

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant	Relevant to claim No.
X	CA 2 797 561 A1 (GUO et al.) 3 November 2011 (03-11-2011)	1-26, 45-256, 289
-	*see abstract; page 1, [0002]; page 4, [0010]; page 6, [0025]; page 8,	-
Y	[0034]; page 9, [0035]; examples	27-44, 127-256, 289
X	US 4,652,433 A (ASHWORTH et al.) 24 March 1987 (24-03-1987)	1-26, 45-256, 289
-	*see abstract; col. 2, line 45 to col. 3, line 20; col. 5, lines 56-64; col. 6,	-
Y	lines 13-14; col. 10, lines 24-42; col. 10, line 57 to col. 11, line 3; Tables 5 and 6	27-44, 127-256, 289
X	CA 2 240 067 A1 (NEHARI et al.) 26 June 1997 (26-06-1997)	1-26, 45-256, 289
-	*claim 1; Figure 1; examples; page 3, line 25 - page 4, line 3; page 5,	-
Y	lines 8-10; page 5, line 31; page 6, lines 8-17	27-44, 127-256, 289
D, Y	WO2009/153321 A1 (TAKAHASHI et al.) 23 December 2009 (23-12-2009) *see page 1, paragraphs 1 and 3; and claim 1	27-44, 153-170

Further documents are listed in the continuation of Box

See patent family annex.

*	Special categories of cited documents :	
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

6 June 2013 (06-06-2013)

Date of mailing of the international search report

03 July 2013 (03-07-2013)

Name and mailing address of the ISA/CA
Canadian Intellectual Property Office
Place du Portage I, C114 - 1st Floor, Box PCT
50 Victoria Street
Gatineau, Quebec K1A 0C9
Facsimile No.: 001-819-953-2476

Authorized officer

Heather Hurley (819) 994-0472

INTERNATIONAL SEARCH REPORTInternational application No.
PCT/CA2013/000218

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
D, Y	US 5,876,584 A (CORTELLINI) 2 March 1999 (02-03-1999) *see abstract	127-256 and 289
D, Y	US 6,565,733 B1 (SPORTEL et al.) 20 May 2003 (20-05-2003) *see abstract	127-256 and 289
E, X	WO 2013/037054 A1 (BOUDREAUET al.) 21 March 2013 (21-03-2013) *whole document	1-256, 289
P, X	WO 2012/126092 A1 (BOUDREAUET al.) 27 September 2012 (27-09-2012) *whole document	1-256, 289
P, X	WO 2012/149642 A1 (BOUDREAUET al.) 8 November 2012 (08-11-2012) *whole document	1-256, 289

INTERNATIONAL SEARCH REPORTInternational application No.
PCT/CA2013/000218**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of the first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons :

1. Claim Nos. :
because they relate to subject matter not required to be searched by this Authority, namely :

2. Claim Nos. :
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically :

3. Claim Nos. :
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows :

See supplemental box

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claim Nos. :

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim Nos. : 1-256 and 289 (in part)

Remark on Protest The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

No protest accompanied the payment of additional search fees.

The claims are directed to a plurality of inventive concepts as follows:

Group A: Claims 1-256 and 289 (in part) are directed to a process comprising:

- leaching fly ash with HCl so as to obtain a leachate comprising aluminum ions and a solid and separating said solid from said leachate;
- reacting said leachate with HCl so as to obtain a liquid and a precipitate comprising said aluminum ions in the form of AlCl_3 and separating said precipitate from said liquid;
- heating said precipitate under conditions effective for converting AlCl_3 into Al_2O_3 and optionally recovering gaseous HCl so-produced; and
- optionally converting said Al_2O_3 into aluminum;

Group B: Claim 257 is directed to a process comprising:

- leaching fly ash comprising a first metal with HCl so as to obtain a leachate comprising ions of said first metal and a solid and separating the solid from the leachate;
- reacting the leachate with HCl so as to obtain a liquid and a precipitate comprising a chloride of the first metal and separating the precipitate from the liquid; and
- heating the precipitate under conditions effective for converting the chloride of the first metal into an oxide of the first metal;

Group C: Claims 258-273 and 289(in part) are directed to a process comprising:

- leaching fly ash with an acid so as to obtain a leachate and a solid residue and separating said leachate from said solid residue;
- at least partially removing iron ions from said leachate by substantially selectively precipitating said iron ions at a pH greater than 10 by reacting said leachate with a base and at least partially removing said precipitated iron ions from said leachate, thereby obtaining an Al-rich composition comprising Al^{3+} ions;
- optionally purifying said Al^{3+} ions;
- converting said Al^{3+} ions into alumina; and
- optionally converting alumina into aluminum; and

Group D: Claims 274-288 and 289(in part) are directed to a process comprising:

- leaching fly ash with an acid so as to obtain a leachate and a solid residue and separating said leachate from said solid residue;
- at least partially removing iron ions from said leachate by substantially selectively precipitating said iron ions at a pH of about 3 to about 6 by reacting said leachate with a base and at least partially removing said precipitated iron ions from said leachate, thereby obtaining an Al-rich composition comprising Al^{3+} ions;
- optionally purifying said Al^{3+} ions;
- converting said Al^{3+} ions into alumina; and
- optionally converting alumina into aluminum.

The unifying feature linking each of the claims is:

A process for treating fly ash comprising: leaching fly ash with an acid so as to obtain a metal ion-containing leachate and a solid residue, and separating said leachate from said solid residue; and converting the metal ions into their respective metal oxides.

The unifying feature is known from:

D1: CA 2 797 561 A1 (GUO et al.) 3 November 2011 (03-11-2011)
D2: US 4,652,433 A (ASHWORTH et al.) 24 March 1987 (24-03-1987)
D3: CA 2 240 067 A1 (NEHARI et al.) 26 June 1997 (26-06-1997)

D1 discloses a method of forming alumina from fly ash comprising:

- reacting the fly ash with HCl to obtain a hydrochloric leachate;
- passing the leachate through a column to obtain a refined AlCl_3 solution;
- concentrating and crystallizing the refined AlCl_3 ; and
- calcining the AlCl_3 crystals into alumina (see abstract).

D2 discloses a method of treating coal ash comprising:

- leaching mineral values from the ash at a temperature of from 70-110°C and at a pressure of 10-20 psia (see col. 5, lines 60-64);
- separating the solids from the leachate by solids settling and decanting (see col. 6, lines 1-4);
- concentrating and filtering the AlCl_3 crystals formed therein (see col. 9, lines 16-22 and col. 10, lines 24-32); and
- calcining the AlCl_3 crystals into alumina (see col. 10, lines 34-39)

D3 discloses a method for treating aluminosilicates, such as fly ash, comprising:

- leaching the treated aluminosilicate with HCl to form a leachate comprising AlCl_3 ;
- separating the solids from the leachate;
- crystallizing the AlCl_3 from the solution; and
- recovering alumina from the crystallized AlCl_3 (see page 3, line 25 - page 4, line 3 and page 5, lines 8-10).

Since the common unifying feature is not inventive in view of **D1-D3**, the claimed subject-matter is not considered unified across the entire claim set. Accordingly, the claims do not comply with Rule 13 of the PCT for failing to be limited to one inventive concept.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2013/000218

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
CA2797561A1	03 November 2011 (03-11-2011)	AU2011247702A1 CN101811712A CN102145905A CN102145905B DE112011101459T5 GB201219972D0 GB2494557A KR20130029773A US2013115149A1 WO2011134398A1	06 December 2012 (06-12-2012) 25 August 2010 (25-08-2010) 10 August 2011 (10-08-2011) 25 July 2012 (25-07-2012) 07 March 2013 (07-03-2013) 19 December 2012 (19-12-2012) 13 March 2013 (13-03-2013) 25 March 2013 (25-03-2013) 09 May 2013 (09-05-2013) 03 November 2011 (03-11-2011)
US4652433A	24 March 1987 (24-03-1987)	None	
CA2240067A1	26 June 1997 (26-06-1997)	AT182128T AU713938B2 AU7707996A BR9612010A CN1207719A CN1085622C CZ9801849A3 DE69603289D1 DE69603289T2 EP0866769A1 EP0866769B1 ES2134649T3 HK1014923A1 HU0001163A2 HU0001163A3 IL116409D0 IL116409A JP2000505034A RU2176984C2 US5993758A WO9722554A1 ZA9610486A	15 July 1999 (15-07-1999) 16 December 1999 (16-12-1999) 14 July 1997 (14-07-1997) 28 December 1999 (28-12-1999) 10 February 1999 (10-02-1999) 29 May 2002 (29-05-2002) 17 March 1999 (17-03-1999) 19 August 1999 (19-08-1999) 09 December 1999 (09-12-1999) 30 September 1998 (30-09-1998) 14 July 1999 (14-07-1999) 01 October 1999 (01-10-1999) 20 April 2000 (20-04-2000) 28 August 2000 (28-08-2000) 30 July 2001 (30-07-2001) 31 March 1996 (31-03-1996) 30 November 1999 (30-11-1999) 25 April 2000 (25-04-2000) 20 December 2001 (20-12-2001) 30 November 1999 (30-11-1999) 26 June 1997 (26-06-1997) 24 June 1997 (24-06-1997)
WO2009153321A1	23 December 2009 (23-12-2009)	AU2009259366A1 CA2728504A1 CN102066262A EP2310323A1 EP2310323B1 ES2391743T3 JP2010024136A MX2010013443A RU2011101736A US2011158869A1	23 December 2009 (23-12-2009) 23 December 2009 (23-12-2009) 18 May 2011 (18-05-2011) 20 April 2011 (20-04-2011) 06 June 2012 (06-06-2012) 29 November 2012 (29-11-2012) 04 February 2010 (04-02-2010) 21 April 2011 (21-04-2011) 27 July 2012 (27-07-2012) 30 June 2011 (30-06-2011)
US5876584A	02 March 1999 (02-03-1999)	AT178105T AU698926B2 AU5874096A BR9608828A CA2219890A1 CA2219890C CN1185815A CN1078267C DE69601870D1 DE69601870T2 EP0828866A1 EP0828866B1 NO975404A NO975404D0 NO318238B1 NZ308879A RU2133302C1 US5560809A	15 April 1999 (15-04-1999) 12 November 1998 (12-11-1998) 11 December 1996 (11-12-1996) 15 June 1999 (15-06-1999) 28 November 1996 (28-11-1996) 14 August 2001 (14-08-2001) 24 June 1998 (24-06-1998) 23 January 2002 (23-01-2002) 29 April 1999 (29-04-1999) 26 August 1999 (26-08-1999) 18 March 1998 (18-03-1998) 24 March 1999 (24-03-1999) 25 November 1997 (25-11-1997) 25 November 1997 (25-11-1997) 21 February 2005 (21-02-2005) 25 November 1998 (25-11-1998) 20 July 1999 (20-07-1999) 01 October 1996 (01-10-1996)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2013/000218

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US5876584A (continued)	02 March 1999 (02-03-1999)	NZ308879A RU2133302C1 US5560809A WO9637637A1	25 November 1998 (25-11-1998) 20 July 1999 (20-07-1999) 01 October 1996 (01-10-1996) 28 November 1996 (28-11-1996)
US6565733B1	20 May 2003 (20-05-2003)	AT305985T AU761852B2 AU2284500A CA2355662A1 CA2355662C DE19983811T1 DE69927605D1 DE69927605T2 EP1141425A1 EP1141425B1 ES2251257T3 JP2003528976A JP4416953B2 NO20013011D0 NO20013011A NO331582B1 RU2233897C2 WO0037691A1	15 October 2005 (15-10-2005) 12 June 2003 (12-06-2003) 12 July 2000 (12-07-2000) 29 June 2000 (29-06-2000) 25 July 2006 (25-07-2006) 28 February 2002 (28-02-2002) 16 February 2006 (16-02-2006) 03 August 2006 (03-08-2006) 10 October 2001 (10-10-2001) 05 October 2005 (05-10-2005) 16 April 2006 (16-04-2006) 30 September 2003 (30-09-2003) 17 February 2010 (17-02-2010) 18 June 2001 (18-06-2001) 17 August 2001 (17-08-2001) 30 January 2012 (30-01-2012) 10 August 2004 (10-08-2004) 29 June 2000 (29-06-2000)
WO2013037054A1	21 March 2013 (21-03-2013)	AU2012231686A1 AU2012250460A1 AU2012308068A1 WO2012126092A1 WO2012149642A1	18 April 2013 (18-04-2013) 02 May 2013 (02-05-2013) 09 May 2013 (09-05-2013) 27 September 2012 (27-09-2012) 08 November 2012 (08-11-2012)
WO2012126092A1	27 September 2012 (27-09-2012)	AU2012231686A1 AU2012250460A1 AU2012308068A1 WO2012149642A1 WO2013037054A1	18 April 2013 (18-04-2013) 02 May 2013 (02-05-2013) 09 May 2013 (09-05-2013) 08 November 2012 (08-11-2012) 21 March 2013 (21-03-2013)
WO2012149642A1	08 November 2012 (08-11-2012)	AU2012231686A1 AU2012250460A1 AU2012308068A1 WO2012126092A1 WO2013037054A1	18 April 2013 (18-04-2013) 02 May 2013 (02-05-2013) 09 May 2013 (09-05-2013) 27 September 2012 (27-09-2012) 21 March 2013 (21-03-2013)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2013/000218

C01F 7/56 (2006.01) , *C22B 21/02* (2006.01) , *C22B 3/10* (2006.01) , *C22B 3/44* (2006.01) ,
C22B 7/02 (2006.01)