

(12) **United States Patent**
Roussel

(10) **Patent No.:** **US 11,459,205 B2**
(45) **Date of Patent:** **Oct. 4, 2022**

(54) **CORRUGATED CABLE DISPENSER**

(71) Applicant: **Belden Inc.**, St. Louis, MO (US)
(72) Inventor: **Wayne Roussel**, Mooreland, IN (US)
(73) Assignee: **BELDEN, INC.**, St. Louis, MO (US)
(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 797 days.

(21) Appl. No.: **16/037,691**
(22) Filed: **Jul. 17, 2018**

(65) **Prior Publication Data**
US 2019/0023521 A1 Jan. 24, 2019

Related U.S. Application Data
(60) Provisional application No. 62/535,670, filed on Jul. 21, 2017.

(51) **Int. Cl.**
B65H 49/32 (2006.01)
B65H 75/22 (2006.01)
B65D 85/04 (2006.01)

(52) **U.S. Cl.**
CPC **B65H 49/322** (2013.01); **B65D 85/04** (2013.01); **B65H 49/321** (2013.01); **B65H 75/22** (2013.01); **B65H 2701/34** (2013.01); **B65H 2701/5112** (2013.01)

(58) **Field of Classification Search**
CPC B65H 49/322; B65H 49/321; B65H 75/22; B65H 49/08; B65D 85/04; B65D 85/876; B65D 83/0481; B65D 83/0805; B65D 83/0804; B65D 5/16; B65D 5/323; B65D 5/18
USPC 206/395, 702, 225-6, 389, 392; 242/149; 229/122, 122.21, 122.23, 103.2
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,168,778 A *	9/1979	Buxton	B65D 85/676
				206/397
5,529,186 A *	6/1996	Bass	B65H 49/322
				206/395
5,704,479 A *	1/1998	Barnett	B65H 49/322
				206/416
6,276,623 B1 *	8/2001	Williams	B65H 49/322
				206/395
6,805,239 B2 *	10/2004	Smarr	B65D 85/66
				206/397
6,896,424 B2 *	5/2005	Hara	G03C 3/00
				206/397
8,662,433 B2 *	3/2014	Huffman	B65D 5/16
				242/171


(Continued)

Primary Examiner — Rafael A Ortiz
Assistant Examiner — Sanjidul Islam
(74) *Attorney, Agent, or Firm* — Foley & Lardner LLP

(57) **ABSTRACT**

The present disclosure describes methods of manufacture and implementations of cable storage and dispensing systems combining the advantages of reel-based systems and box-based systems. The present system may be manufactured entirely out of corrugated cardboard or similar materials, reducing expense and weight compared to systems with wood, plastic, or metal reels or flanges, and adding recyclability in a single paper-based waste stream. The system may dispense cable in the same manner as reel-based systems, reducing tangling and aiding installation and deployment compared to box-based systems that do not utilize reels or spools. The system does not require the use of reel stands or other external components, and may be light and portable.

18 Claims, 9 Drawing Sheets

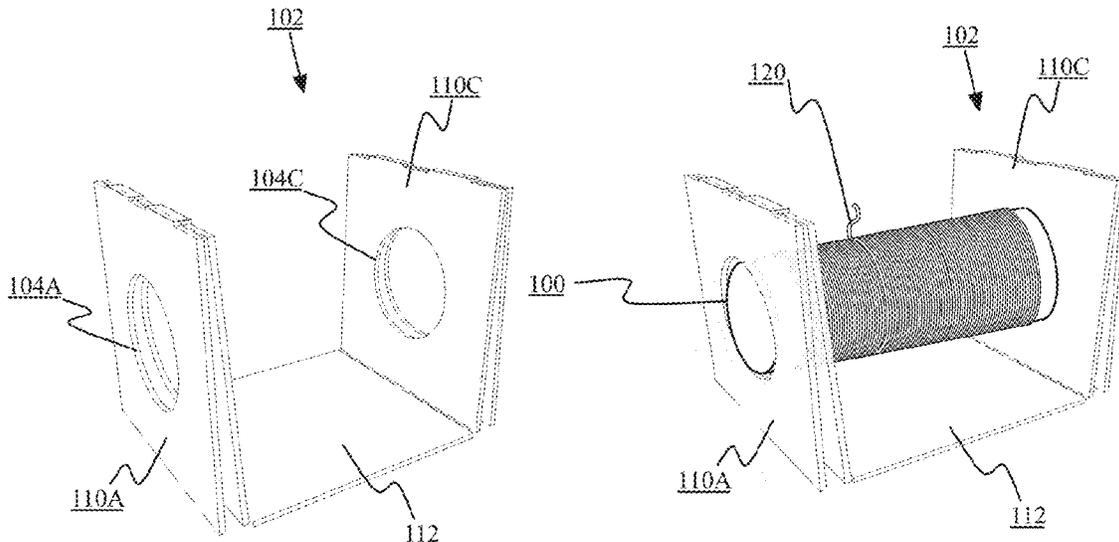

(56)

References Cited

U.S. PATENT DOCUMENTS

2002/0088896 A1* 7/2002 Gordon B65H 75/22
242/610.2
2002/0125161 A1* 9/2002 Cote B65D 85/04
206/408
2004/0102870 A1* 5/2004 Andersen G06K 7/10336
700/215
2008/0236102 A1* 10/2008 Murakami B65B 25/146
53/405
2012/0318939 A1* 12/2012 Galgano B65H 49/325
248/127
2013/0292284 A1* 11/2013 Burke B65D 85/672
493/391
2014/0263815 A1* 9/2014 LaFontaine B65H 49/322
242/594.5
2015/0203324 A1* 7/2015 Meachum B65H 49/205
242/588.6
2017/0320689 A1* 11/2017 Ellis B65H 49/325

* cited by examiner

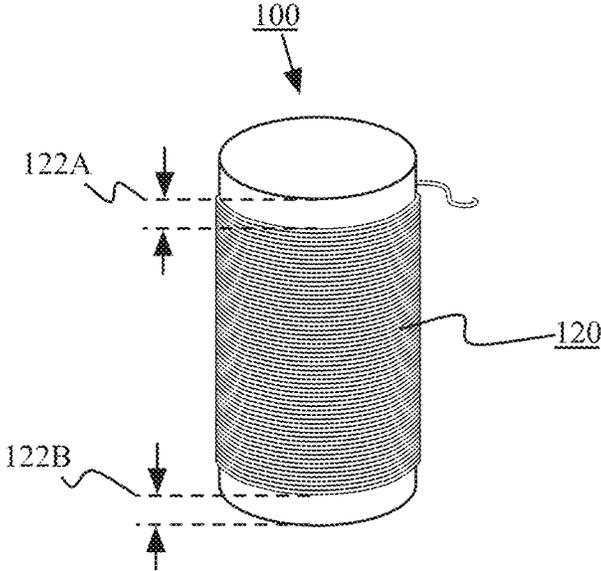


FIG. 1D

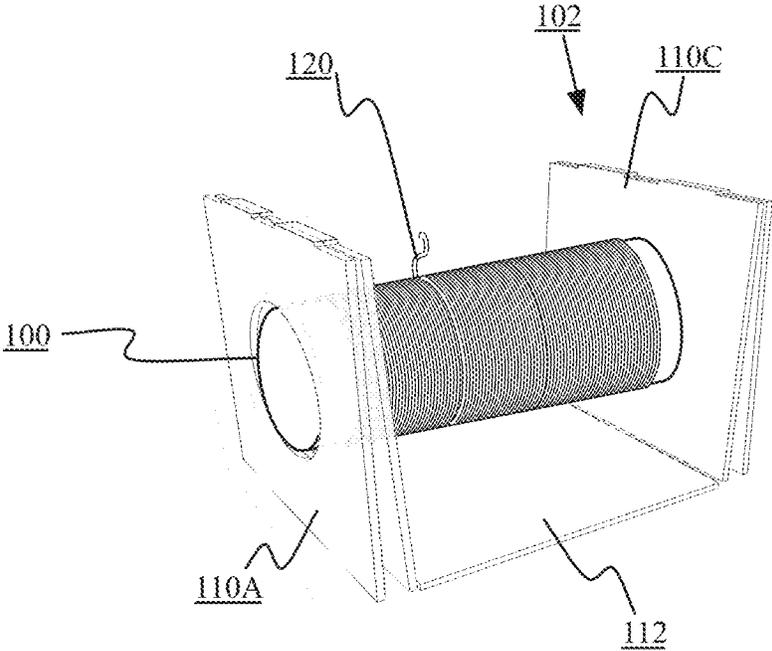


FIG. 1E

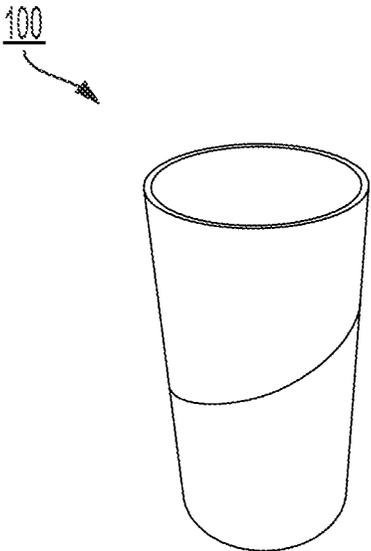


FIG. 2A

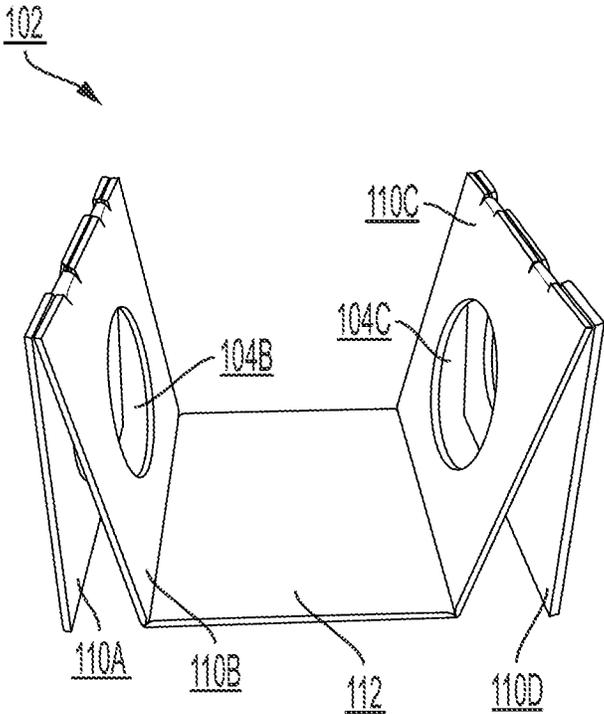


FIG. 2B

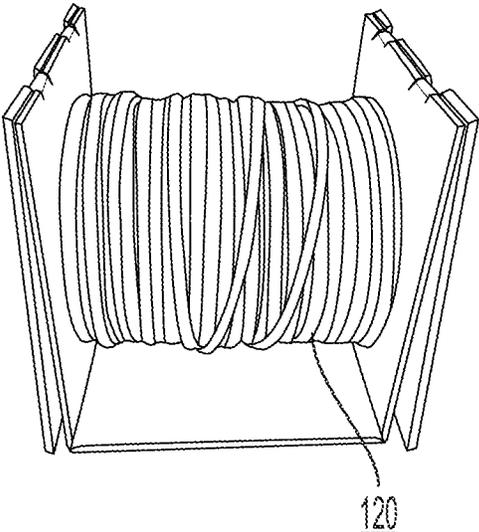


FIG. 2C

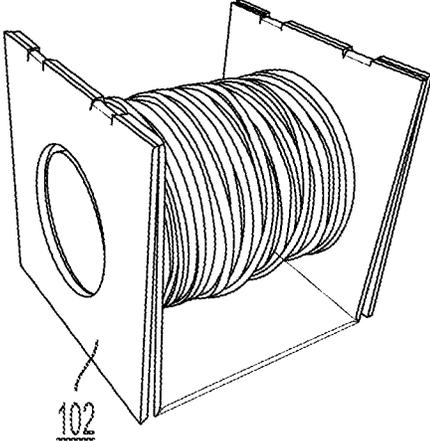


FIG. 2D

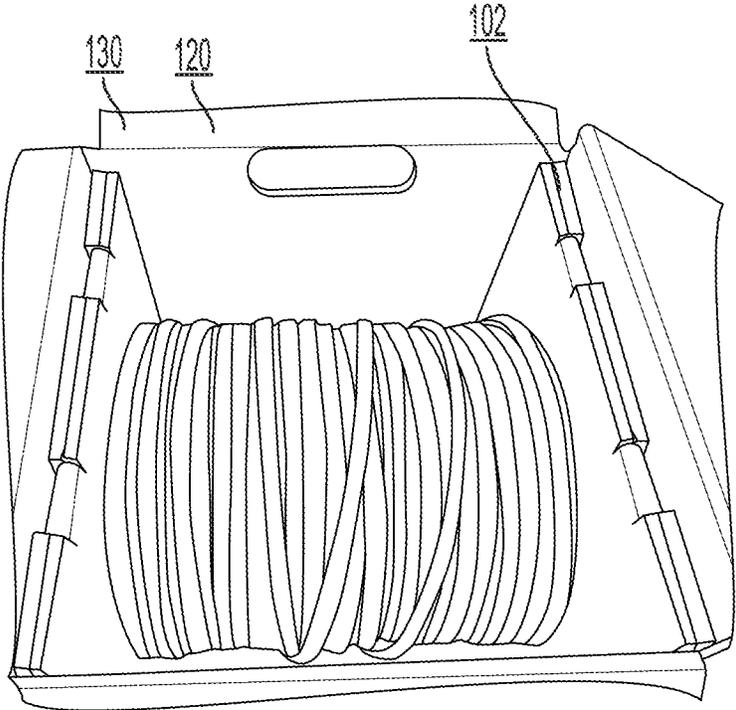


FIG. 2E



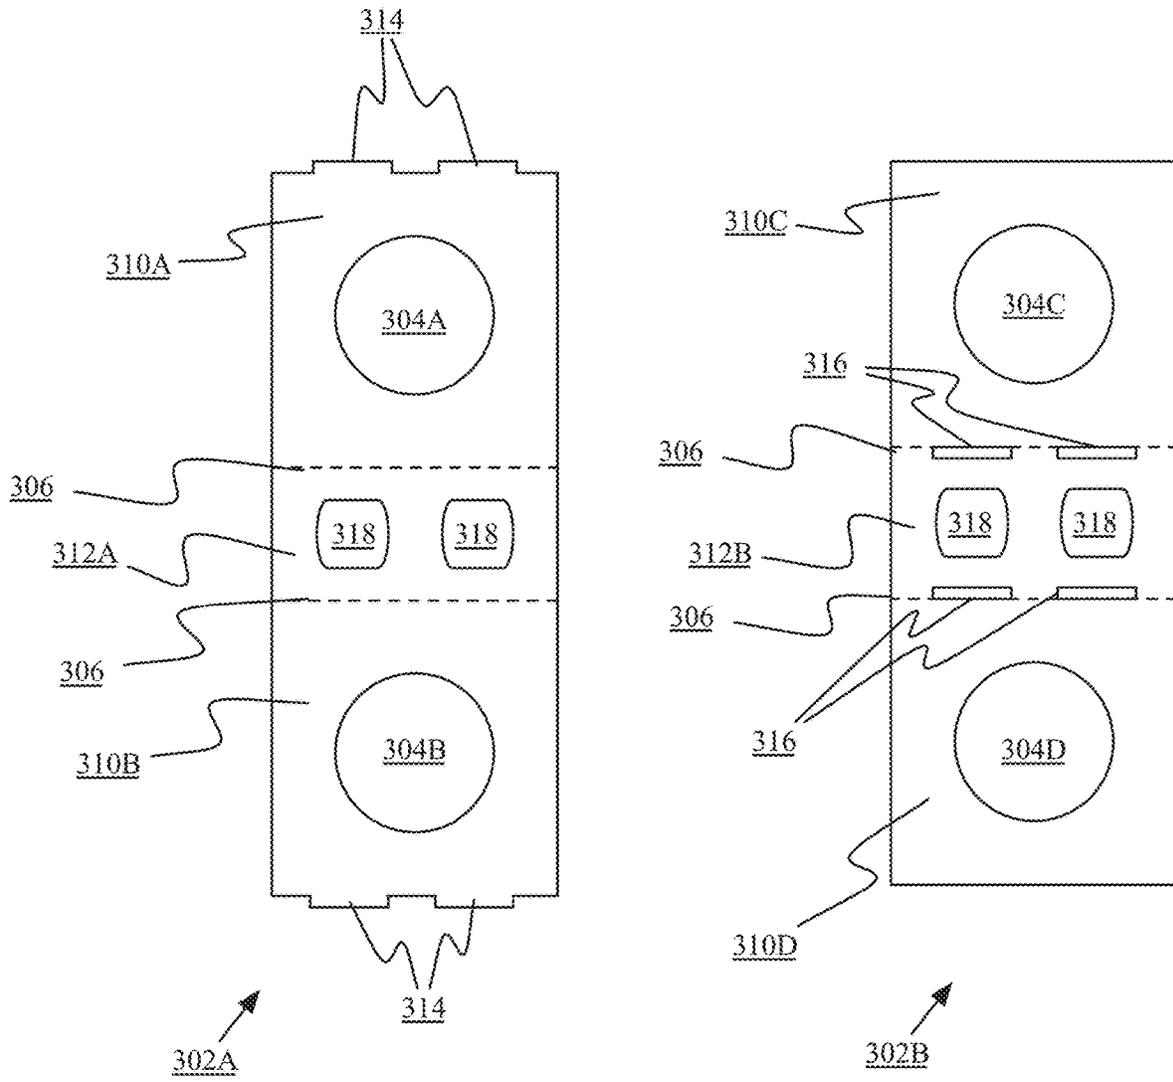


FIG. 3A

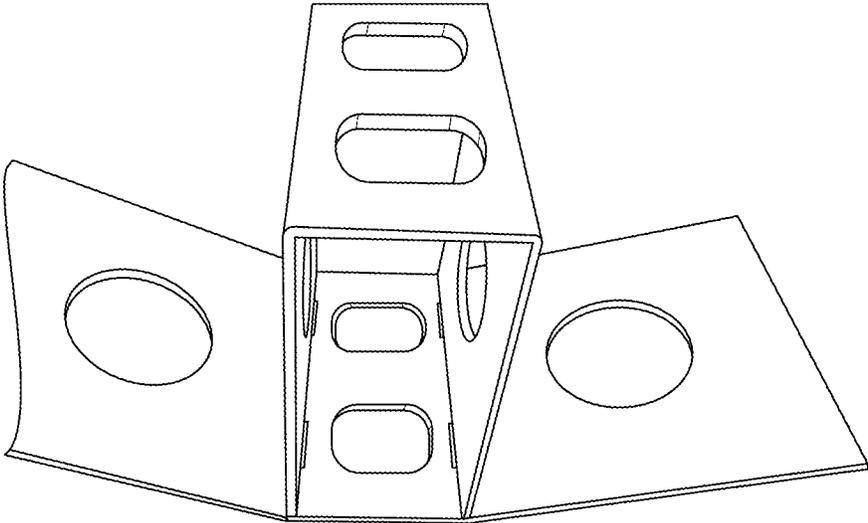

302

FIG. 3B

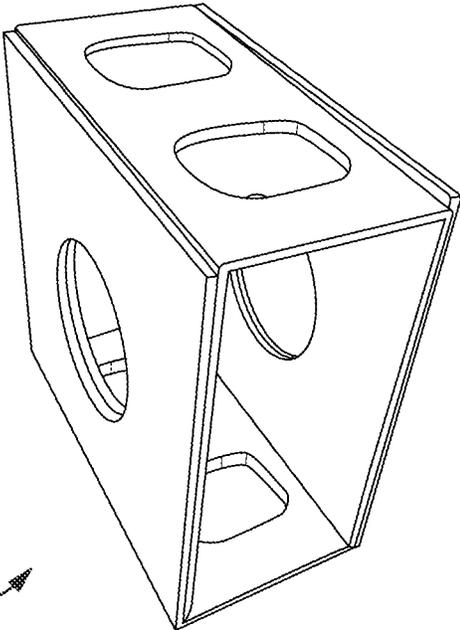

302

FIG. 3C

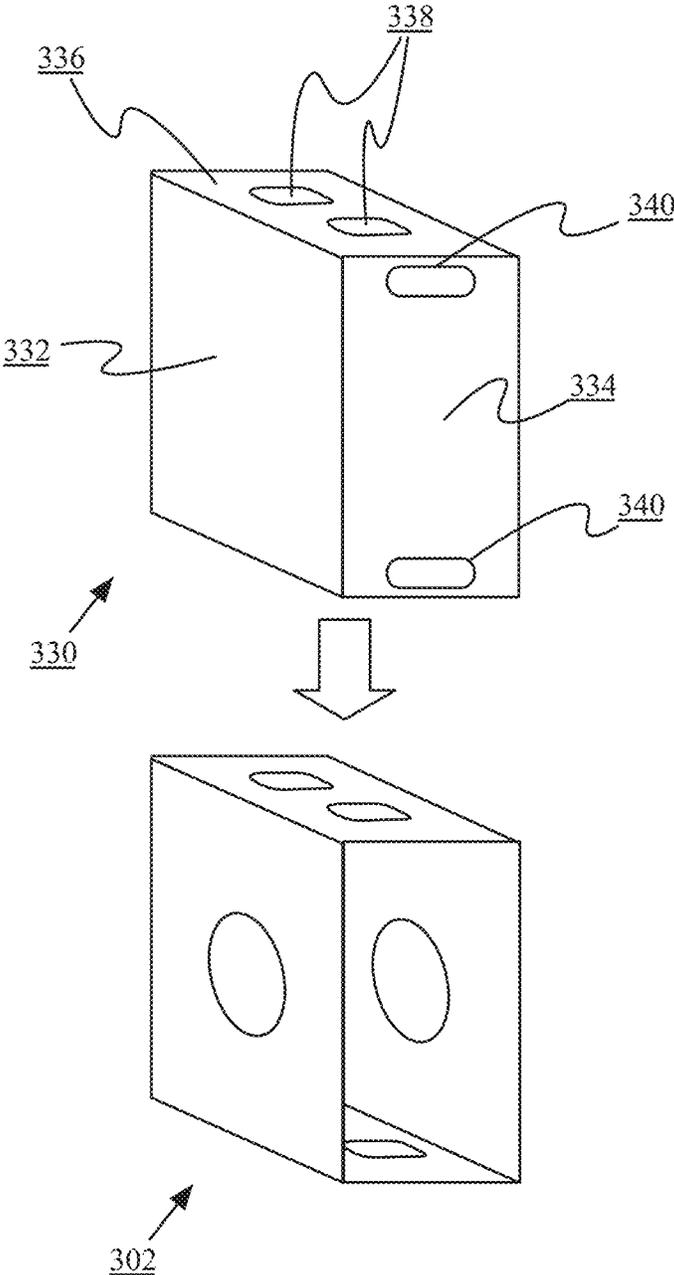


FIG. 3D

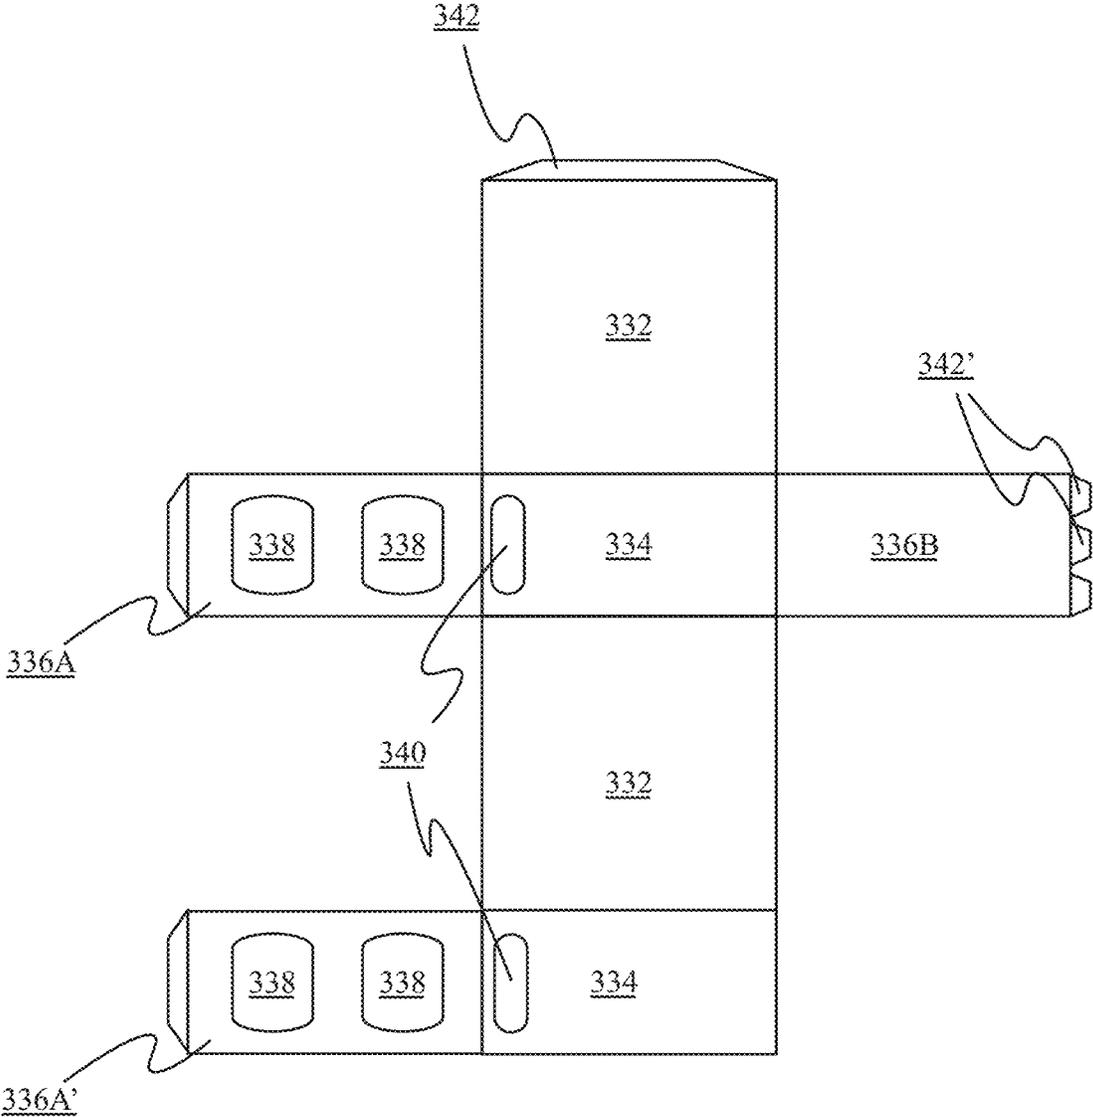


FIG. 3E

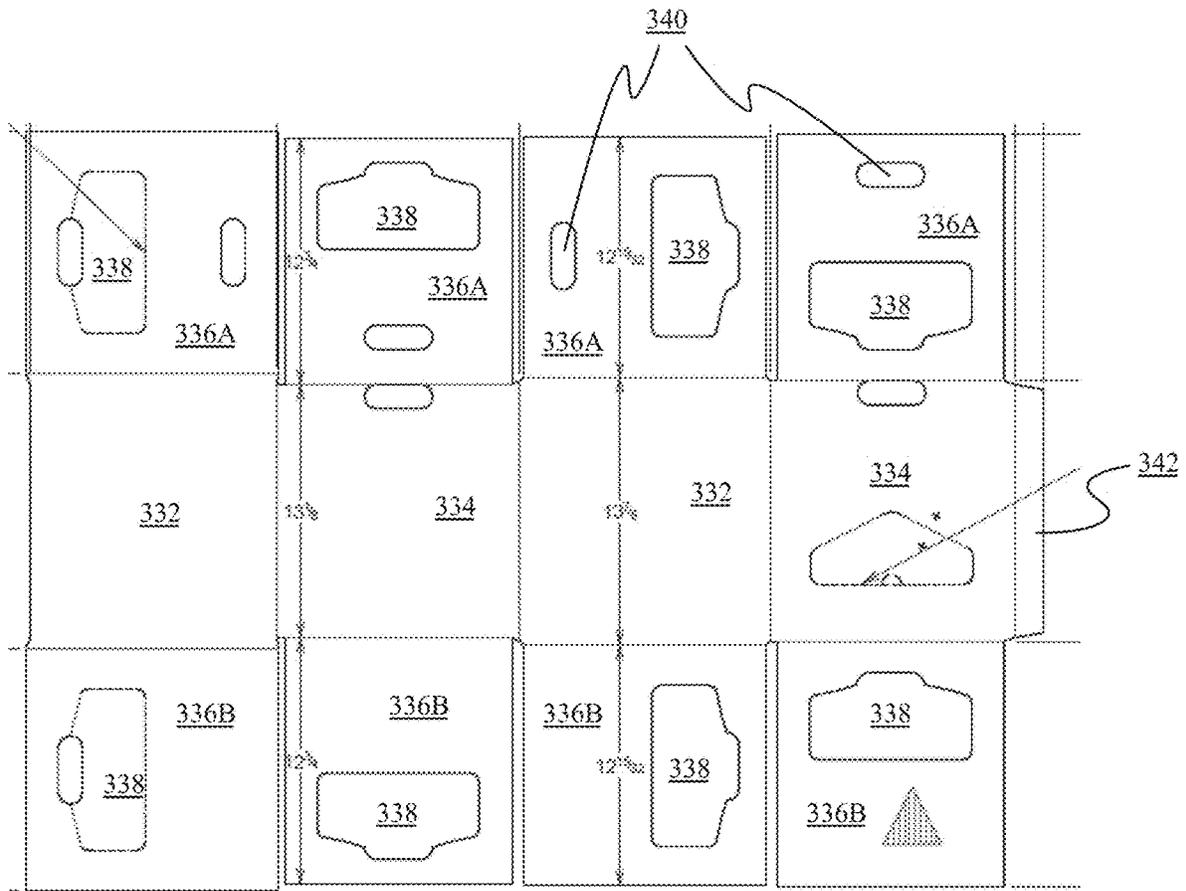


FIG. 3F

1

CORRUGATED CABLE DISPENSER

RELATED APPLICATIONS

The present application claims the benefit of and priority to U.S. Provisional Application No. 62/535,670, entitled "Corrugated Cable Dispenser," filed Jul. 21, 2017, the entirety of which is incorporated by reference herein.

FIELD

The present application relates to storage and deployment systems for wire and cable. In particular, the present application relates to a corrugated cardboard cable dispensing system.

BACKGROUND

Cable and wire are typically stored and deployed from reels, spools, or boxes, or various combinations of reels and boxes. For example, cable may be helically wound onto a wooden or plastic spool, and unwound during deployment or installation, reducing the potential for tangling. In other implementations, cable may be stored in a box, such as a cardboard box, in a coil. The cable may be coiled around a central tube integrated into the box, with one end of the cable fed through the tube to an exterior of the box. Via this free end, the cable may be pulled from the coil, reducing the potential for tangling.

Cable storage and dispensing systems utilizing reels or spools typically require reel stands or other axle mechanisms to allow the reel or spool to freely rotate during deployment, adding expense and weight and reducing portability of the system. Conversely, cable dispensing systems using a box without a reel or spool may be lightweight and inexpensive, but may be more prone to tangling than reel or spool-based systems.

SUMMARY

The present disclosure describes methods of manufacture and implementations of cable storage and dispensing systems combining the advantages of reel-based systems and box-based systems. The present system may be manufactured entirely out of corrugated cardboard or similar materials, reducing expense and weight compared to systems with wood, plastic, or metal reels or flanges, and adding recyclability in a single paper-based waste stream. The system may dispense cable in the same manner as reel-based systems, reducing tangling and aiding installation and deployment compared to box-based systems that do not utilize reels or spools. The system does not require the use of reel stands or other external components, and may be light and portable.

BRIEF DESCRIPTION OF THE FIGURES

FIG. 1A is an illustration of an embodiment of a core of a corrugated cable dispenser;

FIG. 1B is an illustration of an embodiment of a frame of a corrugated cable dispenser, folded for use;

FIG. 1C is an illustration of an embodiment of the frame of the corrugated cable dispenser of FIG. 1B, unfolded;

FIG. 1D is an illustration of an embodiment of the core of the corrugated cable dispenser of FIG. 1C holding a cable for storage or deployment;

2

FIG. 1E is an illustration of an embodiment of the corrugated cable dispenser frame and core of FIGS. 1A-1D, integrated for use;

FIG. 2A is a photo of an embodiment of a core of a corrugated cable dispenser;

FIG. 2B is a photo of an embodiment of a frame of a corrugated cable dispenser, folded for use;

FIGS. 2C and 2D are photos of an embodiment of the corrugated cable dispenser frame and core of FIGS. 2A-2B integrated for use;

FIG. 2E is a photo of an embodiment of the corrugated cable dispenser of FIGS. 2C and 2D including a storage box;

FIG. 3A is an illustration of another embodiment of a frame of a corrugated cable dispenser, unfolded;

FIGS. 3B and 3C are photos showing an embodiment of assembly of the corrugated cable dispenser frame of FIG. 3A;

FIG. 3D is an illustration of an embodiment of an enclosing carton for a corrugated cable dispenser frame;

FIG. 3E is an illustration of an embodiment of an enclosing carton for a corrugated cable dispenser frame, unfolded; and

FIG. 3F is an illustration of another embodiment of an enclosing carton for a corrugated cable dispenser frame, unfolded.

In the drawings, like reference numbers generally indicate identical, functionally similar, and/or structurally similar elements.

DETAILED DESCRIPTION

Cable and wire are typically stored and deployed from reels, spools, or boxes, or various combinations of reels and boxes. For example, cable may be helically wound onto a wooden or plastic spool, and unwound during deployment or installation, reducing the potential for tangling. In other implementations, cable may be stored in a box, such as a cardboard box, in a coil. The cable may be coiled around a central core or tube integrated into the box, with one end of the cable fed through the tube to an exterior of the box. Via this free end, the cable may be pulled from the coil, reducing the potential for tangling.

Cable storage and dispensing systems utilizing reels or spools typically require reel stands or other axle mechanisms to allow the reel or spool to freely rotate during deployment, adding expense and weight and reducing portability of the system. Conversely, cable dispensing systems using a box without a reel or spool may be lightweight and inexpensive, but may be more prone to tangling than reel or spool-based systems.

Instead, the present disclosure describes methods of manufacture and implementations of cable storage and dispensing systems combining the advantages of reel-based systems and box-based systems. The present system may be manufactured entirely out of corrugated cardboard or similar materials, reducing expense and weight compared to systems with wood or metal reels or flanges, and adding recyclability in a single paper-based waste stream. The system may dispense cable in the same manner as reel-based systems, reducing tangling and aiding installation and deployment compared to box-based systems that do not utilize reels or spools. The system does not require the use of reel stands or other external components, and may be light and portable. Although referred to generally as a corrugated cable dispenser, in many implementations, the cable dispenser may be made out of other materials, such as paperboard, kraft board, fiberboard, compressed paper, paper-

adhesive composites, wood, plastic, metal, carbon-fiber, or any other such materials or combinations of materials.

The cable dispensing system discussed herein may comprise a core **100**, as shown in FIG. 1A, illustrating of an embodiment of a core **100** of a cable dispenser. The core **100** may comprise a tube or cylindrical core of any suitable thickness and diameter, such as $\frac{1}{8}$ " thick, $\frac{1}{4}$ " thick, $\frac{1}{2}$ " thick, or any other such thickness; and 2" diameter, 3" diameter, 4" diameter, 6" diameter, or any other such diameter. The tube may be solid or hollow, in various embodiments. The tube may be constructed from compressed paper, corrugated cardboard, paper-adhesive composites, kraft paper, paperboard, fiberboard, plastic, metal, or any other type and form of material. In some implementations, paper or cardboard may be used to provide easy or single-stream recyclability, as well as reducing weight. The core may be wrapped in or hold a coil of cable, discussed in more detail below, and may be supported by a frame, similarly discussed in more detail below. The core may be formed via any suitable means, including cutting portions out of a larger tube, including spiral-wound, steam compressed, or otherwise formed. In some implementations, the core may comprise a plurality of layers, as in a multiply wound spiral tube.

FIG. 1B is an illustration of an embodiment of a frame **102** of a cable dispenser, folded for use. In some implementations, the frame **102** may comprise a plurality of panels **110A-110D**, which may have similar dimensions (e.g. height, weight, and depth). Panels **110A-110D**, sometimes referred to as panel(s) **110**, side panel(s) **110**, or supporting panel(s) **110**, may include a corresponding hole or aperture **104A-104D**, sometimes referred to as hole(s) **104** or core supporter(s) **104**. The inner diameter of hole(s) **104** may be approximately equal to (or very slightly larger) than an outer diameter of core **100**, such that the core **100** may be inserted through and supported by hole(s) **104**, with a sufficiently low friction such that core **100** may rotate. In some implementations, a difference between the inner diameter of hole(s) **104** and outer diameter of core **100** may be $\frac{1}{8}$ ", $\frac{1}{16}$ ", $\frac{1}{32}$ ", 1 mm, 0.5 mm, or any other such value. In many manufacturing implementations, hole(s) **104** may be cut from panel(s) **110** via a die cutting operation, laser cutting operation, or similar operation.

In the implementation shown, frame **102** may comprise four panels **110A-110D**, with panels **110A** and **110B** folded to be adjacent, and panels **110C** and **110D** folded to be adjacent. This may provide additional strength to support core **100**. Each panel may be attached to at least one other panel by an edge, discussed in more detail below. Panels **110A-110B** and **110C-110D** may be attached to and separated by a base panel **112**. Base panel **112** may be similar to panels **110A-110D** in many implementations, though may not necessarily include a hole **104**. Base panel **112** may provide lateral strength to frame **102**.

FIG. 1C is an illustration of an embodiment of the frame **102** of the corrugated cable dispenser of FIG. 1B, unfolded. As shown, each of panels **110A-110D** and **112** may be attached by opposing edges so as to form a line. In other implementations, panels may be attached by orthogonal edges. In many implementations, frame **102** may be manufactured as a continuous or semi-continuous strip of material (e.g. corrugated cardboard, paperboard, kraft board, fiber board, etc.). Holes **104A-104D** may be cut in the strip of material during manufacture, e.g. via a die cutting or laser cutting process. To facilitate bending of the strip such that panel **110A** and **110B** are adjacent with holes **104A-104B** aligned as shown in FIG. 1B (and such that panel **110C** and **110D** are adjacent with holes **104C-104D** aligned as shown

in FIG. 1B), in some implementations, hinges **108A-108B** may be cut in the strip. Hinges **108A-108B** may comprise one or more cutouts such that the strip may be easily bent to a near-180 degree angle (typically within the range of 170-179 degrees) at the hinge in order to align corresponding holes **104**. Although shown as three cutouts and two attachment portions, in many implementations, hinge(s) **108** may comprise one cutout, two cutouts, three cutouts, four cutouts, or any other such number of cutouts; and corresponding two, three, four, five, or any other number of attachment portions. In some implementations, rather than utilizing explicit cutouts, hinge(s) **108** may be perforated to reduce structural strength and facilitate bending.

During manufacture, the strip may be folded at portions **106A-106B**, sometimes referred to as fold(s) **106**, on either side of base panel **112**. Folds **106** may be simply folded, or may comprise cutouts or perforations, as with hinge(s) **108**.

FIG. 1D is an illustration of an embodiment of the core **100** of the corrugated cable dispenser of FIG. 1C holding a cable **120** for storage or deployment. The cable **120** may be wrapped on to core **100** in a spiral or helical fashion, and may comprise multiple layers or wraps (e.g. for longer cables). Although referred to as a cable, cable **120** may comprise any type and form of rope, wire, cable, or similar material, such as single conductor wire, multi-conductor wire (e.g. electrical wire, coaxial cable, serial data cable, audio cable, speaker wire, etc.), multi-pair wire (e.g. Cat5, Cat5e, Cat6, etc.), rope (e.g. nylon, hemp, polymer, etc.), chain (plastic, metal, etc.), or other such material, without limitation. In some implementations, one end of the cable **120** may be attached to core **100**, e.g. via glue or insertion into a cutout in the core (not illustrated). In other implementations, the cable **120** may be held to the core by friction (e.g. via multiple layers of wrappings of the cable).

The cable **120** may be constrained to a central portion of the core **100**, such that regions **122A-122B** at either terminal portion of the core are not covered by the cable **120** or are free from the cable. Regions **122A-122B** may be referred to variously as axle region(s) **122**, free region(s) **122**, or by other such names. In many implementations, a plurality of cables **120** may be wound onto an extended core, with portions **122** between each cable **120**, and the extended core subsequently cut or divided into individual cores **100** with terminating portions **122**. This may increase manufacturing efficiency by only requiring a single cable winding machine or apparatus for a plurality of simultaneously manufactured cable dispensers.

FIG. 1E is an illustration of an embodiment of the corrugated cable dispenser frame **102** and core **100** of FIGS. 1A-1D, integrated for use. As shown, the axle portions **122** of core **100** may be inserted through holes **104** of panels **110**, such that the panels **110** support the core **100** with two degrees of freedom (e.g. horizontal transversal, and axial rotation). The cable **120** may be pulled from the dispenser while core **100** rotates axially, supported by panels **110** of frame **102**. To prevent horizontal motion of the core (and frame), in many implementations, the frame and core combination (with cable installed) may be installed within a surrounding storage box or container, discussed in more detail below. The box may be similarly constructed of cardboard, corrugated cardboard, fiber board, kraft board, paper board, or other such materials, and may be lightweight, as it may need to provide only minimal structural strength.

For illustrative purposes, photos of one implementation of a cable dispensing system are provided in FIGS. 2A-2E. Although shown constructed of cardboard and paperboard

with a jacketed cable, other cables and materials may be used as discussed above. FIG. 2A is a photo of an embodiment of a core **100** of a corrugated cable dispenser. FIG. 2B is a photo of an embodiment of a frame **102** of a corrugated cable dispenser, folded for use. FIGS. 2C and 2D are photos of an embodiment of the corrugated cable dispenser frame and core of FIGS. 2A-2B integrated for use, with installed cable **120**. FIG. 2E is a photo of an embodiment of the corrugated cable dispenser of FIGS. 2C and 2D including a storage box **130**, as discussed above.

In another implementation, the frame may be provided in two parts that may be joined together during assembly via an interlocking mechanism. Such implementations may provide additional stability for holding a tube and/or cable in place within a carton or during assembly. Such two-part implementations may also provide additional strength for the overall package. Implementations may be substantially symmetrical, allowing reversal during assembly (or being agnostic to unintentional reversal) and/or allowing cable dispensing from the top and/or bottom of the carton.

FIG. 3A is an illustration of one such embodiment of a frame of a corrugated cable dispenser, unfolded, and separated with two parts or subframes (e.g. **302A**, **302B**) to be interlocked. As shown, each subframe may comprise three panels (e.g. side panel **310A**, base panel **312A**, and side panel **310B**; or side panel **310C**, base panel **312B**, and side panel **310D**). Side panels **310A-310D** may be similar to panels **110A-110D** discussed above, each including a corresponding hole or aperture **304A-304D** similar to hole(s) **104**, and similarly sized to support a core **100**. Hole(s) **304** may be similarly cut from panel(s) **310** via a die cutting operation, laser cutting operation, or similar operation. Side panel(s) **310** and base panel(s) **312** may join at fold(s) **306**. Similar to fold(s) **106**, fold(s) **306** may comprise cutouts, perforations, or similar hinge mechanisms to facilitate folding of each part of the frame.

A first subframe **302A** may comprise a plurality of tabs **314** protruding from side panel(s) **310A**, **310B** as shown. Corresponding slots **316** may be cut in a second subframe **302B** to accommodate tabs **314** during assembly. As shown, each slot **316** may be positioned on base panel **312B** of second subframe **302B** adjacent to a fold **306**. During assembly, first subframe **302A** may be folded at folds **306** such that side panels **310A-310B** are parallel to each other and perpendicular to base panel **312A**. Similarly, second subframe **302B** may be folded at folds **306** such that side panels **310C-310D** are parallel to each other and perpendicular to base panel **312B**. The first subframe **302A** may be inverted and interlocked with second subframe **302B** with tabs **314** inserted into slots **316**, such that side panel **310A** is adjacent to side panel **310D**, and side panel **310B** is adjacent to side panel **310C** (similarly aligning apertures **304A**, **304D**; and **304B**, **304C**).

Although shown with tabs **314** on first subframe **302A**, and slots **316** in second subframe **302B**, in some implementations, the first subframe **302A** may incorporate slots **316** while the second subframe incorporates tabs **314**. In a still further implementation, each subframe **302A**, **302B** may include a combination of slots **316** and tabs **314** (e.g. two slots and two tabs on each subframe **302A**, **302B**, to interlock with corresponding tabs and slots on the opposing subframe). Although two pairs of two tabs **314** and two slots **316** are shown, in some implementations, a greater or fewer number of tabs and slots may be utilized (e.g. two pairs of three tabs and three slots, four tabs and four slots, etc.). As

with apertures **304**, slots **316** may be cut from panel(s) **310** via a die cutting operation, laser cutting operation, or similar operation.

As shown, in many implementations, base panel **312A** may be slightly narrower than base panel **312B** (e.g. by approximately twice the thickness of each side panel) so that the first subframe **302A** may be inserted into the second subframe **302B** while side panels **310A-310D** remain parallel. In another implementation, the base panels **312** may be identical in width, with the two subframes **302A**, **302B** configured to be interlocked such that a first side panel of a first subframe is outside of the corresponding side panel of the second subframe, with a second side panel of the first subframe inside of the corresponding side panel of the other subframe. In some such implementations, each panel may have a combination of tabs and slots (e.g. such that the panels to the inside of the assembled frame include tabs to fit in corresponding slots of the base panels).

Either or both of base panels **312A**, **312B** may include one or more cutouts **318** for dispensing cable from a core when the cable dispenser is assembled. Cutouts **318** may be of any suitable shape and size, and may be rectangular as shown, circular, oval, or any other such shape. Once assembled, a cable may be withdrawn from the dispenser through a cutout **318**. Although shown symmetrically positioned on each base panel, in some implementations, cutouts **318** may be asymmetrically positioned.

FIGS. 3B and 3C are photos showing an embodiment of assembly of the corrugated cable dispenser frame of FIG. 3A. As shown in FIG. 3B, a first subframe may be folded with side panels parallel to each other and orthogonal to the base panel; and tabs of the first subframe side panels may be inserted in corresponding slots of the base panel of the second subframe. The side panels of the second subframe may then be folded parallel to each other (and to side panels of the first subframe), as shown in FIG. 3C. In some implementations, adhesives or other fastening means may be applied to maintain the shape of the folded frame (e.g. tape, glue, staples, etc.).

FIG. 3D is an illustration of an embodiment of an enclosing carton **330** for a corrugated cable dispenser frame. Although shown with frame **302**, in some implementations, carton **330** may be used with frame **102**. As shown, the assembled frame **302** may be inserted into the carton **330** (or the carton lowered to encapsulate the frame). Carton **330** may have six sides, and be folded to enclose the frame after insertion. A cable reel or core **100** may be inserted into the frame **302** during assembly (not illustrated).

Carton **330** may include side panels **332**, **334**, and top panel **336** (as well as rear side panels and a bottom panel, not illustrated). In some implementations, top panel **336** (and optionally, the bottom panel) may include cutouts **338** corresponding to cutouts **318**. A cable wound on a core **100** may be withdrawn through a cutout **318** and corresponding cutout **338** for dispensing. In many implementations, cutouts **338** may not be fully cut, but rather may be perforated to allow a user to remove a desired cutout.

In some implementations, one or more holes or handles **340** may be positioned on a front panel **334** of a carton **330** (including on a rear panel **334**, not illustrated). A handle **340** may comprise a rectangular, rounded rectangular, or oval cutout, sized such that a user may insert their fingers or thumb into the carton to lift or grip the carton. In some implementations, a cutout **338** may be positioned such that a user may reach through both cutout **338** and handle **340** simultaneously, providing a more ergonomic and stronger grip on carton **330**. Once assembled, the portion of the

carton between handle **340** and an adjacent cutout **338** may be adjacent to corresponding portions of frame **302** (e.g. between cutout **318** and an edge of the base panel **312**), providing three layers of corrugated cardboard for a user's hand to grip. Such implementations may prevent tearing of the cardboard at the relatively short span between the cutout **338** and handle **340** and provide a stronger support than a single layer of corrugated cardboard.

FIG. 3E is an illustration of an embodiment of an enclosing carton for a corrugated cable dispenser frame, unfolded. In some implementations, the carton may have more than six panels. For example, as shown, some implementations of the carton may include a single bottom panel **336B**, and two top panels **336A**, **336A'**. When folded into a rectangular prism, top panels **336A**, **336A'** may be parallel and adjacent to each other, with holes **338** aligned, sometimes referred to as a 'full overlap top'. Such implementations may provide additional strength, particularly to a grip via holes **338** and handles **340** which may then include four layers of corrugated cardboard.

Although shown with seven panels, in various implementations, an eighth panel (e.g. a second bottom panel **336B** attached to side panel **332**) may be utilized to provide a full overlap bottom for additional structural strength. Similarly, in some implementations, bottom panel(s) **336B** may include holes **338** for dispensing cable from the bottom of the carton. Front and rear panels **334** may similarly include additional handles **340** at an edge adjacent to bottom panel (s) **336B** when folded. Likewise, while illustrated with top and bottom panels **336A**, **336A'**, **336B** attached to front and rear panels **334**, in some implementations, other formations may be employed (e.g. with top and bottom panels attached to side panels **332**).

In many implementations, each panel may include one or more tabs, slots, or extensions **342** to facilitate attachment to a neighboring panel. For example, a first panel may include a tab **342** attached to a side of the panel that may be folded and glued or otherwise adhered to another panel (e.g. panel **334**, once folded into a rectangular prism), during assembly. In many implementations, a plurality of tabs **342** may be employed attached to a corresponding plurality of panels. As shown, in some implementations, a single tab **342** may have a width equal to that of the corresponding panel (e.g. tab **342** and panel **332**); while in other implementations, the tab may be divided into a plurality of smaller tabs or subtabs (e.g. tab **342'** attached to panel **336B**). In some implementations, tabs **342** may be trapezoidal, as shown; or may be other shapes (e.g. rectangular, triangular, etc.).

FIG. 3F is an illustration of another embodiment of an enclosing carton for a corrugated cable dispenser frame, unfolded. In some implementations, the carton may include a number of panels configured to be folded adjacent to each other, providing additional structural strength. For example, as shown, in some implementations, the carton may include 12 panels consisting of two side panels **332**, a back panel **334A** and front panel **334B**, and two sets of four panels (**336A**, **336B**) for the top and bottom of the carton. Holes or cutouts in the two sets of four panels (e.g. cutouts **338**, **340**) may be arranged to have corresponding adjacent positions when the carton is folded for use.

Thus, in many implementations, the cable dispenser may be lightweight, inexpensive to manufacture, and easily recyclable as in box-based systems, while providing the benefits of strength and easy deployment without tangling of reel-based systems, without requiring additional flanges, reel stands, or other such heavy and expensive components.

In one aspect, the present disclosure is directed to a cable dispenser. The cable dispenser includes a first subframe, comprising: a first panel comprising a first hole having a first diameter and at least one tab; a second panel orthogonal to the first panel and attached to the first panel at a first edge of the second panel; and a third panel orthogonal to the second panel and parallel to the first panel and attached to the second panel at a second edge of the second panel, opposite the first edge of the second panel and separated from the first edge of the second panel by a first width, the third panel comprising a second hole having the first diameter and a second at least one tab. The cable dispenser also includes a second subframe, comprising: a fourth panel comprising a third hole having the first diameter; a fifth panel orthogonal to the fourth panel and attached to the fourth panel at a first edge of the fifth panel and comprising a plurality of slots, each slot configured to receive a corresponding tab of the at least one tabs of the first panel or the at least one tabs of the third panel; and a sixth panel orthogonal to the fifth panel and parallel to the fourth panel and attached to the fifth panel at a second edge of the fifth panel opposite the first edge of the fifth panel and separated from the first edge of the fifth panel by a second width greater than the first width, the sixth panel comprising a fourth hole having the first diameter. The cable dispenser also includes a cylindrical core, positioned within the first hole and the second hole of the first subframe and the third hole and fourth hole of the second subframe, and having an outer diameter approximately equal to the first diameter and a length equal to or greater than the first width and second width such that when positioned within the first hole, the second hole, the third hole, and the fourth hole, the core has one rotational degree of freedom and one transversal degree of freedom. The cable dispenser also includes a carton comprising a plurality of panels configured to encapsulate the first subframe, the second subframe, and the cylindrical core, a first panel of the plurality of panels of the carton having at least one rounded rectangular hole sized to accommodate a human hand. The first panel of the first subframe is adjacent to the fourth panel of the second subframe, the third panel of the first subframe is adjacent to the sixth panel of the second subframe, and the second panel of the first subframe is parallel to the fifth panel of the second subframe.

In some implementations of the cable dispenser, the first subframe, the second subframe, and the carton are corrugated cardboard. In some implementations of the cable dispenser, the cylindrical core is compressed paper. In some implementations, the cable dispenser comprises a cable helically wrapped around the cylindrical core. In a further implementation, the cylindrical core comprises a first axel region at a first terminal end of the cylindrical core positioned within the first hole and the third hole, a second axel region at a second terminal end of the cylindrical core positioned within the second hole and the fourth hole, and a central portion between the first axel region and second axel region; and wherein the cable is helically wrapped around the central portion.

In some implementations of the cable dispenser, the second panel of the first subframe includes at least one cutout configured to receive a terminal end of a cable wrapped around the cylindrical core. In a further implementation, a second panel of the carton includes at least one cutout adjacent to the at least one cutout of the second panel of the first subframe and configured to receive the terminal end of the cable. In some implementations, a seam between the first panel of the first subframe and the second panel of

the subframe is folded approximately 90 degrees. In some implementations, a seam between the first panel of the first subframe and the second panel of the subframe is perforated. In some implementations, the at least one rounded rectangular hole of the first panel of the carton has perforated edges and a removable central portion.

In another aspect, the present disclosure is directed to another implementation of a cable dispenser. The cable dispenser includes a frame comprising: a first panel comprising a first hole having a first diameter; a second panel orthogonal to the first panel and attached to the first panel at a first edge of the second panel; and a third panel orthogonal to the second panel and parallel to the first panel and attached to the second panel at a second edge of the second panel, opposite the first edge of the second panel and separated from the first edge of the second panel by a first width, the third panel comprising a second hole having the first diameter. The cable dispenser includes a cylindrical core, positioned within the first hole and the second hole of the frame, and having an outer diameter approximately equal to the first diameter and a length equal to or greater than the first width such that when positioned within the first hole and the second hole, the core has one rotational degree of freedom and one transversal degree of freedom.

In some implementations, the frame is corrugated cardboard. In some implementations, the frame further comprises: a fourth panel, parallel to and attached to the first panel and comprising a third hole having the first diameter; and a fifth panel, parallel to and attached to the third panel and comprising a fourth hole having the first diameter; and the cylindrical core is positioned within the third hole and the fourth hole. In a further implementation, the fourth panel is attached to the first panel by a first hinge, and the fifth panel is attached to the third panel by a second hinge. In a still further implementation, the first hinge and second hinge each comprise one or more cutouts in the frame separating attachment portions between adjacent panels.

In some implementations, the frame comprises: a first subframe comprising the first panel, the second panel, and third panel; and a second subframe comprising: a fourth panel comprising a third hole having the first diameter, a fifth panel orthogonal to the fourth panel and attached to the fourth panel at a first edge of the fifth panel, and a sixth panel orthogonal to the fifth panel and parallel to the fourth panel and attached to the fifth panel at a second edge of the fifth panel opposite the first edge of the fifth panel and separated from the first edge of the fifth panel by a second width equal to or greater than the first width, the sixth panel comprising a fourth hole having the first diameter. In a further implementation, the first subframe and the second subframe comprise a plurality of interlocking portions. In a still further implementation, the plurality of interlocking portions of the first subframe and the second subframe comprise a plurality of tabs attached to a second edge of the first panel and a corresponding plurality of slots in the fifth panel.

In some implementations, the cable dispenser includes a carton comprising a plurality of panels configured to encapsulate the frame and the cylindrical core. In a further implementation, a first panel of the plurality of panels of the carton comprises at least one hole sized to accommodate a human hand.

In another aspect, the present disclosure is directed to another implementation of a cable dispenser. The cable dispenser includes a frame comprising a plurality of attached panels, a subset of the plurality of attached panels each comprising a hole having a first diameter; and a core having an outer diameter approximately equal to the first diameter,

the core positioned within the holes of at least two panels of the subset of the plurality of attached panels.

In some implementations, the frame is formed of a single material. In some implementations, the frame comprises a first panel having a first hole, a second panel attached to the first panel, and a third panel attached to the second panel having a second hole. In some implementations, the core has one rotational degree of freedom when positioned within the holes of the at least two panels of the subset of the plurality of attached panels.

In some implementations, the frame further comprises a first subframe having a first plurality of attached panels, and a second subframe having a second plurality of attached panels, a subset of each of the first plurality of attached panels and the second plurality of attached panels each comprising a hole having the first diameter. In a further implementation, the first subframe is positioned within the second subframe such that a hole of a first panel of the first subframe is adjacent to a hole of a first panel of the second subframe. In another further implementation, the first subframe is attached to the second subframe via an attachment with one degree of freedom.

In some implementations, a second subset of the plurality of attached panels, different from the first subset of the plurality of attached panels, comprises a hole for dispensing a cable from the core. In some implementations, the cable dispenser includes a carton comprising a plurality of panels configured to encapsulate the frame and the cylindrical core. In a further implementation, a first panel of the plurality of panels of the carton comprises at least one hole sized to accommodate a human hand.

The above description in conjunction with the above-reference drawings sets forth a variety of embodiments for exemplary purposes, which are in no way intended to limit the scope of the described methods or systems. Those having skill in the relevant art can modify the described methods and systems in various ways without departing from the broadest scope of the described methods and systems. Thus, the scope of the methods and systems described herein should not be limited by any of the exemplary embodiments and should be defined in accordance with the accompanying claims and their equivalents.

What is claimed:

1. A cable dispenser, comprising:

a first subframe, comprising:

a first panel comprising a first hole having a first diameter and at least one tab,

a second panel orthogonal to the first panel and attached to the first panel at a first edge of the second panel, and

a third panel orthogonal to the second panel and parallel to the first panel and attached to the second panel at a second edge of the second panel, opposite the first edge of the second panel and separated from the first edge of the second panel by a first width, the third panel comprising a second hole having the first diameter and a second at least one tab;

a second subframe, comprising:

a fourth panel comprising a third hole having the first diameter,

a fifth panel orthogonal to the fourth panel and attached to the fourth panel at a first edge of the fifth panel and comprising a plurality of slots, each slot configured to receive a corresponding tab of the at least one tabs of the first panel or the at least one tabs of the third panel, and

11

- a sixth panel orthogonal to the fifth panel and parallel to the fourth panel and attached to the fifth panel at a second edge of the fifth panel opposite the first edge of the fifth panel and separated from the first edge of the fifth panel by a second width greater than the first width, the sixth panel comprising a fourth hole having the first diameter;
- a cylindrical core, positioned through the first hole and the second hole of the first subframe and the third hole and fourth hole of the second subframe, and having an outer diameter approximately equal to the first diameter and a length equal to or greater than the first width and second width such that when positioned through the first hole, the second hole, the third hole, and the fourth hole, the core has one rotational degree of freedom and one transversal degree of freedom; and
- a carton comprising a plurality of panels configured to encapsulate the first subframe, the second subframe, and the cylindrical core, a first panel of the plurality of panels of the carton having at least one rounded rectangular hole sized to accommodate a human hand; wherein the first panel of the first subframe is adjacent to the fourth panel of the second subframe, the third panel of the first subframe is adjacent to the sixth panel of the second subframe, and the second panel of the first subframe is parallel to the fifth panel of the second subframe.
- 2. The cable dispenser of claim 1, wherein the first subframe, the second subframe, and the carton are corrugated cardboard.
- 3. The cable dispenser of claim 1, wherein the cylindrical core is compressed paper.
- 4. The cable dispenser of claim 1, further comprising a cable helically wrapped around the cylindrical core.
- 5. The cable dispenser of claim 4, wherein the cylindrical core comprises a first axel region at a first terminal end of the cylindrical core positioned within the first hole and the third hole, a second axel region at a second terminal end of the cylindrical core positioned within the second hole and the fourth hole, and a central portion between the first axel region and second axel region; and wherein the cable is helically wrapped around the central portion.
- 6. The cable dispenser of claim 1, wherein the second panel of the first subframe includes at least one cutout configured to receive a terminal end of a cable wrapped around the cylindrical core.
- 7. The cable dispenser of claim 6, wherein a second panel of the carton includes at least one cutout adjacent to the at least one cutout of the second panel of the first subframe and configured to receive the terminal end of the cable.
- 8. The cable dispenser of claim 1, wherein a seam between the first panel of the first subframe and the second panel of the subframe is folded approximately 90 degrees.
- 9. The cable dispenser of claim 1, wherein a seam between the first panel of the first subframe and the second panel of the subframe is perforated.
- 10. The cable dispenser of claim 1, wherein the at least one rounded rectangular hole of the first panel of the carton has perforated edges and a removable central portion.
- 11. A cable dispenser, comprising:
 - a frame comprising:
 - a first subframe comprising:
 - a first panel comprising a first hole having a first diameter,
 - a second panel orthogonal to the first panel and attached to the first panel at a first edge of the second panel, and

12

- a third panel orthogonal to the second panel and parallel to the first panel and attached to the second panel at a second edge of the second panel, opposite the first edge of the second panel and separated from the first edge of the second panel by a first width, the third panel comprising a second hole having the first diameter; and
- a second subframe comprising:
 - a fourth panel comprising a third hole having the first diameter,
 - a fifth panel orthogonal to the fourth panel and attached to the fourth panel at a first edge of the fifth panel, and
 - a sixth panel orthogonal to the fifth panel and parallel to the fourth panel and attached to the fifth panel at a second edge of the fifth panel opposite the first edge of the fifth panel and separated from the first edge of the fifth panel by a second width equal to or greater than the first width, the sixth panel comprising a fourth hole having the first diameter; and
- a cylindrical core, positioned within the first hole and the second hole of the frame, and having an outer diameter approximately equal to the first diameter and a length equal to or greater than the first width such that when positioned within the first hole and the second hole, the core has only one rotational degree of freedom and only one transversal degree of freedom.
- 12. The cable dispenser of claim 11, wherein the frame is corrugated cardboard.
- 13. The cable dispenser of claim 11, wherein the first subframe and the second subframe comprise a plurality of interlocking portions.
- 14. The cable dispenser of claim 13, wherein the plurality of interlocking portions of the first subframe and the second subframe comprise a plurality of tabs attached to a second edge of the first panel and a corresponding plurality of slots in the fifth panel.
- 15. The cable dispenser of claim 11, further comprising a carton comprising a plurality of panels configured to encapsulate the frame and the cylindrical core.
- 16. The cable dispenser of claim 15, wherein a first panel of the plurality of panels of the carton comprises at least one hole sized to accommodate a human hand.
- 17. A cable dispenser, comprising:
 - a frame comprising a plurality of attached panels, a subset of the plurality of attached panels each comprising a hole having a first diameter; and
 - a core having an outer diameter approximately equal to the first diameter, the core positioned within the holes of at least two panels of the subset of the plurality of attached panels;
 wherein the frame further comprises a first subframe having a first plurality of attached panels, and a second subframe having a second plurality of attached panels, a subset of each of the first plurality of attached panels and the second plurality of attached panels each comprising a hole having the first diameter; and
 - wherein the first subframe is positioned within the second subframe such that a hole of a first panel of the first subframe is adjacent to a hole of a first panel of the second subframe.
- 18. The cable dispenser of claim 17, wherein the first subframe is attached to the second subframe via an attachment with one transversal degree of freedom.