

(19)



(11)

EP 2 812 469 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
31.08.2016 Bulletin 2016/35

(51) Int Cl.:
D01F 8/14 (2006.01) **D01D 5/34 (2006.01)**
D01F 1/10 (2006.01) **D04H 1/4382 (2012.01)**

(21) Application number: **13746953.2**

(86) International application number:
PCT/IB2013/050554

(22) Date of filing: **22.01.2013**

(87) International publication number:
WO 2013/118009 (15.08.2013 Gazette 2013/33)

(54) MODIFIED POLYLACTIC ACID FIBERS

MODIFIZIERTE POLYMILCHSÄUREFASERN
FIBRES D'ACIDE POLYLACTIQUE MODIFIÉES

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **10.02.2012 US 201213370845**

(43) Date of publication of application:
17.12.2014 Bulletin 2014/51

(73) Proprietor: **Kimberly-Clark Worldwide, Inc.**
Neenah, Wisconsin 54956 (US)

(72) Inventors:
• **TOPOLKARAEV, Vasily, A.**
Appleton, Wisconsin 54915 (US)
• **MCENEANY, Ryan, J.**
Appleton, Wisconsin 54915 (US)
• **EBY, Tom**
Greenville, Wisconsin 54942 (US)

• **LARK, Tyler, J.**
Greenleaf, Wisconsin 54126 (US)

(74) Representative: **Beacham, Annabel Rose et al**
Dehns
St Bride's House
10 Salisbury Square
London EC4Y 8JD (GB)

(56) References cited:
EP-A1- 1 579 048 **WO-A1-01/14621**
WO-A1-2009/012284 **WO-A1-2011/084670**
US-A- 5 069 970 **US-A1- 2005 123 750**
US-A1- 2008 287 024 **US-A1- 2009 068 463**
US-A1- 2009 069 463 **US-A1- 2009 324 911**
US-A1- 2011 028 062 **US-A1- 2011 178 196**
US-B1- 6 509 092

EP 2 812 469 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**Related Applications**

5 [0001] The present application is a continuation-in-part of U.S. Application Serial No. 12/856,012, filed on August 13, 2010, which is incorporated herein by reference in its entirety.

Background of the Invention

10 [0002] Various attempts have been made to form nonwoven webs from biodegradable polymers. Although fibers prepared from biodegradable polymers are known, problems have been encountered with their use. For example, polylactic acid ("PLA") is one of the most common biodegradable and sustainable (renewable) polymers used to form nonwoven webs. Unfortunately, PLA nonwoven webs generally possess a low bond flexibility and high roughness due to the high glass transition temperature and slow crystallization rate of polylactic acid. In turn, thermally bonded PLA
15 nonwoven webs often exhibit low elongations that are not acceptable in certain applications, such as in an absorbent article. Likewise, though polylactic acid may withstand high draw ratios, it requires high levels of draw energy to achieve the crystallization needed to overcome heat shrinkage. In response to these difficulties, plasticizers have been employed in an attempt to reduce the glass transition temperature and improve bonding and softness. One common plasticizer is polyethylene glycol. Unfortunately, polyethylene glycol tends to phase separate from polylactic acid during aging, especially in high humidity and elevated temperature environment, which deteriorates the mechanical properties of the resulting fibers over time. The addition of plasticizers also causes other problems, such as degradation in melt spinning, and a reduction in melt strength and drawability.

20 [0003] As such, a need currently exists for polylactic fibers that exhibit good elongation properties, yet remain strong.

Summary of the Invention

25 [0004] In accordance with one embodiment of the present invention, a method for forming a multi-component fiber is disclosed that comprises blending a polylactic acid, polymeric toughening additive, and polyepoxide modifier to form a thermoplastic composition, and thereafter extruding the thermoplastic composition through a die to form a fiber. The fiber contains a core component surrounded by a sheath component, and the polylactic acid constitutes about 50 wt. % or more of the polymer content of the core component and the polymeric toughening additive constitutes about 50 wt. % or more of the polymer content of the sheath component.

30 [0005] In accordance with another embodiment of the present invention, a multi-component fiber is disclosed that contains a core component surrounded by a sheath component. Polylactic acid constitutes about 50 wt. % or more of the polymer content of the core component and a polymeric toughening additive constitutes about 50 wt. % or more of the polymer content of the sheath component. The polylactic acid in the core component and the polymeric toughening additive in the sheath component are derived from a single thermoplastic composition in which the polylactic acid is blended with the polymeric toughening additive.

35 [0006] Other features and aspects of the present invention are discussed in greater detail below.

40

Brief Description of the Drawings

45 [0007] A full and enabling disclosure of the present invention, including the best mode thereof, directed to one of ordinary skill in the art, is set forth more particularly in the remainder of the specification, which makes reference to the appended figures in which:

Fig. 1 is a schematic illustration of a process that may be used in one embodiment of the present invention to form fibers;

50 Fig. 2 is a TEM photograph (60kV, 10,000X) of the polymer blend of Example 4, which contained 90 wt. % PLA 6201 D (Natureworks®) and 10 wt. % poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate);

Fig. 3 is a TEM photograph (80kV, 10,000X) of the polymer blend of Example 49, which contained 98.23 wt. % PLA 6201 D (Natureworks®), 2.52 wt. % PP3155 (Exxonmobil), and 0.75 wt. % Lotader® AX8900 (Arkema);

Fig. 4 is a TEM photograph (80kV, 10,000X) of the polymer blend of Example 50, which contained 89.5 wt. % PLA 6201 D (Natureworks®), 10 wt. % PP3155 (Exxonmobil), and 0.5 wt. % CESA™ Extend 8478 (Clariant Corporation);

55 Fig. 5 is a TEM photograph (60kV, 10,000X) of the polymer blend of Example 51, which contained 98.5 wt. % PLA 6201 D (Natureworks®) and 1.5 wt. % Lotader® AX8900 (Arkema); and

Fig. 6 is a cross-sectional view of one embodiment of a fiber that may be formed in accordance with the present invention;

Fig. 7 is a schematic illustration of one embodiment of an underwater pelletizing system that may be employed to form the fiber of the present invention; and

Fig. 8 is an SEM photograph of Example 48 showing the core and sheath components of the fiber.

5 [0008] Repeat use of references characters in the present specification and drawings is intended to represent same or analogous features or elements of the invention.

Detailed Description of Representative Embodiments

10 [0009] Reference now will be made in detail to various embodiments of the invention, one or more examples of which are set forth below. Each example is provided by way of explanation of the invention, not limitation of the invention. In fact, it will be apparent to those skilled in the art that various modifications and variations may be made in the present invention without departing from the scope or spirit of the invention. For instance, features illustrated or described as part of one embodiment, may be used on another embodiment to yield a still further embodiment. Thus, it is intended that the present invention covers such modifications and variations as come within the scope of the appended claims and their equivalents.

Definitions

20 [0010] As used herein, the term "biodegradable" or "biodegradable polymer" generally refers to a material that degrades from the action of naturally occurring microorganisms, such as bacteria, fungi, and algae; environmental heat; moisture; or other environmental factors. The biodegradability of a material may be determined using ASTM Test Method 5338.92.

25 [0011] As used herein, the term "fibers" refer to elongated extrudates formed by passing a polymer through a forming orifice such as a die. Unless noted otherwise, the term "fibers" includes both discontinuous fibers having a definite length and substantially continuous filaments. Substantially filaments may, for instance, have a length much greater than their diameter, such as a length to diameter ratio ("aspect ratio") greater than about 15,000 to 1, and in some cases, greater than about 50,000 to 1.

30 [0012] As used herein, the term "nonwoven web" refers to a web having a structure of individual fibers that are randomly interlaid, not in an identifiable manner as in a knitted fabric. Nonwoven webs include, for example, meltblown webs, spunbond webs, carded webs, wet-laid webs, airlaid webs, coform webs, hydraulically entangled webs, etc. The basis weight of the nonwoven web may generally vary, but is typically from about 5 grams per square meter ("gsm") to 200 gsm, in some embodiments from about 10 gsm to about 150 gsm, and in some embodiments, from about 15 gsm to about 100 gsm.

35 [0013] As used herein, the term "meltblown" web or layer generally refers to a nonwoven web that is formed by a process in which a molten thermoplastic material is extruded through a plurality of fine, usually circular, die capillaries as molten fibers into converging high velocity gas (e.g., air) streams that attenuate the fibers of molten thermoplastic material to reduce their diameter, which may be to microfiber diameter. Thereafter, the meltblown fibers are carried by the high velocity gas stream and are deposited on a collecting surface to form a web of randomly dispersed meltblown fibers. Such a process is disclosed, for example, in U.S. Patent Nos. 3,849,241 to Butin, et al.; 4,307,143 to Meitner, et al.; and 4,707,398 to Wisneski, et al., which are incorporated herein in their entirety by reference thereto for all purposes. Meltblown fibers may be substantially continuous or discontinuous, and are generally tacky when deposited onto a collecting surface.

45 [0014] As used herein, the term "spunbond" web or layer generally refers to a nonwoven web containing small diameter substantially continuous filaments. The filaments are formed by extruding a molten thermoplastic material from a plurality of fine, usually circular, capillaries of a spinnerette with the diameter of the extruded filaments then being rapidly reduced as by, for example, eductive drawing and/or other well-known spunbonding mechanisms. The production of spunbond webs is described and illustrated, for example, in U.S. Patent Nos. 4,340,563 to Appel, et al., 3,692,618 to Dorschner, et al., 3,802,817 to Matsuki, et al., 3,338,992 to Kinney, 3,341,394 to Kinney, 3,502,763 to Hartman, 3,502,538 to Levy, 3,542,615 to Dobo, et al., and 5,382,400 to Pike, et al., which are incorporated herein in their entirety by reference thereto for all purposes. Spunbond filaments are generally not tacky when they are deposited onto a collecting surface. Spunbond filaments may sometimes have diameters less than about 40 micrometers, and are often between about 5 to about 20 micrometers.

Test Methods

55 *Melt Flow Rate:*

[0015] The melt flow rate ("MFR") is the weight of a polymer (in grams) forced through an extrusion rheometer orifice

(0.0825-inch diameter) when subjected to a load of 2160 grams in 10 minutes, typically at 190°C or 230°C. Unless otherwise indicated, melt flow rate is measured in accordance with ASTM Test Method D1239 with a Tinius Olsen Extrusion Plastometer.

5 *Thermal Properties:*

[0016] The melting temperature and glass transition temperature may be determined by differential scanning calorimetry (DSC). The differential scanning calorimeter may be a DSC Q100 Differential Scanning Calorimeter, which was outfitted with a liquid nitrogen cooling accessory and with a UNIVERSAL ANALYSIS 2000 (version 4.6.6) analysis software program, both of which are available from T.A. Instruments Inc. of New Castle, Delaware. To avoid directly handling the samples, tweezers or other tools are used. The samples are placed into an aluminum pan and weighed to an accuracy of 0.01 milligram on an analytical balance. A lid is crimped over the material sample onto the pan. Typically, the resin pellets are placed directly in the weighing pan, and the fibers are cut to accommodate placement on the weighing pan and covering by the lid.

[0017] The differential scanning calorimeter is calibrated using an indium metal standard and a baseline correction is performed, as described in the operating manual for the differential scanning calorimeter. A material sample is placed into the test chamber of the differential scanning calorimeter for testing, and an empty pan is used as a reference. All testing is run with a 55-cubic centimeter per minute nitrogen (industrial grade) purge on the test chamber. For resin pellet samples, the heating and cooling program is a 2-cycle test that began with an equilibration of the chamber to -30°C, followed by a first heating period at a heating rate of 10°C per minute to a temperature of 200°C, followed by equilibration of the sample at 200°C for 3 minutes, followed by a first cooling period at a cooling rate of 10°C per minute to a temperature of -30°C, followed by equilibration of the sample at -30°C for 3 minutes, and then a second heating period at a heating rate of 10°C per minute to a temperature of 200°C. For fiber samples, the heating and cooling program is a 1-cycle test that began with an equilibration of the chamber to -25°C, followed by a heating period at a heating rate of 10°C per minute to a temperature of 200°C, followed by equilibration of the sample at 200°C for 3 minutes, and then a cooling period at a cooling rate of 10°C per minute to a temperature of -30°C. All testing is run with a 55-cubic centimeter per minute nitrogen (industrial grade) purge on the test chamber.

[0018] The results are evaluated using the UNIVERSAL ANALYSIS 2000 analysis software program, which identified and quantified the glass transition temperature (Tg) of inflection, the endothermic and exothermic peaks, and the areas under the peaks on the DSC plots. The glass transition temperature is identified as the region on the plot-line where a distinct change in slope occurred, and the melting temperature is determined using an automatic inflection calculation.

Tensile Properties:

[0019] Individual fiber specimens are shortened (e.g., cut with scissors) to 38 millimeters in length, and placed separately on a black velvet cloth. 10 to 15 fiber specimens are collected in this manner. The fiber specimens are then mounted in a substantially straight condition on a rectangular paper frame having external dimension of 51 millimeters x 51 millimeters and internal dimension of 25 millimeters x 25 millimeters. The ends of each fiber specimen are operatively attached to the frame by carefully securing the fiber ends to the sides of the frame with adhesive tape. Each fiber specimen is then measured for its external, relatively shorter, cross-fiber dimension employing a conventional laboratory microscope, which has been properly calibrated and set at 40X magnification. This cross-fiber dimension is recorded as the diameter of the individual fiber specimen. The frame helps to mount the ends of the sample fiber specimens in the upper and lower grips of a constant rate of extension type tensile tester in a manner that avoids excessive damage to the fiber specimens.

[0020] A constant rate of extension type of tensile tester and an appropriate load cell are employed for the testing. The load cell is chosen (e.g., 1 ON) so that the test value falls within 10-90% of the full scale load. The tensile tester (i.e., MTS SYNERGY 200) and load cell are obtained from MTS Systems Corporation of Eden Prairie, Michigan. The fiber specimens in the frame assembly are then mounted between the grips of the tensile tester such that the ends of the fibers are operatively held by the grips of the tensile tester. Then, the sides of the paper frame that extend parallel to the fiber length are cut or otherwise separated so that the tensile tester applies the test force only to the fibers. The fibers are then subjected to a pull test at a pull rate and grip speed of 12 inches per minute. The resulting data is analyzed using a TESTWORKS 4 software program from the MTS Corporation with the following test settings:

Calculation Inputs		Test Inputs	
Break mark drop	50%	Break sensitivity	90%
Break marker elongation	0.1 in	Break threshold	10 g _f

(continued)

Calculation Inputs		Test Inputs	
Nominal gage length	1 in	Data Acq. Rate	10 Hz
Slack pre-load	1 lb _f	Denier length	9000 m
Slope segment length	20%	Density	1.25 g/cm ³
Yield offset	0.20%	Initial speed	12 in/min
Yield segment length	2%	Secondary speed	2 in/min

[0021] The tenacity values are expressed in terms of gram-force per denier. Peak elongation (% strain at break) is also measured.

15 *Moisture Content*

[0022] Moisture content may be determined using an Arizona Instruments Computrac Vapor Pro moisture analyzer (Model No. 3100) in substantial accordance with ASTM D 7191-05, which is incorporated herein in its entirety by reference thereto for all purposes. The test temperature (§X2.1.2) may be 130°C, the sample size (§X2.1.1) may be 2 to 4 grams, and the vial purge time (§X2.1.4) may be 30 seconds. Further, the ending criteria (§X2.1.3) may be defined as a "prediction" mode, which means that the test is ended when the built-in programmed criteria (which mathematically calculates the end point moisture content) is satisfied.

25 Detailed Description

[0023] The present invention is directed to a multi-component fiber that includes a core component surrounded by a distinct sheath component, which can be continuous or discontinuous (e.g., fragmented) along the surface of the fiber. The core component is formed primarily from polylactic acid and the sheath component is formed primarily from a polymeric toughening additive. For example, polylactic acid may constitute about 50 wt.% or more, in some embodiments from about 75 wt.% or more, and in some embodiments, from about 90 wt.% to 100 wt.% of the polymer content of the core component, and the polymeric toughening additive may constitute about 50 wt.% or more, in some embodiments from about 75 wt.% or more, and in some embodiments, from about 90 wt.% to 100 wt.% of the polymer content of the sheath component. To optimize the biodegradability and/or renewability of the fiber, the relative thickness of the sheath component is typically small. For example, the sheath component typically constitutes only from about 0.5% to about 25%, in some embodiments from about 1% to about 20%, and in some embodiments, from about 2% to about 15% of the diameter of the fiber, while the core component typically constitutes from about 75% to about 99.5%, in some embodiments from about 80% to about 99%, and in some embodiments, from about 85% to about 98% of the diameter of the fiber. The thickness of the sheath component may, for instance, be from about 100 nanometers to about 5 micrometers, in some embodiments from about 200 nanometers to about 4 micrometers, and in some embodiments, from about 500 nanometers to about 2 micrometers.

[0024] The sheath/core configuration of the fiber of the present invention may provide a variety of different benefits to the resulting fiber. For instance, the polymeric toughening additive can help increase the ability of the fiber to absorb energy that arises from stresses imparted during fiber drawing, which increases the overall toughness and strength of the fibers. At the same time, the presence of the toughening additive in the sheath component can enhance the degree of bonding to other fibers (the same or different), such as when employed in a nonwoven web material. Furthermore, the sheath component can also provide screw lubrication and reduce the level of torque needed during fiber extrusion. Another benefit of the present invention is that the sheath/core configuration may be formed from a thermoplastic composition in which the polylactic acid and polymeric toughening additive are blended together. Rather than using separate compositions as is common with most bicomponent fibers, the use of a blended thermoplastic composition can reduce costs and manufacturing complexity. Without intending to be limited by theory, the present inventors believe that the use of a blended thermoplastic composition to form the sheath/core configuration is possible due to the unique manner in which the polymeric components are dispersed within the blend, and the manner in which the melt blending and extrusion conditions are controlled so that the polymeric toughening additive is able to migrate to the surface of the core. In this regard, a polyepoxide modifier is employed in the composition that acts as a compatibilizer to enhance the homogeneity of the dispersion, and thus increase the likelihood that the polymeric toughening additive can migrate to the surface and form a distinct zone or layer over the polylactic acid core. The polyepoxide modifier also has an additional benefit in that it can react with the polylactic acid, thereby improving its melt strength and stability during fiber spinning

without significantly reducing glass transition temperature.


[0025] Various embodiments of the present invention will now be described in more detail.

5 I. Thermoplastic Composition

A. Polylactic Acid

[0026] Polylactic acid may generally be derived from monomer units of any isomer of lactic acid, such as levorotatory-lactic acid ("L-lactic acid"), dextrorotatory-lactic acid ("D-lactic acid"), meso-lactic acid, or mixtures thereof. Monomer units may also be formed from anhydrides of any isomer of lactic acid, including L-lactide, D-lactide, meso-lactide, or mixtures thereof. Cyclic dimers of such lactic acids and/or lactides may also be employed. Any known polymerization method, such as polycondensation or ring-opening polymerization, may be used to polymerize lactic acid. A small amount of a chain-extending agent (e.g., a diisocyanate compound, an epoxy compound or an acid anhydride) may also be employed. The polylactic acid may be a homopolymer or a copolymer, such as one that contains monomer units derived from L-lactic acid and monomer units derived from D-lactic acid. Although not required, the rate of content of one of the monomer unit derived from L-lactic acid and the monomer unit derived from D-lactic acid is preferably about 85 mole% or more, in some embodiments about 90 mole% or more, and in some embodiments, about 95 mole% or more. Multiple polylactic acids, each having a different ratio between the monomer unit derived from L-lactic acid and the monomer unit derived from D-lactic acid, may be blended at an arbitrary percentage. Of course, polylactic acid may also be blended with other types of polymers (e.g., polyolefins, polyesters, etc.) to provide a variety of different of benefits, such as processing, fiber formation, etc.

[0027] In one particular embodiment, the polylactic acid has the following general structure:



30 [0028] One specific example of a suitable polylactic acid polymer that may be used in the present invention is commercially available from Biomer, Inc. of Krailling, Germany) under the name BIOMER™ L9000. Other suitable polylactic acid polymers are commercially available from Natureworks LLC of Minnetonka, Minnesota (NATUREWORKS®) or Mitsui Chemical (LACEA™). Still other suitable polylactic acids may be described in U.S. Patent Nos. 4,797,468; 5,470,944; 5,770,682; 5,821,327; 5,880,254; and 6,326,458, which are incorporated herein in their entirety by reference thereto for all purposes.

35 [0029] The polylactic acid typically has a melting point of from about 140°C to about 260°C, in some embodiments from about 150°C to about 250°C, and in some embodiments, from about 160°C to about 220°C. Such polylactic acids are useful in that they biodegrade at a fast rate. The glass transition temperature ("Tg") of the polylactic acid may be relatively high, such as from about 40°C to about 80°C, in some embodiments from about 50°C to about 80°C, and in some embodiments, from about 55°C to about 65°C. As discussed in more detail above, the melting temperature and glass transition temperature may be determined using differential scanning calorimetry ("DSC") in accordance with ASTM D-3417.

40 [0030] The polylactic acid typically has a number average molecular weight ("M_n") ranging from about 40,000 to about 160,000 grams per mole, in some embodiments from about 50,000 to about 140,000 grams per mole, and in some embodiments, from about 80,000 to about 120,000 grams per mole. Likewise, the polymer also typically has a weight average molecular weight ("M_w") ranging from about 80,000 to about 200,000 grams per mole, in some embodiments from about 100,000 to about 180,000 grams per mole, and in some embodiments, from about 110,000 to about 160,000 grams per mole. The ratio of the weight average molecular weight to the number average molecular weight ("M_w/M_n"), i.e., the "polydispersity index", is also relatively low. For example, the polydispersity index typically ranges from about 1.0 to about 3.0, in some embodiments from about 1.1 to about 2.0, and in some embodiments, from about 1.2 to about 1.8. The weight and number average molecular weights may be determined by methods known to those skilled in the art.

45 [0031] The polylactic acid may also have an apparent viscosity of from about 50 to about 600 Pascal seconds (Pa·s), in some embodiments from about 100 to about 500 Pa·s, and in some embodiments, from about 200 to about 400 Pa·s, as determined at a temperature of 190°C and a shear rate of 1000 sec⁻¹. The melt flow rate of the polylactic acid (on a dry basis) may also range from about 0.1 to about 40 grams per 10 minutes, in some embodiments from about 0.5 to about 20 grams per 10 minutes, and in some embodiments, from about 5 to about 15 grams per 10 minutes, determined at a load of 2160 grams and at 190°C.

50 [0032] Neat polylactic acid will generally absorb water from the ambient environment such that it has a moisture content

of about 500 to 600 parts per million ("ppm"), or even greater, based on the dry weight of the starting polylactic acid. Moisture content may be determined in a variety of ways as is known in the art, such as in accordance with ASTM D 7191-05, such as described above. Because the presence of water during melt processing can hydrolytically degrade polylactic acid and reduce its molecular weight, it is sometimes desired to dry the polylactic acid prior to blending with polymeric toughening additive and polyepoxide modifier. In most embodiments, for example, it is desired that the polylactic acid have a moisture content of about 200 parts per million ("ppm") or less, in some embodiments from about 1 to about 100 ppm, and in some embodiments, from about 2 to about 80 ppm prior to blending with the polyepoxide modifier. Drying of the polylactic acid may occur, for instance, at a temperature of from about 50°C to about 100°C, and in some embodiments, from about 70°C to about 80°C.

10 B. Polymeric Toughening Additive

[0033] Due to its polymeric nature, the toughening additive possesses a relatively high molecular weight that can help improve the melt strength and stability of the thermoplastic composition. It is typically desired that the polymeric toughening additive is generally immiscible with the polylactic acid. In this manner, the toughening additive can become dispersed as discrete phase domains within a continuous phase of the polylactic acid in the core component, and also more easily migrate to the boundaries of the continuous phase to form the sheath component. The discrete domains in the core component are also capable of absorbing energy that arises from stress imparted during elongation of the composition during fiber drawing, which increases the overall toughness and strength of the resulting fibers.

[0034] To help ensure the formation of the desired domains and sheath component, the polymeric toughening additive may be selected to have a certain melt flow rate (or viscosity). For example, to ensure that the toughening additive is capable of migrating to the surface of the polylactic acid phase, it is generally desired that it possesses a higher melt flow rate (or lower viscosity) than the polylactic acid. Nevertheless, if the melt flow rate of the toughening additive is too high, it tends to flow and disperse uncontrollably through the continuous phase. This results in lamellar or plate-like domains that are difficult to maintain and also likely to prematurely fracture during fiber drawing. Conversely, if the melt flow rate of the toughening additive is too low, it tends to clump together and form very large elliptical domains, which are difficult to disperse during blending. This may cause uneven distribution of the toughening additive through the entirety of the continuous phase. In this regard, the ratio of the melt flow rate of the polylactic acid to the melt flow rate of the polymeric toughening additive is typically from about 0.1 to about 0.9, in some embodiments from about 0.15 to about 0.8, and in some embodiments, from about 0.2 to about 0.6. The polymeric toughening additive may, for example, have a melt flow rate of from about 1 to about 100 grams per 10 minutes, in some embodiments from about 5 to about 75 grams per 10 minutes, and in some embodiments, from about 10 to about 50 grams per 10 minutes, determined at a load of 2160 grams and at 230°C.

[0035] While the polymers are generally immiscible and possess a different melt flow rate, the toughening additive may nevertheless be selected to have a solubility parameter that is relatively similar to that of polylactic acid. This generally improves the interfacial adhesion and physical interaction of the boundaries of the discrete and continuous phases, and thus reduces the likelihood that the composition will fracture upon stretching. In this regard, the ratio of the solubility parameter for polylactic acid to that of the toughening additive is typically from about 0.5 to about 1.5, and in some embodiments, from about 0.8 to about 1.2. For example, the polymeric toughening additive may have a solubility parameter of from about 15 to about 30 MJoules^{1/2}/m^{3/2}, and in some embodiments, from about 18 to about 22 MJoules^{1/2}/m^{3/2}, while the polylactic acid may have a solubility parameter of about 20.5 MJoules^{1/2}/m^{3/2}. The term "solubility parameter" as used herein refers to the "Hildebrand Solubility Parameter", which is the square root of the cohesive energy density and calculated according to the following equation:

$$\delta = \sqrt{((\Delta H_v - RT)/V_m)}$$

where:

ΔH_v = heat of vaporization
 R = Ideal Gas constant
 T = Temperature
 V_m = Molecular Volume

[0036] The Hildebrand solubility parameters for many polymers are also available from the Solubility Handbook of Plastics, by Wyeych (2004), which is incorporated herein by reference.

[0037] In addition to the properties noted above, the mechanical characteristics of the polymeric toughening additive

may also be selected to achieve the desired increase in fiber toughness. For example, the toughening additive may have a relatively low Young's modulus of elasticity in comparison to the polylactic acid. For example, the ratio of the modulus of elasticity of polylactic acid to that of the toughening additive is typically from about 1 to about 250, in some embodiments from about 2 to about 100, and in some embodiments, from about 2 to about 50. The modulus of elasticity of the toughening additive may, for instance, range from about 2 to about 500 Megapascals (MPa), in some embodiments from about 5 to about 300 MPa, and in some embodiments, from about 10 to about 200 MPa. To the contrary, the modulus of elasticity of polylactic acid is typically from about 800 MPa to about 2000 MPa. The polymeric toughening additive may also exhibit a peak elongation (i.e., the percent elongation of the polymer at its peak load) greater than polylactic acid. For example, the polymeric toughening additive of the present invention may exhibit a peak elongation of about 50% or more, in some embodiments about 100% or more, in some embodiments from about 100% to about 2000%, and in some embodiments, from about 250% to about 1500%.

[0038] While a wide variety of polymeric additives may be employed that have the properties identified above, particularly suitable examples of such polymers may include, for instance, polyolefins (e.g., polyethylene, polypropylene, polybutylene, etc.); polytetrafluoroethylenes; polyesters (e.g., recycled polyester, polyethylene terephthalate, etc.); polyvinyl acetates (e.g., poly(ethylene vinyl acetate), polyvinyl chloride acetate, etc.); polyvinyl alcohols (e.g., polyvinyl alcohol, poly(ethylene vinyl alcohol), etc.); polyvinyl butyrls; acrylic resins (e.g., polyacrylate, polymethylacrylate, polymethylmethacrylate, etc.); polyamides (e.g., nylon); polyvinyl chlorides; polyvinylidene chlorides; polystyrenes; polyurethanes; etc. Suitable polyolefins may, for instance, include ethylene polymers (e.g., low density polyethylene ("LDPE"), high density polyethylene ("HDPE"), linear low density polyethylene ("LLDPE"), etc.), propylene homopolymers (e.g., syndiotactic, atactic, isotactic, etc.), propylene copolymers, and so forth.

[0039] In one particular embodiment, the polymer is a propylene polymer, such as homopolypropylene or a copolymer of propylene. The propylene polymer may, for instance, be formed a substantially isotactic polypropylene homopolymer or a copolymer containing equal to or less than about 10 wt.% of other monomer, i.e., at least about 90% by weight propylene. Such homopolymers may have a melting point of from about 160°C to about 170°C.

[0040] In still another embodiment, the polyolefin may be a copolymer of ethylene or propylene with another α -olefin, such as a C₃-C₂₀ α -olefin or C₃-C₁₂ α -olefin. Specific examples of suitable α -olefins include 1-butene; 3-methyl-1-butene; 3,3-dimethyl-1-butene; 1-pentene; 1-pentene with one or more methyl, ethyl or propyl substituents; 1-hexene with one or more methyl, ethyl or propyl substituents; 1-heptene with one or more methyl, ethyl or propyl substituents; 1-octene with one or more methyl, ethyl or propyl substituents; 1-nonene with one or more methyl, ethyl or propyl substituents; ethyl, methyl or dimethyl-substituted 1-decene; 1-dodecene; and styrene. Particularly desired α -olefin comonomers are 1-butene, 1-hexene and 1-octene. The ethylene or propylene content of such copolymers may be from about 60 mole% to about 99 mole%, in some embodiments from about 80 mole% to about 98.5 mole%, and in some embodiments, from about 87 mole% to about 97.5 mole%. The α -olefin content may likewise range from about 1 mole% to about 40 mole%, in some embodiments from about 1.5 mole% to about 15 mole%, and in some embodiments, from about 2.5 mole% to about 13 mole%.

[0041] Exemplary olefin copolymers for use in the present invention include ethylene-based copolymers available under the designation EXACT™ from ExxonMobil Chemical Company of Houston, Texas. Other suitable ethylene copolymers are available under the designation ENGAGE™, AFFINITY™, DOWLEX™ (LLDPE) and ATTANE™ (ULDPE) from Dow Chemical Company of Midland, Michigan. Other suitable ethylene polymers are described in U.S. Patent Nos. 4,937,299 to Ewen et al.; 5,218,071 to Tsutsui et al.; 5,272,236 to Lai, et al.; and 5,278,272 to Lai, et al., which are incorporated herein in their entirety by reference thereto for all purposes. Suitable propylene copolymers are also commercially available under the designations VISTAMAXX™ from ExxonMobil Chemical Co. of Houston, Texas; FINA™ (e.g., 8573) from Atofina Chemicals of Feluy, Belgium; TAFMER™ available from Mitsui Petrochemical Industries; and VERSIFY™ available from Dow Chemical Co. of Midland, Michigan. Other examples of suitable propylene polymers are described in U.S. Patent Nos. 6,500,563 to Datta, et al.; 5,539,056 to Yang, et al.; and 5,596,052 to Resconi, et al., which are incorporated herein in their entirety by reference thereto for all purposes.

[0042] Any of a variety of known techniques may generally be employed to form the olefin copolymers. For instance, olefin polymers may be formed using a free radical or a coordination catalyst (e.g., Ziegler-Natta). Preferably, the olefin polymer is formed from a single-site coordination catalyst, such as a metallocene catalyst. Such a catalyst system produces ethylene copolymers in which the comonomer is randomly distributed within a molecular chain and uniformly distributed across the different molecular weight fractions. Metallocene-catalyzed polyolefins are described, for instance, in U.S. Patent Nos. 5,571,619 to McAlpin et al.; 5,322,728 to Davis et al.; 5,472,775 to Obijeski et al.; 5,272,236 to Lai et al.; and 6,090,325 to Wheat, et al., which are incorporated herein in their entirety by reference thereto for all purposes. Examples of metallocene catalysts include bis(n-butylcyclopentadienyl)titanium dichloride, bis(n-butylcyclopentadienyl)zirconium dichloride, bis(cyclopentadienyl)scandium chloride, bis(indenyl)zirconium dichloride, bis(methylcyclopentadienyl)titanium dichloride, bis(methylcyclopentadienyl)zirconium dichloride, cobaltocene, cyclopentadienyltitanium trichloride, ferrocene, hafnocene dichloride, isopropyl(cyclopentadienyl,-1-fluorenyl)zirconium dichloride, molybdocene dichloride, nickelocene, niobocene dichloride, ruthenocene, titanocene dichloride, zirconocene chloride hydride, zir-

conocene dichloride, and so forth. Polymers made using metallocene catalysts typically have a narrow molecular weight range. For instance, metallocene-catalyzed polymers may have polydispersity numbers (M_w/M_n) of below 4, controlled short chain branching distribution, and controlled isotacticity.

5 [0043] The amount of the toughening additive is typically from about 1 wt.% to about 25 wt.%, in some embodiments from about 2 wt.% to about 20 wt.%, and in some embodiments, from about 5 wt.% to about 15 wt.% of the thermoplastic composition.

C. Polyepoxide Modifier

10 [0044] As indicated above, a polyepoxide modifier is also employed in the thermoplastic composition to help improve the ability of the polymeric toughening additive to become dispersed and migrate to the surface of the fiber. The polyepoxide modifier can also improve the melt stability and strength of the composition. The polyepoxide modifier is a polymer that contains, on average, at least two oxirane rings per molecule. Without intending to be limited by theory, it is believed that the polyepoxide molecules can induce reaction of the polylactic acid under certain conditions, thereby improving its 15 melt strength without significantly reducing glass transition temperature. The reaction may involve chain extension, side chain branching, grafting, copolymer formation, etc. Chain extension, for instance, may occur through a variety of different reaction pathways. For instance, the modifier may enable a nucleophilic ring-opening reaction via the carboxyl terminal group of the polylactic acid (esterification) or via a hydroxyl group (etherification). Oxazoline side reactions may likewise occur to form esteramide moieties. Through such reactions, the molecular weight of the polylactic acid may be increased 20 to counteract the degradation often observed during melt processing. While it is desirable to induce a reaction with polylactic acid as described above, the present inventors have discovered that the too much of a reaction can lead to crosslinking between polylactic backbones. If such crosslinking is allowed to proceed to a significant extent, the resulting polymer blend can become brittle and difficult to draw into fibers with the desired strength and elongation properties. In this regard, the present inventors have discovered that polyepoxide modifiers having a relatively low epoxy functionality 25 are particularly effective, which may be quantified by its "epoxy equivalent weight." The epoxy equivalent weight reflects the amount of resin that contains one molecule of an epoxy group, and it may be calculated by dividing the number average molecular weight of the modifier by the number of epoxy groups in the molecule. The polyepoxide modifier of the present invention typically has a number average molecular weight from about 7,500 to about 250,000 grams per mole, in some embodiments from about 15,000 to about 150,000 grams per mole, and in some embodiments, from about 30 20,000 to 100,000 grams per mole, with a polydispersity index typically ranging from 2.5 to 7. The polyepoxide modifier may contain less than 50, in some embodiments from 5 to 45, and in some embodiments, from 15 to 40 epoxy groups. In turn, the epoxy equivalent weight may be less than about 15,000 grams per mole, in some embodiments from about 200 to about 10,000 grams per mole, and in some embodiments, from about 500 to about 7,000 grams per mole.

35 [0045] The polyepoxide may be a linear or branched, homopolymer or copolymer (e.g., random, graft, block, etc.) containing terminal epoxy groups, skeletal oxirane units, and/or pendent epoxy groups. The monomers employed to form such polyepoxides may vary. In one particular embodiment, for example, the polyepoxide modifier contains at least one epoxy-functional (meth)acrylic monomeric component. As used herein, the term "(meth)acrylic" includes acrylic and methacrylic monomers, as well as salts or esters thereof, such as acrylate and methacrylate monomers. For example, suitable epoxy-functional (meth)acrylic monomers may include, but are not limited to, those containing 1,2-epoxy groups, 40 such as glycidyl acrylate and glycidyl methacrylate. Other suitable epoxy-functional monomers include allyl glycidyl ether, glycidyl ethacrylate, and glycidyl itoconate.


45 [0046] The polyepoxide typically has a relatively high molecular weight, as indicated above, so that it can not only result in chain extension of the polylactic acid, but also help to achieve the desired blend morphology, as will be described in more detail below. The resulting melt flow rate of the polymer is thus typically within a range of from about 10 to about 200 grams per 10 minutes, in some embodiments from about 40 to about 150 grams per 10 minutes, and in some embodiments, from about 60 to about 120 grams per 10 minutes, determined at a load of 2160 grams and at a temperature of 190°C.

50 [0047] If desired, additional monomers may also be employed in the polyepoxide to help achieve the desired molecular weight. Such monomers may vary and include, for example, ester monomers, (meth)acrylic monomers, olefin monomers, amide monomers, etc. In one particular embodiment, for example, the polyepoxide modifier includes at least one linear or branched α -olefin monomer, such as those having from 2 to 20 carbon atoms and preferably from 2 to 8 carbon atoms. Specific examples include ethylene, propylene, 1-butene; 3-methyl-1-butene; 3,3-dimethyl-1-butene; 1-pentene; 1-pentene with one or more methyl, ethyl or propyl substituents; 1-hexene with one or more methyl, ethyl or propyl substituents; 1-heptene with one or more methyl, ethyl or propyl substituents; 1-octene with one or more methyl, ethyl or propyl substituents; 1-nonene with one or more methyl, ethyl or propyl substituents; ethyl, methyl or dimethyl-substituted 55 1-decene; 1-dodecene; and styrene. Particularly desired α -olefin comonomers are ethylene and propylene.

[0048] Another suitable monomer may include a (meth)acrylic monomer that is not epoxy-functional. Examples of such (meth)acrylic monomers may include methyl acrylate, ethyl acrylate, n-propyl acrylate, i-propyl acrylate, n-butyl

acrylate, s-butyl acrylate, i-butyl acrylate, t-butyl acrylate, n-amyl acrylate, i-amyl acrylate, isobornyl acrylate, n-hexyl acrylate, 2-ethylbutyl acrylate, 2-ethylhexyl acrylate, n-octyl acrylate, n-decyl acrylate, methylcyclohexyl acrylate, cyclopentyl acrylate, cyclohexyl acrylate, methyl methacrylate, ethyl methacrylate, 2-hydroxyethyl methacrylate, n-propyl methacrylate, n-butyl methacrylate, i-propyl methacrylate, i-butyl methacrylate, n-amyl methacrylate, n-hexyl methacrylate, i-amyl methacrylate, s-butyl-methacrylate, t-butyl methacrylate, 2-ethylbutyl methacrylate, methylcyclohexyl methacrylate, cinnamyl methacrylate, crotyl methacrylate, cyclohexyl methacrylate, cyclopentyl methacrylate, 2-ethoxyethyl methacrylate, isobornyl methacrylate, etc., as well as combinations thereof.

[0049] In one particularly desirable embodiment of the present invention, the polyepoxide modifier is a terpolymer formed from an epoxy-functional (meth)acrylic monomeric component, α -olefin monomeric component, and non-epoxy functional (meth)acrylic monomeric component. For example, the polyepoxide modifier may be poly(ethylene-co-methylacrylate-co-glycidyl methacrylate), which has the following structure:

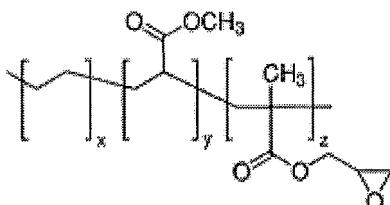

wherein, x, y, and z are 1 or greater.

[0050] The epoxy functional monomer may be formed into a polymer using a variety of known techniques. For example, a monomer containing polar functional groups may be grafted onto a polymer backbone to form a graft copolymer. Such grafting techniques are well known in the art and described, for instance, in U.S. Patent No. 5,179,164, which is incorporated herein in its entirety by reference thereto for all purposes. In other embodiments, a monomer containing epoxy functional groups may be copolymerized with a monomer to form a block or random copolymer using known free radical polymerization techniques, such as high pressure reactions, Ziegler-Natta catalyst reaction systems, single site catalyst (e.g., metallocene) reaction systems, etc.

[0051] The relative portion of the monomeric component(s) may be selected to achieve a balance between epoxy-reactivity and melt flow rate. More particularly, high epoxy monomer contents can result in good reactivity with polylactic acid, but too high of a content may reduce the melt flow rate to such an extent that the polyepoxide modifier adversely impacts the melt strength of the polymer blend. Thus, in most embodiments, the epoxy-functional (meth)acrylic monomer(s) constitute from about 1 wt.% to about 25 wt.%, in some embodiments from about 2 wt.% to about 20 wt.%, and in some embodiments, from about 4 wt.% to about 15 wt.% of the copolymer. The α -olefin monomer(s) may likewise constitute from about 55 wt.% to about 95 wt.%, in some embodiments from about 60 wt.% to about 90 wt.%, and in some embodiments, from about 65 wt.% to about 85 wt.% of the copolymer. When employed, other monomeric components (e.g., non-epoxy functional (meth)acrylic monomers) may constitute from about 5 wt.% to about 35 wt.%, in some embodiments from about 8 wt.% to about 30 wt.%, and in some embodiments, from about 10 wt.% to about 25 wt.% of the copolymer. One specific example of a suitable polyepoxide modifier that may be used in the present invention is commercially available from Arkema under the name Lotader® AX8950 or AX8900. Lotader® AX8950 has a melt flow rate of 70 to 100 g/10 min and has a glycidyl methacrylate monomer content of 7 wt.% to 11 wt.%, a methyl acrylate monomer content of 13 wt.% to 17 wt.%, and an ethylene monomer content of 72 wt.% to 80 wt.%.

[0052] In addition to controlling the type and relative content of the monomers used to form the polyepoxide modifier, the overall weight percentage may also be controlled to achieve the desired benefits. For example, if the modification level is too low, the desired increase in melt strength and mechanical properties may not be achieved. The present inventors have also discovered, however, that if the modification level is too high, fiber drawing may be restricted due to strong molecular interactions (e.g., crosslinking) and physical network formation by the epoxy functional groups. Thus, the polyepoxide modifier is typically employed in an amount of from about 0.01 wt.% to about 10 wt.%, in some embodiments from about 0.05 wt.% to about 5 wt.%, in some embodiments from about 0.1 wt.% to about 1.5 wt.%, and in some embodiments, from about 0.2 wt.% to about 0.8 wt.%, based on the weight of the polylactic acid employed in the composition. Depending on what other components are employed, the concentration of the polyepoxide modifier in the entire thermoplastic composition may be the same or less than the ranges noted above. In certain embodiments, for example, the polyepoxide modifier constitutes from about 0.01 wt.% to about 10 wt.%, in some embodiments from about 0.05 wt.% to about 5 wt.%, in some embodiments from about 0.1 wt.% to about 1.5 wt.%, and in some embodiments, from about 0.2 wt.% to about 0.8 wt.%, based on the total weight of the composition. Likewise, polylactic acid typically constitutes about 70 wt.% or more, in some embodiments, from about 80 wt.% to about 99 wt.%, and in some embodiments, from about 85 wt.% to about 95 wt.% of the composition.

D. Other Components

[0053] One beneficial aspect of the present invention is that good mechanical properties (e.g., elongation) may be provided without the need for conventional plasticizers, such as alkylene glycols (e.g., polyethylene glycols, such as those available from Dow Chemical under the name Carbowax™), alkane diols, and alkylene oxides that possess one or more hydroxyl groups which attack the ester linkages of the polylactic acid and result in hydrolytic degradation. Other examples of such plasticizers are described in U.S. Patent No. 2010/0048082 to Topolkaraev, et al., which is incorporated herein in its entirety by reference thereto for all purposes. The thermoplastic composition may be substantially free of such plasticizers. Nevertheless, it should be understood that plasticizers may be used in certain embodiments of the present invention. When utilized, however, the plasticizers are typically present in an amount of less than about 10 wt.%, in some embodiments from about 0.1 wt.% to about 5 wt.%, and in some embodiments, from about 0.2 wt.% to about 2 wt.% of the thermoplastic composition.

[0054] Of course, other ingredients may be utilized for a variety of different reasons. For instance, materials that may be used include, without limitation, catalysts, pigments, antioxidants, stabilizers, surfactants, waxes, flow promoters, solid solvents, compatibilizers, nucleating agents (e.g., titanium dioxide, calcium carbonate, etc.), particulates, and other materials added to enhance the processability of the thermoplastic composition. When utilized, it is normally desired that the amounts of these additional ingredients are minimized to ensure optimum compatibility and cost-effectiveness. Thus, for example, it is normally desired that such ingredients constitute less than about 10 wt.%, in some embodiments less than about 8 wt.%, and in some embodiments, less than about 5 wt.% of the thermoplastic composition.

[0055] It should also be understood that other components may be included in the thermoplastic composition. One such component that may be employed is an additional biodegradable polyester, including aliphatic polyesters, such as polycaprolactone, polyesteramides, modified polyethylene terephthalate, polylactic acid (PLA) and its copolymers, terpolymers based on polylactic acid, polyglycolic acid, polyalkylene carbonates (e.g., polyethylene carbonate), poly-3-hydroxybutyrate (PHB), poly-3-hydroxyvalerate (PHV), poly-3-hydroxybutyrate-co-4-hydroxybutyrate, poly-3-hydroxybutyrate-co-3-hydroxyvalerate copolymers (P H BV), poly-3-hydroxybutyrate-co-3-hydroxyhexanoate, poly-3-hydroxybutyrate-co-3-hydroxyoctanoate, poly-3-hydroxybutyrate-co-3-hydroxydecanoate, poly-3-hydroxybutyrate-co-3-hydroxyoctadecanoate, and succinate-based aliphatic polymers (e.g., polybutylene succinate, polybutylene succinate adipate, polyethylene succinate, etc.); aliphatic-aromatic copolymers (e.g., polybutylene adipate terephthalate, polyethylene adipate terephthalate, polyethylene adipate isophthalate, polybutylene adipate isophthalate, etc.), and so forth.

II. Blending

[0056] The blending of the components of the thermoplastic composition may be performed using any of a variety of known techniques. In one embodiment, for example, the raw materials (e.g., polylactic acid, polyepoxide modifier, and polymeric toughening additive) may be supplied separately or in combination. For instance, the raw materials may first be dry mixed together to form an essentially homogeneous dry mixture. The raw materials may likewise be supplied either simultaneously or in sequence to a melt processing device that dispersively blends the materials. Batch and/or continuous melt processing techniques may be employed. For example, a mixer/kneader, Banbury mixer, Farrel continuous mixer, single-screw extruder, twin-screw extruder, roll mill, etc., may be utilized to blend and melt process the materials. Particularly suitable melt processing devices may be a co-rotating, twin-screw extruder (e.g., ZSK-30 extruder available from Werner & Pfleiderer Corporation of Ramsey, New Jersey or a Thermo Prism™ USALAB 16 extruder available from Thermo Electron Corp., Stone, England). Such extruders may include feeding and venting ports and provide high intensity distributive and dispersive mixing. For example, the materials may be fed to the same or different feeding ports of the twin-screw extruder and melt blended to form a substantially homogeneous melted mixture. If desired, additives may also be injected into the polymer melt and/or separately fed into the extruder at a different point along its length. Alternatively, the additives may be pre-blended with the polylactic acid, polymeric toughening agent, and/or the polyepoxide modifier.

[0057] Regardless of the particular processing technique chosen, the raw materials may be blended under high shear/pressure and low heat to ensure sufficient dispersion without causing the polyepoxide modifier to prematurely undergo a substantial reaction with the polylactic acid. For example, blending typically occurs at a temperature of above the melting point of the polylactic acid but below the temperature used to initiate the reaction of the polyepoxide modifier to a significant extent (e.g., about 230°C), such as from about 170°C to about 230°C, in some embodiments from about 180°C to about 220°C, and in some embodiments, from about 185°C to about 215°C. Likewise, the apparent shear rate during melt processing may range from about 100 seconds⁻¹ to about 10,000 seconds⁻¹, in some embodiments from about 200 seconds⁻¹ to about 5000 seconds⁻¹, and in some embodiments, from about 500 seconds⁻¹ to about 1200 seconds⁻¹. The apparent shear rate is equal to $4Q/\pi R^3$, where Q is the volumetric flow rate ("m³/s") of the polymer melt and R is the radius ("m") of the capillary (e.g., extruder die) through which the melted polymer flows. Of course, other variables, such as the residence time during melt processing, which is inversely proportional to throughput rate, may

also be controlled to achieve the desired degree of homogeneity.

[0058] Due to the selective control over the polyepoxide modifier (e.g., activity, molecular weight, etc.) and the particular melt blending conditions, the present inventors have discovered that a morphology may be formed that enhances the reactivity with polylactic acid. More particularly, the resulting morphology may have a plurality of discrete phase domains of the polyepoxide modifier distributed throughout a continuous polylactic acid matrix. The domains may have a variety of different shapes, such as elliptical, spherical, cylindrical, etc. Regardless of the shape, however, the size of an individual domain, after blending, is small to provide an increased surface area for subsequent reaction with the polylactic acid. For example, the size of a domain (e.g., length) typically ranges from about 10 to about 1000 nanometers, in some embodiments from about 20 to about 800 nanometers, in some embodiments from about 40 to about 600 nanometers, and in some embodiments from about 50 to about 400 nanometers. The toughening additive may also form discrete domains within the polylactic acid matrix. When formed, such domains are typically larger than the polyepoxide domains. For example, the toughening additive domains may have a dimension (e.g., length) of from about 0.5 μm to about 30 μm , and in some embodiments from about 1 μm to about 10 μm . Of course, it should be also understood that the domains may be formed by a combination of the polyepoxide, toughening additive, and/or other components of the blend.

[0059] Although differing from the starting polymer in certain properties, the thermoplastic composition may nevertheless retain other properties of the starting polymer. For example, because the thermoplastic composition does not generally contain a plasticizer, the glass transition temperature (T_g) of the composition is typically the same as the glass transition temperature of polylactic acid. That is, the thermoplastic composition may have a T_g of from about 50°C to about 80°C, and in some embodiments, from about 55°C to about 65°C. The melting point of the thermoplastic composition may also range from about 150°C to about 250°C, and in some embodiments, from about 160°C to about 220°C.

III. Fiber Formation

[0060] Any of a variety of processes may be used to form multi-component fibers from the blended thermoplastic composition. For example, the composition may be extruded through a spinneret, quenched, and drawn into the vertical passage of a fiber draw unit. The reaction of the polyepoxide modifier and polylactic acid may occur during this process, or it may occur prior to introduction to the fiber formation line. In one embodiment, for example, the blend may be supplied to an extruder (e.g., single screw) that includes a screw rotatably mounted and received within a barrel (e.g., cylindrical barrel), which may be heated. The blend is moved downstream from a feed end to a discharge end by forces exerted by rotation of the screw. Such screw extruders are typically divided into three sections along the length of the screw. The first section is a feed section where the solid material is introduced to the screw. The second section is a melting section where a majority of the melting of the solid occurs. Within this section, the screw generally possesses a tapered diameter to enhance melting of the polymer. The third section is the mixing section, which delivers the molten material in a constant amount for extrusion. The configuration of the screw is not particularly critical to the present invention and it may contain any number and/or orientation of threads and channels as is known in the art.

[0061] The speed of the screw may also be selected to achieve the desired residence time, shear rate, melt processing temperature, etc. For example, the screw speed may range from about 50 to about 200 revolutions per minute ("rpm"), in some embodiments from about 70 to about 150 rpm, and in some embodiments, from about 80 to about 120 rpm. This may result in a temperature that is greater than that normally used to extrude polylactic acid and sufficient high to initiate reaction of the polyepoxide modifier, such as above about 230°C. For example, the extruder may employ one or multiple zones, at least one of which operates at a temperature of from about 230°C to about 350°C, in some embodiments from about 235°C to about 300°C, and in some embodiments, from about 240°C to about 280°C.

[0062] The melt shear rate, and in turn the degree to which the reaction is initiated, may also be increased through the use of one or more distributive and/or dispersive mixing elements within the mixing section of the extruder. Suitable distributive mixers for single screw extruders may include, for instance, Saxon, Dulmage, Cavity Transfer mixers, etc. Likewise, suitable dispersive mixers may include Blister ring, Leroy/Maddock, CRD mixers, etc. As is well known in the art, the mixing may be further improved by using pins in the barrel that create a folding and reorientation of the polymer melt, such as those used in Buss Kneader extruders, Cavity Transfer mixers, and Vortex Intermeshing Pin (VIP) mixers. Regardless of the particular elements selected, the use of one or more mixing elements may create intensive melt shear rates that help initiate the desired reaction. Typically, the apparent shear rate during melt processing may range from about 100 seconds^{-1} to about 10,000 seconds^{-1} , in some embodiments from about 200 seconds^{-1} to about 5000 seconds^{-1} , and in some embodiments, from about 500 seconds^{-1} to about 1200 seconds^{-1} . Of course, other variables, such as the residence time during melt processing, which is inversely proportional to throughput rate, may also be controlled to achieve the desired degree of reaction.

[0063] After exiting through an extrusion die, the molten plastic is desirably supplied to an underwater pelletizer system in which a polymer strand is cooled and solidified by circulating cooling water and thereafter cut in a water stream. The cooling water and/or stream may be maintained at a temperature of 5°C to about 30°C, and in some embodiments, from about 10°C to about 25°C. Without intending to be limited by theory, it is believed that such an underwater pelletizer

system can allow the use of high exit pressures and/or temperatures at the die, which can force more of the lower viscosity polymeric toughening additive to the outer walls of the die and create the desired sheath component as it exits. The exit pressure may, for example, be about 100 pounds per square inch ("psi") or more, in some embodiments about 300 psi or more, and in some embodiments, about 500 psi or more.

5 [0064] The particular configuration of the underwater pelletizing may vary as is well known to those skilled in the art. For instance, various suitable underwater pelletizing systems are described in U.S. Patent Nos. 3,981,950 and 6,663,372, which are incorporated herein by reference thereto. Referring to Fig. 7, for example, one particular embodiment of an underwater pelletizing system 110 is shown that contains an extruder 112 which supplies a molten polymer into a water chamber 118 through an extrusion die 114. The die 114 is coupled to the extruder 112 by one or more adaptors 116 and to the water chamber 118, either directly or with adaptors. In the water chamber 118, a cutting system cuts the strands of polymer passing through the die 114 to form pellets. If desired, the cutting system may include, for instance, a motor 130 that drives a drive shaft 128 upon which is mounted, a cutting assembly 150. A controller 134 may be used to adjust the speed of the drive shaft 128. Once formed, the pellets may be conveyed by water running through a conduit 120 into a dryer 122, where they may be separated, dried and collected in a container 124. The water may be driven by a pump 126 as is known in the art.

10 [0065] In addition to an underwater pelletizing system, other techniques may also be employed in the present invention to achieve the high pressure and/or temperature noted above. For instance, one or more screens ("screen pack") may be employed within the extruder barrel that are optionally reinforced by a breaker plate. In addition to removing contaminants and unmelted solids, the screen pack/breaker plate assembly can help increase pressure. The amount of head pressure can be controlled by varying the configuration of the screen pack (the number of screens, hole size of the screens, etc.). The screen pack may include, for instance, from 2 to 15 screens, in some embodiments from 3 to 10 screens, and in some embodiments, from 4 to 8 screens. When multiple screens are employed, the upstream screens are generally of a size to collect only large particles while subsequent downstream screens are of a size to collect increasingly smaller particles. Although screens of various sizes may be employed, it is typically desired that the pack employ at least one screen having openings of a relatively small size to create a high enough back pressure in the barrel. For example, the screen may contain openings having an average width (or diameter) of about 100 micrometers or less, in some embodiments about 75 micrometers or less, and in some embodiments, from about 1 to about 50 micrometers. Preferably, the pack employs multiple screens (e.g., 3 or more) having openings of this size.

15 [0066] Regardless of the technique employed, pellets formed from the blended thermoplastic composition may be formed into fibers using any of a variety of known techniques. Referring to Fig. 1, for example, one particular embodiment of a method for forming fibers is shown in more detail. In this particular embodiment, the pellets are extruded at a relatively high temperature to induce the reaction between the epoxy functional group of the modifier and the polylactic acid, as well as to facilitate formation of the desired sheath/core configuration. For instance, the blend is fed into an extruder 12 from a hopper 14. The blend may be provided to the hopper 14 using any conventional technique. The extruded composition is then passed through a polymer conduit 16 to a spinneret 18. For example, the spinneret 18 may include a housing containing a spin pack having a plurality of plates stacked one on top of each other and having a pattern of openings arranged to create flow paths for directing polymer components. The spinneret 18 also has openings arranged in one or more rows. The openings form a downwardly extruding curtain of filaments when the polymers are extruded therethrough. The process 10 also employs a quench blower 20 positioned adjacent the curtain of fibers extending from the spinneret 18. Air from the quench air blower 20 quenches the fibers extending from the spinneret 18. The quench air may be directed from one side of the fiber curtain as shown in Fig. 1 or both sides of the fiber curtain.

20 [0067] After quenching, the fibers are drawn into the vertical passage of a fiber draw unit 22. Fiber draw units or aspirators for use in melt spinning polymers are well-known in the art. Suitable fiber draw units for use in the process of the present invention include a linear fiber aspirator of the type shown in U.S. Patent Nos. 3,802,817 and 3,423,255, which are incorporated herein in their entirety by reference thereto for all relevant purposes. The fiber draw unit 22 generally includes an elongated vertical passage through which the fibers are drawn by aspirating air entering from the sides of the passage and flowing downwardly through the passage. A heater or blower 24 supplies aspirating air to the fiber draw unit 22. The aspirating air draws the fibers and ambient air through the fiber draw unit 22. The flow of gas causes the fibers to draw or attenuate which increases the molecular orientation or crystallinity of the polymers forming the fibers. The fibers are deposited through the outlet opening of the fiber draw unit 22 and onto a godet roll 42. Due to the high strength of the fibers of the present invention, high draw ratios may be employed in the present invention. The draw ratio is the linear speed of the fibers after drawing (e.g., linear speed of the godet roll 42 or a foraminous surface (not shown) divided by the linear speed of the fibers after extrusion. For example, the draw ratio may be calculated in certain embodiments as follows:

wherein,

A is the linear speed of the fiber after drawing (i.e., godet speed) and is directly measured; and
 B is the linear speed of the extruded fiber and can be calculated as follows:

5

$$\text{Extruder linear fiber speed} = C/(25\pi D E^2)$$

wherein,

10

C is the throughput through a single hole (grams per minute);
 D is the melt density of the polymer (grams per cubic centimeter); and
 E is the diameter of the orifice (in centimeters) through which the fiber is extruded. In certain embodiments of the
 15 present invention, the draw ratio may be from about 200:1 to about 7500:1, in some embodiments from about 500:1 to about 6500:1, and in some embodiments, from about 1000:1 to about 6000:1.

15

[0068] If desired, the fibers collected on the godet roll 42 may optionally be subjected to additional in line processing and/or converting steps (not shown) as will be understood by those skilled in the art. For example, staple fibers may be formed by "cold drawing" the collected fibers at a temperature below their softening temperature to the desired diameter, and thereafter crimping, texturizing, and/or cutting the fibers to the desired fiber length. The staple fibers may, for instance, have a length in the range of from about 3 to about 80 millimeters, in some embodiments from about 4 to about 65 millimeters, and in some embodiments, from about 5 to about 50 millimeters. The staple fibers may then be incorporated into a nonwoven web as is known in the art, such as bonded carded webs, through-air bonded webs, etc. The fibers may also be deposited onto a foraminous surface to form a nonwoven web.

20

[0069] Regardless of the particular technique employed, the present inventors have discovered that subjecting the blended thermoplastic composition to fiber drawing results in the formation of a multi-component fiber contains a core component that is formed primarily from polylactic acid and a sheath component formed primarily from the polymeric toughening additive. The core component and/or sheath component, however, may also contain other ingredients. For example, the core component typically contains the polyepoxide modifier. Further, a portion of the polymeric toughening additive from the original thermoplastic composition may also remain within the core component. Referring to Fig. 6, one particular embodiment of a fiber 200 made in accordance with the present invention is shown in more detail. As illustrated, the fiber includes a core component 202 that contains polylactic acid surrounded by a sheath component 302 that contains the polymeric toughening additive. Although shown herein as a bicomponent fiber, it should also be understood that the multi-component fiber may also contain other components. The core component 202 and the sheath component 302 are arranged in distinctive zones across the cross section of the fibers. In this embodiment, the core component 202 is shown substantially concentric with the sheath component 302. It should be understood, however, that the core and the sheath can be placed in various other arrangements. For instance, the core component 202 and the sheath component 302 can be placed in an eccentric arrangement as well.

25

[0070] The present inventors have also discovered that fiber drawing significantly increases the axial dimension of the reacted discrete domains so that they have a generally linear, elongated shape. The elongated domains may have an axial dimension that is about 10% or more, in some embodiments from about 50% to about 1000%, and in some embodiments, from about 100% to about 500% greater than the axial dimension of the domains prior to fiber drawing. The axial dimension after fiber drawing may, for instance, range from about 10 μm to about 300 μm , in some embodiments from about 40 μm to about 250 μm , and in some embodiments from about 50 μm to about 200 μm . The domains may also be relatively thin and thus have a small dimension in a direction orthogonal to the axial dimension (i.e., cross-sectional dimension). For instance, the cross-sectional dimension may be from about 0.02 to about 75 micrometers, in some embodiments from about 0.1 to about 40 micrometers, and in some embodiments, from 0.4 to about 20 micrometers in length. This may result in an aspect ratio for the domains (the ratio of the axial dimension to the cross-sectional dimension) of from about 3 to about 200, in some embodiments from about 5 to about 100, and in some embodiments, from about 5 to about 50.

30

[0071] The presence of these elongated domains is indicative of the ability of the thermoplastic composition to absorb energy imparted during fiber drawing. In this manner, the composition is not as brittle as neat polylactic acid and thus can release upon the application of strain, rather than fracture. By releasing under strain, the polymer may continue to function as a load bearing member even after the fiber has exhibited substantial elongation. In this regard, the fibers of the present invention are capable of exhibiting improved "peak elongation" properties, i.e., the percent elongation of the fiber at its peak load. For example, the fibers of the present invention may exhibit a peak elongation of about 25% or more, in some embodiments about 30% or more, in some embodiments from about 40% to about 350%, and in some

embodiments, from about 50% to about 250%. Such elongations may be achieved for fibers having a wide variety of average diameters, such as those ranging from about 0.1 to about 50 micrometers, in some embodiments from about 1 to about 40 micrometers, in some embodiments from about 2 to about 25 micrometers, and in some embodiments, from about 5 to about 15 micrometers.

5 [0072] While possessing the ability to extend under strain, the fibers of the present invention can also remain relatively strong. One parameter that is indicative of the relative strength of the fibers of the present invention is "tenacity", which indicates the tensile strength of a fiber expressed as force per unit linear density. For example, the fibers of the present invention may have a tenacity of from about 0.75 to about 6.0 grams-force ("g_f") per denier, in some embodiments from about 1.0 to about 4.5 g_f per denier, and in some embodiments, from about 1.5 to about 4.0 g_f per denier. The denier of the fibers may vary depending on the desired application. Typically, the fibers are formed to have a denier per filament (i.e., the unit of linear density equal to the mass in grams per 9000 meters of fiber) of less than about 6, in some embodiments less than about 3, and in some embodiments, from about 0.5 to about 3.

10 [0073] If desired, the fibers of the present invention may also be formed into a coherent web structure by randomly 15 depositing the fibers onto a forming surface (optionally with the aid of a vacuum) and then bonding the resulting web using any known technique. For example, an endless foraminous forming surface may be positioned below the fiber draw unit and receive the fibers from an outlet opening. A vacuum may be positioned below the forming surface to draw the fibers and consolidate the unbonded nonwoven web. Once formed, the nonwoven web may then be bonded using 20 any conventional technique, such as with an adhesive or autogenously (e.g., fusion and/or self-adhesion of the fibers without an applied external adhesive). Autogenous bonding, for instance, may be achieved through contact of the fibers 25 while they are semi-molten or tacky, or simply by blending a tackifying resin and/or solvent with the polylactic acid(s) used to form the fibers. Suitable autogenous bonding techniques may include ultrasonic bonding, thermal bonding, through-air bonding, calendar bonding, and so forth. For example, the web may be further bonded or embossed with a 30 pattern by a thermo-mechanical process in which the web is passed between a heated smooth anvil roll and a heated pattern roll. The pattern roll may have any raised pattern which provides the desired web properties or appearance. Desirably, the pattern roll defines a raised pattern which defines a plurality of bond locations which define a bond area 35 between about 2% and 30% of the total area of the roll. Exemplary bond patterns include, for instance, those described in U.S. Patent 3,855,046 to Hansen et al., U.S. Patent No. 5,620,779 to Levy et al., U.S. Patent No. 5,962,112 to Haynes et al., U.S. Patent 6,093,665 to Sayovitz et al., as well as U.S. Design Patent Nos. 428,267 to Romano et al.; 390,708 to Brown; 418,305 to Zander, et al.; 384,508 to Zander, et al.; 384,819 to Zander, et al.; 358,035 to Zander, et al.; and 315,990 to Blenke, et al., all of which are incorporated herein in their entirety by reference thereto for all purposes. The pressure between the rolls may be from about 5 to about 2000 pounds per lineal inch. The pressure between the rolls and the temperature of the rolls is balanced to obtain desired web properties or appearance while maintaining cloth like properties. As is well known to those skilled in the art, the temperature and pressure required may vary depending upon many factors including but not limited to, pattern bond area, polymer properties, fiber properties and nonwoven properties.

40 [0074] In addition to spunbond webs, a variety of other nonwoven webs may also be formed from the thermoplastic composition in accordance with the present invention, such as meltblown webs, bonded carded webs, wet-laid webs, 45 airlaid webs, coform webs, hydraulically entangled webs, etc. For example, the thermoplastic composition may be extruded through a plurality of fine die capillaries into a converging high velocity gas (e.g., air) streams that attenuate the fibers to reduce their diameter. Thereafter, the meltblown fibers are carried by the high velocity gas stream and are deposited on a collecting surface to form a web of randomly dispersed meltblown fibers. Alternatively, the polymer may be formed into a carded web by placing bales of fibers formed from the thermoplastic composition into a picker that separates the fibers. Next, the fibers are sent through a combing or carding unit that further breaks apart and aligns the fibers in the machine direction so as to form a machine direction-oriented fibrous nonwoven web. Once formed, the nonwoven web is typically stabilized by one or more known bonding techniques.

50 [0075] If desired, the nonwoven web may also be a composite that contains a combination of the thermoplastic composition fibers and other types of fibers (e.g., staple fibers, filaments, etc). For example, additional synthetic fibers may be utilized, such as those formed from polyolefins, e.g., polyethylene, polypropylene, polybutylene, and so forth; polytetrafluoroethylene; polyesters, e.g., polyethylene terephthalate and so forth; polyvinyl acetate; polyvinyl chloride acetate; 55 polyvinyl butyral; acrylic resins, e.g., polyacrylate, polymethylacrylate, polymethylmethacrylate, and so forth; polyamides, e.g., nylon; polyvinyl chloride; polyvinylidene chloride; polystyrene; polyvinyl alcohol; polyurethanes; polylactic acid; etc. If desired, biodegradable polymers, such as poly(glycolic acid) (PGA), poly(lactic acid) (PLA), poly(β -malic acid) (PMLA), poly(ϵ -caprolactone) (PCL), poly(p-dioxanone) (PDS), poly(butylene succinate) (PBS), and poly(3-hydroxybutyrate) (PHB), may also be employed. Some examples of known synthetic fibers include sheath-core bicomponent fibers available from KoSa Inc. of Charlotte, North Carolina under the designations T-255 and T-256, both of which use a polyolefin sheath, or T-254, which has a low melt co-polyester sheath. Still other known bicomponent fibers that may be used include those available from the Chisso Corporation of Moriyama, Japan or Fibervisions LLC of Wilmington, Delaware. Polylactic acid staple fibers may also be employed, such as those commercially available from Far Eastern Textile, Ltd. of Taiwan.

[0076] The composite may also contain pulp fibers, such as high-average fiber length pulp, low-average fiber length pulp, or mixtures thereof. One example of suitable high-average length fluff pulp fibers includes softwood kraft pulp fibers. Softwood kraft pulp fibers are derived from coniferous trees and include pulp fibers such as, but not limited to, northern, western, and southern softwood species, including redwood, red cedar, hemlock, Douglas fir, true firs, pine (e.g., southern pines), spruce (e.g., black spruce), bamboo, combinations thereof, and so forth. Northern softwood kraft pulp fibers may be used in the present invention. An example of commercially available southern softwood kraft pulp fibers suitable for use in the present invention include those available from Weyerhaeuser Company with offices in Federal Way, Washington under the trade designation of "NF-405." Another suitable pulp for use in the present invention is a bleached, sulfate wood pulp containing primarily softwood fibers that is available from Bowater Corp. with offices in Greenville, South Carolina under the trade name CoosAbsorb S pulp. Low-average length fibers may also be used in the present invention. An example of suitable low-average length pulp fibers is hardwood kraft pulp fibers. Hardwood kraft pulp fibers are derived from deciduous trees and include pulp fibers such as, but not limited to, eucalyptus, maple, birch, aspen, etc. Eucalyptus kraft pulp fibers may be particularly desired to increase softness, enhance brightness, increase opacity, and change the pore structure of the sheet to increase its wicking ability. Bamboo or cotton fibers may also be employed.

[0077] Nonwoven composites may be formed using a variety of known techniques. For example, the nonwoven composite may be a "coform material" that contains a mixture or stabilized matrix of the thermoplastic composition fibers and an absorbent material. As an example, coform materials may be made by a process in which at least one meltblown die head is arranged near a chute through which the absorbent materials are added to the web while it is forming. Such absorbent materials may include, but are not limited to, pulp fibers, superabsorbent particles, inorganic and/or organic absorbent materials, treated polymeric staple fibers, and so forth. The relative percentages of the absorbent material may vary over a wide range depending on the desired characteristics of the nonwoven composite. For example, the nonwoven composite may contain from about 1 wt.% to about 60 wt.%, in some embodiments from 5 wt.% to about 50 wt.%, and in some embodiments, from about 10 wt.% to about 40 wt.% thermoplastic composition fibers. The nonwoven composite may likewise contain from about 40 wt.% to about 99 wt.%, in some embodiments from 50 wt.% to about 95 wt.%, and in some embodiments, from about 60 wt.% to about 90 wt.% absorbent material. Some examples of such coform materials are disclosed in U.S. Patent Nos. 4,100,324 to Anderson, et al.; 5,284,703 to Everhart, et al.; and 5,350,624 to Georger, et al.; which are incorporated herein in their entirety by reference thereto for all purposes.

[0078] Nonwoven laminates may also be formed in the present invention in which one or more layers are formed from the thermoplastic composition. For example, the nonwoven web of one layer may be a spunbond that contains the thermoplastic composition, while the nonwoven web of another layer contains thermoplastic composition, other biodegradable polymer(s), and/or any other polymer (e.g., polyolefins). In one embodiment, the nonwoven laminate contains a meltblown layer positioned between two spunbond layers to form a spunbond / meltblown / spunbond ("SMS") laminate. If desired, the spunbond layer(s) may be formed from the thermoplastic composition. The meltblown layer may be formed from the thermoplastic composition, other biodegradable polymer(s), and/or any other polymer (e.g., polyolefins). Various techniques for forming SMS laminates are described in U.S. Patent Nos. 4,041,203 to Brock et al.; 5,213,881 to Timmons, et al.; 5,464,688 to Timmons, et al.; 4,374,888 to Bornslaeger; 5,169,706 to Collier, et al.; and 4,766,029 to Brock et al., as well as U.S. Patent Application Publication No. 2004/0002273 to Fitting, et al., all of which are incorporated herein in their entirety by reference thereto for all purposes. Of course, the nonwoven laminate may have other configuration and possess any desired number of meltblown and spunbond layers, such as spunbond / meltblown / meltblown / spunbond laminates ("SMMS"), spunbond / meltblown laminates ("SM"), etc. Although the basis weight of the nonwoven laminate may be tailored to the desired application, it generally ranges from about 10 to about 300 grams per square meter ("gsm"), in some embodiments from about 25 to about 200 gsm, and in some embodiments, from about 40 to about 150 gsm.

[0079] If desired, the nonwoven web or laminate may be applied with various treatments to impart desirable characteristics. For example, the web may be treated with liquid-repellency additives, antistatic agents, surfactants, colorants, antifogging agents, fluorochemical blood or alcohol repellents, lubricants, and/or antimicrobial agents. In addition, the web may be subjected to an electret treatment that imparts an electrostatic charge to improve filtration efficiency. The charge may include layers of positive or negative charges trapped at or near the surface of the polymer, or charge clouds stored in the bulk of the polymer. The charge may also include polarization charges that are frozen in alignment of the dipoles of the molecules. Techniques for subjecting a fabric to an electret treatment are well known by those skilled in the art. Examples of such techniques include, but are not limited to, thermal, liquid-contact, electron beam and corona discharge techniques. In one particular embodiment, the electret treatment is a corona discharge technique, which involves subjecting the laminate to a pair of electrical fields that have opposite polarities. Other methods for forming an electret material are described in U.S. Patent Nos. 4,215,682 to Kubik, et al.; 4,375,718 to Wadsworth; 4,592,815 to Nakao; 4,874,659 to Ando; 5,401,446 to Tsai, et al.; 5,883,026 to Reader, et al.; 5,908,598 to Rousseau, et al.; 6,365,088 to Knight, et al., which are incorporated herein in their entirety by reference thereto for all purposes.

IV. Articles

[0080] The nonwoven web may be used in a wide variety of applications. For example, the web may be incorporated into a "medical product", such as gowns, surgical drapes, facemasks, head coverings, surgical caps, shoe coverings, sterilization wraps, warming blankets, heating pads, and so forth. Of course, the nonwoven web may also be used in various other articles. For example, the nonwoven web may be incorporated into an "absorbent article" that is capable of absorbing water or other fluids. Examples of some absorbent articles include, but are not limited to, personal care absorbent articles, such as diapers, training pants, absorbent underpants, incontinence articles, feminine hygiene products (e.g., sanitary napkins), swim wear, baby wipes, mitt wipe, and so forth; medical absorbent articles, such as garments, 5 fenestration materials, underpads, bedpads, bandages, absorbent drapes, and medical wipes; food service wipers; clothing articles; pouches, and so forth. Materials and processes suitable for forming such articles are well known to those skilled in the art. Absorbent articles, for instance, typically include a substantially liquid-impermeable layer (e.g., outer cover), a liquid-permeable layer (e.g., bodyside liner, surge layer, etc.), and an absorbent core. In one embodiment, 10 for example, a nonwoven web formed according to the present invention may be used to form an outer cover of an absorbent article. If desired, the nonwoven web may be laminated to a liquid-impermeable film that is either vapor-permeable or vapor-impermeable.

[0081] The present invention may be better understood with reference to the following examples. In each of the Examples below, polylactic acid was dried in a dessicant at a temperature of about 77°C prior to blending with the 15 polyepoxide modifier. The resulting blend was also dried in a dessicant dryer at a temperature of from 125°F to 150°F prior to fiber spinning.

EXAMPLE 1

[0082] Fibers formed from 100% polylactic acid (PLA) were formed as a control by extruding PLA 6201 D (Natureworks®, melt flow rate of 10 g/10 min at 190°C) into fiber form. More specifically, polylactic acid was supplied to an extruder heated to a temperature of 235°C. The throughput of the extruder was 0.4 grams per hole per minute (on a 16 hole per inch spinpack). The melt was extruded through the spinpack to form continuous fibers which were then quenched using forced air supplied by a blower a temperature of 25°C. The continuous fibers were then drawn through a fiber draw unit and sent them onto a godet roll at a speed of 2000 meters per minute ("mpm"). The resulting draw ratio was 30 1549. Fibers were collected at 2000 mpm to provide a target 15 µm fiber. Fibers were then drawn onto a godet roll at a speed of 3000 meters per minute ("mpm"). The resulting draw ratio was 2324.

EXAMPLE 2

[0083] The ability to form fibers from a blend of 97 wt.% polylactic acid (PLA 6201 D, Natureworks®) and 3 wt.% of a polyepoxide modifier was demonstrated. The polyepoxide modifier was poly(ethylene-co-methyl acrylate-co-glycidyl 35 methacrylate) (Sigma-Aldrich Co.) having a melt flow rate of 6 g/10 min

[0084] (190°C/2160 g), a glycidyl methacrylate content of 8 wt.%, methyl acrylate content of 25 wt.%, and ethylene content of 67 wt.%. The polymers were fed into a Thermo Prism™ USALAB 16 twin screw extruder (Thermo Electron 40 Corp., Stone, England). The melt temperature of the extruder was 195°C. The extruder had 11 zones, numbered consecutively 0-10 from the feed hopper to the die. The polylactic acid resin was dry mixed with the polyepoxide modifier and fed to the feed throat of the extruder (un-heated, before zone 1 of the extruder) at a rate of 3 pounds per hour. The screw speed was 200 revolutions per minute ("rpm"). The die used to extrude the resin had 1 die openings (3 millimeters in diameter). Upon formation, the extruded resin was cooled on a fan-cooled conveyor belt and formed into pellets. The 45 pellets were then supplied to an extruder heated to a temperature of 240°C. The throughput of the extruder was 0.4 grams per hole per minute (on a 16 hole per inch spinpack). The melt was extruded through the spinpack to form continuous fibers which were then quenched using forced air supplied by a blower a temperature of 25°C. The continuous fibers were then drawn onto a godet roll at a speed of 2000 meters per minute ("mpm"). The resulting draw ratio was 1549.

EXAMPLE 3

[0085] Fibers were formed from a blend of 95 wt.% polylactic acid (PLA 6201 D, Natureworks®) and 5 wt.% of poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate) (Sigma-Aldrich Co.) as described in Example 2. The continuous fibers were then drawn onto a godet roll at a speed of 2000 meters per minute ("mpm"). The resulting draw ratio was 55 1549. Fibers were also spun at 3000 meters per minute ("mpm") for a resulting draw ratio of 2324.

EXAMPLE 4

[0086] Fibers were formed from a blend of 90 wt.% polylactic acid (PLA 6201 D, Natureworks®) and 10 wt.% of poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate) (Sigma-Aldrich Co.) as described in Example 2, except that the fibers were extruded at 215°C and drawn onto a godet roll at 500 mpm with a resulting draw ratio of 387. Prior to formation of the fibers, transmission electron microscopy ("TEM") was also employed to view the blend. An image of the blend at 10.000X is shown in Fig. 2. As shown, the blend contains a plurality of small domains as evidenced by the darkened areas.

EXAMPLE 5

[0087] Pellets were formed from a blend of 85 wt.% polylactic acid (PLA 6201 D, Natureworks®) and 15 wt.% of poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate) (Sigma-Aldrich Co.) as described in Example 2. The resulting pellets were not fiber spun.

EXAMPLE 6

[0088] Fibers were formed from a blend of 90 wt.% polylactic acid (PLA 6201 D, Natureworks®) and 10 wt.% of a polyepoxide modifier. The polyepoxide modifier was poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate) (Lotader® AX8950, Arkema) having a melt flow rate of 70-100 g/10 min (190°C/2160 g), a glycidyl methacrylate content of 7 to 11 wt.%, methyl acrylate content of 13 to 17 wt.%, and ethylene content of 72 to 80 wt.%. The same process was employed as in Example 2, except that the fibers were extruded at 210°C and drawn onto a godet roll at a speed of 800 mpm resulting in a draw ratio of 620.

EXAMPLE 7

[0089] Pellets were formed from a blend of 90 wt.% polylactic acid (PLA 6201 D, Natureworks®) and 10 wt.% of poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate) (Sigma-Aldrich Co.) as described in Example 2, except that the polymer were blended together at a melt temperature of 235°C. The resulting pellets were not fiber spun.

[0090] Ten (10) samples were made according to Examples 1-4 and 6 and then tested for tenacity and elongation. The results (average) are set forth below.

Table 1: Fiber Properties for Examples 1-4 and 6

Example #	PLA (wt.%)	Epoxy-functional modifier		Diameter (μm)	Elongation (%)	Tenacity (g/g)	Moisture Content Before Spinning (ppm)
		Melt Flow Rate (g/10min)	Wt.%				
1	100	-	0	10.31	43.01	4.17	40
2	97	6	3	14.84	123.40	2.19	73
3	95	6	5	14.89	147.13	1.74	59
4	90	6	10	25.54	32.07	1.60	47
6	90	70-100	10	21.09	41.93	1.93	53

EXAMPLE 8

[0091] The ability to form fibers from a blend of 88.7 wt.% polylactic acid (PLA 6201 D, Natureworks®), 1.5 wt.% of a polyepoxide modifier, and 9.8 wt. % of a toughening additive was demonstrated. The polyepoxide modifier was poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate) (Lotader® AX8950, Arkema). The toughening additive was Vistamaxx™ 2120 (Exxonmobil), which is a polyolefin copolymer/elastomer with a melt flow rate of 29 g/10 min (190°C, 2160g) and a density of 0.866 g/cm³. The polymers were fed into a co-rotating, twin-screw extruder (ZSK-30, diameter of 30 mm, length of 1328 millimeters) was employed for compounding that was manufactured by Werner and Pfleiderer Corporation of Ramsey, New Jersey. The extruder possessed 14 zones, numbered consecutively 1-14 from the feed hopper to the die. The first barrel #1 received the resins via gravimetric feeder at a total throughput of 15 pounds per hour. The die used to extrude the resin had 3 die openings (6 millimeters in diameter) that were separated by 4 millimeters. Upon formation, the extruded resin was cooled on a fan-cooled conveyor belt and formed into pellets by a Conair

5 pelletizer. The screw speed was 100 revolutions per minute ("rpm"). The pellets were then supplied to an extruder heated to a temperature of 220°C. The throughput of the extruder was 0.4 grams per hole per minute (on a 16 hole per inch spinpack). The melt was extruded through the spinpack to form continuous fibers which were then quenched using forced air supplied by a blower a temperature of 25°C. The continuous fibers were then drawn onto a godet roll at a speed of 1000 meters per minute ("mpm"). The resulting draw ratio was 775.

EXAMPLE 9

10 [0092] Fibers were formed as described in Example 8, except that the temperature at which the fibers were extruded was 240°C and the draw speed of the godet roll was 1000 meters per minute ("mpm"). The resulting draw ratio was 775.

EXAMPLE 10

15 [0093] Fibers were formed as described in Example 8, except that the toughening additive was Escorene™ Ultra 7720 (Exxonmobil), which is an ethylene vinyl acetate ("EVA") resin, which has a melt flow rate of 150 g/10min and a density of 0.946 g/cm³ and the draw speed of the godet roll was 700 meters per minute ("mpm"). The resulting draw ratio was 542.

EXAMPLE 11

20 [0094] Fibers were formed as described in Example 10, except that the temperature at which the fibers were extruded was 240°C and the draw speed of the godet roll was 1000 meters per minute ("mpm"). The resulting draw ratio was 775.

EXAMPLE 12

25 [0095] Fibers were formed as described in Example 10, except that the temperature at which the fibers were extruded was 230°C.

EXAMPLE 13

30 [0096] Fibers were formed as described in Example 8, except that the temperature at which the polymers were blended was 235°C and the temperature at which the fibers were extruded was 235°C and the draw speed of the godet roll was 3000 meters per minute ("mpm"). The resulting draw ratio was 2324.

35 [0097] Ten (10) samples were made according to Examples 8-13 and then tested for tenacity and elongation. The results (average) are set forth below.

Table 2: Fiber Properties for Examples 8-13

Ex. #	Toughening Additive	Blending Temp. (°C)	Fiber Extrusion Temp. (°C)	Diameter (μm)	Elongation (%)	Tenacity g/g	Moisture Content Before Spinning (ppm)
8	Vistamaxx™ 2120	185	220	17.21	60.91	1.92	195
9	Vistamaxx™ 2120	185	240	20.59	119.80	2.03	195
10	Escorene™ Ultra 7720	185	220	25.49	89.47	2.20	85
11	Escorene™ Ultra 7720	185	240	17.25	65.93	2.00	85
12	Escorene™ Ultra 7720	185	230	19.17	96.01	1.97	85
13	Vistamaxx™ 2120	235	235	12.85	83.87	1.99	57

EXAMPLE 14

[0098] The ability to form fibers from a blend of 89.6 wt.% polylactic acid (PLA 6201 D, Natureworks®), 0.5 wt.% of a polyepoxide modifier, and 9.9 wt.% of a toughening additive was demonstrated. The polyepoxide modifier was poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate) (Lotader® AX8950, Arkema). The toughening additive was Vistamaxx™ 2120 (Exxonmobil). The polymers were fed into a co-rotating, twin-screw extruder (ZSK-30, diameter of 30 mm, length of 1328 millimeters) was employed for compounding that was manufactured by Werner and Pfleiderer Corporation of Ramsey, New Jersey. The extruder possessed 14 zones, numbered consecutively 1-14 from the feed hopper to the die. The first barrel #1 received the resins *via* gravimetric feeder at a total throughput of 15 pounds per hour. The die used to extrude the resin had 3 die openings (6 millimeters in diameter) that were separated by 4 millimeters. Upon formation, the extruded resin was cooled on a fan-cooled conveyor belt and formed into pellets by a Conair pelletizer. The screw speed was 100 revolutions per minute ("rpm"). The pellets were then supplied to an extruder heated to a temperature of 220°C. The throughput of the extruder was 0.4 grams per hole per minute (on a 16 hole per inch spinpack). The melt was extruded through the spinpack to form continuous fibers which were then quenched using forced air supplied by a blower a temperature of 25°C. The continuous fibers were then drawn onto a godet roll at a speed of 500 meters per minute ("mpm"). The resulting draw ratio was 387. Fibers could not be collected.

EXAMPLE 15

[0099] Fibers were formed as described in Example 14, except that the temperature at which the fibers were extruded was 225°C and the speed of the godet roll was 750 mpm. Fibers could not be collected.

EXAMPLE 16

[0100] Fibers were formed as described in Example 14, except that the temperature at which the fibers were extruded was 230°C and the speed of the godet roll was 1500 mpm. Fibers could not be collected.

EXAMPLE 17

[0101] Fibers were formed as described in Example 14, except that the temperature at which the fibers were extruded was 235°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

EXAMPLE 18

[0102] Fibers were formed as described in Example 14, except that the temperature at which the fibers were extruded was 240°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

EXAMPLE 19

[0103] Fibers were formed as described in Example 14, except that the temperature at which the fibers were extruded was 245°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 2800 mpm.

EXAMPLE 20

[0104] Fibers were formed as described in Example 14, except that the temperature at which the fibers were extruded was 250°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 2900 mpm.

[0105] Ten (10) samples were made according to Examples 17-20 and then tested for tenacity and elongation. The results (average) are set forth below.

Table 3: Fiber Properties for Examples 17-20

Ex. #	Fiber Extrusion Temp. (°C)	Godet Roll Speed (mpm)	Diameter (μm)	Elongation (%)	Tenacity g/g	Max Draw Down Ratio	Moisture Content Before Spinning (ppm)
17	235°C	2000	15.0	60.6	1.8	2324	133
18	240°C	2000	14.7	94.0	2.3	2324	133
19	245°C	2000	14.6	95.6	2.2	2169	133
20	250°C	2000	15.2	101.2	1.7	2246	133

EXAMPLE 21

[0106] The ability to form fibers from a blend of 88.7 wt.% polylactic acid (PLA 6201 D, Natureworks®), 1.5 wt.% of a polyepoxide modifier, and 9.8 wt.% of a toughening additive was demonstrated. The polyepoxide modifier was poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate) (Lotader® AX8950, Arkema). The toughening additive was Vistamaxx™ 2120 (Exxonmobil). The polymers were fed into a co-rotating, twin-screw extruder (ZSK-30, diameter of 30 mm, length of 1328 millimeters) was employed for compounding that was manufactured by Werner and Pfleiderer Corporation of Ramsey, New Jersey. The extruder possessed 14 zones, numbered consecutively 1-14 from the feed hopper to the die. The first barrel #1 received the resins *via* gravimetric feeder at a total throughput of 15 pounds per hour. The die used to extrude the resin had 3 die openings (6 millimeters in diameter) that were separated by 4 millimeters. Upon formation, the extruded resin was cooled on a fan-cooled conveyor belt and formed into pellets by a Conair pelletizer. The screw speed was 100 revolutions per minute ("rpm"). The pellets were then supplied to an extruder heated to a temperature of 220°C. The throughput of the extruder was 0.4 grams per hole per minute (on a 16 hole per inch spinpack). The melt was extruded through the spinpack to form continuous fibers which were then quenched using forced air supplied by a blower a temperature of 25°C. The continuous fibers were then drawn onto a godet roll at a speed of 500 meters per minute ("mpm"). The resulting draw ratio was 387. Fibers could not be collected.

EXAMPLE 22

[0107] Fibers were formed as described in Example 21, except that the temperature at which the fibers were extruded was 225°C and the speed of the godet roll was 1200 mpm. Fibers could not be collected.

EXAMPLE 23

[0108] Fibers were formed as described in Example 21, except that the temperature at which the fibers were extruded was 230°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 2400 mpm.

EXAMPLE 24

[0109] Fibers were formed as described in Example 21, except that the temperature at which the fibers were extruded was 235°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

EXAMPLE 25

[0110] Fibers were formed as described in Example 21, except that the temperature at which the fibers were extruded was 240°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

EXAMPLE 26

[0111] Fibers were formed as described in Example 21, except that the temperature at which the fibers were extruded was 245°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

EXAMPLE 27

[0112] Fibers were formed as described in Example 21, except that the temperature at which the fibers were extruded was 250°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 2800 mpm.

[0113] Ten (10) samples were made according to Examples 23-27 and then tested for tenacity and elongation. The results (average) are set forth below.

Table 4: Fiber Properties for Examples 23-27

Ex. #	Fiber Extrusion Temp. (°C)	Godet Roll Speed (mpm)	Diameter (μm)	Elongation (%)	Tenacity g/g	Max Draw Down Ratio	Moisture Content Before Spinning (ppm)
23	230°C	2000	14.7	48.5	1.7	1859	306
24	235°C	2000	15.0	64.2	1.6	2324	306
25	240°C	2000	15.0	103.1	1.9	2324	306
26	245°C	2000	14.7	105.2	1.9	2324	306
27	250°C	2000	14.7	101.3	1.6	2169	306

EXAMPLE 28

[0114] The ability to form fibers from a blend of 87.8 wt.% polylactic acid (PLA 6201 D, Natureworks®), 2.4 wt.% of a polyepoxide modifier, and 9.8 wt.% of a toughening additive was demonstrated. The polyepoxide modifier was poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate) (Lotader® AX8950, Arkema). The toughening additive was Vistamaxx™ 2120 (Exxonmobil). The polymers were fed into a co-rotating, twin-screw extruder (ZSK-30, diameter of 30 mm, length of 1328 millimeters) was employed for compounding that was manufactured by Werner and Pfleiderer Corporation of Ramsey, New Jersey. The extruder possessed 14 zones, numbered consecutively 1-14 from the feed hopper to the die. The first barrel #1 received the resins via gravimetric feeder at a total throughput of 15 pounds per hour. The die used to extrude the resin had 3 die openings (6 millimeters in diameter) that were separated by 4 millimeters. Upon formation, the extruded resin was cooled on a fan-cooled conveyor belt and formed into pellets by a Conair pelletizer. The screw speed was 100 revolutions per minute ("rpm"). The pellets were then supplied to an extruder heated to a temperature of 220°C. The throughput of the extruder was 0.4 grams per hole per minute (on a 16 hole per inch spinpack). The melt was extruded through the spinpack to form continuous fibers which were then quenched using forced air supplied by a blower a temperature of 25°C. The continuous fibers were then drawn onto a godet roll at a speed of 1300 meters per minute ("mpm"). The resulting draw ratio was 387. Fibers could not be collected.

EXAMPLE 29

[0115] Fibers were formed as described in Example 28, except that the temperature at which the fibers were extruded was 225°C and the speed of the godet roll was 1500 mpm. Fibers could not be collected.

EXAMPLE 30

[0116] Fibers were formed as described in Example 28, except that the temperature at which the fibers were extruded was 230°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

EXAMPLE 31

[0117] Fibers were formed as described in Example 28, except that the temperature at which the fibers were extruded was 235° and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 2900 mpm.

EXAMPLE 32

5 [0118] Fibers were formed as described in Example 28, except that the temperature at which the fibers were extruded was 240°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

EXAMPLE 33

10 [0119] Fibers were formed as described in Example 28, except that the temperature at which the fibers were extruded was 245°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

EXAMPLE 34

15 [0120] Fibers were formed as described in Example 28, except that the temperature at which the fibers were extruded was 250°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 2800 mpm.

20 [0121] Ten (10) samples were made according to Examples 30-34 and then tested for tenacity and elongation. The results (average) are set forth below.

Table 5: Fiber Properties for Examples 30-34

Ex. #	Fiber Extrusion Temp. (°C)	Godet Roll Speed (mpm)	Diameter (μm)	Elongation (%)	Tenacity g/g	Max Draw Down Ratio	Moisture Content Before Spinning (ppm)
30	230°C	2000	14.5	45.9	1.6	2324	297
31	235°C	2000	14.6	70.7	1.6	2246	297
32	240°C	2000	13.8	86.8	1.9	2324	297
33	245°C	2000	14.2	105.5	1.9	2324	297
34	250°C	2000	14.6	95.1	1.6	2169	297

EXAMPLE 35

35 [0122] The ability to form fibers from a blend of 88.7 wt.% polylactic acid (PLA 6201 D, Natureworks®), 1.5 wt.% of a polyepoxide modifier, and 9.8 wt.% of a toughening additive was demonstrated. The polyepoxide modifier was poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate) (Lotader® AX8950, Arkema). The toughening additive was Vistamaxx™ 2120 (Exxonmobil). The polymers were fed into a co-rotating, twin-screw extruder (ZSK-30, diameter of 30 mm, length of 1328 millimeters) was employed for compounding that was manufactured by Werner and Pfeiderer Corporation of Ramsey, New Jersey. The extruder possessed 14 zones, numbered consecutively 1-14 from the feed hopper to the die. The first barrel #1 received the resins via gravimetric feeder at a total throughput of 15 pounds per hour. The die used to extrude the resin had 3 die openings (6 millimeters in diameter) that were separated by 4 millimeters. Upon formation, the extruded resin was cooled on a fan-cooled conveyor belt and formed into pellets by a Conair pelletizer. The screw speed was 200 revolutions per minute ("rpm"). The pellets were then supplied to an extruder heated to a temperature of 220°C. The throughput of the extruder was 0.4 grams per hole per minute (on a 16 hole per inch spinpack). The melt was extruded through the spinpack to form continuous fibers which were then quenched using forced air supplied by a blower a temperature of 25°C. The continuous fibers were then drawn onto a godet roll at a speed of 2000 meters per minute ("mpm"). The resulting draw ratio was 1547. Fibers were collected and then godet roll was increased to 3000 mpm.

EXAMPLE 36

55 [0123] Fibers were formed as described in Example 35, except that the temperature at which the fibers were extruded was 230°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

EXAMPLE 37

5 [0124] Fibers were formed as described in Example 35, except that the temperature at which the fibers were extruded was 235°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

EXAMPLE 38

10 [0125] Fibers were formed as described in Example 35, except that the temperature at which the fibers were extruded was 240°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

EXAMPLE 39

15 [0126] Fibers were formed as described in Example 35, except that the temperature at which the fibers were extruded was 245°C and the speed of the godet roll was 2000 mpm.

EXAMPLE 40

20 [0127] Fibers were formed as described in Example 35, except that the temperature at which the fibers were extruded was 250°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

EXAMPLE 41

25 [0128] Fibers were formed as described in Example 35, except that the temperature at which the fibers were extruded was 255° and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

30 [0129] Ten (10) samples were made according to Examples 35-41 and then tested for tenacity and elongation. The results (average) are set forth below.

Table 6: Fiber Properties for Examples 35-41

Ex. #	Fiber Extrusion Temp. (°C)	Godet Roll Speed (mpm)	Diameter (μm)	Elongation (%)	Tenacity g/g	Max Draw Down Ratio	Moisture Content Before Spinning (ppm)
35	220°C	2000	13.85	59.14	1.48	2324	629
36	230°C	2000	14.02	81.77	1.50	2324	629
37	235°C	2000	14.45	93.85	1.62	2324	473
38	240°C	2000	14.75	121.63	1.79	2324	473
39	245°C	2000	14.60	125.88	1.94	2324	473
40	250°C	2000	14.53	127.68	1.85	2324	217
41	255°C	2000	14.70	123.97	1.79	2324	217

EXAMPLE 42

50 [0130] Fibers were from a blend of 88.7 wt.% polylactic acid (PLA 6201 D, Natureworks®), 9.8 wt.% of a toughening additive, and 1.5 wt.% of a polyepoxide modifier was also employed. The polyepoxide modifier was poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate) (Lotader® AX8950, Arkema). The toughening additive was PP 3155 (Exxonmobil), a polypropylene homopolymer. The polymers were fed into a co-rotating, twin-screw extruder (ZSK-30, diameter of 30 mm, length of 1328 millimeters) was employed for compounding that was manufactured by Werner and Pfeiderer Corporation of Ramsey, New Jersey. The extruder possessed 14 zones, numbered consecutively 1-14 from the feed hopper to the die. The first barrel #1 received the resins via gravimetric feeder at a total throughput of 15 pounds per hour. The die used to extrude the resin had 3 die openings (6 millimeters in diameter) that were separated by 4 millimeters. Upon formation, the extruded resin was cooled on a fan-cooled conveyor belt and formed into pellets by a Conair

5 pelletizer. The screw speed was 100 revolutions per minute ("rpm"). The pellets were then supplied to an extruder heated to a temperature of 230°C. The throughput of the extruder was 0.4 grams per hole per minute (on a 16 hole per inch spinpack). The melt was extruded through the spinpack to form continuous fibers which were then quenched using forced air supplied by a blower a temperature of 25°C. The continuous fibers were then drawn onto a godet roll at a speed of 2000 meters per minute ("mpm"). Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

EXAMPLE 43

10 [0131] Fibers were formed as described in Example 42, except that the temperature at which the fibers were extruded was 235°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

EXAMPLE 44

15 [0132] Fibers were formed as described in Example 42, except that the temperature at which the fibers were extruded was 240°C and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and fibers were spun up to 3000 mpm.

20 [0133] Ten (10) samples were made according to Examples 42-44 and then tested for tenacity and elongation. The results (average) are set forth below.

Table 7: Fiber Properties for Examples 42-44

Ex. #	Epoxy-functional modifier (wt.%)	Fiber Extrusion Temp. (°C)	Godet Roll Speed (mpm)	Diameter (μm)	Elongation (%)	Tenacity g/g	Max Draw Down Ratio	Moisture Content Before Spinning (ppm)
42	1.5	230°C	2000	12.80	87.52	2.88	2324	630
43	1.5	235°C	2000	12.90	87.65	2.86	2324	630
44	1.5	240°C	2000	12.24	88.76	2.98	2324	630

EXAMPLE 45

35 [0134] The ability to form fibers from a blend of 89.25 wt.% polylactic acid (PLA 6201 D, Natureworks®), 0.75 wt.% of a polyepoxide modifier, and 10 wt.% of a toughening additive was demonstrated. The polyepoxide modifier was poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate) (Lotader® AX8900, Arkema). The toughening additive was PP 3155 (Exxon-Mobil), a polypropylene homopolymer. The polymers were fed into a co-rotating, twin-screw extruder (ZSK-30, diameter of 30 mm, length of 1328 millimeters) was employed for compounding that was manufactured by Werner and Pfeiderer Corporation of Ramsey, New Jersey. The extruder possessed 14 zones, numbered consecutively 1-14 from the feed hopper to the die. The first barrel #1 received the resins *via* gravimetric feeder at a total throughput of 15 pounds per hour. The die used to extrude the resin had 3 die openings (6 millimeters in diameter) that were separated by 4 millimeters. Upon formation, the extruded resin was cooled on a fan-cooled conveyor belt and formed into pellets by a Conair pelletizer. The screw speed was 200 revolutions per minute ("rpm"). Upon formation, the extruded resin was cooled on a fan-cooled conveyor belt and formed into pellets. The pellets were then supplied to an extruder heated to a temperature of 240°C. The throughput of the extruder was 0.4 grams per hole per minute (on a 16 hole per inch spinpack). The melt was extruded through the spinpack to form continuous fibers which were then quenched using forced air supplied by a blower a temperature of 25°C. The continuous fibers were then drawn onto a godet roll at a speed of 2000 meters per minute ("mpm"). The resulting draw ratio was 1547. Fibers were collected and then godet roll was increased to 3000 mpm. The extruder throughput was then decreased to 0.28 grams per hole per minute and fibers were drawn onto a godet roll at 3000 mpm resulting in a draw ratio of 3320.

EXAMPLE 46

55 [0135] Fibers were formed as described in Example 45, except that the temperature at which the fibers were extruded was 245°C and the speed of the godet roll was 2000 mpm. Fibers were not collected.

EXAMPLE 47

[0136] Fibers were formed as described in Example 45, except that the temperature at which the fibers were extruded was 250°C and the speed of the godet roll was 2000 mpm. Fibers were not collected.

5

EXAMPLE 48

[0137] Fibers were formed as described in Example 45, except that concentration of Lotader™ AX8900 was 0.5% and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and spun up to 3000 mpm at a throughput of 0.16 grams per hole per minute resulting in a draw ratio of 5810. An SEM photograph was also taken of the fiber and is shown in Fig. 8. As indicated, the fiber contains a thin sheath component that surrounds the core component.

10

EXAMPLE 49

15

[0138] Fibers were formed as described in Example 45, except that concentration of polypropylene was 2.5% and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and spun up to 3000 mpm at a throughput of 0.24 grams per hole per minute resulting in a draw ratio of 3873. Prior to formation of the fibers, transmission electron microscopy ("TEM") was also employed to view the blend. An image of the blend at 10,000X is shown in Fig. 3. As shown, the blend contains a plurality of nano-sized domains of Lotader® AX 8900 as evidenced by the smaller darkened areas and also a plurality of micro-sized domains of polypropylene as evidenced by the larger darkened areas.

20

EXAMPLE 50

25

[0139] Fibers were formed as described in Example 45, except that the polyepoxide modifier was CESA™ Extend 8478 (Clariant Corporation, 10% BASF Joncryl™ ADR 4368 let down in Natureworks PLA 6201 D) and the concentration of CESA was 0.5 wt.% and the speed of the godet roll was 2000 mpm resulting in a draw ratio of 1549. Fibers were not collected.

30

[0140] Prior to formation of the fibers, transmission electron microscopy ("TEM") was also employed to view the blend. An image of the blend at 10,000X is shown in Fig. 4. As shown, the blend contains a plurality of large domains as evidenced by the darkened areas. Ten (10) fiber samples were also made according to Examples 45, 48, and 49 and then tested for tenacity and elongation. The results (average) are set forth below.

Table 8: Fiber Properties for Examples 45 and 48-49

Ex. #	Epoxy-functional modifier (wt.%)	Fiber Extrusion Temp. °C	Godet Roll Speed (mpm)	Diameter (μm)	Elongation (%)	Tenacity g/g	Max Draw Down Ratio	Moisture Content Before Spinning (ppm)
45	0.75	240°C	2000	13.4	98.9	2.2	3320	83
48	0.50	240°C	2000	14.3	97.8	2.3	5810	43
49	0.75	240°C	2000	14.5	112.0	2.2	3873	332

45

EXAMPLE 51

50

[0141] The ability to form fibers from a blend of 98.5 wt.% polylactic acid (PLA 6201 D, Natureworks®), 1.5 wt.% of a polyepoxide modifier. The polyepoxide modifier was poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate) (Lotader® AX8900, Arkema). The polymers were fed into a co-rotating, twin-screw extruder (ZSK-30, diameter of 30 mm, length of 1328 millimeters) was employed for compounding that was manufactured by Werner and Pfleiderer Corporation of Ramsey, New Jersey. The extruder possessed 14 zones, numbered consecutively 1-14 from the feed hopper to the die. The first barrel #1 received the resins via gravimetric feeder at a total throughput of 15 pounds per hour. The die used to extrude the resin had 3 die openings (6 millimeters in diameter) that were separated by 4 millimeters. Upon formation, the extruded resin was cooled on a fan-cooled conveyor belt and formed into pellets by a Conair pelletizer. The screw speed was 200 revolutions per minute ("rpm"). Upon formation, the extruded resin was cooled on a fan-cooled conveyor belt and formed into pellets. The pellets were then supplied to an extruder heated to a temperature of 240°C.

55

The throughput of the extruder was 0.4 grams per hole per minute (on a 16 hole per inch spinpack). The melt was extruded through the spinpack to form continuous fibers which were then quenched using forced air supplied by a blower a temperature of 25°C. The continuous fibers were then drawn onto a godet roll at a speed of 2000 meters per minute ("mpm"). The resulting draw ratio was 1547. Fibers were not collected but the godet roll was increased to 3000 mpm. The extruder throughput was then decreased to 0.28 grams per hole per minute and fibers were drawn onto a godet roll at 3000 mpm resulting in a draw ratio of 3320.

[0142] Prior to formation of the fibers, transmission electron microscopy ("TEM") was also employed to view the blend. An image of the blend at 10,000X is shown in Fig. 5. As shown, the blend contains a plurality of nano-sized domains of Lotader® AX 8900 as evidenced by the smaller darkened areas.

EXAMPLE 52

[0143] Fibers were formed as described in Example 51, except that concentration of Lotader® AX8900 was 0.5% and the speed of the godet roll was 2000 mpm. Fibers were collected at 2000 mpm and spun up to 3000 mpm at a throughput of 0.16 grams per hole per minute resulting in a draw ratio of 5810. Ten (10) samples were made according to Example 52 and then tested for tenacity and elongation. The results (average) are set forth below.

Table 9: Fiber Properties for Example 52

Ex. #	Polyepoxide modifier (wt.%)	Fiber Extrusion Temp. (°C)	Godet Roll Speed (mpm)	Diameter (μm)	Elongation (%)	Tenacity g/g	Max Draw ratio	Moisture Content Before Spinning (ppm)
52	0.5	240°C	2000	13.6	69.4	2.8	5810	72

EXAMPLE 53

[0144] The ability to form spunbond webs from fibers made from a blend of 88.7 wt.% polylactic acid (PLA 6201 D, Natureworks®), 9.8 wt.% PP3155 (Exxon-Mobil) and 1.5 wt.% of a polyepoxide modifier. The polyepoxide modifier was poly(ethylene-co-methyl acrylate-co-glycidyl methacrylate) (Lotader® AX8950, Arkema). The polymers were fed into a co-rotating, intermeshing, twin-screw extruder (64 mm, 2240 mm in length). The extruder possessed 8 zones, numbered consecutively 1-8 from the feed hopper to the die. The first barrel #1 received the resins via gravimetric feeder at a total throughput of 550 pounds per hour. The die used to extrude the resin had 24 die openings (3 millimeters in diameter). Upon formation, the extruded resin was underwater cooled and pelletized using a Gala Underwater pelletizer. The screw speed was 350 revolutions per minute ("rpm"). The pellets were then supplied to an extruder heated to a temperature of 240°C. The throughput of the extruder was 0.7 grams per hole per minute (0.6 mm opening, on a 100 hole per inch spinpack). The melt was extruded through the spinpack to form continuous fibers which were then quenched using forced air supplied by a blower a temperature of 25°C. The continuous fibers were then mechanically drawn using a fiber draw unit and deposited onto a moving forming wire at a draw speed of 4600 meters per minute resulting in a draw ratio of 2025. The fibers were then thermally bonded to form a continuous spunbond web using a heated calendar roll. The resulting web was collected on a winder and evaluated.

EXAMPLE 54

[0145] Spunbond webs were formed as described in Example 53, except that the polymer blend was a plasticized PLA consisting of 92 wt.% polylactic acid (PLA 6201 D, Natureworks®), 2 wt.% Pluriol WI-285 (BASF), 2.7 wt.% Carbowax 8000 (Dow) and 3.3 wt.% Fusabond MD-353D (DuPont) and the draw speed was 3200 mpm resulting in a draw ratio of 1410. Resulting webs were collected on the winder for evaluation.

EXAMPLE 55

[0146] Spunbond webs were formed as described in Example 53, except that the polymer was 100 wt % Polylactic acid (PLA 6201 D, Natureworks®), which was not blended and the draw speed was 3400 mpm (0.35 mm opening on 100 hole per inch pack) resulting in a draw ratio of 509. Resulting webs were collected on the winder for evaluation.

[0147] Ten (10) samples were made according to Examples 53-55 and then tested for tensile strength and elongation in both the machine (MD) and cross (CD) directions of the web. The results (average) are set forth below. Tensile strengths were normalized to basis weight to account for differences in basis weight.

Table 10: Fiber Properties for Examples 53-55

Ex. #	Type of Blend	Basis Weight (gsm)	Normalized MD tensile (g/(2" * gsm))	Normalized CD tensile (g/(2" * gsm))	MD Elongation (%)	CD Elongation (%)
53	PLA, PP3155, Lotader® AX8950	27.5	284	49	24	44
54	Plasticized PLA	22.0	132	32	18	52
55	100 wt.% PLA	25.0	181	47	4	15

[0148] While the invention has been described in detail with respect to the specific embodiments thereof, it will be appreciated that those skilled in the art, upon attaining an understanding of the foregoing, may readily conceive of alterations to, variations of, and equivalents to these embodiments. Accordingly, the scope of the present invention should be assessed as that of the appended claims.

Claims

1. A method for forming a multi-component fiber, the method comprising blending a polylactic acid, polymeric toughening additive such as a polyolefin, and polyepoxide modifier to form a thermoplastic composition, and thereafter extruding the thermoplastic composition through a die to form a fiber, wherein the fiber contains a core component surrounded by a sheath component, and wherein the polylactic acid constitutes about 50 wt.% or more of the polymer content of the core component and the polymeric toughening additive constitutes about 50 wt.% or more of the polymer content of the sheath component.
2. The method of claim 1, further comprising forming pellets from the blended thermoplastic composition, and extruding the pellets through the die to form the fiber, preferably wherein the pellets are formed using an underwater pelletizer.
3. The method of any of the foregoing claims, wherein the ratio of the melt flow rate of the polylactic acid to the melt flow rate of the polymeric toughening additive is from about 0.1 to about 0.9.
4. The method of any of the foregoing claims, wherein the polyepoxide modifier includes an epoxy-functional (meth)acrylic monomeric component, such as glycidyl acrylate, glycidyl methacrylate, or a combination thereof, preferably wherein the polyepoxide modifier is poly(ethylene-co-methacrylate-co-glycidyl methacrylate).
5. The method of any of the foregoing claims, wherein the polylactic acid constitutes about 70 wt.% or more of the thermoplastic composition.
6. The method of any of the foregoing claims, wherein blending occurs at a temperature above the melting point of the polylactic acid and below a temperature of about 230°C and wherein extrusion of the blended thermoplastic composition occurs at a temperature above about 230°C.
7. The method of any of the foregoing claims, wherein the blended thermoplastic composition comprises a plurality of discrete domains dispersed within a continuous phase, the discrete domains containing the polyepoxide modifier and the continuous phase containing polylactic acid.
8. A multi-component fiber that contains a core component surrounded by a sheath component, wherein polylactic acid constitutes about 50 wt.% or more of the polymer content of the core component and a polymeric toughening additive, such as a polyolefin, constitutes about 50 wt.% or more of the polymer content of the sheath component, wherein the polylactic acid in the core component and the polymeric toughening additive in the sheath component are derived from a single thermoplastic composition in which the polylactic acid is blended with the polymeric toughening additive.
9. The method of any of claims 1-7 or the multi-component fiber of claim 8, wherein the polymeric toughening additive constitutes from about 90 wt.% to 100 wt.% of the polymer content of the sheath component.

10. The method of any of claims 1-7 or 9, or the multi-component fiber of claim 8 or claim 9, wherein the sheath component constitutes from about 0.5% to about 25% of the diameter of the fiber.
- 5 11. The multi-component fiber of claim 8, wherein the core component further comprises a polyepoxide modifier, such as an epoxy-functional (meth)acrylic monomeric component.
12. The multi-component fiber of claim 8, wherein the fiber exhibits a peak elongation of about 50% or more and a tenacity of from about 0.75 to about 6 grams-force per denier.
- 10 13. A fiber formed by the method of any of claims 1-7, 9 or 10.
14. A nonwoven web comprising the multi-component fiber of any of claims 8 to 13.
- 15 15. An absorbent article comprising an absorbent core positioned between a liquid-permeable layer and a generally liquid-impermeable layer, the absorbent article comprising the nonwoven web of claim 14.

Patentansprüche

- 20 1. Verfahren zum Ausbilden einer Mehrkomponentenfaser, das Verfahren umfassend das Mischen einer Polymilchsäure, eines polymeren Zähigkeitsverbesserungszusatzes und eines Polyepoxidmodifizierers zum Ausbilden einer thermoplastischen Zusammensetzung und danach das Extrudieren der thermoplastischen Zusammensetzung durch ein Werkzeug zum Ausbilden einer Faser, wobei die Faser eine Kernkomponente enthält, die von einer Hüllenkomponente umgeben ist, und wobei die Polymilchsäure ungefähr 50 Gew.-% oder mehr des Polymergehalts der Kernkomponente bildet und der polymere Zähigkeitsverbesserungszusatz ungefähr 50 Gew.-% oder mehr des Polymergehalts der Hüllenkomponente bildet.
- 25 2. Verfahren nach Anspruch 1, ferner umfassend das Ausbilden von Pellets aus der gemischten thermoplastischen Zusammensetzung und Extrudieren der Pellets durch das Werkzeug zum Ausbilden der Faser, vorzugsweise wobei die Pellets unter Benutzung eines Unterwasser-Pelletierers ausgebildet werden.
- 30 3. Verfahren nach einem der vorhergehenden Ansprüche, wobei das Verhältnis der Schmelzfließgeschwindigkeit der Polymilchsäure zur Schmelzfließgeschwindigkeit des polymeren Zähigkeitsverbesserungszusatzes von ungefähr 0,1 bis ungefähr 0,9 beträgt.
- 35 4. Verfahren nach einem der vorhergehenden Ansprüche, wobei der Polyepoxidmodifizierer eine epoxidfunktionelle (meth)acrylmonomere Komponente enthält, wie etwa Glycidilacrylat, Glycidylmethacrylat oder eine Kombination davon, vorzugsweise wobei der Polyepoxidmodifizierer Poly(ethylen-co-methylacrylatco-glycidylmethacrylat) ist.
- 40 5. Verfahren nach einem der vorhergehenden Ansprüche, wobei der Polyepoxidmodifizierer ungefähr 70 Gew.-% oder mehr der thermoplastischen Zusammensetzung bildet.
6. Verfahren nach einem der vorhergehenden Ansprüche, wobei das Mischen auf einer Temperatur über dem Schmelzpunkt der Polymilchsäure und unterhalb einer Temperatur von ungefähr 230 °C stattfindet, und wobei die Extrusion der gemischten thermoplastischen Zusammensetzung auf einer Temperatur über ungefähr 230 °C stattfindet.
- 45 7. Verfahren nach einem der vorhergehenden Ansprüche, wobei die gemischte thermoplastische Zusammensetzung mehrere diskrete Bereiche umfasst, die innerhalb einer kontinuierlichen Phase dispergiert sind, wobei die diskreten Bereiche den Polyepoxidmodifizierer enthalten und die kontinuierliche Phase Polymilchsäure enthält.
- 50 8. Mehrkomponentenfaser, die eine Kernkomponente enthält, die von einer Hüllenkomponente umgeben ist, wobei Polymilchsäure ungefähr 50 Gew.-% oder mehr des Polymergehalts der Kernkomponente bildet und ein polymerer Zähigkeitsverbesserungszusatz, wie etwa ein Polyolefin, ungefähr 50 Gew.-% oder mehr des Polymergehalts der Hüllenkomponente bildet, wobei die Polymilchsäure in der Kernkomponente und der polymere Zähigkeitsverbesserungszusatz in der Hüllenkomponente aus einer einzigen thermoplastischen Zusammensetzung abgeleitet sind, in der Polymilchsäure mit dem polymeren Zähigkeitsverbesserungszusatz gemischt ist.
- 55 9. Verfahren nach einem der Ansprüche 1 bis 7 oder Mehrkomponentenfaser nach Anspruch 8, wobei der polymere

Zähigkeitsverbesserungszusatz von ungefähr 90 Gew.-% bis ungefähr 100 Gew.-% des Polymergehalts der Hüllkomponente bildet.

- 5 10. Verfahren nach einem der Ansprüche 1 bis 7 oder 9 oder Mehrkomponentenfaser nach einem der Ansprüche 8 oder 9, wobei die Hüllkomponente von ungefähr 0,5% bis ungefähr 25% des Durchmessers der Faser bildet.
- 10 11. Mehrkomponentenfaser nach Anspruch 8, wobei die Kernkomponente ferner einen Polyepoxidmodifizierer umfasst, wie etwa eine epoxidfunktionelle (meth)acrylmonomere Komponente.
- 15 12. Mehrkomponentenfaser nach Anspruch 8, wobei die Faser eine Spitzenstreckung von ungefähr 50% oder mehr und eine Zähigkeit von ungefähr 0,75 bis ungefähr 6 GrammKraft pro Denier aufweist.
- 20 13. Faser, die durch das Verfahren gemäß einem der Ansprüche 1 bis 7, 9 oder 10 ausgebildet ist.
14. Vliesstoff, der die Mehrkomponentenfaser gemäß einem der Ansprüche 8 bis 13 umfasst.
15. Absorptionsgegenstand, der einen Absorptionskern umfasst, welcher zwischen einer flüssigkeitsdurchlässigen Schicht und einer im Allgemeinen flüssigkeitsundurchlässigen Schicht angeordnet ist, wobei der Absorptionsgegenstand den Vliesstoff gemäß Anspruch 14 umfasst.

Revendications

- 25 1. Procédé de formation d'une fibre à plusieurs constituants, le procédé comprenant le mélange d'un acide polylactique, d'un additif de durcissement polymère tel qu'une polyoléfine et un modificateur de polyépoxyde pour former une composition thermoplastique et, ensuite, l'extrusion de la composition thermoplastique à travers une filière pour former une fibre, dans lequel la fibre contient un composant central entouré par un composant gainant et dans lequel l'acide polylactique constitue environ 50 % en poids ou plus du contenu polymère du composant central et l'additif de durcissement polymère constitue environ 50 % en poids ou plus du contenu polymère du composant gainant.
- 30 2. Procédé selon la revendication 1, comprenant en outre la formation de pastilles à partir de la composition thermoplastique mélangée et l'extrusion des pastilles à travers la filière pour former la fibre, de préférence dans lequel les pastilles sont formées en utilisant un pastilleur immergé.
- 35 3. Procédé selon l'une quelconque des revendications précédentes, dans lequel le rapport du débit à l'état fondu de l'acide polylactique au débit à l'état fondu de l'additif de durcissement polymère est d'environ 0,1 à environ 0,9.
- 40 4. Procédé selon l'une quelconque des revendications précédentes, dans lequel le modificateur de polyépoxyde comprend un composant monomère (méth)acrylique époxy-fonctionnel, tel que l'acrylate de glycidyle, le méthacrylate de glycidyle ou une de leurs combinaisons, de préférence dans lequel le modificateur de polyépoxyde et un poly(éthylène/méthacrylate/-méthacrylate de glycidyle).
- 45 5. Procédé selon l'une quelconque des revendications précédentes, dans lequel l'acide polylactique constitue environ 70 % en poids ou plus de la composition thermoplastique.
6. Procédé selon l'une quelconque des revendications précédentes, dans lequel le mélange se fait à une température supérieure au point de fusion de l'acide polylactique et inférieure à une température d'environ 230 °C et dans lequel l'extrusion de la composition thermoplastique mélangée se fait à une température supérieure à environ 230 °C.
- 50 7. Procédé selon l'une quelconque des revendications précédentes, dans lequel la composition thermoplastique mélangée comprend une pluralité de domaines discrets dispersés dans une phase continue, les domaines discrets contenant le modificateur de polyépoxyde et la phase continue contenant l'acide polylactique.
- 55 8. Fibre à plusieurs composants qui contient un composant central entouré par un composant gainant, dans lequel l'acide polylactique constitué environ 50 % en poids ou plus du contenu polymère du composant central et un additif de durcissement polymère, telle qu'une polyoléfine, constitue environ 50 % en poids ou plus du contenu polymère du composant gainant, dans lequel l'acide polylactique du composant central et l'additif de durcissement polymère

du composant gainant sont tirés d'une seule composition thermoplastique dans laquelle l'acide polylactique est mélangé à l'additif de durcissement polymère.

5 9. Procédé selon l'une quelconque des revendications 1 à 7 ou fibre à plusieurs composants de la revendication 8, dans lequel ou laquelle l'additif de durcissement polymère constitue environ 90 % en poids à 100 % en poids du contenu polymère du composant gainant.

10 10. Procédé selon l'une quelconque des revendications 1 à 7 ou 9 ou fibre à plusieurs composants de la revendication 8 ou la revendication 9, dans lequel ou laquelle le composant gainant constitue environ 0,5 % à environ 25 % du diamètre de la fibre.

15 11. Fibre à plusieurs composants selon la revendication 8, dans lequel le composant central comprend en outre un modificateur de polyépoxyde tel qu'un composant monomère (méth)acrylique époxy-fonctionnel.

12. Fibre à plusieurs composants selon la revendication 8, dans lequel la fibre présente un allongement de pic d'environ 50 % ou plus et une ténacité d'environ 0,75 à environ 6 grammes force par denier.

13. Fibre formée par le procédé selon l'une quelconque des revendications 1 à 7, 9 ou 10.

20 14. Nappe non tissée comprenant la fibre à plusieurs composants de l'une quelconque des revendications 8 à 13.

15. Article absorbant comprenant un noyau absorbant positionné entre une couche perméable aux liquides et une couche globalement imperméable aux liquides, l'article absorbant comprenant la nappe non tissée de la revendication 14.

25

30

35

40

45

50

55


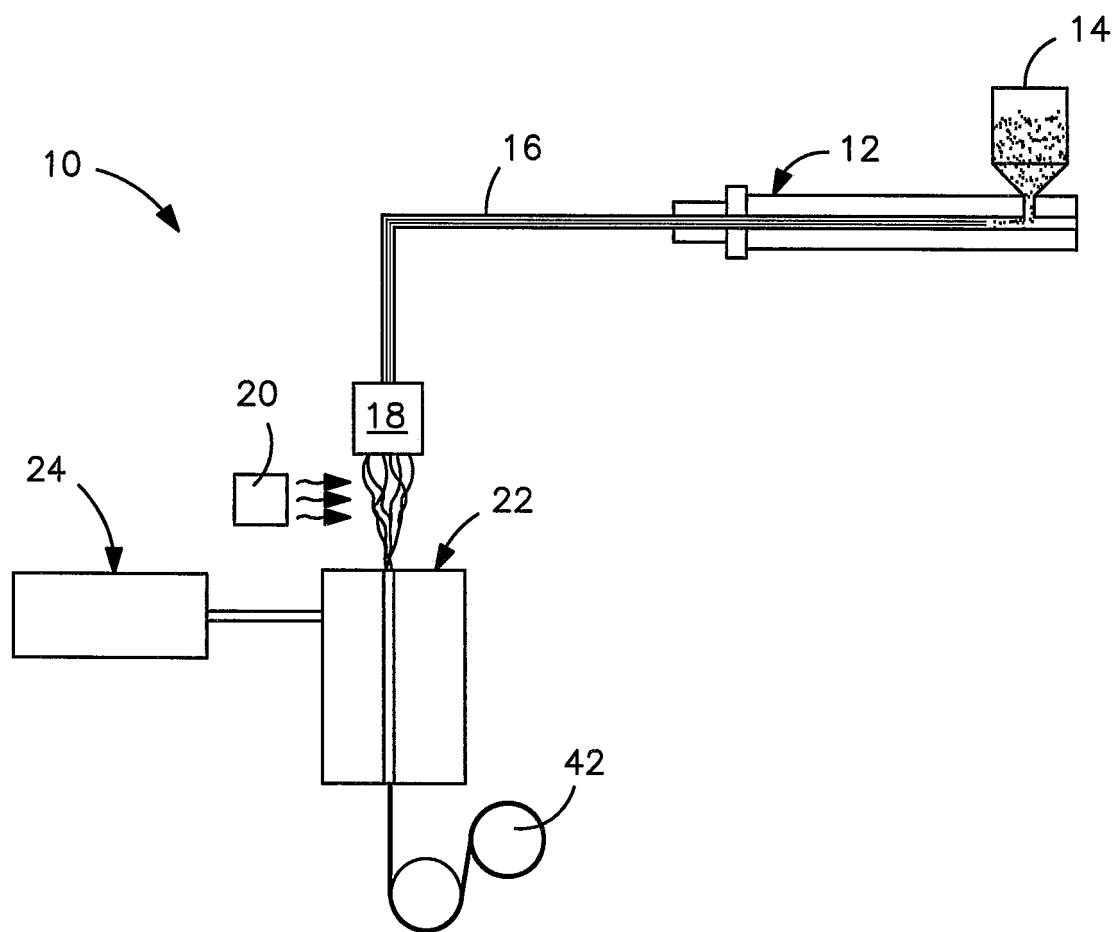


FIG. 1

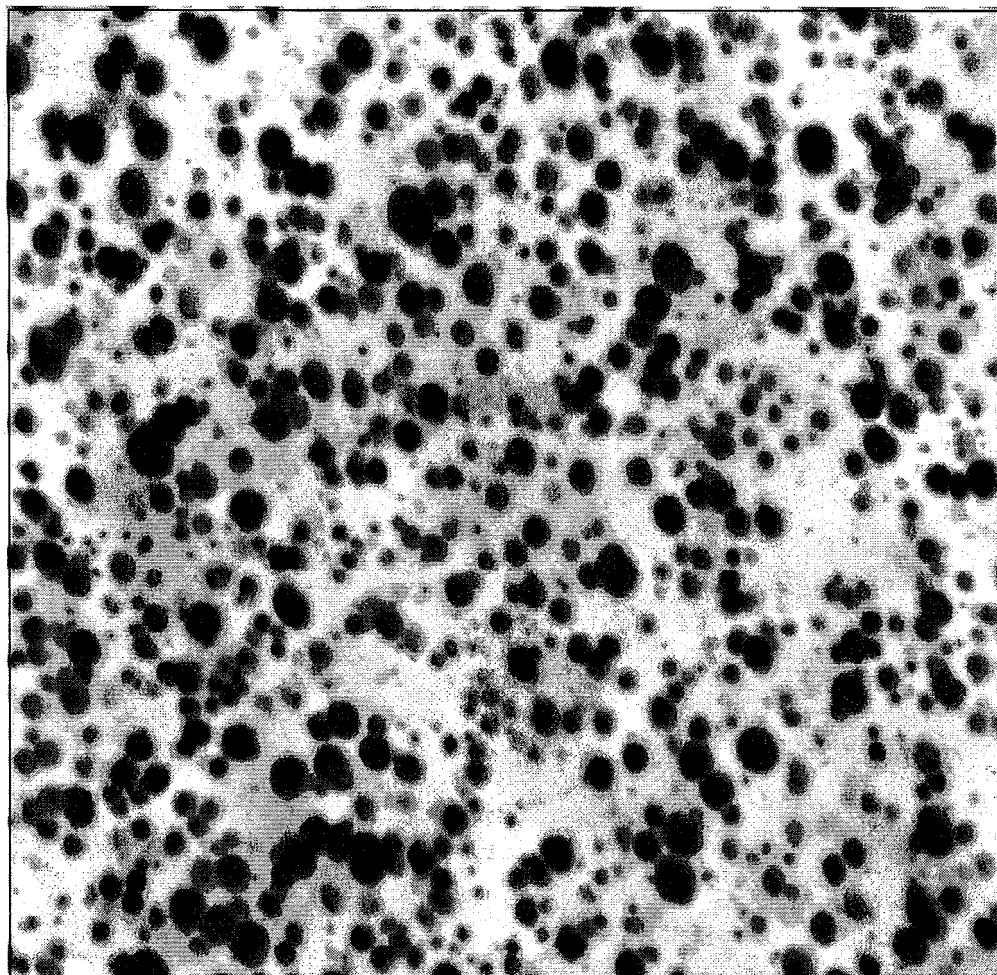

9349-02 10000x G2.tif

9349-02

Print Mag: 4520x @ 2. in


15:25 05/28/10

2 microns

HV=60kV

Direct Mag: 10000x

FIG. 2

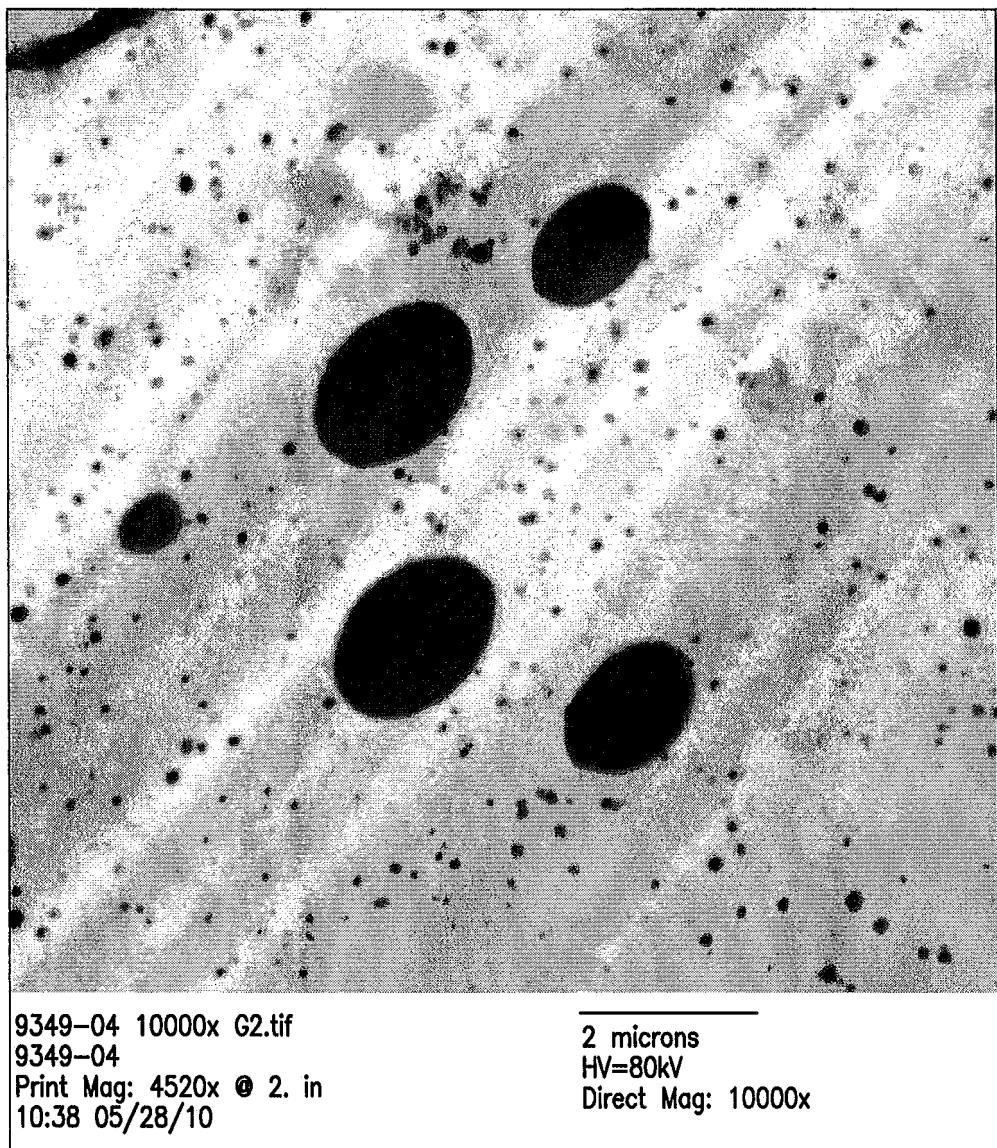

9349-04 10000x G2.tif
9349-04
Print Mag: 4520x @ 2. in
10:38 05/28/10

2 microns
HV=80kV
Direct Mag: 10000x

FIG. 3

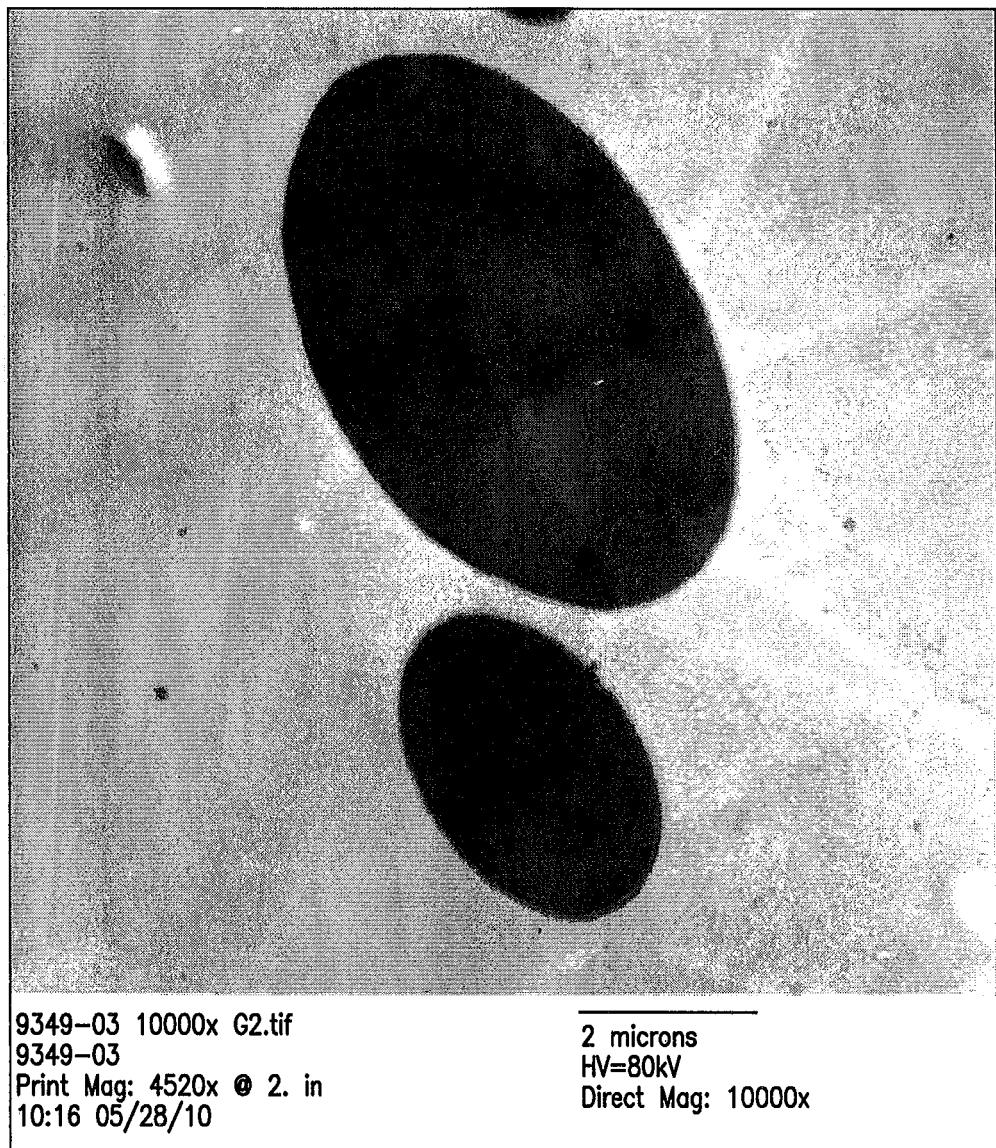


FIG. 4

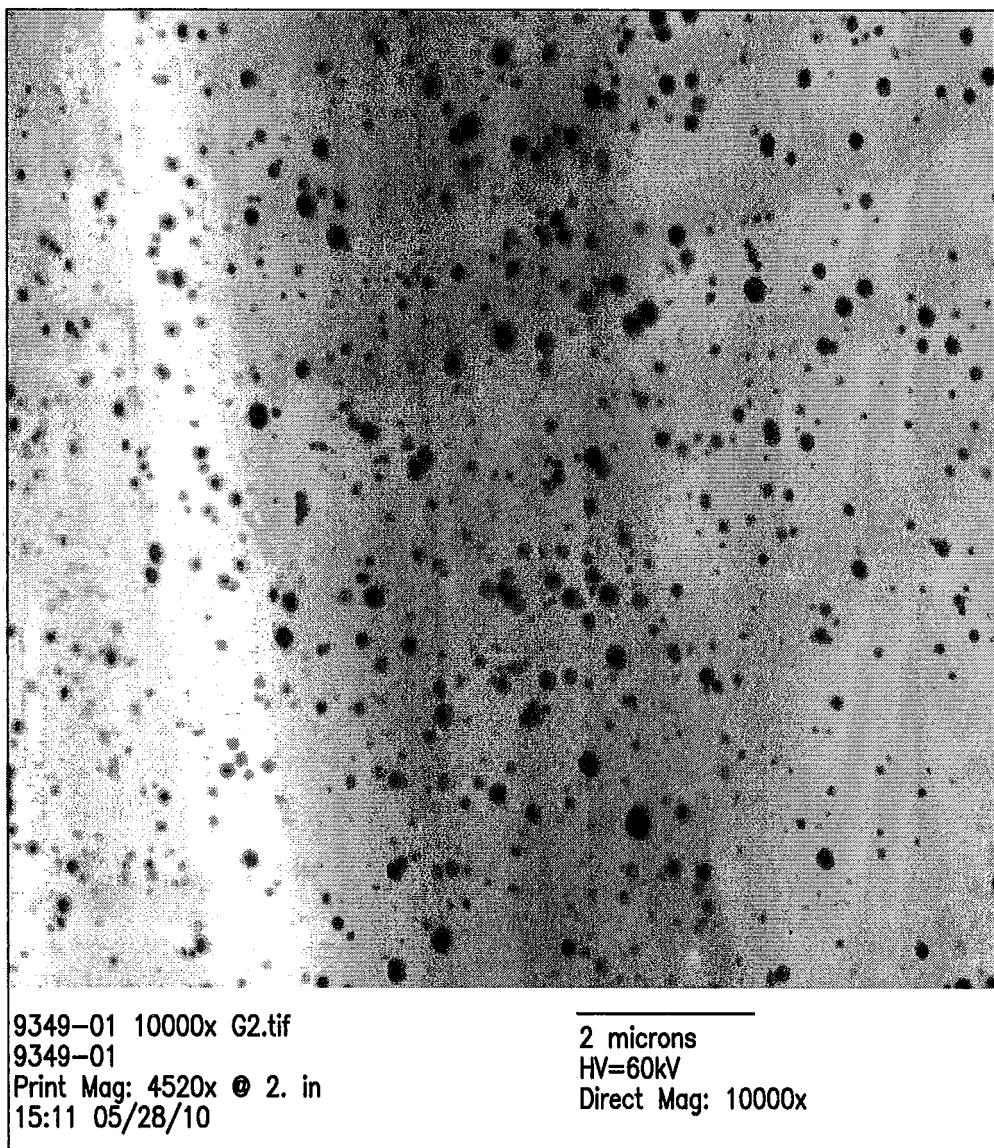


FIG. 5

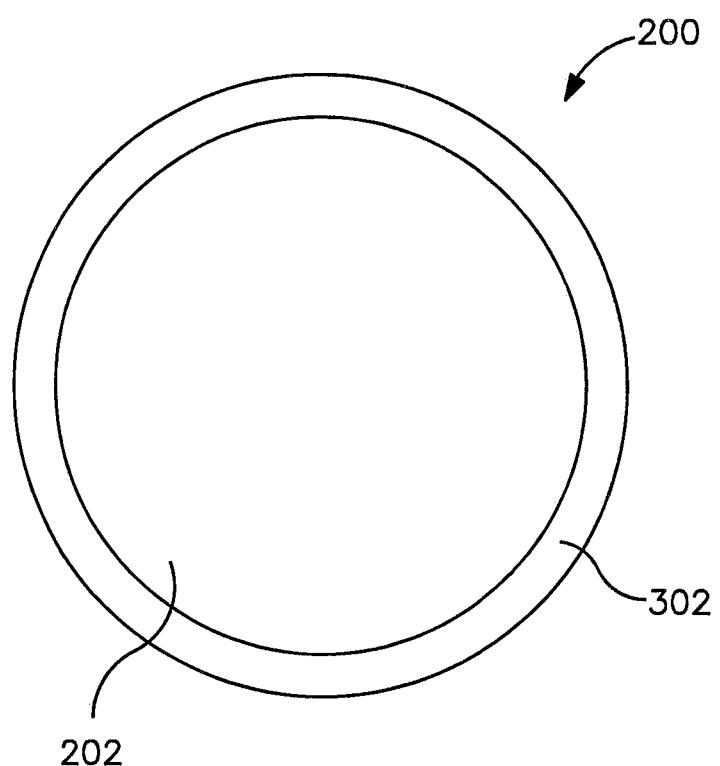


FIG. 6


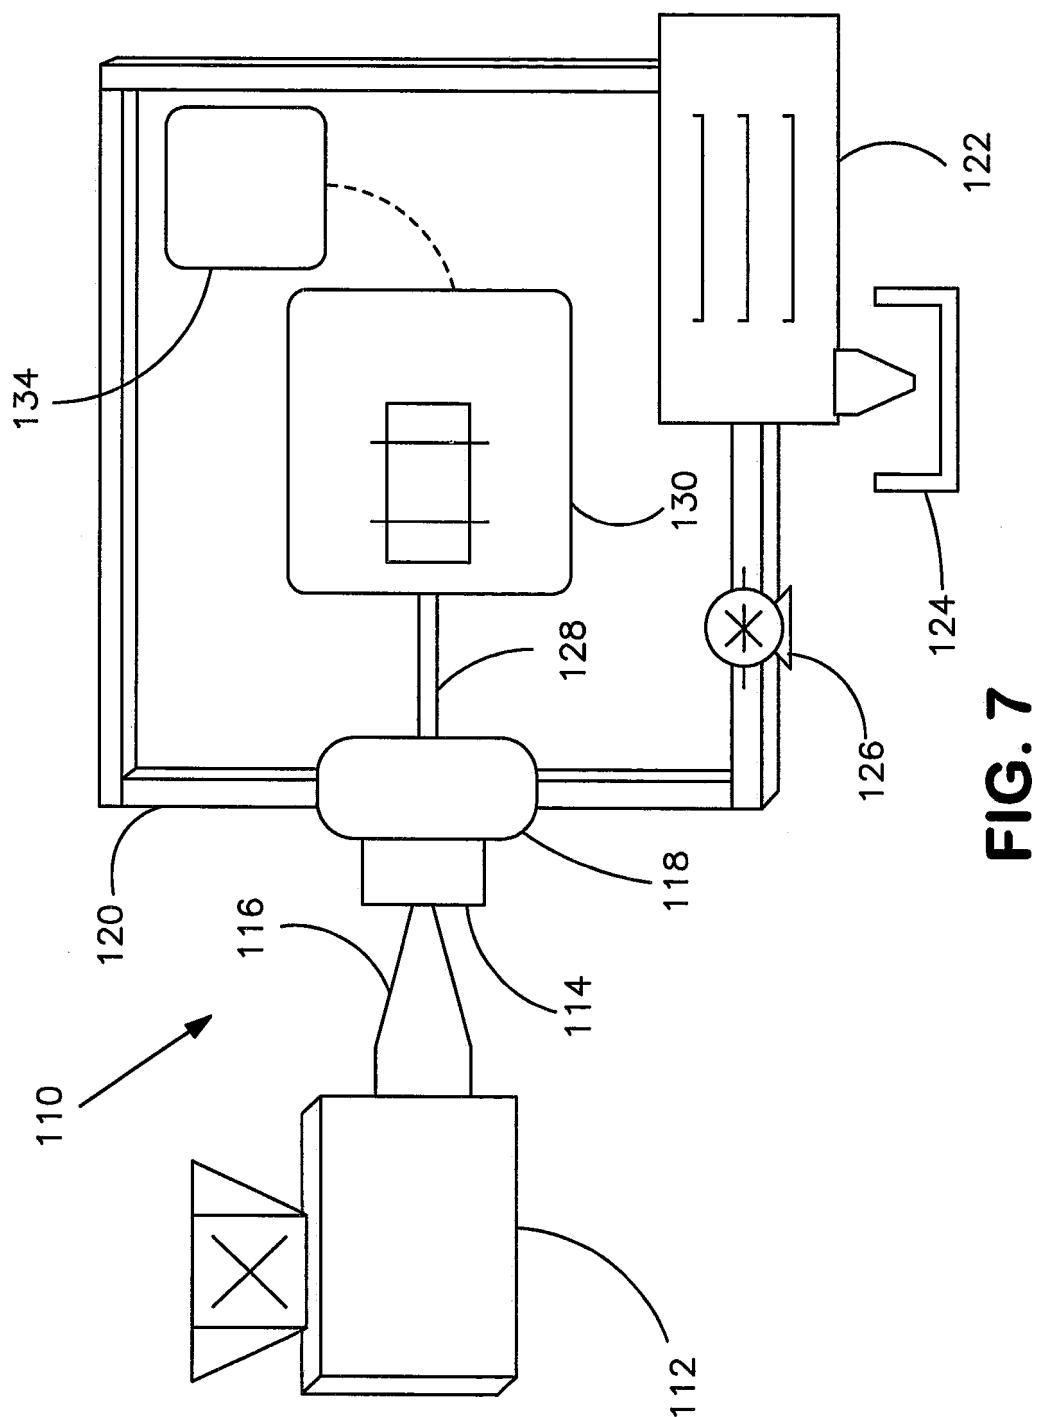


FIG. 7

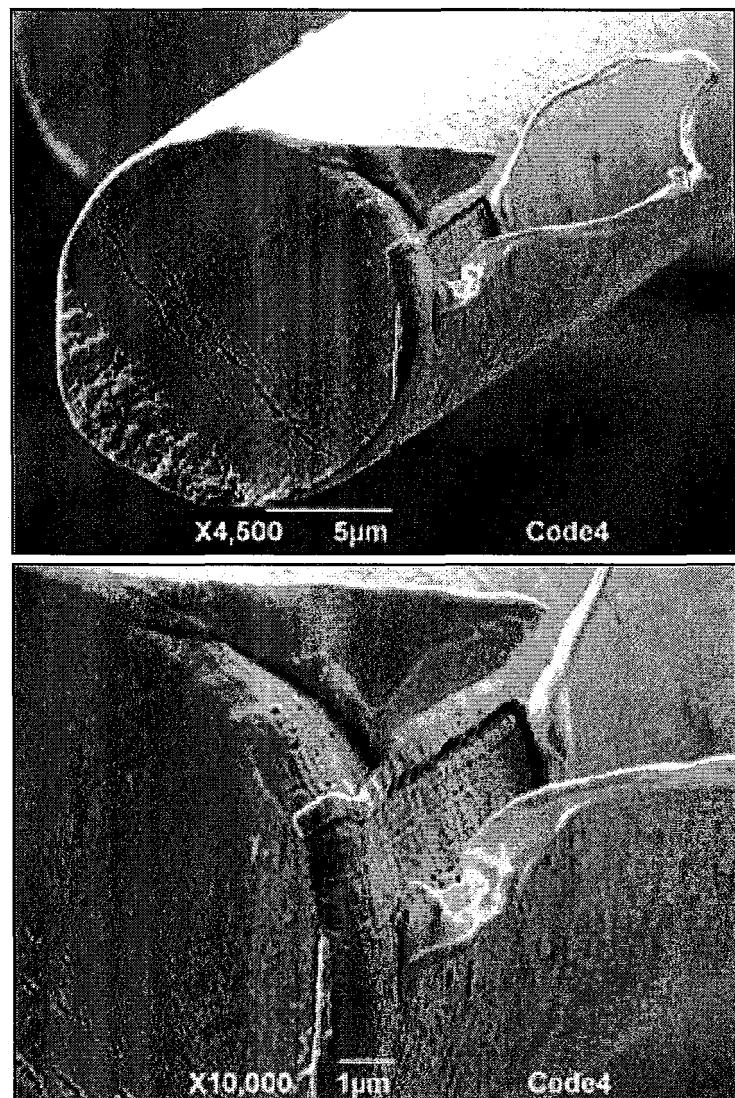

Apparent "skin" like structure at fiber surface

FIG. 8

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 85601210 A [0001]
- US 3849241 A, Butin [0013]
- US 4307143 A, Meitner [0013]
- US 4707398 A, Wisneski [0013]
- US 4340563 A, Appel [0014]
- US 3692618 A, Dorschner [0014]
- US 3802817 A, Matsuki [0014] [0067]
- US 3338992 A, Kinney [0014]
- US 3341394 A, Kinney [0014]
- US 3502763 A, Hartman [0014]
- US 3502538 A, Levy [0014]
- US 3542615 A, Dobo [0014]
- US 5382400 A, Pike [0014]
- US 4797468 A [0028]
- US 5470944 A [0028]
- US 5770682 A [0028]
- US 5821327 A [0028]
- US 5880254 A [0028]
- US 6326458 B [0028]
- US 4937299 A, Ewen [0041]
- US 5218071 A, Tsutsui [0041]
- US 5272236 A, Lai [0041] [0042]
- US 5278272 A, Lai [0041]
- US 6500563 B, Datta [0041]
- US 5539056 B, Yang [0041]
- US 5596052 B, Resconi [0041]
- US 5571619 A, McAlpin [0042]
- US 5322728 A, Davis [0042]
- US 5472775 A, Objieski [0042]
- US 6090325 A, Wheat [0042]
- US 5179164 A [0050]
- US 20100048082 A, Topolkaraev [0053]
- US 3981950 A [0064]
- US 6663372 B [0064]
- US 3423255 A [0067]
- US 3855046 A, Hansen [0073]
- US 5620779 A, Levy [0073]
- US 5962112 A, Haynes [0073]
- US 6093665 A, Sayovitz [0073]
- US 428267 A, Romano [0073]
- US 390708 A, Brown [0073]
- US 418305 A, Zander [0073]
- US 384508 A, Zander [0073]
- US 384819 A, Zander [0073]
- US 358035 A, Zander [0073]
- US 315990 A, Blenke [0073]
- US 4100324 A, Anderson [0077]
- US 5284703 A, Everhart [0077]
- US 5350624 A, Georger [0077]
- US 4041203 A, Brock [0078]
- US 5213881 A, Timmons [0078]
- US 5464688 A, Timmons [0078]
- US 4374888 A, Bornslaeger [0078]
- US 5169706 A, Collier [0078]
- US 4766029 A, Brock [0078]
- US 20040002273 A, Fitting [0078]
- US 4215682 A, Kubik [0079]
- US 4375718 A, Wadsworth [0079]
- US 4592815 A, Nakao [0079]
- US 4874659 A, Ando [0079]
- US 5401446 A, Tsai [0079]
- US 5883026 A, Reader [0079]
- US 5908598 A, Rousseau [0079]
- US 6365088 A, Knight [0079]