



(86) Date de dépôt PCT/PCT Filing Date: 2000/07/27

(87) Date publication PCT/PCT Publication Date: 2001/02/01

(45) Date de délivrance/Issue Date: 2005/03/22

(85) Entrée phase nationale/National Entry: 2001/10/31

(86) N° demande PCT/PCT Application No.: US 2000/020403

(87) N° publication PCT/PCT Publication No.: 2001/007865

(30) Priorité/Priority: 1999/07/27 (09/361,769) US

(51) Cl.Int.⁷/Int.Cl.⁷ G10K 15/04, G01N 29/24

(72) Inventeurs/Inventors:

LORRAINE, PETER W., US;

BIGIO, LAURENCE, US;

FILKINS, ROBERT J., US


(73) Propriétaire/Owner:

LOCKHEED MARTIN CORPORATION, US

(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : SYSTEME ET PROCEDE DE VERIFICATION AU LASER A ULTRASONS METTANT EN APPLICATION UNE SOURCE LASER AFIN DE GENERER DES ULTRASONS POSSEDANT UNE LONGUEUR D'ONDE ACCORDABLE

(54) Title: SYSTEM AND METHOD FOR ULTRASONIC LASER TESTING USING A LASER SOURCE TO GENERATE ULTRASOUND HAVING A TUNABLE WAVELENGTH

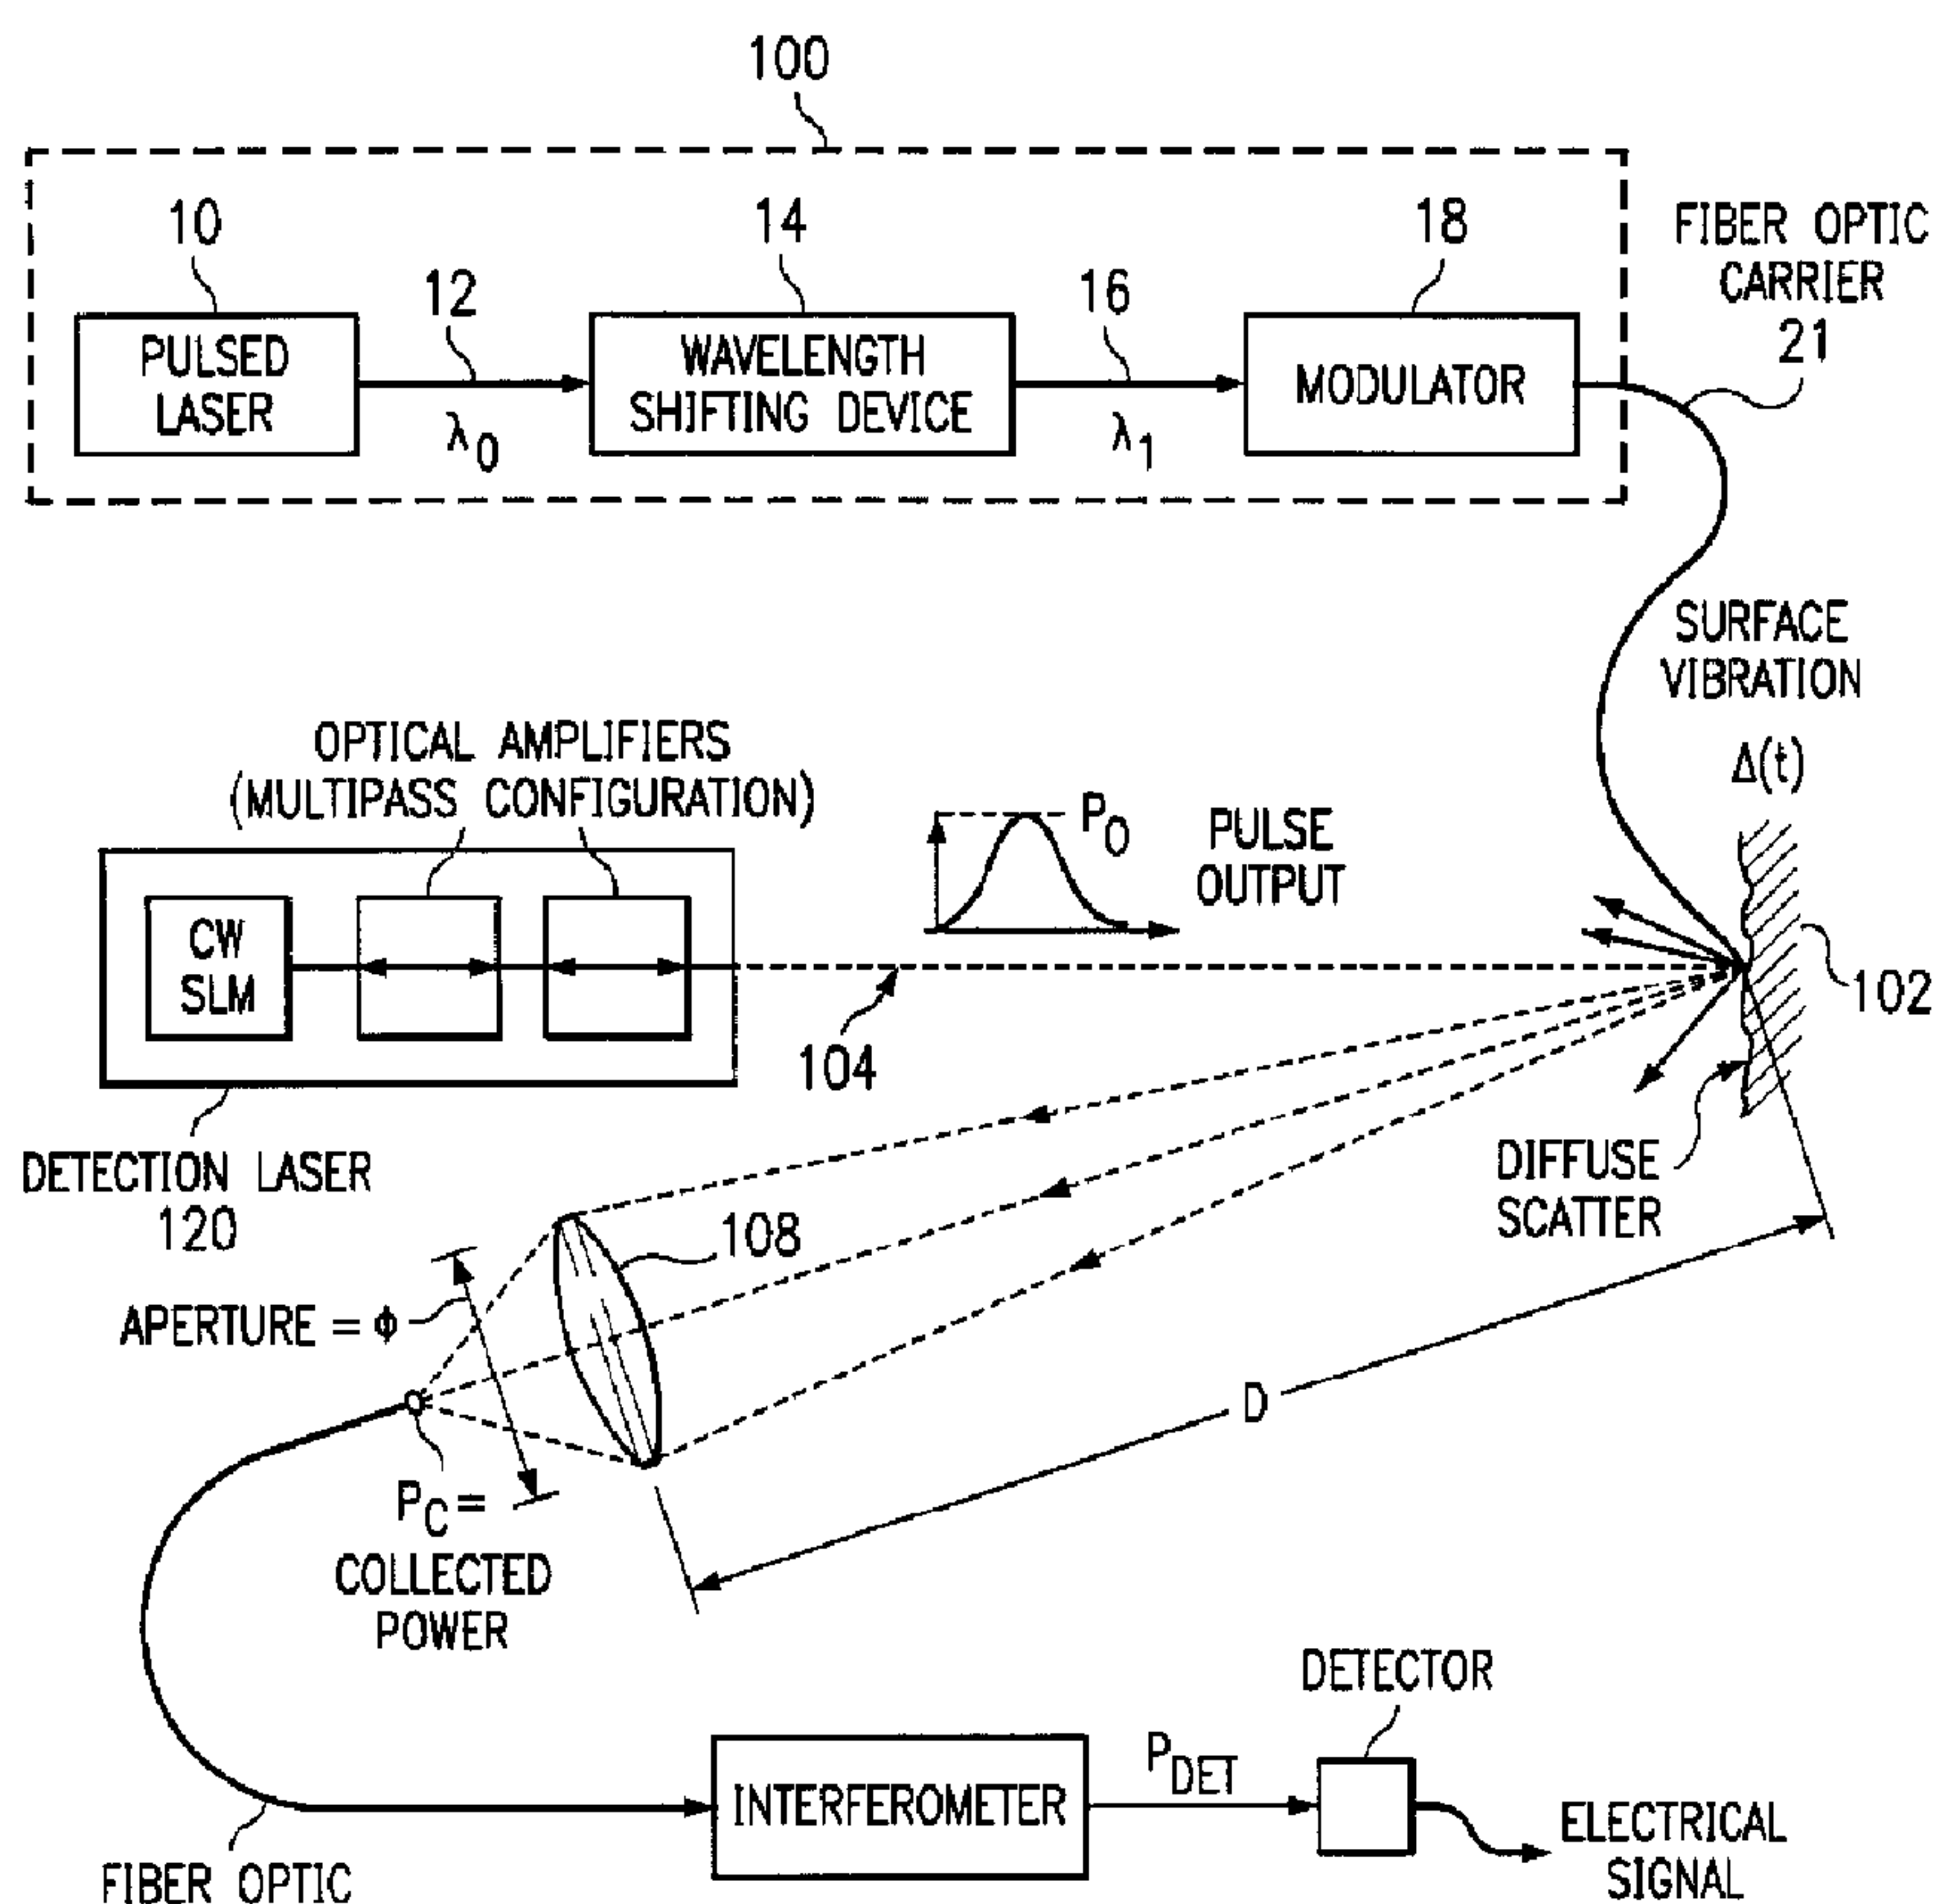

(57) Abrégé/Abstract:

A system and method for generating ultrasonic displacements on a remote target (102) is described. The method of the present invention includes the steps of first using a laser (10) to generate a beam (12) having a first wavelength γ to produce ultrasonic



(57) **Abrégé(suite)/Abstract(continued):**

displacements at the remote target. This laser beam will have a first wavelength γ which can be modulated to alter characteristics of the ultrasonic displacements. These ultrasonic displacements at the remote target (102) can be optimized to enhance the detection optics for collecting phase modulated light from the second pulsed laser beam (104) either reflected or scattered by the remote target (102), an interferometer to processes the phase modulated light and generates at least one output signal, and means for processing the at least one output signal to obtain data representative of the ultrasonic surface displacements on the surface of the remote target.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
1 February 2001 (01.02.2001)


PCT

(10) International Publication Number
WO 01/07865 A3

- (51) International Patent Classification⁷: **G10K 15/04**, G01N 29/24
- (74) Agents: **HULSEY, William, N., III et al.**; Gray Cary Ware & Freidenrich LLP, Suite 1440, 100 Congress Avenue, Austin, TX 78701 (US).
- (21) International Application Number: PCT/US00/20403
- (22) International Filing Date: 27 July 2000 (27.07.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/361,769 27 July 1999 (27.07.1999) US
- (71) Applicant (for all designated States except US): **LOCKHEED MARTIN CORPORATION** [US/US]; 6801 Rockledge Drive, Bethesda, MD 20817 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LORRAINE, Peter, W.** [—/US]; 876 Heather Lane, Niskayuna, NY 12309 (US). **BIGIO, Laurence** [—/US]; 841 Dean Street, Schenectady, NY 12309 (US). **FILKINS, Robert, J.** [—/US]; 122 Pilling Drive, Fonda, NY 12068 (US).
- Published:
— With international search report.
- (88) Date of publication of the international search report:
25 May 2001

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR ULTRASONIC LASER TESTING USING A LASER SOURCE TO GENERATE ULTRASOUND HAVING A TUNABLE WAVELENGTH

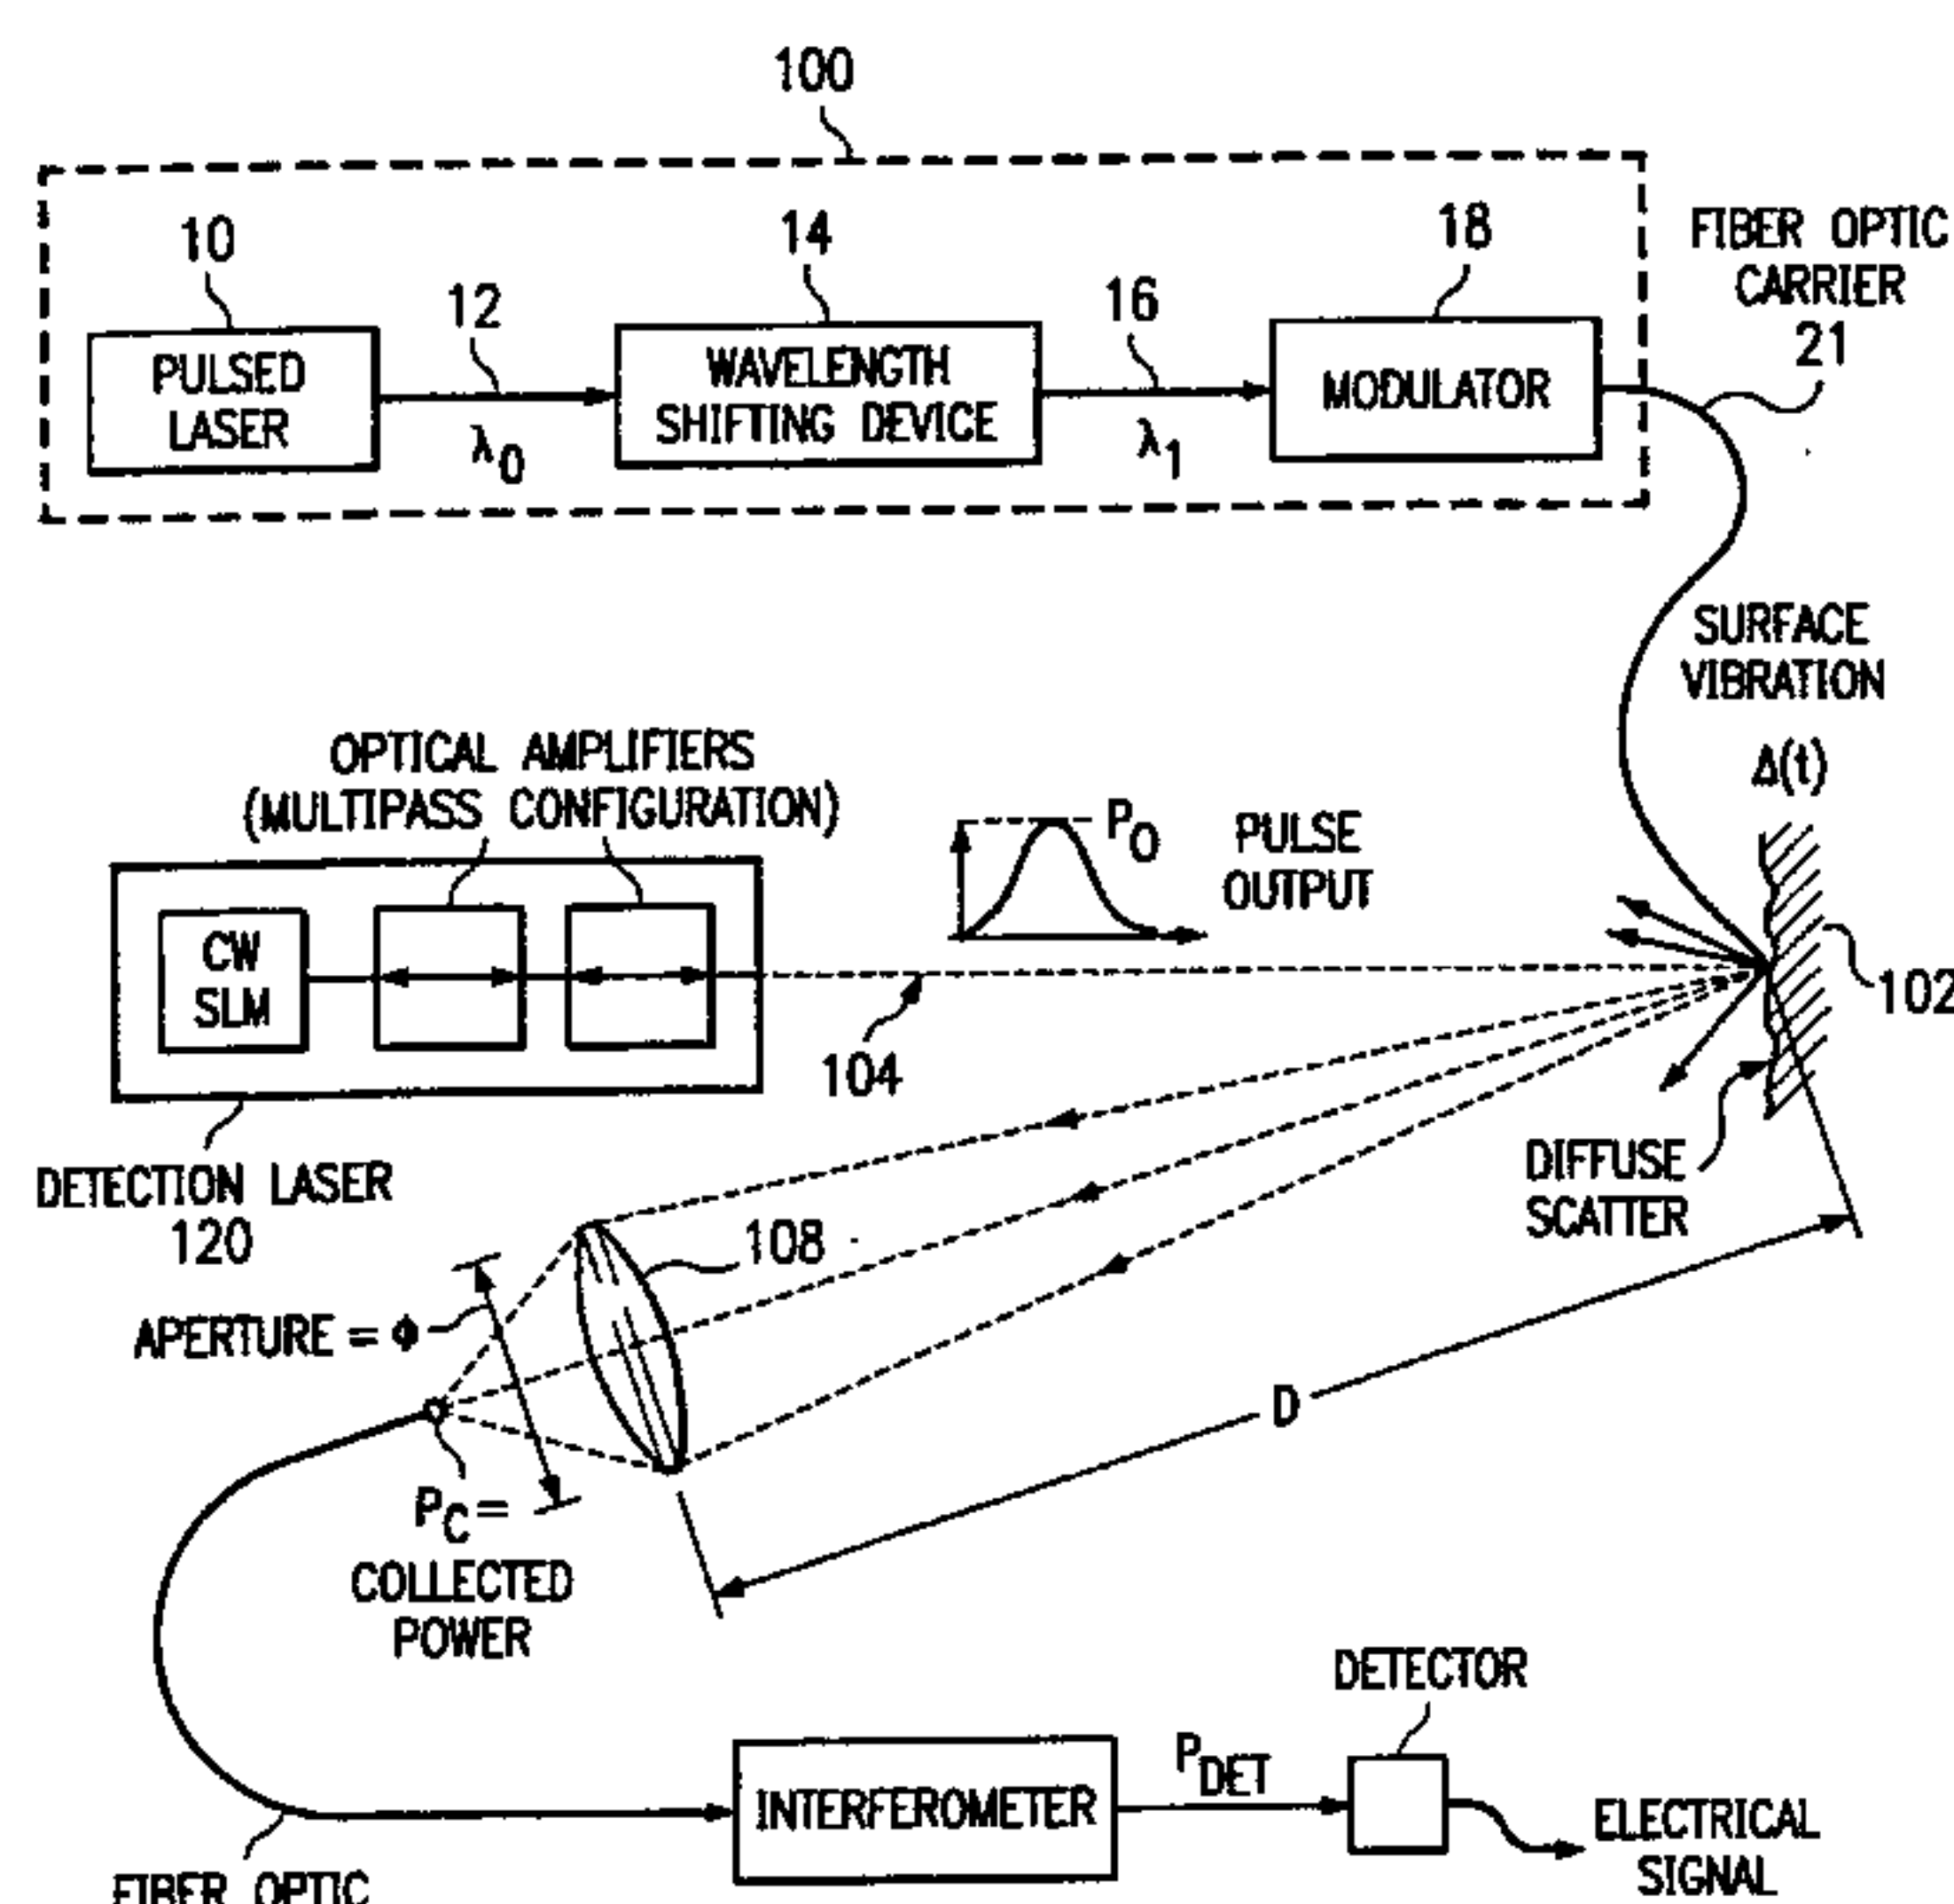

(57) Abstract: A system and method for generating ultrasonic displacements on a remote target (102) is described. The method of the present invention includes the steps of first using a laser (10) to generate a beam (12) having a first wavelength γ to produce ultrasonic displacements at the remote target. This laser beam will have a first wavelength γ which can be modulated to alter characteristics of the ultrasonic displacements. These ultrasonic displacements at the remote target (102) can be optimized to enhance the detection optics for collecting phase modulated light from the second pulsed laser beam (104) either reflected or scattered by the remote target (102), an interferometer to process the phase modulated light and generates at least one output signal, and means for processing the at least one output signal to obtain data representative of the ultrasonic surface displacements on the surface of the remote target.

WO 01/07865 A3

SYSTEM AND METHOD FOR ULTRASONIC LASER TESTING USING A LASER SOURCE TO
GENERATE ULTRASOUND HAVING A TUNABLE WAVELENGTH

TECHNICAL FIELD

5 This invention relates generally to the field of optical information processing and more particularly to a method and apparatus for ultrasonic laser testing. More specifically, the present invention provides an improved laser source for generation of ultrasound. Even more particularly, the laser source of the present invention can significantly improve the characteristics of the ultrasound generated by modulating the optical and temporal characteristics of the generation laser to optimize the characteristics of the generated ultrasound.

10 BACKGROUND ART

In recent years, the use of advanced composite structures has experienced tremendous growth in the aerospace, automotive, and many other commercial industries. While composite materials offer significant improvements in performance, they require strict quality control procedures in the manufacturing processes. Specifically, non-destructive evaluation ("NDE") methods are required to assess the structural integrity of composite structures, for example, to detect inclusions, delaminations and porosities. Conventional NDE methods are very slow, labor-intensive, and costly. As a result, testing procedures adversely increase the manufacturing costs associated with composite structures. Various methods and apparatuses have been proposed to assess the structural integrity of composite structures. One method to discloses the use of a pulsed laser beam for generating ultrasound on a work piece and a second pulsed laser beam for detecting the ultrasound. Phase modulated light from the second laser beam is then demodulated to obtain a signal representative of the ultrasonic motion at the surface of the work piece. A disadvantage associated with this approach is that the first pulsed laser beam is not optimized for the generation of ultrasound in the workplace.

25 Prior solutions describe operable techniques for optically detecting transient motion from a scattering surface, which techniques are useful for ultrasonic composite materials non-destructive test and evaluation, these techniques have numerous failings.

Known techniques provide the ability to perform common mode noise cancellation. By using a single laser signal, the known techniques cannot perform differential mode operation. An adverse consequence of this characteristic is the inability to use known ultrasonic systems in factory or industrial settings where ambient light noise levels exceed certain threshold levels. This problem prevents the proper detection of scatter signals from the composite materials.

30 Another limitation associated with none ultrasonic test and evaluation techniques relates to their broad scanning approaches to determine the existence of a transient, thereby indicating a defect. Because broad scanning occurs, both the amount of data is excessive and the degree of accuracy is lower.

Another limitation associated with the known systems relates to their ability to process ultrasonic data in real-time. This limitation makes such systems only marginally useful for testing and evaluating composite materials.

Other limitations associated with existing systems relate to general inflexibility of such systems, which may hold all distances low, result in small depth of field performance and only minimal extraction of information from the back scattered signals. These limitations make industrial application of the ultrasonic testing method generally impractical.

Therefore, it would be desirable for a new method and apparatus for ultrasonic laser testing that overcomes the disadvantages and deficiencies of the prior art.

DISCLOSURE OF INVENTION

In accordance with one aspect of the present invention there is provided a method for generating ultrasonic displacements at a remote target, comprising the steps of: using a first laser beam having a first wavelength to generate ultrasonic displacements at the remote target; shifting the first wavelength of the first laser beam to a second wavelength to alter a characteristic of the ultrasonic displacements; directing the first laser beam to a point on the remote target; and modulating the second wavelength of the first laser beam to alter the characteristics of the ultrasonic displacements.

In accordance with another aspect of the present invention there is provided a method for generating ultrasonic displacements at a remote target, comprising the steps of: generating a first laser having a first wavelength; shifting the first wavelength of the first laser beam to create a second laser having a second wavelength; generating ultrasonic displacements at the remote target using the second laser beam; and modulating the second wavelength of the second laser beam to alter a characteristic of the ultrasonic displacements.

In light of the above, a need exists for a system and method that generates a desired frequency content in laser-generated ultrasonic waves. The present invention provides a system and method for generating laser radiation with a tunable wavelength and temporal shape that substantially eliminates or reduces disadvantages and problems associated with previously developed systems and methods for laser inspection.

More specifically, the present invention provides a system for generating laser radiation with a tunable wavelength and temporal shape. This system includes a first pulsed laser to generate a first pulse laser beam. The first pulse laser beam is produced having a first wavelength. A wavelength shifting device shifts the first wavelength of the first laser beam to a second wavelength. A modulator then modulates the laser beam having the second wavelength.

In another embodiment, the laser radiation with a tunable wavelength is utilized to generate ultrasonic displacements at a remote target to be inspected. This involves generating a first laser beam having a first wavelength. A wavelength shifting device then shifts the first wavelength of the first laser beam to a second wavelength. An optical modulator is used to modulate the second wavelength laser

2a

beam's temporal shape. This laser beam is then used to generate ultrasonic displacements at a remote target wherein the ultrasonic displacements at the remote target have a desired frequency content and are used for NDE of the remote target.

5 The present invention provides an important technical advantage in that a laser-generated ultrasonic wave can be formed with a desired frequency content and temporal shape. Thus, for certain materials that require specific ranges of acoustic frequency to adequately perform a non-destructive evaluation of the material, an optimal set of ultrasonic displacements can be determined. In turn, the wavelength shifting device is used to shift the first wavelength to a wavelength, which generates the optimal laser pulse to produce the desired range of acoustic energy in the ultrasonic wave. Therefore, 10 depending on the thickness or composition of the materials, the desired ultrasonic displacements can be generated to produce the best resolution for inspection.

Additionally, the attenuation of the ultrasound can be controlled, allowing a user to optimize the inspection techniques for the defects to be searched for. Furthermore, by understanding the attenuation characteristics of the ultrasound generated in the target, the scanning technique can be optimized based 15 on these

characteristics to reduce or eliminate over sampling and therefore increase the speed and efficiency of the inspection which decreasing cost.

The present invention provides another technical advantage in that a system is provided for flexible, accurate, and cost-effective methods for inspecting complex composite structures. The present invention is able to optimize a scan and test a large size composite structure based on empirical data associated with the composite structure or data modeled on the composition of the structure.

BRIEF DESCRIPTION OF DRAWINGS

A more complete understanding of the present invention and the advantages thereof may be acquired by referring to the following description, taken in conjunction with the accompanying drawings in which like reference numbers indicate like features and wherein:

FIGURE 1 provides a first embodiment of the present invention;

FIGURE 2 illustrates an embodiment of the present invention utilizing a control system;

FIGURE 3 illustrates a second embodiment of the present invention wherein wavelength shifting is accomplished using a second laser;

FIGURE 4 provides a process to reduce noise associated with the generation laser of the present invention;

FIGURE 5 provides a flow chart of the present invention; and

FIGURE 6 provides a block diagram of the present invention wherein the present invention is utilized in conjunction with a laser detection system for detecting ultrasonic displacements.

MODES FOR CARRYING OUT THE INVENTION

Preferred embodiments of the present invention are illustrated in the FIGURES, like numerals being used to refer to like and corresponding parts of various drawings.

The present invention provides a system and method for generating laser radiation with a tunable wavelength and temporal shape that substantially eliminates or reduces disadvantages and problems associated with previously developed systems and methods for laser inspection.

More specifically, the present invention provides a system for generating laser radiation with a tunable wavelength and temporal shape. This system includes a first pulsed laser to generate a first pulse laser beam. The first pulse laser beam is produced having a first wavelength. A wavelength shifting device shifts the first wavelength of the first laser beam to a second wavelength. A modulator then modulates the laser beam having the second wavelength.

FIGURE 1 shows in a block diagram the basic components of system 100 for generating laser radiation with a tunable wavelength and temporal shape. System 100 comprises a pulsed laser 10 which will generate a laser beam 12 having a first wavelength λ_0 . The first laser beam 12 will have a path of propagation to a wavelength shifting device 14. This wavelength shifting device will shift the first wavelength λ_0 to a second

wavelength λ_1 , producing a laser beam 16 having a second wavelength λ_1 . Laser beam 16 may then be modulated by an optical modulator 18 to produce a laser beam 20 having a tunable temporal shape. In the present invention, wavelength shifting device 14 may be an optical parametric oscillator, RAMAN cell, difference frequency generators, or a device combining a second laser beam with the first to generate a laser having wavelength λ_1 .

Pulsed laser 10 may be a CO2 laser, neodymium YAG laser (Nd:Yag laser), alexandrite laser, titanium sapphire laser, diode pumped laser, lamp pumped laser, or other laser known by those skilled in the art. The second wavelength chosen may be chosen in order to be compatible with an optical carrier used to transmit the laser to a remote target, or may be selected to an optical wavelength λ_1 .

In one embodiment of the present invention, a second wavelength may be chosen in order to optimize characteristics of the interaction of the laser beam with a target material, such as in the generation of ultrasound in a material for NDE inspection. For example, a laser-generated ultrasonic wave can be generated by the laser with a desired frequency content and penetration depth, and wherein the ultrasonic displacements have a desired frequency content. Therefore, depending on the thickness of the material or material composition to be tested, the desired frequencies and ultrasonic displacements can be generated to produce the best resolution for the specific NDE inspection at hand. This second wavelength may be an optimal wavelength that is determined from either material-specific data or empirically calculated data associated with the material to be tested. This data may vary for different materials and thicknesses of these materials. A specific embodiment of the present invention uses a diode pumped laser with an OPO for operation at 3.5 microns. In another example, the first wavelength may be 1064 nm and the second wavelength may be 3500 nm, or the second wavelength may be chosen between 1000 nm and 4000 nm.

The first laser may be transmitted to the wavelength shifting device by an optical fiber mechanism. This optical fiber mechanism may deliver CO2 laser radiation operating at 10 microns. After the wavelength of laser 12 has been shifted from a first wavelength λ_0 to a second wavelength λ_1 , a modulator 18 may be used to encode a long-source laser pulse such as a tone burst, chirp, more complex modulation schemes to control the generated ultrasonic displacements spectral or content, or provide a basis for match filter detection.

FIGURE 2 shows an additional embodiment of the present invention wherein a computer control system 22 is coupled to the wavelength shifting device 14 and modulator 18. This control system 22 may be utilized to dynamically control the wavelength shifting device 14 and modulator 18 such that an optimal second wavelength λ_1 and the temporal shape of the laser 20 can be dynamically altered during an inspection to optimize an NDE test.

FIGURE 3 is similar to FIGURE 1. However, the wavelength shifting device may combine a second laser 24 with first laser 12 to produce a new laser beam 16 having a second wavelength λ_1 .

FIGURE 4 again is similar to FIGURE 1, however FIGURE 4 incorporates a filter to filter laser beam 12 prior to shifting the wavelength of laser beam 12 to λ_1 in order to improve a signal-to-noise ratio of the first laser beam.

A specific embodiment of the present invention may utilize a solid-state laser such as a Nd:YAG laser. The optical wavelength may be shifted to match the optical attenuation properties of the material under test. A preferred embodiment produces laser pulses between 2.5 and 4 microns in optical wavelength and even more specifically between 3.5 and 3.8 microns in optical wavelength.

5 In the present invention, an optical fiber of silver chloride/silver bromide (Ag:Br) glass may be used to deliver a laser pulse. More specifically, this optical fiber may be used to deliver a 10 micron CO₂ laser pulse, or other far IR laser pulse for ultrasonic purposes. This optical fiber has more far IR applications than previous materials such as ZBLAN.

FIGURE 5 presents a method of the present invention wherein laser radiation having a tunable
10 wavelength and temporal shape is used to generate ultrasonic displacements at a remote target for NDE. At step 50, a first laser having a first wavelength is generated.

At step 52, this first laser is shifted in wavelength to a second wavelength. This second wavelength may be chosen in order to generate desirable characteristics in the ultrasonic displacements. This shifting the wavelength of the first laser may be accomplished using an optical parametric oscillator, combining the first laser
15 with a second laser to produce a laser beam having a second wavelength, or other method as known to those skilled in the art. At step 54, the laser beam having the second wavelength may be modulated to alter the temporal shape or frequency content of the laser. This modulated laser may then be applied to a remote target in or to generate ultrasonic displacements. This is accomplished in step 56.

The ultrasonic displacements generated at the target may be detected to determine flaws, porosities, or
20 other defects (as known by those skilled in the art) in a remote target. One such method may involve using a pulsed laser beam applied coaxially with the ultrasound generating laser to detect the ultrasonic displacements at the remote target. The ultrasonic displacements at the remote target will create phase-modulated light that is scattered and reflected from the coaxially applied laser. This phase-modulated light may be processed in order to obtain data representative of the ultrasonic displacements at the remote target. The data associated with the
25 ultrasonic displacements may be processed to discover flaws, defects, or other porosities in the material under test of the remote target. These functions are represented by step 58 which involves detecting the ultrasonic displacements at a remote target, and step 60 processing the data associated with the ultrasonic displacements in order to perform a non-destructive evaluation of the remote target.

FIGURE 6 describes a system for generating ultrasonic displacements at a remote target utilizing a laser
30 with tunable wavelength in temporal shape. System 100, or other embodiments of the present invention as illustrated in FIGURES 2, 3 and 4, may be utilized to generate a laser having tunable wavelength and temporal shape. This laser may be applied by a fiber optic carrier 21 to a remote target 102. A material such as ZBLAN, or Ag:Br glass may be selected for optical carrier 20. A long pulse may be encoded into laser 20 by encoding the long pulse prior to shifting from a first wavelength of laser 12 to a second wavelength of laser 16. This long pulse
35 may be dynamically controlled by a computer system 26 in order to alter an inspection acoustic frequency or a depth of inspection. These encoded pulses may include a tone burst or chirp to control the inspection acoustic

frequency. The need to dynamically control this long pulse might arise from different polymers in a composite or different thicknesses in different regions of remote target 102.

A detection laser 104 may be applied to the remote target 102. In one embodiment (not shown), this detection laser 104 may be applied coaxially with generation laser 20. Generation laser 20 produces a
5 compressional ultrasonic displacement in the material of target 102. The ultrasonic displacement is a result of thermo-elastic expansion of the material of target 102 as it absorbs generation laser 20. Generation laser 20 must be of a frequency that is readily absorbed at the desired depth in remote target 102 without causing ablation or damage to the material of target 102. Furthermore, generation laser 20 must be of a long enough pulse to induce ultrasonic deformations. Generation laser 20 should be absorbed into remote target 102 as heat, thereby causing
10 thermo-elastic expansion without ablation. Generally, utilizing a wavelength in the ultraviolet range is undesirable because such light can potentially damage a composite material if remote target 102 is made of such. Detection laser 104 must be of a frequency that does not induce further ultrasonic displacements at remote target 102.

Detection laser 104 interacts with ultrasonic displacements at remote target 102 and produces phase-
15 modulated light 106. Some of the phase-modulated light 106 may be captured by collection optics 108. Methods for detecting such ultrasonic displacements are disclosed in U.S. Patent 6,122,060, entitled "Method and Apparatus For Detecting Ultrasonic Surface Displacements Using Post-Collection Optical Implementation," filed on June 29, 1999, to Thomas E. Drake, and U.S. Patent 6,633,384, entitled "Method and Apparatus For Ultrasonic Laser Testing," filed on June 29, 1999, to Thomas E. Drake.

20

The embodiments disclosed in the present invention may be combined with the techniques described in the above U.S. Patent Applications and U.S. Patent 6,176,135, entitled "System and Method For Laser-Ultrasonic Frequency Control Using Optical Wavelength Tuning," filed on July 27, 1999, to Marc Dubois, et. al.,
25 to provide control of the acoustic frequency content by either optical wavelength control or temporal modulation. A further extension is a combination of optical wavelength shifting, spatial modulation, or patterning of the laser source.

The present invention provides an important technical advantage in that a laser-generated ultrasonic wave can be generated with a desired frequency content and temporal shape. Thus, for certain materials and geometries that require specific frequency range or temporal shape to adequately inspect the material, optimal
30 ultrasonic displacements may be generated by a laser having optimal optical characteristics. An optimal wavelength λ_1 for generation laser 20 may be determined. Then generation laser 20 may be used to generate the desired ultrasonic displacements at a remote target to be inspected. Hence, the desired ultrasonic displacements can be generated and in turn produce increased resolution for target inspection. Additionally, inspection scanning of a remote target can be optimized based on the attenuation characteristics of the ultrasonic displacements
35 generated at the remote target. Although this enhances and optimizes the efficiency of the non-destructive evaluation testing of materials, this reduces costs and inspection time associated with these materials.

Although the present invention has been described in detail herein with reference to the illustrative embodiments, it should be understood that the description is by way of example only and is not to be construed in a limiting sense. It is to be further understood, therefore, that numerous changes in the details of the embodiments of this invention and additional embodiments of this invention will be apparent to, and may be made by, persons
5 of ordinary skill in the art having reference to this description. It is contemplated that all such changes and additional embodiments are within the spirit and true scope of this invention as claimed below.

WHAT IS CLAIMED IS:

1. A method for generating ultrasonic displacements at a remote target, comprising the steps of:
using a first laser beam having a first wavelength to generate ultrasonic displacements at the remote target;
5 shifting the first wavelength of the first laser beam to a second wavelength to alter a characteristic of the ultrasonic displacements;
directing the first laser beam to a point on the remote target; and
modulating the second wavelength of the first laser beam to alter the characteristics of the ultrasonic displacements.
10
2. The method of Claim 1, further comprising the step of modulating the amplitude of the first laser beam to alter the characteristics of the ultrasonic displacements.
3. The method of Claim 1, wherein the step of shifting the first wavelength of the first laser beam
15 to a second wavelength is realized with an optical parametric oscillator.
4. The method of Claim 1, wherein the first wavelength is 1064 nm and the second wavelength is 3500 nm.
- 20 5. The method of Claim 1, wherein the second wavelength is 1000 to 4000 nm.
6. The method of Claim 1, wherein the second wavelength is compatible with a flexible optical conduit.
- 25 7. The method of Claim 6, wherein the flexible optical conduit is a fiber optic carrier.
8. The method of Claim 1 further comprising the step of encoding a long source laser pulse prior to shifting the first wavelength of the first laser beam to a second wavelength.
- 30 9. The method of Claim 8, wherein the step of encoding a long pulse laser source is dynamically controlled by a computer system to alter set of variables comprising:
an inspection acoustic frequency; and
a depth of penetration.
- 35 10. The method of Claim 9, wherein the long pulse laser source is encoded with a tone burst to control the inspection acoustic frequency.

11. The method of Claim 9, wherein the long pulse laser source is encoded with a chirp to control the inspection acoustic frequency.

12. The method of Claim 9, wherein the long pulse laser source is varied based on a specific composite formulation of the remote target.

13. The method of Claim 9, wherein the long pulse laser source is varied based on a geometry of the remote target.

14. The method of Claim 9, wherein the long pulse laser source is varied based on a database used to determine the optimal inspection acoustic frequency and depth of penetration.

15. The method of Claim 1, wherein the first laser has a repetition rate greater than 400 Hz.

16. The method of Claim 1, wherein the first laser is selected from the group consisting of CO₂ Laser, Nd:YAG laser, alexandrite laser, titanium sapphire laser, lamp pumped laser, and diode pumped laser.

17. The method of Claim 1, wherein the first laser is a solid state laser.

18. The method of Claim 7, wherein the fiber optic carrier is constructed from material selected from the group consisting of Zblan and silver chloride / silver bromide glass.

19. The method of Claim 1, wherein the long pulse laser source is varied based on a specific composite formulation of the remote target.

20. The method of Claim 7, further comprising reducing the peak power of the first laser by temporally controlling the pulse width.

21. The method of Claim 1, wherein the step of shifting the first wavelength of the first laser beam to a second wavelength is realized by combining the first laser with a second laser to produce a third laser at a second wavelength.

22. A method for generating ultrasonic displacements at a remote target, comprising the steps of:
generating a first laser having a first wavelength;
shifting the first wavelength of the first laser beam to create a second laser having a second wavelength;
generating ultrasonic displacements at the remote target using the second laser beam; and

modulating the second wavelength of the second laser beam to alter a characteristic of the ultrasonic displacements.

23. The method of Claim 22, further comprising the steps of:

5 choosing a second wavelength of the laser beam with desirable characteristics of generating ultrasonic displacements in the frequency wherein the step of shifting the first wavelength of the laser beam uses an Optical Parametric Oscillator.

24. The method of Claim 23, further comprising the steps of:

10 using a third pulsed laser beam coaxial with the second laser to detect the ultrasonic surface displacements on the surface of the remote target;

collecting a phase modulated light from the third pulsed laser beam either reflected or scattered by the remote target; and




15 processing the phase modulated light to obtain data representative of the ultrasonic surface displacements at the remote target.

25. The method of Claim 24, wherein the step of processing the phase modulated light comprises:

using an interferometer to demodulate the phase modulated light, creating at least one optical signal;

20 converting the at least one optical signal into at least one digital signal; and
using a digital signal processor to process the at least one digital signal.

1/3

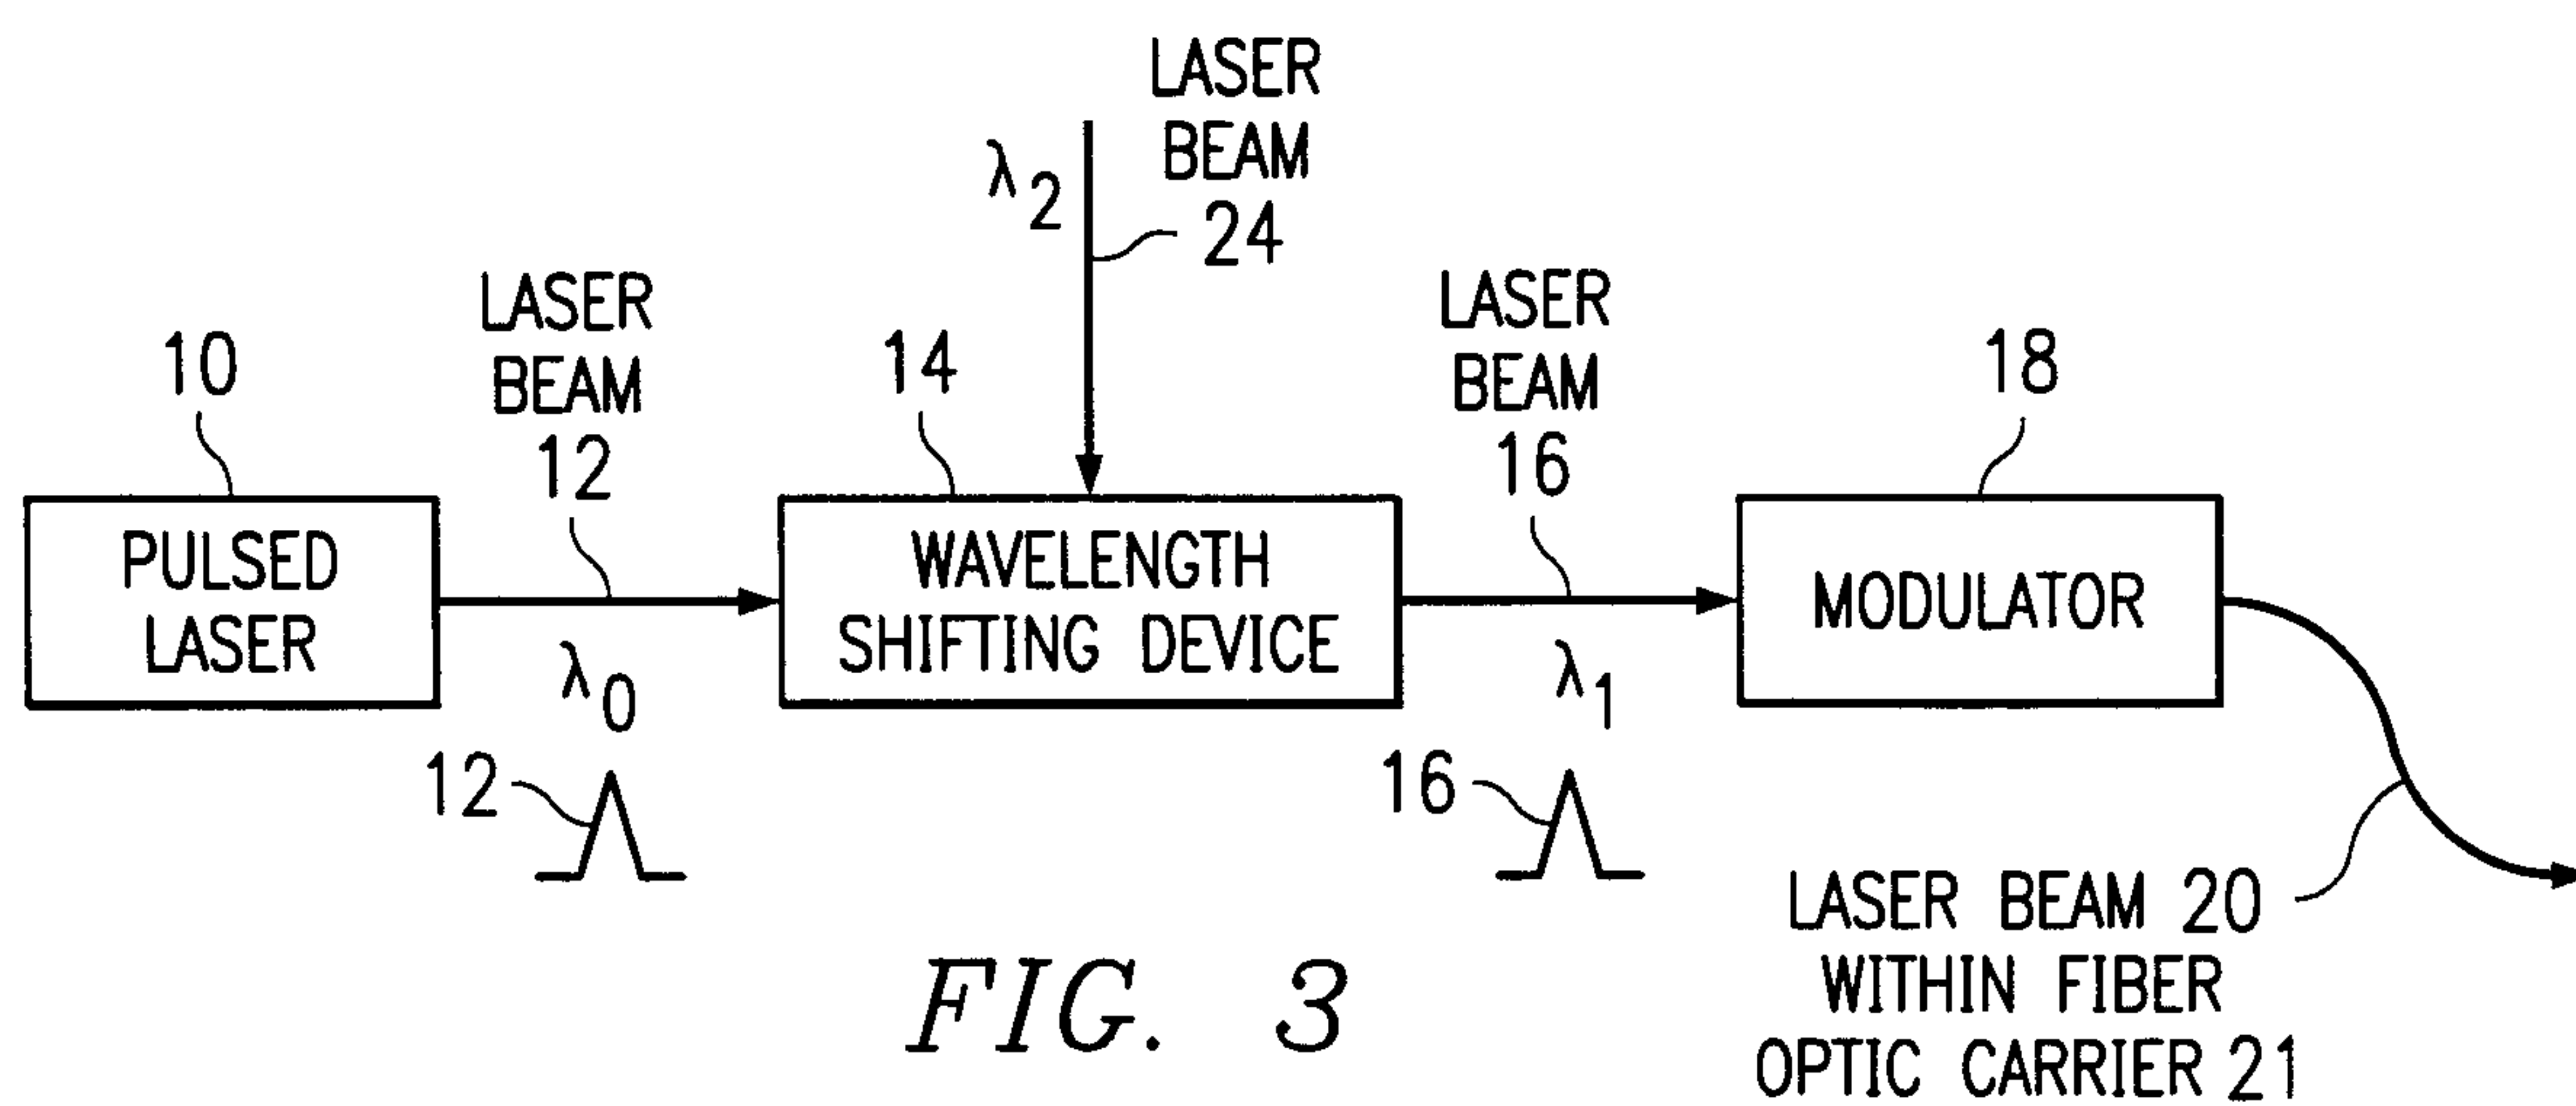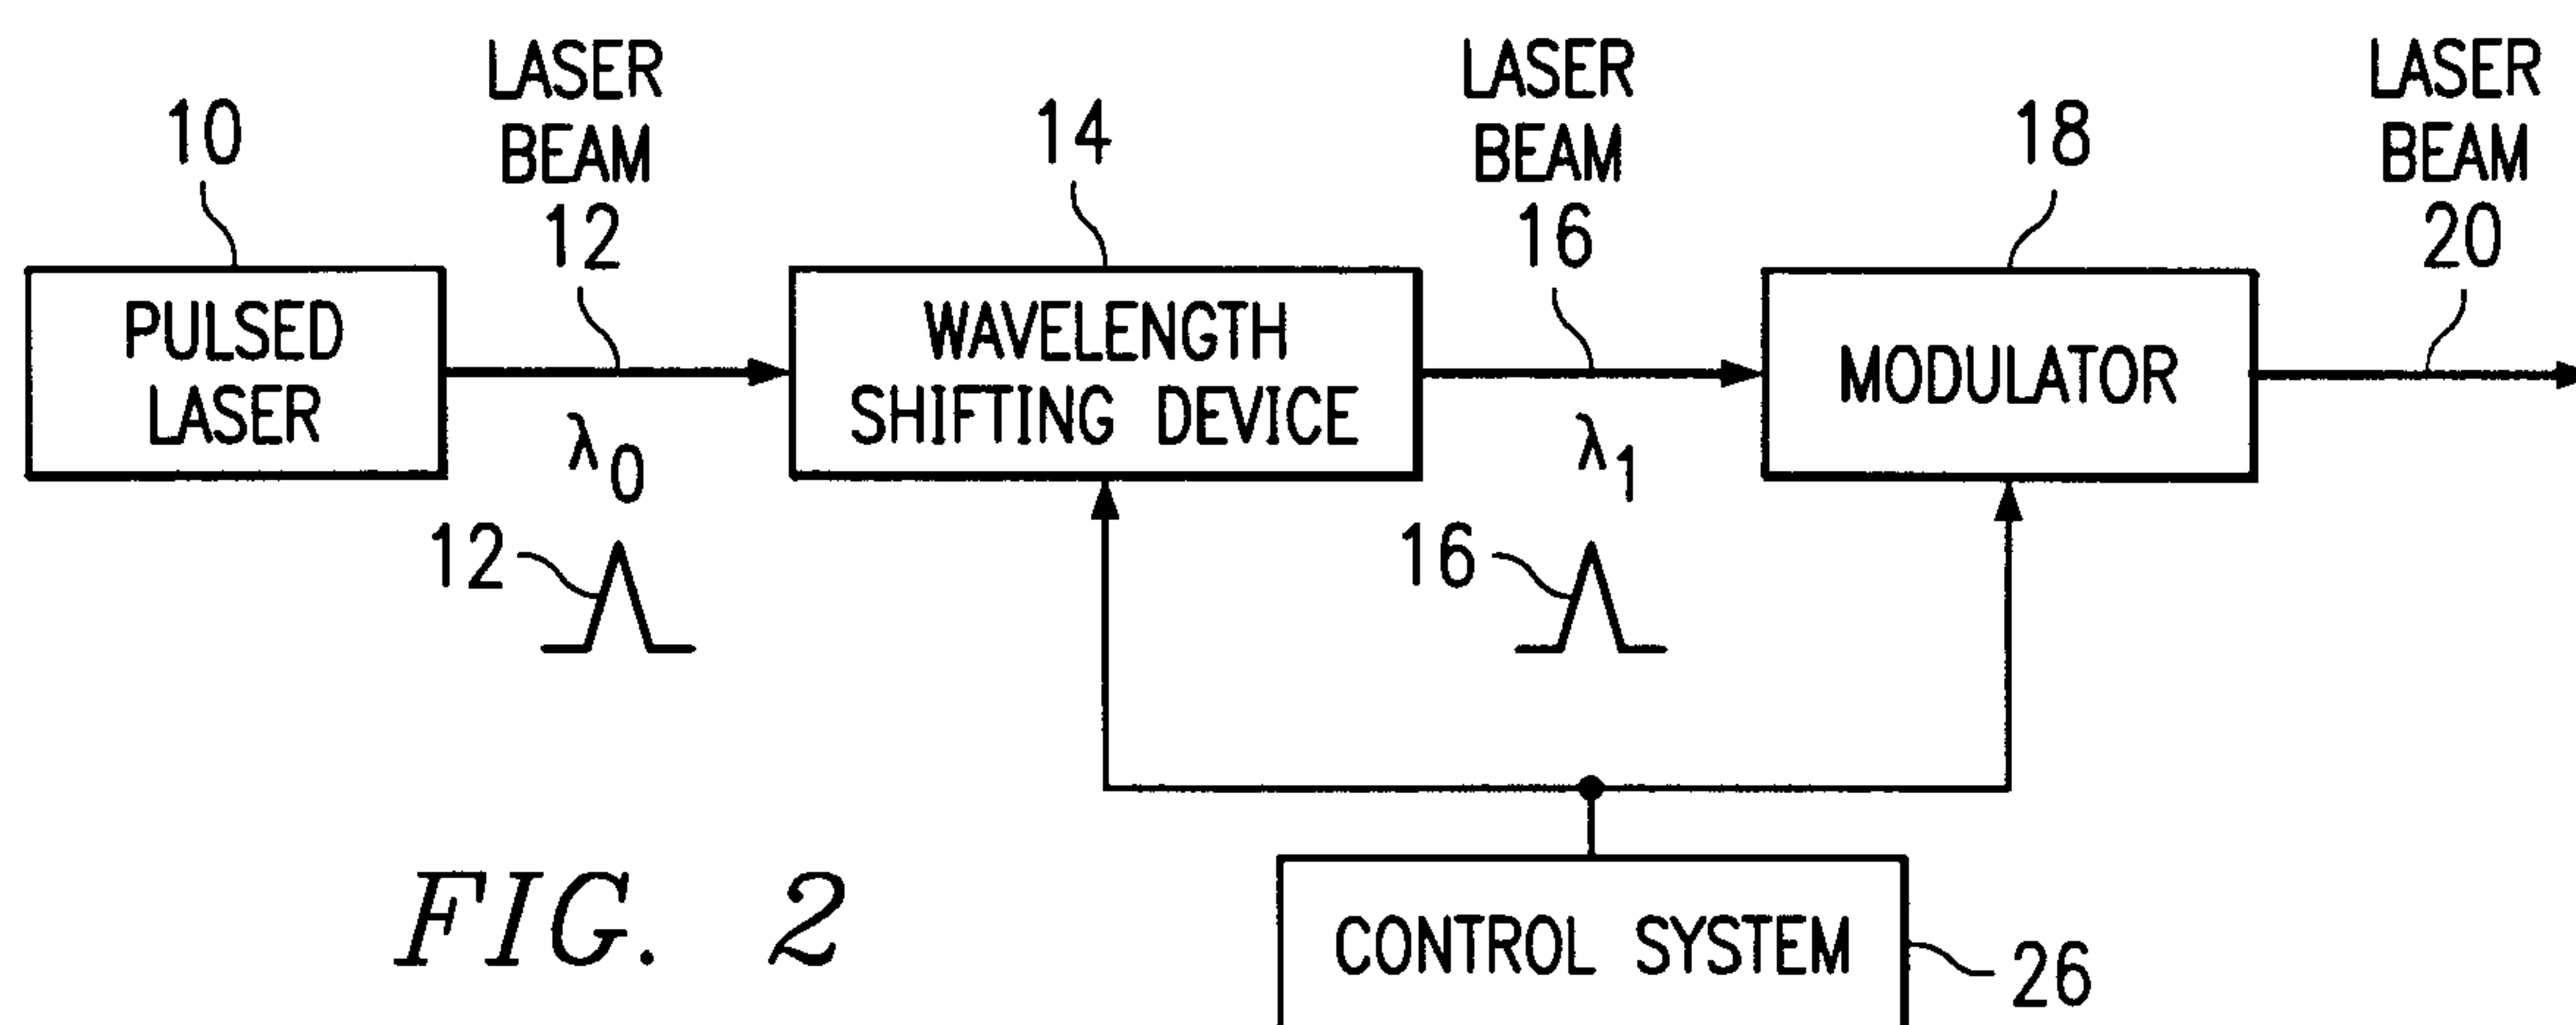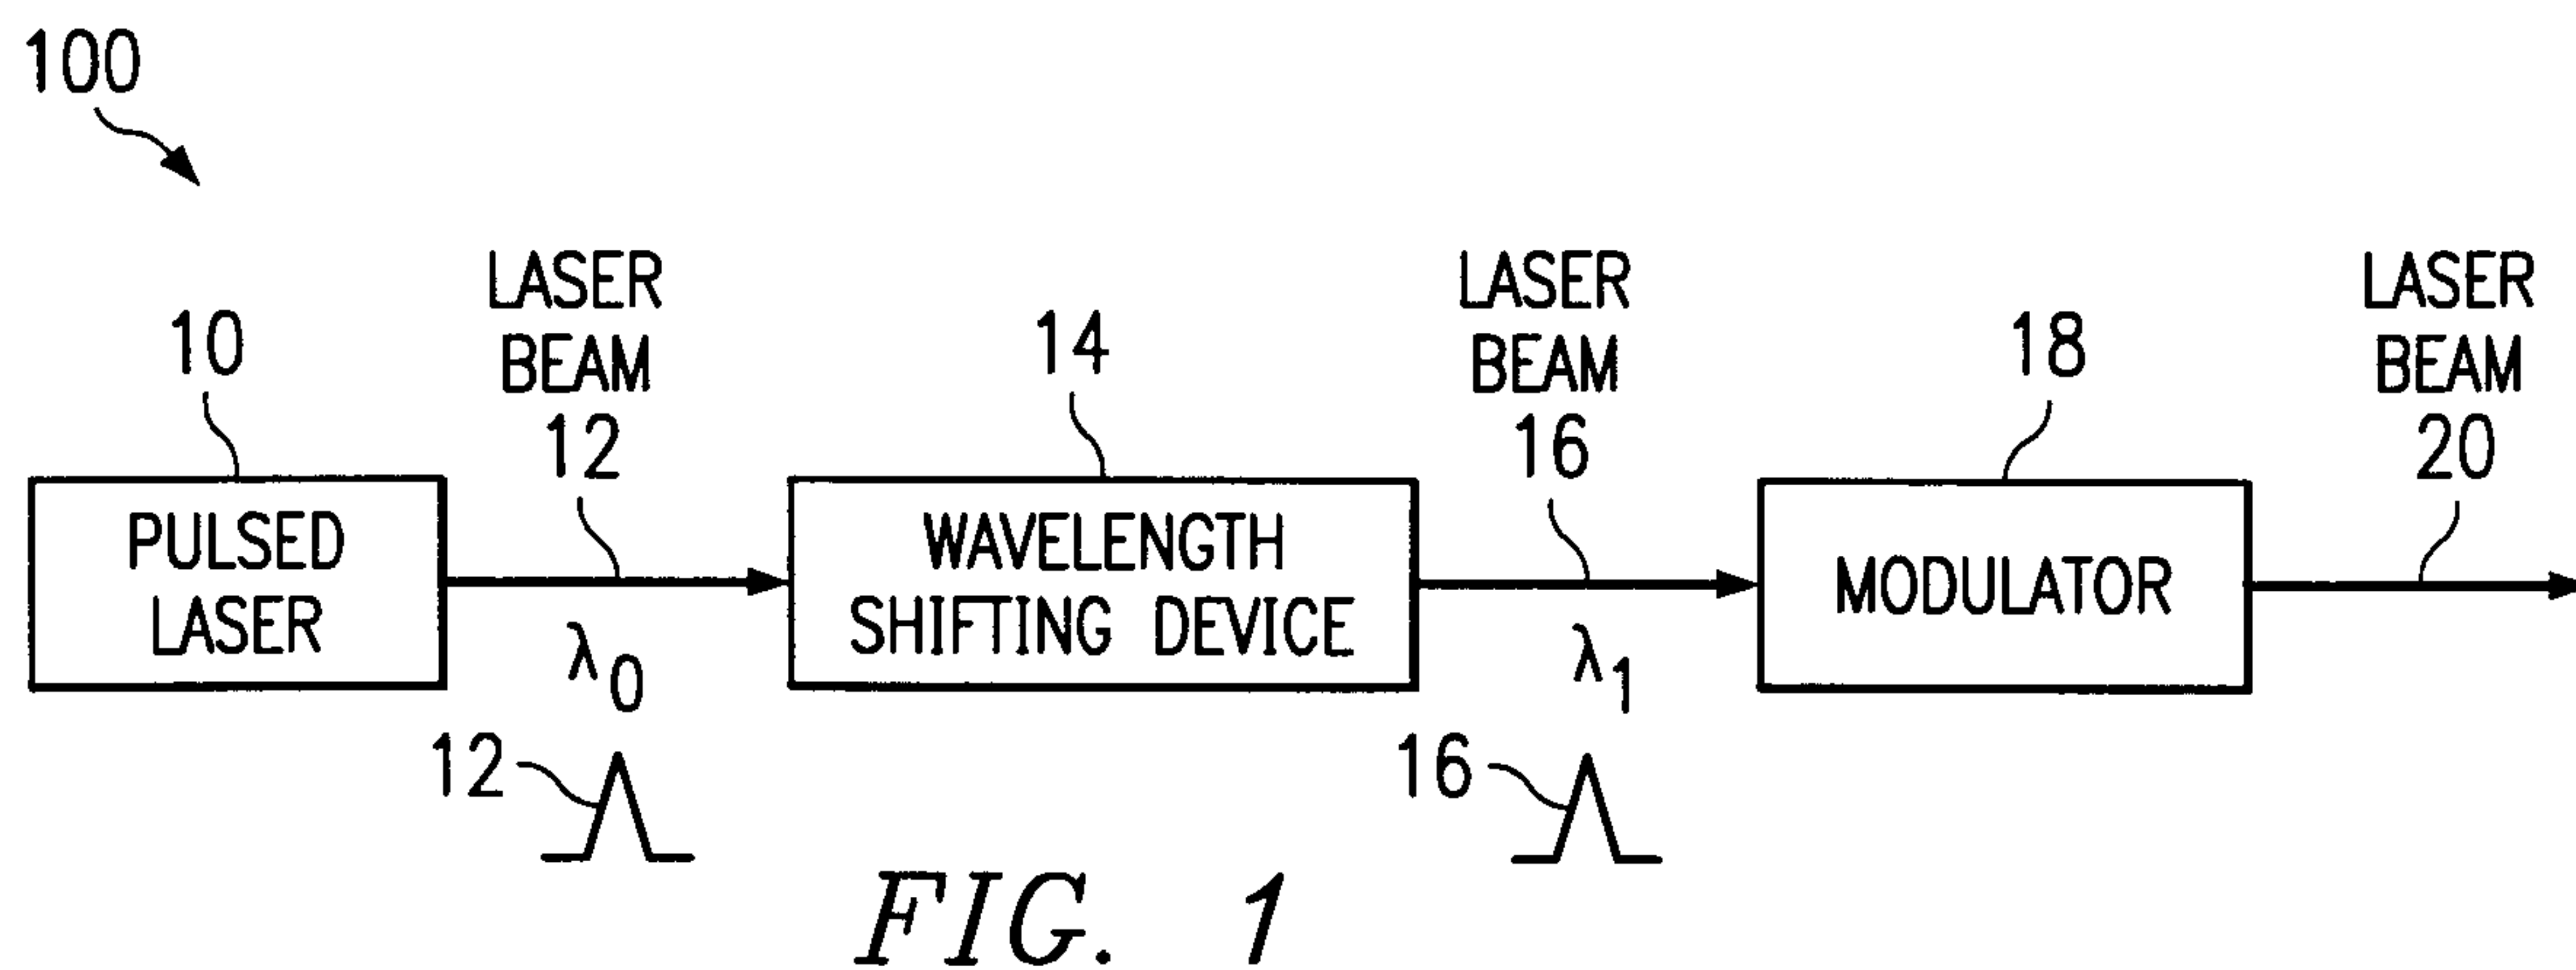

2/3

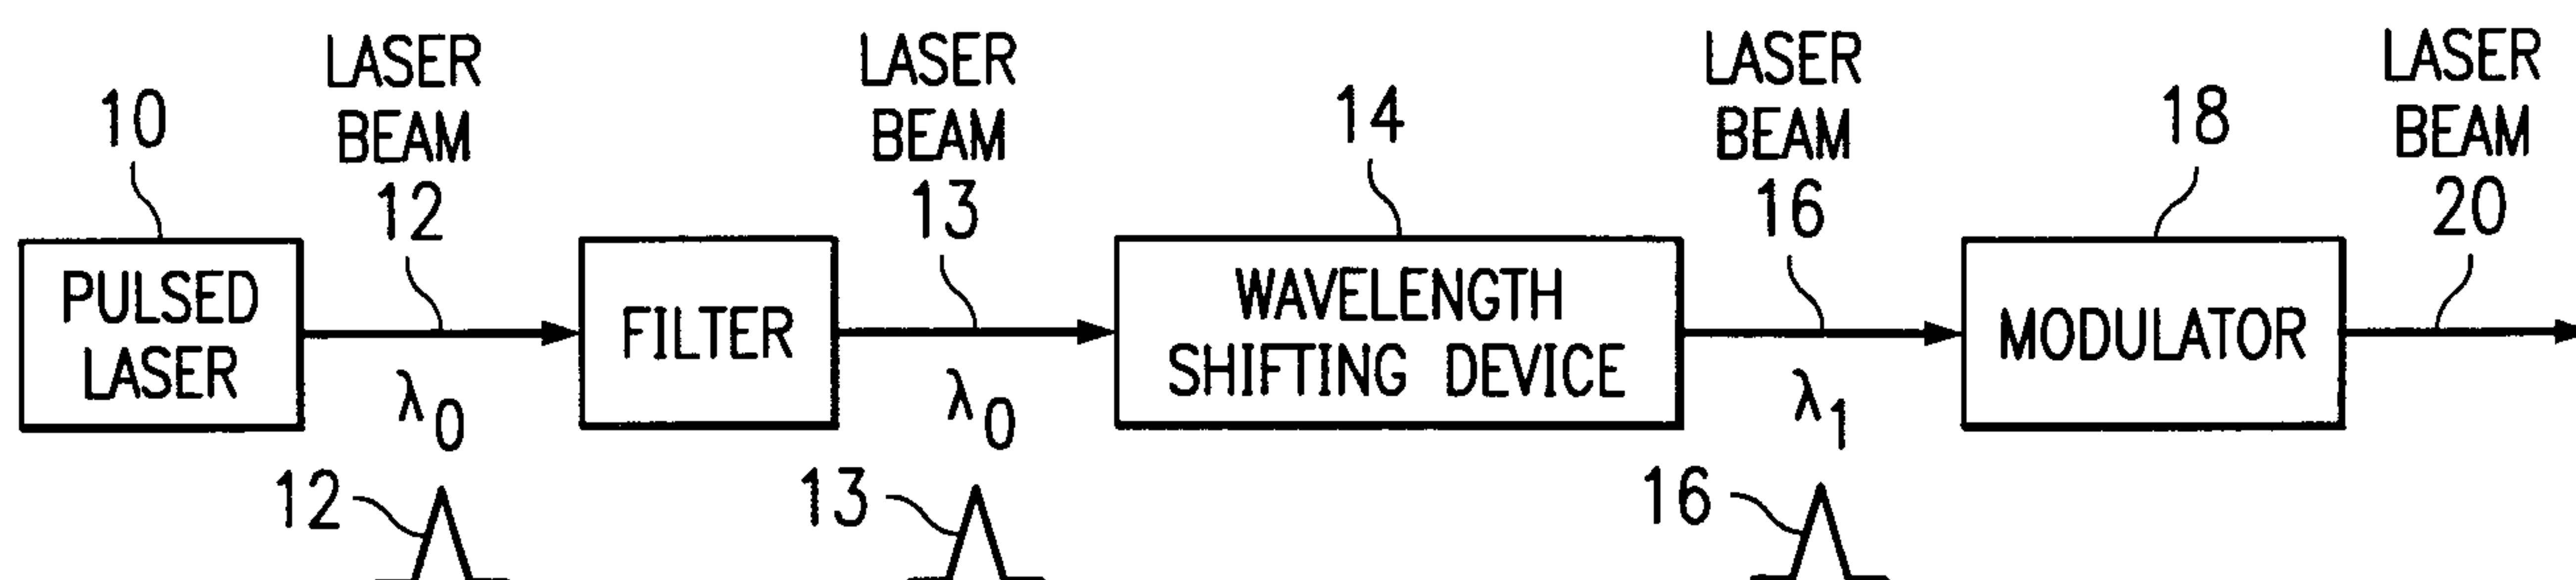


FIG. 4

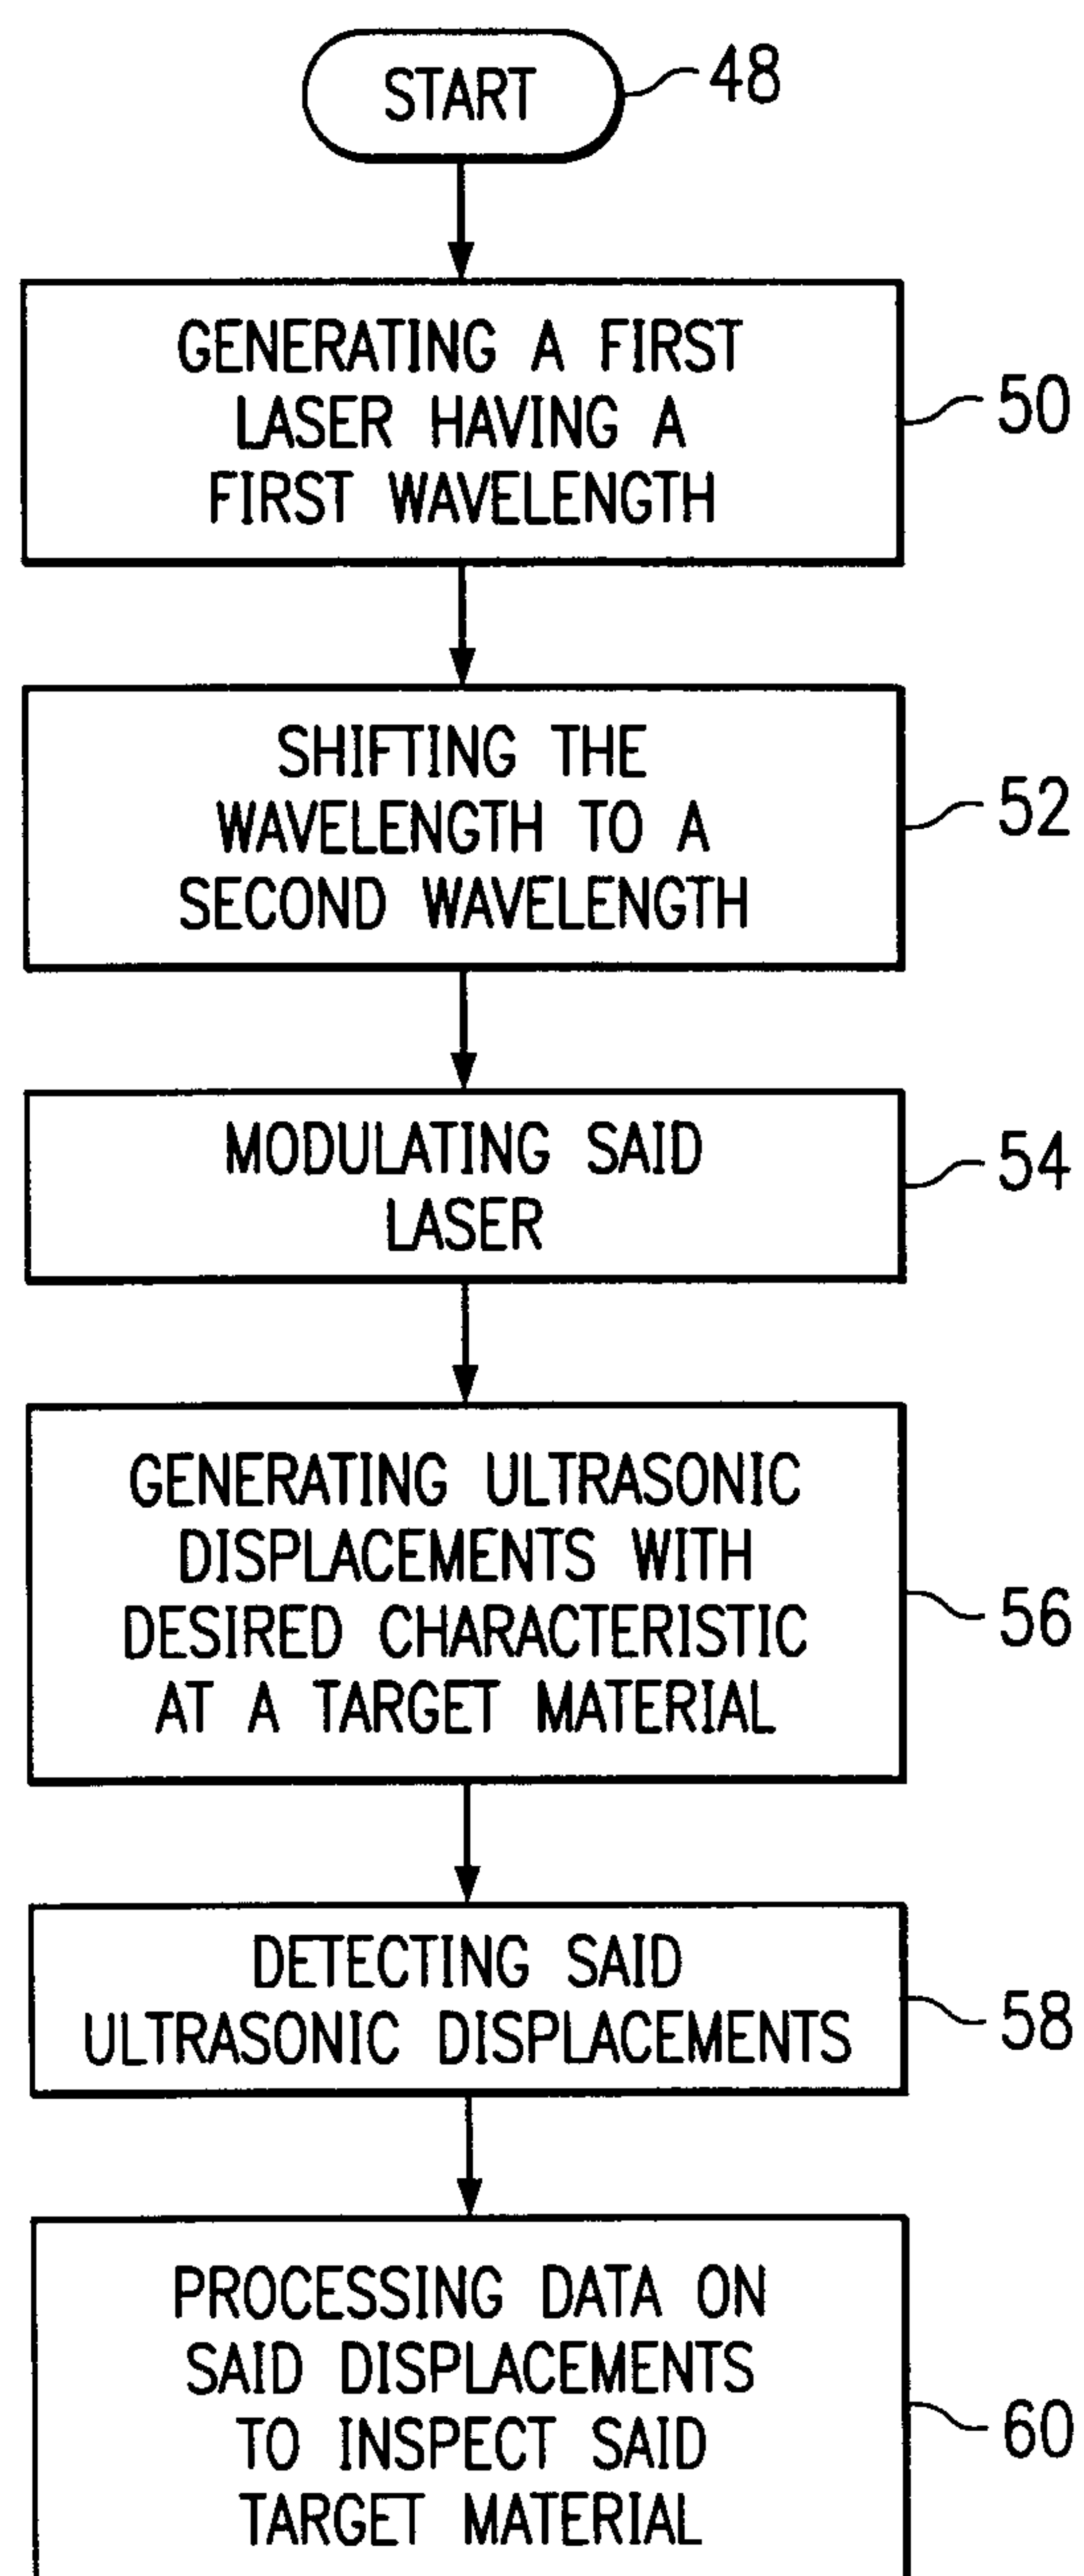


FIG. 5

3/3

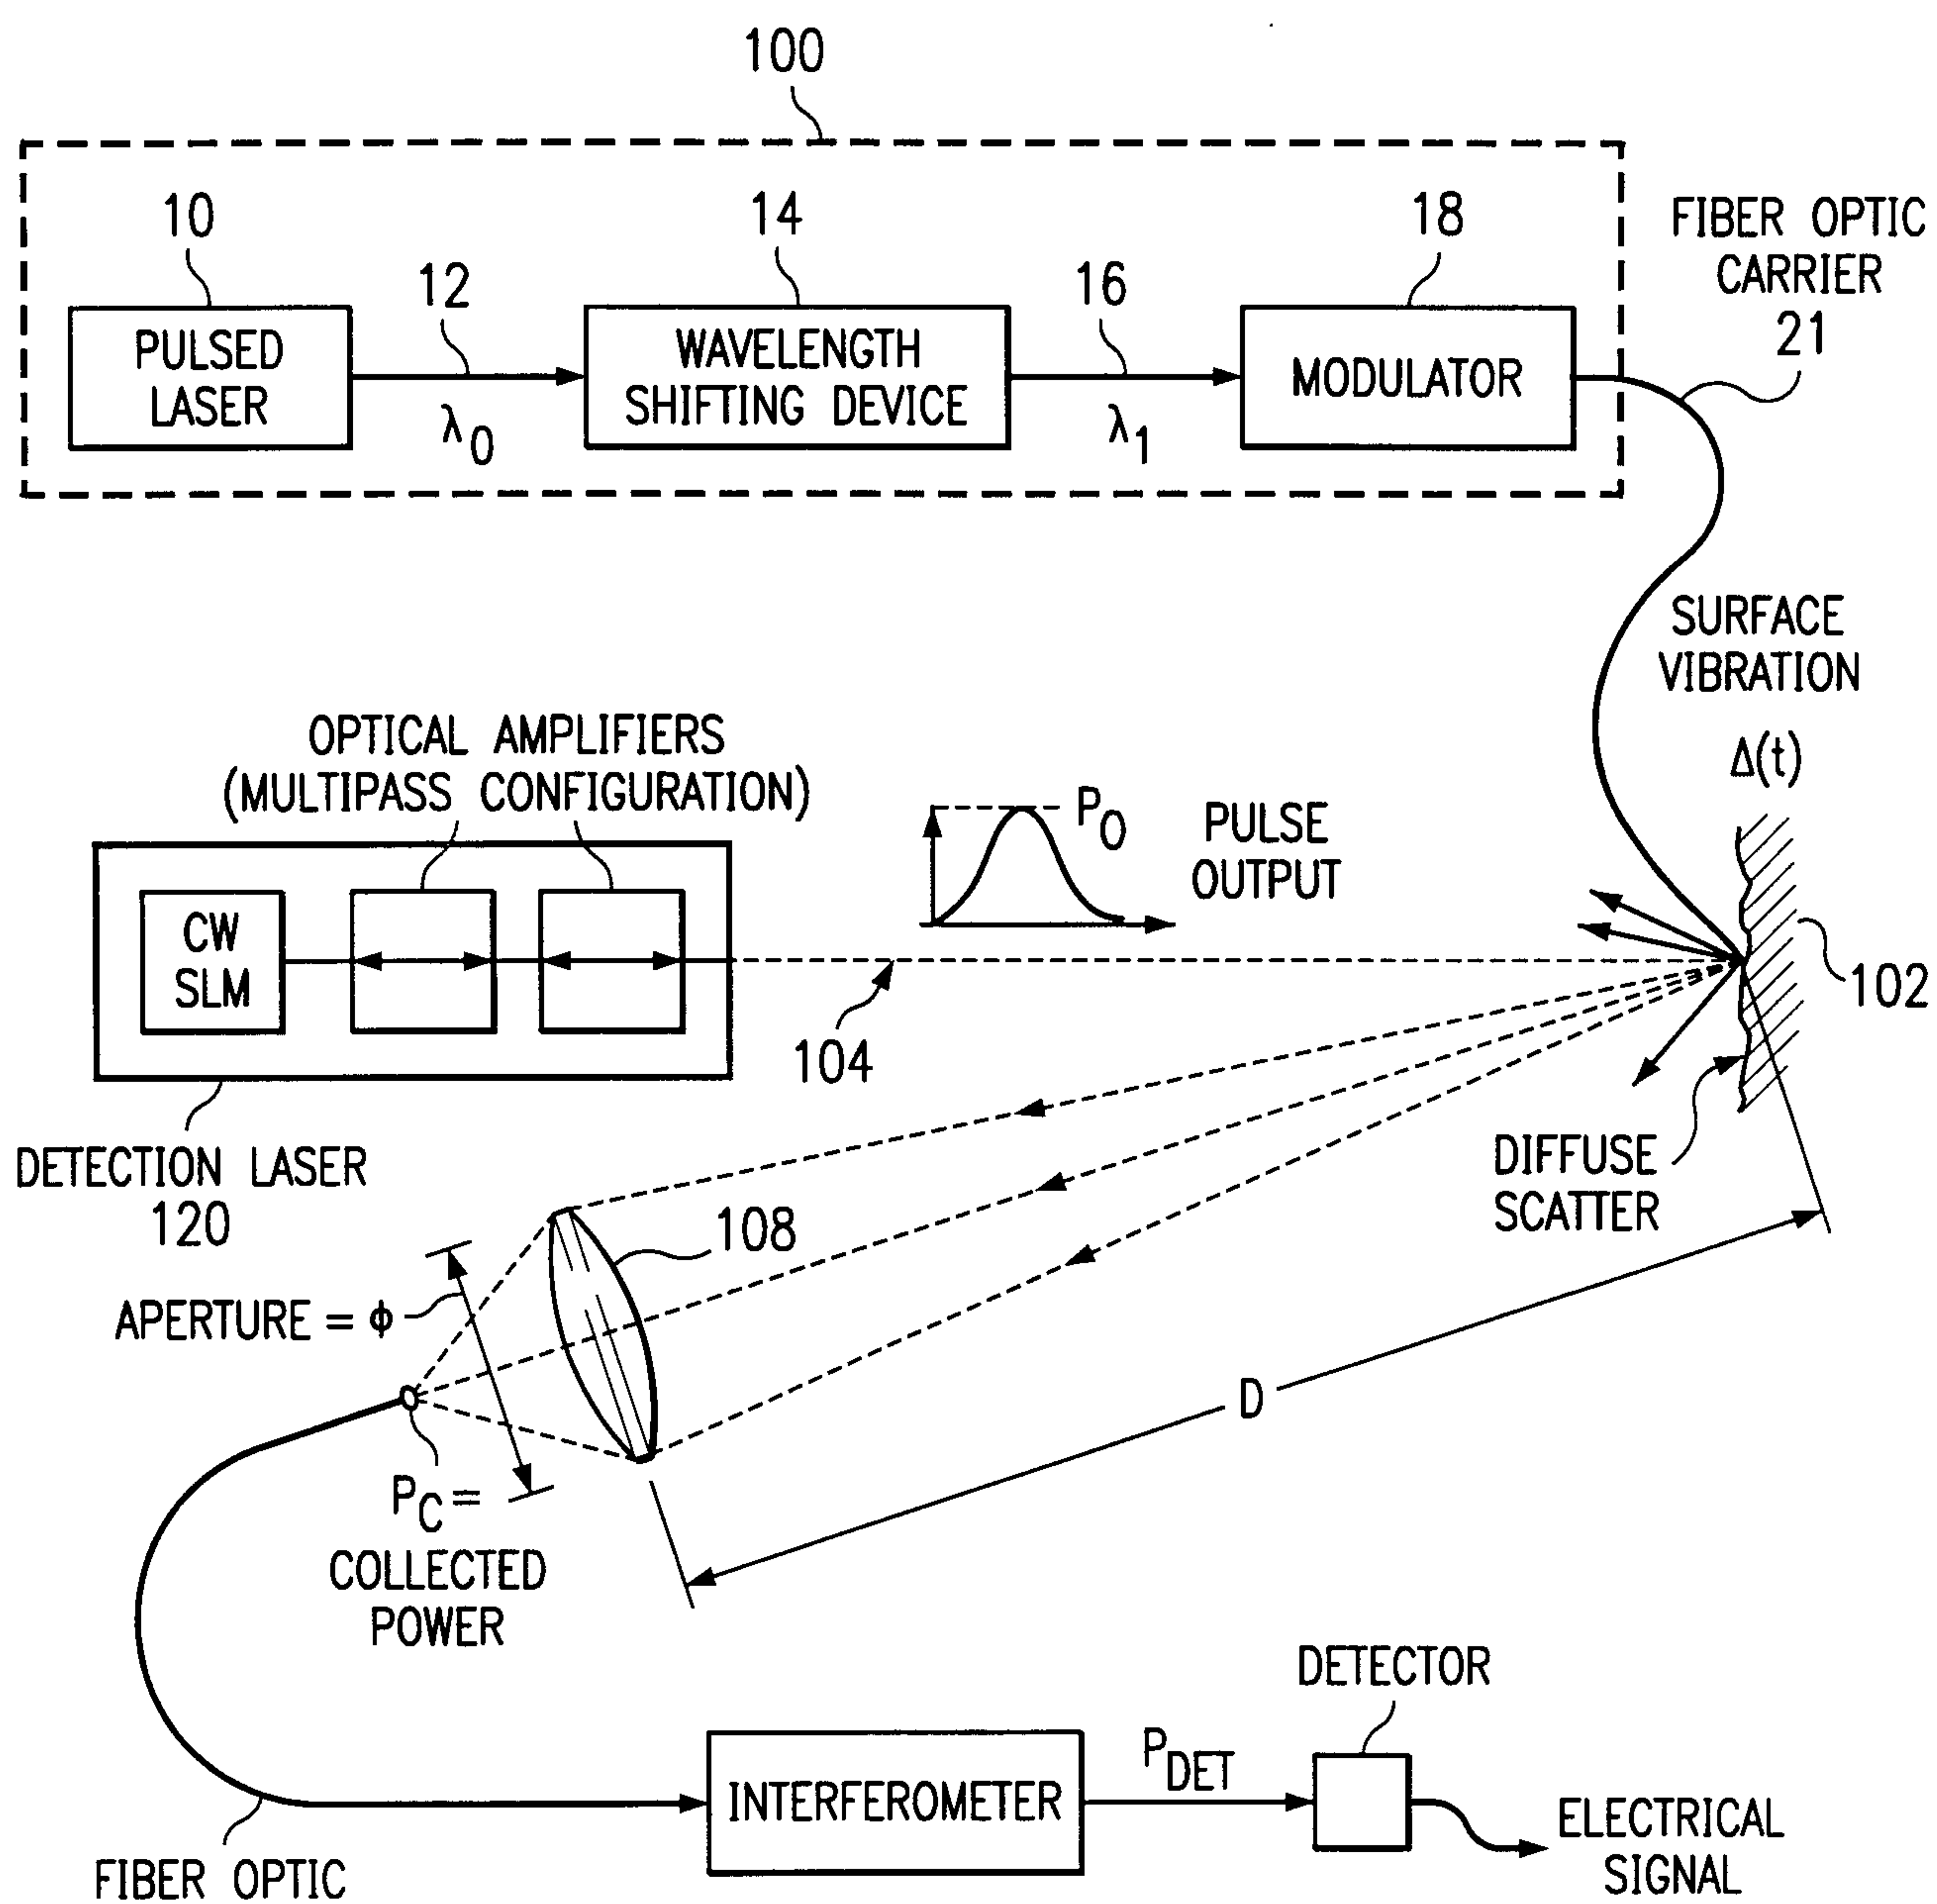


FIG. 6

