



HU000029754T2

(19) **HU****MAGYARORSZÁG****Szellemi Tulajdon Nemzeti Hivatala**(11) Lajstromszám: **E 029 754**(13) **T2**

EURÓPAI SZABADALOM SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 12 780144**(22) A bejelentés napja: **2012. 10. 12.**(51) Int. Cl.: **C09D 5/16** (2006.01)

(96) Az európai bejelentés bejelentési száma:

EP 20120780144

(86) A nemzetközi (PCT) bejelentési szám:

PCT/EP 12/070269

(97) Az európai bejelentés közzétételi adatai:

EP 2766438 A1 **2013. 04. 18.**

(87) A nemzetközi közzétételi szám:

WO 13053895

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2766438 B1 **2016. 04. 20.**

(30) Elsőbbségi adatok:

11184892 **2011. 10. 12.** **EP**

(73) Jogosult(ak):

Ineos Europe AG, 1180 Vaud (CH)

(72) Feltaláló(k):

WALLS, Christopher, Warrington Cheshire WA5 3JL (GB)
BUNNEY, Andrew John, Frodsham Cheshire WA6 8EA (GB)
NEWTON, Maurice Sydney, Sandbach Cheshire CW11 3RN (GB)

(74) Képviselő:

SBGK Szabadalmi Ügyvivői Iroda, Budapest

(54)

Adalékanyag, az azt tartalmazó kompozíció, és annak alkalmazása

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.

(19)



(11)

EP 2 766 438 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

20.04.2016 Bulletin 2016/16

(51) Int Cl.:

C09D 5/16 (2006.01)

(21) Application number: **12780144.7**

(86) International application number:

PCT/EP2012/070269

(22) Date of filing: **12.10.2012**

(87) International publication number:

WO 2013/053895 (18.04.2013 Gazette 2013/16)

(54) **ADDITIVE, COMPOSITION COMPRISING IT AND USE THEREOF**

ZUSATZSTOFF

ADDITIF

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

• **BUNNEY, Andrew John**

Frodsham

Cheshire WA6 8EA (GB)

• **NEWTON, Maurice Sydney**

Sandbach

Cheshire CW11 3RN (GB)

(30) Priority: **12.10.2011 EP 11184892**

(43) Date of publication of application:

20.08.2014 Bulletin 2014/34

(74) Representative: **Hartley, Andrew Philip**

Mathisen & Macara LLP

Communications House

South Street

Staines-upon-Thames, Middx TW18 4PR (GB)

(73) Proprietor: **Ineos Europe AG**

1180 Rolle (Vaud) (CH)

(72) Inventors:

• **WALLS, Christopher**

Warrington

Cheshire WA5 3JL (GB)

(56) References cited:

WO-A1-01/44209 US-A- 3 332 789

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 766 438 B1

Description

[0001] This invention relates to an additive, compositions comprising the additive and uses thereof. More especially the invention relates to antifouling additives for use in processes for polymerisation aqueous suspensions. The invention

has particular application for example in the polymerisation of vinyl chloride optionally in the presence of other monomers. [0002] It is well known to polymerise aqueous suspensions of monomers such as vinyl chloride (hereinafter sometimes referred to as VCM) to produce polymers. A problem with this is that some of the produced polymeric material coats the reactor vessel and internals. This gives rise to several disadvantages including reduction in heat transfer across the reactor walls and wastage of monomer. Furthermore while the polymer is generally firmly bonded to the reactor walls particles may be dislodged affecting the resulting polymer quality.

[0003] It is known to provide antifouling compositions. These materials are applied to the reactor walls and resist formation of a polymer coat on the reactor walls. Examples of these materials include partially hydrolysed polyvinyl acetates (hereinafter sometimes referred to as PVA). A problem with these materials is that generally a recoating is required after each polymerisation batch.

[0004] Attempts have been made to provide antifouling compositions which do not need recoating after every polymerisation batch. Examples of such materials are described for example in GB 1 439 339, EP 0 052 421, JP 54 107 991 and WO 9708210.

[0005] GB 1 439 339 describes an antifouling composition which is obtained by reaction of phenol with formaldehyde. According to JP 54 107 991 this material is not very effective because excessive crosslinking has occurred.

[0006] EP 0 052 421 describes antifouling compositions obtained by the reaction of formaldehyde with "an effective 1-naphthol". As used in EP 0 052 421 effective naphthol is a naphthol which is capable of copolymerising with formaldehyde at the 2 and 4 positions. As such the 2 and 4 positions are unsubstituted and the 3 position is either unsubstituted or not substituted with a strongly electron withdrawing group such as sulfonic acid.

[0007] JP 54 107 991 describes antifouling compositions from early stage phenol/formaldehyde condensation products. According to EP 0 052 421 while better than the antifouling material described in GB 1 439 339 this material produces variable results.

[0008] WO 97 08 210 describes antifouling compositions based on naphthenic molecules substituted with sulfur compounds at at least one position on the aromatic structure.

[0009] A problem with these materials especially when used in combination with PVA is that they are not strongly adherent to the reactor walls. This gives rise to several problems. First excessive material must be applied which is then wasted. Secondly productivity is reduced since material which drains from the reactor walls should be collected and removed. Thirdly material which does not remain on the reactor wall mixes with reactant mixture and can change the properties of the resulting polymer.

[0010] WO 01/44209 A1 discloses an anti-fouling composition, particularly useful for marine anti-fouling, which uses a fluorochemical triazine compound.

[0011] US 3,332,789 discloses a marine antifouling composition consisting essentially of an organic resinous bases vehicle and an antifouling agent comprising a copper pigment.

[0012] The invention therefore seeks to provide improved antifouling compositions for use in polymerisation of polymerisable monomers such as VCM and in particular to make antifoul compositions more adherent to reactor walls. It has surprisingly been found that acrylate polymers such as polyacrylate ester (co)polymers improve the retention properties of antifouling compositions especially those comprising condensation products of 1-naphthol and formaldehyde or a 1-naphthol having a sulfur-containing substituent. It has even more surprisingly been found that contrary to the teaching of many prior disclosures PVA can make antifouling compositions less adherent to reactor walls.

[0013] In addition to the binder a further component is present which may be selected from

i) 1-naphthol formaldehyde condensation products for example as described in EP0052421 and

ii) naphthenic molecules substituted with sulfur for example as described in WO9708210 other antifouling compositions can also be used either alone or in admixture with components i) to (ii).

[0014] Each of those named classes of antifouling material are described in more detail:

i) Naphthol and Formaldehyde Condensation Product

[0015] The condensation reaction between an effective 1-naphthol and formaldehyde is preferably effected in a base-catalysed reaction i.e. by condensing the effective 1-naphthol and formaldehyde in the presence of a base. The condensation may also (although less preferably from a practical viewpoint) be effected in an acid-catalysed reaction i.e. by condensation in the presence of an acid. In both of these cases, the condensation is conveniently conducted in an

aqueous medium (which is alkaline or acid as the case may be). The structure of the condensates is not known but they are not believed to be resols or novolacs as these terms are conventionally applied to phenol/formaldehyde condensates prepared respectively by a base-catalysed reaction or an acid-catalysed reaction. Thus the spectral analysis by infra-red and nuclear magnetic resonance spectroscopy of the condensate prepared from 1-naphthol itself and formaldehyde under aqueous alkaline conditions, while complex and not capable of providing a definitive molecular structure, has indicated that the condensate contains no free methylol groups as would be expected if the product were a conventional early stage resol - although various types of methylene linkages are seen to be present (presumed to be attached to the 2 and 4 naphthalene nuclear positions, since 2 and 4 methylol groups are observed early on in the condensation, although these have disappeared in the final product). Moreover, molecular weight determination by ebulliometry indicates that only relatively small molecules containing up to three or four 1-naphthol-derived units, are present. Additionally, the 1-naphthol and formaldehyde appear to react together in substantially equimolar quantities to form the condensate (see later). Consequently, the absence of methylol groups, the result of the molecular weight determination, and the apparently equimolar reaction leads to the conclusion that the product in this case is probably a mixture of cyclic trimers and tetramers in which 1-naphthol-derived units are linked by bridging methylene groups at the 2 and 4 nuclear positions. Also, the achievement of a very similarly effective product using an acid-catalysed condensation (which is thought to be the same as or very similar to the product from the base-catalysed reaction) additionally points to these build-up suppressant products being quite different in structure to conventional phenol/formaldehyde condensates.

[0016] Alkaline aqueous solutions (where preparable) of these condensates are highly colored, often being deep blue, and it is thought that the deep coloration may be due to the presence of a small amount of a non-harmful (from the viewpoint of build-up suppressant activity) oxidation product.

[0017] The antifoul may be produced by first preparing an alkaline aqueous solution of the effective 1-naphthol/formaldehyde condensate (if soluble in aqueous alkali), which will usually be the direct or diluted solution from the base-catalysed reaction in an aqueous medium to form the condensate (the basic catalyst being e.g. aqueous NaOH, aqueous KOH, or aqueous NH_4OH and the alkaline aqueous solution that is formed from the condensation being separated, if necessary, from any small amount of precipitate that sometimes tends to be produced), optionally containing an added surfactant to promote the surface-covering facility of the condensate, applying this alkaline solution to internal surfaces of the reactor (e.g. by spraying, painting, or flooding) and allowing a coating of the condensate to form. The application of the solution in this way will of itself (i.e. without anything further needing to be done, such as drying or rinsing - although these steps can be employed if desired) cause a tenaciously adherent coating of the condensate to be formed on the reactor surfaces; optionally however the solution applied to the reactor may also contain other useful substances, e.g. an added protective colloid, such as partially hydrolysed polyvinyl acetate, (incorporated e.g. by further diluting the solution with an aqueous solution of the protective colloid) in order to yet further enhance the adhesion of the coating.


[0018] When aqueous NaOH or KOH is used as the basic catalyst for the base-catalysed condensation it is preferable to employ 0.70 to 0.90 moles of NaOH or KOH per mole of an effective 1-naphthol (although other ratios can of course be used).

[0019] Where the condensation has been produced by an acid-catalysed reaction (the acid catalyst being e.g. aqueous HCl) an alkaline aqueous solution can be produced by first isolating the product, and then dissolving it in aqueous alkali such as aqueous NaOH or KOH solution.


[0020] Where it is possible to do so, it is preferable that this antifouling product be applied to the reactor internal surfaces as an alkaline aqueous solution, e.g. dissolved in aqueous alkali such as aqueous NaOH or KOH solution as mentioned above. This is in fact possible for most of these antifouling products which are usually soluble in aqueous alkali. However, where the coating product is insoluble in aqueous alkali, other means may be employed to effect the application of the coating product to the reactor internal surfaces; e.g. the product may be applied as a solution in an organic solvent - although this is not recommended for routine plant-scale operation due to the safety hazards that might be incurred.

[0021] It is to be understood that when the coating product is applied as a solution in aqueous alkali the product may be at least partly in the form of a salt.

[0022] By "an effective 1-naphthol" is meant a 1-naphthol which will condense with formaldehyde to form a coating product having build-up suppressant activity, i.e. a product that can be employed for the provision of an effective build-up suppressant coating. Many 1-naphthols will condense with formaldehyde to yield products having build-up suppressant activity, although it has also been discovered that not all 1-naphthols will yield a product having such activity. In general an effective 1-naphthol is a 1-naphthol in which both of the 2 and 4 nuclear positions are unsubstituted and in which the 3 nuclear position is unsubstituted or has a substituent which is not strongly electron withdrawing. As an example of a strongly electron withdrawing group one may particularly mention $-\text{SO}_2\text{OH}$. The numbering employed herein in respect of naphthalene nuclear positions is that recommended as definitive according to IUPAC rules, viz

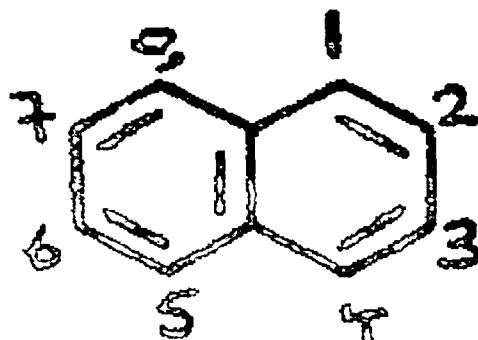

[0023] Preferably, the effective 1-naphthol is selected from those of formula

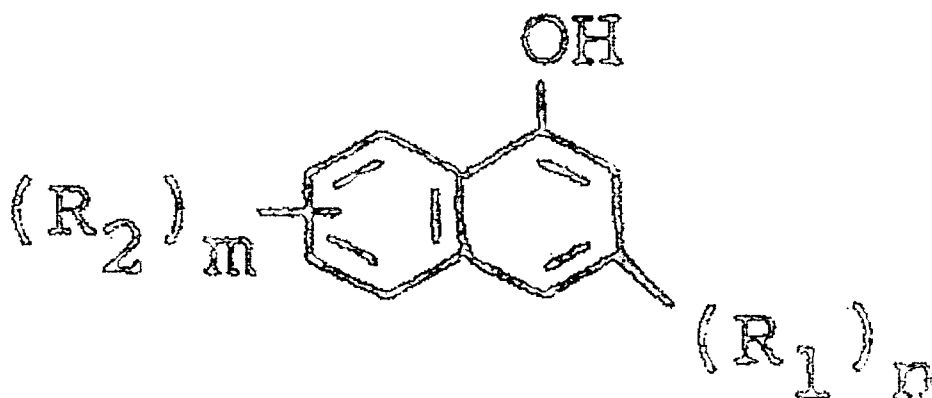

where n is 0 or 1; m is 0, 1, 2 or 3 (preferably 0, 1, or 2); R_1 and R_2 which may be the same or different are selected from halogen (preferably Cl), hydrocarbyl (preferably alkyl of 1-5 carbon atoms), hydroxyl, and hydrocarbyloxy (preferably alkoxy of 1-5 carbon atoms).

[0024] Examples of effective 1-naphthols include 1-naphthol, 1,3-dihydroxy-naphthalene, 1,5-dihydroxy-naphthalene and 1,7-dihydroxy-naphthalene.

[0025] Most of these condensation products (and particularly their alkaline aqueous solutions) may be stored for long periods without any significant deterioration in effectiveness provided precautions are taken to allow only limited access to oxygen; it is believed that an unlimited access to oxygen over a prolonged period allows the gradual build-up of oxidation products, usually manifested by substantial precipitation in the alkaline aqueous solution.

[0026] Of the effective 1-naphthols, 1-naphthol itself is the most preferred on account of its cheapness, ready commercial availability, and effectiveness.

[0027] When condensing the effective 1-naphthol and formaldehyde to form a coating product for use in the invention, it is believed that the effective 1-naphthol and formaldehyde react together in substantially equimolar quantities in order to form the product, with any molar excess of 1-naphthol used remaining unreacted and any molar excess of formaldehyde used reacting further with the product thereby lowering its yield.

[0028] Accordingly, as far as the formation of the condensation product is concerned, the ratio of the quantities of effective 1-naphthol and formaldehyde which are admixed for the condensation is not believed to be particularly critical since an equimolar reaction is considered to occur. However, when a significant excess of one or other reactant is used, the coating product may, for the purposes of some polymerisation recipes, be associated with an undesirable quantity of a contaminant (in that a deleterious effect may be incurred), and it may sometimes (according to the condensation method used to prepare the coating product) be uneconomic or difficult to remove enough of the contaminant to avoid the deleterious effect. Thus, if one departs from the admixture of substantially equimolar quantities of effective 1-naphthol and formaldehyde for the condensation then the vinyl chloride polymerisation itself may sometimes be deleteriously affected particularly if a dialkyl peroxydicarbonate is employed as the polymerisation initiator. Polymerisations which use other initiators, e.g. lauroyl peroxide and azo compounds, are found to be much less sensitive to the 1-naphthol/formaldehyde ratio. Generally speaking in such cases, the admixture for the condensation of an effective 1-naphthol and formaldehyde in a molar ratio range of 1.1/1.0 to 1.0/1.2, particularly 1.05/1.0 to 1.0/1.1, is suitable. The most preferred molar admixture ratio is substantially 1.0/1.0.

Preparation Example 1

[0029] Condensation products of use in the invention were prepared (on various scales) from 1-naphthol and formaldehyde in base-catalysed reaction using the following generalised recipe.

[0030] 1-Naphthol (x mole) and NaOH (between 0.7 x and 0.85 x mole, normally 0.80 x mole) as a 1 molar aqueous solution were charged to a reaction vessel and heated to 70°C. Formaldehyde (y moles, y usually being equal to x) as a 38% w/v aqueous solution was added dropwise with stirring during which the rate of addition was controlled to only allow a temperature rise of from 70°C to 80°C. No external heating was required during the addition (exothermic). When all the formaldehyde solution had been added the contents of the reaction vessel were heated to reflux at 90°C and refluxed for 30 minutes. The resulting alkaline solution of the coating product (blue in color), having an estimated product concentration of about 20% w/v, was used, either neat or diluted, in the invention. Whether neat or diluted, the alkaline solutions typically had a pH of between 11- 13.

Preparation Examples 2 and 3

[0031] Alkaline condensate solutions were prepared using substantially the recipe of Preparation Example 1, but in place of 1-naphthol itself the following substituted 1-naphthols were employed:

Preparation Example 2: 1,3-dihydroxy-naphthalene; scale 0.025 molar; color of condensate solution deep red

Preparation Example 3: 1,7-dihydroxy-naphthalene; scale 0.25 molar; color of condensate solution deep green.

Preparation Example 4

[0032] The same procedure of Preparation Example 1 was followed initially (on a 0.25 molar scale) but in place of 1-naphthol itself there was used 1,5-dihydroxy-naphthalene. After the reflux period a black precipitate had formed. It was insoluble in aqueous NaOH solution but soluble in organic solvents such as acetone.

Preparation Example 5


[0033] A coating product for use in the preparation of a build-up suppressant coating according to the invention was produced using an acid-catalysed reaction as follows. 1-Naphthol (36 g, 0.25 mole) was stirred in 180 ml of 1 molar aqueous HCl solution at 70°C. Formaldehyde (19.75 ml of a 38% w/v aqueous solution, 0.25 mole) was added and the stirred mixture heated to reflux. After a few minutes, a hard red/brown lump was formed. This material was removed, washed clean of acid, dried and crushed to a fine powder. The powder was dissolved in 180 ml of a 1 molar aqueous NaOH solution to give a deep blue alkaline solution, very similar to that from Preparation Example 1, having an estimated product concentration of 20% w/v.

Preparation Example 6

[0034] The procedure of Preparation Example 1 was substantially followed for the preparation of a coating product according to the invention (derived from 1-naphthol and formaldehyde) on a very large scale where $x = 1.11 \times 10^3$ and $y = 1.12 \times 10^3$.

ii) Naphthenic molecules substituted with sulfur

[0035] These materials include a naphthalene skeleton according to the arrangement:

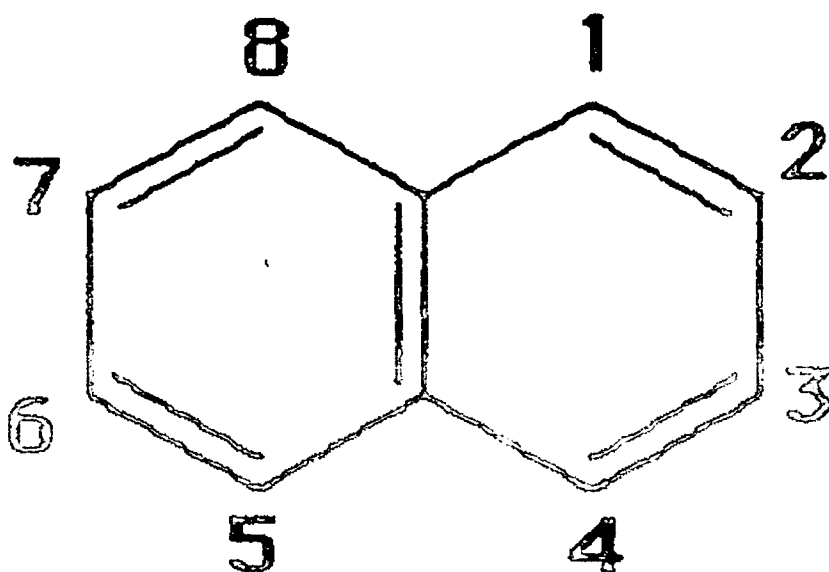

substituted in at least one of positions 1 to 8 with a sulfur containing radical characterized by the fact that it includes at least one atom of sulfur (S) in at least one of these radicals.

[0036] In the antifouling material there is a substantial presence of sulfur and it does not represent an impurity; therefore the sulfur content must be higher than 0.25% in weight, preferably higher than 0.85%, the optimal percentage being 9.3%.

[0037] Advantageously, the sulfur radical can be bound to oxygen (O). Just as advantageously, the radical is characterized by the presence of SO_n where n may be 2 or 3. More preferably the radical is characterized by the presence of the SO_nNa group, where n may be 2 or 3.

[0038] Good activity is obtained by adding to a naphthenic structure, sulfonic and sulfinic radicals which can be in sodium salt form such as $-\text{CH}_2\text{SO}_n\text{Na}$ as a single radical in positions 2, 3 or 4 of the naphthenic structure or in the formulation $-\text{CH}(\text{SO}_n\text{Na})-$ if it binds two of these structures.

[0039] Preferred examples include

5


10

15

20

25

30

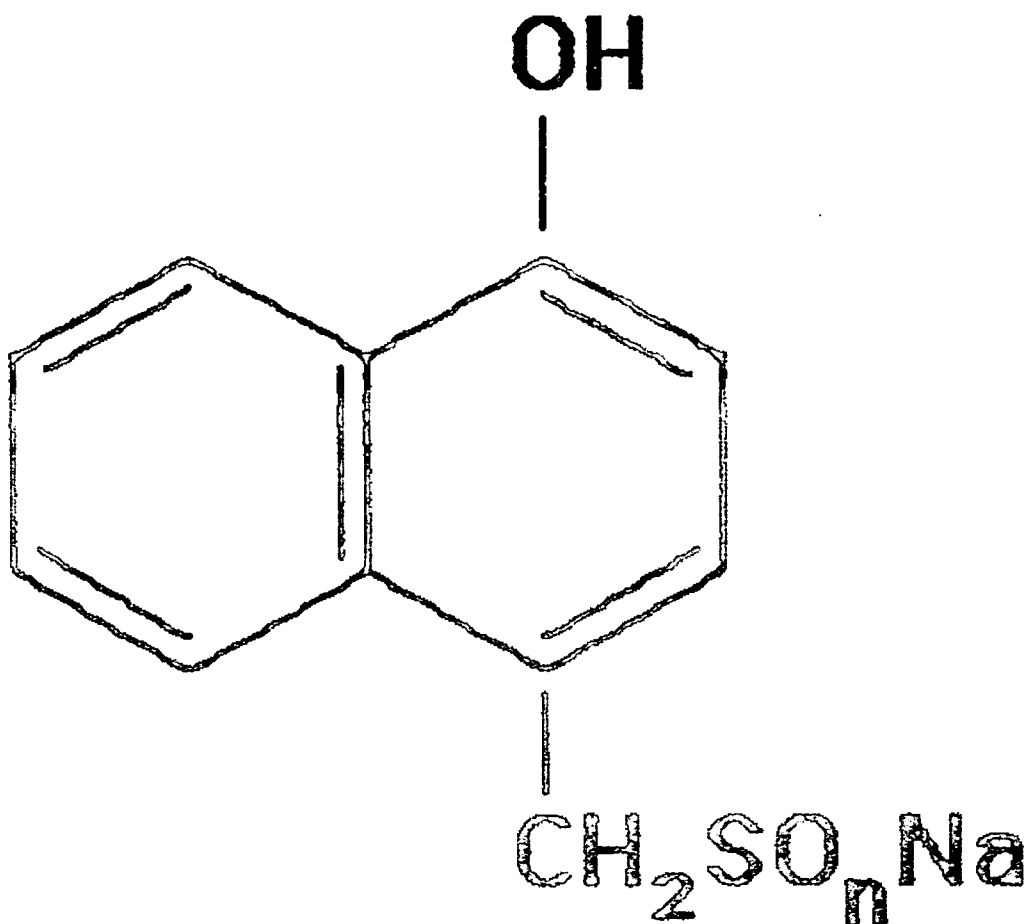


where n can vary from 2 to 3.

35

40


45

50

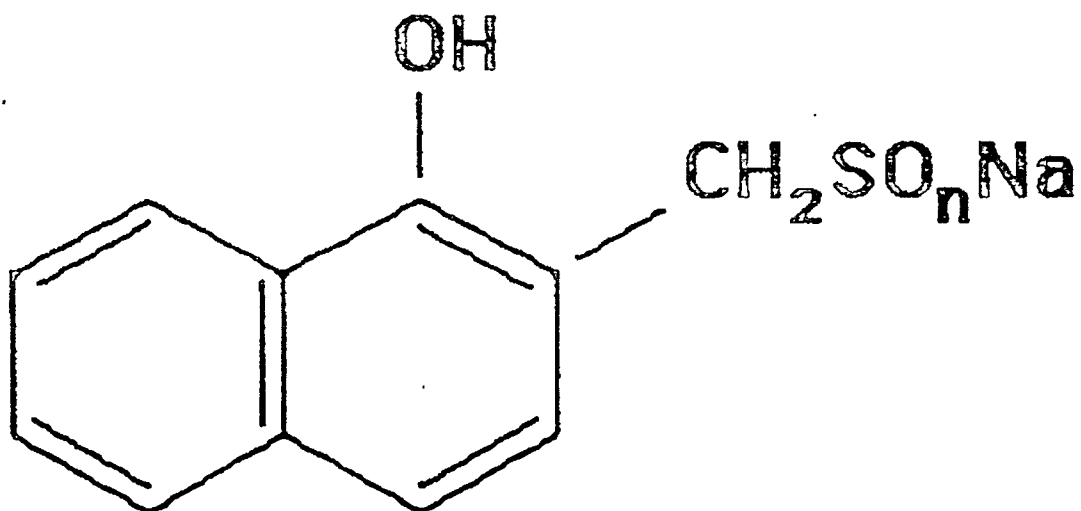

where n can vary from 2 to 3.

55

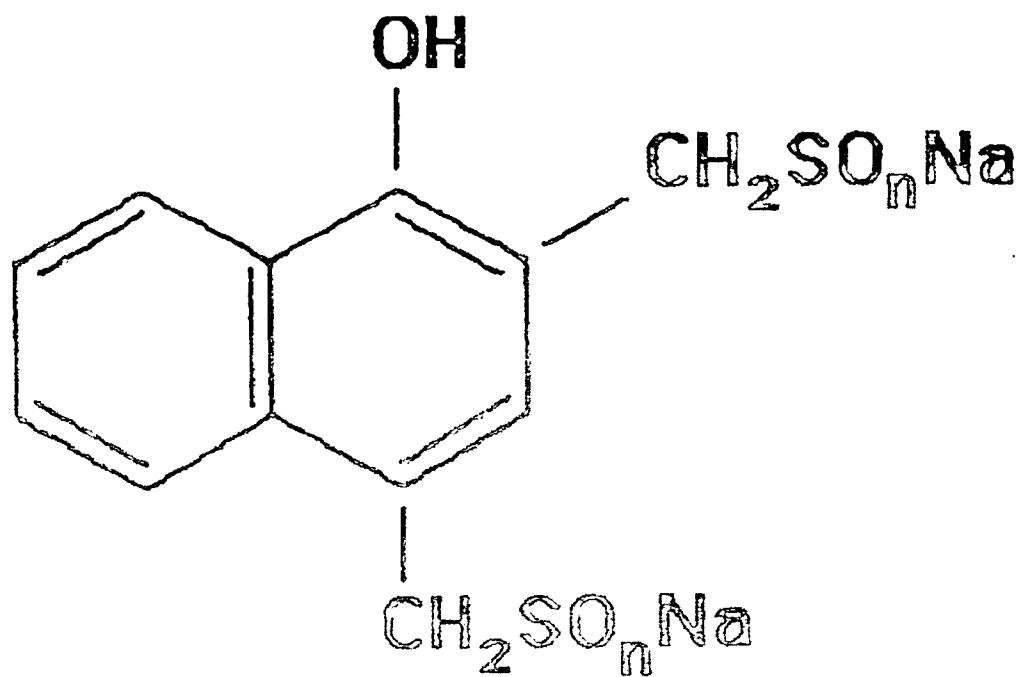

where n can vary from 2 to 3.

5

10

15

20

25

30


35

40


45

50


55

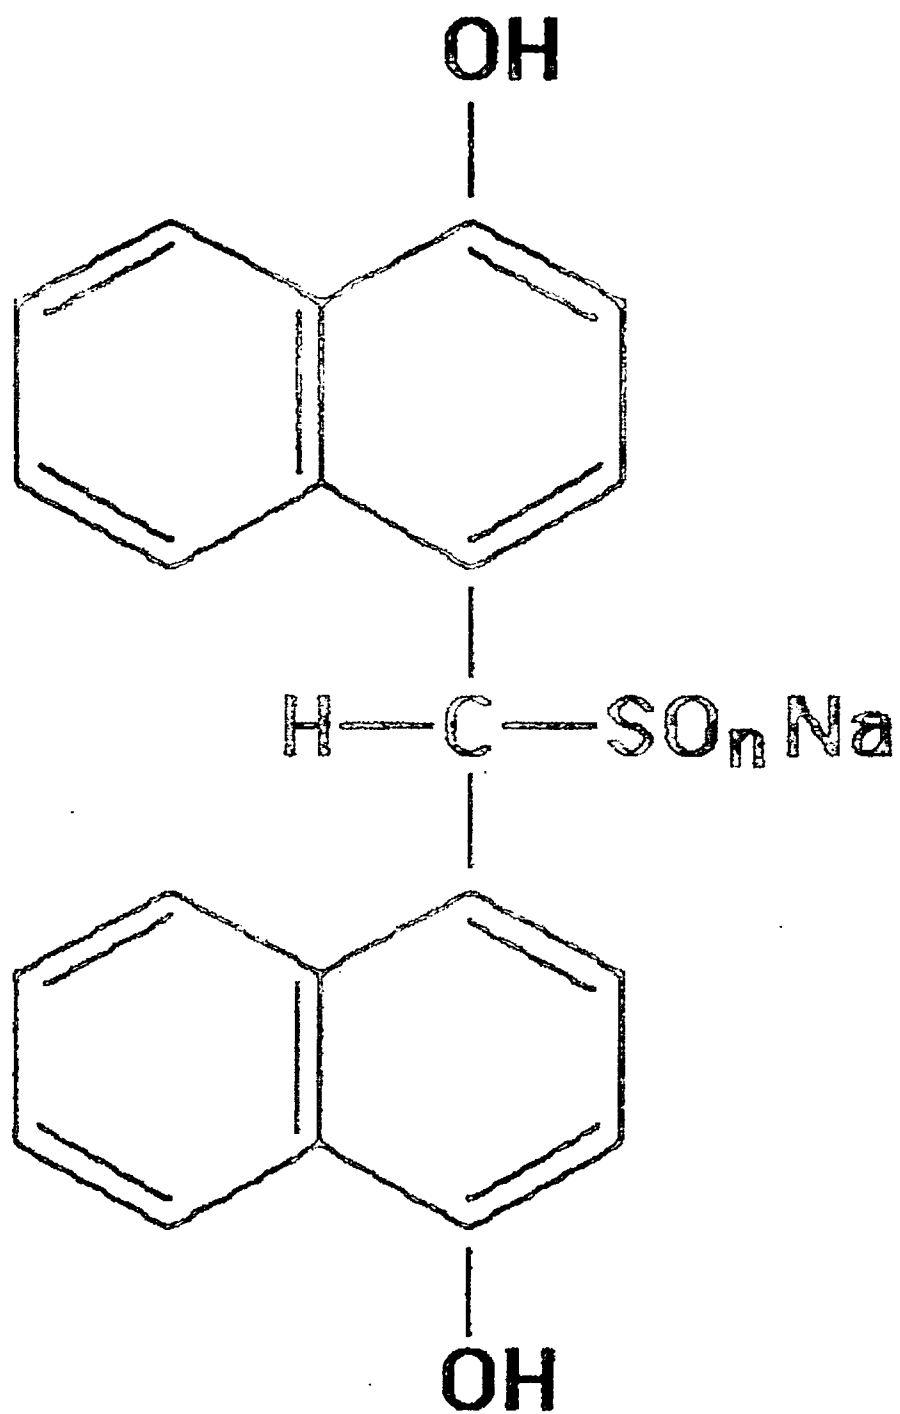

where n can vary from 2 to 3.

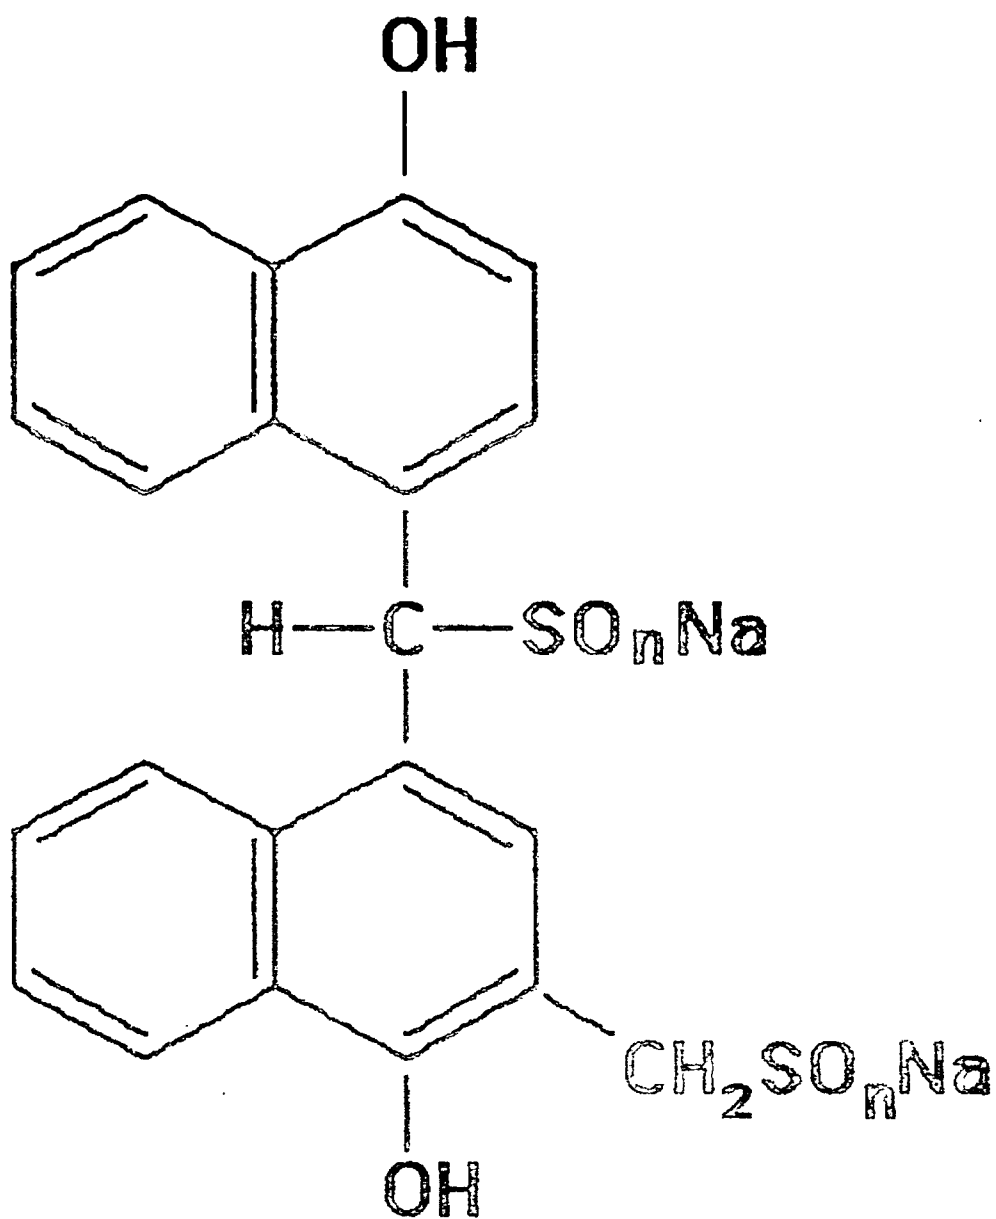

where n can vary from 2 to 3.

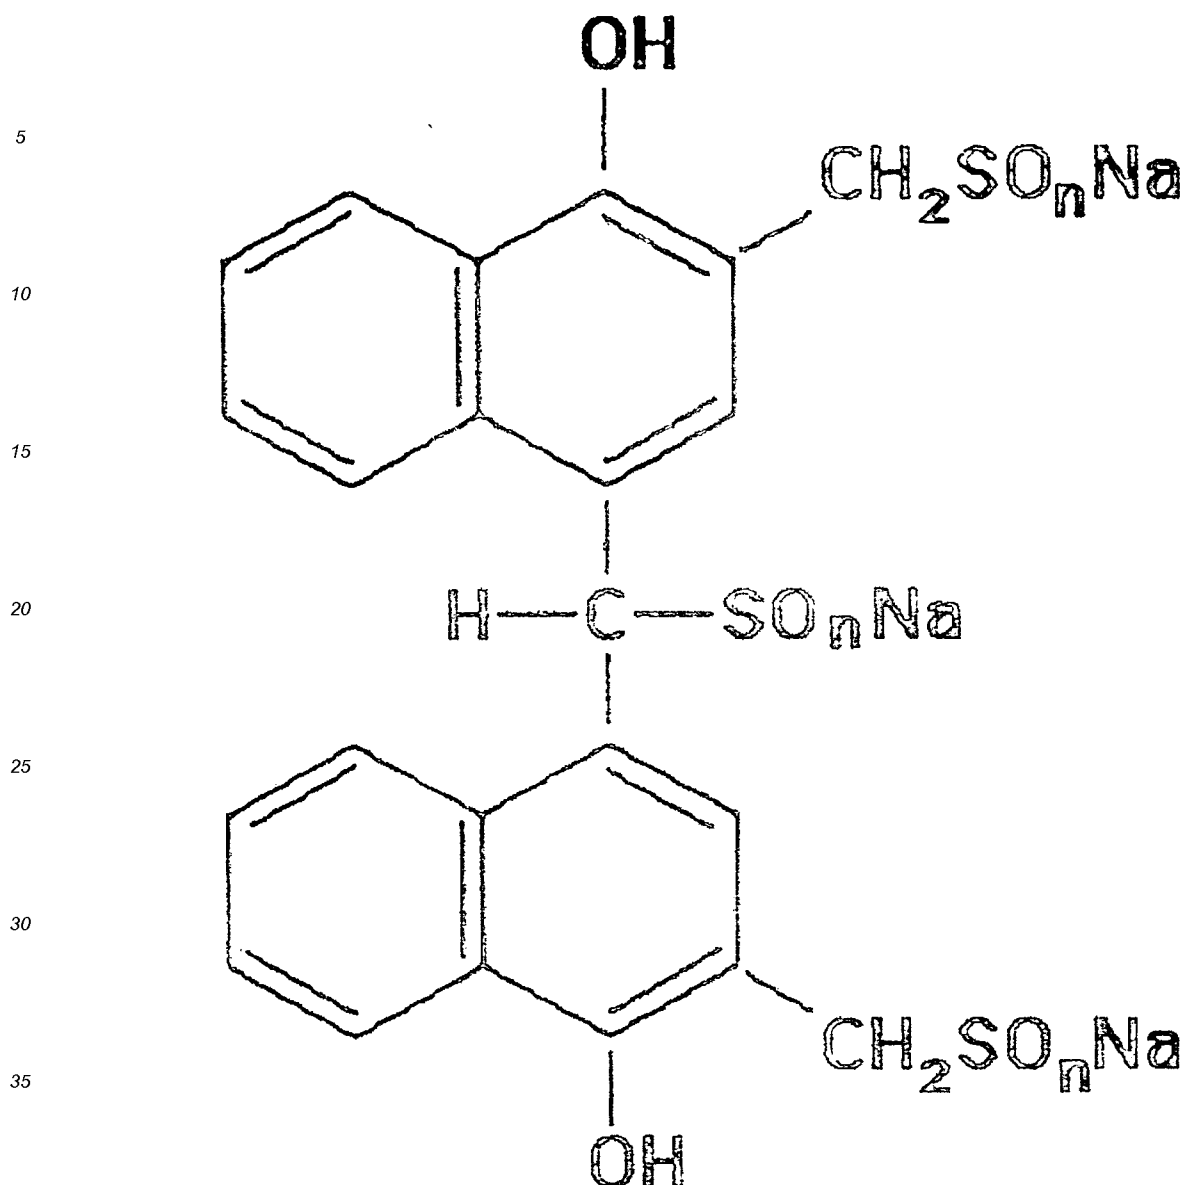

where n can vary from 2 to 3.


Formation of the antifoul product:

[0040] These materials can be obtained by reaction of a product having naphthenic (aromatic) structure, such as for example of the alphanaphthol type, with sodium hydroxymethanesulfinate CAS number 149-44-0 (6035-47-8 as the dihydrate).

[0041] The sodium hydroxymethanesulfinate reacts with alpha-naphthol in the weight ratio of 1 to 1.5, in a 10 to 50% water solution and bringing the solution to a temperature between 40°C and 100°C in nitrogen atmosphere and in an alkaline environment (pH 11-13), forming the new product according to the present invention.

[0042] The solution of the product thus obtained is light and clear but in the presence of oxygen it slightly oxidizes, turning to a bluish color. If the contact with oxygen is interrupted, the product turns back to its original light transparent aspect.

[0043] The reason for the reversible color change may be due to the presence of sulfinic or sulfonic functionality.

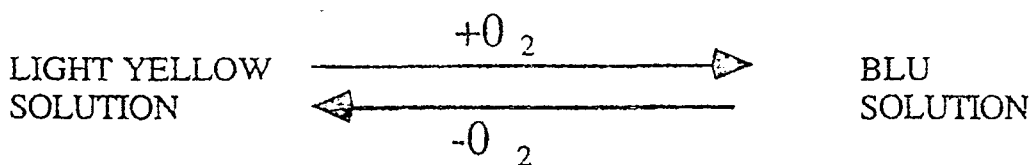

[0044] The product may also be made by replacing the sodium hydroxymethanesulfinate with sodium hydroxymethylsulfonate CAS No.: 870-72-4. Alternatively one can also make formaldehyde react with sodium dithionite CAS No. 7775-14-6 and then react the resulting product with a naphthenic skeleton containing material such as 1-naphthol.

Preparation Example

[0045] In a 8000 litre stainless steel reactor, equipped with an anchor agitator with speed ranging from 20 to 40 rpm is loaded with 1200kg water, 180kg of a 30% NaOH solution, 270kg of 1-naphthol under a rigorous nitrogen flow.

[0046] The temperature is brought to 90°C and over the course of 2 hours 900kg of a 31.5% w/w sodium hydroxymethanesulfinate solution in water is added.

[0047] The solution is kept at 90°C for 12 hours and then 190kg of a 30% NaOH solution in water is added are added resulting in a clear, yellow solution.

The Binder

[0048] The binder is an acrylate polymer. It may be an acrylic acid homopolymer or a copolymer or esters of acrylic acid. Copolymers with styrene such as styrene-acrylic acid ester copolymers are preferred. Examples of styrene-acrylic acid ester copolymers are those of CAS number: 25767-47-9 such as: 2-Propenoic acid, butyl ester, polymer with ethenylbenzene, acrylic acid butyl ester, polymer with styrene (8CI); Benzene, ethenyl-, polymer with butyl 2-propenoate (9CI); Styrene, polymer with butyl acrylate (8CI); 290D; 95J-APR7446; AC 80; ACR 1555; Acronal 230D; Acronal 290D; Acronal 295D; Acronal 296D; Acronal 320D; Acronal 4D; Acronal 725S; Acronal NX 4748X; Acronal NX 4787; Acronal NX 4787X; Acronal PR 8689; Acronal S 305D; Acronal S 430P; Acronal S 559; Acronal S 702; Acronal S 728; Acronal S 760; Acronal S 790; Acronal V 271; AcryGen 4096D; AcryGen 4660; Acrybase ZSR 1005; Akroplen 2; Almatex CPR 100; Axilat DS 910; BB 01; BN 0107; Basoplast PR 8152; Behenyl behenate-butyl acrylate-styrene copolymer; Butyl acrylate-styrene copolymer; Butyl acrylate-styrene polymer; CPR 100; CPR 250; CPR 300; CS 40; CS 40 (low profile additive); Cevian A 46701; Craymul 2423; DL 420; DM 60; Dow Latex DL 420; Elotex BN 0107; Ercusol A 5250; FSR 051; FSR 053; Finndisp A 10; Finndisp A 6000; Fulatex PN 3716G; GD 86B; Hexatec H 658-81; Himer SB 101; Himer SB 305; KD 350; KEY 1000; LL 990; Lenteks A 7; MK 9472; MP 1SM631G; Mowilith DM 60; Nikalite X; PA 805; PSB 2700; PSB 2931; Piccotoner 1221; Piccotoner 1278; Pliolite Ultra 100; Pliotone 2102; Pliotone PTR 7767; Poly(butyl acrylate-styrene); Polyform IV; Primal EP 4030; RCI 2671; RCS 1-33; RP 70; RP 70 (acrylic polymer); Rhodopas DS 910; Rhodopas GS 125; Rhoplex EP 4030; Rhoximat DS 910; Robond 6114; S 559; S 790; SABU; SB 101; SC 001; SC 008; Sokrat 4924; Sokrat LX 75; Styrene-butyl acrylate copolymer; Styrene-butyl acrylate polymer; Styrene-n-butyl acrylate copolymer; Styrene-n-butyl acrylate polymer; TL 3; TL 3 (polymer); TSF 2; TSF 2 (polymer); Texicryl 13-092; Texicryl TD 6213; Ucar 123; Ucar 481; Ucar DL 420G; Uramul SC 70; V 271; Vinnapas LL 512; Vinnapas LL 9400; Vinnapas LL 990; XPA 4165; n-Butyl acrylate-styrene copolymer; n-Butyl acrylate-styrene polymer. A particular suitable polyacrylic ester (co)polymer is ACRONAL 290D which is obtainable from BASF. Other acrylates may include CAS Registry Number: 25686-45-7, 2-Propenoic acid, polymer with butyl 2-propenoate and 2-propenenitrile Acrylic acid, polymer with acrylonitrile and butyl acrylate (8CI); 2-Propenenitrile, polymer with butyl 2-propenoate and 2-propenoic acid (9CI); 2-Propenoic acid, butyl ester, polymer with 2-propenenitrile and 2-propenoic acid (9CI); Acrylic acid butyl ester, polymer with acrylic acid and acrylonitrile (8CI); Acrylonitrile, polymer with acrylic acid and butyl acrylate (8CI); Acronal A 378; Acrylic acid-acrylonitrile-butyl acrylate copolymer; Acrylic acid-acrylonitrile-butyl acrylate polymer; Acrylic acid-butyl acrylate-acrylonitrile copolymer; BNK 206; BNK 246; BNK 306; BNK 406; Butyl acrylate-acrylonitrile-acrylic acid copolymer; Butyl acrylate-acrylonitrile-acrylic acid polymer; HTR 280DR; JSR-PAR 1H; Rikabond ET-L 924-1. Another particular suitable acrylate is Acronal A378. Other copolymers that may be suitable are acrylic acid hydroxypropyl, acrylic acid hydroxyethylester, acrylate copolymers of CAS number 25133-97-5, acrylates/hydroxyesters acrylates copolymers, acrylates/VA copolymers of CAS 25067-02-1. Mixtures of these materials may also be used. The polyacrylic ester (co)polymer is preferably a water-based acrylic dispersion and film forming (co)polymer.

[0049] Typically the weight ratio of condensation product or sulfur substituted 1-naphthol; to binder such as polyacrylate ester (co)polymer is in the range of 3:1 to 30:1 for example 5:1 to 15:1 such as about 10:1.

[0050] Conveniently the composition of the invention can be prepared by blending a mixture of the antifouling composition in water with the binder eg polyacrylate composition in water to give a composition of the invention. Preferably

the composition of the invention has a pH in the range 9 to 14 preferably 10 to 14, viscosity in the range of 1-10 mPas preferably 1 to 5 and dry solid content is in the range of 1-20 wt% preferably 1 to 10.

[0051] Viscosity is measured by the following protocol:

1. Equipment

[0052]

1.1 Haake Viscometer model 7L Plus equipped with a complete spindles set.

1.2 Haake Low viscosity adapter spindle set

1.3 Thermostatic bath capable of being controlled at $23^{\circ}\text{C} \pm 1$.

1.4 Thermometer, precision 1°C .

1.5 Stopwatch.

1.6 Common laboratory glassware.

2. Procedure

[0053]

2.1 Switch on the viscometer and let it to auto zero following the displayed instruction.

2.2 Select the following conditions using the instrument control display:

- Spindle: n° LCP
- rotor speed: rpm 60
- measure mode mPa.s

2.3 In a measuring cylinder, pour 20 ml of sample. Pour this sample into the low viscosity tube adapter. Place the tube into the collar / bath. Allow the sample to reach the temperature of $23^{\circ}\text{C} (\pm 1)$.

2.4 Place the spindle into the sample (be careful to eliminate all the air bubbles) and connect it to the viscometer. Take care when connecting the spindle.

2.5 Check that the spindle is immersed to the correct depth and that the viscometer levelling bubbles is centred: adjust if necessary.

2.6 Start the viscometer motor and the stopwatch at the same time. Wait 20 seconds and then read the viscosity value and the torque directly from the instrument display.

3. Results.

[0054] The Haake viscosity value is expressed in mPa.s. The value is directly available from the instrument display.

4. Accuracy of the determination.

$\pm 10\%$

[0055] Dry solid content is measured using the following protocol:

1. Equipment.

[0056]

1.1 Air circulation oven.

1.2 Analytical balance (accuracy: 1 mg).

1.3 Common laboratory glassware.

2. Procedure

[0057] Each determination must be done twice.

2.1 Weigh a cleaned, flat glass container (10 cm diameter ca.) and note down the weight (P1).

2.2 Weigh 1 to 2 g. of sample into the container; note down the weight (P2).

2.3 Put the container into the oven at 150°C. Let the solvent evaporate for 30 minutes.

2.4 Take out the container from the oven and let it to cool down into a dessicator for at 15 minutes.

2.5 Weigh the container with the solid matter (P3).

3. Results.

[0058] The result is expressed as % of solid content:

$$(P3 - P1)/(P2 - P1) \times 100\% \text{ solids}$$

where (P3 - P1) = dry matter amount in g.

(P2 - P1) = sample amount in g.

4. Accuracy of the determination.

± 1 % (Relative)

[0059] Where the composition of the invention has properties within these ranges storage stability, handling and ease of application such as to enable spraying the anti-fouling agent to the reactor wall are especially good.

[0060] Other materials can be present. For example one or more of antioxidants, chelating agents, antifoaming agents, surface tension reducing agents, stabilisers and pH regulators. They are discussed in more detail hereinafter. It will be appreciated that one may select none, one or more than one material from each group in any compatible combination.

[0061] The antifouling composition can be susceptible to oxidation. Oxidation can impart undesirable color to the resulting product. In order to reduce oxidation the composition of the invention can be prepared and stored under low concentrations of molecular oxygen. For example the composition can be prepared and stored under nitrogen. Oxidation can also be reduced by addition of an antioxidant. Preferably, the amount of antioxidant is selected such as that the final color of the product does not change when exposed to air for at least 30 minutes. Antioxidant is not however essential. In the absence of antioxidant the composition of the invention tends to be a blue milky emulsion and in the presence of antioxidant tends to be a green milky emulsion. While the composition can be used in the absence of antioxidant it may be preferred to use antioxidant as this may further reduce the occurrence of dark colored coating material present in the white PVC polymer when the coating is peeled off the reactor. The improved binding of the antifouling agent to the reactor wall, when used with the polyacrylic binder, also reduces the occurrence of anti-fouling coating peeling off the reactor wall and contaminating the white PVC polymer with any colored material thereby reducing the need for use of antioxidant.

[0062] In some embodiments of the invention chelating agents such as EDTA may be present and these too may serve to enhance color stability.

[0063] In some embodiments of the invention antifoaming agents are present. Those skilled in the art will have no difficulty in selecting suitable antifoaming agents. An example of a suitable antifoaming agent is ethanol. Those skilled will have no difficulty in selecting other suitable antifoaming agents

[0064] In some embodiments of the invention stabilisers may be present. In addition to materials stabilising the composition against oxidation and color change other stabilisers can be present. By way of non-limiting example they can include storage stabilisers effective to reduce sedimentation or phase separation or freeze-thaw stabilisers. Examples of stabilisers include xanthan gums, nansa (ie alkylbenzenesulfonic acids and salts), alcohols such as methanol and isopropanol, and partially hydrolysed polyvinyl acetate "PVA". Formulations prepared with Styrene, polymer with butyl acrylate such as Acronal 290D were found to provide especially good storage stable formulations in conjunction with the antifouling materials.

[0065] This composition can be in one pack form where all the ingredients are mixed together or in multipack form for example two pack form where the binder is in a first pack and the other ingredients are in a second pack. Two-pack form is especially useful for compositions with limited storage stability.

[0066] While PVA which term embraces polyvinyl acetate and partially hydrolysed polyvinyl acetate has been used as an antifouling agent and can be used in the composition of the invention it is not especially preferred since it has surprisingly been found to often reduce adherence to the reactor walls. In addition, preparation of a PVA solution requires heating water to dissolve the PVA solid and increases the manufacturing time and cost whereas the preferred polyacrylate (co)polymer can be used "as is". Where PVA is present it will typically comprise less than 10wt% of the composition, such as less than 5wt%, for example less than 2wt% such as less than 1wt% such as less than about 0.5wt% PVA, for

example 0.4wt% such as 0.3wt% or 0.2wt% or less. In some embodiments the antifouling composition is substantially free of PVA. It is however to be clearly understood that low or no PVA content is preferred only in the antifouling composition. Polymerisation of VCM is generally undertaken in the presence of PVA as both a primary and secondary suspending agent but polymerisation takes place. As explained hereinafter after application of the composition of the invention to surfaces takes place before polymerisation is undertaken and before the VCM and attendant PVA is introduced into the reactor.

[0067] In accordance with the invention there is provided a composition according to claim 1.

[0068] This composition can be in one pack form where all the ingredients are mixed together or in multipack form for example two pack form where the acrylate polymer is in a first pack and other ingredients selected from b)(i) and b)(ii) are in a second pack.

[0069] Those skilled will have little difficulty in devising methods of producing the composition of the invention. For example, in accordance with the invention, there is provided a method according to claim 9.

[0070] In preferred embodiments an antioxidant is added to the solution before addition of the polyacrylate ester (co)polymer. Other components such as anti-foaming agents can be added before or after the polyacrylate ester (co)polymer.

[0071] Generally the polyacrylate ester (co)polymer will comprise 0.5-10wt% of the antifouling composition.

[0072] The composition of the invention is applied to reactor surfaces prior to a polymerisation reaction. The precise manner of application is not of the essence of the invention and could for example be by spraying, painting or flooding. In some embodiments of the invention application is undertaken in the presence of steam. In some embodiments of the invention the composition of the invention is subjected to a drying step but neither steam nor drying are essential. The amount of the coating product to be employed is not too critical, although the coating should not be too heavy (to avoid any possibility of tainting the polymer) nor so light that effective build-up suppression is not achieved; obviously such limits will vary considerably according to various factors (e.g. the tendency of the polymerisation recipe to incur build-up formation to a lesser or greater extent-particularly in terms of the initiator employed, and the quality of the reactor surfaces). Generally speaking, it is normal to apply a volume of coating product (e.g. by spraying, painting or flooding-usually by spraying in large-scale operations) of appropriate concentration which volume is sufficient to evenly coat the reactor internal surfaces; this will of course vary according to the size of the reactor. It has been found convenient to apply a dispersion of low to moderate concentration to the reactor surfaces and to apply as little as possible concomitant with achieving acceptable surface coverage and an effective coating weight appropriate to the reactor/polymerisation recipe being employed; the efficiency of the application equipment (usually a spraying apparatus) will of course determine to some extent the minimum amount of dispersion that can be employed. (Also it is to be appreciated that the amount of coating product actually applied may be greater than that finally remaining on the reactor surfaces due to losses incurred through e.g. draining.)

[0073] In other embodiments of the invention the components are kept separate. In a first step a solution or suspension of the polyacrylate ester copolymer is applied to the reactor walls for example as hereinbefore described. This material is allowed to drain or dry. Subsequently a conventional antifouling composition for example as described in WO97 08 210 or EP 0 052 421 can be applied for example as hereinbefore described and allowed to drain or dry.

[0074] The composition of the invention produces a tenaciously adherent antifouling coating on treated surfaces. In many cases the coating will retain its antifouling properties through several such as 3 or more, 4 or more or 5 or more or 6 or more such as 10 VCM polymerisation processes.

[0075] The composition of the invention may also be used for other functionalities such as an anti-corrosion agent or as a fire-retardant. Typically, older reactors may suffer from a combination of polymer fouling and corrosion. The composition of the invention preferably comprises the combination of the condensate, an antioxidant, metal-chelating agent and the acrylate. While we do not wish to be bound by this theory the condensate is believed to limit the rate of corrosion by scavenging highly oxidative radicals, the antioxidant can lower the oxidation state of redox active metal centres, the metal-chelating agent binds to the metals and making these less redox-active and the acrylate will facilitate the formation of a protective film. Furthermore, the components have different chemical properties such as pH dependency (pKa) and water solubility but we have found surprisingly that by carefully controlling the pH, the order of addition and lowering the amount of PVA (during preparation of the antifouling agent) it is possible to form a stable solution.

[0076] The composition of the invention is preferably used for preventing corrosion or fouling in polymerisation reactions but may also be used for a wide range of other applications; for example, coatings to protect underwater surfaces of ships.

[0077] The process for the polymerisation can be any manufacturing process for the polymerisation of a vinylic monomer. Suitable processes may include processes for the manufacture of polychloroprene, suspension polystyrene and acrylonitrile-butadiene-styrene (ABS), high impact polystyrene, expanded polystyrene (EPS), styrene-acrylonitrile copolymers, methylmethacrylate-butadiene-styrene, nitrile-butadiene rubber, polystyrene, polybutadiene, polyacrylonitrile, poly-methylmethacrylate, vinyl acetate ie "VAM" copolymers, and vinyl acetate / vinyl chloride copolymers. Processes for the manufacture of polychloroprene, suspension polystyrene, and acrylonitrile-butadiene-styrene (ABS) are preferred.

[0078] Suitable polymerisation reaction conditions are preferably those processes wherein the reaction temperature

is from 40 to 200 °C. Temperatures from 40 to 100 °C are more preferred.

[0079] Suitable processes are batch or continuous processes. Batch processes are preferred.

[0080] The polymerisation pH range may be from pH 2 to 14. Preferred reaction pH is less than 8.

[0081] The polymerisation is by any number of free radical polymerisation methods for example, bulk, solution, gel, suspension or emulsion polymerisation. Suspension is preferred.

[0082] The vinylic monomer(s) may be selected from styrene, ethylene, propylene, butadiene, isoprene, vinyl acetate, vinyl chloride, vinyl pyrrolidone, vinyl caprolactam, tetrafluoroethylene, vinylidene chloride, vinyl sulfonic acid, acrylonitrile, methacrylonitrile, vinyl methyl ether, vinyl cyclohexane, acrolein, vinyl butyl sulfide, vinyl ethyl ketone, vinyl pyridine, allyl acetate, allyl alcohol, allyl amine, maleic acid, maleic anhydride.

[0083] The process for the polymerisation of polymerisable monomer is most preferably a process for polymerisation of vinyl chloride. By "polymerisation of vinyl chloride" is meant the homopolymerisation of vinyl chloride, the copolymerisation of vinyl chloride with one or more comonomers copolymerisable therewith, or the polymerisation of vinyl chloride in the presence of preformed polymers (optionally in the presence of grafting agents) to form graft-type vinyl chloride polymers. Examples of comonomers (copolymerisable with vinyl chloride) include vinyl esters such as vinyl acetate, acrylic esters such as methyl acrylate and butyl methacrylate, acrylic nitriles such as acrylonitrile and methacrylonitrile, unsaturated diesters such as diethyl maleate, allyl esters such as allyl acetate, α -olefins such as ethylene and propylene, vinyl ethers and styrene compounds. Examples of pre-formed polymers for forming graft-type vinyl chloride polymers include acrylic ester polymers such as poly-n-butyl acrylate, methyl methacrylate homo- and copolymers, poly-2-ethylhexyl acrylate, and olefin/vinyl ester copolymers such as ethylene/vinyl acetate copolymers. It is preferable to apply the invention to the production of polymers containing at least 50% molar and more particularly at least 80% molar, of units derived from vinyl chloride.

[0084] The process of the invention is particularly useful when applied to the production of vinyl chloride/vinyl acetate copolymers containing 3-20% molar of vinyl acetate units, since it is in any case often extremely difficult when using known build-up suppressants to obtain a consistently build-up free process for making such copolymers.

[0085] Any suitable suspension agent may be used for polymerisation in aqueous suspension according to the invention. With reference to vinyl chloride polymerisation, particularly preferred suspension agents are polyvinyl acetates of various degrees of hydrolysis and water-soluble cellulosic esters. These suspension agents can be used together with secondary suspension agents if desired. The amount employed may vary widely and is generally between 0.05 and 1.5% by weight calculated on vinyl chloride used.

[0086] Any suitable free-radical polymerisation initiator that is monomer-soluble may be used for polymerisation in aqueous suspension. With reference to vinyl chloride polymerisation, particular examples include peroxy compounds such as di-tertiary butyl peroxide, lauroyl peroxide and acetyl cyclohexyl, sulfonyl peroxide, azo compounds such as azo-bis-isobutyronitrile and 2,2'-azo-bis-2,4-dimethylvaleronitrile. Monomer-soluble free-radical polymerisation initiators that are particularly suitable for use in polymerisation of vinyl chloride are the dialkyl peroxydicarbonates (the term "alkyl" including "cycloalkyl") whose alkyl radicals contain up to 20 carbon atoms, such as diethyl peroxydicarbonate, di-isopropyl peroxydicarbonate, dicetyl peroxydicarbonate, and bis (4-tertiarybutylcyclohexyl) peroxydicarbonate, and azo compounds such as 2,2'-azo-bis-2,4-dimethylvaleronitrile and azo-bis-isobutyronitrile. These initiators may be used in conventional quantities-generally speaking from 0.01 to 1% by weight calculated on vinyl chloride.

[0087] The operating conditions for polymerisation according to the present invention may be those customarily used for the relevant polymerisation. For example, for vinyl chloride polymerisation the polymerisation temperature is generally in the range 40°C to 80°C and the pressure generally below 20 kg/cm².

As used herein

"Vinylic monomer" means a monomer containing one or more polymerizable carbon-carbon double bonds.

"Preventing" means both preventing and inhibiting.

"Fouling" means undesired polymerisation such that the polymer precipitates on reactor walls or fouls process equipment leading to equipment shutdown and cleaning requirement for removal of the polymeric foulant.

[0088] Fouling may also include other types of undesired polymerisation such as "popcorn" formation. In the production of an olefin, a so-called popcorn polymer of a porous three-dimensional structure occurs accidentally and not infrequently in the apparatus owing to the polymerization of the olefin in the step of refining and recovery or in the step of recovering the unaltered monomer after termination of the polymerisation. This popcorn polymer occurs both in the gaseous phase and the liquid phase. The popcorn polymer is disposed to forming "seeds" which may continue to propagate. The popcorn polymer therefore adheres to and defiles the heat-exchanger, distillation tower, and piping installed within the system for refining and recovering the produced olefin and deteriorates the efficiency of the refining operation. It often clogs the apparatus and its piping. In an extreme case, the mechanical pressure generated during the propagation of the polymer may deform and fracture the apparatus. The reason for the rapid propagation of the popcorn polymer is that, as the polymer grows, radically active sites are newly formed inside the polymer and the polymer attains growth from the newly

formed radically active sites.

[0089] Particular embodiments of the invention will now be discussed by way of non-limiting reference to the Examples.

Example 1

[0090]

a) 33.3 g of 20 wt% solids content an alkaline aqueous solution and a pH of 13 of the anti-fouling agent (Polycondensate) was prepared from the reaction of 1-naphthol and formaldehyde as described in Preparation Example 1 above to give a dark green solution.

b) Polyacrylic ester copolymer (Acronal 290D ex BASF supplied as an aqueous dispersion of solid content of 49 - 51 wt%) was diluted with water from 50% to a 2 wt% solution and 33.3g of the 2wt% solution added to 33.3g of the mixture of step (a). The mixture formed a milky emulsion.

c) PVA powder (of 99% hydrolysis) was dissolved in water at 90°C for 2 hours to give a 2.7 wt% solution and allowed to cool down to room temperature. The PVA solution (33.3 g) was then added to the mixture of step (b).

[0091] To minimise the presence of oxygen the reactions were performed under nitrogen. Composition of Example 1:

Polycondensate 6.6 wt%, Acronal 290D 0.67 wt%, , PVA 0.9 wt%

Example 2

[0092] Example 1 was repeated but without the addition of PVA. The solution was made up to a total of 100 g by addition of extra water

[0093] Composition of Example 2:

Polycondensate 6.6 wt%, Acronal 290D 0.67 wt%

Example 3 (Comparative)

[0094] Example 1 was repeated but without the addition of: PVA, or Acronal.

[0095] Composition of Example 3:

Polycondensate 6.6 wt%,

Example 4 (Comparative)

[0096] Example 1 was repeated but without the addition of Acronal.

[0097] The solution was made up to a total of 100 g by addition of extra water Composition of Example 4:

Polycondensate 6.6 wt%, , PVA 0.9 wt%

Anti-fouling agent performance testing procedure.

[0098] The anti-fouling agents were coated onto a stainless steel plate representative of the internal surface of a reactor. A uniform coating was obtained with good adhesion to the surfaces shown by a lack of material running down the plate.

[0099] The plates coated with the anti-fouling agent were then placed inside the reactor against the reactor wall.

[0100] Polymerisation of vinyl chloride in aqueous suspension was then performed in the reactor. After termination of the polymerisation the reactor was vented and the polymer slurry discharged.

The metal plates were then removed from the reactor and inspected for any build-up of PVC polymer and placed back in the reactor (after the reactor was washed with water). The % Coverage anti-fouling agent and PVC build up coverage % was determined by visual assessment.

[0101] A 2nd polymerisation reaction was then started. Hence, a total of up to 5 polymerizations were performed and the following measurement was performed.

Results

[0102]

Table 1 Retention of Anti-fouling agent after 5 repeat polymerisations

Example	% Coverage anti-fouling agent				
	Polymerisation 1	Polymerisation 2	Polymerisation 3	Polymerisation 4	Polymerisation 5
1	100	60	50	40	40
2	100	90	90	90	90
3	90	40	20	10	5
4	80	50	40	30	30

Table 2 PVC build up on plates after 5 repeat polymerisations

Example	PVC build up coverage %				
	Polymerisation 1	Polymerisation 2	Polymerisation 3	Polymerisation 4	Polymerisation 5
1	0	5	5	20	50
2	0	0	0	0	0
3	5	10	20	50	55
4	0	5	10	45	50

[0103] It is clear from these results that the composition of the invention is remarkably better than prior art compositions in which the polyacrylate ester is absent. In addition, the results demonstrate that the polyacrylate binder performs better in the absence of PVA. This difference is commercially desirable since it increases availability of the reactors by not only the time it takes to add antifouling composition to the reactor but also the time the reactor has to be allowed to stand to allow excess antifouling composition to drain away. This can be of the order of 2- 5% reduction in reactor cycle time per batch, for example 7 - 10 min saving per 360 min of reactor cycle time.

[0104] This can also lead to an overall increase in productivity. For example the productivity in terms of down time when the reactor is not out of operation for antifouling recoating, antifouling drain and reactor cleaning can be greater than 90% for a series for example of 2, 3, 4, 5, 6, 7, 8, 9, 10 or more consecutive polymerisation batches

[0105] It is furthermore found that the PVC obtained using the composition of the invention is whiter the B* yellow index method than PVC obtained by polymerising VCM in reactors treated with prior art antifouling compositions. The whiteness of the PVC color as measured by the B* yellow index method for the PVC wet cake is typically reduced by 50 % and may also improve the color of the waste water.

[0106] In addition, we have found that the presence of the polyacrylate (co)polymer increases the stability to the presence of oxygen (ie a reduced rate of color change to a dark-blue solution typically observed with 1-naphthol and formaldehyde condensate). This in turn provides a further contribution to the benefit of increased whiteness in the white PVC dried polymer and makes the process less sensitive during the bottling or packaging of the antifoul composition. Other acrylate copolymers have also been tested using the methods as above. Acronal A378, a copolymer with acrylonitrile and butyl acrylate, was found to also improve the retention of the anti-fouling agent on the reactor wall and reduce PVC build-up.

Claims

1. A composition comprising:

- a) at least one polyacrylate (co)polymer binder, and
- b) at least one of:

- (i) a condensation product formed by reaction of an effective 1-naphthol and formaldehyde; and

(ii) a product based on naphthenic molecules substituted with sulfur compounds at at least one position on the aromatic structure.

2. A composition according to claim 1, wherein the composition is substantially free of polyvinyl acetate and partially hydrolysed polyvinyl acetate, or wherein the composition comprises polyvinyl acetate or partially hydrolysed polyvinyl acetate and the amount of the polyvinyl acetate or the partially hydrolysed polyvinyl acetate in the composition is less than 2wt%, and preferably less than 1wt%.
3. The use of a composition as claimed in claim 1 or claim 2 in preventing fouling of reactors for polymerisation of polymerisable monomers.
4. The use of a composition as claimed in claim 1 or claim 2 as an anti-corrosion agent.
5. A composition as claimed in claim 1 or claim 2 wherein the binder is a polyacrylic ester (co)polymer selected from the group consisting of 2-Propenoic acid, butyl ester, polymer with ethenylbenzene, acrylic acid butyl ester, polymer with styrene; Benzene, ethenyl-, polymer with butyl 2-propenoate; Styrene, polymer with butyl acrylate; Behenyl behenate-butyl acrylate-styrene copolymer; Butyl acrylate-styrene copolymer; Butyl acrylate-styrene polymer; Poly(butyl acrylate-styrene); Styrene-butyl acrylate copolymer; Styrene-butyl acrylate polymer; Styrene-n-butyl acrylate copolymer; Styrene-n-butyl acrylate polymer; n-Butyl acrylate-styrene copolymer; n-Butyl acrylate-styrene polymer; 2-Propenoic acid, polymer with butyl 2-propenoate and 2-propenenitrile Acrylic acid, polymer with acrylonitrile and butyl acrylate; 2-Propenenitrile, polymer with butyl 2-propenoate and 2-propenoic acid; 2-Propenoic acid, butyl ester, polymer with 2-propenenitrile and 2-propenoic acid; Acrylic acid butyl ester, polymer with acrylic acid and acrylonitrile; Acrylonitrile, polymer with acrylic acid and butyl acrylate; Acrylic acid-acrylonitrile-butyl acrylate copolymer; Acrylic acid-acrylonitrile-butyl acrylate polymer; Acrylic acid-butyl acrylate-acrylonitrile copolymer; Butyl acrylate-acrylonitrile-acrylic acid copolymer; Butyl acrylate-acrylonitrile-acrylic acid polymer; acrylic acid hydroxypropyl, acrylic acid hydroxyethylester, acrylates/hydroxyesters acrylates copolymers, and acrylates/VA copolymers.
6. A method of polymerisation of polymerisable monomers in which the polymerisation is carried out in a polymerisation reactor having coated on internal surfaces thereof an anti-fouling agent as claimed in claim 1 or claim 2.
7. A method of applying an antifouling coating to a reactor for polymerising monomers, comprising the steps of:
 - i) applying an aqueous dispersion or solution of at least one polyacrylate (co)polymer to a wall of the reactor; and
 - ii) applying a coating of an antifouling composition comprising at least one of:
 - (a) a condensation product formed by reaction of an effective 1-naphthol and formaldehyde; and
 - (b) a product based on naphthenic molecules substituted with sulfur compounds at at least one position on the aromatic structure;to the coated reactor wall.
8. A method as claimed in claim 7 performed in the absence of both polyvinyl acetate and partially hydrolysed polyvinyl acetate.
9. A method of producing an antifouling composition as claimed in claim 1 or claim 2 comprising the steps of:
 - a) providing a solution or dispersion in water of at least one of:
 - (i) a condensation product formed by reaction of 1-naphthol and formaldehyde; and
 - (ii) a product based on naphthenic molecules substituted with sulfur compounds at at least one position on the aromatic structure; and
 - b) adding a binder while;
 - c) optionally maintaining the pH of the mixture above pH 9.
10. Polyvinyl chloride comprising a composition according to claim 1.

Patentansprüche

1. Zusammensetzung, umfassend:

- a) mindestens ein Polyacrylat(co)polymer-Bindemittel und
- b) mindestens eines der Folgenden:

- (i) ein Kondensationsprodukt, gebildet durch Umsetzung eines reaktiven 1-Naphthols und Formaldehyd; und
- (ii) ein Produkt, basierend auf mit Schwefelverbindungen an mindestens einer Position an der aromatischen Struktur substituierten naphthenischen Molekülen.

2. Zusammensetzung nach Anspruch 1, wobei die Zusammensetzung im Wesentlichen frei von Polyvinylacetat und teilweise hydrolysiertem Polyvinylacetat ist, oder wobei die Zusammensetzung Polyvinylacetat oder teilweise hydrolysiertes Polyvinylacetat umfasst und die Menge Polyvinylacetat oder teilweise hydrolysiertes Polyvinylacetat in die Zusammensetzung weniger als 2 Gew.-% und vorzugsweise weniger als 1 Gew.-% ist.

3. Verwendung einer Zusammensetzung nach Anspruch 1 oder Anspruch 2 bei der Vorbeugung von Fouling in Reaktoren für die Polymerisation von polymerisierbaren Monomeren.

4. Verwendung einer Zusammensetzung nach Anspruch 1 oder 2 als Korrosionsschutzmittel.

5. Zusammensetzung nach Anspruch 1 oder Anspruch 2, wobei das Bindemittel ein Polyacrylester(co)polymer ist, ausgewählt aus der Gruppe bestehend aus 2-Propensäurebutylester-Ethenylbenzol-Polymer, Acrylsäurebutylester-Styrol-Polymer; Benzoethenyl-Butyl-2-propenoat-Polymer; Styrol-Butylacrylat-Polymer; Behenylbehenat-Butylacrylat-Styrol-Copolymer; Butylacrylat-Styrol-Copolymer; Butylacrylat-Styrol-Polymer; Poly(butylacrylat-Styrol); Styrol-Butylacrylat-Copolymer; Styrol-Butylacrylat-Polymer; Styrol-n-Butylacrylat-Copolymer; Styrol-n-Butylacrylat-Polymer; n-Butylacrylat-Styrol-Copolymer; n-Butylacrylat-Styrol-Polymer; 2-Propensäure-Butyl-2-propenoat-Polymer und 2-Propennitril-Acrylsäure-Acrylnitril-Butylacrylat-Polymer; 2-Propennitril-Butyl-2-propenoat-2-Propensäure-Polymer; 2-Propensäurebutylester-2-Propennitril-2-Propensäure-Polymer; Acrylsäurebutylester-Acrylsäure-Acrylnitril-Polymer; Acrylnitril-Acrylsäure-Butylacrylat-Polymer; Acrylsäure-Acrylnitril-Butylacrylat-Copolymer; Acrylsäure-Acrylnitril-Butylacrylat-Polymer; Acrylsäure-Butylacrylat-Acrylnitril-Copolymer; Butylacrylat-Acrylnitril-Acrylsäure-Copolymer; Butylacrylat-Acrylnitril-Acrylsäure-Polymer; Acrylsäurehydroxypropylester, Acrylsäurehydroxyethylester, Acrylat/Hydroxyesteracrylat-Copolymere und Acrylat/VA-Copolymere.

6. Verfahren zur Polymerisation von polymerisierbaren Monomeren, wobei die Polymerisation in einem Polymerisationsreaktor durchgeführt wird, der ein auf inneren Oberflächen davon beschichtetes Anti-Foulingmittel aufweist, wie in Anspruch 1 oder Anspruch 2 beansprucht.

7. Verfahren zum Aufbringen einer Antifouling-Beschichtung auf einen Reaktor zur Polymerisation von Monomeren, umfassend die Schritte:

- i) Aufbringen einer wässrigen Dispersion oder Lösung von mindestens einem Polyacrylat(co)polymer an einer Wand des Reaktors; und
- ii) Aufbringen einer Beschichtung einer Anti-Fouling-Beschichtung, umfassend mindestens eines von:

- (a) ein Kondensationsprodukt, gebildet durch Reaktion eines reaktiven 1-Naphthols und Formaldehyd; und
- (b) ein Produkt, basierend auf mit Schwefelverbindungen an mindestens einer Position an der aromatischen Struktur substituierten naphthenischen Molekülen;

an der beschichteten Reaktorwand

8. Verfahren nach Anspruch 7, durchgeführt in Ermangelung von sowohl Polyvinylacetat als auch teilweisem hydrolysiertem Polyvinylacetat.

9. Verfahren zum Erzeugen einer Anti-Fouling-Zusammensetzung nach Anspruch 1 oder Anspruch 2, umfassend die folgenden Schritte:

- a) Bereitstellen einer Lösung oder Dispersion in Wasser von mindestens:

- (i) einem Kondensationsprodukt, gebildet durch die Umsetzung von 1-Naphthol und Formaldehyd; und
- (ii) einem Produkt, basierend auf mit Schwefelverbindungen an mindestens einer Position an der aromatischen Struktur substituierten naphthenischen Molekülen; und

- b) Hinzufügen eines Bindemittels während des;
- c) optionalen Aufrechterhaltens des pH-Werts des Gemischs oberhalb von pH 9.

10. Polyvinylchlorid, umfassend eine Zusammensetzung nach Anspruch 1.

Revendications

1. Composition comprenant :

- a) au moins un lieu de (copolymère de polyacrylate, et
- b) au moins l'un de :

- (i) un produit de condensation formé par réaction d'un 1-naphtol efficace et de formaldéhyde ; et
- (ii) un produit à base de molécules naphthéniques substituées par des composés soufrés au niveau d'au moins une position sur la structure aromatique.

2. Composition selon la revendication 1, dans laquelle la composition est substantiellement dépourvue de polyacétate de vinyle et de polyacétate de vinyle partiellement hydrolysé, ou dans laquelle la composition comprend du polyacétate de vinyle ou du polyacétate de vinyle partiellement hydrolysé et la quantité du polyacétate de vinyle ou du polyacétate de vinyle partiellement hydrolysé dans la composition est inférieure à 2 % en poids, et de préférence inférieure à 1 % en poids.

3. Utilisation d'une composition telle que revendiquée dans la revendication 1 ou la revendication 2 dans la prévention de l'encrassement de réacteurs pour la polymérisation de monomères polymérisables.

4. Utilisation d'une composition telle que revendiquée dans la revendication 1 ou la revendication 2 en tant qu'agent anti-corrosion.

5. Composition telle que revendiquée dans la revendication 1 ou la revendication 2, dans laquelle le lieu est un (co)polymère de polyester acrylique choisi dans le groupe constitué d'acide 2-propénoïque, ester butylique, polymère avec de l'éthénylbenzène, ester butylique d'acide acrylique, polymère avec du styrène ; benzène, éthényl-, polymère avec du 2-propénoate de butyle ; styrène, polymère avec de l'acrylate de butyle ; copolymère de béhénate de béhényle-acrylate de butyle-styrène ; copolymère d'acrylate de butyle-styrène ; polymère d'acrylate de butyle-styrène ; poly(acrylate de butyle-styrène) ; copolymère de styrène-acrylate de butyle ; polymère de styrène-acrylate de butyle ; copolymère de styrène-acrylate de n-butyle ; polymère de styrène-acrylate de n-butyle ; copolymère d'acrylate de n-butyle-styrène ; polymère d'acrylate de n-butyle-styrène ; acide 2-propénoïque, polymère avec du 2-propénoate de butyle et acide 2-propènenitrile-acrylique, polymère avec de l'acrylonitrile et de l'acrylate de butyle ; 2-propènenitrile, polymère avec du 2-propénoate de butyle et de l'acide 2-propénoïque ; acide 2-propénoïque, ester butylique, polymère avec du 2-propènenitrile et de l'acide 2-propénoïque ; ester butylique d'acide acrylique, polymère avec de l'acide acrylique et de l'acrylonitrile ; acrylonitrile, polymère avec de l'acide acrylique et de l'acrylate de butyle ; copolymère d'acide acrylique-acrylonitrile-acrylate de butyle ; polymère d'acide acrylique-acrylonitrile-acrylate de butyle ; copolymère d'acide acrylique-acrylate de butyle-acrylonitrile ; copolymère d'acrylate de butyle-acrylonitrile-acide acrylique ; polymère d'acrylate de butyle-acrylonitrile-acide acrylique ; hydroxypropylique d'acide acrylique, ester hydroxyéthylque d'acide acrylique ; copolymères d'acrylates/hydroxyesters acrylates, et copolymères d'acrylates/VA.

6. Procédé de polymérisation de monomères polymérisables dans lequel la polymérisation est réalisée dans un réacteur de polymérisation ayant déposé sur ses surfaces internes un agent anti-encrassement tel que revendiqué dans la revendication 1 ou la revendication 2.

7. Procédé d'application d'un revêtement anti-encrassement sur un réacteur pour la polymérisation de monomères, comprenant les étapes suivantes :

i) l'application d'une dispersion ou solution aqueuse d'au moins un (co) polymère de polyacrylate sur une paroi du réacteur ; et

ii) l'application d'un revêtement d'une composition anti-encrassement comprenant au moins l'un de :

- 5 (a) un produit de condensation formé par la réaction d'un 1-naphtol efficace et de formaldéhyde ; et
(b) un produit à base de molécules naphthéniques substituées par des composés soufrés au niveau d'au moins une position sur la structure aromatique ;

sur la paroi du réacteur revêtue.

10

8. Procédé tel que revendiqué dans la revendication 7 effectué en l'absence à la fois de polyacétate de vinyle et de polyacétate de vinyle partiellement hydrolysé.

15

9. Procédé de production d'une composition anti-encrassement telle que revendiquée dans la revendication 1 ou la revendication 2 comprenant les étapes suivantes :

a) la fourniture d'une solution ou d'une dispersion dans l'eau d'au moins l'un de :

20

- (i) un produit de condensation formé par la réaction de 1-naphtol et de formaldéhyde ; et
(ii) un produit à base de molécules naphthéniques substituées par des composés soufrés au niveau d'au moins une position sur la structure aromatique ; et

b) l'addition d'un lieur tout en

c) maintenant éventuellement le pH du mélange au-dessus de pH 9.

25

10. Polychlorure de vinyle comprenant une composition selon la revendication 1.

30

35

40

45

50

55

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 1439339 A [0004] [0005] [0007]
- EP 0052421 A [0004] [0006] [0007] [0013] [0073]
- JP 54107991 B [0004] [0005] [0007]
- WO 9708210 A [0004] [0008] [0013] [0073]
- WO 0144209 A1 [0010]
- US 3332789 A [0011]

Non-patent literature cited in the description

- CHEMICAL ABSTRACTS, 870-72-4 [0044]
- CHEMICAL ABSTRACTS, 7775-14-6 [0044]

Adalékanyag, az azt tartalmazó kompozíció, és annak alkalmazása

SZABADALMI IGÉNYPONTOK

1. Kompozíció, mely tartalmaz

a) legalább egy poliakrilát (ko)polimer kötőanyagot, és

b) az alábbiak legalább egyikét:

(i) egy reakcióképes 1-naftol és formaldehid reakciójával előállított kondenzációs terméket; és

(ii) az aromás szerkezet legalább egy helyzetében kén-vegyületekkel helyettesített nafténes molekulákon alapuló terméket.

2. Az 1. igénypont szerinti kompozíció, ahol a kompozíció lényegében polivinil-acetáttól és részben hidrolizált polivinil-acetáttól mentes, vagy ahol a kompozíció tartalmaz polivinil-acetátot vagy részben hidrolizált polivinil-acetátot, és a polivinil-acetát vagy részben hidrolizált polivinil-acetát mennyisége a kompozícióban kevesebb, mint 2 tömeg%, és előnyösen kevesebb, mint 1 tömeg%.

3. Az 1. vagy 2. igénypont szerinti kompozíció alkalmazása a polimerizálható monomerek polimerizációs reaktorának eltömődése megelőzésében.

4. Az 1. vagy 2. igénypont szerinti kompozíció alkalmazása korrózióellenes szerként.

5. Az 1. vagy 2. igénypont szerinti kompozíció, ahol a kötőanyag egy poliakril-észter (ko)polimer, mely a következő csoportból van kiválasztva: 2-propénsav- butilészter-etenilbenzol polimer, akrilsav-butilészter-sztirol polimer; benzol-etenil- butil-2-propenoát polimer; sztirol-butilakrilát polimer; behenilbehenát-butilakrilát-sztirol-kopolimer; butilakrilát-sztirol kopolimer; butilakrilát-sztirol polimer; poli(butilakrilát-sztirol); sztirol-butilakrilát kopolimer; sztirol-butilakrilát polimer, sztirol-n-butilakrilát kopolimer; sztirol-n-butilakrilát polimer; n-butilakrilát-sztirol kopolimer; n-butilakrilát-sztirol polimer; 2-propénsav-butil-2-propenoát polimer, és 2-propénnitril-akrilsav-akrilnitril-butilakrilát polimer; 2-propénnitril-butil-2-propenoát-2-propénsav polimer; 2-propénsav-butilészter-2-propénnitril-2-propénsav polimer; akrilsav-butilészter-akrilsav-akrilnitril polimer; akrilnitril-akrilsav-butilakrilát polimer; akrilsav-akrilnitril-butilakrilát kopolimer; akrilsav-akrilnitril-butilakrilát polimer; akrilsav- butilakrilát-akrilnitril kopolimer; butilakrilát-akrilnitril-akrilsav

kopolimer; butilakrilát-akrilnitril-akrilsav polimer; akrilsavhidroxipropilészter, akrilsavhidroxietilészter; akrilát/hidroxiészterakrilát kopolimerek és akrilát/VA kopolimerek.

6. Eljárás polimerizálható monomerek polimerizálására, ahol a polimerizációt polimerizáló reaktorban végezzük, melynek belső felületei az 1. vagy 2. igénypont szerinti eltömődés elleni szerrel vannak bevonva.

7. Eljárás monomerek polimerizálásra szolgáló reaktorhoz eltömődés elleni bevonat felvitelére, mely a következő lépéseket tartalmazza:

i) legalább egy polikarilát (ko)polimer vizes diszperzióját vagy oldatát visszük fel a reaktor falára; és

ii) eltömődés elleni készítmény bevonatot, mely tartalmazza az alábbiak legalább egyikét:

(a) egy reakcióképes 1-naftol és formaldehid reakciójával előállított kondenzációs terméket; és

(b) az aromás szerkezet legalább egy helyzetében kén-vegyületekkel helyettesített nafténes molekulákon alapuló terméket
viszünk fel a bevont reaktorfalra.

8. A 7. igénypont szerinti eljárás, melyet polivinil-acetát és részben hidrolizált polivinil-acetát mentesen végzünk.

9. Eljárás az 1. vagy 2. igénypont szerinti eltömődés elleni készítmény előállítására, mely eljárás a következő lépéseket tartalmazza:

a) az alábbiak legalább egyikének vizes oldatát vagy diszperzióját biztosítjuk:

(i) egy reakcióképes 1-naftol és formaldehid reakciójával előállított kondenzációs termék; és

(ii) az aromás szerkezet legalább egy helyzetében kén-vegyületekkel helyettesített nafténes molekulákon alapuló termék; és

b) eközben kötőanyagot adagolunk;

c) előnyösen a keverék pH-értékét pH 9 felett tartjuk.

10. Az 1. igénypont szerinti terméket tartalmazó polivinilklorid.

A meghatalmazott


Derzsi Katalin

szabadalmi ügyvivő

SBGK Szabadalmi Ügyvédi Iroda

H-1062 Budapest, Andrássy út 113.

Telefon: 461-1000 Fax: 461-1099

E-mail: derzsi@sbgk.hu