



- (51) **International Patent Classification:**
B01D 39/14 (2006.01) *B01D 71/06* (2006.01)
B01D 69/12 (2006.01)
- (21) **International Application Number:**
PCT/US2016/035035
- (22) **International Filing Date:**
31 May 2016 (31.05.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/168,410 29 May 2015 (29.05.2015) US
- (71) **Applicant:** OHIO STATE INNOVATION FOUNDATION [US/US]; 1524 North High Street, Columbus, Ohio 43201 (US).
- (72) **Inventors:** HO, W.S. Winston; 3910 Criswell Drive, Columbus, Ohio 43220-4936 (US). CHEN, Yuanxin; 125 W Dodridge Street, Apt. 305, Columbus, Ohio 43202 (US).
- (74) **Agents:** ZUCCHERO, Anthony J. et al.; Meunier Carlin & Curfinan LLC, 999 Peachtree Street NE, Suite 1300, Atlanta, Georgia 30309 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

- (54) **Title:** POLYMERIC MEMBRANES FOR SEPARATION OF GASES

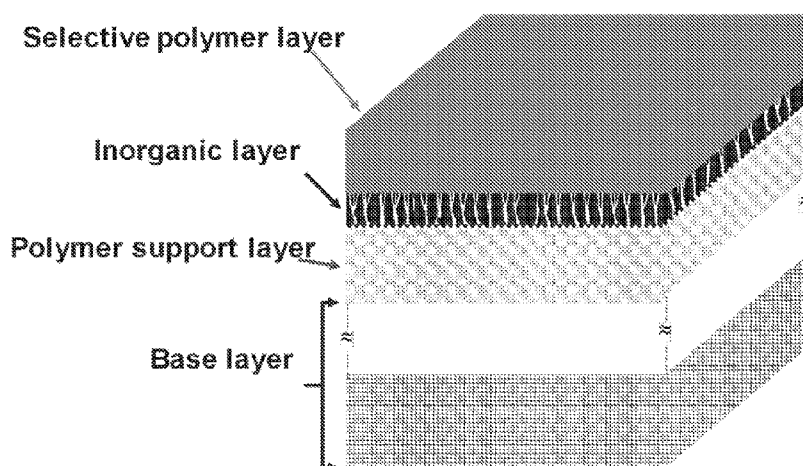


Figure 1

- (57) **Abstract:** Membranes, methods of making the membranes, and methods of using the membranes are described herein. The membranes can comprise a gas permeable support layer, optionally an inorganic layer disposed on the support, and a selective polymer layer disposed on the inorganic layer. In some cases, the selective polymer layer can comprise an amine-containing polymer and an amino acid salt dispersed within the amine-containing polymer. In other cases, the selective polymer layer comprises a sterically hindered amine-containing polymer, such as a sterically hindered derivative of polyvinylamine. The membranes can be used, for example, to separate gaseous mixtures, such as flue gas.



POLYMERIC MEMBRANES FOR SEPARATION OF GASES

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Patent Application Serial No. 62/168,410 filed May 29, 2015, the disclosure of which is expressly incorporated herein by reference.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

This invention was made with Government Support under Grant Nos. DE-FE0007632 and DE-FE0026919 awarded by the U.S. Department of Energy, National Energy Technology Laboratory. The Government has certain rights in the invention.

FIELD OF THE DISCLOSURE

This disclosure relates generally to membrane structures, more particularly, to membrane structures for the separation of at least one gas from a gaseous mixture.

BACKGROUND OF THE DISCLOSURE

There are numerous industrial processes that produce gas streams containing carbon dioxide, hydrogen sulfide, hydrogen chloride, nitrogen oxide, and sulfur oxide. It is often desirable to remove one or more of these gases from the other components of the gas streams, such as hydrogen and nitrogen. Inorganic membranes have been employed for a variety of gas separation applications, including hydrogen purification and carbon dioxide sequestration. However, a major limiting factor to the application of inorganic membranes is the frequent occurrence of defects which limits reproducibility, stability, and the separation performance of the membranes. There remains a need in the art for membranes, methods of making membranes, and methods of separating gases.

SUMMARY OF THE DISCLOSURE

Membranes, methods of making the membranes, and methods of using the membranes are described herein. The membranes can comprise a gas permeable support layer, and a selective polymer layer disposed on the gas permeable support layer. In some cases, the selective polymer layer can comprise an amine-containing polymer and an amino acid salt


dispersed within the amine-containing polymer. In some cases, the selective polymer layer can comprise a sterically hindered amine-containing polymer.

The gas permeable support layer can comprise a gas permeable polymer. The gas permeable polymer can be a polymer selected from the group consisting of polyamides, polyimides, polypyrrolones, polyesters, sulfone-based polymers, polymeric organosilicones, fluorinated polymers, polyolefins, copolymers thereof, and blends thereof. In some embodiments, the gas permeable polymer comprises polyethersulfone. In certain cases, the gas permeable support layer comprises a gas permeable polymer disposed on a base (e.g., a nonwoven fabric such as a polyester nonwoven).


In some embodiments, the selective polymer layer can comprise an amine-containing polymer and an amino acid salt dispersed within the amine-containing polymer. The amine-containing polymer can be, for example, polyvinylamine, polyallylamine, polyethyleneimine, poly-*N*-isopropylallylamine, poly-*N*-tert-butylallylamine, poly-*N*-1,2-dimethylpropylallylamine, poly-*N*-1-methylpropylallylamine, poly-*N*-2-methylpropylallylamine, poly-*N*-1-ethylpropylallylamine, poly-*N*-2-ethylpropylallylamine, poly-*N*-methylallylamine, poly-*N,N*-dimethylallylamine, poly-*N*-ethylallylamine, poly-*N,N*-diethylallylamine, poly(*N*-methyl-*N*-vinylamine), poly(*N*-ethyl-*N*-vinylamine), poly(*N*-isopropyl-*N*-vinylamine), poly(*N*-tert-butyl-*N*-vinylamine), poly(*N*-propyl-*N*-vinylamine), poly(*N,N*-dimethyl-*N*-vinylamine), poly(*N,N*-diethyl-*N*-vinylamine), poly-2-vinylpiperidine, poly-4-vinylpiperidine, polyaminostyrene, chitosan, copolymers, and blends thereof.

The amine-containing polymer can be a high molecular weight amine-containing polymer. For example, the amine-containing polymer can have a weight average molecular weight of at least 500,000 Da (e.g., at least 700,000 Da, or at least 1,000,000 Da). In certain embodiments, the amine-containing polymer can have a weight average molecular weight of from 500,000 Da to 5,000,000 Da, or from 500,000 Da to 2,000,000 Da. The amine-containing polymer can be a modest molecular weight amine-containing polymer. For example, the amine-containing polymer can have a weight average molecular weight of at least 50,000 Da (e.g., at least 100,000 Da, or at least 500,000 Da). In certain embodiments, the amine-containing polymer can have a weight average molecular weight of from 50,000 Da to 500,000 Da.

In some cases, the amine-containing polymer can comprise polyvinylamine. In some cases, the amine-containing polymer can comprise a sterically hindered derivative of polyvinylamine. In some embodiments, the sterically hindered derivative of polyvinylamine comprises a polymer having the structure below




wherein R_1 and R_2 are, independently for each occurrence, hydrogen, alkyl, alkenyl, alkynyl, aryl, or cycloalkyl, or R_1 and R_2 , together with the nitrogen atom to which they are attached, form a heterocyclic ring, with the proviso that at least one of R_1 and R_2 is not hydrogen; and n is an integer from 10 to 25,000. In some embodiments, the sterically hindered derivative of polyvinylamine comprises a random copolymer or block copolymer having the structure below





wherein R_1 and R_2 are, independently for each occurrence, hydrogen, alkyl, alkenyl, alkynyl, aryl, or cycloalkyl, or R_1 and R_2 , together with the nitrogen atom to which they are attached, form a heterocyclic ring, with the proviso that at least one of R_1 and R_2 is not hydrogen; m is an integer from 10 to 10,000; and n is an integer from 10 to 10,000.

The amino acid salt can be a salt of any suitable amino acid. In some cases, the amino acid salt can comprise a salt of a compound defined by the formula below




wherein, independently for each occurrence in the amino acid, each of R_1 , R_2 , R_3 and R_4 is selected from one of the following

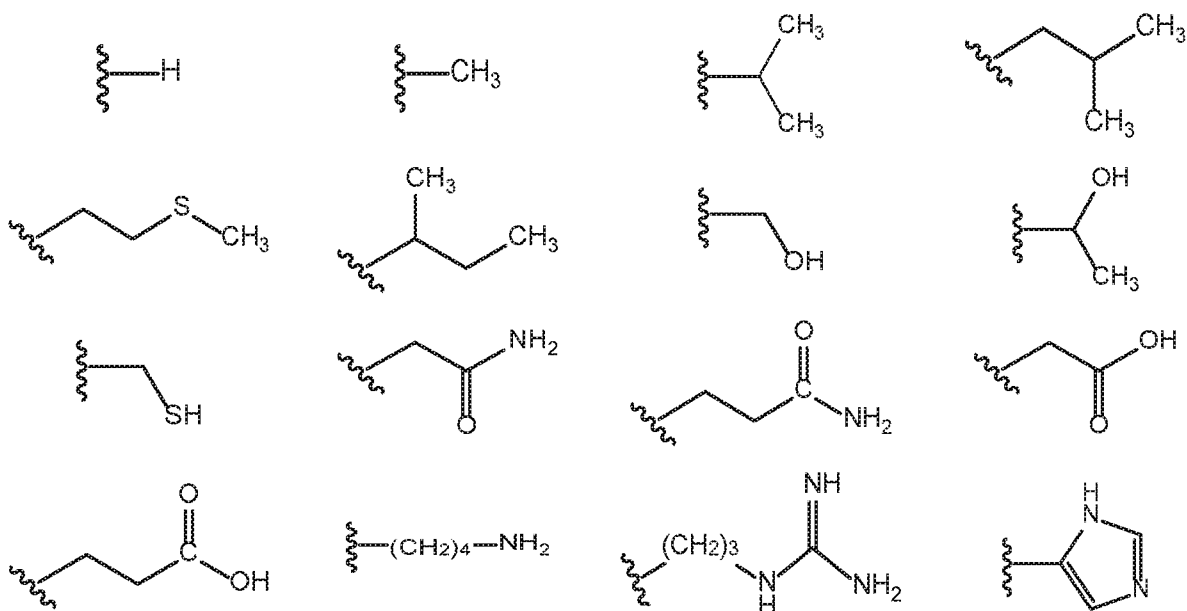

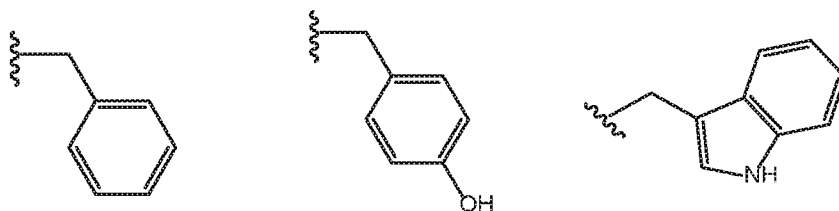


or R_1 and R_3 , together with the atoms to which they are attached, form a five-membered heterocycle defined by the structure below when n is 1, or a six-membered heterocycle defined by the structure below when n is 2




- 5 In certain embodiments, the amino acid salt can comprise a glycinate salt (e.g., sodium glycinate, potassium glycinate, lithium glycinate, or piperazine glycinate). In certain embodiments, the amino acid salt can comprise an aminoisobutyrate salt (e.g., aminoisobutyric acid-potassium salt, aminoisobutyric acid-lithium salt, or aminoisobutyric acid-piperazine salt). The selective polymer layer can comprise from 30% to 80% by weight amino acid salt, based on the total weight of the selective polymer layer.

In other embodiments, the selective polymer layer can comprise a sterically hindered amine-containing polymer. The sterically hindered amine-containing polymer can include a sterically hindered amine sidechain. Sterically hindered amine sidechains include either a primary amine that is attached to a tertiary carbon or a secondary amine that is attached to at least one secondary carbon or tertiary carbon. In some cases, the sterically hindered amine-containing polymer can comprise a sterically hindered derivative of polyvinylamine. In some embodiments, the sterically hindered derivative of polyvinylamine comprises a polymer having the structure below




- 20 wherein R_1 and R_2 are, independently for each occurrence, hydrogen, alkyl, alkenyl, alkynyl, aryl, or cycloalkyl, or R_1 and R_2 , together with the nitrogen atom to which they are attached, form a heterocyclic ring, with the proviso that at least one of R_1 and R_2 is not hydrogen; and n is an integer from 10 to 25,000. In some embodiments, the sterically hindered derivative of polyvinylamine comprises a random copolymer or block copolymer having the structure below






wherein R_1 and R_2 are, independently for each occurrence, hydrogen, alkyl, alkenyl, alkynyl, aryl, or cycloalkyl, or R_1 and R_2 , together with the nitrogen atom to which they are attached, form a heterocyclic ring, with the proviso that at least one of R_1 and R_2 is not hydrogen; m is an integer from 10 to 10,000; and n is an integer from 10 to 10,000.


The sterically hindered amine-containing polymer can be a high molecular weight sterically hindered amine-containing polymer. For example, the sterically hindered amine-containing polymer can have a weight average molecular weight of at least 500,000 Da (e.g., at least 700,000 Da, or at least 1,000,000 Da). In certain embodiments, the sterically hindered amine-containing polymer can have a weight average molecular weight of from 500,000 Da to 5,000,000 Da, or from 500,000 Da to 2,000,000 Da. The sterically hindered amine-containing polymer can be a modest molecular weight amine-containing polymer. For example, the amine-containing polymer can have a weight average molecular weight of at least 50,000 Da (e.g., at least 100,000 Da, or at least 500,000 Da). In certain embodiments, the amine-containing polymer can have a weight average molecular weight of from 50,000 Da to 500,000 Da.

In these embodiments, the selective polymer layer can optionally further include a low molecular weight amino compound dispersed within the sterically hindered amine-containing polymer. The low molecular weight compound can have a molecular weight of less than 1,000 Da. The low molecular weight amino compound can be a salt of a primary amine or a salt of a secondary amine. In certain embodiments, the low molecular weight amino compound can comprise an amino acid salt. The amino acid salt can be a salt of any suitable amino acid. In some cases, the amino acid salt can comprise a salt of a compound defined by the formula below




wherein, independently for each occurrence in the amino acid, each of R_1 , R_2 , R_3 and R_4 is selected from one of the following



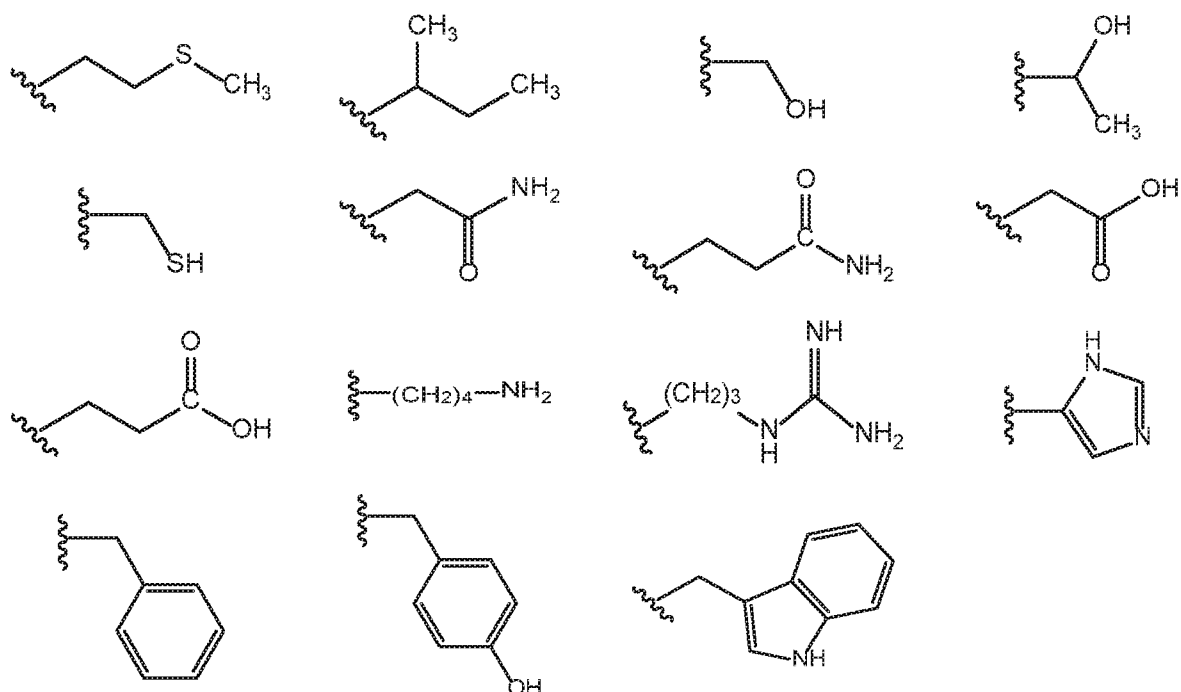

or R₁ and R₃, together with the atoms to which they are attached, form a five-membered heterocycle defined by the structure below when n is 1, or a six-membered heterocycle defined by the structure below when n is 2



- 5 In certain embodiments, the amino acid salt can comprise a glycinate salt (e.g., sodium glycinate, potassium glycinate, lithium glycinate, or piperazine glycinate). The selective polymer layer can comprise from 30% to 80% by weight amino acid salt, based on the total weight of the selective polymer layer.

Optionally, the membranes can further comprise an inorganic layer. In these
 10 embodiments, the inorganic layer can be disposed on the gas permeable support layer, and the selective polymer layer can be disposed on the inorganic layer. The inorganic layer can comprise a plurality of discrete nanoparticles having an average particle size of less than 1 micron. The nanoparticles in the inorganic layer can comprise any suitable nanoparticles having an average particle size of less than 1 micron. The average particle size of the nanoparticles in
 15 the inorganic layer can be from 1 nm to 500 nm (e.g., from 1 nm to 250 nm). In some embodiments, the nanoparticles in the inorganic layer can comprise alkaline earth metal oxide nanoparticles, transition metal oxide nanoparticles, lanthanide metal oxide nanoparticles, group IVA metal oxide nanoparticles, transition metal nanoparticles, transition-metal catalyst

nanoparticles, nanoparticles comprising a transition metal adsorbed on a non-reactive support, metal alloy nanoparticles, silicate nanoparticles, alumino-silicate nanoparticles, nanoparticles comprising clays, and combinations thereof. In certain embodiments, the nanoparticles in the inorganic layer can be chosen from silicate nanoparticles, alumino-silicate nanoparticles, or combinations thereof. In certain embodiments, the nanoparticles can comprise zeolite nanoparticles. The zeolite nanoparticles can have varying frameworks and differing Si/Al ratios. For example, the nanoparticles can be zeolite Y nanoparticles.

The membranes can exhibit selective permeability to gases, including acidic gases. For example, the membranes can exhibit selective permeability to carbon dioxide, hydrogen sulfide, sulfur dioxide, sulfur trioxide, nitrogen oxide, hydrogen chloride, water, and combinations thereof. In some cases, the membranes can exhibit a CO₂:N₂ selectivity of from 30 to 500 (e.g., from 45 to 350, or from 75 to 350) at 57°C and 1 atm feed pressure. The membranes can also exhibit a relatively high permeability to certain gases. For example, in some cases, the membranes can exhibit a CO₂ permeance of from 200 to 2000 GPU at 57°C and 1 atm feed pressure.

Methods of making the membranes disclosed herein are also provided. Methods of making membranes can include depositing a nanoparticle dispersion on a gas permeable support layer to form an inorganic layer disposed on the gas permeable support layer. The nanoparticle dispersion can comprise a plurality of discrete nanoparticles having an average particle size of less than 1 micron in a suitable fluid carrier. In some embodiments, depositing the nanoparticle dispersion on the gas permeable support layer can comprise vacuum-assisted dip-deposition of the nanoparticle dispersion on the gas permeable support layer. Methods can further include coating the inorganic layer with a selective polymer (e.g., an amine-containing polymer and an amino acid salt dispersed within the amine-containing polymer, or a sterically hindered amine-containing polymer). In some embodiments, the selective polymer can have a high viscosity when applied to the inorganic layer. For example, the selective polymer can have a viscosity of at least 400 cp (e.g., at least 1000 cp) at 25°C.

Methods for separating a gaseous mixture comprising a first gas and a second gas are also provided. The method can include contacting any of the disclosed membrane with the gaseous mixture under conditions effective to afford transmembrane permeation of the first gas.

DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic of a composite membrane disclosed herein.

DETAILED DESCRIPTION

Definitions

Terms used herein will have their customary meaning in the art unless specified otherwise. The organic moieties mentioned when defining variable positions within the general formulae described herein (e.g., the term “halogen”) are collective terms for the individual substituents encompassed by the organic moiety. The prefix C_n-C_m preceding a group or moiety indicates, in each case, the possible number of carbon atoms in the group or moiety that follows.

As used herein, the term “alkyl” refers to saturated, straight-chained or branched saturated hydrocarbon moieties. Unless otherwise specified, C₁-C₈ (e.g., C₁-C₆, C₁-C₄, C₂-C₈, C₂-C₆, C₂-C₄) alkyl groups are intended. Examples of alkyl groups include methyl, ethyl, propyl, 1-methyl-ethyl, butyl, 1-methyl-propyl, 2-methyl-propyl, 1,1-dimethyl-ethyl, pentyl, 1-methyl-butyl, 2-methyl-butyl, 3-methyl-butyl, 2,2-dimethyl-propyl, 1-ethyl-propyl, hexyl, 1,1-dimethyl-propyl, 1,2-dimethyl-propyl, 1-methyl-pentyl, 2-methyl-pentyl, 3-methyl-pentyl, 4-methyl-pentyl, 1,1-dimethyl-butyl, 1,2-dimethyl-butyl, 1,3-dimethyl-butyl, 2,2-dimethyl-butyl, 2,3-dimethyl-butyl, 3,3-dimethyl-butyl, 1-ethyl-butyl, 2-ethyl-butyl, 1,1,2-trimethyl-propyl, 1,2,2-trimethyl-propyl, 1-ethyl-1-methyl-propyl, and 1-ethyl-2-methyl-propyl. Alkyl substituents may be unsubstituted or substituted with one or more chemical moieties. Examples of suitable substituents include, for example, hydroxy, nitro, cyano, formyl, C₁-C₆ alkoxy, C₁-C₆ haloalkoxy, C₁-C₆ acyl, C₁-C₆ alkylthio, C₁-C₆ haloalkylthio, C₁-C₆ alkylsulfinyl, C₁-C₆ haloalkylsulfinyl, C₁-C₆ alkylsulfonyl, C₁-C₆ haloalkylsulfonyl, C₁-C₆ alkoxycarbonyl, C₁-C₆ haloalkoxycarbonyl, C₁-C₆ carbamoyl, C₁-C₆ halocarbamoyl, hydroxycarbonyl, C₁-C₆ alkylcarbonyl, C₁-C₆ haloalkylcarbonyl, aminocarbonyl, C₁-C₆ alkylaminocarbonyl, haloalkylaminocarbonyl, C₁-C₆ dialkylaminocarbonyl, and C₁-C₆ dihaloalkylaminocarbonyl, provided that the substituents are sterically compatible and the rules of chemical bonding and strain energy are satisfied.

As used herein, the term “alkenyl” refers to unsaturated, straight-chained, or branched hydrocarbon moieties containing a double bond. Unless otherwise specified, C₂-C₈ (e.g., C₂-C₆, C₂-C₄) alkyl groups are intended. Alkenyl groups may contain more than one unsaturated bond. Examples include ethenyl, 1-propenyl, 2-propenyl, 1-methylethenyl, 1-butenyl, 2-butenyl, 3-butenyl, 1-methyl-1-propenyl, 2-methyl-1-propenyl, 1-methyl-2-propenyl, 2-methyl-2-propenyl,

1-pentenyl, 2-pentenyl, 3-pentenyl, 4-pentenyl, 1-methyl-1-butenyl, 2-methyl-1-butenyl, 3-methyl-1-butenyl, 1-methyl-2-butenyl, 2-methyl-2-butenyl, 3-methyl-2-butenyl, 1-methyl-3-butenyl, 2-methyl-3-butenyl, 3-methyl-3-butenyl, 1,1-dimethyl-2-propenyl, 1,2-dimethyl-1-propenyl, 1,2-dimethyl-2-propenyl, 1-ethyl-1-propenyl, 1-ethyl-2-propenyl, 1-hexenyl, 2-hexenyl, 3-hexenyl, 4-hexenyl, 5-hexenyl, 1-methyl-1-pentenyl, 2-methyl-1-pentenyl, 3-methyl-1-pentenyl, 4-methyl-1-pentenyl, 1-methyl-2-pentenyl, 2-methyl-2-pentenyl, 3-methyl-2-pentenyl, 4-methyl-2-pentenyl, 1-methyl-3-pentenyl, 2-methyl-3-pentenyl, 3-methyl-3-pentenyl, 4-methyl-3-pentenyl, 1-methyl-4-pentenyl, 2-methyl-4-pentenyl, 3-methyl-4-pentenyl, 4-methyl-4-pentenyl, 1,1-dimethyl-2-butenyl, 1,1-dimethyl-3-butenyl, 1,2-dimethyl-1-butenyl, 1,2-dimethyl-2-butenyl, 1,2-dimethyl-3-butenyl, 1,3-dimethyl-1-butenyl, 1,3-dimethyl-2-butenyl, 1,3-dimethyl-3-butenyl, 2,2-dimethyl-3-butenyl, 2,3-dimethyl-1-butenyl, 2,3-dimethyl-2-butenyl, 2,3-dimethyl-3-butenyl, 3,3-dimethyl-1-butenyl, 3,3-dimethyl-2-butenyl, 1-ethyl-1-butenyl, 1-ethyl-2-butenyl, 1-ethyl-3-butenyl, 2-ethyl-1-butenyl, 2-ethyl-2-butenyl, 2-ethyl-3-butenyl, 1,1,2-trimethyl-2-propenyl, 1-ethyl-1-methyl-2-propenyl, 1-ethyl-2-methyl-1-propenyl, and 1-ethyl-2-methyl-2-propenyl. The term “vinyl” refers to a group having the structure $-\text{CH}=\text{CH}_2$; 1-propenyl refers to a group with the structure $-\text{CH}=\text{CH}-\text{CH}_3$; and 2-propenyl refers to a group with the structure $-\text{CH}_2-\text{CH}=\text{CH}_2$. Alkenyl substituents may be unsubstituted or substituted with one or more chemical moieties. Examples of suitable substituents include, for example, hydroxy, nitro, cyano, formyl, C_1 - C_6 alkoxy, C_1 - C_6 haloalkoxy, C_1 - C_6 acyl, C_1 - C_6 alkylthio, C_1 - C_6 haloalkylthio, C_1 - C_6 alkylsulfinyl, C_1 - C_6 haloalkylsulfinyl, C_1 - C_6 alkylsulfonyl, C_1 - C_6 haloalkylsulfonyl, C_1 - C_6 alkoxycarbonyl, C_1 - C_6 haloalkoxycarbonyl, C_1 - C_6 carbamoyl, C_1 - C_6 halocarbamoyl, hydroxycarbonyl, C_1 - C_6 alkylcarbonyl, C_1 - C_6 haloalkylcarbonyl, aminocarbonyl, C_1 - C_6 alkylaminocarbonyl, haloalkylaminocarbonyl, C_1 - C_6 dialkylaminocarbonyl, and C_1 - C_6 dihaloalkylaminocarbonyl, provided that the substituents are sterically compatible and the rules of chemical bonding and strain energy are satisfied.

As used herein, the term “alkynyl” represents straight-chained or branched hydrocarbon moieties containing a triple bond. Unless otherwise specified, C_2 - C_8 (e.g., C_2 - C_6 , C_2 - C_4) alkynyl groups are intended. Alkynyl groups may contain more than one unsaturated bond. Examples include C_2 - C_6 -alkynyl, such as ethynyl, 1-propynyl, 2-propynyl (or propargyl), 1-butyne, 2-butyne, 3-butyne, 1-methyl-2-propynyl, 1-pentyne, 2-pentyne, 3-pentyne, 4-pentyne, 3-methyl-1-butyne, 1-methyl-2-butyne, 1-methyl-3-butyne, 2-methyl-3-butyne, 1,1-dimethyl-2-propynyl, 1-ethyl-2-propynyl, 1-hexynyl, 2-hexynyl, 3-hexynyl, 4-hexynyl, 5-hexynyl, 3-methyl-1-pentyne, 4-methyl-1-pentyne, 1-methyl-2-pentyne, 4-methyl-2-pentyne, 1-methyl-3-

pentynyl, 2-methyl-3-pentynyl, 1-methyl-4-pentynyl, 2-methyl-4-pentynyl, 3-methyl-4-pentynyl, 1,1-dimethyl-2-butynyl, 1,1-dimethyl-3-butynyl, 1,2-dimethyl-3-butynyl, 2,2-dimethyl-3-butynyl, 3,3-dimethyl-1-butynyl, 1-ethyl-2-butynyl, 1-ethyl-3-butynyl, 2-ethyl-3-butynyl, and 1-ethyl-1-methyl-2-propynyl. Alkynyl substituents may be unsubstituted or substituted with one or more chemical moieties. Examples of suitable substituents include, for example, hydroxy, nitro, cyano, formyl, C₁-C₆ alkoxy, C₁-C₆ haloalkoxy, C₁-C₆ acyl, C₁-C₆ alkylthio, C₁-C₆ haloalkylthio, C₁-C₆ alkylsulfinyl, C₁-C₆ haloalkylsulfinyl, C₁-C₆ alkylsulfonyl, C₁-C₆ haloalkylsulfonyl, C₁-C₆ alkoxycarbonyl, C₁-C₆ haloalkoxycarbonyl, C₁-C₆ carbamoyl, C₁-C₆ halocarbamoyl, hydroxycarbonyl, C₁-C₆ alkylcarbonyl, C₁-C₆ haloalkylcarbonyl, aminocarbonyl, C₁-C₆ alkylaminocarbonyl, haloalkylaminocarbonyl, C₁-C₆ dialkylaminocarbonyl, and C₁-C₆ dihaloalkylaminocarbonyl, provided that the substituents are sterically compatible and the rules of chemical bonding and strain energy are satisfied.

As used herein, the term "aryl," as well as derivative terms such as aryloxy, refers to groups that include a monovalent aromatic carbocyclic group of from 6 to 14 carbon atoms. Aryl groups can include a single ring or multiple condensed rings. In some embodiments, aryl groups include C₆-C₁₀ aryl groups. Examples of aryl groups include, but are not limited to, phenyl, biphenyl, naphthyl, tetrahydronaphthyl, phenylcyclopropyl, and indanyl. In some embodiments, the aryl group can be a phenyl, indanyl or naphthyl group. The term "heteroaryl", as well as derivative terms such as "heteroaryloxy", refers to a 5- or 6-membered aromatic ring containing one or more heteroatoms, *viz.*, N, O or S; these heteroaromatic rings may be fused to other aromatic systems. The aryl or heteroaryl substituents may be unsubstituted or substituted with one or more chemical moieties. Examples of suitable substituents include, for example, hydroxy, halogen, nitro, cyano, formyl, C₁-C₆ alkyl, C₂-C₆ alkenyl, C₂-C₆ alkynyl, C₁-C₆ alkoxy, C₁-C₆ haloalkyl, C₁-C₆ haloalkoxy, C₁-C₆ acyl, C₁-C₆ alkylthio, C₁-C₆ alkylsulfinyl, C₁-C₆ alkylsulfonyl, C₁-C₆ alkoxycarbonyl, C₁-C₆ carbamoyl, hydroxycarbonyl, C₁-C₆ alkylcarbonyl, aminocarbonyl, C₁-C₆ alkylaminocarbonyl, C₁-C₆ dialkylaminocarbonyl, provided that the substituents are sterically compatible and the rules of chemical bonding and strain energy are satisfied.

Membranes

Membranes, methods of making the membranes, and methods of using the membranes are described herein. The membranes can comprise a gas permeable support layer, and a selective polymer layer disposed on the gas permeable support layer. Optionally, the membranes can further comprise an inorganic layer. In these embodiments, the inorganic layer can be

disposed on the gas permeable support layer, and the selective polymer layer can be disposed on the inorganic layer. The gas permeable support layer, the inorganic layer (when present), and the selective polymer layer can optionally comprise one or more sub-layers.

The gas permeable support layer can be a porous layer that comprises a plurality of substantially connected pores. "Substantially connected" as used herein, refer to pores that are connected with each other, and substantially extend from a surface of the support layer to an inner portion of the support layer.

The gas permeable support layer can be formed from any suitable material. The material used to form the gas permeable support layer can be chosen based on the end use application of the membrane. In some embodiments, the gas permeable support layer can comprise a gas permeable polymer. The gas permeable polymer can be a cross-linked polymer, a phase separated polymer, a porous condensed polymer, or a blend thereof. Examples of suitable gas permeable polymers include polyamides, polyimides, polypyrrolones, polyesters, sulfone-based polymers, polymeric organosilicones, fluorinated polymers, polyolefins, copolymers thereof, or blends thereof. Specific examples of polymers in the gas permeable support layer can include polydimethylsiloxane, polydiethylsiloxane, polydi-iso-propylsiloxane, polydiphenylsiloxane, polyethersulfone, polyphenylsulfone, polysulfone, partially fluorinated or perfluorinated derivatives thereof, copolymers thereof, or blends thereof. In some embodiments, the gas permeable polymer can be polyethersulfone. If desired, the gas permeable support layer can include inorganic particles to increase the mechanical strength without altering the permeability of the support layer.

In certain embodiments, the gas permeable support layer can comprise a gas permeable polymer disposed on a base. The base can be in any configuration configured to facilitate formation of a membrane suitable for use in a particular application. For example, the base can be a flat disk, a tube, a spiral wound, or a hollow fiber base. The base can be formed from any suitable material. In some embodiments, the layer can include a fibrous material. The fibrous material in the base can be a mesh (e.g., a metal or polymer mesh), a woven or non-woven fabric, a glass, fiberglass, a resin, a screen (e.g., a metal or polymer screen). In certain embodiments, the base can include a non-woven fabric (e.g., a non-woven fabric comprising fibers formed from a polyester).

The inorganic layer can comprise a plurality of discrete nanoparticles having an average particle size of less than 1 micron. The inorganic layer can comprise multiple pores and/or channels formed between the nanoparticles and/or within the nanoparticles. The pores and/or

channels formed can be in fluid contact with the gas permeable support layer.

The nanoparticles in the inorganic layer can have any suitable size and shape. For example, the nanoparticles can be spherical, cylindrical, or rod-like. In some embodiments, the nanoparticles can have an average particle size of less than 1 micron (e.g., less than 750 nm, less than 500 nm, less than 250 nm, less than 200 nm, less than 150 nm, less than 100 nm, less than 50 nm, or less than 25 nm. In some embodiments, the nanoparticles can have an average particle size of at least 1 nm (e.g., at least 5 nm, at least 10 nm, at least 15 nm, or at least 25 nm). The nanoparticles can have an average particle size ranging from any of the minimum values described above to any of the maximum values described above. For example, in certain
10 embodiments, the nanoparticles can have an average particle size of from 1 nm to 200 nm (e.g., from 1 nm to 150 nm, from 1 nm to 100 nm, or from 1 nm to 50 nm). The term “average particle size,” as used herein, generally refers to the statistical mean particle size (diameter) of the particles in a population of particles. The diameter of an essentially spherical particle may refer to the physical or hydrodynamic diameter. The diameter of a non-spherical particle may refer
15 preferentially to the hydrodynamic diameter. As used herein, the diameter of a non-spherical particle may refer to the largest linear distance between two points on the surface of the particle. Mean particle size can be measured using methods known in the art, such as dynamic light scattering or electron microscopy.

In some embodiments, the nanoparticles in the inorganic layer comprise a population of
20 nanoparticles having a monodisperse particle size distribution. The term “monodisperse,” as used herein, describes a population of nanoparticles where all of the nanoparticles are the same or nearly the same size. As used herein, a monodisperse particle size distribution refers to particle distributions in which 80% of the distribution (e.g., 85% of the distribution, 90% of the distribution, or 95% of the distribution) lies within 20% of the median particle size (e.g., within
25 15% of the median particle size, within 10% of the median particle size, or within 5% of the median particle size).

The nanoparticles can be formed from a variety of suitable materials. In certain embodiments, the nanoparticles can be selected to have a surface chemistry that is compatible with the selective polymer layer, the gas permeable support layer, or a combination thereof. For
30 example, in certain cases, the nanoparticle can comprise hydrophilic nanoparticles. Examples of suitable nanoparticles include alkaline earth metal oxide nanoparticles, transition metal oxide nanoparticles, lanthanide metal oxide nanoparticles, group IVA metal oxide nanoparticles, transition metal nanoparticles, transition-metal catalyst nanoparticles, nanoparticles comprising a

transition metal adsorbed on a non-reactive support, metal alloy nanoparticles, silicate nanoparticles, alumino-silicate nanoparticles, nanoparticles comprising clays, and combinations thereof. Specific examples of nanoparticles include alumina nanoparticles, silica nanoparticles, zeolite nanoparticles, titania nanoparticles, zirconia nanoparticles, palladium nanoparticles, platinum nanoparticles, nickel nanoparticles, transition-metal catalyst nanoparticles, and combinations thereof.


In certain embodiments, the nanoparticles in the inorganic layer can be chosen from silicate nanoparticles, alumino-silicate nanoparticles, or combinations thereof. In certain embodiments, the nanoparticles can comprise zeolite nanoparticles. The zeolite nanoparticles can comprise zeolites having varying frameworks and differing Si/Al ratios. For example, the nanoparticles can be zeolite Y nanoparticles.

The membranes can further include a selective polymer layer disposed on the inorganic layer. In some cases, the selective polymer layer can be a selective polymer through which gas permeates via diffusion or facilitated diffusion. The selective polymer layer can comprise a selective polymer having a CO₂:N₂ selectivity of at least 10 at 57°C and 1 atm feed pressure. For example, the selective polymer can have a CO₂:N₂ selectivity of at least 25 at 57°C and 1 atm feed pressure (e.g., at least 50, at least 75, at least 100, at least 150, at least 200, at least 250, at least 300, at least 350, at least 400, at least 450, at least 500, at least 550, at least 600, at least 650, at least 700, at least 750, at least 800, at least 850, at least 900, at least 950, at least 1,000, at least 1,100, at least 1,200, at least 1,300, or at least 1,400). In some embodiments, the selective polymer can comprise a selective polymer that has a CO₂:N₂ selectivity of 1,500 or less at 57°C and 1 atm feed pressure (e.g., 1,400 or less, 1,300 or less, 1,200 or less, 1,100 or less, 1,000 or less, 950 or less, 900 or less, 850 or less, 800 or less, 750 or less, 700 or less, 650 or less, 600 or less, 550 or less, 500 or less, 450 or less, 400 or less, 350 or less, 300 or less, 250 or less, 200 or less, 150 or less, 100 or less, 75 or less, or 50 or less). In certain embodiments, the selective polymer can comprise a selective polymer that has a CO₂:N₂ selectivity ranging from any of the minimum values described above to any of the maximum values described above. For example, in certain embodiments, the selective polymer can comprise a selective polymer that has a CO₂:N₂ selectivity of from 10 to 1,500 (e.g., from 75 to 350) at 57°C. The CO₂:N₂ selectivity of the selective polymer can be measured using standard methods for measuring gas permeance known in the art, such as those described in ASTM D1434-82 (2015), which is incorporated herein by reference.


In some embodiments, the selective polymer layer can comprise an amine-containing polymer and an amino acid salt dispersed within the amine-containing polymer. In these embodiments, the amine-containing polymer can serve as a “fixed carrier” and the amino acid salt can serve as a “mobile carrier.”

5 The amine-containing polymer can be, for example, polyvinylamine, polyallylamine, polyethyleneimine, poly-*N*-isopropylallylamine, poly-*N*-tert-butylallylamine, poly-*N*-1,2-dimethylpropylallylamine, poly-*N*-1-methylpropylallylamine, poly-*N*-2-methylpropylallylamine, poly-*N*-1-ethylpropylallylamine, poly-*N*-2-ethylpropylallylamine, poly-*N*-methylallylamine, poly-*N,N*-dimethylallylamine, poly-*N*-ethylallylamine, poly-*N,N*-diethylallylamine, poly(*N*-methyl-*N*-vinylamine), poly(*N*-ethyl-*N*-vinylamine), poly(*N*-isopropyl-*N*-vinylamine), poly(*N*-tert-butyl-*N*-vinylamine), poly(*N*-propyl-*N*-vinylamine), poly(*N,N*-dimethyl-*N*-vinylamine), poly(*N,N*-diethyl-*N*-vinylamine), poly-2-vinylpiperidine, poly-4-vinylpiperidine, polyaminostyrene, chitosan, copolymers, and blends thereof.

15 In some cases, the amine-containing polymer can comprise polyvinylamine. In some cases, the amine-containing polymer can comprise a sterically hindered derivative of polyvinylamine. In some embodiments, the sterically hindered derivative of polyvinylamine comprises a polymer having the structure below



20 wherein R_1 and R_2 are, independently for each occurrence, hydrogen, alkyl, alkenyl, alkynyl, aryl, or cycloalkyl, or R_1 and R_2 , together with the nitrogen atom to which they are attached, form a heterocyclic ring, with the proviso that at least one of R_1 and R_2 is not hydrogen; and n is an integer from 10 to 25,000. In some embodiments, the sterically hindered derivative of polyvinylamine comprises a random copolymer or block copolymer having the structure below




25 wherein R_1 and R_2 are, independently for each occurrence, hydrogen, alkyl, alkenyl, alkynyl, aryl, or cycloalkyl, or R_1 and R_2 , together with the nitrogen atom to which they are attached, form a heterocyclic ring, with the proviso that at least one of R_1 and R_2 is not hydrogen; m is an integer from 10 to 10,000; and n is an integer from 10 to 10,000.


The amine-containing polymer can be a high molecular weight amine-containing polymer. For example, the amine-containing polymer can have a weight average molecular


weight of at least 500,000 Da (e.g., at least 700,000 Da, or at least 1,000,000 Da). In certain embodiments, the amine-containing polymer can have a weight average molecular weight of from 500,000 Da to 5,000,000 Da, or from 500,000 Da to 2,000,000 Da. In particular embodiments, the amine-containing polymer can be polyvinylamine or a sterically hindered derivative of polyvinylamine having a weight average molecular weight of at least 500,000 Da (e.g., at least 700,000 Da, or at least 1,000,000 Da). For example, the amine-containing polymer can be polyvinylamine or a sterically hindered derivative of polyvinylamine having a weight average molecular weight of from 500,000 Da to 5,000,000 Da, or from 500,000 Da to 2,000,000 Da. The amine-containing polymer can also be a modest molecular weight amine-containing polymer. For example, the amine-containing polymer can have a weight average molecular weight of at least 50,000 Da (e.g., at least 100,000 Da, or at least 500,000 Da). In certain embodiments, the amine-containing polymer can have a weight average molecular weight of from 50,000 Da to 500,000 Da.

The amino acid salt can be a salt of any suitable amino acid. The amino acid salt may be derived, for instance, from glycine, arginine, lysine, histidine, 6-aminohexanoic acid, proline, sarcosine, methionine, or taurine. In some cases, the amino acid salt can comprise a salt of a compound defined by the formula below




wherein, independently for each occurrence in the amino acid, each of R₁, R₂, R₃ and R₄ is selected from one of the following

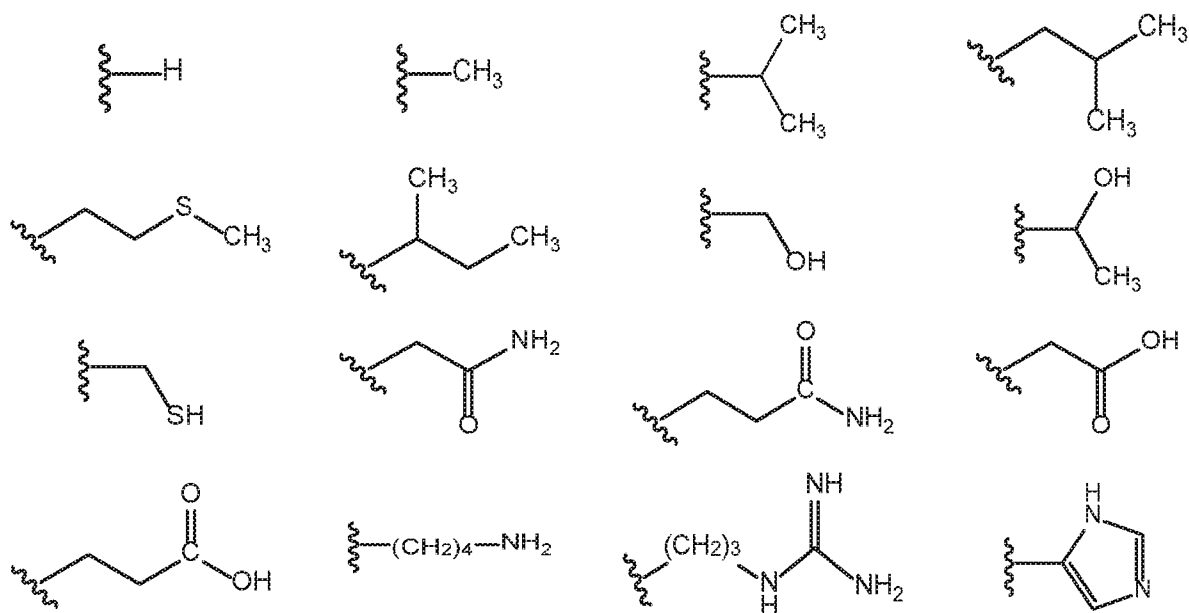

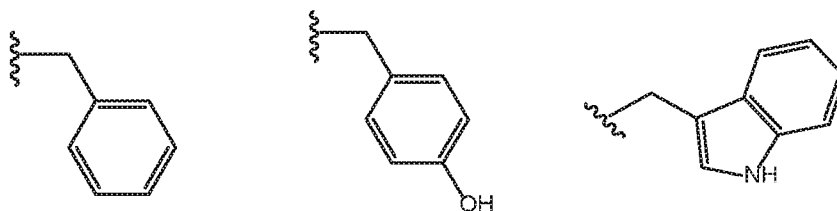

or R_1 and R_3 , together with the atoms to which they are attached, form a five-membered heterocycle defined by the structure below when n is 1, or a six-membered heterocycle defined by the structure below when n is 2




- 5 Poly(amino-acids), for example, polyarginine, polylysine, polyonithine, or polyhistidine may also be used to prepare the amino acid salt. In one embodiment, the amino acid salt is an amino acid potassium salt, prepared via reaction between potassium hydroxide in solution and an amino acid. In another embodiment, the amino acid salt is an amino acid sodium salt, prepared via reaction between sodium hydroxide in solution and an amino acid. In another further
10 embodiment, the amino acid salt is an amino acid lithium salt, prepared via reaction between lithium hydroxide in solution and an amino acid. In certain embodiments, the amino acid salt can comprise a glycinate salt (e.g., sodium glycinate, potassium glycinate, lithium glycinate, or piperazine glycinate).


In some embodiments, the selective polymer layer can comprise at least 30% by weight
15 (e.g., at least 35% by weight, at least 40% by weight, at least 45% by weight, at least 50% by weight, at least 55% by weight, at least 60% by weight, at least 65% by weight, at least 70% by weight, or at least 75% by weight) amino acid salt, based on the total weight of the selective polymer layer. In some embodiments, the selective polymer layer can comprise 80% or less by weight (e.g., 75% or less by weight, 70% or less by weight, 65% or less by weight, 60% or less
20 by weight, 55% or less by weight, 50% or less by weight, 45% or less by weight, 40% or less by weight, or 35% or less by weight) amino acid salt based on the total weight of the selective polymer layer.

The amount of amino acid salt present in the selective polymer layer can range from any of the minimum values described above to any of the maximum values described above. For
25 example, in some embodiments, the selective polymer layer can comprise from 30% to 70% by weight amino acid salt, based on the total weight of the selective polymer layer.

In other embodiments, the selective polymer layer can comprise a sterically hindered amine-containing polymer. The sterically hindered amine can serve as a “fixed carrier.” The sterically hindered amine-containing polymer can include a sterically hindered amine sidechain. Sterically hindered amine sidechains include either a primary amine that is attached to a tertiary carbon or a secondary amine that is attached to at least one secondary carbon or tertiary carbon. In some cases, the sterically hindered amine-containing polymer can comprise a sterically hindered derivative of polyvinylamine. In some embodiments, the sterically hindered derivative of polyvinylamine comprises a polymer having the structure below



wherein R_1 and R_2 are, independently for each occurrence, hydrogen, alkyl, alkenyl, alkynyl, aryl, or cycloalkyl, or R_1 and R_2 , together with the nitrogen atom to which they are attached, form a heterocyclic ring, with the proviso that at least one of R_1 and R_2 is not hydrogen; and n is an integer from 10 to 25,000. In some embodiments, the sterically hindered derivative of polyvinylamine comprises a random copolymer or block copolymer having the structure below




wherein R_1 and R_2 are, independently for each occurrence, hydrogen, alkyl, alkenyl, alkynyl, aryl, or cycloalkyl, or R_1 and R_2 , together with the nitrogen atom to which they are attached, form a heterocyclic ring, with the proviso that at least one of R_1 and R_2 is not hydrogen; m is an integer from 10 to 10,000; and n is an integer from 10 to 10,000.

The sterically hindered amine-containing polymer can be a high molecular weight sterically hindered amine-containing polymer. For example, the sterically hindered amine-containing polymer can have a weight average molecular weight of at least 500,000 Da (e.g., at least 700,000 Da, or at least 1,000,000 Da). In certain embodiments, the sterically hindered amine-containing polymer can have a weight average molecular weight of from 500,000 Da to 5,000,000 Da, or from 500,000 Da to 2,000,000 Da. In particular embodiments, the sterically hindered amine-containing polymer can be a sterically hindered derivative of polyvinylamine having a weight average molecular weight of at least 500,000 Da (e.g., at least 700,000 Da, or at least 1,000,000 Da). For example, the sterically hindered amine-containing polymer can be a sterically hindered derivative of polyvinylamine having a weight average molecular weight of from 500,000 Da to 5,000,000 Da, or from 500,000 Da to 2,000,000 Da. The sterically hindered


amine-containing polymer can also be a modest molecular weight amine-containing polymer. For example, the amine-containing polymer can have a weight average molecular weight of at least 50,000 Da (e.g., at least 100,000 Da, or at least 500,000 Da). In certain embodiments, the amine-containing polymer can have a weight average molecular weight of from 50,000 Da to


Optionally in these embodiments, the selective polymer layer can further include a low molecular weight amino compound dispersed within the sterically hindered amine-containing polymer. In these embodiments, the sterically hindered amine-containing polymer can serve as a “fixed carrier” and the low molecular weight amino compound can serve as a “mobile carrier.” The low molecular weight amino compound can have a molecular weight of 1,000 Da or less (e.g., 800 Da or less, 500 or less, 300 Da or less, or 250 Da or less). In some embodiments, the low molecular weight amino compound can be non-volatile at the temperatures at which the membrane will be stored or used. For example, the low molecular weight amino compound can comprise a salt of a primary amine or a salt of a secondary amine.

In certain embodiments, the low molecular weight amino compound can comprise an amino acid salt. The amino acid salt can be a salt of any suitable amino acid. In some cases, the amino acid salt can comprise a salt of a compound defined by the formula below




wherein, independently for each occurrence in the amino acid, each of R₁, R₂, R₃ and R₄ is selected from one of the following

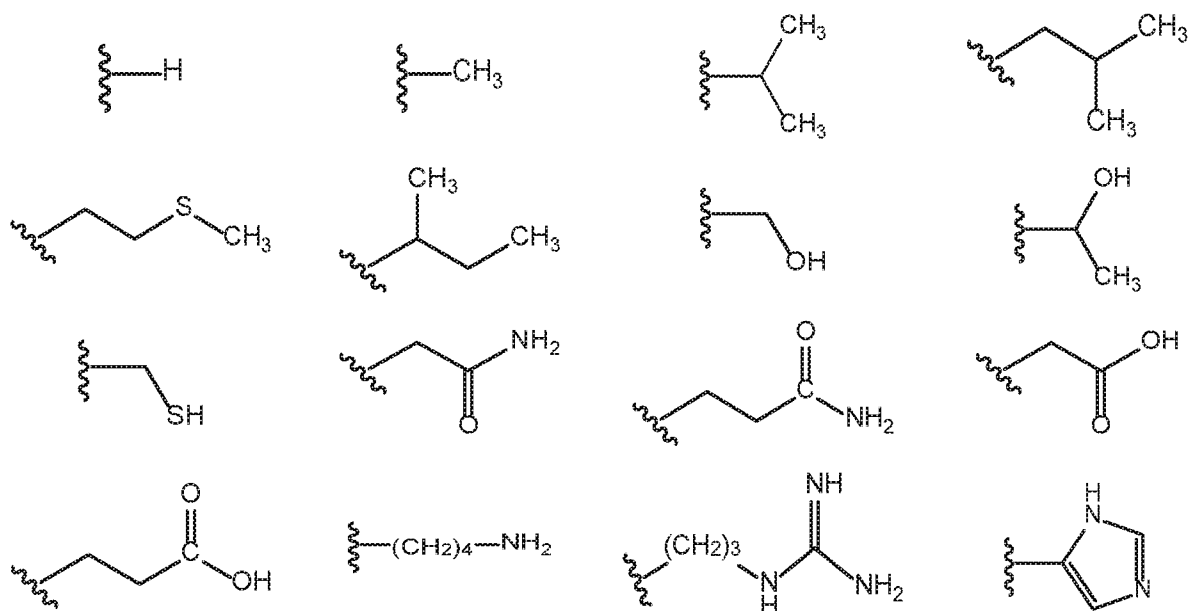

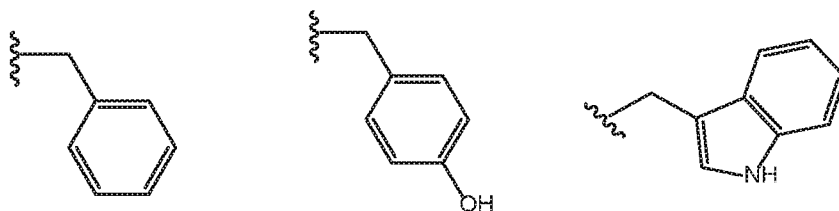

or R_1 and R_3 , together with the atoms to which they are attached, form a five-membered heterocycle defined by the structure below when n is 1, or a six-membered heterocycle defined by the structure below when n is 2



- 5 In certain embodiments, the amino acid salt can comprise a glycinate salt (e.g., sodium glycinate, potassium glycinate, lithium glycinate, or piperazine glycinate). The selective polymer layer can comprise from 30% to 80% by weight amino acid salt, based on the total weight of the selective polymer layer.

Other suitable low molecular weight amino compounds include aminoisobutyric acid-
 10 potassium salt, aminoisobutyric acid-lithium salt, aminoisobutyric acid-piperazine salt, glycine-potassium salt, glycine-lithium salt, glycine-piperazine salt, dimethylglycine-potassium salt, dimethylglycine-lithium salt, dimethylglycine-piperazine salt, piperadine-2-carboxylic acid-potassium salt, piperadine-2-carboxylic acid-lithium salt, piperadine-2-carboxylic acid-piperazine salt, piperadine-4-carboxylic acid-potassium salt, piperadine-4-carboxylic acid-lithium salt,
 15 piperadine-4-carboxylic acid-piperazine salt, piperadine-3-carboxylic acid-potassium salt, piperadine-3-carboxylic acid-lithium salt, piperadine-3-carboxylic acid-piperazine salt, and blends thereof.

Optionally, the selective polymer layer can further include a hydrophilic polymer. For example, the selective polymer can comprise a combination of a hydrophilic polymer, an amine-
 20 containing polymer, and an amino acid salt; or a combination of a hydrophilic polymer, a sterically hindered amine-containing polymer, and optionally a low molecular weight amino compound. In these embodiments, the selective polymer layer can include any suitable hydrophilic polymer. Examples of hydrophilic polymers suitable for use in the selective polymer layer can include polyvinylalcohol, polyvinylacetate, polyethylene oxide, polyvinylpyrrolidone,
 25 polyacrylamine, a polyamine such as polyallylamine, polyvinyl amine, or polyethylenimine,

copolymers thereof, and blends thereof. In some embodiments, the hydrophilic polymer includes polyvinylalcohol.

When present, the hydrophilic polymer can have any suitable molecular weight. For example, the hydrophilic polymer can have a weight average molecular weight of from 15,000 Da to 2,000,000 Da (e.g., from 50,000 Da to 200,000 Da). In some embodiments, the hydrophilic polymer can include polyvinylalcohol having a weight average molecular weight of from 50,000 Da to 150,000 Da. In other embodiments, the hydrophilic polymer can be a high molecular weight hydrophilic polymer. For example, the hydrophilic polymer can have a weight average molecular weight of at least 500,000 Da (e.g., at least 700,000 Da, or at least 1,000,000 Da).

The selective polymer layer can comprise any suitable amount of the hydrophilic polymer. For example, in some cases, the selective polymer layer can comprise from 10% to 90% by weight (e.g., from 10% to 50% by weight, or from 10% to 30% by weight) hydrophilic polymer, based on the total weight of the components used to form the selective polymer layer.

In some embodiments, the selective polymer can also include a cross-linking agent. Cross-linking agents suitable for use in the selective polymer can include, but are not limited to, formaldehyde, glutaraldehyde, maleic anhydride, glyoxal, divinylsulfone, toluenediisocyanate, trimethylol melamine, terephthalatealdehyde, epichlorohydrin, vinyl acrylate, and combinations thereof. In some embodiments, the cross-linking agent can comprise formaldehyde, glutaraldehyde, or maleic anhydride. The selective polymer can comprise any suitable amount of the cross-linking agent. For example, the selective polymer can comprise 1 to 40 percent cross-linking agents by weight of the selective polymer.

The selective polymer layer can further include a base. The base can act as a catalyst to catalyze the cross-linking of the selective polymer layer (e.g., cross-linking of a hydrophilic polymer with an amine-containing polymer). In some embodiments, the base can remain in the selective polymer and constitute a part of the selective polymer. Examples of suitable bases include potassium hydroxide, sodium hydroxide, lithium hydroxide, triethylamine, *N,N*-dimethylaminopyridine, hexamethyltriethylenetetraamine, potassium carbonate, sodium carbonate, lithium carbonate, and combinations thereof. In some embodiments, the base can include potassium hydroxide. The selective polymer can comprise any suitable amount of the base. For example, the selective polymer can comprise 1 to 40 percent base by weight of the selective polymer.

If desired, the selective polymer layer can be surface modified by, for example, chemical grafting, blending, or coating to improve the performance of the selective polymer layer. For

example, hydrophobic components may be added to the selective polymer layer to alter the properties of the selective polymer layer in a manner that facilitates greater fluid selectivity.

The total thickness of each layer in the membrane can be chosen such that the structure is mechanically robust, but not so thick as to impair permeability. In some embodiments, the selective layer can have a thickness of from 50 nanometers to 5 microns (e.g., from 50 nm to 2 microns, or from 100 nanometers to 750 nanometers, or from 250 nanometers to 500 nanometers). In some embodiments, the inorganic layer can have a thickness of from 50 nanometers to 5 microns (e.g., from 50 nm to 2 microns, or from 100 nanometers to 750 nanometers, or from 250 nanometers to 500 nanometers). In some embodiments, the gas permeable support layer can have a thickness of from 1 micron to 500 microns (e.g., from 50 to 250 microns). In some cases, the membranes disclosed herein can have a thickness of from 5 microns to 500 microns.

Methods

Methods of making the membranes are also disclosed herein. Methods of making membranes can include depositing a nanoparticle dispersion on a gas permeable support layer to form an inorganic layer disposed on the gas permeable support layer. The nanoparticle dispersion can comprise a plurality of discrete nanoparticles having an average particle size of less than 1 micron in a suitable fluid carrier. In some embodiments, depositing the nanoparticle dispersion on the gas permeable support layer can comprise vacuum-assisted dip-deposition of the nanoparticle dispersion on the gas permeable support layer. Methods can further include coating the inorganic layer with a selective polymer (e.g., an amine-containing polymer and an amino acid salt dispersed within the amine-containing polymer, or a sterically hindered amine-containing polymer). In some embodiments, the selective polymer can have a high viscosity when applied to the inorganic layer. For example, the selective polymer can have a viscosity of at least 400 cp (e.g., at least 1000 cp) at 25°C. The viscosity can be measured using a Brookfield viscometer (Brookfield AMETEK, Middleboro, MA).

In one example method of preparing a membrane disclosed herein, zeolite nanoparticles can be dispersed in water via ultrasonication. During sonication, the water can be changed intermittently to prevent a temperature rise. The nanoparticle dispersion can then be deposited onto a gas permeable support layer using a vacuum-assisted dip-depositing set-up. In this set-up, there is a circular or rectangular holder with a hollow handle connected to a Duoseal 1405 liquid ring vacuum pump. The holder has evenly placed grooves for uniform distribution of the vacuum. A porous base, such as a metal plate is held on the holder by the vacuum. The support

to be coated can then be fixed and flattened on the metal plate by both tape and vacuum. The top surface of a gas permeable support can then be dipped tangentially (as in crossflow filtration) into the dispersion and then taken out. The vacuum in addition to assisting the layer formation helps to keep the support flat during the deposition process. After the deposition, the inorganic nanoparticle layer can be dried overnight at room temperature prior to further characterization. The inorganic layer can be characterized by Scanning Electron Microscopy (SEM) and/or Dynamic Light Scattering. Pretreatment of the gas permeable support polymer may be necessary to remove water or other adsorbed species using methods appropriate to the support and the adsorbate. Examples of adsorbed species are, for example, water, alcohols, porogens, and surfactant templates.

The selective polymer can be prepared by first forming a coating solution of the components making up the selective polymer layer in a suitable solvent. One example of a suitable solvent is water. In some embodiments, the amount of water employed will be in the range of from 50% to 99%, by weight of the coating solution. The coating solution can then be used in forming a nonporous selective polymer membrane. The selective polymer can be formed into a nonporous membrane by using any suitable techniques. For example, the coating solution can be coated onto a substrate using any suitable techniques, and the solvent may be evaporated such that a nonporous membrane is formed on the substrate. Examples of suitable coating techniques include, but are not limited to, "knife coating" or "dip coating". Knife coating include a process in which a knife is used to draw a polymer solution across a flat substrate to form a thin film of a polymer solution of uniform thickness after which the solvent of the polymer solution is evaporated, at ambient temperatures or temperatures up to about 100°C or higher, to yield a fabricated membrane. Dip coating include a process in which a polymer solution is contacted with a porous support. Excess solution is permitted to drain from the support, and the solvent of the polymer solution is evaporated at ambient or elevated temperatures. The membranes disclosed can be shaped in the form of hollow fibers, tubes, films, sheets, etc.

In some embodiments, membranes formed from selective polymers containing for example, one or more polymers, a cross-linking agent, and a base in a suitable solvent can be heated at a temperature and for a time sufficient for cross-linking to occur. In one example, cross-linking temperatures in the range from 80°C to 100°C can be employed. In another example, cross-linking can occur from 1 to 72 hours. The resulting solution can be coated onto the top layer of the support coated with the inorganic layer and the solvent evaporated, as discussed above. In some embodiments, a higher degree of cross-linking for the selective

polymer after solvent removal takes place at about 100°C to about 180°C, and the cross-linking occurs in from about 1 to about 72 hours.

An additive may be included in the selective polymer before forming the selective layer to increase the water retention ability of the membrane. Suitable additives include, but are not limited to, polystyrenesulfonic acid-potassium salt, polystyrenesulfonic acid-sodium salt, polystyrenesulfonic acid-lithium salt, sulfonated polyphenyleneoxides, alum, and combinations thereof. In one example, the additive comprises polystyrenesulfonic acid-potassium salt.

In some embodiments, the method of making the membrane can be scaled to industrial levels.

The membranes disclosed herein can be used for separating a gaseous mixture comprising a first gas and a second gas. For example, the membranes can be used to separate an acidic gas from a gaseous mixture containing at least one acidic gas. Methods of using the membrane can include contacting the membrane, on the side comprising the selective polymer, with the gaseous mixture under conditions effective to afford transmembrane permeation of the first gas. In some embodiments, the method can also include withdrawing from the reverse side of the membrane a permeate containing at least the first gas, wherein the first gas is selectively removed from the gaseous stream. The permeate can comprises at least the first gas in an increased concentration relative to the feed stream. The term “permeate” refers to a portion of the feed stream which is withdrawn at the reverse or second side of the membrane, exclusive of other fluids such as a sweep gas or liquid which may be present at the second side of the membrane.

The membrane can be used to separate fluids at any suitable temperature, including temperatures of 100°C or greater. For example, the membrane can be used at temperatures of from 100°C to 180°C. In some embodiments, the membrane can be used at temperatures less than 100°C.

The first gas can include an acid gas. For example, the first gas can be carbon dioxide, hydrogen sulfide, hydrochloric acid, sulfur dioxide, sulfur trioxide, nitrogen oxide, or combinations thereof. In some embodiments, the membrane can be selective to carbon dioxide versus hydrogen, nitrogen, or combinations thereof. In some embodiments, the membrane can be selective to hydrogen sulfide versus hydrogen, nitrogen, or combinations thereof. In some embodiments, the membrane can be selective to hydrochloric acid gas versus hydrogen, nitrogen, or combinations thereof. In some embodiments, the acid gas may be derived from fossil fuels that require hydrogen purification for fuel cell, electricity generation, and hydrogenation

applications, biogas for renewable energy, and natural gas for commercial uses. The membranes can also be used for removal of carbon dioxide from flue gas.

The permeance of the first gas or the acid gas can be at least 100 GPU at 57°C and 1 atm feed pressure. In some embodiments, the permeance of the first gas or the acid gas through the membranes can be up to 3,000 GPU at 57°C and 1 atm feed pressure. For example, the permeance of the first gas or the acid gas through the membranes can be 150 GPU or greater, 200 GPU or greater, 250 GPU or greater, 300 GPU or greater, 400 GPU or greater, 500 GPU or greater, 1,000 GPU or greater, 1,500 GPU or greater, 2,000 GPU or greater, or 2,500 GPU or greater at 57°C and 1 atm feed pressure. The membrane can exhibit a first gas:second gas selectivity of at least 30 at 57°C and 1 atm feed pressure. In some embodiments, the membrane can exhibit a first gas:second gas selectivity of up to 1,500 at 57°C and 1 atm feed pressure. For example, the membrane can exhibit a first gas:second gas selectivity of 35 or greater, 40 or greater, 45 or greater, 50 or greater, 55 or greater, 60 or greater, 65 or greater, 70 or greater, 75 or greater, 80 or greater, 85 or greater, 90 or greater, 95 or greater, 100 or greater, 125 or greater, 150 or greater, 175 or greater, 200 or greater, 225 or greater, 250 or greater, 275 or greater, 300 or greater, 325 or greater, 350 or greater, 375 or greater, 400 or greater, 425 or greater, 450 or greater, 475 or greater, 500 or greater, 550 or greater, 600 or greater, 650 or greater, 700 or greater, 750 or greater, 800 or greater, 850 or greater, 900 or greater, 950 or greater, 1,000 or greater, 1,100 or greater, 1,200 or greater, 1,300 or greater, or 1,400 or greater at 57°C and 1 atm feed pressure. In some embodiments, the permeance and selectivity of the membrane for the first gas or the acid gas can vary at higher or lower temperatures.

Examples

The following examples are put forth so as to provide those of ordinary skill in the art with a complete disclosure and description of how the compounds, compositions, articles, devices and/or methods claimed herein are made and evaluated, and are intended to be purely exemplary and are not intended to limit the scope of the disclosure. Unless indicated otherwise, parts are parts by weight, temperature is in °C or is at ambient temperature, and pressure is at or near atmospheric.

Example 1: Polyvinylamine/Amino Acid Salt Membranes for CO₂ Separation

Provided are membranes formed from polyvinylamine (PVAm) and different amino acid salts for CO₂ separation. High molecular-weight PVAm was synthesized, and different amino acid salts were incorporated into the PVAm solution to prepare thin membranes. In these

membranes, PVAm serves as a fixed carrier for CO₂ transport, and the amino acid salt acts as a mobile carrier for CO₂ transport. The membranes exhibit both high CO₂ permeance and high CO₂/N₂ selectivity. The membranes can be used to perform gas separations, including CO₂ capture from flue gas in power plants and the removal of carbon dioxide and hydrogen sulfide from synthesis gas, H₂-containing mixtures, and CH₄-containing mixtures.

Background

CO₂ emissions from the fossil fuel combustion are believed to be one of the main reasons for global warming, and therefore there is a significant demand of developing technologies for CO₂ separation from flue gas. Membrane separation has become an energy-efficient and cost-effective alternative to conventional technologies including absorption processes using amine-based solvents, adsorption processes employing solid adsorbents, and cryogenic distillation.

Facilitated transport membranes can provide a high CO₂ permeance while maintaining a high CO₂/N₂ selectivity as compared to solution-diffusion membranes. In the facilitated transport membranes, there is a reversible reaction between the CO₂ molecules and the reactive carriers which usually contain amino groups. Fixed carriers (amine-containing polymers) and mobile carriers (amine-containing small molecules) are two major categories of carriers for CO₂ transport in the facilitated transport membranes. The fixed carriers such as polyallylamine [1-5], polyethylenimine [1,6] and polyvinylamine [7-10] have been reported in the literatures. The common mobile carriers that have been reported in the literature include ethylenediamine [10-12], amino acid salts [13,14], and alkanolamines [15,16]. In facilitated transport membranes, CO₂ molecules react with amine carriers first, and then the reaction products transport across the membrane, releasing the CO₂ molecules to the permeate side of the membrane. By this mechanism, the solubility of CO₂ molecules in the membrane can be greatly enhanced. On the other hand, the non-reactive molecules, such as N₂, H₂, CH₄, and CO, transport through the membrane only by the solution-diffusion mechanism. In this way, facilitated transport mechanisms can provide for membranes that exhibit both a high CO₂ permeance, and a high CO₂ selectivity vs. other gases (e.g., N₂, H₂, CH₄, and/or CO).

Overview

Polyvinylamine (PVAm) with a high molecular weight was synthesized. The PVAm can act as a fixed carrier in the membranes. Various amino acid salts can be incorporated within the PVAm to serve as a mobile carrier. A viscous PVAm/mobile carrier coating solution was knife-coated onto the different substrates to form a thin selective layer of the membranes.

As the fixed-carrier in the selective polymer layer, PVAm not only provides amino groups for CO₂/N₂ separation, but also provides the mechanical strength and film-forming ability of the membrane. Therefore, a higher molecular weight of PVAm is beneficial. First, with a higher molecular weight, the polymer matrix will be stronger, which makes the membrane more stable. Second, due to the stronger polymer matrix, more mobile carriers can be incorporated into the polymer solution, which can further improve the transport performance. Third, a higher viscosity of the casting solution can be obtained with a higher molecular weight of PVAm, which can reduce the penetration of polymer solution into the substrate, resulting in less mass transfer resistance and higher CO₂ permeance. Moreover, thinner membranes can be obtained from the solution with a low concentration and a high viscosity, which can result in a higher CO₂ permeance.

The PVAm synthesized herein exhibited a much higher molecular weight than commercially available PVAm (e.g., LUPAMIN[®], commercially available from BASF Corporation). Further, the viscosity of a 3 wt.% solution of the PVAm synthesized herein exhibited a remarkably higher viscosity than a 3 wt.% solution of LUPAMIN[®] polymer. Moreover, because LUPAMIN[®] is prepared by basic hydrolysis with sodium hydroxide (NaOH), and the resulting byproduct formed during hydrolysis (sodium formate salt) remains in the LUPAMIN[®]. The inclusion of a large amount of non-reactive salts in the polymer can negatively impact the stability of membranes formed from the polymer due to the salting out problem. By preparing the PVAm using acidic hydrolysis, no byproduct is formed. Overall, the high molecular weight PVAm prepared herein offers significant advantages in terms of resulting membrane transport performance as compared to commercially available LUPAMIN[®].

In the case of the facilitated transport mechanism, the CO₂ transport of the fixed carrier is limited by the mobility of the CO₂-carrier complex. Incorporation of mobile carriers enhances CO₂ transport. Here, various amounts of amino acid salts were incorporated into the PVAm solution to form a coating solution. By incorporating mobile carriers into the membrane, CO₂ permeance could be increased. CO₂ permeance generally increases as the amount of mobile carrier is increased. However, upon incorporation of very high levels of mobile carrier (e.g., more than 65 wt.% mobile carrier, based on the total weight of the selective polymer layer), the stability of the membrane began to be compromised. At these high loading levels, the polymer matrix lacked the structural integrity to contain the mobile carrier. In another words, the mobile carrier could begin to leak from the selective polymer layer into adjacent layers of the polymer

membrane (e.g., into the pores of the support layer or the inorganic layer), diminishing membrane performance.

PVAm Synthesis

25.726 g N-vinylformamide (NVF) monomer was added to 58.955 g H₂O to form a 30 wt.% monomer solution. The solution was placed in a 250-mL 3-neck round-bottom flask under nitrogen protection, and preheated to 50°C in a water bath. 0.129 g 2,2'-azobis(2-methylpropionamidine) dihydrochloride (AIBA) initiator (initiator/monomer weight ratio = 0.5/100) was added to the solution. Then, the polymerization was carried out under nitrogen at 50°C for 3 h. After the polymerization, the polymer solution was transferred to 360 mL 2 M HCl aqueous solution to carry out the acidic hydrolysis at 70°C for 5 h. After hydrolysis, the polymer solution was poured into a large amount of ethanol (ethanol/polymer solution volume ratio = 4/1) for precipitation. The obtained polymer was dried in a vacuum oven at 60°C for 48 hours and then dissolved in water to form a 3 wt.% solution. Strong base anion-exchange resin was added to the polymer solution to adjust the pH to 10, followed by vacuum filtration to remove the resin.

The aforementioned 3 wt.% PVAm solution showed a viscosity of 486 cp which was characterized using the Brookfield Digital Viscometer DV-E (Brookfield Engineering Laboratories, Inc., Middleboro, MA). A weight average molecular weight of 719,000 which was characterized by dynamic light scattering (DLS) using Zetasizer Nano ZS (Malvern Instruments Inc., Westborough, MA).

High Molecular-Weight PVAm Synthesis

The polymerization was carried out as described in Example 1 except that 25.726 g NVF was added in 38.389 g H₂O to form a solution with 40 wt.% monomer concentration. 0.036 g AIBA was added as the initiator (i.e., an initiator/monomer weight ratio of 0.14/100). All the other synthesis conditions were the same as in Example 1. The resulting 3 wt.% PVAm solution exhibited a viscosity of 1,400 cp. The PVAm had a weight average molecular weight of 1,200,000.

Piperazine Glycinate Mobile Carrier Synthesis

21.532 g glycine (98.5% purity) was dissolved in 99.662 g water to form a 17.50 wt.% solution and stirred for 2 h at room temperature. Then, an equivalent molar amount of piperazine (i.e., a stoichiometric amount, 24.583 g piperazine (99% purity)) was added to react with glycine to form the amino acid salt (piperazine glycinate). The reaction took place at room temperature for 2 h. The concentration of the resulting piperazine glycinate solution was 31.24 wt.%.

Potassium Glycinate Mobile Carrier Synthesis

20.248 g potassium hydroxide (KOH, 85% purity) was dissolved in 25.746 g water to form a KOH aqueous solution with a concentration of 37.42 wt.%. 22.102 g glycine (98.5% purity) was dissolved in 104.195 g water to form a 17.24 wt.% solution and stirred for 2 h at room temperature. 43.450 g KOH aqueous solution with a concentration of 37.42 wt.% was added to the glycine solution to form a potassium glycinate solution with a concentration of 19.33 wt.%.

Lithium Glycinate Mobile Carrier Synthesis

14.464 g lithium hydroxide monohydrate (LiOH·H₂O) was dissolved in 77.351 g water to form a LiOH aqueous solution with a concentration of 8.99 wt.%. 4.420 g glycine (98.5% purity) was dissolved in 20.839 g water to form a 17.24 wt.% solution and stirred for 2 h at room temperature. 15.480 g LiOH aqueous solution with a concentration of 8.99 wt.% was added to the glycine solution to form a lithium glycinate solution with a concentration of 11.54 wt.%.

Piperazine Glycinate/PVAm Membrane Preparation

A membrane comprising 65 wt.% piperazine glycinate and 35 wt.% PVAm was prepared. To 10.000 g 3 wt.% PVAm solution prepared as described in Example 1, 1.783 g piperazine glycinate solution with a concentration of 31.24 wt.% described in Example 1 was added. The mixture was stirred at room temperature under N₂ purge with a 100 cc/min flow rate to form a homogeneous concentrated coating solution. The total solid concentration of the coating solution was 20 wt.%. The amine-containing coating solution was coated on top of a zeolite Y nanoparticle layer using a knife-coating method. In other words, the coating solution was coated onto the flat-sheet zeolite Y seed layer (with 40-nm nanoparticles) deposited on top of Millipore PES300 substrate using a GARDCO adjustable micrometer film applicator (Paul N. Gardner Company, Pompano Beach, FL) with a 1-μm wet film gap setting. The membrane was dried in a fume hood at room temperature for overnight before testing. The dry membrane thickness was around 100 nm.

Gas transport performance measurements were conducted using a permeation apparatus as described below. Briefly, the composite membrane was loaded into a stainless steel rectangular permeation cell inside a temperature-controlled oven (Bemco Inc. Simi Valley, CA) with an effective membrane area of 3.4 cm². A countercurrent flow configuration (with a feed gas flow rate of 60 cc/min and a sweep gas flow rate of 30 cc/min) was applied to offer the maximum driving force across the membrane. The binary gas mixture containing 20% CO₂ and 80% N₂ was used as the feed gas, while argon was used as the sweep gas. Both the feed gas and

the sweep gas were humidified by passing through 100 mL water in a 500 mL stainless steel humidifier (Swagelok, Westerville, OH) filled with 60% (by volume) packing of glass Raschig rings, to achieve a water content of 17% at 57°C. The testing temperature was set to be 57°C, which is the typical flue gas stream temperature. The testing pressures were 1.5 psig for the feed side and 1.0 psig for the sweep side, respectively. The outlet gas compositions of both retentate and permeate streams were analyzed by using a gas chromatograph (GC) equipped with a thermal conductivity detector (TCD) (Agilent Technologies, Palo Alto, CA). SUPELCO Carboxen[®] 1004 micropacked GC column (Sigma-Aldrich, St. Louis, MO) was used in this work. CO₂ permeance and CO₂/N₂ selectivity are shown below.

Table 1. Transport result of 65/35 piperazine glycinate/PVAm membrane with 100 nm thickness.

Testing T (°C)	Feed P (psig)	Sweep P (psig)	Water Content	CO ₂ Permeance (GPU)	CO ₂ /N ₂ Selectivity
57	1.5	1.0	17%	1100	210

Potassium Glycinate/PVAm Membrane Synthesis

A membrane comprising 55 wt.% potassium glycinate and 45 wt.% PVAm was prepared. To 10.000 g 3 wt.% PVAm solution prepared as described in Example 1, 1.897g potassium glycinate solution with a concentration of 19.33 wt.% described in Example 1 was added. The membrane was prepared as described in Example 1 except that the wet film gap setting was 2 μm. The dry membrane thickness was around 200 nm. The membrane transport performance is shown below.

Table 2. Transport result of 55/45 potassium glycinate/PVAm membrane with 200 nm thickness.

Testing T (°C)	Feed P (psig)	Sweep P (psig)	Water Content	CO ₂ Permeance (GPU)	CO ₂ /N ₂ Selectivity
57	1.5	1.0	17%	620	175

Lithium Glycinate/PVAm Membrane Synthesis

A membrane comprising 50 wt.% lithium glycinate and 50 wt.% PVAm was prepared. To 10.000 g 3 wt.% PVAm solution prepared as described in Example 1, 2.600 g lithium glycinate solution with a concentration of 11.54 wt.% described in Example 1 was added. The membrane was prepared as described in Example 1 except that the wet film gap setting was 3 μm . The dry membrane thickness was around 300 nm. The membrane transport performance is shown below.

Table 3. Transport result of 50/50 lithium glycinate/PVAm membrane with 300 nm thickness.

Testing T (°C)	Feed P (psig)	Sweep P (psig)	Water Content	CO ₂ Permeance (GPU)	CO ₂ /N ₂ Selectivity
57	1.5	1.0	17%	550	162

Piperazine Glycinate/PVAm/Sodium Dodecyl Sulfate (SDS) Membrane Synthesis

A coating solution comprising 65 wt.% piperazine glycinate and 35 wt.% PVAm was prepared as described in Example 1. To the coating solution, 0.45 g sodium dodecyl sulfate (SDS) surfactant solution with a concentration of 10 wt.% was added (water was used as the solvent to dissolve SDS). The SDS amount was 5 wt.% out of the total solid composition. The final coating solution containing SDS surfactant was coated on a lab-scale polyethersulfone (PES) substrate, which was fabricated using a phase-inversion technique. The reason for incorporating SDS surfactant is that it could improve the adhesion between the amine-containing polymer layer and the PES substrate. Without the SDS surfactant, a lower selectivity (less than 30) was observed. The membrane was coated using the same procedure as described in Example 1, except that a 2- μm wet film gap-setting was used to obtain a dry membrane thickness of around 200 nm. The membrane transport performance is shown below.

Table 4. Transport result of 65/35 piperazine glycinate/PVAm membrane including 5 wt.% SDS in the total solid membrane composition with 200 nm thickness.

Testing T (°C)	Feed P (psig)	Sweep P (psig)	Water Content	CO ₂ Permeance (GPU)	CO ₂ /N ₂ Selectivity
57	1.5	1.0	17%	931	189

References

- [1] W. S. W. Ho, Membranes comprising aminoacid salts in polyamine polymers and blends, U.S. Patent No. 6,099,621 (2000).
- [2] J. Zou, W. S. W. Ho, CO₂-selective polymeric membranes containing amines in crosslinked poly(vinyl alcohol), J. Membr. Sci. 286 (2006) 310-321.
- [3] J. Huang, J. Zou, W. S. W. Ho, Carbon dioxide capture using a CO₂-selective facilitated transport membrane, Ind. Eng. Chem. Res. 47 (2008) 1261-1267.
- [4] Y. Zhao, W. S. W. Ho, CO₂-selective membranes containing sterically hindered amines for CO₂/H₂ separation, Ind. Eng. Chem. Res. 52 (2013) 8774-8782.
- 10 [5] Y. Zhao, B. T. Jung, L. Ansaloni, W. S. W. Ho, Multiwalled carbon nanotube mixed matrix membranes containing amines for high pressure CO₂/H₂ separation, J. Membr. Sci. 459 (2014) 233-243.
- [6] H. Matsuyama, A. Terada, T. Nakagawara, Y. Kitamura, M. Teramoto, Facilitated transport of CO₂ through polyethylenimine/poly(vinyl alcohol) blend membrane, J. Membr. Sci. 163 (1999) 221-227.
- 15 [7] T.-J. Kim, B. Li, M.-B. Hägg, Novel fixed-site-carrier polyvinylamine membrane for carbon dioxide capture, J. Poly. Sci. Part B: Poly. Phys. 42 (2004) 4326-4336.
- [8] L. Deng, T.-J. Kim, M.-B. Hägg, Facilitated transport of CO₂ in novel PVAm/PVA blend membrane, J. Membr. Sci. 340 (2009) 154-163.
- 20 [9] Z. Qiao, Z. Wang, C. Zhang, S. Yuan, Y. Zhu, J. Wang, PVAm-PIP/PS composite membrane with high performance for CO₂/N₂ separation, AIChE Journal 59 (2013) 215-228.
- [10] S. Yuan, Z. Wang, Z. Qiao, M. Wang, J. Wang, S. Wang, Improvement of CO₂/N₂ separation characteristics of polyvinylamine by modifying with ethylenediamine, J. Membr. Sci. 378 (2011) 425-437.
- 25 [11] O. H. LeBlanc, W. J. Ward, S. L. Matson, S. G. Kimura, Facilitated transport in ion-exchange membranes, J. Membr. Sci. 6 (1980) 339-343.
- [12] H. Matsuyama, M. Teramoto, H. Sakakura, K. Iwai, Facilitated transport of CO₂ through various ion exchange membranes prepared by plasma graft polymerization, J. Membr. Sci. 117 (1996) 251-260.
- 30 [13] W. S. W. Ho, Membranes comprising salts of aminoacids in hydrophilic polymers, U.S. Patent No. 5,611,843 (1997).

- [14] R. Yegani, H. Hirozawa, M. Teramoto, H. Himei, O. Okada, T. Takigawa, N. Ohmura, N. Matsumiya, H. Matsuyama, Selective separation of CO₂ by using novel facilitated transport membrane at elevated temperatures and pressures, *J. Membr. Sci.* 291 (2007) 157-164.
- 5 [15] Y.-S. Kim, S.-M. Yang, Absorption of carbon dioxide through hollow fiber membranes using various aqueous absorbents, *Sep. Purif. Technol.* 21 (2000) 101-109.
- [16] G. J. Francisco, A. Chakma, X. Feng, Membranes comprising of alkanolamines incorporated into poly(vinyl alcohol) matrix for CO₂/N₂ separation. *J. Membr. Sci.* 303 (2007) 54-63.

10

Example 2: Sterically Hindered Polyvinylamine Membranes for CO₂ Separation

Provided are procedures for the preparation of polyvinylamine (PVAm) and sterically hindered polyvinylamine membranes, and improved methods for synthesizing high molecular weight PVAm. High molecular weight polyvinylamine (PVAm) was synthesized. The PVAm
15 can act as a fixed carrier in the membranes. Optionally, mobile carriers, including varying amino acid salts, can be incorporated within the PVAm. The resulting selective polymer solutions can be used to prepare thin selectively permeable membranes. The membranes can exhibit both high, improved CO₂ permeance and CO₂/N₂ selectivity. The high-molecular-weight PVAm was modified into sterically hindered polyamines with different degrees of steric hindrance. The
20 membranes prepared from sterically hindered polyamines showed improvement in CO₂/N₂ separation performance over those from unhindered polyvinylamine. The membranes are useful for gas separations including CO₂ capture from flue gas in power plants and the removal of carbon dioxide and hydrogen sulfide from synthesis gas, H₂-containing mixtures, and CH₄-containing mixtures.

Background

CO₂ capture from flue gas (main component: N₂) offers the ability to dramatically reduce greenhouse gas emission, and CO₂ separation from synthesis gas is effective for hydrogen purification. Due to the inherent advantages of membrane separation (e.g., high energy efficiency, operational simplicity, small footprint, and the elimination of thermodynamic
30 equilibrium capacity limitations), membrane technology is receiving increasing attention for applications in CO₂ separation [17]. For most conventional polymer membranes, CO₂/N₂ separation follows the solution-diffusion mechanism. The key challenge of solution-diffusion membranes is the trade-off between permeability and selectivity, i.e., the Robeson's Upper

Bound [18]. Facilitated transport membranes, which are based on selective reversible reactions, can overcome Robeson's upper bound for the solution-diffusion membranes.

Inside facilitated transport membranes, CO₂ follows the facilitated transport mechanism via reversible chemical reactions with carriers, while non-reactive gases, such as H₂, CO, and N₂, diffuse through the membranes via the solution-diffusion mechanism [19]. Therefore, CO₂ transport is facilitated and high CO₂/non-reactive gas selectivity can be achieved.

Sterically hindered amines are defined as either primary amines in which the amino group is attached to a tertiary carbon or a secondary amine in which the amino group is attached to at least one secondary or tertiary carbon [20]. CO₂ reaction with sterically unhindered amines follows the carbamate zwitterion mechanism proposed by Caplow [21] and Danckwerts [22] and can be described by Eq. 1. The reaction of CO₂ and sterically hindered amines can be described by Eq. 2.



For an unhindered amine that forms a stable carbamate ion with CO₂, the stoichiometric loading of CO₂ is one mole of CO₂ per two moles of the sterically unhindered amine as shown in Eq. 1. However, for a sterically hindered amine, the carbamate ion is not stable due to the incorporation of a bulky substituent group to the nitrogen site, and it is thus converted into the bicarbonate ion. Therefore, the CO₂ loading is doubled, with one mole of CO₂ per mole of the sterically hindered amine, which is the theoretical maximum loading [23].

Overview

Amine carriers are important for the CO₂ separation performance of a facilitated transport membrane. Amine carriers exhibiting a high CO₂ loading capacity and reaction rate are desirable. As described above, sterically hindered amines exhibit superior CO₂ loading capacity as compared to unhindered amines. Meanwhile, due to the presence of more free amino groups, the reaction rate of CO₂ with sterically hindered amines can be increased, though the steric hindrance can lead to a lower reaction rate constant.

Here, polyvinylamine was selected as an amine carrier, since it possesses the highest content of amino groups among the common polyamines (polyallylamine and polyethylenimine) for CO₂ facilitated transport. High molecular weight polyvinylamine was synthesized and

purified with an improved purification method, which helped to significantly improve CO₂/N₂ separation performance.

PVAm was then modified to incorporate sterically hindered amines having different degrees of steric hindrance. Solutions of the resultant sterically hindered polyamines were coated onto polyethersulfone by knife coating to obtain membranes with a thickness of around 8 – 12 microns. The steric hindrance degrees of different sterically hindered polyamines were calculated. The membrane performance was characterized by the gas transport measurement under the typical conditions for flue gas CO₂ capture. The resultant sterically hindered polyvinylamine membranes exhibited higher CO₂ permeability and CO₂/N₂ selectivity under the test conditions for flue gas carbon capture. Under the testing conditions, CO₂ permeability was improved by 24% and CO₂/N₂ selectivity was increased by 14% by modifying polyvinylamine into poly(N-methyl-N-vinylamine). These results demonstrate the effect of steric hindrance on CO₂ separation performance, as incorporation of a methyl group enhances CO₂ loading capacity. Sterically hindered poly(N-isopropyl-N-vinylamine) and poly(N-tert-butyl-N-vinylamine) membranes showed 15% and 11% improvements on CO₂ permeability, respectively.

These results can have significant impacts on industrially important CO₂ separations, including CO₂ capture from flue gas and hydrogen purification from synthesis gas. Moreover, as a result of improved amine carriers, the membranes synthesized in the present invention can be applied for CO₂ capture from flue gas in coal- and natural gas-fired power plants and from <1% CO₂ concentration sources as well as for hydrogen purification from synthesis gas.

High-Molecular-Weight PVAm Synthesis and Purification

First, the monomer N-vinylformamide (NVF) was purified by vacuum distillation at 42°C to remove the inhibitor and stored at -10°C. Free radical polymerization of NVF was initiated by the decomposition of AIBA and carried out at 50°C for 3 h in water under nitrogen protection. The initial monomer concentration was 40 wt.%, and the initiator/monomer ratio was 0.14/100 (by weight). After the polymerization, 2 M HCl aqueous solution was added to catalyze the acidic hydrolysis, which lasted for 5 h at 70°C. The molar ratio of HCl to amide groups was 2/1. After hydrolysis, the polymer solution was poured into a large amount of ethanol (ethanol/polymer solution volume ratio = 4/1). The polymer was precipitated out from ethanol as white solids and then redissolved into water to form a 4 wt.% aqueous solution, followed by a second-time ethanol precipitation. After the second time ethanol precipitation, the polymer obtained had a narrower molecular weight distribution, which improved the morphology and mechanical strength of the resultant membrane synthesized. The obtained polymer was dried in a vacuum oven at 50°C for

24 hours and then redissolved in water. An excessive amount of strong anion-exchange resin was used to adjust the pH of the polyvinylamine solution. The resin was removed by vacuum filtration. The resultant polyvinylamine solution had a pH of 10.4.

A membrane comprising 65 wt.% piperazine glycinate and 35 wt.% PVAm synthesized and purified via the aforementioned procedures, was prepared on polyethersulfone (PES) substrates (pore size: 39 nm), with a thickness of around 150 nm. The synthesized membrane was loaded into a stainless-steel rectangular permeation cell with an effective membrane area of 2.7 cm² inside a temperature-controlled oven (Bemco Inc. Simi Valley, CA). A countercurrent flow configuration (with a feed gas flow rate of 98 cc/min and a sweep gas flow rate of 30 cc/min) was applied to offer the maximum driving force across the membrane. The binary gas mixture containing 20% CO₂ and 80% N₂ (on dry basis) was used as the feed gas, while argon was used as the sweep gas. Both the feed gas and the sweep gas were humidified by each passing through 100 mL water in a 500-mL stainless-steel humidifier (Swagelok, Westerville, OH) filled with 60% (by volume) packing of glass Raschig rings, to achieve a water vapor content of about 17% at 57°C. The testing temperature was set to be 57°C, which is the typical flue gas stream temperature. The testing pressures were 1.1 psig for the feed side and 1.0 psig for the sweep side, respectively. The outlet gas compositions of both retentate and permeate streams were analyzed by using a gas chromatograph (GC) equipped with a thermal conductivity detector (TCD) (Agilent Technologies, Palo Alto, CA). The SUPELCO Carboxen[®] 1004 micropacked GC column (Sigma-Aldrich, St. Louis, MO) was used in this work. The gas transport measurement results are listed in Table 5. As shown in this table, the membrane with PVAm purified with 2-time ethanol precipitation exhibited significantly higher CO₂ permeance than that with 1-time ethanol precipitation. In addition, the former had a higher CO₂/N₂ selectivity than the latter.

Table 5. Transport measurement results of the membranes with PVAm purified with 1-time ethanol precipitation and 2-time ethanol precipitation.

	CO ₂ Permeance (GPU)	CO ₂ /N ₂ Selectivity
1-time ethanol precipitation	644	138
2-time ethanol precipitation	757	151

Poly(N-methyl-N-vinylamine) Membrane Synthesis

The aqueous polyvinylamine solution was adjusted to have a pH of 12.0, which ensured the amino groups of polyvinylamine were all deprotonated to free amino groups. To synthesize poly(N-methyl-N-vinylamine), iodomethane and KOH, each at one equivalent amount, were added into the above PVAm solution. The reaction was conducted at 45°C for 48 hours in a reactor equipped with a cold-water condenser. After the reaction, the solution was cooled down to room temperature and then transferred to the cellulose dialysis tubing, which was sealed at both ends using clips and put in deionized water under stirring for 4 h. The deionized water was refreshed every 15 minutes. Then, the by-product, potassium iodide, was removed completely. The obtained poly(N-methyl-N-vinylamine) solution was purged under nitrogen flow (with a flow rate of around 100 cc/min) to possess a good viscosity due to an increased concentration. The viscous poly(N-methyl-N-vinylamine) solution was coated onto the PES substrate (pore size: 39 nm) with the polyamine layer thickness of 8 – 12 μm . As a comparison, the pure PVAm membrane was also prepared and tested at the same transport measurement conditions, which are described in the following paragraph.

The membrane was loaded into a stainless-steel rectangular permeation cell with an effective membrane area of 5.7 cm^2 inside a temperature-controlled oven (Bemco Inc. Simi Valley, CA). A countercurrent flow configuration (with a feed gas flow rate of 98 cc/min and a sweep gas flow rate of 30 cc/min) was applied to offer the maximum driving force across the membrane. The binary gas mixture containing 20% CO_2 and 80% N_2 (on dry basis) was used as the feed gas, while argon was used as the sweep gas. Both the feed gas and the sweep gas were humidified by each passing through 100 mL water in a 500-mL stainless-steel humidifier (Swagelok, Westerville, OH) filled with 60% (by volume) packing of glass Raschig rings, to achieve a water vapor content of about 17% at 57°C. The testing temperature was set to be 57°C, which is the typical flue gas stream temperature. The testing pressures were 1.1 psig for the feed side and 1.0 psig for the sweep side, respectively. The outlet gas compositions of both retentate and permeate streams were analyzed by using a gas chromatograph (GC) equipped with a thermal conductivity detector (TCD) (Agilent Technologies, Palo Alto, CA). The SUPELCO Carboxen[®] 1004 micropacked GC column (Sigma-Aldrich, St. Louis, MO) was used for this GC. The gas transport measurement results are listed in Table 6. As listed in this table, CO_2 permeability was improved by 24% and CO_2/N_2 selectivity was increased by 14% by modifying polyvinylamine into poly(N-methyl-N-vinylamine).

Table 6. Comparison of PVAm and poly(N-methyl-N-vinylamine) membrane performances.

	CO ₂ Permeability (Barrer)	CO ₂ /N ₂ Selectivity
PVAm	213.9	48.5
Poly(N-methyl-N-vinylamine)	264.2	55.5

Poly(N-isopropyl-N-vinylamine) Membrane Synthesis

5 The aqueous polyvinylamine solution was adjusted to have a pH of 12.0, which ensured the amino groups of polyvinylamine were all deprotonated to free amino groups. Isopropylbromide and KOH, each at one equivalent amount, were added into the above PVAm solution. The reaction was conducted at 45°C for 48 hours in a reactor equipped with a cold-water condenser. After the reaction, the solution was cooled down to room temperature and then
10 transferred to the cellulose dialysis tubing, which was sealed at both ends using clips and put in deionized water under stirring for 4 h. The deionized water was refreshed every 15 minutes. Then, the by-product, potassium bromide, was removed completely. The obtained poly(N-isopropyl-N-vinylamine) solution was purged under nitrogen flow (with a flow rate of around 100 cc/min) to possess a good viscosity due to an increased concentration. The viscous poly(N-isopropyl-N-
15 vinylamine) solution was coated onto the PES substrate (pore size: 39 nm) with the polyamine layer thickness of 8 – 12 μ m.

Similarly, the membrane was loaded into a stainless-steel rectangular permeation cell with an effective membrane area of 5.7 cm² inside a temperature-controlled oven (Bemco Inc. Simi Valley, CA). A countercurrent flow configuration (with a feed gas flow rate of 98 cc/min and a
20 sweep gas flow rate of 30 cc/min) was applied to offer the maximum driving force across the membrane. The binary gas mixture containing 20% CO₂ and 80% N₂ (on dry basis) was used as the feed gas, while argon was used as the sweep gas. Both the feed gas and the sweep gas were humidified by each passing through 100 mL water in a 500-mL stainless-steel humidifier (Swagelok, Westerville, OH) filled with 60% (by volume) packing of glass Raschig rings, to
25 achieve a water vapor content of about 17% at 57°C. The testing temperature was set to be 57°C, which is the typical flue gas stream temperature. The testing pressures were 1.1 psig for the feed side and 1.0 psig for the sweep side, respectively. The outlet gas compositions of both retentate and permeate streams were analyzed by using a gas chromatograph (GC) equipped with a thermal conductivity detector (TCD) (Agilent Technologies, Palo Alto, CA). The SUPELCO Carboxen®
30 1004 micropacked GC column (Sigma-Aldrich, St. Louis, MO) was used for this GC. The gas

transport measurement results are listed in Table 7. In comparison with the PVAm results shown in Table 6, the sterically hindered poly(N-isopropyl-N-vinylamine) membrane showed a 15% improvement on CO₂ permeability with a comparable CO₂/N₂ selectivity.

5 **Table 7. Membrane performance of poly(N-isopropyl-N-vinylamine).**

	CO ₂ Permeability (Barrer)	CO ₂ /N ₂ Selectivity
Poly(N-isopropyl-N-vinylamine)	245.0	47.5

Poly(N-tert-butyl-N-vinylamine) Membrane Synthesis

The aqueous polyvinylamine solution was adjusted to have a pH of 12.0, which ensured
 10 the amino groups of polyvinylamine were all deprotonated to free amino groups. Tert-butyl-
 bromide and KOH, each at one equivalent amount, were added into the above PVAm solution.
 The reaction was conducted at 45°C for 48 hours in a reactor equipped with a cold-water
 condenser. After the reaction, the solution was cooled down to room temperature and then
 transferred to the cellulose dialysis tubing, which was sealed at both ends using clips and put in
 15 deionized water under stirring for 4 h. The deionized water was refreshed every 15 minutes.
 Then, the by-product, potassium bromide, was removed completely. The obtained poly(N-tert-
 butyl-N-vinylamine) solution was purged under nitrogen flow (with a flow rate of around 100
 cc/min) to possess a good viscosity due to an increased concentration. The viscous poly(N-tert-
 butyl-N-vinylamine) solution was coated onto the PES substrate (pore size: 39 nm) with the
 20 polyamine layer thickness of 8 – 12 μ m.

Similarly, the membrane was loaded into a stainless-steel rectangular permeation cell
 with an effective membrane area of 5.7 cm² inside a temperature-controlled oven (Bemco Inc.
 Simi Valley, CA). A countercurrent flow configuration (with a feed gas flow rate of 98 cc/min
 and a sweep gas flow rate of 30 cc/min) was applied to offer the maximum driving force across
 25 the membrane. The binary gas mixture containing 20% CO₂ and 80% N₂ (on dry basis) was used
 as the feed gas, while argon was used as the sweep gas. Both the feed gas and the sweep gas
 were humidified by each passing through 100 mL water in a 500-mL stainless-steel humidifier
 (Swagelok, Westerville, OH) filled with 60% (by volume) packing of glass Raschig rings, to
 achieve a water vapor content of approximately 17% at 57°C. The testing temperature was set to
 30 be 57°C, which is the typical flue gas stream temperature. The testing pressures were 1.1 psig
 for the feed side and 1.0 psig for the sweep side, respectively. The outlet gas compositions of

both retentate and permeate streams were analyzed by using a gas chromatograph (GC) equipped with a thermal conductivity detector (TCD) (Agilent Technologies, Palo Alto, CA). The SUPELCO Carboxen[®] 1004 micropacked GC column (Sigma-Aldrich, St. Louis, MO) was used for this GC. The gas transport measurement results are listed in Table 8. In comparison with the PVAm results shown in Table 6, the sterically hindered poly(N-tert-butyl-N-vinylamine) membrane showed a 11% improvement on CO₂ permeability with a comparable CO₂/N₂ selectivity.

Table 8. Membrane performance of poly(N-tert-butyl-N-vinylamine)

	CO ₂ Permeability (Barrer)	CO ₂ /N ₂ Selectivity
Poly(N-methyl-N-vinylamine)	237.8	48.4

References

- [17] W.S.W. Ho, K.K. Sirkar, *Membrane Handbook*, Chapman & Hall, New York, 1992; reprint edition, Kluwer Academic Publishers, Boston, 2001.
- [18] L.M. Robeson, B.D. Freeman, D.R. Paul, B.W. Rowe, An empirical correlation of gas permeability and permselectivity in polymers and its theoretical basis, *J. Membr. Sci.* 341 (2009) 178–185.
- [19] D.E. Gottschlich, D.L. Roberts, J.D. Way, A theoretical comparison of facilitated transport and solution-diffusion membrane modules for gas separation, *Gas Sep. Purif.* 2 (1988) 65–71.
- [20] Y. Zhao, W.S.W. Ho, Steric hindrance effect on amine demonstrated in solid polymer membranes for CO₂ transport, *J. Membr. Sci.* 415–416 (2012) 132–138.
- [21] M. Caplow, Kinetics of carbamate formation and breakdown, *J. Am. Chem. Soc.* 90 (1968) 6795–6803.
- [22] P.V. Danckwerts, The reaction of CO₂ with ethanolamines, *Chem. Eng. Sci.* 34 (1979) 443–446.
- [23] G. Sartori, W.S.W. Ho, D.W. Savage, G.R. Chludzinski, S. Wiechert, Sterically-hindered amines for acid-gas absorption, *Sep. Purif. Methods* 16 (1987) 171–200.

The compositions and methods of the appended claims are not limited in scope by the specific compositions and methods described herein, which are intended as illustrations of a few aspects of the claims and any compositions and methods that are functionally equivalent are

intended to fall within the scope of the claims. Various modifications of the compositions and methods in addition to those shown and described herein are intended to fall within the scope of the appended claims. Further, while only certain representative materials and method steps disclosed herein are specifically described, other combinations of the materials and method steps also are intended to fall within the scope of the appended claims, even if not specifically recited. Thus, a combination of steps, elements, components, or constituents may be explicitly mentioned herein; however, other combinations of steps, elements, components, and constituents are included, even though not explicitly stated.

The term “comprising” and variations thereof as used herein is used synonymously with the term “including” and variations thereof and are open, non-limiting terms. Although the terms “comprising” and “including” have been used herein to describe various embodiments, the terms “consisting essentially of” and “consisting of” can be used in place of “comprising” and “including” to provide for more specific embodiments and are also disclosed. As used in this disclosure and in the appended claims, the singular forms “a”, “an”, “the”, include plural referents unless the context clearly dictates otherwise.

What is claimed is:

1. A membrane comprising:
a gas permeable support layer; and
a selective polymer layer disposed on the gas permeable support layer, wherein the selective polymer layer comprises an amine-containing polymer and an amino acid salt dispersed within the amine-containing polymer.
2. The membrane of claim 1, wherein the gas permeable support layer comprises a gas permeable polymer.
3. The membrane of claim 2, wherein the gas permeable polymer comprises a polymer selected from the group consisting of polyamides, polyimides, polypyrrolones, polyesters, sulfone-based polymers, polymeric organosilicones, fluorinated polymers, polyolefins, copolymers thereof, and blends thereof.
4. The membrane of claim 2 or 3, wherein the gas permeable polymer comprises polyethersulfone.
5. The membrane of any of claims 1-4, wherein the gas permeable support layer comprises a gas permeable polymer disposed on a base.
6. The membrane of claim 5, wherein the base comprises a non-woven fabric.
7. The membrane of claim 6, wherein the non-woven fabric comprises fibers formed from a polyester.
8. The membrane of any one of claims 1-7, wherein the membrane comprises:
a gas permeable support layer;
an inorganic layer disposed on the gas permeable support layer; and
a selective polymer layer disposed on the inorganic layer, wherein the selective polymer layer comprises an amine-containing polymer and an amino acid salt dispersed within the amine-containing polymer.


9. The membrane of claim 8, wherein the inorganic layer comprises a plurality of discreet nanoparticles having an average particle size of less than 1 micron.
10. The membrane of claim 9, wherein the nanoparticles are selected from the group consisting of alkaline earth metal oxide nanoparticles; transition metal oxide nanoparticles; lanthanide metal oxide nanoparticles; group IVA metal oxide nanoparticles; transition metal nanoparticles; transition-metal catalyst nanoparticles; nanoparticles comprising a transition metal adsorbed on a non-reactive support; metal alloy nanoparticles; silicate nanoparticles; alumino-silicate nanoparticles; clays; and combinations thereof.
11. The membrane of any one of claims 9-10, wherein the nanoparticles comprise silicate nanoparticles, alumino-silicate nanoparticles, or a combination thereof.
12. The membrane of claim 11, wherein the nanoparticles comprise zeolite Y nanoparticles.
13. The membrane of any one of claims 9-12, wherein the average particle size of the nanoparticles is from 1 nm to 500 nm.
14. The membrane of claim 13, wherein the average particle size of the nanoparticles is from 1 nm to 250 nm.
15. The membrane of any of claims 1-14, wherein the membrane exhibits a CO₂:N₂ selectivity of from 30 to 1500 at 57°C and 1 atm feed pressure.
16. The membrane of any of claims 1-15, wherein the membrane exhibits a CO₂:N₂ selectivity of from 45 to 350 at 57°C and 1 atm feed pressure.
17. The membrane of any of claims 1-16, wherein the membrane exhibits a CO₂:N₂ selectivity of from 75 to 350 at 57°C and 1 atm feed pressure.
18. The membrane of any of claims 1-17, wherein the membrane exhibits a CO₂ permeance of from 100 to 2000 GPU at 57°C and 1 atm feed pressure.

19. The membrane of any of claims 1-18, wherein the amine-containing polymer is selected from the group consisting of polyvinylamine, polyallylamine, polyethyleneimine, poly-*N*-isopropylallylamine, poly-*N*-tert-butylallylamine, poly-*N*-1,2-dimethylpropylallylamine, poly-*N*-1-methylpropylallylamine, poly-*N*-2-methylpropylallylamine, poly-*N*-1-ethylpropylallylamine, poly-*N*-2-ethylpropylallylamine, poly-*N*-methylallylamine, poly-*N,N*-dimethylallylamine, poly-*N*-ethylallylamine, poly-*N,N*-diethylallylamine, poly(*N*-methyl-*N*-vinylamine), poly(*N*-ethyl-*N*-vinylamine), poly(*N*-isopropyl-*N*-vinylamine), poly(*N*-tert-butyl-*N*-vinylamine), poly(*N*-propyl-*N*-vinylamine), poly(*N,N*-dimethyl-*N*-vinylamine), poly(*N,N*-diethyl-*N*-vinylamine), poly-2-vinylpiperidine, poly-4-vinylpiperidine, polyaminostyrene, chitosan, copolymers, and blends thereof.

20. The membrane of any of claims 1-19, wherein the amine-containing polymer comprises polyvinylamine.

21. The membrane of any of claims 1-20, wherein the amine-containing polymer comprises a sterically hindered derivative of polyvinylamine.


22. The membrane of claim 21, wherein the sterically hindered derivative of polyvinylamine comprises a polymer having the structure below



wherein

R_1 and R_2 are, independently for each occurrence, hydrogen, alkyl, alkenyl, alkynyl, aryl, or cycloalkyl, or R_1 and R_2 , together with the nitrogen atom to which they are attached, form a heterocyclic ring, with the proviso that at least one of R_1 and R_2 is not hydrogen; and n is an integer from 10 to 25,000.

23. The membrane of claim 21, wherein the sterically hindered derivative of polyvinylamine comprises a random copolymer or block copolymer having the structure below



wherein

R_1 and R_2 are, independently for each occurrence, hydrogen, alkyl, alkenyl, alkynyl, aryl, or cycloalkyl, or R_1 and R_2 , together with the nitrogen atom to which they are attached, form a heterocyclic ring, with the proviso that at least one of R_1 and R_2 is not hydrogen;

m is an integer from 10 to 10,000; and

n is an integer from 10 to 10,000.


24. The membrane of any of claims 1-23, wherein the amine-containing polymer has a weight average molecular weight of at least 50,000 Da.

25. The membrane of any of claims 1-24, wherein the amine-containing polymer has a weight average molecular weight of from 50,000 Da to 5,000,000 Da.




26. The membrane of any of claims 1-25, wherein the amine-containing polymer has a weight average molecular weight of at least 500,000 Da.


27. The membrane of any of claims 1-26, wherein the amine-containing polymer has a weight average molecular weight of at least 1,000,000 Da.

28. The membrane of any of claims 1-27, wherein the amino acid salt comprises a salt of a compound defined by the formula below




wherein, independently for each occurrence in the amino acid, each of R_1 , R_2 , R_3 and R_4 is selected from one of the following



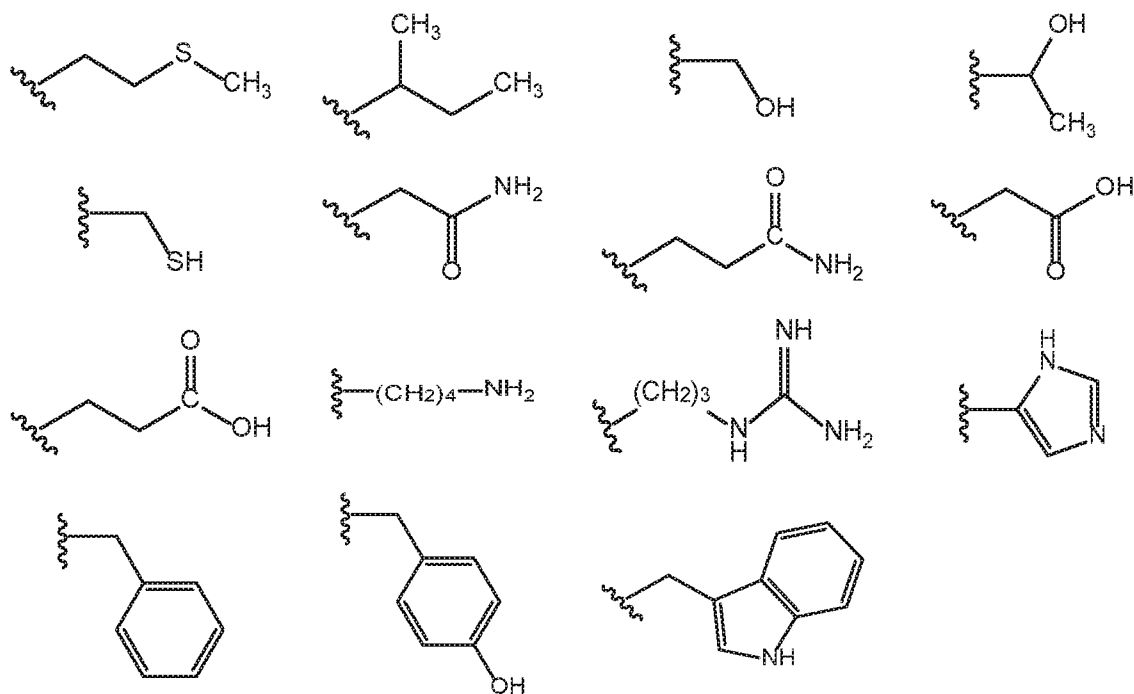

or R_1 and R_3 , together with the atoms to which they are attached, form a five-membered heterocycle defined by the structure below when n is 1, or a six-membered heterocycle defined by the structure below when n is 2



29. The membrane of any of claims 1-28, wherein the amino acid salt comprises a glycinate salt or an aminoisobutyrate salt.
30. The membrane of any of claims 1-29, wherein the selective polymer layer comprises from 30% to 80% by weight amino acid salt, based on the total weight of the selective polymer layer.
31. The membrane of any one of claims 1-30, wherein the membrane is selectively permeable to an acidic gas.
32. The membrane of any one of claims 1-31, wherein the membrane is selectively permeable to a fluid selected from the group consisting of carbon dioxide, hydrogen sulfide,

sulfur dioxide, sulfur trioxide, nitrogen oxide, hydrogen chloride, water, and combinations thereof.

33. A membrane comprising:

a gas permeable support layer; and

a selective polymer layer disposed on the gas permeable support layer, wherein the selective polymer layer comprises a sterically hindered amine-containing polymer.

34. The membrane of claim 33, wherein the gas permeable support layer comprises a gas permeable polymer.

35. The membrane of claim 34, wherein the gas permeable polymer comprises a polymer selected from the group consisting of polyamides, polyimides, polypyrrolones, polyesters, sulfone-based polymers, polymeric organosilicones, fluorinated polymers, polyolefins, copolymers thereof, and blends thereof.

36. The membrane of claim 33 or 34, wherein the gas permeable polymer comprises polyethersulfone.

37. The membrane of any of claims 33-36, wherein the gas permeable support layer comprises a gas permeable polymer disposed on a base.

38. The membrane of claim 37, wherein the base comprises a non-woven fabric.

39. The membrane of claim 38, wherein the non-woven fabric comprises fibers formed from a polyester.

40. The membrane of any one of claims 33-39, wherein the membrane comprises:

a gas permeable support layer;


an inorganic layer disposed on the gas permeable support layer; and

a selective polymer layer disposed on the gas permeable support layer, wherein the selective polymer layer comprises a sterically hindered amine-containing polymer.

41. The membrane of claim 40, wherein the inorganic layer comprises a plurality of discreet nanoparticles having an average particle size of less than 1 micron.
42. The membrane of claim 41, wherein the nanoparticles are selected from the group consisting of alkaline earth metal oxide nanoparticles; transition metal oxide nanoparticles; lanthanide metal oxide nanoparticles; group IVA metal oxide nanoparticles; transition metal nanoparticles; transition-metal catalyst nanoparticles; nanoparticles comprising a transition metal adsorbed on a non-reactive support; metal alloy nanoparticles; silicate nanoparticles; alumino-silicate nanoparticles; clays; and combinations thereof.
43. The membrane of any one of claims 41-42, wherein the nanoparticles comprise silicate nanoparticles, alumino-silicate nanoparticles, or a combination thereof.
44. The membrane of claim 43, wherein the nanoparticles comprise zeolite Y nanoparticles.
45. The membrane of any one of claims 41-44, wherein the average particle size of the nanoparticles is from 1 nm to 500 nm.
46. The membrane of claim 45, wherein the average particle size of the nanoparticles is from 1 nm to 250 nm.
47. The membrane of any of claims 33-46, wherein the membrane exhibits a CO₂:N₂ selectivity of from 30 to 1,500 at 57°C and 1 atm feed pressure.
48. The membrane of any of claims 33-47, wherein the membrane exhibits a CO₂:N₂ selectivity of from 45 to 350 at 57°C and 1 atm feed pressure.
49. The membrane of any of claims 33-48, wherein the membrane exhibits a CO₂:N₂ selectivity of from 75 to 350 at 57°C and 1 atm feed pressure.
50. The membrane of any of claims 33-49, wherein the membrane exhibits a CO₂ permeance of from 100 to 2,000 GPU at 57°C and 1 atm feed pressure.

51. The membrane of any of claims 33-50, wherein the amine-containing polymer comprises a sterically hindered derivative of polyvinylamine.


52. The membrane of claim 51, wherein the sterically hindered derivative of polyvinylamine comprises a polymer having the structure below



wherein

R_1 and R_2 are, independently for each occurrence, hydrogen, alkyl, alkenyl, alkynyl, aryl, or cycloalkyl, or R_1 and R_2 , together with the nitrogen atom to which they are attached, form a heterocyclic ring, with the proviso that at least one of R_1 and R_2 is not hydrogen; and n is an integer from 10 to 25,000.

53. The membrane of claim 51, wherein the sterically hindered derivative of polyvinylamine comprises a random copolymer or block copolymer having the structure below



wherein

R_1 and R_2 are, independently for each occurrence, hydrogen, alkyl, alkenyl, alkynyl, aryl, or cycloalkyl, or R_1 and R_2 , together with the nitrogen atom to which they are attached, form a heterocyclic ring, with the proviso that at least one of R_1 and R_2 is not hydrogen;

m is an integer from 10 to 10,000; and

n is an integer from 10 to 10,000.

54. The membrane of any of claims 33-53, wherein the amine-containing polymer has a weight average molecular weight of at least 50,000 Da.

55. The membrane of any of claims 33-54, wherein the amine-containing polymer has a weight average molecular weight of from 50,000 Da to 5,000,000 Da.

56. The membrane of any of claims 33-55, wherein the amine-containing polymer has a weight average molecular weight of at least 500,000 Da.

57. The membrane of any of claims 33-56, wherein the amine-containing polymer has a weight average molecular weight of at least 1,000,000 Da.


58. The membrane of any of claims 33-57, wherein the selective polymer layer further comprises a low molecular weight amino compound dispersed within the sterically hindered amine-containing polymer.

59. The membrane of claim 58, wherein the low molecular weight amino compound has a molecular weight of less than 1,000 Da.


60. The membrane of claim 58 or 59, wherein the low molecular weight amino compound comprises a salt of a primary amine or a salt of a secondary amine.


61. The membrane of any of claims 58-60, wherein the low molecular weight amino compound comprises an amino acid salt.

62. The membrane of claim 61, wherein the amino acid salt comprises a salt of a compound defined by the formula below




wherein, independently for each occurrence in the amino acid, each of R₁, R₂, R₃ and R₄ is selected from one of the following

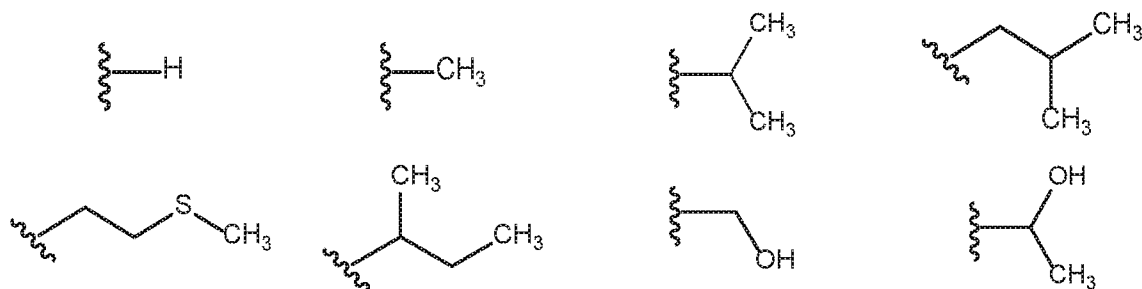

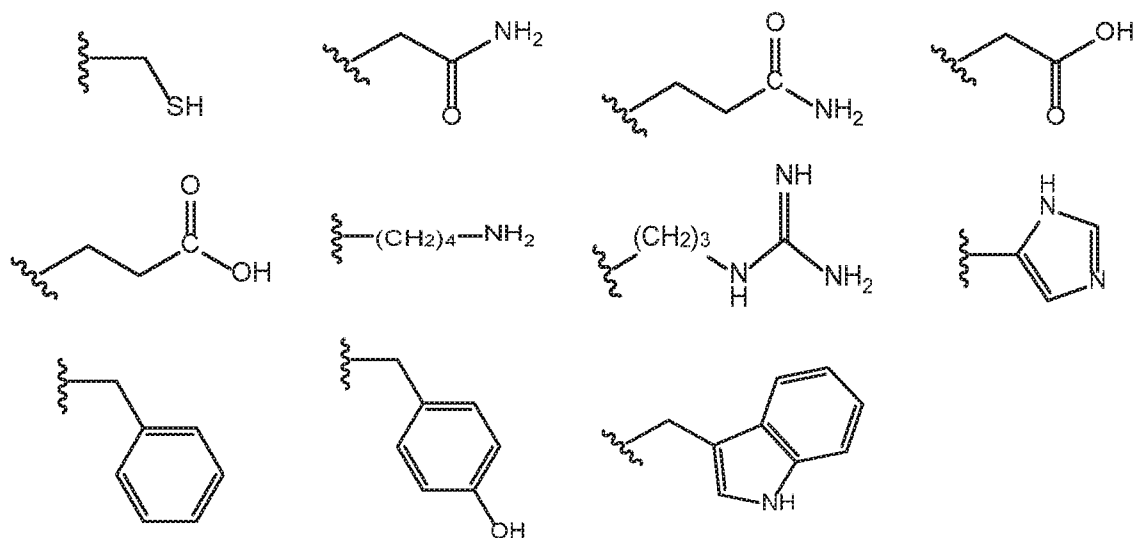

or R_1 and R_3 , together with the atoms to which they are attached, form a five-membered heterocycle defined by the structure below when n is 1, or a six-membered heterocycle defined by the structure below when n is 2



63. The membrane of claim 61 or 62, wherein the amino acid salt comprises a glycinate salt or an aminoisobutyrate salt.

64. The membrane of any of claims 61-63, wherein the selective polymer layer comprises from 30% to 80% by weight amino acid salt, based on the total weight of the selective polymer layer.

65. The membrane of any one of claims 33-64, wherein the membrane is selectively permeable to an acidic gas.

66. The membrane of any one of claims 33-65, wherein the membrane is selectively permeable to a fluid selected from the group consisting of carbon dioxide, hydrogen sulfide, sulfur dioxide, sulfur trioxide, nitrogen oxide, hydrogen chloride, water, and combinations thereof.

67. A method of making a membrane comprising, coating an inorganic layer with a selective polymer, wherein the selective polymer comprises an amine-containing polymer and an amino acid salt dispersed within the amine-containing polymer.
68. A method of making a membrane comprising,
depositing a nanoparticle dispersion on a gas permeable support layer to form an inorganic layer disposed on the gas permeable support layer; and
coating the inorganic layer with a selective polymer, wherein the selective polymer comprises an amine-containing polymer and an amino acid salt dispersed within the amine-containing polymer.
69. A method of making a membrane comprising,
coating the inorganic layer with a selective polymer, wherein the selective polymer comprises a sterically hindered amine-containing polymer.
70. A method of making a membrane comprising,
depositing a nanoparticle dispersion on a gas permeable support layer to form an inorganic layer disposed on the gas permeable support layer; and
coating the inorganic layer with a selective polymer, wherein the selective polymer comprises a sterically hindered amine-containing polymer.
71. The method of claim 68 or 70, wherein depositing the nanoparticle dispersion on the gas permeable support layer comprises vacuum-assisted dip-deposition of the nanoparticle dispersion on the gas permeable support layer.
72. The method of any of claims 67-71, wherein the selective polymer has a viscosity of at least 400 cp at 25°C.
73. A method for separating a gaseous mixture comprising a first gas and a second gas, the method comprising contacting a membrane defined by any of claims 1-66 with the gaseous mixture under conditions effective to afford transmembrane permeation of the first gas.

74. The method of claim 73, wherein the permeance of the first gas is at least 200 GPU at 57°C and 1 atm feed pressure.

75. The method of claim 74, wherein the permeance of the first gas is from 200 GPU to 2,000 GPU at 57°C and 1 atm feed pressure.

76. The method of any one of claims 73-75, wherein the membrane exhibits a first gas:second gas selectivity of at least 30 at 57°C and 1 atm feed pressure.

77. The method of claim 76, wherein the membrane exhibits a first gas:second gas selectivity of from 30 to 500 at 57°C.

78. The method of any of claims 73-77, wherein the first gas is selected from the group consisting of carbon dioxide, hydrogen sulfide, sulfur dioxide, sulfur trioxide, nitrogen oxide, hydrogen chloride, water, and combinations thereof.

79. The method of any of claims 73-78, wherein the second gas is selected from the group consisting of nitrogen, hydrogen, and combinations thereof.

1/1

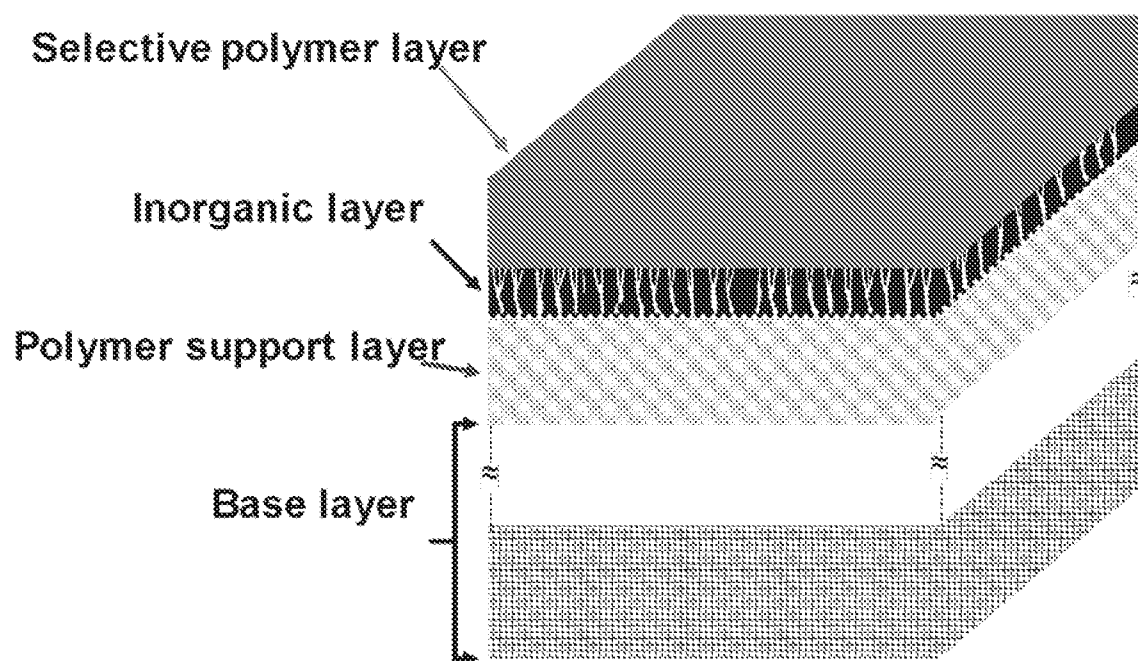


Figure 1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US16/35035

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☒ Claims Nos.: 5-32, 37-67, 72-79
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Group I: claims 1-3, 4 (in part), 6/-68, /1 (in part)

Group II: claims 33 35, 36 (in part), 69-70, 71 (in part)

This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Group I: claims 1-3, 4 (in part), 67-68, 71 (in part) are directed toward a membrane with a selective layer comprising an amino acid salt dispersed within an amine-containing polymer.

Group II: claims 33-35, 36 (in part), 69-70, 71 (in part) are directed toward a membrane with a selective layer comprising a sterically hindered amine-containing polymer.

-***-Continued Within the Next Supplemental Box-***-

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-3, 4 (in part), 67-68, 71 (in part)

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US16/35035

A. CLASSIFICATION OF SUBJECT MATTER IPC(8) - B01D 39/14, 69/12, 71/06 (2016.01) CPC - B01D 39/14, 69/12, 71/06 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC(8): B01D 39/00, 39/14, 39/16, 53/00, 53/22, 61/00, 61/14, 67/00, 69/00, 69/10, 69/12, 71/00, 71/02, 71/06, 71/40 (2016.01); CPC: B01D 39/00, 39/14, 39/16, 39/1607, 53/00, 53/22, 53/228, 61/00, 61/14, 67/00, 67/0002, 67/0079, 69/00, 69/10, 69/12, 71/02 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) PatSeer (US, EP, WO, JP, DE, GB, CN, FR, KR, ES, AU, IN, CA, INPADOC Data); Google Scholar; EBSCO; IP.com; gas, permeable, support, coating, amine, polymer, amino, salt, polyethersulfone, nanoparticle		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6,099,621 A (HO, WSW) 08 August 2000; column 1, lines 48-53; column 2, lines 66 to column 3, lines 30; column 3, lines 52-55	1-3
---		---
Y		4/2-3, 67-68, 71/68
Y	(Li, Y et al.) Fabrication of dual-layer polyethersulfone (PES) hollow fiber membranes with an ultrathin dense-selective layer for gas separation. Journal of Membrane Science. 2004. vo. 245; abstract; page 59, second-third paragraphs	4/2-3
Y	US 2005/0087491 A1 (HENNIGE, V et al.) 28 April 2005; paragraphs [0014], [0036], [0039]-[0044], [0085], [0087]	67-68, 71/68
Y	EP 0 465 697 B1 (INDUSTRIAL TECHNOLOGY RESEARCH INSTITUTE) 14 December 1994; page 2, lines 28-29; page 4, lines 40-49	71/68
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 26 July 2016 (26.07.2016)		Date of mailing of the international search report 11 OCT 2016
Name and mailing address of the ISA/ Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-8300		Authorized officer Shane Thomas PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774

---Continued from Box III. Observations where unity of invention is lacking---

The inventions listed as Groups I-II do not relate to a single general inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons:

the special technical feature of Group I includes a selective layer comprising an amino acid salt dispersed within an amine-containing polymer, which is not present in group II;

the special technical feature of Group II includes a selective layer comprising a sterically hindered amine-containing polymer, which is not present in group I.

The common technical features of Groups I-II are a method of making a membrane comprising, depositing a nanoparticle dispersion on a gas permeable support layer to form an inorganic layer disposed on the gas permeable support layer; and coating the inorganic layer with a selective polymer, wherein the selective polymer comprises an amine-containing polymer.

These common technical features are disclosed by US 2005/0087491 A1 to Hennige, et al. (hereafter 'Hennige'). Hennige discloses depositing a nanoparticle dispersion (ceramic coatings have particle sizes ranging from 1 to 10000 nm; paragraphs [0028]-[0029]; [0052]) on a gas permeable support layer (composites comprise filtration membranes with coating of inorganic components on and it the membrane; paragraphs [0039]-[0044]) to form an inorganic layer disposed on the gas permeable support layer (composite is based on a permeable support which comprises polymer fibers and on which and/or in which there are inorganic components; paragraph [0014]); and coating the inorganic layer with a selective polymer (the hybrid membrane wherein the selective separating layer is formed by polymeric material, which is coated on the inorganic layer; paragraph [0014]; [0036]), wherein the selective polymer comprises an amine-containing polymer (the selective membrane is made with hexamethylenediamine; paragraph [0087]).

Since the common technical features are previously disclosed by Hennige, these common features are not special and so Groups I-II lack unity.

In addition, claims Nos.: 5-32, 37-66, 72-79 are unsearchable because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).