




(86) Date de dépôt PCT/PCT Filing Date: 2008/12/23
(87) Date publication PCT/PCT Publication Date: 2009/07/09
(45) Date de délivrance/Issue Date: 2014/07/08
(85) Entrée phase nationale/National Entry: 2010/06/15
(86) N° demande PCT/PCT Application No.: US 2008/088210
(87) N° publication PCT/PCT Publication No.: 2009/086407
(30) Priorité/Priority: 2007/12/28 (US61/017,321)

(51) Cl.Int./Int.Cl. *C10J 3/48* (2006.01),
C10J 3/46 (2006.01), *C10J 3/82* (2006.01),
C10K 1/10 (2006.01), *C10K 3/02* (2006.01),
C10L 3/08 (2006.01)
(72) Inventeurs/Inventors:
LAU, FRANCIS S., US;
ROBINSON, EARL T., US
(73) Propriétaire/Owner:
GREATPOINT ENERGY, INC., US
(74) Agent: SMART & BIGGAR

(54) Titre : GAZEIFICATEUR DE BOUES A GENERATION DE VAPEUR POUR LA GAZEIFICATION CATALYTIQUE
D'UNE CHARGE CARBONEE

(54) Title: STEAM GENERATING SLURRY GASIFIER FOR THE CATALYTIC GASIFICATION OF A CARBONACEOUS
FEEDSTOCK

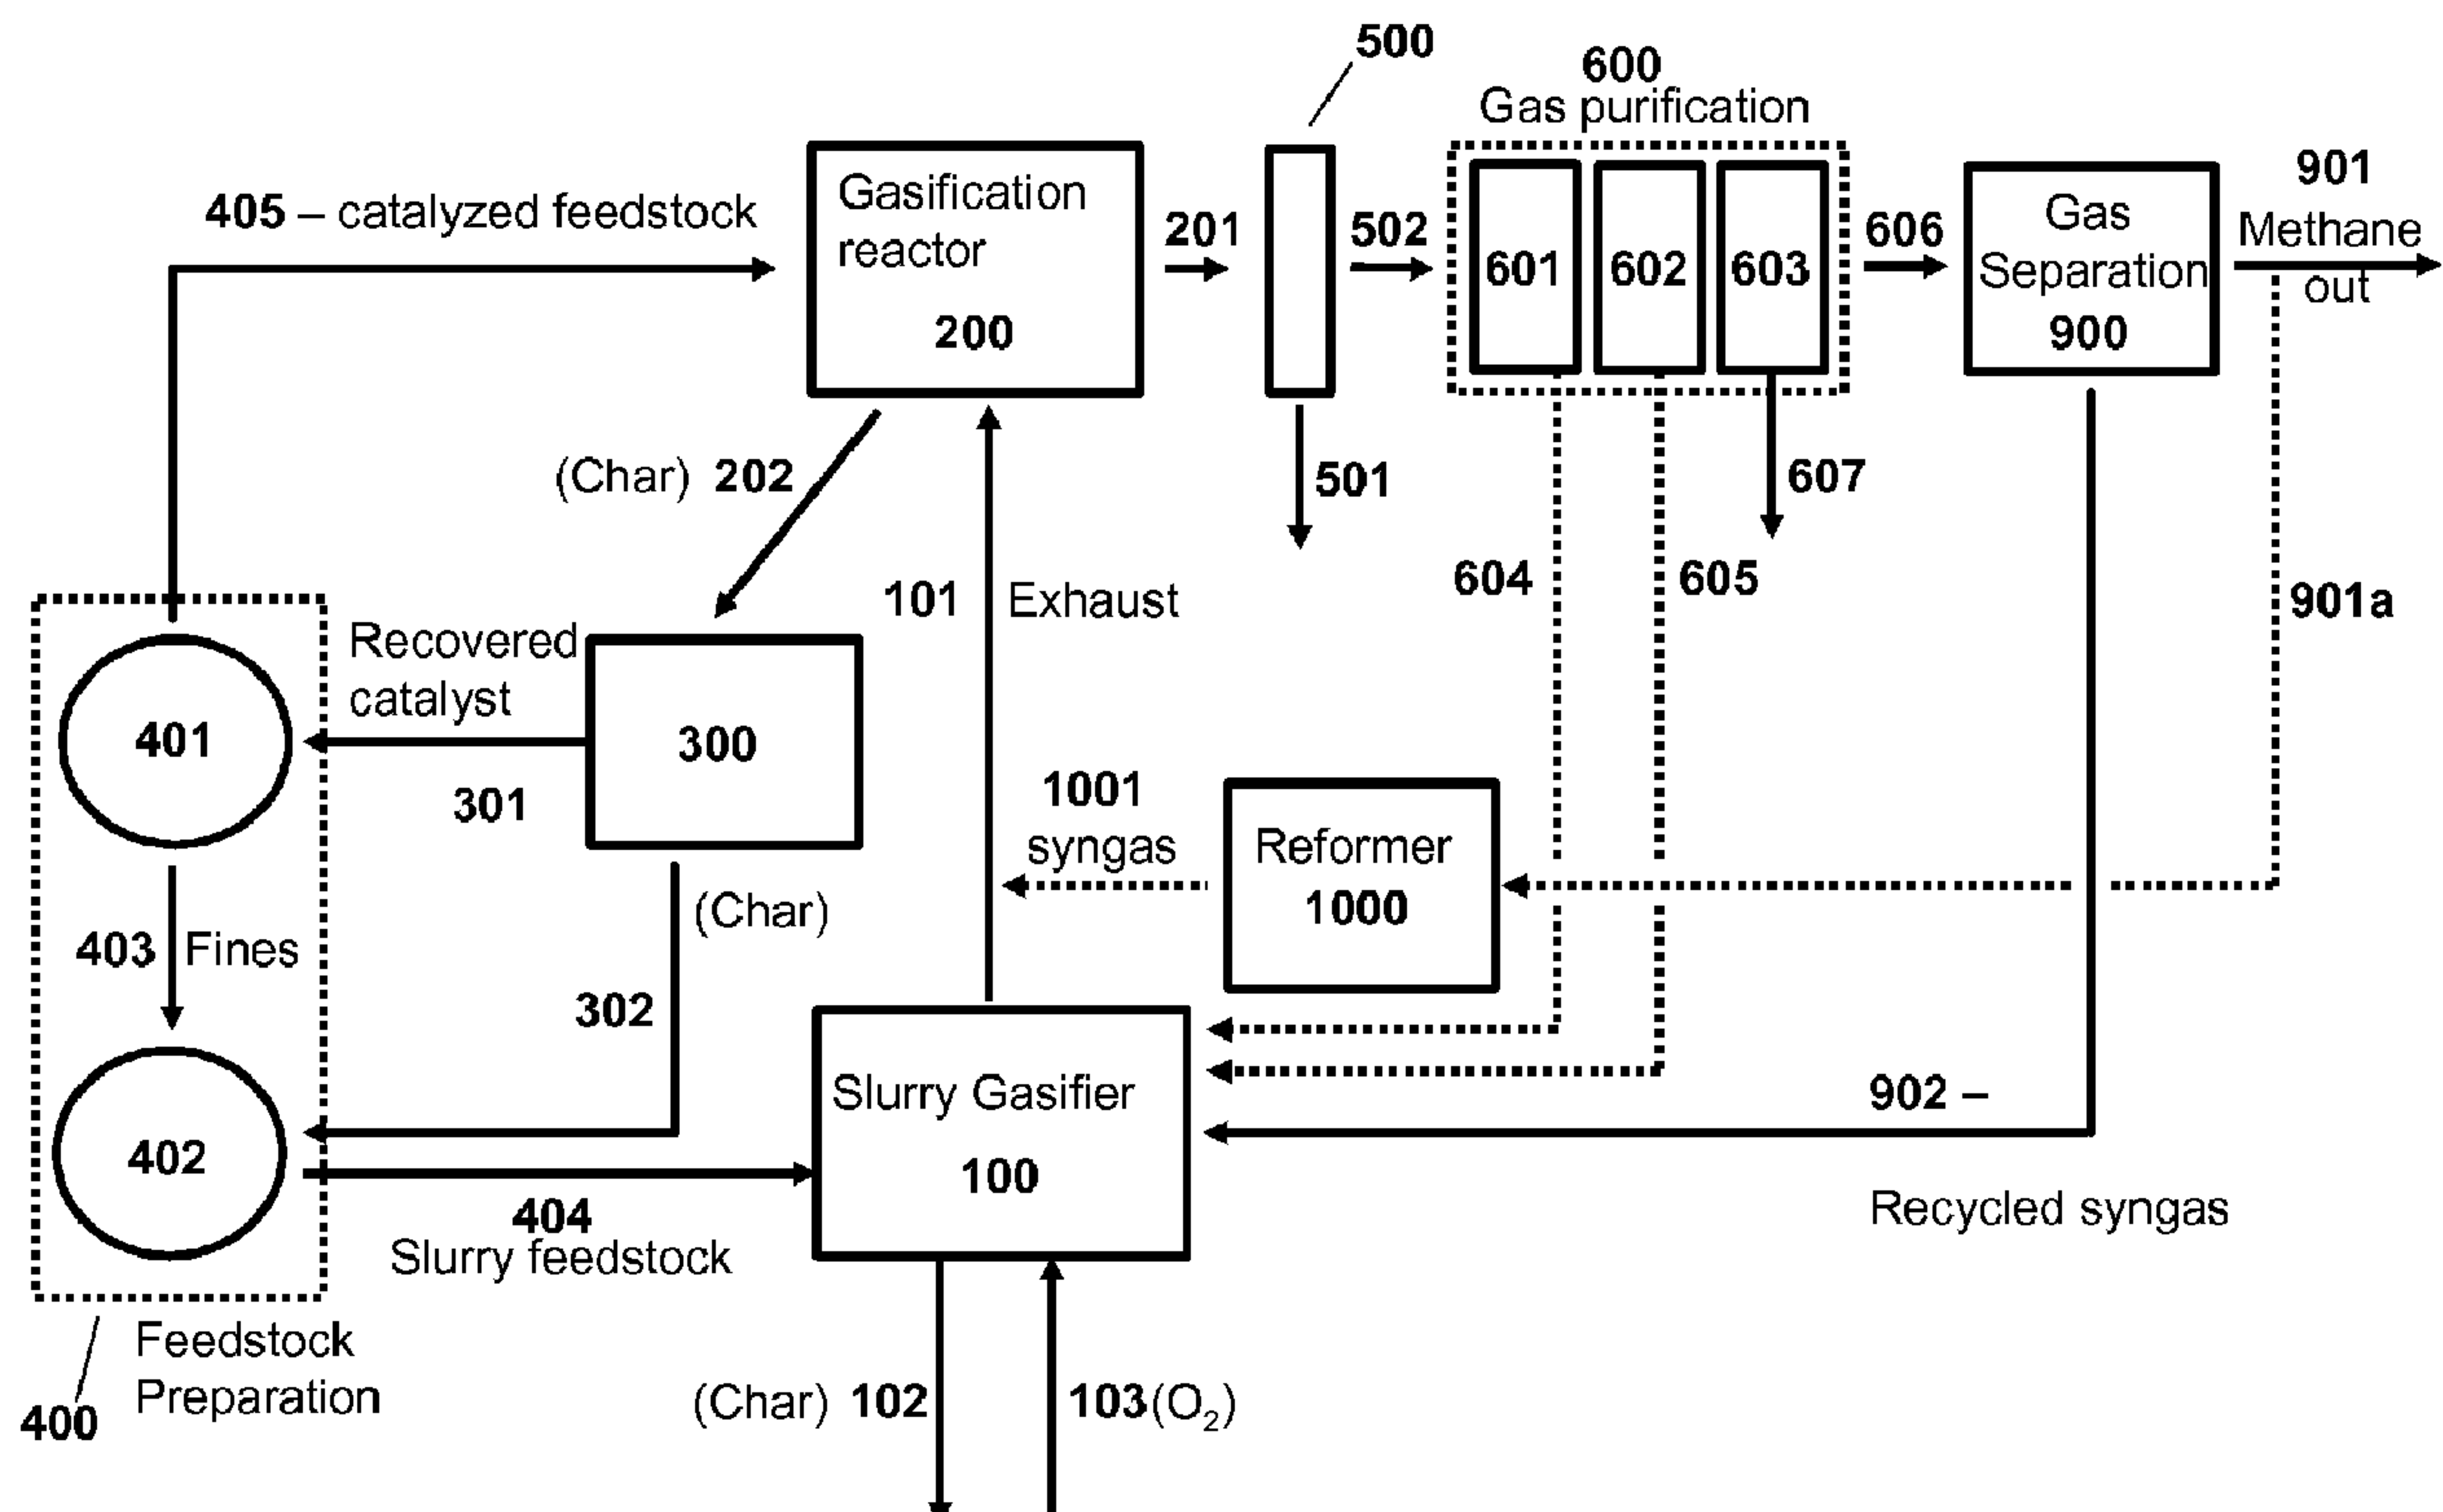

(57) Abrégé/Abstract:

Steam generating gasification reactors for providing high-pressure and high- temperature steam for catalytic gasification of a carbonaceous feedstock can be based on oxygen blown gasification reactors adapted for processing a slurry feedstock



(57) **Abrégé(suite)/Abstract(continued):**

comprising at least 40% water. The exhaust from the slurry gasifier comprises at least steam, carbon monoxide and hydrogen. The slurry composition and the oxygen to fuel ratio can be varied to control the ratio of carbonaceous gases in the generator exhaust. By directing substantially all of exhaust gases produced from the slurry gasification reactor through the catalytic gasifier and subsequent gas separation and sequestration processes, a greatly higher energy efficiency and decreased carbon footprint can be realized.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 July 2009 (09.07.2009)

(10) International Publication Number
WO 2009/086407 A3

(51) International Patent Classification:

C10J 3/48 (2006.01) *C10K 1/10* (2006.01)
C10J 3/82 (2006.01) *C10K 3/02* (2006.01)
C10J 3/46 (2006.01) *C10L 3/08* (2006.01)

(21) International Application Number:

PCT/US2008/088210

(22) International Filing Date:

23 December 2008 (23.12.2008)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/017,321 28 December 2007 (28.12.2007) US

(71) Applicant (for all designated States except US):
GREATPOINT ENERGY, INC. [US/US]; 222 S.
Riverside Plaza, Suite 2750, Chicago, IL 60606 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LAU, Francis, S.**
[US/US]; 2135 Cypress Cross Drive, Lakeland, FL 22810
(US). **ROBINSON, Earl, T.** [US/US]; 2135 Cypress
Cross Drive, Lakeland, FL 22810 (US).

(74) Agent: **MIAO, Emily**; McDonnell Boehnen Hulbert &
Berghoff LLP, 300 S. Wacker Drive, Suite 3100, Chicago,
IL 60606 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,
EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG,
SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(88) Date of publication of the international search report:

17 December 2009

(54) Title: STEAM GENERATING SLURRY GASIFIER FOR THE CATALYTIC GASIFICATION OF A CARBONACEOUS FEEDSTOCK

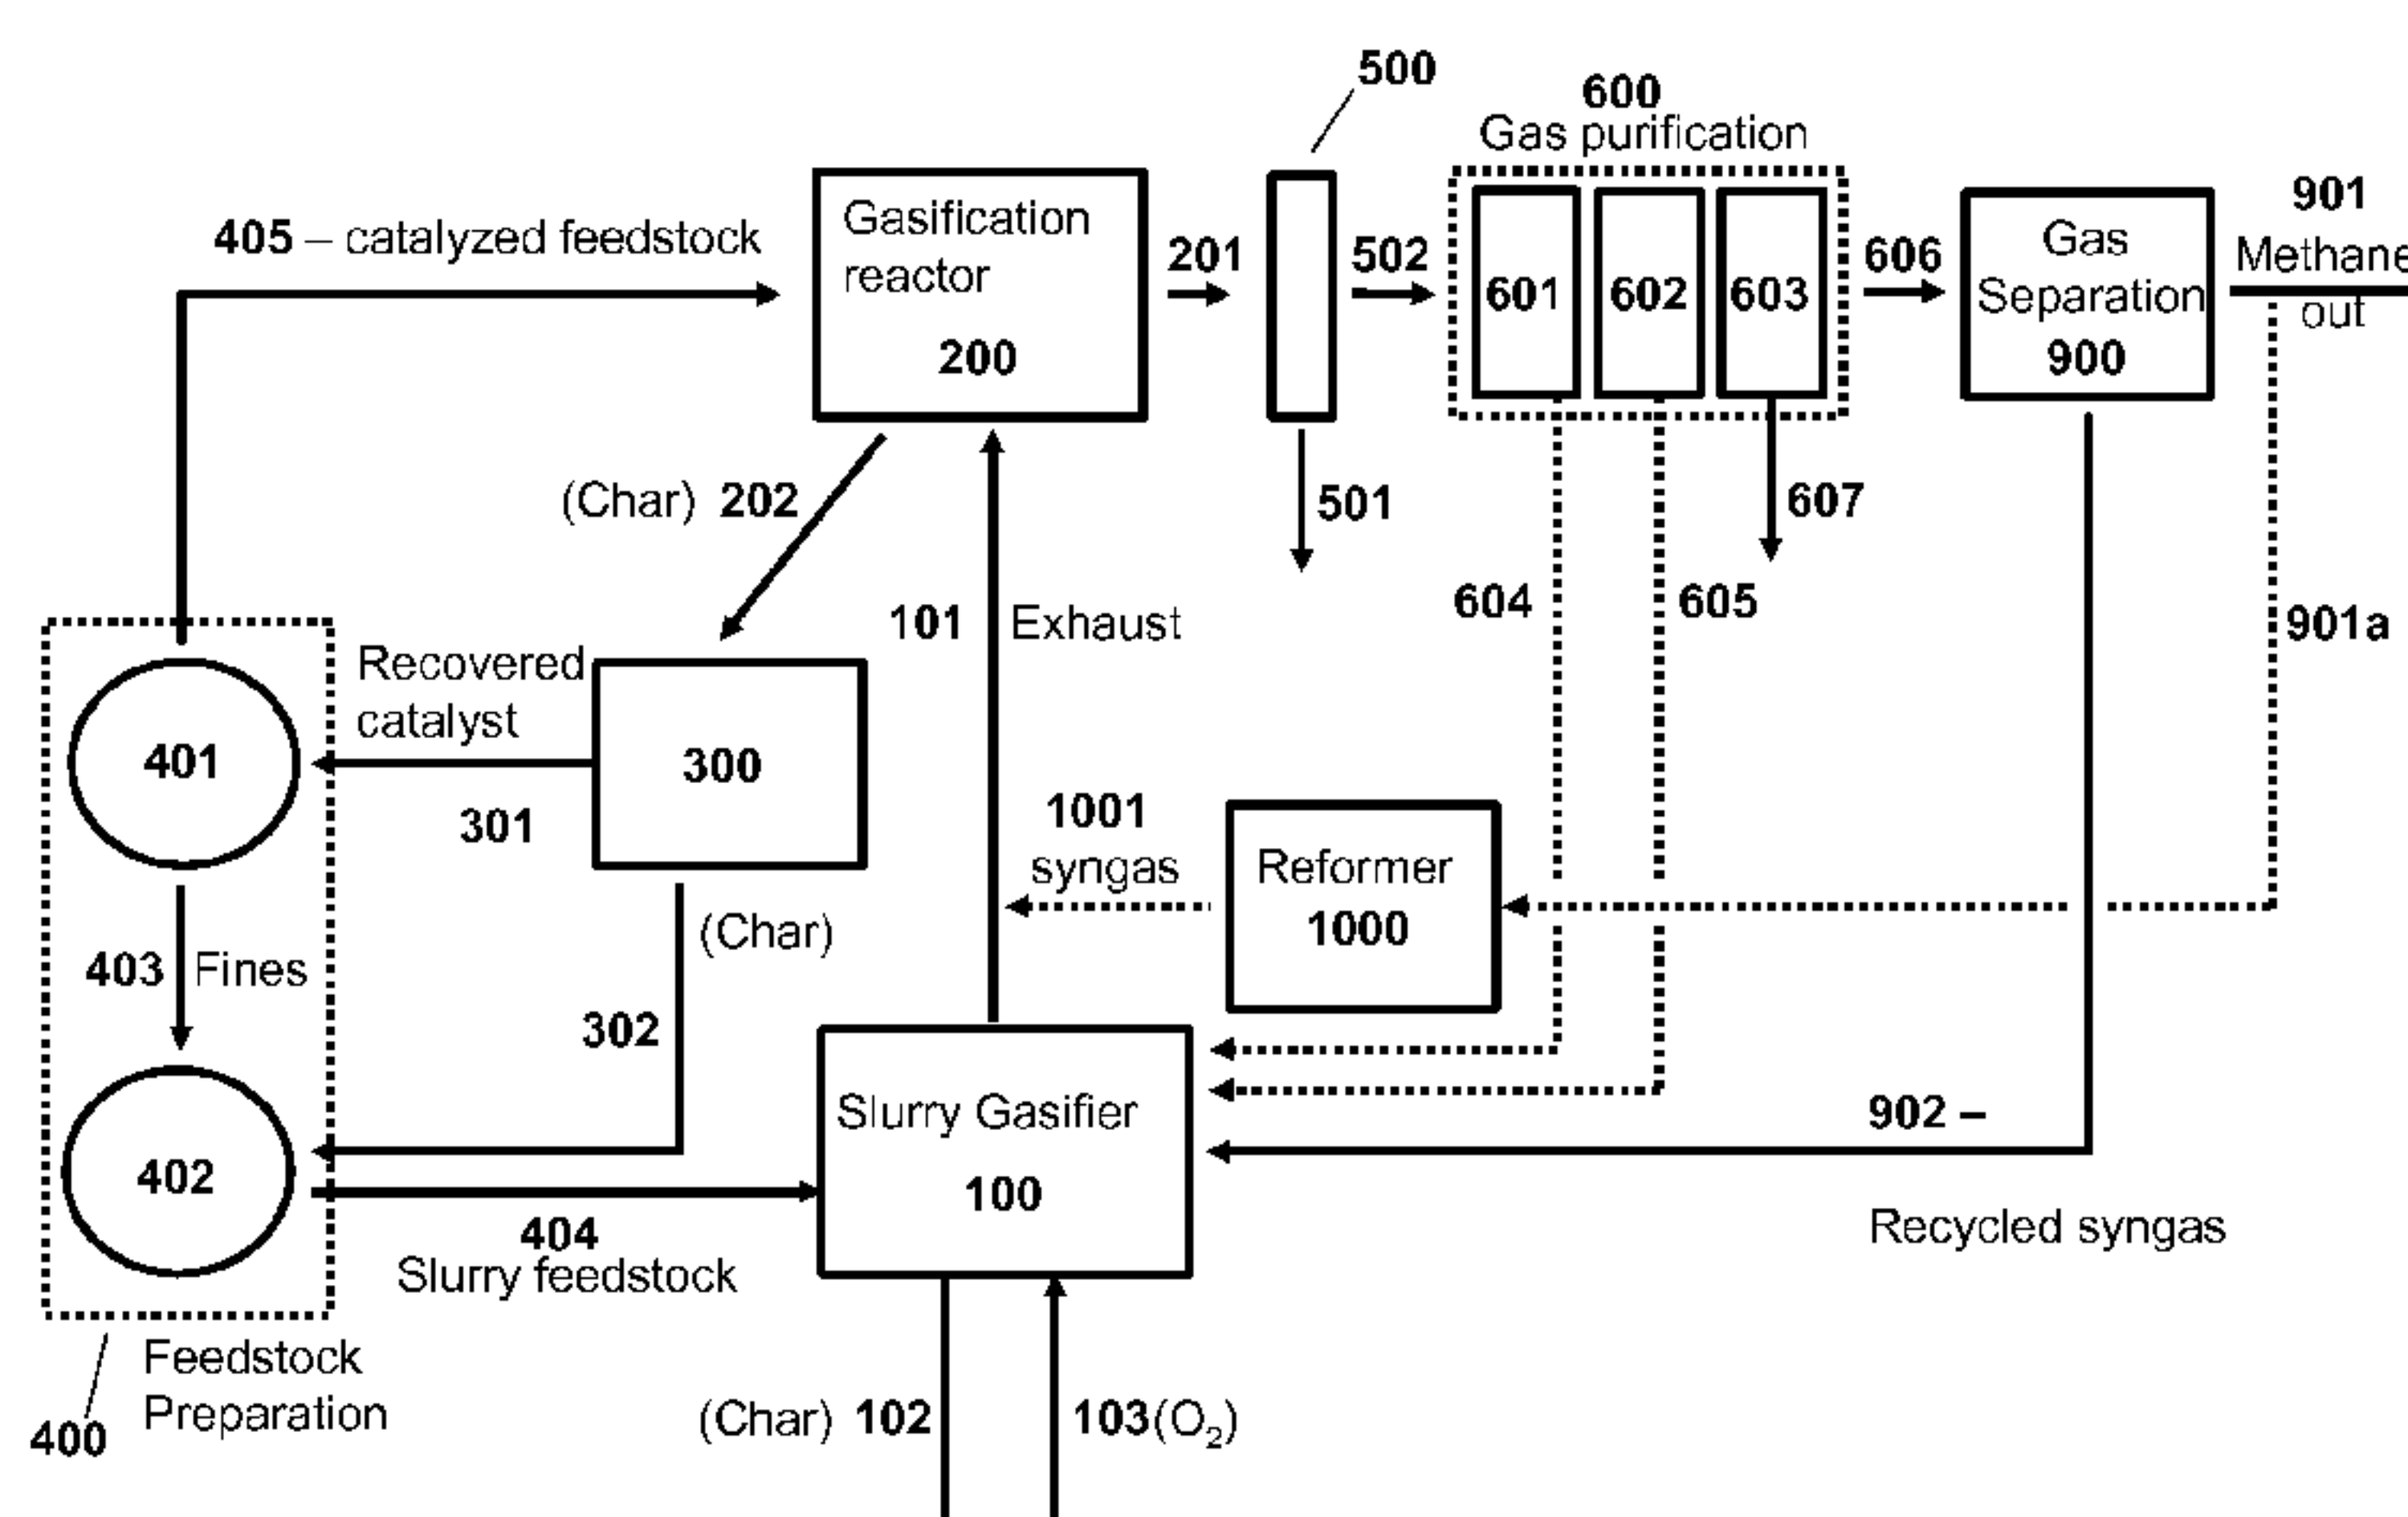


FIGURE 2

(57) Abstract: Steam generating gasification reactors for providing high-pressure and high- temperature steam for catalytic gasification of a carbonaceous feedstock can be based on oxygen blown gasification reactors adapted for processing a slurry feedstock comprising at least 40% water. The exhaust from the slurry gasifier comprises at least steam, carbon monoxide and hydrogen. The slurry composition and the oxygen to fuel ratio can be varied to control the ratio of carbonaceous gases in the generator exhaust. By directing substantially all of exhaust gases produced from the slurry gasification reactor through the catalytic gasifier and subsequent gas separation and sequestration processes, a greatly higher energy efficiency and decreased carbon footprint can be realized.

76909-417

STEAM GENERATING SLURRY GASIFIER FOR THE CATALYTIC GASIFICATION OF A CARBONACEOUS FEEDSTOCK

Field of the Invention

[0001] The present invention relates to a steam generating slurry gasifier which produces steam and synthesis gas from an aqueous carbonaceous feed slurry. Further, the invention relates to processes for preparation gaseous products, and in particular, methane via the catalytic gasification of carbonaceous feedstocks in the presence of steam and synthesis gas generated by the slurry gasifier.

Background of the Invention

[0002] In view of numerous factors such as higher energy prices and environmental concerns, the production of value-added gaseous products from lower-fuel-value carbonaceous feedstocks, such as petroleum coke and coal, is receiving renewed attention. The catalytic gasification of such materials to produce methane and other value-added gases is disclosed, for example, in US3828474, US3998607, US4057512, US4092125, US4094650, US4204843, US4468231, US4500323, US4541841, US4551155, US4558027, US4604105, US4617027, US4609456, US5017282, US5055181, US6187465, US6790430, US6894183, US6955695, US2003/0167691A1, US2006/0265953A1, US2007/000177A1, US2007/083072A1, US2007/0277437A1 and GB1599932.

[0003] The process for the catalytic gasification of a carbonaceous material to synthetic natural gas requires the presence of steam to react with carbon either in the gas phase or on the surface of the carbonaceous material to generate methane and carbon dioxide. It has generally been contemplated to utilize coal-fired boilers to generate the required steam. Such methods have the disadvantages of requiring an additional fuel source for the boiler, while producing an exhaust comprising additional acid gases (e.g, carbon dioxide, sulfur dioxide, nitrous oxides), which must be treated and exhausted to the atmosphere or otherwise sequestered. As such, there exists a need in the art to develop apparatuses and processes for the catalytic gasification of carbonaceous materials to synthetic natural gas which more efficiently utilize fuels sources while decreasing the carbon footprint of the overall process.

Summary of the Invention

[0004] In a first aspect, a gasifier apparatus is provided for producing a first plurality of gases comprising methane and one or more of hydrogen, carbon monoxide, carbon dioxide,

hydrogen sulfide, ammonia and other higher hydrocarbons from a catalyzed carbonaceous feedstock, the gasifier apparatus comprising: a fluidized bed gasifier configured to receive the catalyzed carbonaceous feedstock and a second plurality of gases comprising steam, hydrogen and carbon monoxide, and to exhaust the first plurality of gases; and a slurry gasifier configured to supply to the fluidized bed gasifier the second plurality of gases, the slurry gasifier comprising, a gasifier chamber; a slurry conduit for supplying an aqueous carbonaceous slurry as a reactant to the gasifier chamber; an optional syngas conduit in communication with a syngas source and the gasifier chamber for optionally supplying a syngas to the gasifier chamber; an oxygen gas conduit for supplying enriched oxygen gas as a reactant to the fluidized bed gasifier chamber; and a heated gas conduit in communication with the fluidized bed gasifier for supplying the second plurality of gases from the slurry gasifier to the fluidized bed gasifier.

[0005] In a second aspect, a slurry gasifier is provided for generating a plurality of gases comprising steam, hydrogen and carbon monoxide from an aqueous carbonaceous slurry, the slurry gasifier comprising, a gasifier chamber; an optional syngas conduit in communication with a syngas source and the gasifier chamber for optionally supplying a syngas to the gasifier chamber; an oxygen gas conduit for supplying enriched oxygen gas as a reactant to the gasifier chamber; a slurry conduit for supplying an aqueous carbonaceous slurry as a reactant to the gasifier chamber; and a heated gas conduit for exhausting the plurality of gases.

[0006] In a third aspect, a process is provided for generating a plurality of gases comprising steam, hydrogen and carbon monoxide, from an aqueous carbonaceous slurry, the process comprising the steps of: (a) providing a slurry gasifier; (b) supplying the slurry gasifier with an aqueous carbonaceous slurry, an enriched oxygen gas, and optionally a syngas, the slurry comprising carbonaceous matter and water in a weight ratio of from about 5:95 to about 60:40; and (c) reacting the aqueous carbonaceous slurry in the slurry gasifier in the presence of oxygen and under suitable temperature and pressure so as to generate the plurality of gases.

[0007] In a fourth aspect, a process is provided for converting a carbonaceous material into a first plurality of gases comprising methane and one or more of hydrogen, carbon monoxide, carbon dioxide, hydrogen sulfide, ammonia and other higher hydrocarbons, the process comprising the steps of: providing a gasifier apparatus having a fluidized bed gasifier and a

76909-417

slurry gasifier according to the first aspect; supplying a particulate composition comprising a carbonaceous material and a gasification catalyst to the fluidized bed gasifier, wherein the gasification catalyst, in the presence of steam and under suitable temperature and pressure, exhibits gasification activity whereby the first plurality of gases is formed; supplying an aqueous carbonaceous slurry, enriched oxygen gas and optionally a syngas to the slurry gasifier; reacting the aqueous carbonaceous slurry in the slurry gasifier in the presence of oxygen and under suitable temperature and pressure so as to generate a second plurality of gases comprising steam, hydrogen and carbon monoxide; introducing the second plurality of gases into the fluidized bed gasifier; reacting the particulate composition in the fluidized bed gasifier in the presence of the second plurality of gases, and under suitable temperature and pressure, to form the first plurality of gases; and at least partially separating the first plurality of gases to produce a stream comprising a predominant amount of one of the gases in the first plurality of gases, wherein the gasification catalyst comprises a source of at least one alkali metal and is present in an amount sufficient to provide, in the particulate composition, a ratio of alkali metal atoms to carbon atoms ranging from about 0.01 to about 0.08; and the aqueous carbonaceous slurry comprises a mixture of carbonaceous material and water at a weight ratio ranging from about 5:95 to about 60:40.

In one embodiment, the present invention provides a process for converting a carbonaceous material into a first plurality of gases comprising methane and one or more of hydrogen, carbon monoxide, carbon dioxide, hydrogen sulfide and ammonia, characterized in that the process comprising the steps of: (a) providing a gasifier apparatus comprising: (1) a fluidized bed gasifier configured to receive a catalyzed carbonaceous feedstock and a second plurality of gases comprising steam, hydrogen and carbon monoxide, and to exhaust the first plurality of gases; and (2) a slurry gasifier configured to supply to the fluidized bed gasifier the second plurality of gases, wherein the slurry gasifier comprises: a gasifier chamber, an optional syngas conduit in communication with a syngas source and the gasifier chamber for optionally supplying a syngas to the gasifier chamber, an oxygen gas conduit for supplying oxygen as a reactant to the gasifier chamber, a slurry conduit for supplying an aqueous carbonaceous slurry as a reactant to the gasifier chamber, and a heated gas conduit for exhausting the second plurality of gases; wherein the heated gas conduit of the slurry gasifier is in communication with the fluidized bed gasifier for supplying the second plurality of gases from the slurry gasifier to the fluidized bed gasifier; (b)

76909-417

supplying a particulate composition comprising the carbonaceous material and a gasification catalyst to the fluidized bed gasifier as the catalyzed carbonaceous feedstock, wherein the gasification catalyst, in the presence of steam and under suitable temperature and pressure, exhibits gasification activity whereby the first plurality of gases is formed; (c) supplying the

5 aqueous carbonaceous slurry via the slurry conduit, oxygen via the oxygen gas conduit, and optionally the syngas via the syngas conduit, to the slurry gasifier; (d) reacting the aqueous carbonaceous slurry in the slurry gasifier in the presence of oxygen and under suitable temperature and pressure so as to generate the second plurality of gases; (e) introducing the second plurality of gases into the fluidized bed gasifier via the heated gas conduit; (f) reacting the particulate

10 composition in the fluidized bed gasifier in the presence of the second plurality of gases and under suitable temperature and pressure to form the first plurality of gases; and (g) at least partially separating the first plurality of gases to produce a stream comprising most of one of the gases from the first plurality of gases, wherein: (i) the gasification catalyst comprises a source of at least one alkali metal and is present in an amount sufficient to provide, in the particulate composition, a

15 ratio of alkali metal atoms to carbon atoms ranging from about 0.01 to about 0.08; and (ii) the aqueous carbonaceous slurry comprises a mixture of carbonaceous material and water at a weight ratio ranging from about 5:95 to about 40:60

Brief Description of the Drawings

[0008] **Figure 1** is a schematic of an exemplary slurry gasifier of the invention.

20 [0009] **Figure 2** is a flow chart illustrating a system for generating gases from a carbonaceous feedstock utilizing a gasifier apparatus including a slurry gasifier and a fluidized bed gasifier according to the present invention.

Detailed Description

[0010] The present invention relates to steam generating slurry gasifiers for providing

25 high-pressure and high-temperature steam. The slurry gasifiers of the present invention are based on gasification reactors adapted for processing a slurry feedstock comprising at least 40% water. Such slurry gasifiers can be integrated into processes for the catalytic gasification of carbonaceous feedstock.

76909-417

[0011] Recent developments to catalytic gasification technology are disclosed in commonly owned US2007/0000177A1, US2007/0083072A1, US2007/0277437A1, US2009/0048476A1, US2009/0090055A1 and US2009/0090056A1. Moreover, the processes of the present invention can be practiced in conjunction with the subject matter described in

5 US2009/0166588A1, US2009/0165383A1, US2009/0165380A1, US2009/0165361A1, US2009/0165382A1, US2009/0165379A1, US2009/0170968A1, US2009/0169449A1, US2009/0169448A1, US2009/0165384A1 and US2009/0165381A1.

[0012]

[0013] Unless otherwise defined, all technical and scientific terms used herein have

10 the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. In case of conflict, the present specification, including definitions, will control.

[0014] Except where expressly noted, trademarks are shown in upper case.

[0015] Although methods and materials similar or equivalent to those described herein can be used in the practice or testing of the present invention, suitable methods and materials are described herein.

[0016] Unless stated otherwise, all percentages, parts, ratios, *etc.*, are by weight.

[0017] When an amount, concentration, or other value or parameter is given as a range, or a list of upper and lower values, this is to be understood as specifically disclosing all ranges formed from any pair of any upper and lower range limits, regardless of whether ranges are separately disclosed. Where a range of numerical values is recited herein, unless otherwise stated, the range is intended to include the endpoints thereof, and all integers and fractions within the range. It is not intended that the scope of the present invention be limited to the specific values recited when defining a range.

[0018] When the term "about" is used in describing a value or an end-point of a range, the invention should be understood to include the specific value or end-point referred to.

[0019] As used herein, the terms "comprises," "comprising," "includes," "including," "has," "having" or any other variation thereof, are intended to cover a non-exclusive inclusion. For example, a process, method, article, or apparatus that comprises a list of elements is not necessarily limited to only those elements but can include other elements not expressly listed or inherent to such process, method, article, or apparatus. Further, unless expressly stated to the contrary, "or" refers to an inclusive or and not to an exclusive or. For example, a condition A or B is satisfied by any one of the following: A is true (or present) and B is false (or not present), A is false (or not present) and B is true (or present), and both A and B are true (or present).

[0020] The use of "a" or "an" to describe the various elements and components herein is merely for convenience and to give a general sense of the invention. This description should be read to include one or at least one and the singular also includes the plural unless it is obvious that it is meant otherwise.

[0021] The materials, methods, and examples herein are illustrative only and, except as specifically stated, are not intended to be limiting.

Steam Generating Gasification Reactors

[0022] An embodiment of a steam generating gasification reactor (slurry gasifier; **10**) of the invention is illustrated in Figure 1 and utilizes a slurry feedstock in its operation. The slurry feedstock typically comprises water and a carbonaceous material, as discussed below. The reaction bed (**80**) can be based on a fluidized bed reactor, two stage fluidized bed reactor, counter-current fixed bed reactor, co-current fixed bed reactor, entrained flow reactor, or moving bed reactor. The slurry feedstock is introduced into the reactor according to methods known in the art through a slurry conduit (**70**). Enriched oxygen gas (or air) as a reactant is supplied through an oxygen gas conduit (**40**) to the reaction bed. Enriched oxygen can be supplied to the oxygen gas conduit according to methods known to those skilled in the art; for example, the oxygen gas can be supplied from a gas cylinder or from air generation units based on Pressure Swing Adsorption (PSA), Vacuum Swing Adsorption (VSA), Vacuum-Pressure Swing Adsorption (VPSA) and the like. An optional syngas conduit (**20**) connected to a syngas source (**30**) allows for supplying a syngas as a reactant and/or fluidization gas to the reactor bed. The syngas can be supplied to the syngas conduit from sources, such as a recycle syngas source for introducing a recycle syngas to the slurry gasifier. Finally, a heated gas conduit (**50**) allows for exhausting product gases to another preparation process (e.g., a second reactor).

[0023] When utilized with a slurry feedstock comprising a carbonaceous material, the slurry gasifier exhaust may comprise a plurality of gases including steam, hydrogen, carbon monoxide and other optional gases such as methane, carbon dioxide, hydrogen sulfide and ammonia, such gases having been generated from the slurry feedstock. The exhaust composition can be controlled based on the composition of the slurry feedstock and/or operating conditions. For example, slurry feedstocks having greater carbon contents can produce higher exhaust concentrations of CO and/or CO₂. Further, increased operating temperature can encourage higher concentrations of CO with respect to methane. In general, the steam and the other of the gases are generated at a molar ratio ranging from about 70:30 or from about 60:40, up to about 40: 60, or up to about 30:70 (steam: other gases).

[0024] In addition, the present slurry gasifier can produce a char (or slag) as a result of the gasification of the slurry feedstock. Typically, the slurry gasifier additionally comprises a conduit for removing char (**60**) from the base of the gasifier. Appropriate conduits include, but are not limited to, a lock hopper system, although other methods are known to those skilled in the art.

[0025] The slurry gasifier temperature will normally be maintained at or above about 450°F, or at or above about 1200°F, and at or below about 2000°F, or at or below about 1600°F; and the pressure will be at least about 200 psig, or at least about 400 psig, or at least about 600 psig, or at least about 1000 psig, up to about 1500 psig, or up to about 2000 psig, and in particular, about 600 psig to about 2000 psig, or about 1000 psig to about 2000 psig.

[0026] In one embodiment, the slurry gasifier of the invention can serve to supply the required steam, via the heated conduit (50), to a catalytic gasification reactor for the production of a gaseous product from a carbonaceous feedstock. Generally, when used as such, the operating temperature and pressure of the slurry gasifier will be greater than the catalytic gasification reactor operating temperature and pressure.

[0027] In certain embodiments, the slurry gasifier comprises a fluidized bed reactor (80). In such cases, reaction bed fluidization may be maintained by the introduction of a syngas via the optional syngas conduit (20). In some instances, the syngas source (30) can be a recycle syngas stream from a gas separation operation, as discussed below with respect to integration for catalytic gasification. As necessary, the recycle syngas can be passed through a gas compressor and/or preheater prior to introduction into the slurry gasifier reaction bed.

[0028] Advantageously, by preparing steam for a catalytic gasification process in accordance with the present invention, substantially all of the CO₂ produced from steam generation is directed through the gas separation and sequestration processes, as discussed below, enabling a greatly decreased carbon footprint as a result.

Slurry Feedstock for Slurry Gasifier

[0029] The feedstock supplied to the slurry gasifier typically comprises an aqueous slurry of a carbonaceous material. The aqueous slurry can contain a ratio of carbonaceous material to water, by weight, which ranges from about 5:95 to about 60:40; for example, the ratio can be about 5:95, about 10:90, about 15:85, about 20:80, about 25:75, about 30:70, about 35:65, or about 40:60, or about 50:50, or about 60:40, or any other value inbetween. Any of carbonaceous materials can be used alone or in combination and slurried with water (as necessary) to produce the aqueous slurry with a predetermined carbon and water content. The carbonaceous material for the slurry feedstock can comprise carbon sources containing at least about 20%, or at least about 30%, or at least about 40%, or at least about 50%, or at least about 60%, or at least about 70%, or at least about 80% carbon by dry weight.

[0030] The water for preparing the aqueous slurry can either be produced from a clean water feed (e.g., a municipal water supply) and/or recycle processes. For example, reclaimed water from sour water stripping operation (601, Figure 2) and/or catalytic feedstock drying operations (*infra*) can be directed for preparation of the aqueous slurry. In one embodiment, the water is not clean but instead contains organic matter, such as untreated wastewater from farming, coal mining, municipal waste treatment facilities or like sources. The organic matter in the wastewater becomes part of the carbonaceous material as indicated below.

[0031] The term "carbonaceous material" as used herein refers to any carbonaceous material including, but not limited to coal, petroleum coke, asphaltenes, liquid petroleum residues, used motor oil and other waste processed petroleum sources, untreated or treated sewage waste, garbage, plastics, wood and other biomass, or mixtures thereof.

[0032] The term "petroleum coke" as used herein includes (i) the solid thermal decomposition product of high-boiling hydrocarbon fractions obtained in petroleum processing (heavy residues); and (ii) the solid thermal decomposition product of processing tar sands (bituminous sands or oil sands). Such carbonization products include, for example, green, calcined, needle and fluidized bed petroleum coke. Petroleum coke is generally prepared via delayed coking or fluid coking. The petroleum coke can be residual material remaining after retorting tar sands (e.g., mined) are heated to extract any oil.

[0033] Resid petcoke can be derived from a crude oil, for example, by coking processes used for upgrading heavy-gravity residual crude oil, which petroleum coke contains ash as a minor component, typically about 1.0 wt% or less, and more typically about 0.5 wt% or less, based on the weight of the coke. Typically, the ash in such lower-ash cokes predominantly comprises metals such as nickel and vanadium.

[0034] Tar sands petcoke can be derived from an oil sand, for example, by coking processes used for upgrading oil sand. Tar sands petcoke contains ash as a minor component, typically in the range of about 2 wt% to about 12 wt%, and more typically in the range of about 4 wt% to about 12 wt%, based on the overall weight of the tar sands petcoke. Typically, the ash in such higher-ash cokes predominantly comprises materials such as compounds of silicon and/or aluminum.

[0035] The petroleum coke can comprise at least about 70 wt% carbon, at least about 80 wt% carbon, or at least about 90 wt% carbon, based on the total weight of the petroleum coke.

Typically, the petroleum coke comprises less than about 20 wt% percent inorganic compounds, based on the weight of the petroleum coke.

[0036] The term “liquid petroleum residue” as used herein includes both (i) the liquid thermal decomposition product of high-boiling hydrocarbon fractions obtained in petroleum processing (heavy residues – “resid liquid petroleum residue”) and (ii) the liquid thermal decomposition product of processing tar sands (bituminous sands or oil sands – “tar sands liquid petroleum residue”). The liquid petroleum residue is substantially non-solid; for example, it can take the form of a thick fluid or a sludge.

[0037] Resid liquid petroleum residue can be derived from a crude oil, for example, by processes used for upgrading heavy-gravity crude oil distillation residue. Such liquid petroleum residue contains ash as a minor component, typically about 1.0 wt% or less, and more typically about 0.5 wt% or less, based on the weight of the residue. Typically, the ash in such lower-ash residues predominantly comprises metals such as nickel and vanadium.

[0038] Tar sands liquid petroleum residue can be derived from an oil sand, for example, by processes used for upgrading oil sand. Tar sands liquid petroleum residue contains ash as a minor component, typically in the range of about 2 wt% to about 12 wt%, and more typically in the range of about 4 wt% to about 12 wt%, based on the overall weight of the residue. Typically, the ash in such higher-ash residues predominantly comprises materials such as compounds of silicon and/or aluminum.

[0039] The term “coal” as used herein means peat, lignite, sub-bituminous coal, bituminous coal, anthracite, graphite, or mixtures thereof. In certain embodiments, the coal has a carbon content of less than about 85%, or less than about 80%, or less than about 75%, or less than about 70%, or less than about 65%, or less than about 60%, or less than about 55%, or less than about 50% by weight, based on the total coal weight. In other embodiments, the coal has a carbon content ranging up to about 85%, or up to about 80%, or up to about 75% by weight, based on total coal weight. Examples of useful coals include, but are not limited to, Illinois #6, Pittsburgh #8, Beulah (ND), Utah Blind Canyon, and Powder River Basin (PRB) coals. Anthracite, bituminous coal, sub-bituminous coal, and lignite coal may contain about 10 wt%, from about 5 to about 7 wt%, from about 4 to about 8 wt %, and from about 9 to about 11 wt%, ash by total weight of the coal on a dry basis, respectively. However, the ash content of any particular coal source will depend on the rank and source of the coal, as is familiar to those skilled in the art. See, for example, “Coal Data: A Reference”, Energy

Information Administration, Office of Coal, Nuclear, Electric and Alternate Fuels, U.S. Department of Energy, DOE/EIA-0064(93), February 1995.

[0040] Asphaltenes typically comprise aromatic carbonaceous solids at room temperature, and can be derived, from example, from the processing of crude oil, oil shale, bitumen, and tar sands.

[0041] In addition, the carbonaceous material for the slurry feedstock can comprise the char produced in a catalytic gasification reactor, after gasification catalyst recovery, as discussed below.

Catalytic Gasification Methods

[0042] The slurry gasifier (100, Fig. 2) of the present invention is particularly useful in an integrated catalytic gasification process for converting carbonaceous materials to combustible gases, such as methane. A typical flow chart for integration into a process for generating a combustible gas from a carbonaceous feedstock is illustrated in Figure 2, and referenced herein.

[0043] The catalytic gasification reactor (catalytic gasifier; 200) for such processes are typically operated at moderately high pressures and temperature, requiring introduction of the catalyzed feedstock (405) to the reaction zone of the catalytic gasifier while maintaining the required temperature, pressure, and flow rate of the feedstock. Those skilled in the art are familiar with feed systems for providing feedstocks to high pressure and/or temperature environments, including, star feeders, screw feeders, rotary pistons, and lock-hoppers. It should be understood that the feed system can include two or more pressure-balanced elements, such as lock hoppers, which would be used alternately.

[0044] The catalyzed feedstock is provided to the catalytic gasifier (200) from a feedstock preparation operation (400), and generally comprises a particulate composition of a crushed carbonaceous material and a gasification catalyst, as discussed below. In some instances, the catalyzed feedstock (405) can be prepared at pressures conditions above the operating pressure of catalytic gasifier. Hence, the catalyzed feedstock (405) can be directly passed into the catalytic gasifier without further pressurization.

[0045] Any of several catalytic gasifiers (200) can be utilized in the process of the described herein. Suitable gasifiers include counter-current fixed bed, co-current fixed bed, fluidized bed, entrained flow, and moving bed reactors. The pressure in the catalytic gasifier (200)

76909-417

typically can be from about 10 to about 100 atm (from about 150 to about 1500 psig). The gasification reactor temperature can be maintained around at least about 450°C, or about 600°C, or about 900°C, or about 750°C, or about 600°C to about 700°C; and at pressures of at least about 50 psig, or about 200 psig, or about 400 psig, to about 1000 psig, or to about 700 psig, or to about 600 psig.

[0046] The gas utilized in the catalytic gasifier for pressurization and reactions of the particulate composition comprises steam, and optionally, oxygen or air. The latter can be supplied, as necessary, to the reactor according to methods known to those skilled in the art (not shown in Figure 2).

[0047] Steam is supplied to the catalytic gasifier from the exhaust (101) of the slurry gasifier (100) of the present invention and is conveyed via a heated gas conduit from the slurry gasifier to the catalytic gasifier (200). The slurry gasifier (100) is fed with a slurry feedstock (404), as discussed previously, from a slurry feedstock preparation operation (402) and an enriched oxygen gas stream (103). Therein, in one example, fines (403) generated in the crushing of carbonaceous materials for the preparation of the catalyzed feedstock (401) for the catalytic gasifier can be used in preparing (402) the present slurry feedstock (404). Notably, a second source for fines can be from waste fines from bituminous coal cleaning and existing waste coal impoundments or ponds, thereby aiding in improving and preventing environmental pollution as a result of mining and processing operations.

[0048] Recycled steam from other process operations can also be used for supplementing steam to the catalytic gasifier. For example in the preparation of the catalyzed feedstock, when slurried particulate composition are dried with a fluid bed slurry drier, as discussed previously, then the steam generated can be fed to the catalytic gasification reactor (200).

[0049] The small amount of required heat input for the catalytic gasifier can be provided by superheating a gas mixture of steam and recycle gas feeding the gasification reactor by any method known to one skilled in the art. In one method, compressed recycle gas of CO and H₂ can be mixed with steam and the resulting steam/recycle gas mixture can be further superheated by heat exchange with the catalytic gasifier effluent followed by superheating in a recycle gas furnace.

[0050] A methane reformer (1000) can be optionally included in the process to supplement the recycle CO and H₂ stream and the exhaust (101) from the slurry gasifier to ensure that the catalytic gasifier is run under substantially thermally neutral (adiabatic) conditions. In such

76909-417

instances, methane (901a) can be supplied for the reformer from the methane product (901), as described below.

[0051] Reaction of the catalyzed feedstock (405) in the catalytic gasifier (200) and the slurry feedstock (404) in the slurry gasifier (100), under the described conditions, provides a crude product gas and a char (202) from the catalytic gasification reactor and an exhaust gas (101) and char (102) for the slurry gasifier.

[0052] The char produced in the catalytic gasifier (202) processes is typically removed from the catalytic gasifier for sampling, purging, and/or catalyst recovery in a continuous or batch-wise manner. Methods for removing char are well known to those skilled in the art. One such method taught by EP-A-0102828, for example, can be employed. The char can be periodically withdrawn from the catalytic gasification reactor through a lock hopper system, although other methods are known to those skilled in the art.

[0053] Often, the char (202) from the catalytic gasifier is directed to a catalyst recovery and recycle process (300). Processes have been developed to recover alkali metal from the solid purge in order to reduce raw material costs and to minimize environmental impact of a catalytic gasification process. For example, the char (202) can be quenched with recycle gas and water and directed to a catalyst recycling operation for extraction and reuse of the alkali metal catalyst. Particularly useful recovery and recycling processes are described in US4459138, as well as US4057512, US2007/0277437A1, US2009/0165383A1, US2009/0165382A1, US2009/0169449A1 and US2009/0169448A1. Reference can be had to those documents for further process details.

[0054] Upon completion of catalyst recovery, both the char, substantially free of the gasification catalysts (302) as described herein, and the recovered catalyst (301) (as a solution or solid) can be directed to the feedstock preparation operation (400) comprising a catalyzed

feedstock preparation process (401) and a slurry feedstock preparation process (402), as described herein.

[0055] The char (102) produced in the slurry gasifier (100) reactor is typically removed via similar methods to those described for the catalytic gasification reactor. However, the char (102) from the slurry gasifier (100) is not normally processed through catalyst recovery, but rather, can be processed for disposal.

[0056] Crude product gas effluent (201) leaving the catalytic gasifier (200) can pass through a portion of the reactor which serves as a disengagement zone where particles too heavy to be entrained by the gas leaving the reactor (*i.e.*, fines) are returned to the fluidized bed. The disengagement zone can include one or more internal cyclone separators or similar devices for removing fines and particulates from the gas. The gas effluent (201) passing through the disengagement zone and leaving the catalytic gasifier generally contains CH₄, CO₂, H₂ and CO, H₂S, NH₃, unreacted steam, entrained fines, and other contaminants such as COS.

[0057] The gas stream from which the fines have been removed (201) can then be passed through a heat exchanger (500) to cool the gas and the recovered heat can be used to preheat recycle gas and generate high pressure steam (501). Residual entrained fines can also be removed by any suitable means such as external cyclone separators followed by Venturi scrubbers. The recovered fines can be processed to recover alkali metal catalyst then passed to the slurry feedstock preparation process (402) or returned to the catalytic gasification reactor (100).

[0058] The gas stream (502) exiting the Venturi scrubbers can be fed to a gas purification operation (600) comprising COS hydrolysis reactors (601) for COS removal (sour process) and further cooled in a heat exchanger to recover residual heat prior to entering water scrubbers (602) for ammonia recovery, yielding a scrubbed gas comprising at least H₂S, CO₂, CO, H₂ and CH₄. Methods for COS hydrolysis are known to those skilled in the art, for example, see US4100256. The residual heat from the scrubbed gas can be used to generate low pressure steam.

[0059] Scrubber water (605) and sour process condensate (604) can be processed to strip and recover H₂S, CO₂ and NH₃; such processes are well known to those skilled in the art. NH₃ can typically be recovered as an aqueous solution (*e.g.*, 20 wt%). Alternatively, scrubber water (605) and sour process condensate (604) can be returned to the slurry gasifier, thereby

reducing overall process water usage and eliminating separate cleanup of these process streams.

[0060] A subsequent acid gas removal process (603) can be used to remove H₂S and CO₂ from the scrubbed gas stream by a physical absorption method involving solvent treatment of the gas to give a cleaned gas stream. Such processes involve contacting the scrubbed gas with a solvent such as monoethanolamine, diethanolamine, methyldiethanolamine, diisopropylamine, diglycolamine, a solution of sodium salts of amino acids, methanol, hot potassium carbonate or the like. One method can involve the use of Selexol® (UOP LLC, Des Plaines, IL USA) or Rectisol® (Lurgi AG, Frankfurt am Main, Germany) solvent having two trains; each train consisting of an H₂S absorber and a CO₂ absorber. The spent solvent (607) containing H₂S, CO₂ and other contaminants can be regenerated by any method known to those skilled in the art, including contacting the spent solvent with steam or other stripping gas to remove the contaminants or by passing the spent solvent through stripper columns. Recovered acid gases can be sent for sulfur recovery processing; for example, any recovered H₂S from the acid gas removal and sour water stripping can be converted to elemental sulfur by any method known to those skilled in the art, including the Claus process. Sulfur can be recovered as a molten liquid. Stripped water can be directed for recycled use in preparation of the catalyzed feedstock and/or slurry feedstock.

[0061] Advantageously, CO₂ generated in the process, whether in the steam generation or catalytic gasification or both, can be recovered for subsequent use or sequestration, enabling a greatly decreased carbon footprint (as compared to direct combustion of the feedstock) as a result.

[0062] The resulting cleaned gas stream (606) exiting the gas purification operation (600) contains mostly CH₄, H₂, and CO and, typically, small amounts of CO₂ and H₂O. The cleaned gas stream (606) can be further processed to separate and recover CH₄ by any suitable gas separation method (900) known to those skilled in the art including, but not limited to, cryogenic distillation and the use of molecular sieves or ceramic membranes. One method for recovering CH₄ from the cleaned gas stream involves the combined use of molecular sieve absorbers to remove residual H₂O and CO₂, and cryogenic distillation to fractionate and recover CH₄. Typically, two gas streams can be produced by the gas separation process (900), a methane product stream (901) and a syngas stream (902, H₂ and CO).

[0063] The syngas stream (902) can be compressed and recycled. One option can be to recycle the syngas stream directly to the catalytic gasifier (200). In one case, the recycled syngas is combined with the exhaust gas (101) from the slurry gasifier, and the mixture introduced into the catalytic gasification reactor (200). In another case, as exemplified in Figure 2, the recycled syngas (902) can be directed into the slurry gasifier (100). When a fluid bed reactor is utilized for the slurry gasifier (100), the syngas may provide fluidization or aid in fluidization of the reaction bed.

[0064] If necessary, a portion of the methane product (901a) can be directed to a reformer (1000), as discussed previously. The need to direct a portion of the methane product can be controlled, for example, by the ratio of CO to H₂ in the exhaust gas from the slurry gasifier (100). Particularly, methane can be directed to a reformer to supplement (1001) the exhaust gas (101) supplied to the catalytic gasification reactor and, in some instance, provide a ratio of about 3:1 of H₂ to CO in the feed to the catalytic gasification reactor. A portion of the methane product can also be used as plant fuel for a gas turbine.

Feedstock for Catalytic Gasification

[0065] The catalyzed feedstock (405) for the catalytic gasifier typically comprises at least one carbonaceous material, as discussed previously, and a gasification catalyst.

[0066] The catalyzed feedstock is typically supplied as a fine particulate having an average particle size of from about 250 microns, or from about 25 microns, up to about 500, or up to about 2500 microns. One skilled in the art can readily determine the appropriate particle size for the individual particulates and the catalyzed feedstock. For example, when a fluid bed gasification reactor is used, the catalyzed feedstock can have an average particle size which enables incipient fluidization of the catalyzed feedstock at the gas velocity used in the fluid bed gasification reactor.

Catalyst Components

[0067] The catalyzed feedstock further comprises an amount of an alkali metal component, as alkali metal and/or a compound containing alkali metal, as well as optional co-catalysts, as disclosed in the previous incorporated references. Typically, the quantity of the alkali metal component in the composition is sufficient to provide a ratio of alkali metal atoms to carbon atoms ranging from about 0.01, or from about 0.02, or from about 0.03, or from about 0.04, to about 0.06, or to about 0.07, or to about 0.08. Further, the alkali metal is typically loaded

onto a carbon source to achieve an alkali metal content of from about 3 to about 10 times more than the combined ash content of the carbonaceous material (e.g., coal and/or petroleum coke), on a mass basis.

[0068] Suitable alkali metals are lithium, sodium, potassium, rubidium, cesium, and mixtures thereof. Particularly useful are potassium sources. Suitable alkali metal compounds include alkali metal carbonates, bicarbonates, formates, oxalates, amides, hydroxides, acetates, or similar compounds. For example, the catalyst can comprise one or more of Na_2CO_3 , K_2CO_3 , Rb_2CO_3 , Li_2CO_3 , Cs_2CO_3 , NaOH , KOH , RbOH or CsOH , and particularly, potassium carbonate and/or potassium hydroxide.

Methods for Making the Catalyzed Feedstock

[0069] The carbonaceous material for use in the preparation of the particulate composition can require initial processing to prepare the catalyzed feedstock (405) for catalytic gasification. For example, when using a catalyzed feedstock comprising a mixture of two or more carbonaceous materials, such as petroleum coke and coal, the petroleum coke and coal can be separately processed to add catalyst to one or both portions, and subsequently mixed. Alternately, the carbonaceous materials can be combined immediately prior to the addition of a catalyst.

[0070] The carbonaceous materials can be crushed and/or ground according to any methods known in the art, such as impact crushing and wet or dry grinding to yield particulates of each. Depending on the method utilized for crushing and/or grinding of the carbonaceous material, the resulting particulates can be sized (*i.e.*, separated according to size) to provide an appropriate feedstock.

[0071] Any method known to those skilled in the art can be used to size the particulates. For example, sizing can be preformed by screening or passing the particulates through a screen or number of screens. Screening equipment can include grizzlies, bar screens, and wire mesh screens. Screens can be static or incorporate mechanisms to shake or vibrate the screen. Alternatively, classification can be used to separate the petroleum coke and coal particulates. Classification equipment can include ore sorters, gas cyclones, hydrocyclones, rake classifiers, rotating trommels, or fluidized classifiers. The carbonaceous material can be also sized or classified prior to grinding and/or crushing. Any fines (403) separated from the preparation process can be directed to preparation (402) of the slurry feedstock for the slurry gasification reactor (100), as discussed previously.

76909-417

[0072] Additional feedstock processing steps may be necessary depending on the qualities of carbonaceous materials. For example, carbonaceous materials containing high moisture levels, such as raw and/or treated sewage and high-moisture coals, can require drying prior to crushing. Some caking coals can require partial oxidation to simplify gasification reactor operation. Various coals deficient in ion-exchange sites can be pre-treated to create additional ion-exchange sites to facilitate catalysts loading and/or association. Such pre-treatments can be accomplished by any method known to the art that creates ion-exchange capable sites and/or enhances the porosity of a coal feed (see, for example, US4468231 and GB1599932). Often, pre-treatment is accomplished in an oxidative manner using any oxidant known to the art.

[0073] In one example, coal is typically wet ground and sized (*e.g.*, to a particle size distribution of about 25 to 2500 microns) and then drained of its free water (*i.e.*, dewatered) to a wet cake consistency. Examples of suitable methods for the wet grinding, sizing, and dewatering are known to those skilled in the art; for example, see US2009/0048476A1.

[0074] Any methods known to those skilled in the art can be used to associate one or more gasification catalysts with the carbonaceous material. Such methods include but are not limited to, admixing with a solid catalyst source, impregnating the catalyst on to the carbonaceous material particulate, incipient wetness impregnation, evaporative impregnation, vacuum impregnation, dip impregnation, and combinations of these methods. Gasification catalysts can be impregnated into the carbonaceous materials (*i.e.*, particulate) by slurring with a solution (*e.g.*, aqueous) of the catalyst.

[0075] The carbonaceous material particulate can be treated to associate at least a first catalyst (*e.g.*, gasification catalyst) therewith, providing the catalyzed feedstock. In some cases, a second catalyst (*e.g.*, co-catalyst) can be provided; in such instances, the particulate can be treated in separate processing steps to provide the first catalyst and second catalysts. For example, the primary gasification catalyst can be supplied (*e.g.*, a potassium and/or sodium source), followed by a separate treatment to provide a co-catalyst source. Alternatively, the first and second catalysts can be provided as a mixture in a single treatment.

[0076] One particular method suitable for combining coals with the gasification catalysts and optional co-catalysts to provide a particulate composition where the various components have been associated with the coal particulate via ion exchange is described in

76909-417

US2009/0048476A1. The ion exchange loading mechanism is maximized (based on adsorption isotherms specifically developed for the coal), and the additional catalyst retained on wet including those inside the pores is controlled so that the total catalyst target value is obtained in a controlled manner. Such loading provides a particulate composition as a wet cake. The catalyst loaded and dewatered wet coal cake typically contains, for example, about 50 % moisture. The total amount of catalyst loaded is controlled by controlling the concentration of catalyst components in the solution, as well as the contact time, temperature and method, as can be readily determined by those of ordinary skill in the relevant art based on the characteristics of the starting coal.

[0077] Additional particulates derived from carbonaceous materials can be combined with the catalyzed feedstock prior to introduction into the catalytic gasification reactor by any methods known to those skilled in the art. For example, a catalyzed feedstock comprising a coal particulate and a gasification catalyst can be combined with biomass. Such methods include, but are not limited to, kneading, and vertical or horizontal mixers, for example, single or twin screw, ribbon, or drum mixers. The catalyzed feedstock (405) can be stored for future use or transferred to a feed operation for introduction into a gasification reactor. The catalyzed feedstock (405) can be conveyed to storage or feed operations according to any methods known to those skilled in the art, for example, a screw conveyer or pneumatic transport.

Examples

[0078] Example 1

[0079] *Catalyzed and Slurry Feedstock Preparation*

[0080] As-received coal (Powder River Basin) can be stage-crushed to maximize the amount of material having particle sizes ranging from about 0.85 to about 1.4 mm. Fines (< 0.85 mm) can be separated from the crushed materials by vibratory screening and directed for preparation of the slurry feedstock.

[0081] The crushed coal can be slurried with an aqueous solution of potassium carbonate, dewatered, and dried via a fluid bed slurry drier to yield a catalyzed feedstock containing 185 lb coal (88 wt%), 14.9 lb catalyst (7 wt%), and 10.5 lb moisture (5 wt%). The coal fines separated at the crushing stage can be slurried with water to a composition of 75 wt% water

(263 lb) and 25 wt% coal fines (88 lb) by weight and subsequently can be used as the slurry feedstock for the slurry gasifier.

[0082] Example 2

[0083] *Catalytic Gasification*

[0084] The slurry feedstock of Example 1 can be provided to a fluidized bed gasification reactor (slurry gasifier) fed by an enriched oxygen source (96 lb/hr) and a syngas source (17.7 w% H₂, 82.3% CO; 75.48 lb/hr). Typical gasification conditions for the slurry gasifier would be: total pressure 550 psi, and temperature, 1700-1900°F.; char would be generated at a rate of 12.1 lb/hr.

[0085] The resulting exhaust (561.6 lb/hr) from the slurry gasifier would contain steam (277.5 lb/hr), hydrogen (12.89 lb/hr), CO (62.27 lb/hr), CO₂ (187.84 lb/hr) and methane (11.06 lb/hr), and could be provided to a second fluidized bed gasification reactor (catalytic gasifier) supplied with the catalyzed feedstock (210 lb/hr) of Example 1. The catalyzed feedstock would be introduced under a positive pressure of nitrogen (45.8 lb/hr). Typical conditions for the catalytic gasifier would be: total pressure, 500 psi and temperature, 1200°F. The effluent of the catalytic gasifier (34.46 lb/hr) would contain methane (17.7 mol%), CO₂ (23.0 mol%), H₂ (17 mol.%), CO (8.2 mol%), water (28.9 mol%), H₂S (0.1 mol%), ammonia (0.3 mol%), and nitrogen (4.7 mol%).

76909-417

CLAIMS:

1. A process for converting a carbonaceous material into a first plurality of gases comprising methane and one or more of hydrogen, carbon monoxide, carbon dioxide, hydrogen sulfide and ammonia, characterized in that the process comprising the steps of:

5 (a) providing a gasifier apparatus comprising:

(1) a fluidized bed gasifier configured to receive a catalyzed carbonaceous feedstock and a second plurality of gases comprising steam, hydrogen and carbon monoxide, and to exhaust the first plurality of gases; and

10 (2) a slurry gasifier configured to supply to the fluidized bed gasifier the second plurality of gases, wherein the slurry gasifier comprises:

a gasifier chamber,

an optional syngas conduit in communication with a syngas source and the gasifier chamber for optionally supplying a syngas to the gasifier chamber,

15 an oxygen gas conduit for supplying oxygen as a reactant to the gasifier chamber,

a slurry conduit for supplying an aqueous carbonaceous slurry as a reactant to the gasifier chamber, and

a heated gas conduit for exhausting the second plurality of gases;

20 wherein the heated gas conduit of the slurry gasifier is in communication with the fluidized bed gasifier for supplying the second plurality of gases from the slurry gasifier to the fluidized bed gasifier;

(b) supplying a particulate composition comprising the carbonaceous material and a gasification catalyst to the fluidized bed gasifier as the catalyzed carbonaceous feedstock, wherein the gasification catalyst, in the presence of steam and under suitable

76909-417

temperature and pressure, exhibits gasification activity whereby the first plurality of gases is formed;

(c) supplying the aqueous carbonaceous slurry via the slurry conduit, oxygen via the oxygen gas conduit, and optionally the syngas via the syngas conduit, to the slurry
5 gasifier;

(d) reacting the aqueous carbonaceous slurry in the slurry gasifier in the presence of oxygen and under suitable temperature and pressure so as to generate the second plurality of gases;

(e) introducing the second plurality of gases into the fluidized bed gasifier via
10 the heated gas conduit;

(f) reacting the particulate composition in the fluidized bed gasifier in the presence of the second plurality of gases and under suitable temperature and pressure to form the first plurality of gases; and

(g) at least partially separating the first plurality of gases to produce a stream
15 comprising most of one of the gases from the first plurality of gases,

wherein:


(i) the gasification catalyst comprises a source of at least one alkali metal and is present in an amount sufficient to provide, in the particulate composition, a ratio of alkali metal atoms to carbon atoms ranging from about 0.01 to about 0.08; and


20 (ii) the aqueous carbonaceous slurry comprises a mixture of carbonaceous material and water at a weight ratio ranging from about 5:95 to about 40:60.

2. The process according to claim 1, wherein the first plurality of gases comprises carbon dioxide, and the process comprises the further step of recovering the carbon dioxide.

76909-417

3. The process according to claim 2, characterized in that the carbon dioxide is generated in both step (d) and step (f).
4. The process according to any one of claims 1 to 3, characterized in that the operating temperature and pressure of the slurry gasifier is greater than the fluidized bed
5 gasifier.
5. The process according to any one of claims 1 to 4, wherein a char is formed in step (f), and the char is removed from the fluidized bed gasifier and sent to a catalyst recovery and recycle process.
6. The process according to any one of claims 1 to 5, wherein the stream
10 comprises most of the methane from the first plurality of gases.
7. The process according to any one of claims 1 to 6, wherein in step (f) the particulate composition is reacted in the presence of the second plurality of gases at a temperature of at least 450°C to 750°C and a pressure of at least 50 psig to 1000 psig.

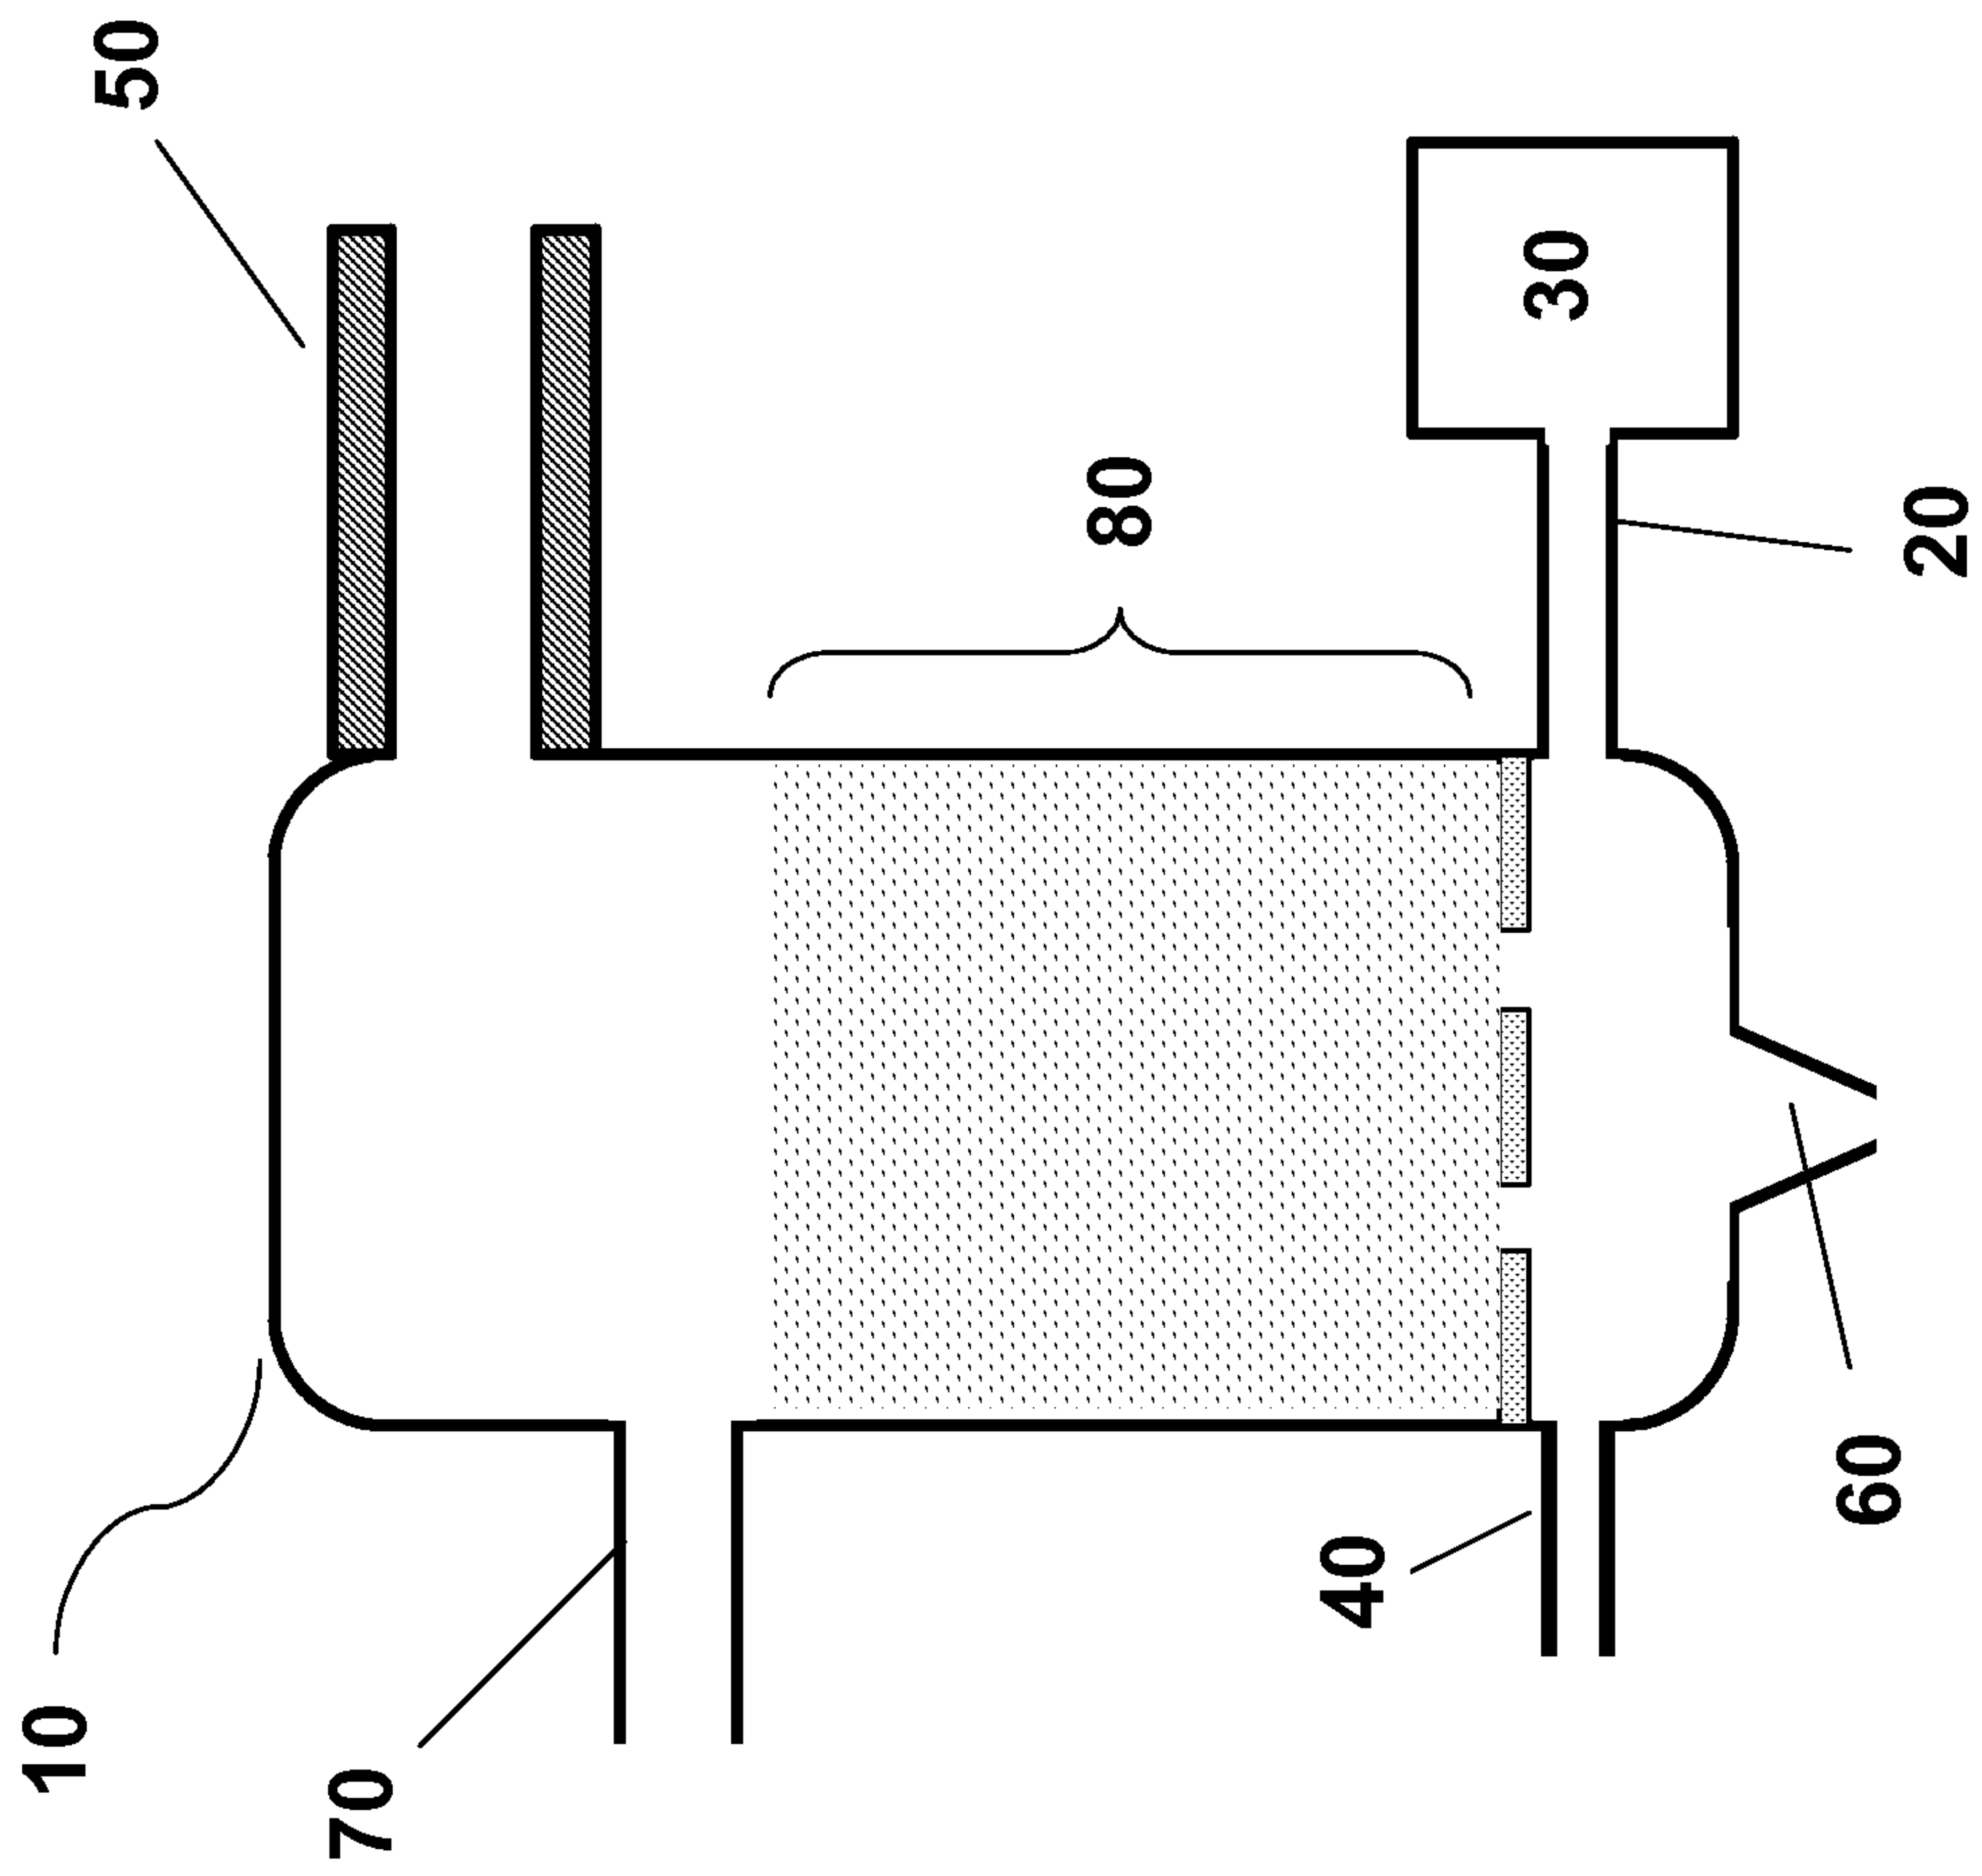**FIGURE 1**

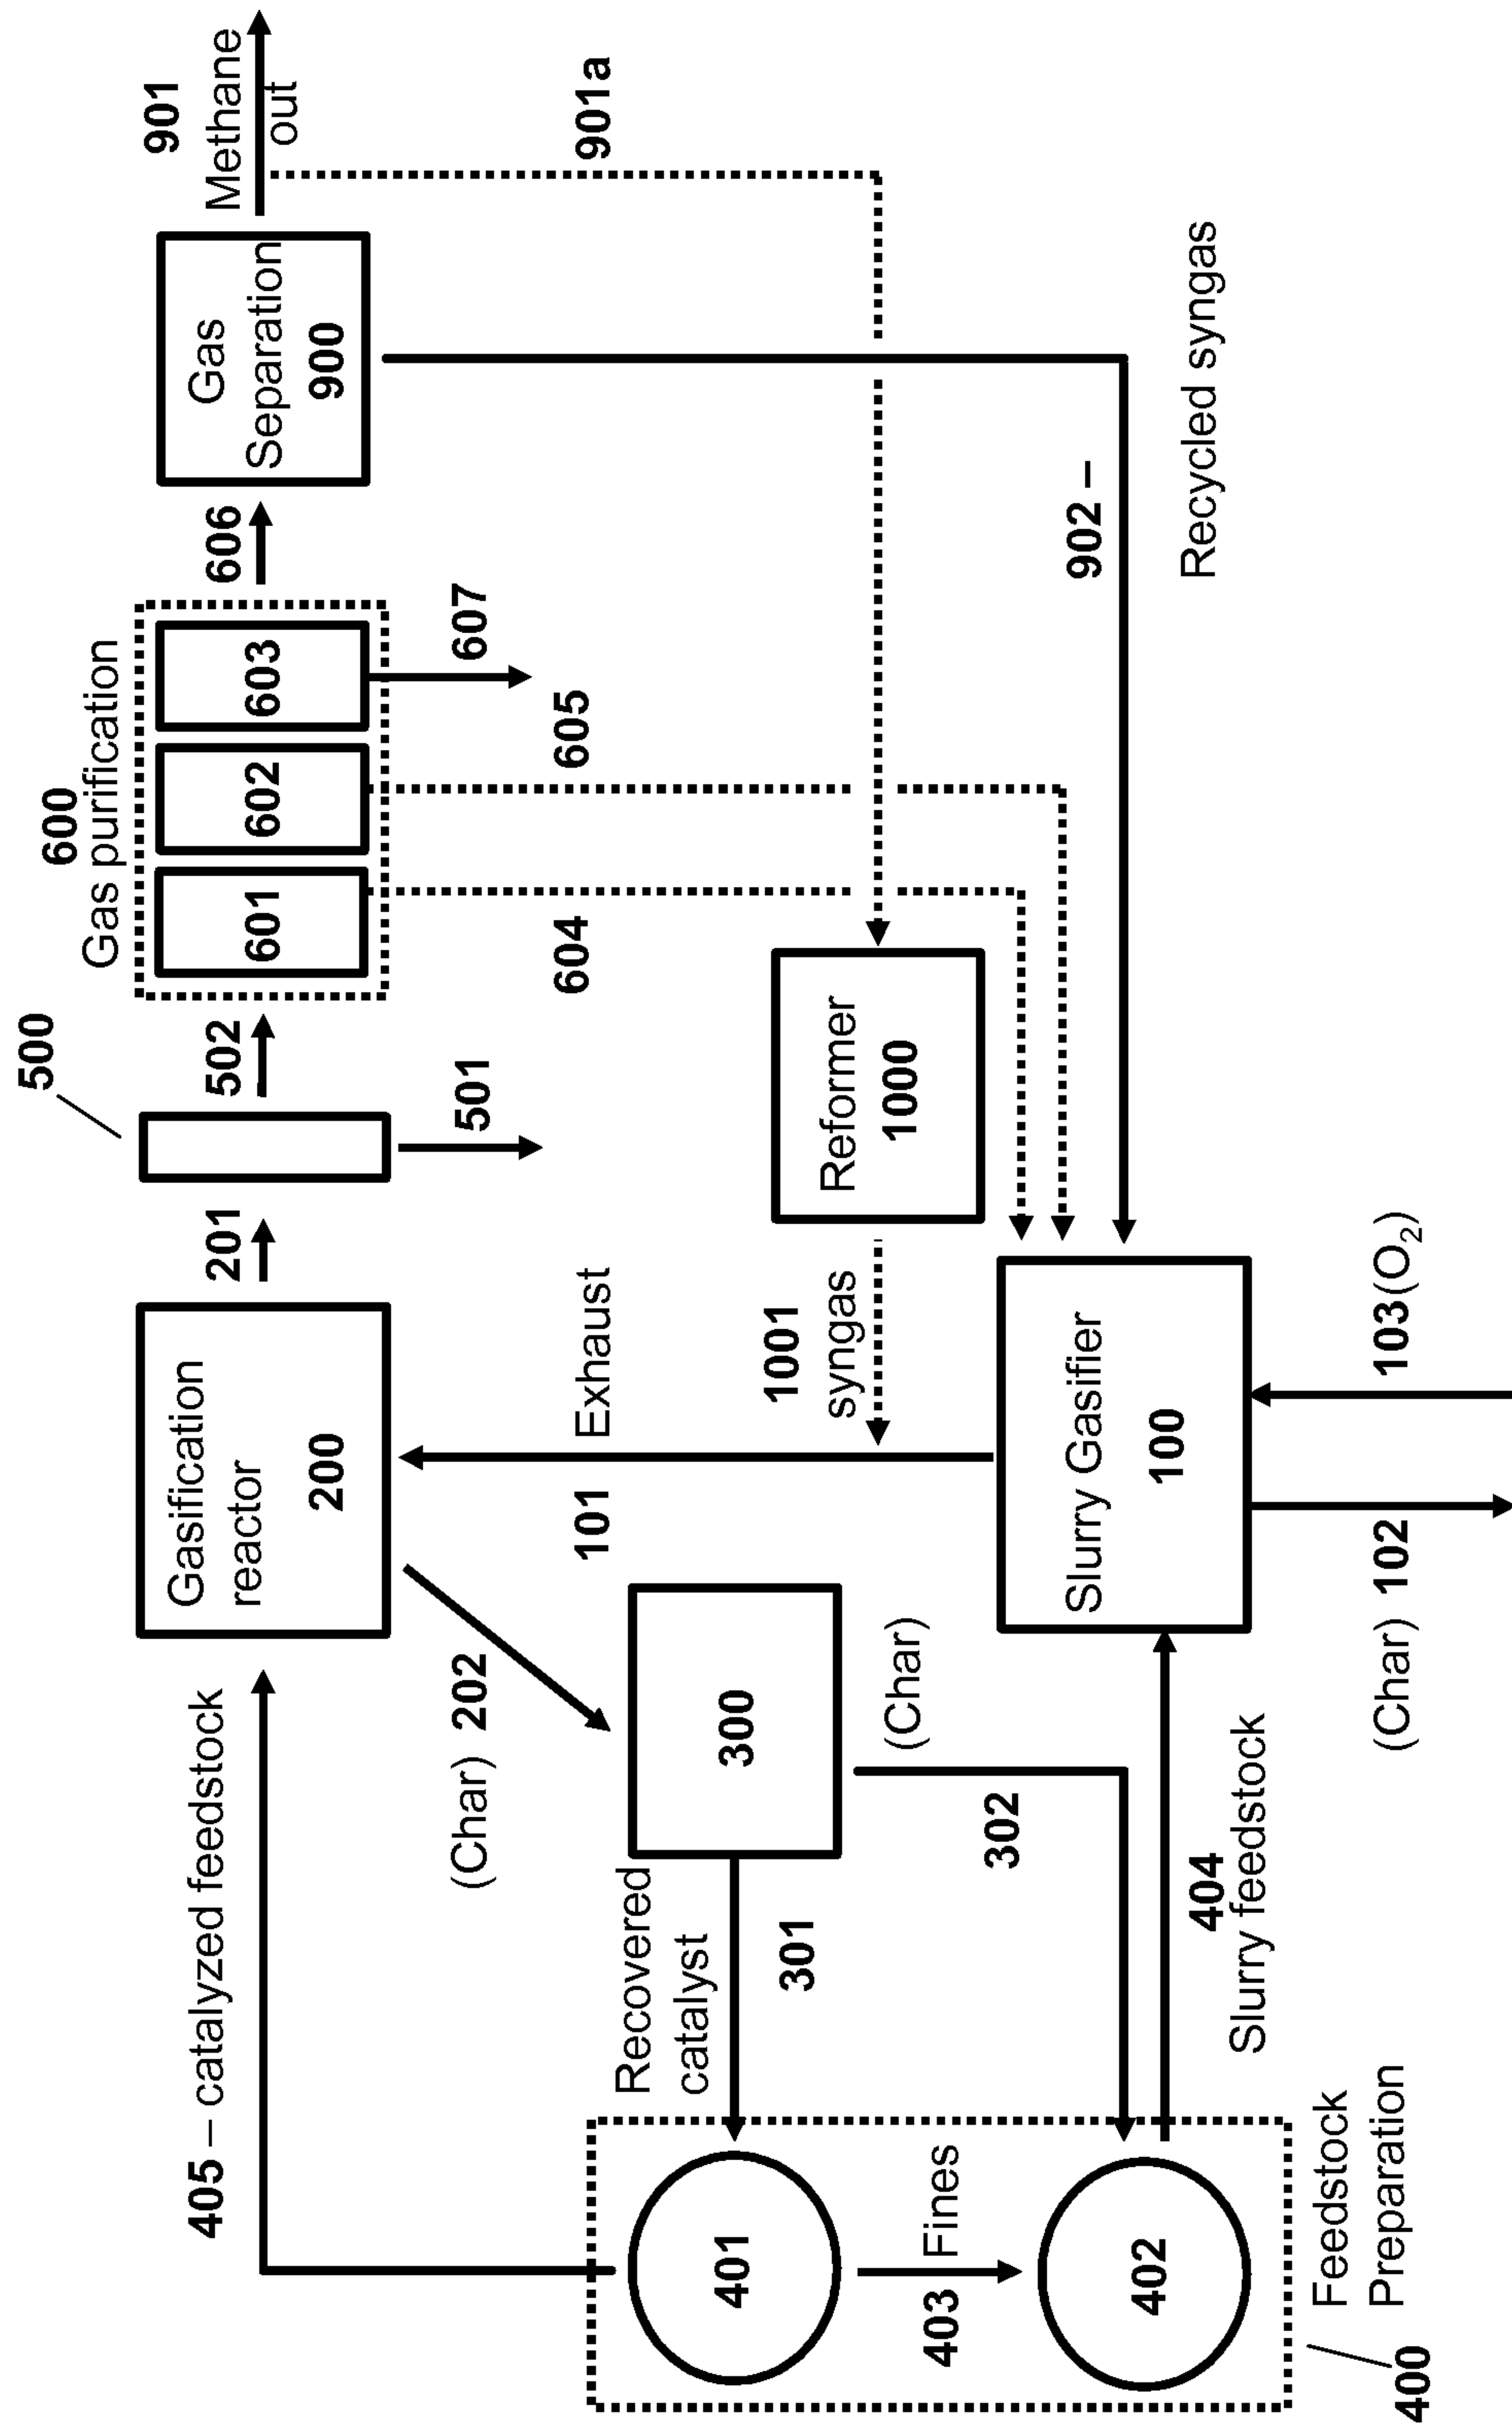**FIGURE 2**

