



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 457 739 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

15.09.2004 Bulletin 2004/38

(51) Int Cl.7: **F24C 1/12**

(21) Application number: **04075773.4**

(22) Date of filing: **10.03.2004**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**

Designated Extension States:

AL HR LT LV MK

(72) Inventors:

- **Bernini, Michele**
43100 Parma (IT)
- **Bernini, Andrea**
43100 Parma (IT)

(30) Priority: **11.03.2003 IT MI20030457**


(71) Applicant: **SKG Italiana S.p.A.**
43040 Scarzara (Parma) (IT)

(74) Representative: **Coppo, Alessandro**
Ing. Barzanò & Zanardo Milano S.p.A.,
Via Borgonuovo, 10
20121 Milano (IT)

(54) **Heating head for a stove**

(57) An improved heating head (10) for a stove (30) based on the infrared heating technology, comprising a holding structure (12) for a series of radiating bodies (14) situated along a circumference.

Fig.1

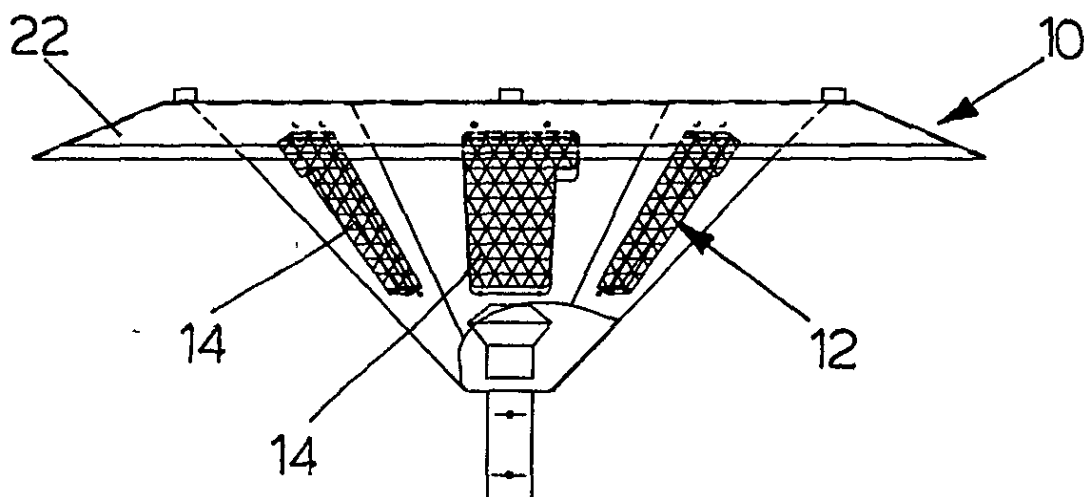

EP 1 457 739 A1

Description

[0001] The present invention relates to an improved heating head for a stove.

[0002] Various types of stoves are used in rooms with no fixed heating systems, normally consisting of distributed heating elements such as radiators.

[0003] These stoves are generally autonomously fed and can therefore be quite freely arranged in the rooms to be heated, with no particular restrictions.

[0004] There are, for example, wood stoves and electric, pellet and catalytic heaters.

[0005] A widely used feeding system is butane propane liquid gas LPG in cylinders, which normally feed catalytic panels or infrared burners.

[0006] In particular, so-called stoves for outdoor use are well known, suitable for also being used in large rooms for localized heating.

[0007] These stoves for outdoor use normally have a shape similar to a mushroom, as they include a supporting base which houses the LPG cylinder, axially connected to a heating head, or cap, through a stem which also contains the fuel feeding ducts.

[0008] The heating head includes, in the upper part, a circular, or other-shaped, portion with a reflecting lower part and a truncated conical surface consisting of infrared burners.

[0009] The reflecting lower part prevents the infrared radiations from being dispersed upwards, whereas the stem allows the heating head to be positioned at an adjustable height, for example, two meters.

[0010] These outdoor stoves, however, have various drawbacks. In particular, a gust of wind can easily extinguish the flame of some burners, with gas release into the environment and consequently serious problems relating to safety.

[0011] Moreover, when the stove is placed against a wall, there is a sector of the truncated conical surface which heats up an area which is not utilized, with an evident waste of fuel.

[0012] An objective of the present invention is therefore to avoid the above-mentioned drawbacks and, in particular, to provide an improved heating head for a stove which preserves the flame even in the presence of gusts of wind.

[0013] Another objective of the present invention is to provide an improved heating head for a stove which allows the fuel consumption to be rationalized.

[0014] A further objective of the present invention is to provide an improved heating head for a stove, which is particularly reliable, simple, functional and at relatively low costs.

[0015] These and other objectives, according to the present invention, are achieved by producing an improved heating head for a stove as disclosed in claim 1.

[0016] Further characteristics are exposed in the subsequent claims.

[0017] The characteristics and advantages of an im-

proved heating head for a stove according to the present invention will appear more evident from the following description which is illustrative and in no way limitative, referring to the enclosed schematic drawings, wherein:

figure 1 is a raised side view of an improved heating head for a stove, according to the present invention; figure 2 is a plan view from below of the heating head of figure 1;

figure 3 is a cross section view of the head of figure 1, in which an infrared burner is visible;

figure 4 is a raised side view of a stove which includes the heating head of figure 1;

figure 5 is a raised side view of the stove of figure 1, in a configuration for easy transportation;

figure 6 is a raised side view of another embodiment of an improved heating head for a stove, according to the invention;

figure 7 is a plan view from below of a further embodiment of a heating head according to the invention.

[0018] With initial reference to figures 1, 2 and 3, an improved heating head for a stove is shown, indicated as a whole with the number 10.

[0019] In the example according to the present invention, the heating head 10 comprises a holding structure 12 for a series of radiating bodies 14, such as already known infrared burners.

[0020] The radiating bodies 14 are arranged along a circumference, preferably at the same distance from each other, or other configurations. For example, in figures 1, 2 and 3, the holding structure 12 carries six radiating bodies 14. The number of radiating bodies can obviously be different.

[0021] Each radiating body 14 can be fed individually, and the gas flow rate can consequently also be regulated; moreover, these bodies 14 can be reoriented, so that the infrared radiation can be better directed.

[0022] As an alternative, groups of radiating bodies 14 can be contemporaneously fed, with different configurations and with an adjustable flow rate. For example, pairs of radiating bodies 14, positioned at an angle of 180°, can be fed, with six radiating bodies, in the example.

[0023] Figure 3 shows that the infrared burners comprise a ceramic surface 16 facing a flame-breaking chamber 18, where a flame is generated through a feeder 20 for the fuel, generally LPG.

[0024] The ceramic surfaces 16 of the radiating bodies 14 are tilted in order to direct the radiation, referring to the circumference on which said radiating bodies 14 are assembled, in the lower part and radially towards the outside.

[0025] The holding structure 12 has a truncated pyramidal or truncated conical shape, with the smaller base placed downwards.

[0026] The figures show that a radiating body 14 is

positioned at each side of the truncated pyramid of the holding structure 12.

[0027] The heating head 10 comprises, in the upper part, a truncated conical portion 22, with the largest base below, and with a reflecting lower part, for conveying the radiations of the infrared burners downwards.

[0028] Figure 4 shows an outdoor stove, indicated as a whole, by the number 30, and comprising the heating head 10 according to the present invention.

[0029] The stove includes a base 32 and a stem 34, to whose top the heating head 10 of the present invention is fixed.

[0030] A cylindrical structure 36 is preferably situated above the base 32, which can be opened, for example, by means of a door, wherein a normal LPG cylinder 38 is inserted.

[0031] The cylinder 38 is connected to a control panel 42 with a gas tube 40, passing inside the stem 34, which is hollow and arranged axially with respect to the oven 30.

[0032] The control panel 42 in the example illustrated is situated along the stem 34, in an intermediate position between the cylindrical structure 36 and the heating head 10. The same control panel 42 can also be situated below at the base of the stem 34 or in a specific space on an upper part of the cylindrical structure 36 of the supporting base 32.

[0033] Gas ducts 44 connected to the feeding 20 of each radiating body 14 or group of radiating bodies 14, leave the control panel 42, said ducts 44 always passing inside the stem 34. Figure 4 shows three ducts 44 connected to three pairs of radiating bodies 14.

[0034] The functioning of the heating head 10 according to the invention is evident from the above description with reference to the figures and is briefly as follows.

[0035] The radiating bodies 14 are switched on by acting on the control panel 42, which in the example of figure 4, is particularly simple and with immediate functioning.

[0036] Three switches 46 are envisaged, whereby the three pairs of radiating bodies 14 shown in figure 4, are switched on separately. The greater the number of radiating bodies 14, the greater the number of switches 46.

[0037] Each switch 46 contemporaneously activates three push buttons: one operates on the feeding of gas to one of the burners connected, the second push button activates the second burner connected and the third causes ignition for lighting up the two burners.

[0038] It should be pointed out that the control panel 42 can consist of mechanical components, but is also run with the use of an electronic card.

[0039] A simple pressure on the switches 46 is therefore sufficient for completely lighting the stove 30.

[0040] As already mentioned, in the case of figure 4, there are a total of six burners present, subdivided into three pairs: each pair of burners is independent with respect to the others, thus allowing the partial use of the

stove 30 by lighting only a part of the radiating bodies 14, and consequently reducing consumption, when necessary.

[0041] It should also be noted that infrared burners allow the heat distribution potential to be fully exploited: the temperature expansion radius is in fact extremely vast and heats not only the areas near the stove 30, but also more distant areas.

[0042] The stove 30, and in particular the control panel 42, also comprises a battery igniter to generate the igniting spark for lighting the chambers 18 of the radiating bodies 14.

[0043] Figure 5 shows how the stove 30 can be dismantled and compacted, for example for transportation. Once the cylinder 38 has been removed from the cylindrical structure 36, and the control panel 42 disconnected from the stem 34, the stem 34 itself is inserted inside the cylindrical structure 36, by sliding it axially into a hole situated above the cylindrical structure 36. The heating head 10, which is solidal with the stem 34, remains outside and above the cylindrical structure 36.

[0044] The control panel 42, disconnected from the tube 40 and ducts 44, is arranged inside the cylindrical structure 36.

[0045] As far as safety is concerned, the stove 30 is preferably equipped, as a safety measure, with a thermocouple for each burner. Each thermocouple intervenes by possibly closing a gas tap which feeds each radiating body 14: in this way, the closing of a tap does not prevent the other burners from continuing to function.

[0046] In order to facilitate the moving of the stove 30, it is also possible to equip the supporting base 32 with wheels. The length of the stem 34 can be obtained in relation to the clients' demands.

[0047] It should also be noted that, whereas with current outdoor stoves the heating covers a radius of about 3 m around the stove, experimental tests with the heating heads of the present invention have demonstrated a radius coverage of about 5 m. Furthermore, if the radiating bodies are equipped with fans 50, said radius is further increased.

[0048] Said fans 50 can be assembled in correspondence with each radiating body 14, for example below or above it, as can be seen in figure 6: the fans 50 are preferably fed by a battery and allow the infrared radiations to be directed to a greater distance. The battery can be the same as that used for igniting the burners.

[0049] The fans 50 have a grid on the air inlet and are driven by the control panel 42, also in a partialized way. In this way, each radiating body 14 can have, together with the ignition push button, a regulation screw of the gas flow and a regulation screw of the rotation rate of the fan 50.

[0050] These fans 50 can also be exploited as means for dispersing essences or perfumes in the environment for aromatizing the environment itself.

[0051] The truncated conical portion 22 of the heating

head can also be substituted by separate lower reflecting surfaces 48, which are oval-shaped, for example. These can be more easily transported with respect to the truncated conical portion 22; if, for example, the reflecting surfaces 48 are petal-shaped, as shown in figure 7, they can be easily dismantled and superimposed to facilitate transportation.

[0052] The characteristics of the improved heating head for a stove, object of the present invention, are evident from the above description, as also the relative advantages, among which the following should be remembered:

- more uniform heat distribution in relation to the distance and greater irradiation, as a result of the infrared technology;
- longer duration with respect to current techniques, with more limited maintenance operations;
- simple and reliable use;
- improved safety degree with respect to the known art;
- rationalized consumptions, due to the possibility of partializing the use of the infrared burners.

[0053] Finally, numerous modifications and variants can obviously be applied to the improved heating head for a stove thus conceived, all falling within the scope of the invention; furthermore all the details can be substituted by technically equivalent elements. In practice, the materials used, as also the forms and dimensions can vary according to technical demands.

[0054] The protection scope of the invention is therefore defined by the enclosed claims.

Claims

1. An improved heating head (10) for a stove (30), **characterized in that** it comprises a supporting structure (12) for a series of radiating bodies (14) situated along a circumference, each of said radiating bodies (14) being fed individually.
2. The heating head (10) according to claim 1, **characterized in that** said radiating bodies (14) are infrared burners.
3. The heating head (10) according to claim 1, **characterized in that** said radiating bodies (14) are arranged at an equal distance from each other or in other configurations.
4. The heating head (10) according to claim 1, **characterized in that** said radiating bodies (14) can be reoriented.
5. The heating head (10) according to claim 1, **characterized in that** the gas flow-rate of said radiating

bodies (14) can be regulated.

6. The heating head (10) according to claim 1, **characterized in that** groups of said radiating bodies (14) are fed contemporaneously and their gas flow-rate can be regulated.
7. The heating head (10) according to claim 6, **characterized in that** said groups of said radiating bodies (14) are arranged in different ways along the circumference.
8. The heating head (10) according to claim 2, **characterized in that** said infrared burners comprise a ceramic surface (16) which faces a flame-breaking chamber 18, where a flame is generated through a fuel feeder (20).
9. The heating head (10) according to claim 8, **characterized in that** said ceramic surfaces (16) of said radiating bodies (14) are tilted to direct the radiation, referring to the circumference on which said radiating bodies (14) are assembled, in the lower part and radially towards the outside.
10. The heating head (10) according to claim 1, **characterized in that** said supporting structure (12) has a truncated pyramidal or truncated conical shape, with the smaller base placed downwards.
11. The heating head (10) according to claim 10, **characterized in that** a radiating body (14) is positioned at each side of the truncated pyramid of the holding structure (12).
12. The heating head (10) according to claim 1, **characterized in that** it comprises, in the upper part, a truncated conical portion (22), with the largest base below, and with a reflecting lower part.
13. The heating head (10) according to claim 1, **characterized in that** said stove (30) comprises a supporting base (32) and a stem (34), at whose top said heating head (10) is fixed.
14. The heating head (10) according to claim 13, **characterized in that** above said supporting base (32) there is a cylindrical structure (36) in which a normal liquid butane propane gas cylinder (38) is inserted.
15. The heating head (10) according to claim 14, **characterized in that** said cylindrical structure (36) can be opened with a door.
16. The heating head (10) according to claim 14, **characterized in that** said cylinder (38) is connected to a control panel (42) with a gas tube (40), passing inside said stem (34), which is hollow and arranged

axially with respect to said stove (30).

17. The heating head (10) according to claim 16, **characterized in that** said control panel (42) is situated along said stem (34), in an intermediate position between said cylindrical structure (36) and said heating head (10). 5
18. The heating head (10) according to claim 16, **characterized in that** said control panel (42) is situated in the lower part of said stem (34). 10
19. The heating head (10) according to claim 14 and 16, **characterized in that** said control panel (42) is situated in a space above said cylindrical structure (36) of said supporting base (32). 15
20. The heating head (10) according to claim 17, **characterized in that** gas ducts (44) connected to each of said radiating bodies (14) or to a group of said radiating bodies (14), leave said control panel (42), said ducts (44) passing inside the stem (34). 20
21. The heating head (10) according to claim 20, **characterized in that** ducts (44) are connected to corresponding pairs of said radiating bodies (14). 25
22. The heating head (10) according to claim 21, **characterized in that** switches (46) are envisaged, whose action causes the ignition of corresponding pairs of said radiating bodies (14). 30
23. The heating head (10) according to claim 22, **characterized in that** each of said switches contemporaneously (46) activates three push buttons, one operating a gas feed to the first burner connected to said radiating bodies (14), a second acting on a gas feed to the second burner connected and the third push button causing ignition to light up said pair of radiating bodies (14). 35
40
24. The heating head (10) according to claim 1, **characterized in that** said stove (30) comprises a battery or manual igniter for generating an ignition spark for lighting up flame-breaking chambers (18) of said radiating bodies (14). 45
25. The heating head (10) according to claim 1, **characterized in that** said stove (30) can be dismantled. 50
26. The heating head (10) according to claim 14 and 17, **characterized in that**, after removing said cylinder (38) from said cylindrical structure (36) and disconnecting said control panel (42) from said stem (34), said stem (34) is inserted inside said cylindrical structure (36), by sliding it axially into a hole situated above said cylindrical structure (36). 55
27. The heating head (10) according to claim 26, **characterized in that** said heating head (10), which is solidal with said stem (34), remains outside and above said cylindrical structure (36).
28. The heating head (10) according to claim 20 and 27, **characterized in that** said control panel (42), disconnected from said tube (40) and from said ducts (44), is arranged inside said cylindrical structure (36).
29. The heating head (10) according to claim 2, **characterized in that** said stove (30) is equipped with a safety device for each burner.
30. The heating head (10) according to claim 29, **characterized in that** said safety device is a thermocouple and acts by optionally closing a gas tap present on each of said burners.
31. The heating head (10) according to claim 13, **characterized in that** said supporting base (32) is equipped with wheels.
32. The heating head (10) according to claim 13, **characterized in that** the length of said stem (34) is selected according to the clients' demands.
33. The heating head (10) according to claim 16, **characterized in that** said control panel (42) comprises mechanical components or is run by the use of an electronic card.
34. The heating head (10) according to claim 1, **characterized in that** said radiating bodies (14) are equipped with fans (50).
35. The heating head (10) according to claim 34, **characterized in that** said fans (50) are assembled in correspondence with and below or above each radiating body (14).
36. The heating head (10) according to claim 34, **characterized in that** said fans (50) are fed by a battery.
37. The heating head (10) according to claim 36, **characterized in that** said battery is the same as that which allows the ignition of said radiating bodies (14).
38. The heating head (10) according to claim 34, **characterized in that** said fans (50) have a grid on an air inlet and are driven by a control panel (42).
39. The heating head (10) according to claim 38, **characterized in that** said control panel (42) is partialized and that each radiating body (14) has a regulation screw of the gas flow-rate and a regulation

screw of the rotation rate of said fan (50).

40. The heating head (10) according to claim 34, **characterized in that** said fans (50) are means for dispersing essences or perfumes into the environment. 5

41. The heating head (10) according to claim 34, **characterized in that** it comprises separate lower reflecting surfaces (48). 10

42. The heating head (10) according to claim 41, **characterized in that** said reflecting surfaces (48) are petal-shaped. 15

20

25

30

35

40

45

50

55

Fig.2

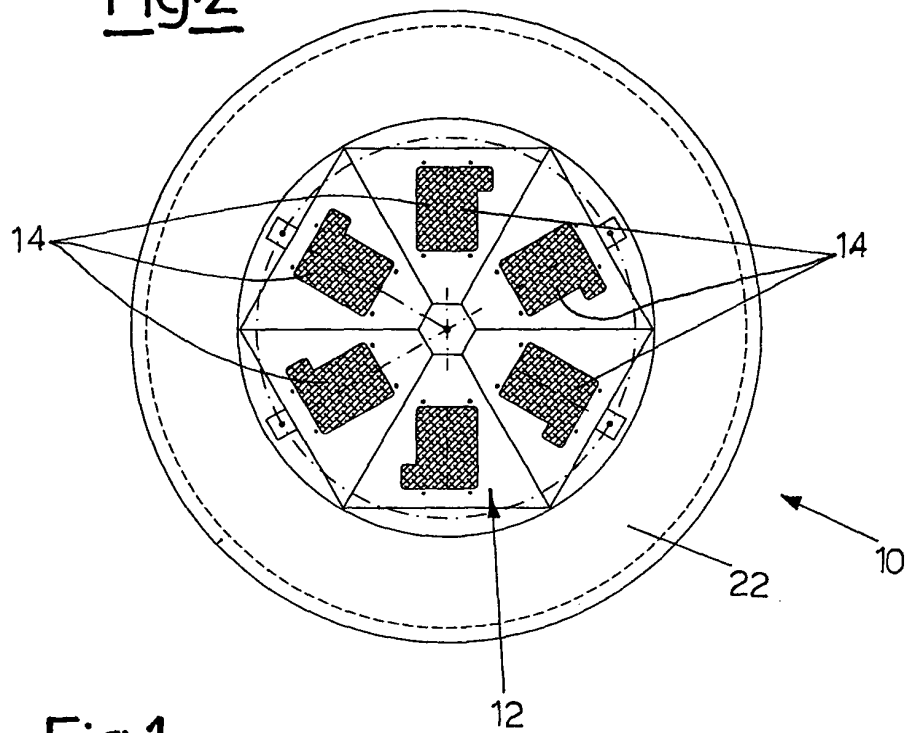


Fig.1

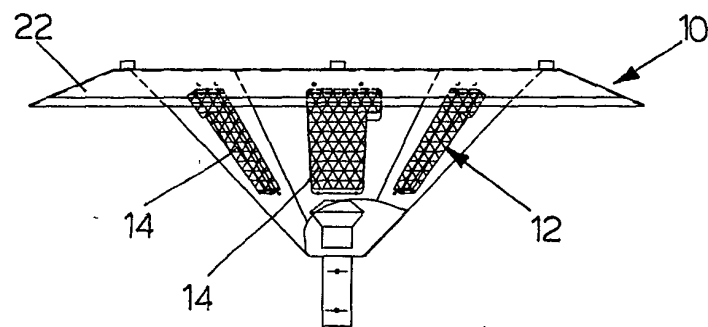


Fig.3

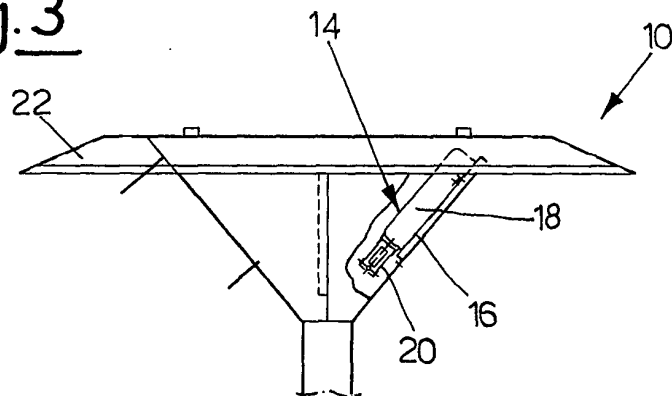


Fig.5

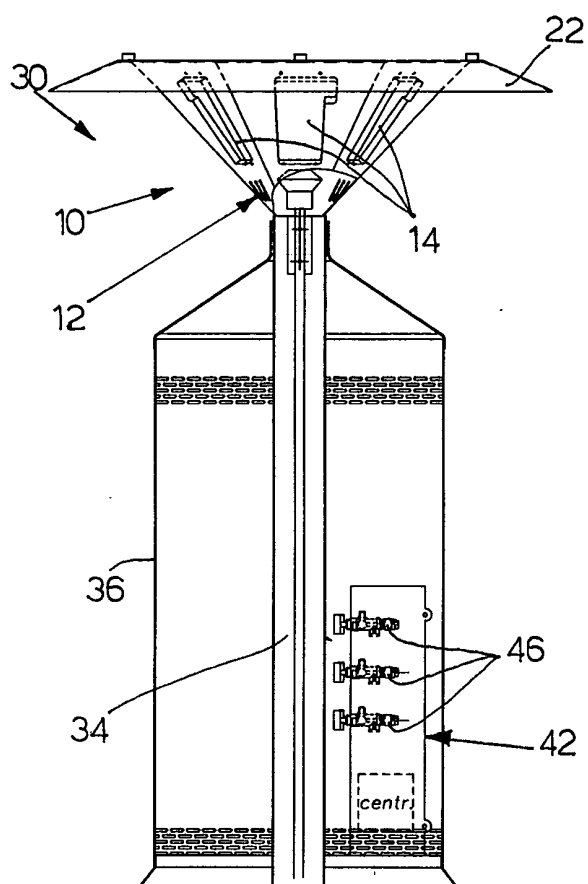


Fig.4

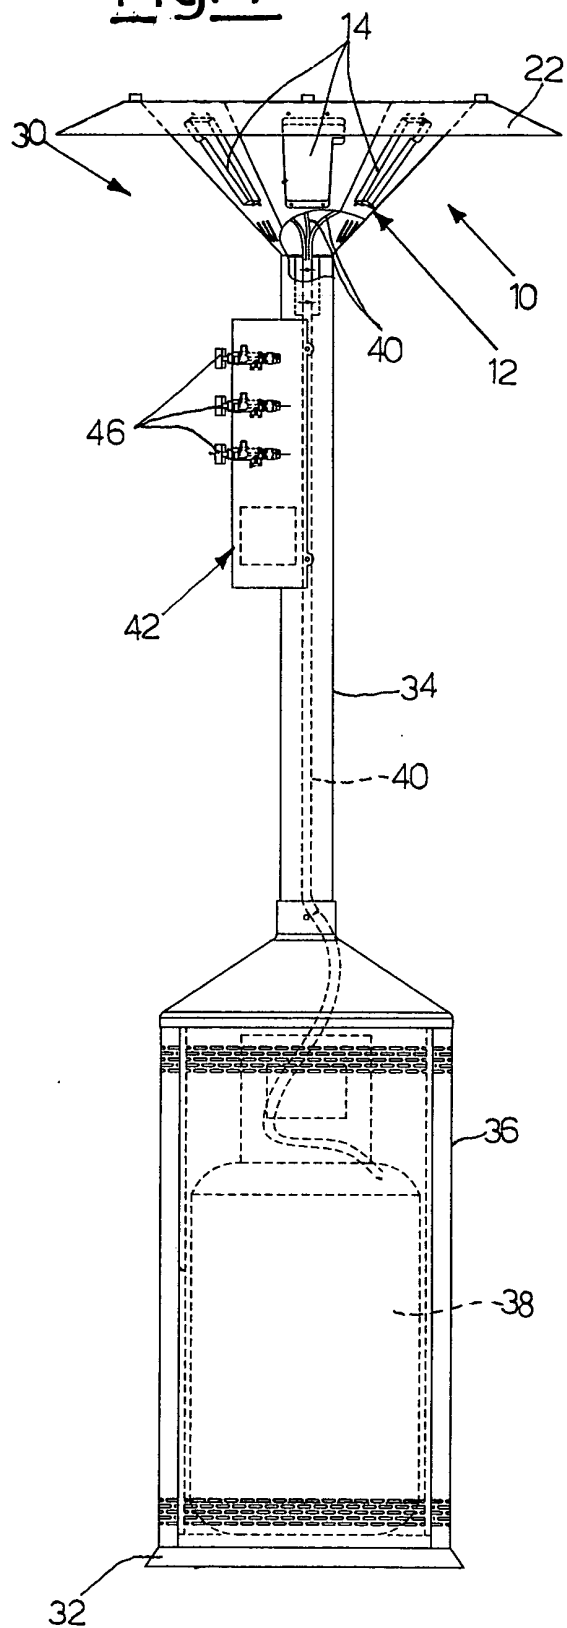


Fig. 6


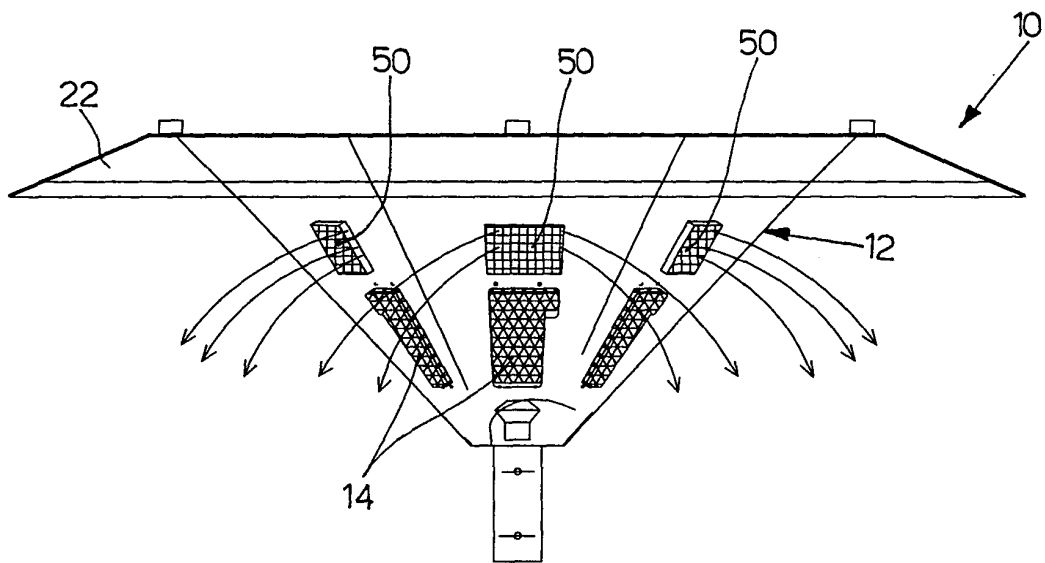


Fig. 7



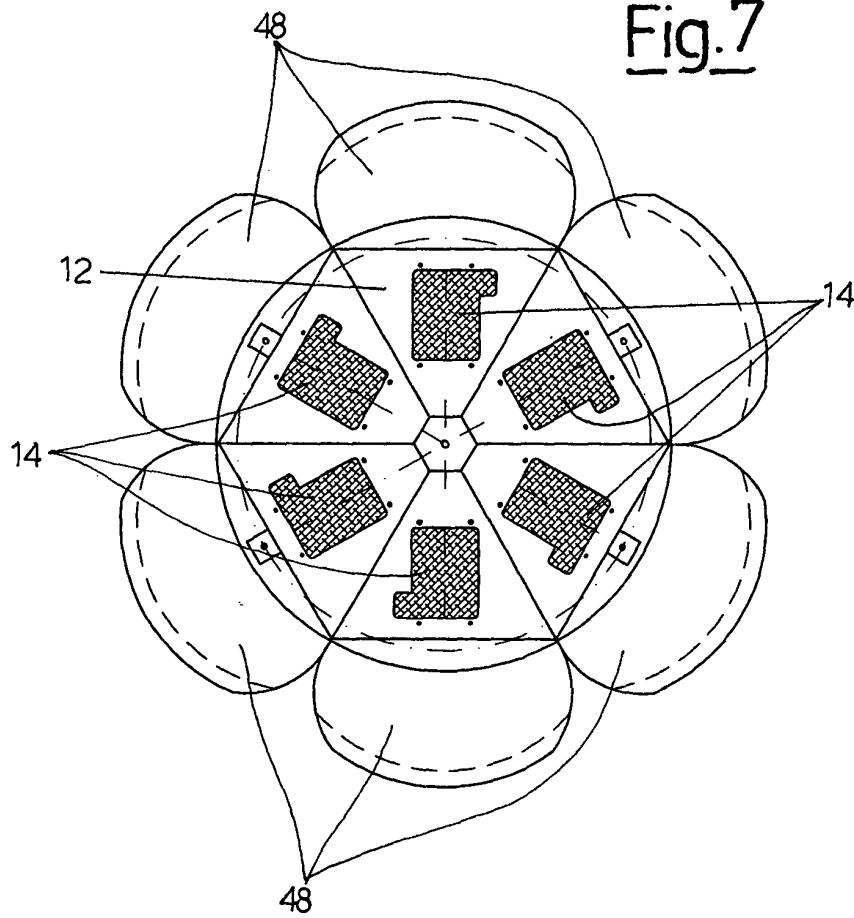

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 07 5773

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 3 328 891 A (NUNN ROLAND C ET AL) 4 July 1967 (1967-07-04) * column 2, line 58 - column 3, line 15; figure 1 *	1-8, 10-13, 25,29	F24C1/12
A	US 2002/023636 A1 (ASHTON JERALD ET AL) 28 February 2002 (2002-02-28) * paragraph [0050] - paragraph [0064]; figures 1,2 *	13-23	
A	EP 1 217 302 A (APPLIC GAZ SA) 26 June 2002 (2002-06-26) * paragraph [0011] - paragraph [0059]; figure 1 *	13	
A	US 4 889 481 A (BURLINGAME NICHOLAS H ET AL) 26 December 1989 (1989-12-26) * abstract *	2	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			F24C
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 4 June 2004	Examiner Arndt, M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 07 5773

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-06-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3328891	A	04-07-1967	NONE	

US 2002023636	A1	28-02-2002	US 6422232 B1	23-07-2002
			CA 2366776 A1	05-07-2002
			JP 2002303405 A	18-10-2002
			CA 2349132 A1	26-11-2001

EP 1217302	A	26-06-2002	FR 2818735 A1	28-06-2002
			EP 1217302 A1	26-06-2002

US 4889481	A	26-12-1989	NONE	
