



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2017/02/24
(87) Date publication PCT/PCT Publication Date: 2017/08/31
(85) Entrée phase nationale/National Entry: 2018/08/21
(86) N° demande PCT/PCT Application No.: IB 2017/051073
(87) N° publication PCT/PCT Publication No.: 2017/145108
(30) Priorités/Priorities: 2016/02/25 (IT102016000019600);
2016/02/25 (IT102016000019586);
2016/02/25 (IT102016000019579);
2016/02/25 (IT102016000019565)

(51) Cl.Int./Int.Cl. *E04B 2/06* (2006.01),
E04B 2/02 (2006.01), *E04B 2/12* (2006.01),
E04D 11/00 (2006.01), *E04F 15/024* (2006.01)
(71) Demandeur/Applicant:
ISINNOVA S.R.L., IT
(72) Inventeur/Inventor:
FRACASSI, CRISTIAN, IT
(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : SYSTÈME, PROCÉDE, KIT ET ÉLÉMENT MODULAIRE POUR LA CONSTRUCTION SÈCHE DE
STRUCTURES DE CONSTRUCTION

(54) Title: SYSTEM, METHOD, KIT AND MODULAR ELEMENT FOR THE DRY BUILDING OF STRUCTURES FOR
CONSTRUCTIONS

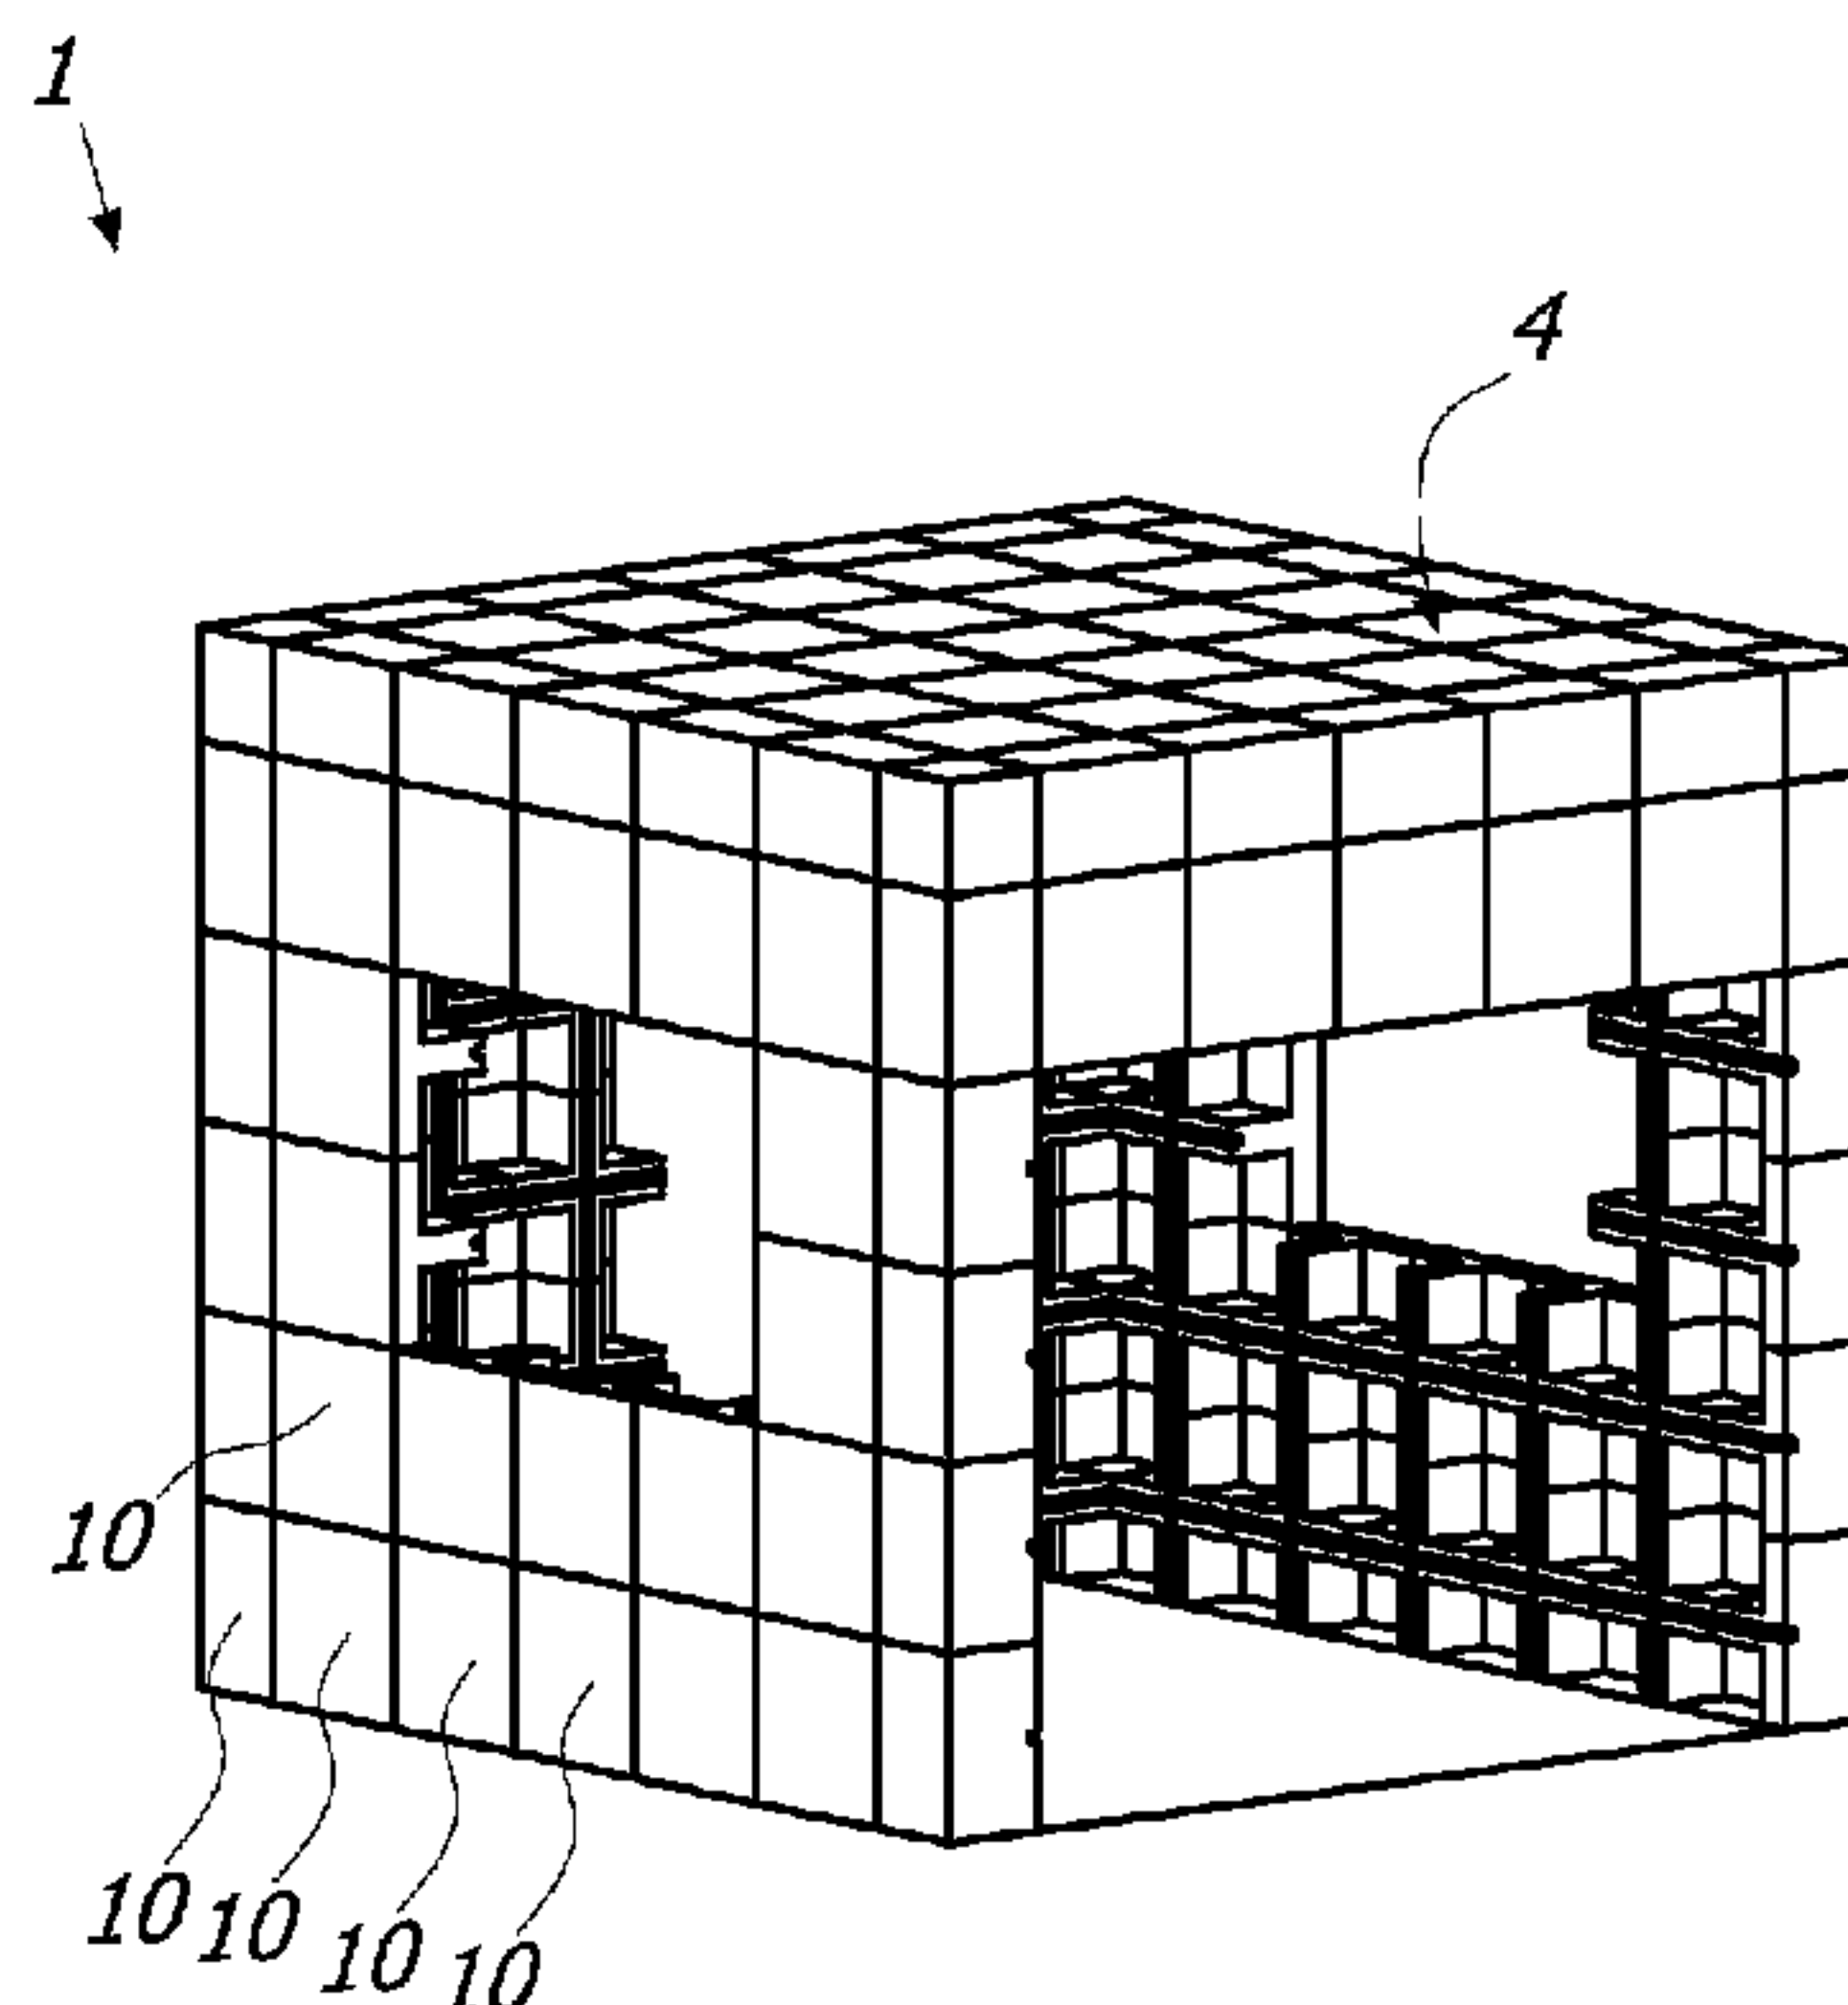


FIG. 1

(57) **Abrégé/Abstract:**

A modular system for the dry building of structures (1), such as walls, attics, balconies and similar, comprising a plurality of modular elements (10) each having at least one upper or lower wall (11) substantially planar and a plurality of side faces (12) substantially perpendicular thereto, these latter (12) have a first end edge (13) in correspondence with the upper or lower wall (11) and a second edge (14) opposed to the first (13). Furthermore, the system comprises anchoring means (50) reciprocal of the modular elements (10) so as to mutually couple these latter so that the planar walls (11) of the same modular elements (10) mutually cooperate in order to define a first plane (π_1) substantially parallel or coinciding with the main development plane (π) of the structure (1) to be built, and that each of the side faces (12) of each modular element (10) interact with a corresponding side face (12') of the adjacent modular element (10'). Besides this, the second edges (14) of the side faces (12, 12') of the modular elements (10, 10') reciprocally cooperate so as to define a second plane (π_2) substantially parallel to the first plane (π_1) and opposed to it. The anchoring means (50) include the first anchoring members (61) acting in correspondence with the second plane (π_2), so as to effectively counteract the tensile stresses developing in the structure as a consequence of a load acting on the first plane (π_1).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2017/145108 A1(43) International Publication Date
31 August 2017 (31.08.2017)

(51) International Patent Classification:

E04B 2/06 (2006.01) *E04D 11/00* (2006.01)
E04B 2/12 (2006.01) *E04B 2/02* (2006.01)
E04F 15/024 (2006.01)

(21) International Application Number:

PCT/IB2017/051073

(22) International Filing Date:

24 February 2017 (24.02.2017)

(25) Filing Language:

Italian

(26) Publication Language:

English

(30) Priority Data:

102016000019565

25 February 2016 (25.02.2016)

102016000019579

25 February 2016 (25.02.2016)

102016000019586

25 February 2016 (25.02.2016)

102016000019600

25 February 2016 (25.02.2016)

IT

IT

IT


IT

(71) Applicant: ISINNOVA S.R.L. [IT/IT]; Via Cefalonia, 55,
25124 Brescia (IT).(72) Inventor: FRACASSI, Cristian; Via Papa Giovanni
XXIII, n°20, 25020 Bassano Bresciano (IT).(74) Agents: AUTUORI, Angelo et al.; C/O Eureka IP Con-
sulting, Via Monte Cengio, 32, 36100 Vicenza (IT).(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

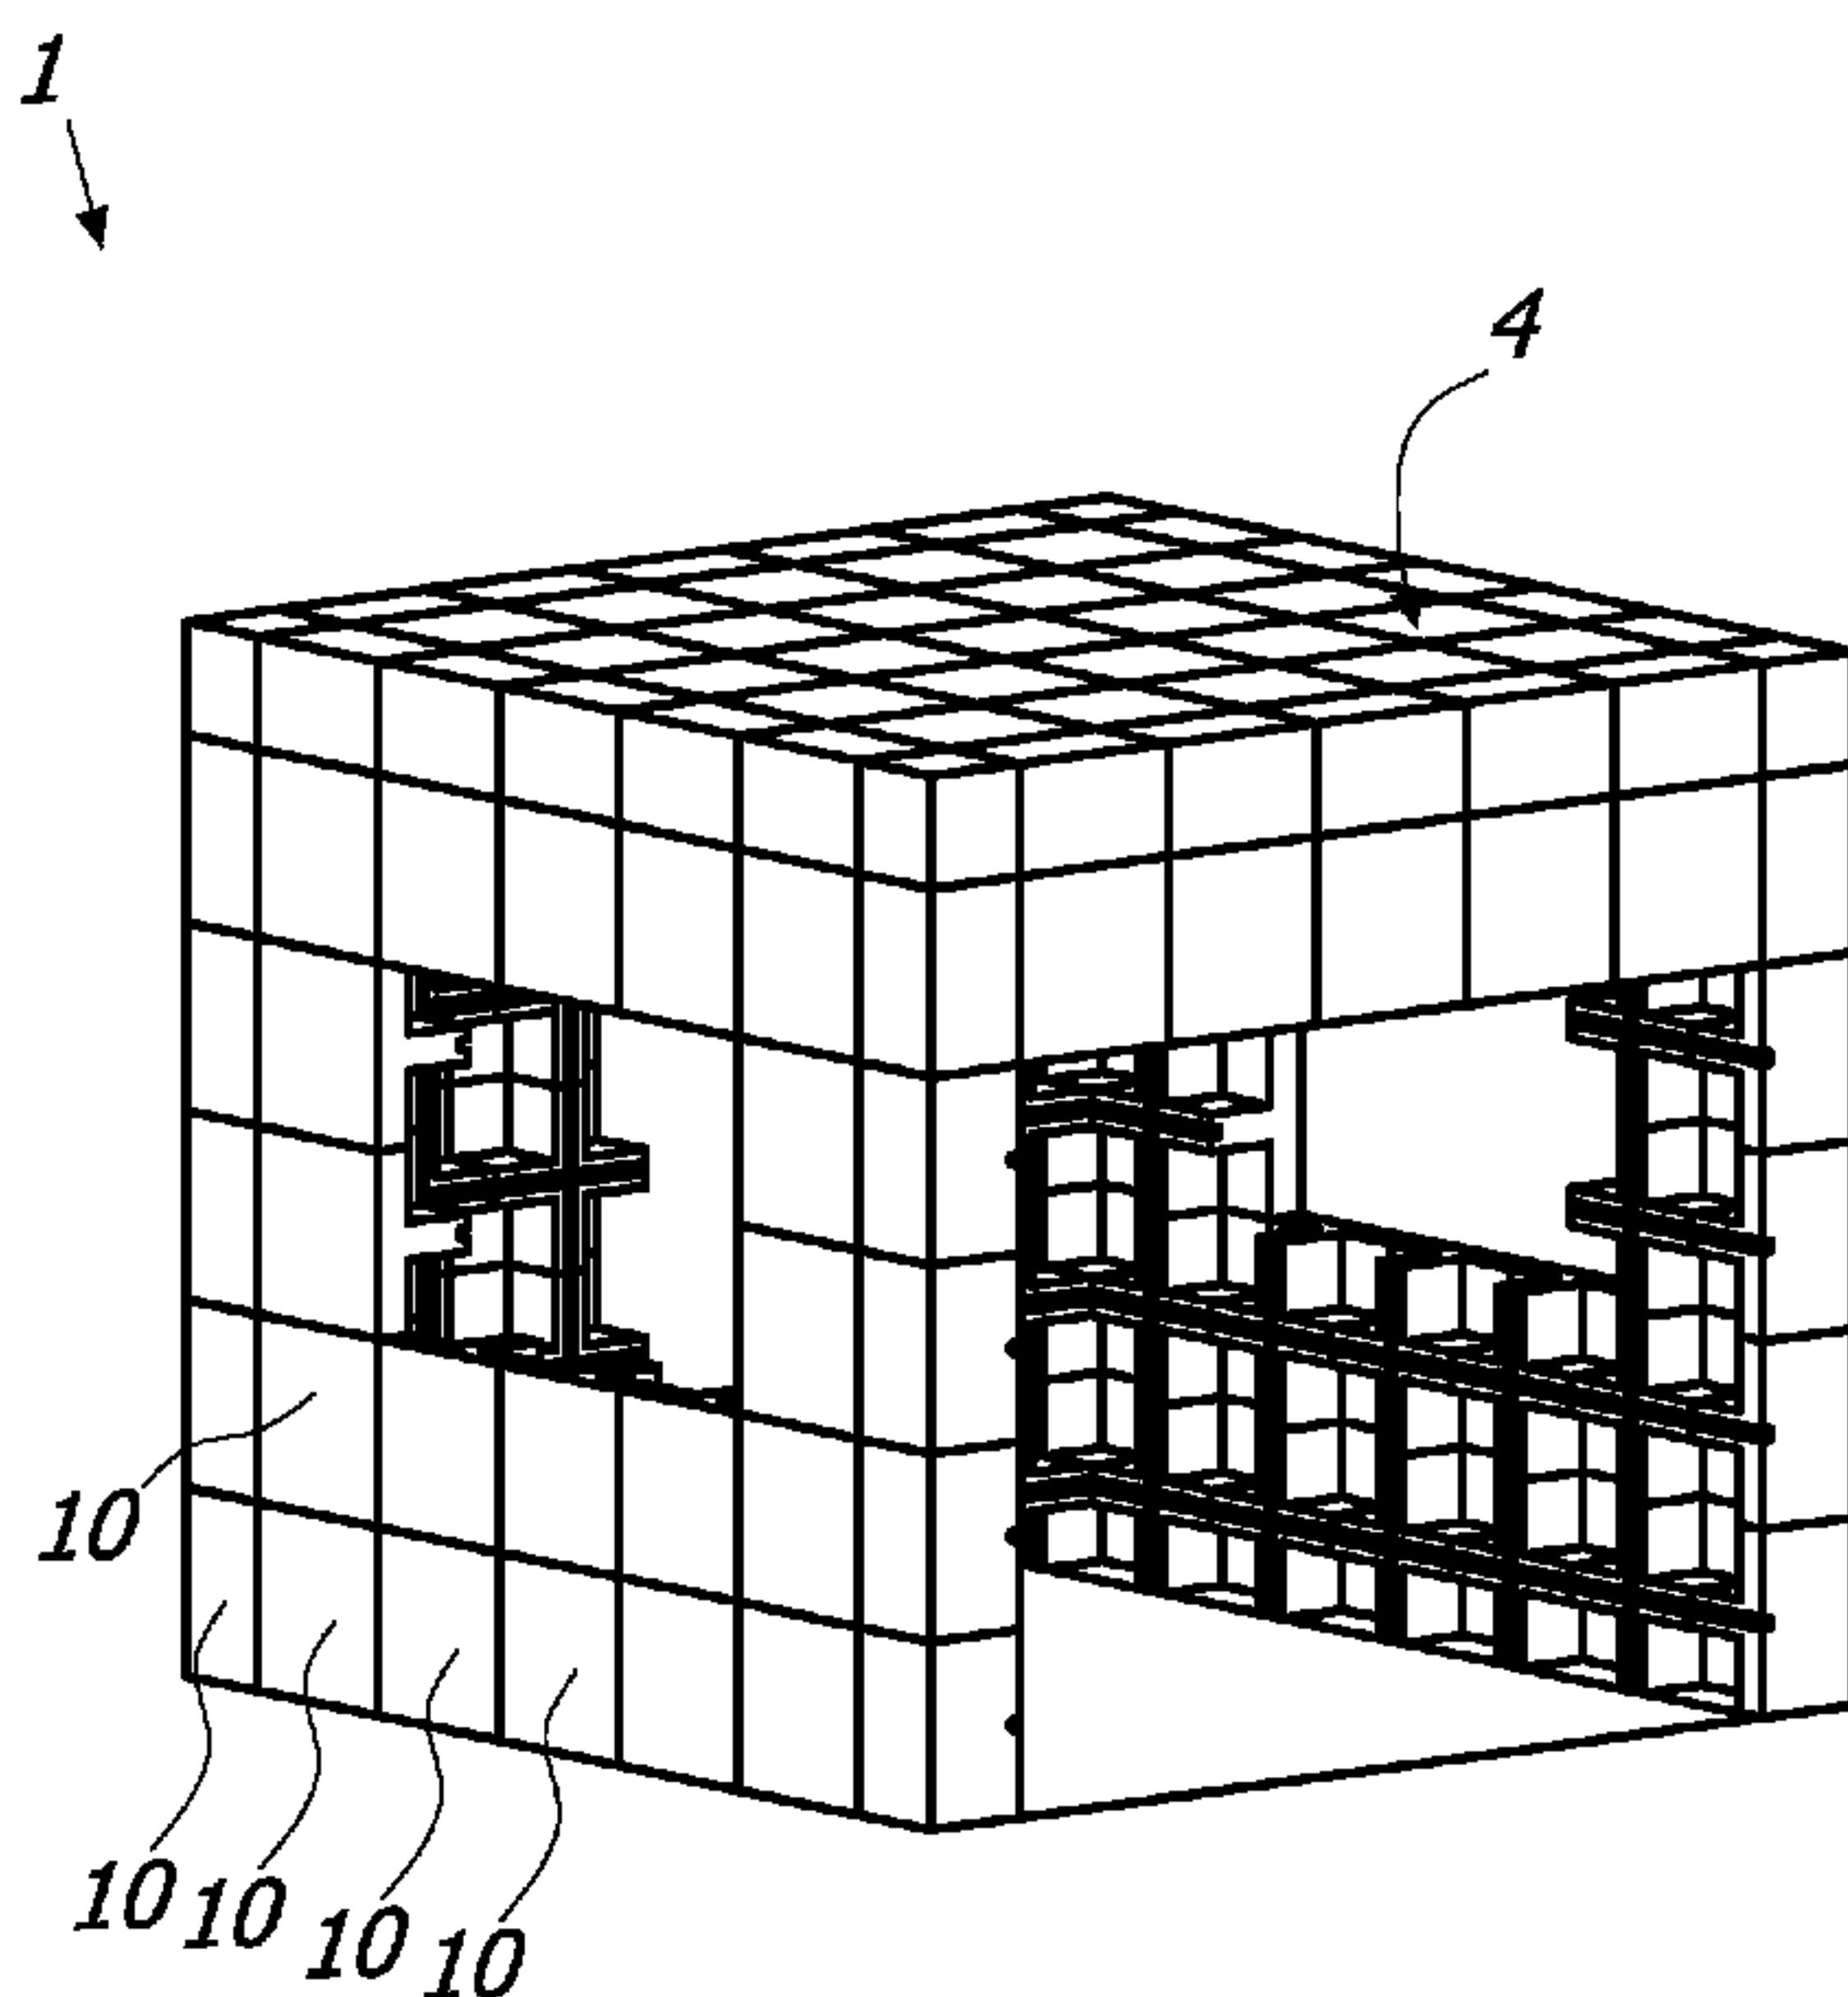(54) Title: SYSTEM, METHOD, KIT AND MODULAR ELEMENT FOR THE DRY BUILDING OF STRUCTURES FOR CON-
STRUCTIONS**FIG. 1**(57) Abstract: A modular system for the dry building of structures (1), such as walls, attics, balconies and similar, comprising a plurality of modular elements (10) each having at least one upper or lower wall (11) substantially planar and a plurality of side faces (12) substantially perpendicular thereto, these latter (12) have a first end edge (13) in correspondence with the upper or lower wall (11) and a second edge (14) opposed to the first (13). Furthermore, the system comprises anchoring means (50) reciprocal of the modular elements (10) so as to mutually couple these latter so that the planar walls (11) of the same modular elements (10) mutually cooperate in order to define a first plane (π_1) substantially parallel or coinciding with the main development plane (π) of the structure (1) to be built, and that each of the side faces (12) of each modular element (10) interact with a corresponding side face (12') of the adjacent modular element (10'). Besides this, the second edges (14) of the side faces (12, 12') of the modular elements (10, 10') reciprocally cooperate so as to define a second plane (π_2) substantially parallel to the first plane (π_1) and opposed to it. The anchoring means (50) include the first anchoring members (61) acting incorrespondence with the second plane (π_2), so as to effectively counteract the tensile stresses developing in the structure as a consequence of a load acting on the first plane (π_1).

WO 2017/145108 A1



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

SYSTEM, METHOD, KIT AND MODULAR ELEMENT FOR THE DRY BUILDING OF STRUCTURES FOR CONSTRUCTIONS

DESCRIPTION

Field of the invention

The present invention is generally applicable in the field of civil engineering, and it relates in particular to a modular element, a system, a kit and a method for the dry building, i.e. building without using concrete, adhesive, resins or other similar bonds, of building structures.

Background of the invention

Modular elements which may be coupled to dry build houses are known, for example from the international applications W02009104047 and WO2014087352.

Said modular elements generally have a substantially parallelepiped shape and are coupled two by two through male-female systems. In particular, the known elements have a main development direction and have an upper portion with a protruding male element and a lower portion with a female seat, just like the coupling system of the known “Lego” type bricks.

The known systems foresee also the use of ties fastened/hooked to two consecutive modular elements through thread-counterthread systems or bayonet systems.

In any way, the overlapped stacking of said elements allows to create vertical walls able to support a vertical load.

Thanks to the presence of ties and/or to the convenient shifted arrangement of the elements, said walls may also withstand more to tensile and shear stresses.

The known modular elements foresee also the presence of through-holes for the passage of electric and/or hydraulic plants.

Said systems have different drawbacks.

First of all, they do not allow to build structures such as attics, balconies or beams.

The strength to the stresses acting on the wall, both due natural events like wind or earthquakes, and due to the load of one or more people leaning against the wall, is quite limited.

Besides this, the replacement of one modular element requires removing all the

overlying modular elements, with the consequent self-evident increase in costs and in the time for the wall restoration.

Again, since the operator must pay a lot of attention to the arrangement of the modular elements in order not to jeopardize the structural features of the structure to be realized, the building of the wall shall be carried out by specialized staff.

Another self-evident drawback of the known systems is that, in case maintenance to the plumbing pipes or to the electrical plant located in the specific through-holes is required, the concerned wall section shall be broken, with self-evident consequences in terms of time and maintenance costs.

From the German document DE4016279 a raised floor is known which, for its technical inherent features, it is not a structure according to the present invention. In fact, it is simply a support directing to the slab, which is of the traditional type, the stresses to which it is subject.

Summary of the invention

Object of the present invention is to at least partially overcome the above drawbacks, by providing a modular system for the dry building of building structures of high efficiency and relatively cost-effective.

Another object of the present invention is to provide a modular system allowing to dry build building structures.

Another object of the present invention is to provide a system for the dry building of building structures able to greatly withstand to tensile, compressive and shear stresses.

Another object of the present invention is to provide a modular system allowing anyone to easily build a structure and, more generally, a building, in particular a house.

Another object of the present invention is to provide a system for the dry building of buildings structures being easy to assemble.

Another object of the present invention is to provide a modular system for the dry building of building structures allowing their manufacturing in a limited time period.

Another object of the present invention is to provide a modular system for the dry building of building structures able to support high loads.

Another object of the invention is to provide a demountable modular system for the dry building of building structures.

Another object of the present invention is to provide a modular system for the dry building of building structures allowing the modification of the structure once built.

Another object of the present invention is to provide a modular system for the dry building of building structures being of easy maintenance.

Another object of the present invention is to provide a modular system for the dry building of building structures particularly suitable for building houses.

Another object of the present invention is to provide a modular system for the dry building of building structures of low environmental impact.

Another object of the present invention is to provide a modular system for the dry building of building structures having a high aesthetic appeal.

Another object of the present invention is to provide a modular element to be used in a modular system for the dry building of building structures being particularly effective and relatively inexpensive.

Another object of the present invention is to provide a modular element to be used in a modular system for the dry building of building structures being light and of compact dimensions.

Another object of the present invention is to provide a modular element to be used in a modular system for the dry building of building structures made of recyclable material.

Another object of the present invention is to provide a modular element to be used in a modular system for the dry building of building structures being easy to transport and/or stackable.

The above objects, and others that will appear more clearly hereinafter, are fulfilled by a modular system for the dry building of building structures and/or by a modular element to be used in said system having one or more of the features herein described, claimed and / or shown.

In a further aspect of the invention, it is provided a method and a kit for the dry building of building structures having one or more of the features herein described, claimed and / or shown.

Advantageous embodiments of the invention are defined in the dependent claims.

Brief description of the drawings

Further features and advantages of the invention will become more apparent by

reading the detailed description of a preferred but not exclusive embodiment of a modular system for the dry building of structures shown as non-limiting example with the help of the annexed drawings, wherein:

FIGS. 1 and 2 are axonometric views of a structure **1**;

FIGS. 3A and 3B are axonometric views of, respectively, an attic and a wall **3**;

FIG. 3C is a schematic exploded view of some details of the wall **3**;

FIGS. 4A, 4B, 5A and 5B are axonometric views of a beam **2**;

FIG. 6 is a schematic of a plurality of modular elements **10**;

FIGS. 7, 8A and 8B are front schematic views of two modular elements **10, 10'**;

FIGS. from 9A to 17B are axonometric views of different embodiments of a modular element **10**;

FIGS. from 18A to 27 are axonometric views of different embodiments of a beam or column **2**;

FIGS. 28A and 28B are exploded axonometric views of some details of a beam **2**, respectively, in a first and in a second embodiment;

FIGS. 29A and 29B are enlarged views of some details of a beam **2**;

FIG. 30 is an axonometric view of an attic or a wall **3**;

FIGS. from 31 to 34A are axonometric views of different embodiments of some details of a structure **1**;

FIG. 34B is a enlarged view of some details of FIG. 34A;

FIGS. 35A and 35B are axonometric views of further embodiments of the modular element **10**;

FIG. 36 is an axonometric view of another embodiment of the modular elements **10** – removable anchoring means **50**;

FIGS. 37, 38 and 39 are axonometric views of further embodiments of the modular element **10**.

Detailed description of some preferred embodiments

Referring to the mentioned drawings, it is described a modular system for the dry building of building structures **1**, for example the one shown in FIG. 1. In particular, said structures **1** may have a substantially longitudinal development, as in the case of a beam **2**, a column or similar structures (FIGS. 4A, 4B, 5A, 5B), or a substantially planar development,

for example, walls **3**, floors, balconies, roof pitches or similar structures (FIGS. 3A, 3B, 30, 33).

The structure **1** may be load-bearing or not.

As used herein, the term “structure” or derivatives thereof means a set of structural elements which, due to their nature, is designed to withstand compressive, tensile and shear stresses.

As used herein, the term “building structure” or derivatives thereof means a structure or a group of two or more structures designed for the construction of a building product, for both housing purpose (*building structure*) and non-housing purposes (*nonbuilding structure*).

In case the structure **1** has a substantially planar development along the main development plane π , it may therefore be subject to loads both longitudinally and transversally to the plane π . For example, in case the structure **1** is a vertical bearing wall **3** of a house, it may be subject mainly to a compressive load which is parallel to the plane. On the other hand, in case the structure **1** is a floor **3** for a housing unit, it must be capable to withstand a load which is substantially orthogonal to the plane thereof.

In particular, as shown for example in FIGS. 2, 33, 34A and better described hereunder, several planar and/or longitudinal structures **1** may be operatively coupled with each other so to obtain, for example, a truss, a garage, a balcony, a house, a fair stand or similar building structures.

As it is well-known, the action of a force, such as a load or a constraint, on the structure **1**, generates on the structure itself **1**, or on part of it, some compressive, tensile and shear stresses. Conveniently, the system may be configured to oppose such stresses.

Conveniently, the modular system may include a plurality of modular elements **10**, **10'**, **10''**, which may be reciprocally coupled to obtain the building **1**.

Said modular elements **10**, **10'**, **10''**, may be manufactured of any material, preferably in plastic or metallic material or wood. In particular, the modular element **10** may be manufactured of recycled, recyclable or natural material or anyway a material which is at least partly of vegetal origin, so to have a low environmental impact.

The present invention may include several similar or identical parts and/or elements. If not otherwise specified, similar or identical parts and/or elements will be indicated with a

single reference number, meaning that the described technical features are common to all similar or identical parts and/or elements.

The modular elements **10**, **10'**, **10''** may transmit any compressive stresses to each other by contact. Moreover, the modular system may include some mutual anchoring means **50** of the modular elements **10**, **10'**, **10''**, which may withstand the tensile and shear stresses, as better described below.

According to a particular embodiment shown in FIG. 27, the modular elements **10**, **10'**, **10''** may be firmly anchored, for example through welding. Conveniently, the latter may contrast any tensile and shear stresses.

On the other hand, the anchoring means **50** may be preferably of removable type.

In any case, in general each modular element **10** may comprise at least a plate-shaped element **20** and at least a functional zone **30** which is coupled or may be coupled to the plate-shaped element **20**, whose functions will be better described hereunder.

Each modular element **10** may have at least one substantially planar wall **11**, being part of the plate-shaped element **20**, and one or several side faces **12**, preferably substantially perpendicular to the planar wall **11**, being part of both the plate-shaped element **20** and the functional zone **30**.

For example, the planar wall **11** may define the upper wall of every modular element **10**. However, it is understood that, according to the orientation of the modular element, said wall may define, for example, the lower wall, without departing from the scope of the present invention.

Once two or more modular elements have been coupled **10**, **10'**, the respective planar walls **11**, **11'** may lie substantially in the same plane and, in particular, may define a development plane π_1 substantially parallel and preferably corresponding to the main development plane π of the structure **1**, for example the exposed plane of a wall or an attic.

As shown in the appended figures and better explained below, the modular elements **10**, **10'**, **10''** may be coupled both longitudinally, for example along the **X** axis to form a beam **2**, or along two different directions, for example along the **X** axis and a **Y** axis which may be perpendicular to the first to form a wall or an attic **3** which are substantially planar.

In this case, once the modular elements **10**, **10'** have been coupled, the plate-shaped elements **20**, **20'** may define a substantially continuous surface **4**.

In particular, as shown for example in FIGS. from 9A to 17B and in FIG. 37, the plate-shaped element **20** may have a substantially planar upper side, which may define the planar wall **11** of the modular element **10**.

On the other hand, the side faces **12** of the modular element **10** may include a first end edge **13** in correspondence of the substantially planar wall **11** and a second end edge **14** in front of the first.

More specifically, the plate-shaped element **20** may include the first end edge **13** while the functional zone **30** may include the second end edge **14** of the side faces **12**.

According to another aspect of the invention, even the functional zone **30** of the modular element **10** may be intended to face a corresponding functional zone **30'** of the adjacent modular element **10'**.

In this way, the end edge **13** may cooperate with the corresponding end edge **13'** of the adjacent modular element **10'** to define the plane π_1 , while the second end edges **14**, **14'** of the side faces **12** of the modular elements **10**, **10'** may reciprocally cooperate to define a second plane π_2 which is substantially parallel to the plane π_1 and opposed thereto.

In other words, following the mutual coupling of the modular elements **10** the two opposite planes π_1 , π_2 may be obtained. In particular, as shown in the attached pictures and better explained hereinafter, the two planes π_1 , π_2 may be located at the opposite ends of the modular elements **10**.

Conveniently, in each modular element **10** the functional zone **30** may extend transversally to the plate-shaped element **20**, preferably perpendicularly to it.

The transmission of the compressive stresses may occur through the mutual interaction between the corresponding side faces **12**, **12'** of two adjacent modular elements **10**, **10'**.

Preferably, each of the side faces **12** of the modular element **10** may be designed to come into contact, totally or partially, with the corresponding side faces **12'** of the adjacent modular element **10'**.

More specifically, the modular element **10** may have some portions **15** of the side faces **12** designed to come into contact with the corresponding portion **15'** of the side face **12'** of the adjacent modular element **10'**. The contact portions **15** may be substantially planar and may be substantially orthogonal to the planes π_1 , π_2 .

According to the load direction, the contact portions **15** may be defined by a more or less large area of the side faces **12**.

For example, as schematically shown in FIG. 7, in case the load **C** is substantially parallel to the main development plane π the compressive stresses may be transmitted substantially through contact portions **15** defined by the relevant side faces **12**, **12'** along their whole extension.

In case of loading force whose direction is transversal to the main development plane π , that is when the beam and/or the attic are subject to bending, the compressive stresses may be transmitted substantially along one of the two planes π_1 , π_2 according to the direction of the load and/or type of constraint to which the structure is subject, as schematically shown in FIGS. 8A and 8B.

In other words, said stresses may be substantially transmitted by the plate-shaped element **20** that is through the edges **13**, **13'** of two adjacent modular elements **10**, **10'**, or by the operating portion **30** and that is by the edges **14**, **14'** of two adjacent modular elements **10**, **10'**. As specified below, the edges which are opposite to the ones subject to compressive stresses are bound with each other through the anchoring means **50**, which oppose the bending.

As shown in the appended figures, and in particular in FIGS. from 9A to 15B, the plate-shaped element **20** may be of a parallelepiped shape, preferably with a square base.

More specifically, the plate-shaped element **20** may have a length **LU2** and a width **LA2** higher than height **H2**. For example a length **LU2** at least 3 times the height **H2**, preferably a length **LU2** about 5 times the height **H2**.

For example, the plate-shaped element **20** may have a length **LU2** and a width **LA2** of about 50 cm or 60 cm, and a height **H2** of about 10cm.

Therefore, the plate-shaped element **20** may have four lateral portions **22**, **23**, **24**, **25**, which may include the edge **13** and have a substantially flat shape. In particular, as shown in FIGS. 28A and 28B, the side portion **24** of the plate-shaped element **20** may be designed to come into contact with the corresponding lateral portion **22'** of the plate-shaped element **20'** of the adjacent modular element **10'** so to transfer its compressive stresses when these latter are transmitted substantially along the plane π_1 . In other words, the lateral portions **22**, **23**, **24**, **25** may define the contact portions **15**.

More specifically, each modular element may include four side portions **22, 23, 24, 25** opposing each other two by two. For example, the portions **22** and **24** and the portions **23** and **25** may face each other. In case of a square-based plate-shaped element **20**, the side portions **22, 23, 24, 25** may be all identical.

In particular, each lateral portion **22, 23, 24, 25** may come into contact with a corresponding portion of the adjacent modular element **10'**. For example, each lateral portion **22, 23, 24, 25** may come into contact with the corresponding portions of four different adjacent modular elements **10', 10'', 10''', 10''''**. More specifically, as schematically shown in FIG. 3C, the portions **22, 23, 24, 25** of the modular element may come into contact with the portions **24', 25'', 22''', 23''''** of the relevant adjacent modular elements **10', 10'', 10''', 10''''**.

The functional zone **30** may include at least a planar plate **31** which extends from the plate-shaped element **20** along a plane π_3 substantially perpendicular to the plane π_1 .

The planar plate **31** may have a length lower or substantially equal to the one of the plate-like element **20** and/or a width equal to one fifth of the length of the latter and/or a height equal to twice the width of the plate itself **31**.

For example, the planar plate **31** may have a length **LU3** of about 50cm, a width **LA3** of about 10cm, and a height **H3** of about 20cm.

Thanks to said features, the modular element **10** may be particularly compact. For example it may have a width **LA1** and a length **LU1** of about 50cm, and a height **H1** of about 30cm.

According to a particular embodiment, the planar plate **31** may extend from the plate-shaped element **20** centrally, so that the modular element **10** has a substantially "T" shaped cross section.

The planar plate **31** may include a front portion **32** and a back portion **34**, which may be substantially planar and lie in a plane which is substantially parallel to the plane of the lateral portions **22, 24** of the plate-shaped element **20**. In other words, the front portion **32** and the back portion **34** may be substantially perpendicular to the plane π_3 .

Conveniently, when one or several modular elements **10, 10', 10''..** are in mutual contact, even one of the portions **32, 34** of the modular element **10** and one of the corresponding portions **34', 32'** of the adjacent modular element **10'** may be in mutual

contact.

More specifically, the front portion **32** and the back portion **34** may include the edges **14** so that they contribute to the transmission of the compressive stresses when they are transmitted substantially along the plane π_2 . In other words, the portions **32**, **34** of the plate **31** may take part in the transmission of the compressive stresses, so to define the contact portions **15**.

According to a particular aspect of the invention, the front portions **32** of the plate **31** of the functional zone **30** and the side portions **22** of the plate-shaped element **20** may be placed so that the side portions **22** and the front ones **32** define a side face **12** substantially continuous of the modular element **10** and the side portions **24** and back ones **34** define the side face opposed to the first **12** of the modular element **10**.

According to a different embodiment, the functional zone **30** may comprise another planar plate **36**, defining a plane π_4 , so as to form with the first a pair of planar plates **31**, **36**.

In particular, both the planar plates **31**, **36** may have a length **LU3** equal to length **LU2** of the plate-shaped element **20**, a width **LA3** equal to one fifth of their length **LU3** and a height **H3** equal to twice their width.

In particular, as shown in the FIGS. from 11A to 14B and 16A and 16B, the plates **31**, **36** may be placed crossed each other in order to form a cross shape, for example one substantially perpendicular to the other, both extending from the plate-shaped **20**. In other words, the planes π_3 π_4 are substantially perpendicular each other.

Possibly, both planer plates **31**, **36** may present the dimensions indicated above. According to a particular aspect of the invention, the height **H2** of the plate-shaped element **20** and the width **LA3** of the planar plates **31**, **36** may vary depending on the material used for manufacturing the modular element **10**.

For example, in case the latter is realized in plastic, the height **H2** of the first and the width **LA3** of the second may be of about 10 cm, on the other hand, when the modular element **10** is manufactured in wood or metal metallic material, for example aluminum as shown in the FIGS 12A and 12B, the height **H2** and the width **LA3** may have smaller dimensions, preferably of about 5 cm.

In particular, in such last case, the modular element **10** may have the same outer dimensions, for example a width **LA1** and a length **LU1** of about 50cm and a height **H1** of

about 30 cm, but it may have different relationships with respect to those indicated above between the dimensions of the planar plates **31**, **36** and the dimensions of the plate-shaped element **20**.

More in detail, in case the element **10** is manufactured in metallic material, the width **LA3** of the planar plates **31**, **36** and the width **LA1** of the element **10** itself, may have a relationship comprised between 0.1 and 0.2, while the height **H3** may be about twice the height **H2**.

In a preferred, but not exclusive embodiment of the invention, in each modular element **10** the width **LA2** may substantially be the same as the length **LU2**, which may also be substantially the same as the width **LU3**. Besides this, the height **H2** may substantially be the same as the width **LA3**, and, as a consequence, the height **H3** may substantially be equal to the half of the difference between the width **LA2** and the width **LA3**.

According to an aspect of the invention, also the planar plate **36** may be placed centrally with respect to the plate-shaped element **20** and it may have respective side portions **33**, **35** which may substantially be planar and placed in a plane substantially parallel to the plane π_3 .

In other words, the pair of planar plates **31**, **36** may intersect to form a central cross and may have four portions **32**, **33**, **34**, **35** aimed at interacting with one respective lateral portion of the adjacent modular elements **10'**, **10''**, **10'''**, **10''''**.

The modular element **10** may then have a "T" section, both on the side and in the front. In such a way, the modular element **10** may be coupled, indifferently, with another modular element **10** along a longitudinal direction defined by the axis **X** or along a transverse direction, perpendicular to the longitudinal direction, defined by axis **Y**.

This highly simplifies the building of the structures **1**, since there is no preferred direction for the building thereof. At the same time, there is complete freedom in the design and manufacturing of any structure configuration.

According to a different embodiment, shown in the FIGS. 16A and 16B, the modular element **10** may have a substantially "L" shape so as to define an edge element **110**.

In particular, a planar plate **36** may be longer than the other plate **31** so that the portions **33** and **35** of the functional zone **30** cooperate with the lateral portions **23**, **25** of the plate-shaped element **20** in order to define two side faces **12** of substantially "L" shape,

the portion **34** of the functional zone **30** and the side portion **24** of the plate-shaped element **20** cooperate to define a side face **12** substantially planar having width and height equal to the width and height of the modular element **10**, and the portion **32** of the functional zone **30** and the side portion **22** of the plate-shaped element **20** cooperate to define a side face **12** of substantially "T" shape.

Possibly, as for example shown in the FIG. 33, the two side faces **12** of substantially "L" shape may define an angle different from 90°, more in general an angle comprised between 1° and 180°, preferably comprised between 100° and 150°. In particular, the edge element **110** may be used to couple the pitches of a roof each other and/or a pitch of a roof with a wall.

In other words, the edge elements **110** may have a different angle depending on the requirements.

According to a different embodiment, shown in the FIGS. 17A and 17B, the modular element **10** may substantially be an angular element **210**.

In particular, the planar plates **31**, **36** may be placed substantially perpendicular to each other, both extending from the plate-shaped element **20**. More in particular, the same planar plates **31**, **36** may be placed laterally with respect to the plate-shaped element **20** so that the portions **34**, **35**, respectively, of the plates **31**, **36** of the functional zone **30** cooperate with the side portions **24**, **25** of the plate-shaped element **20** in order to define two side faces **12** consecutive to the modular element **10** of substantially square shape.

On the other hand, the portions **32**, **33**, respectively, of the plate **31**, **36** of the functional zone **30** may cooperate with the side portions **22**, **23** of the plate-shaped element **20** in order to define two side faces **12** consecutive to the modular element **10** of substantially "L" shape.

According to a different embodiment, shown in FIGS. 10A and 10B, the planar plates **31**, **36** may be placed laterally with respect to the plate-shaped element **20**, one facing the other so as to be substantially parallel. More in detail, in said embodiment, the two planes π_3 π_4 are substantially parallel to each other. For example, considering a transverse portion of the modular element **10**, the latter may have a shape of a substantially reversed "U".

Said planar plates **31** may have each a front portion **32** which may define a side face **12** of the modular element **10**, a back portion **34** which may define another of the side faces

12 of the same modular element **10**. In particular, the portions **32, 34** may contribute to the transmission of the compressive stresses defining in this way the contact portions **15**.

Possibly, the planar plates **31, 36** may be placed so that each of them have a side surface substantially flat **33, 35** placed parallelly to the plane π_3 . In particular, the side portions **33, 35** may then define two opposite faces **12** of the modular element **10**.

Due to the geometrical features of the modular elements **10** described above, the same are easily stackable, for example in a stock area or during the transportation.

For example, as shown in FIG. 6, the modular elements **10** may be placed in rows so that the plate-shaped element **20** of each of them is in contact with the functional zone **30'** of the element of the lower row and with the plate-shaped element **20''** of the modular elements **10''** of the upper row.

It is understood that the modular elements **10** may be placed in different ways depending on the requirements, safeguarding the space and improving the stacking thereof.

According to a different embodiment shown in FIG. 15A and 15B, the modular element **10** may comprise two pairs of planar plates **31, 36** facing each other. In particular, each of the planar plates **31, 36** may have an outer surface **32, 33, 34, 35** substantially parallel to the side portions **22, 23, 24, 25**. In particular, the first and the second may define four faces **12** of the modular element **10**.

More in general, in all the embodiments, the portions and/or surfaces **32, 33, 34, 35** of the functional zone **30** and the corresponding side portions **22, 23, 24, 25** of the plate-shaped element **20** may define the four faces **12** of the modular element **10**.

Depending on the transmission plane of the compressive stresses on the modular element **10**, one or more of such portions **32, 33, 34, 35, 22, 23, 24, 25**, may contribute to the transmission of the compressive stresses in order to define the contact portions **15**.

In a preferred but not exclusive embodiment, shown for example in the FIGS. 35A and 35B, the plate-shaped element **20** and the functional zone **30** may be removably coupable each other, for example through screw and screw nut means or wedge means or insertion means of male/female type, not represented in the figures since already known. This highly facilitates the transportation and the handling.

In particular, in case of functional zone defined by the planar plates **31, 36**, also these latter may be removably coupable each other and to the plate-shaped element **20**.

As indicated above, the structure **1** may be subject to shear and tensile stresses, in addition to the already cited compression stresses.

The anchoring means **50** may be mounted on the modular elements **10** once they have been preemptively coupled, so as to form the structure **1**.

Besides this, as better explained hereinafter, the anchoring means **50** and the modular elements **10** may be reciprocally configured so that the same anchoring means **50** once mounted, may be all accessible for their removal, without the necessity of decoupling the modular elements **10**, **10'**, **10''** each other.

In such way, the operator may remove from the structure **1** one or more central modular elements **10** without the need to act on the peripheral modular elements.

Thanks to said feature, the maintenance and/or replacement operations of the modular elements **10**, for example because one or more of them break or is damaged, may be faster and cheaper.

Besides this, it is possible to modify the structure **1** without fully dismounting it. For example, it is possible to modify the structure **1** to realize, close or modify a window, a door or a front door.

In particular, the anchoring means **50** may include at least one elongated anchoring member **61** susceptible to join two modular elements preferably adjacent **10**, **10'** so as to contrast the tensile stresses.

The elongated anchoring members **61** may be configured so as to join two different modular elements **10**, **10'** in proximity to the functional zone **30**, in particular of the central zone **39** thereof.

According to an aspect of the invention, as shown in particular in the FIGS. from 18A to 28B, said elongated anchoring members **61** may preferably join two by two modular elements **10**, **10'** adjacent each other.

The anchoring members **61** may have an elongated shape defining an axis **X'** substantially parallel to the longitudinal axis **X**. For example, in case the structure **1** is a beam **2**, the axis **X'** may coincide with the longitudinal axis **X**.

In case the load-bearing structure **1** develops substantially planar **3**, the anchoring means **50** may comprise a plurality of anchoring elongated members **61** each defining a respective axis **X**.

Said elongated anchoring members **61** may be, for example, rope-shaped rods or chains, and they may be manufactured in metallic material.

According to another aspect of the invention, as shown in the FIGS. from 30 to 34B, the anchoring means **61** may act along axis **X'**, **X''**, **X'''** substantially parallel each other and/or along axis **Y'**, **Y''**, **Y'''** substantially parallel each other.

Conveniently, the axis **X'**, **X''**, **X'''** and the axis **Y'**, **Y''**, **Y'''** may be transverse each other and preferably substantially perpendicular, so as to allow the structure **1** to be highly rigid.

According to an aspect of the invention, the axis **X'**, **X''**, **X'''** may define a plane π_5 while the axis **Y'**, **Y''**, **Y'''** may define a plane π_6 . The planes π_5 , π_6 may be substantially parallel or coincident each other.

In particular, said planes π_5 , π_6 may be substantially parallel to the plane π_1 . Possibly, the same π_5 , π_6 may substantially coincide with the plane π_2 . In other words, the anchoring members **61** may form a net substantially placed along the plane π_2 .

This allows the structure **1** to highly resist the bending stresses, since the plane π_1 , along which the compressive stresses develop, is opposed and spaced to the plane π_2 along which the tensile stresses develop.

What above is particularly advantageous with respect to the known systems, in which the rods are placed in the central part of the modular element. In order to couple two or more modular elements **10**, **10'**, **10''** ... each anchoring member **61** may have respective ends **62**, **63** which may be anchored in correspondence with the functional zones **30**, **30'** of two different modular elements **10**, **10'**, preferably in correspondence with the central part **39** of the functional zones **30**.

Each anchoring member **61** may have any length, such as to couple two or more modular elements **10**, **10'**, **10''**.

In an embodiment, shown for example in FIG. 26, the anchoring members **61** may have such length so as to couple a plurality of modular elements **10**, **10'**, **10''**, for example through spikes, forks and any fastening element.

Preferably, as shown in the FIGS. from 18A to 24B, each anchoring element **61** may have such length so as to couple two adjacent modular elements **10**, **10'**.

Conveniently, in some embodiments of the invention of the modular element **10** may comprise at least one seat **40** to house at least one portion of at least one of the anchoring

members **61**.

Advantageously, the seats **40** may be configured and/or positioned so that the axis **X'** and/or the axis **Y'** are arranged respectively at planes π_5 , π_6 .

Preferably, each seat **40** may comprise at least one housing **41** for the end **62**, **63** of the elongated anchoring member **61**. In particular, the seat **40** may be placed in the central part **39** of the functional zone **30** of the modular element **10**.

More in particular, each of the central parts **39** of the functional zones **30** of the modular elements **10** may comprise a plurality of seats **40**, for example 4 seats forming a cross, suitable for housing the respective end **62**, **63** of a corresponding plurality of anchoring members **61**.

For example, in case of functional zone **30** with cross configuration, each of the planar plates **31**, **36** may include a couple of seats **40** which may be symmetrical with respect to the central part **39**.

In this way, each modular element **10** may be connected in an easy and fast way with a corresponding plurality of adjacent modular elements **10'**, **10''**, **10'''**, **10''''**.

Conveniently, the seats **40** may be at least partially accessible in correspondence with the plane π_2 to allow the insertion/the removal of the anchoring members **61** therein/therefrom without decoupling the modular elements **10**, **10'**, **10''** each other.

Thanks to such feature, the anchoring means **61** may be of removable type. In this way, the replacement and/or maintenance operations of one or more modular elements **10**, **10'**, **10''**... may be very easy and rapid.

In particular, the cross formation of the modular element **10** may include, on the opposite side to the plate-shaped element **20**, that is in correspondence with the functional zone **30**, one or more longitudinal channels **42** defining the seats **40** for the insertion of the elongated members **61**.

More in detail, the longitudinal channel **42** may have a generally "U"-shaped section and may be at least partially open in correspondence with the plane π_2 so as to allow the insertion/removal of the anchoring members **61** thereof.

According to some embodiments, as shown in the FIGS. 25A, 25B and 26, the modular element **10** may be without channels **42**.

According to another aspect of the invention, each functional zone **30** may comprise

four housings **41** to allow the coupling of four anchoring members **61**.

In particular, as shown in the FIGS. 29A and 29B, it may be foreseen a metallic plate **45** including the housings **41**.

Said metallic plate **45** may be integrated into the central zone **39** of the functional zone **30** of each modular element **10**, as shown for example in the FIGS. from 18A to 24B, so that the anchoring members **61** remains flush with the plane π_2 . On the other hand, in the embodiments without channels **42** the metallic plate **45** may be simply laid on and if needed coupled with the central zone **39** of the functional zone **30** of each modular element **10**, as shown for example in the FIGS. 25A and 25B.

Conveniently, in the embodiments shown in the FIGS. 18B, 19B, 22A, 22B, 23A, 23B, 25A, 25B, the opposite ends **62**, **63** of the anchoring members **61** may have a predetermined shape, while the housings **41** may have a corresponding counter-profile.

Said coupling may be of removable type.

According to a different embodiment, shown in the FIGS. 20B, 21B, 24A, 24B, 28A and 28B, each anchoring member **61** may comprise two portions **64**, **65** joined each other by a central sleeve **66** for the regulation of the reciprocal traction between the same portions **64**, **65**.

In particular, one of the portions **64**, **65** may have a right thread and the other portion may have a left thread. On the other hand, the sleeve **66** may comprise counter-threading so that the sleeve **66** itself is screwable with just one turning movement.

In this way the operator may regulate the traction between the two adjacent modular elements **10**, **10'** through only the rotation of the sleeve **66**.

According to a particular embodiment shown in the FIG. 26, the anchoring members **61** may comprise metallic members placed in correspondence with the edges **14** of the functional zone **30**. In particular, each member **61** may be fastened to at least two modular elements **10**, **10'**, preferably consecutive each other.

For example, in order to couple the members **61** of the modular elements **10** clips, screws, spikes or similar may be foreseen.

Conveniently, said members **61** may have a longitudinal development and be placed along the axis **X'**, **X''**, **X'''** and the axis **Y'**, **Y''**, **Y'''** in a way similar to what described above for the elongated members **61**.

Said arrangement may be preferably arranged in case that the modular element **10** is in wood.

More in general, the arrangements shown in the FIGS. 18A, 18B, 20A, 20B, 22B, 23B, 24B, 25A, 25B, 26, 30, 31, 33, 34, 35A, 35B, 36 and 37 are particularly suitable for a modular element manufactured in wood, the arrangements shown in the FIGS. 19A, 19B, 21A, 21B, 22A, 23A, 24A and 32 are particularly suitable for a modular element manufactured in plastic material, while the arrangement shown in FIG. 27 may be particularly suitable for a modular element manufactured in metallic material.

Besides this, thanks to the particular cross arrangement of the functional zone **30**, the structure **1** may then achieve high rigidity both along the transverse direction defined by the axis **Y** and along the longitudinal direction defined by axis **X**.

In fact, as described above, after the bending of one or more parts of the structure **1**, tensile and compressive stresses may be generated, which may act along different planes in a known way and schematically shown in the FIGS. 7, 8A and 8B.

For example, after applying a load, the beam **2** may bend so that compressive stresses act on the upper portion in correspondence with the plane π_1 , while tensile stresses act on the lower portion in correspondence with the plane π_2 .

Conveniently, then, the compressive stresses may be counteracted through the reciprocal contact of the portions **15** of the sides **12** of the modular elements **10** as described above, while the anchoring members **61** may be placed in proximity to the plane π_2 in order to counteract the tensile stresses.

Conveniently, the plane π_2 may be spaced apart from the plane π_1 so as to keep functionally separated from each other the zone withstanding the traction and that withstanding the compression.

In particular, as shown above, the two planes π_1 , π_2 may be at the opposite ends of the modular element **10** so as to maximize the effects of withstanding the compressive and/or tensile stresses.

Besides this, the symmetry of the cross formation of the modular element **10** and the arrangement of the anchoring members **61** as described above may allow the orientation of the modular element **10** in any direction along the transverse axis **X** and longitudinal axis **Y** without compromising the structural functionality of stress withstanding.

Thanks to this feature, it may be possible to manufacture a structure **1** with only one arrangement of the modular element **10** so as to reduce time and costs of manufacturing, transportation and installation.

Even though it has been described an example in which the compressive stresses substantially act along the first plane π_1 and the tensile stresses substantially act along the flat plane π_2 , it is understood, as known, that some structures **1**, for example an attic **3**, may be subject to tensile and/or compressive stresses in their different parts of the same plane.

More in detail, the plane π_1 of the modular element **10** may be crossed in some zones of the attic **3** by compressive stresses and in other zones thereof by tensile stresses. On the other hand, the plane π_2 may be crossed in the corresponding zones by respectively tensile or compressive stresses. In other words, the compressive and/or tensile stresses may transfer along both the plane π_1 and the plane π_2 .

Concerning the compressive stresses, when acting along the plane π_1 , one or more of the side portions **22**, **23**, **24**, **25** of the plate-shaped element **20** may define the portions **15** of the faces **12** intended to come into contact with one or more of the respective side portions **22'**, **23'**, **24'**, **25'** of the respective plate-shaped element **20'** of one or more adjacent modular elements **10'**.

On the other hand, when the compressive stresses act along the plane π_2 , one or more of the side portions **32**, **33**, **34**, **35** of the functional zone **30** may define the portions **15** of the faces **12** intended to come into contact with the respective side portions **32'**, **33'**, **34'**, **35'** of the respective functional zone **30'** of one or more adjacent modular elements **10'**.

Concerning the tensile stresses, when these act along the plane π_2 , these may be counteracted by the anchoring means **61** as described above.

On the other hand, when the tensile stresses act on the plane π_1 , further anchoring means may be foreseen **67**, as shown in FIGS. 22A, 22B and 25A.

In particular, the anchoring means **67** may act along axis X_1' , X_1'' , X_1''' ... each other substantially parallel and/or along axis Y_1' , Y_1'' , Y_1''' ..., each other substantially parallel.

Conveniently, the axis X_1' , X_1'' , X_1''' ... and the axis Y_1' , Y_1'' , Y_1''' ... may be each other transversal and preferably substantially perpendicular, so as to give high rigidity to the structure **1**.

According to an aspect of the invention, the axis X_1' , X_1'' , X_1''' ... and the axis Y_1' , Y_1'' ,

π_1 ... may be placed each along a plane substantially coinciding with the plane π_1 . In other words, the anchoring means **67** may form a net substantially placed along such plane π_1 .

In particular, as shown in the FIGS. 18A, 19A, 20A, 21A, 22A, 22B, the modular elements **10** may comprise a seat **43**. Conveniently, the latter may be arranged and/or positioned so that the axis X_1' and/or the axis Y_1' lie along said plane π_1 .

More in particular, the seat **43** may comprise one or more housings **44** to house at least one portion of at least one of the anchoring means **67**, for example one of the opposite ends **68**, **69** of these latter.

As shown in the FIG. 22A e 22B and, in a similar way, at the opposite ends **62**, **63** of the anchoring means **61**, the opposite ends **68**, **69** of the latter and the housings **44** may be reciprocally shaped so as to wedge together in a removable way.

Possibly, a second plate **46** (FIG. 29A) may be foreseen, substantially similar to the metallic plate **45** (FIG. 29B), comprising said housings **44**.

The seat **43**, which may be arranged in a substantially similar way to the seat **40**, may be configured and/or positioned so that the anchoring means **67** are substantially placed in the plane π_1 .

Conveniently, the seat **43** may be at least partially accessible in correspondence with the plane π_1 to allow the insertion/the removal of the anchoring means **67** therein/therefrom without uncoupling the modular elements each other **10**, **10'**, **10''**.

More in detail, the plate-shaped element **20** may comprise one or more seats **43**, each thereof may be defined by one or more housings **44** and one or more longitudinal channels **42**. These latter may at least be partially open in correspondence with the plane π_1 so as to allow the insertion/removal of the anchoring means **67** in/from the respective seats **43**.

According to another aspect of the invention, in order to couple the opposite ends **68**, **69'** of two consecutive anchoring elements **67**, **67'** the metallic plate may be foreseen **46**.

According to a further aspect of the invention shown in particular in FIG. 34B, each anchoring element **67** may comprise two portions **70**, **71** joined each other by a central sleeve **66** for regulating the mutual traction between the same portions **70**, **71**.

The latter may be conveniently threaded in a way similar to the portions **64**, **65** of the anchoring means **61** so that the sleeve **66** is screwable with only one rotary movement.

In this way, the operator may regulate the traction between two adjacent modular elements **10**, **10'** in a simple and immediate way.

The system may then comprise the anchoring means **61** placed in one or more seats **40** and/or the anchoring means **67** placed in one or more seats **43** according to the requirements, in order to give high structural resistance to the support structure **1** with a material saving.

Thanks to these features, the modular elements **10**, **10'** ... may be orientated in any way during the installation and then anchored through the anchoring means **61**, **67**, which may be placed in a convenient way, as described above, according to the requirements.

Thanks to the features here above, furthermore, it is possible to realize support beams, attics, balconies or roof pitches, and more in general, structures suitable for supporting normal loads on the main development floor.

Besides this, the operator may arrange the modular elements **10**, **10'** ... so as to give to the structure **1** an aesthetically pleasant aspect without jeopardizing the structural functionalities.

According to a different aspect of the invention, the structure **1** may be realized through modular elements **10** having the arrangements discussed above.

In particular, as shown in particular in the FIGS. 31, 32, 33 and 34, edge elements **110** (FIGS. 16A and 16B) may be foreseen and/or the angular elements **210** (FIGG. 17A, 17B) placed in proximity to the edges and/or to the corners of connection between a beam and/or wall with a column and/or attic.

In this way, it may be possible to manufacture complex structures of high aesthetic impact.

According to a further aspect of the invention, the anchoring means **50** may include at least another anchoring means **51** susceptible to join two adjacent modular elements **10**, **10'** so as to counteract the shear stresses.

For example, as shown in particular in the FIGS. 28A and 28B and 36, the anchoring elements **51** may include plates **55** each thereof may be connected to two adjacent modular elements **10**, **10'**.

In particular, in the embodiment of FIG. 28A, the two plates **55** may be monolithic each other so as to form one unique anchoring element **55'**, in the embodiment of FIG. 28B

the plates **55** may act in pairs from opposite sides of the planar plates **31**, **36**, and in the embodiment of FIG. 36 the plate **55** may be single and inserted in a groove which is central with respect to the planar plates **31**, **36**.

Advantageously, the anchoring member **51** may be perforated, as better explained hereinafter.

In a preferred but not exclusive embodiment of the invention, the anchoring members **51** may be the only anchoring members to the structure **1**. In other words, the modular elements **10** may be anchored each other exclusively by means of the plates **55**, without the necessity of elongated anchoring members **61** and/or **67**. Said embodiment may be preferred in case of structure intended not to undergo excessive stresses, as in the case of structures aimed at a temporary human occupation, as for example a fair stand.

In any case, the anchoring member **51** may have at least one first portion **56** coupled with the functional zone **30** of a modular element **10** and a second portion **57** coupled with the functional zone **30'** of an adjacent modular element **10'**.

According to a further aspect of the invention, the anchoring members **51** may be placed in proximity to the planar plates **31**, **36** of two adjacent modular elements **10**, **10'**. In particular, each anchoring element **51** may be placed so that the portion **56** thereof may be coupled to the planar plate **31** of a modular element **10**, while the portion **57** may be coupled to the planar plate **31'** of the adjacent modular element **10'**.

According to a different aspect of the invention, each modular element **10** may include a plurality of service holes **75**. The latter may be particularly convenient for the passage of cables and/or ducts so as to allow, for example, the realization of hydraulic systems, electrical plants, drainage systems, and similar plants normally present in household and/or industrial buildings.

In particular, the passage holes **75** may be formed in correspondence with the functional zones **30** of the modular elements **10**, **10'**, **10''**.. and that is on the opposite side to the plane π_1 .

As shown in particular in FIGS. 15A and 15B, at least one lateral side **12** of the modular element **10**, preferably at least two opposite side faces **12** thereof, may comprise one service hole **75** to allow the passage of pipes.

Even though not shown in the appended figures, it is understood that the

embodiments of the modular element **10** described above and shown in the FIGS. from 9A to 12B, may comprise at least one service hole **75** passing through one or more of the planar plates **31**, **36**.

On the other side, according to a particular embodiment, shown in the FIGS. 13A, 13B, 14A, 14B, the functional zone **30** of the modular elements **10** may include at least one recess **76** intended to couple with at least one corresponding recess **76'** of the adjacent modular element **10'** to define the service holes **75**.

Conveniently, the functional zones **30** may be opened or covered by means of removable panels so as to allow one operator to have access to the service holes **75** without dismounting the structure **1**.

In this way, the maintenance operations of the plants may be facilitated. In particular, it is not necessary neither to remove nor to break the modular elements.

Conveniently, furthermore, the anchoring members **51** may have one or more holes **58**. In particular, the anchoring members **51** may be placed in correspondence with the recess **76** so that the aperture **58** of the anchoring members **51** substantially coincides with the service holes **75**.

More in particular, the anchoring members **51** may be placed between two modular elements **10**, **10'** adjacent in correspondence with the recesses **76**, **76'** thereof. For example, each of the anchoring members **51** may correspond to the portions **56**, **57** between the respective functional zones **30**, **30'** of two adjacent modular elements **10**, **10'**.

More in detail, one between the portions **56**, **57** may be in contact with one of the side portions **32**, **33**, **34**, **35** of the functional zone **30** of one modular element **10**, while the other between the portions **56**, **57** may be in contact with one among the side portions **32'**, **33'**, **34'**, **35'** of the functional zone **30** of the adjacent modular element **10'**.

For example, as shown in FIG. 28B, in which the anchoring members **51** may include a pair of plates **55** facing each other, the latter may be placed so that the respective side portions **32**, **33**, **34**, **35** of the functional zones **30** remain interposed between the pair of plates **55** itself.

On the other side, in the embodiment of FIG. 36 in which the anchoring members **51** may include one single plate **55**, the latter may be placed so that the respective side portions **32**, **33**, **34**, **35** of the functional zones **30** remain interposed between the plate **55** itself.

In order to reciprocally couple the plates **55** and the side portions **32, 33, 34, 35** of two adjacent modular elements **10, 10'** screws, spikes or similar fastening means may be foreseen.

On the other side, according to a different embodiment shown in particular in FIG. 28A, the anchoring means **51** may comprise metallic longitudinal elements **55'** of substantially parallelepiped shape, which may comprise two ends **56, 57** and one substantially cylindrical or tubular portion defining an aperture **58** which may coincide with the service holes **75**.

Each metallic longitudinal element **55'** may be formed by two plates **55** facing each other joined by two transverse elements also facing each other.

In this case, the side portions **32, 33, 34, 35** of the functional zone **30** of a modular element **10** may comprise a seat **59** for the ends **56, 57** of the longitudinal element **55'** so that the latter may define a body intended to be inserted at least partially in said seats **59** in order to couple two adjacent modular elements **10, 10'**.

Thanks to said features, the mutual sliding of two adjacent modular elements **10, 10'** may be avoided. In other words the shear stresses may be counteracted in order to guarantee a high rigidity of the structure **1**.

Also the metallic longitudinal elements **55'** and/or the plates **55** may be accessible by the operator so as to facilitate the maintenance and/or replacement operations of the modular elements **10**.

According to a further aspect of the invention shown in the FIGS. 31, 32, 33, 34A and 34B, two modular elements **10, 10'** may be coupled each other so that the respective planar walls **11, 11'** thereof may each define a respective main development plane π_1, π_1' each other substantially perpendicular. In other words, the two modular elements **10, 10'** may be substantially perpendicular each other.

Thanks to said feature, the structure **1** may comprise one or more structures with vertical development, such as a wall or a column, and one or more structures with horizontal development, such as an attic, a balcony or a beam, each other reciprocally coupled.

In other words, by using the same modular elements **10** structures **1** may be realized having different main development planes, such as a garage or a building.

Besides this, as shown in particular in FIG. 33, the different attics or walls **3** of the

structure **1** may be connected through edge elements **110** having different angles depending on the requirements, so as to allow the realization of both a flat attic and of inclined roof pitches.

Conveniently, the structure **1** may be dismounted and remounted in a different way by using the same modular elements **10**.

In any case, the modular elements **10** may equally transfer the compressive, tensile and shear stresses so as not to compromise the stability of the structure **1**.

For example, as especially shown in the FIGS. 33 and 34, the lower edge **14** of a modular element **10** may stand on one of the side portions **22'**, **23'**, **24'**, **25'** of the adjacent plate-shaped element **10'** for counteracting the compressive stresses.

Conveniently, the elongated elements **61** may act along axis **Z'**, **Z''**, **Z'''** substantially transverse, preferably perpendicular, to the axis **X'**, **X''**, **X'''** and to the axis **Y'**, **Y''**, **Y'''** so as to contrast the tensile stresses acting along the different axis.

For the purpose, the metallic plate **45** e/o **46** may have different arrangements so as to house the ends **62**, **63** of the elongated elements **61** depending on whether these latter are placed along one or more axis **X'**, **X''**, **X'''**, **Y'**, **Y''**, **Y'''**, **Z'**, **Z''**, **Z'''**.

In other words, the modular elements **10** may be reciprocally coupled so as to counteract the stresses, and then the tensile, compressive and shear stresses generating in the structure **1**, acting on the structure **1** itself along any direction.

Furthermore, as shown in FIG. 33, the plates **55** may be shaped so that the portions **56**, **57** lie on two modular elements **10**, **10'** placed perpendicular each other as described above.

According to a further aspect of the inventions, the structure **1** may be anchored to the ground. For example, as schematically shown in the FIGS. 31, 32 and 34, the elongated elements **61** may penetrate into the soil or into the foundations of a house.

Possibly, also the plates **55** may be configured to allow the mutual anchoring of the soil and of the modular element **10**. In particular, the first may be configured so as to have the first portion **56** coupled to the modular element **10** and the second portion **57** anchored to the soil in a known way, for example through a system of screws and bolts.

Thanks to the characteristics described above, the structure **1** may be particularly stable.

The modular element **10** may be monolithic or realized through the coupling of one or more pieces, without departing from the scope of the invention.

Furthermore, the modular element **10** may be substantially full or may comprise a reticular structure, ribs, lamellas or similar, without departing from the scope of the invention.

For example, when the modular element **10** is manufactured in plastic material, as for example shown in FIG. 14B, the plate-shaped element **20** may comprise a plurality of ribs or lamellas **6** substantially placed crossed so as to give to the modular element **10** lightness features and, at the same time, high mechanical resistance.

In such a way, the manufacturing, transportation and installation operations are easy, fast and cheap.

In some preferred but not exclusive embodiments of the invention, as shown for example in the FIGS. 38 and 39, the plate-shaped element **20** may be perforated, it may then include one or more holes or apertures with predetermined dimensions.

For example, in the embodiment of FIG. 38 the plate-shaped element **20** may include holes with relatively large diameter, comparable to that of the holes **75**, which may be useful for the passage of cables, pipes, cable ducts or in general as service holes across an attic.

On the other side, in the embodiment of FIG. 39 the plate-shaped element **20** may be a grid, for example in metal or plastic. Said embodiment lightens the weight of the modular element **10**, they guarantee, nonetheless, a good mechanical resistance.

From what described above, it is self-evident that the invention reaches the intended purposes.

The invention is susceptible of numerous modifications and variations. All the details may be replaced with other technically equivalent elements, and the materials may be different according to requirements, without departing from the scope of the invention defined in the appended claims.

CLAIMS

1. A modular system for the dry building of building or non building structures (1), such as walls, floors, balconies, roofs or the like, comprising:

- a plurality of modular elements (10);
- means for reciprocally anchoring (50) said modular elements (10);

wherein each of said modular elements (10) includes:

- a plate-shaped element (20) which includes at least one upper or lower substantially planar wall (11);
- at least one side face (12) having a first end edge (13) in correspondence with said at least one substantially planar upper or lower wall (11) and a second end edge (14) opposite to the first one (13);
- a functional zone (30) transversely projecting from said plate-shaped element (20) that includes said second end edge (14);

wherein the plate-shaped elements (20) and the functional zones (30) of the anchored modular elements (10) cooperate each other so that:

- the substantially planar walls (11) of the the plate-shaped elements (20) define a first plane (π_1) substantially parallel to or coinciding with the plane (π) of the structure (1) to be built; and

- said at least one side face (12) of each modular element (10) remains faced to a corresponding at least one side face (12') of the adjacent modular element (10').

2. System according to claim 1, wherein each of said modular elements (10) includes a plurality of side faces (12).

3. System according to claim 2, wherein each of the side faces (12) of each modular element (10) remains faced to a corresponding side face (12') of the adjacent modular element (10').

4. System according to claim 1, 2 or 3, wherein each of the side faces (12) is substantially transversal to said at least one upper or lower wall (11).

5. System according to claim 1, 2, 3 or 4, wherein each of the side faces (12) is substantially perpendicular to said at least one upper or lower wall (11).

6. System according to any one of the preceding claims, wherein said functional zone (30) is coupled or couplable with said plate-shaped element (20).

7. System according to any one of the preceding claims, wherein the second end edges (14) of said modular elements (10) reciprocally cooperating to define a second plane (π_2) substantially parallel to said first plane (π_1) and opposite thereto.

8. System according to any one of the preceding claims, wherein the functional zone (30) of each modular element (10) remains faced to or is in contact engagement with the functional zone (30') of the adjacent modular element (10').

9. System according to any one of the preceding claims, wherein each of said side faces (12) of each modular element (10) is in contact engagement with a corresponding side face (12') of the adjacent modular element (10').

10. System according to any one of the preceding claims, wherein each of said side faces (12) of each modular element (10) is in contact engagement with a corresponding side face (12') of the adjacent modular element (10') to transfer the compressive stress withstanding on the structure (1) upon a load acting thereon.

11. System according to any one of the preceding claims, wherein each side face (12) of each of said modular elements (10) has a plane shape.

12. System according to any one of the preceding claims, wherein said plate-shaped element (20) has a substantially quadrangular shape, preferably a square shape.

13. System according to any one of the preceding claims, wherein the plate-shaped element (20) of each of said modular elements (10) has a plurality of side portions (22, 23, 24, 25) each faced to or in contact engagement with a side portion (22', 23', 24', 25') of the plate-shaped element (20') of the adjacent modular element (10').

14. System according to any one of the preceding claims, wherein the functional zone (30) of each of said modular elements (10) has a plurality of side portions (32, 33, 34, 35) each faced to or in contact engagement with a side portion (32', 33', 34', 35') of the functional area (30') of the adjacent modular element (10').

15. System according to claims 13 and 14, wherein the side faces (12) of each of said modular elements (10) are defined by the side portions (22, 23, 24, 25; 32, 33, 34, 35) of the plate-like element (20) and of the functional area (30).

16. System according to any one of the preceding claims, wherein said functional zone (30) comprises at least one planar plate (31, 36) projecting from said plate-shaped element (20).

17. System according to the preceding claim, wherein said at least one planar plate **(31, 36)** is substantially perpendicular to said first plane (π_1).

18. System according to any one of the preceding claims, wherein said functional zone **(30)** comprises at least one pair of planar plates **(31, 36)** cross each other to form a cross formation extending from said plate-shaped element **(20)**.

19. System according to the preceding claim, wherein each of said planar plates **(31, 36)** is substantially perpendicular to said first plane (π_1).

20. System according to the preceding claim, wherein said planar plates **(31, 36)** are arranged so that one **(31)** of them is substantially perpendicular and the other **(36)** of them is substantially parallel to each of the side faces **(12)** of said plate-shaped element **(20)**.

21. System according to the preceding claim, wherein said plate-shaped element **(20)** has a length (**LU2**) substantially equal to its width (**LA2**), the latter being substantially equal to the length (**LU3**) of each of said planar plates **(31, 36)**, the height (**H2**) of said plate-shaped element **(20)** being substantially equal to the width (**LA3**) of each of said planar plates **(31, 36)**, the height (**H3**) of each of the latter being substantially equal to half the difference between the width (**LA2**) of said plate-shaped element **(20)** and the width (**LA3**) of each of said planar plates **(31, 36)**.

22. System according to any one of the claims 16 to the preceding one, wherein each planar plate **(31, 36)** of each of said modular elements **(10)** is in contact with a corresponding planar plate **(31, 36)** of the adjacent modular element **(10')**.

23. System according to any one of the claims 16 to the preceding one, wherein each of each of said modular elements **(10)** has a pair of end walls **(32, 33, 34, 35)** defining the lateral portions **(32, 33, 34, 35)** of the functional zone **(30)**.

24. System according to any one of the claims 16 to the preceding one, wherein each planar plate **(31, 36)** of each of said modular elements **(10)** is removably couplable with the corresponding plate-shaped element **(20)**.

25. System according to any one of the claims 16 to the preceding one, wherein the planar plates **(31, 36)** of said at least one pair of planar plates **(31, 36)** of each of said modular elements **(10)** are removably couplable to each other and removably couplable with the corresponding plate-shaped element **(20)**.

26. System according to any one of the preceding claims, wherein said modular

elements (10) include a plurality of service holes (75) for the passage of cables or ducts.

27. System according to the preceding claim, wherein said service holes (75) are formed in correspondence of the functional zones (30) and/or in correspondence of the plate-shaped elements (20) of said modular elements (10).

28. System according to the preceding claim, wherein the service holes (75) are formed exclusively in correspondence of the functional zones (30) of the modular elements (10), the functional zones (30) being accessible on the opposite side to said first plane (π_1) so as to allow an operator to access to said service holes (75) without disassembling the structure (1).

29. System according to the preceding claim, wherein the functional zone (30) of each of said modular elements (10) includes at least one recess (76) susceptible to couple with the at least one recess (76') of the adjacent modular element (10') to define said service holes (75).

30. System according to the preceding claim, wherein said at least one recess (76) has a semicircular, "U" or "V" shape.

31. System according to claim 29 or 30, wherein said at least one recess (76) is formed in correspondence of the side portions (32, 33, 34, 35) of the functional zone (30) of each of said modular elements (10).

32. System according to claim 29 or 30, wherein said at least one recess (76) is formed in correspondence of the end walls (32, 33, 34, 35) of each planar plate (31, 36) of each of said modular elements (10).

33. System according to claim 29 or 30, wherein said at least one recess (76) is formed in correspondence of each side face (12) of each of said modular elements (10).

34. System according to any one of the claims 26 to the preceding one, wherein said anchoring means (50) include perforated anchoring members (51) to reciprocally anchor two adjacent modular elements (10, 10'), each of said perforated anchoring members (51) having an aperture (58) at a corresponding service hole (75).

35. System according to any one of the claims 29 to the preceding one, wherein each of said perforated anchoring members (51) has the aperture (58) in correspondence of two adjacent recesses (76, 76').

36. System according to claim 34 or 35, wherein each of said perforated anchoring

members (51) has a first portion (56) at the functional zone (30) of a modular element (10) and a second portion (57) at the functional zone (30') of the adjacent modular element (10').

37. System according to any one of the preceding claims, wherein said anchoring means (50) are of the removable type.

38. System according to any one of the preceding claims, wherein said anchoring means (50) and said modular elements (10) are reciprocally configured so that the same anchoring means (50) once mounted are all accessible for the removal without decoupling the modular elements (10) each other, so as to allow an operator to remove from the structure (1) one or more central modular elements (10) without the need to act on the peripheral modular elements (10).

39. System according to any one of the preceding claims, wherein each of said modular elements (10) includes a respective first seat (40) to seat at least one portion (64) of said anchoring means (50).

40. System according to the preceding claim, wherein said first seat (40) is at least partially open to allow the insertion/the removal of said anchoring means (50) in/from said first seats (40).

41. System according to claim 39 or 40, wherein said first seats (40) are arranged at said first plane (π_1) and/or at said second plane (π_2).

42. System according to any one of the preceding claims, wherein said anchoring means (50) include a plurality of first elongated anchoring members (61) each defining a respective first axis (X').

43. System according to the preceding claim, wherein said first elongated anchoring members (61) are mountable on said modular elements (10) once the latter (10) have been previously coupled.

44. System according to any one of the claims 39 to the preceding one, wherein said seats (40) are configured and/or arranged so that said first axes (X') lay on said second plane (π_2) and/or said first plane (π_1).

45. System according to claim 42, 43 or 44, wherein said first elongated anchoring members (61) are of the removable type.

46. System according to the preceding claim, wherein said first seats (40) are accessible in correspondence of said at least one of said first plane (π_2) and/or said second

plane (π_2) to allow the insertion/the removal of the first elongated anchoring members (61) in/from said seats (40) without decoupling the modular elements (10) each other.

47. System according to any one of the claims 39 to the preceding one, wherein each of said first seats (40) is defined by at least one longitudinal channel (42) having a generally "U" shape section open in correspondence of said second plane (π_2) and/or said first plane (π_1) to allow the insertion/the removal of said first elongated anchoring members (61).

48. System according to any one of the claims 39 to the preceding one, wherein each of said first elongated anchoring members (61) has respective ends (62, 63) at the first seats (40, 40') of two different modular elements (10, 10'), the latter being preferably adjacent to each other.

49. System according to any one of the claims 39 to the preceding one, wherein the first elongated anchoring members (61) and said first seats (40) are reciprocally configured so that each of the ends (62, 63) of said first elongated anchoring members (61) is at the central zone (39) of said functional zone (30) and/or of said plate-shaped element (20).

50. System according to any one of the claims 42 to the preceding one, wherein each modular element (10) is coupled to a plurality of adjacent modular elements (10', 10'', 10''', 10''') by at least one of said first elongated anchoring members (61).

51. System according to any one of the preceding claims, wherein said first elongated anchoring members (61) are grouped in a first set of first elongated anchoring members having respective first axes (X', X'', X'''...) substantially parallel each other and in a second set of first elongated anchoring members (61) having respective second axes (Y', Y'', Y'''...) substantially parallel each other.

52. System according to the preceding claim, wherein said first axes (X', X'', X'''...) and second axes (Y', Y'', Y'''...) lay on said second plane (π_2) and/or on said first plane (π_1).

53. System according to the claim 51 or 52, wherein said first axes (X', X'', X'''...) and second axes (Y', Y'', Y'''...) are substantially transverse to each other, preferably substantially perpendicular to each other.

54. System according to any one of the claims 39 to the preceding one, wherein each of the first seats (40) of each modular element (10) has in said central zone (39) at least one housing (41) for the end (62, 63) of the respective first elongated anchoring member

61).

55. System according to any one of the claims 42 to the preceding one, wherein said first elongated anchoring members (61) act in correspondence of one of said first plane (π_1) and said second plane (π_2).

56. System according to the preceding claim, wherein said first elongated anchoring members (61) act in correspondence of one of said first plane (π_1) and said second plane (π_2) so as to effectively counteract the tensile stresses that develop within the structure as a result of a load acting on said first plane (π_1) and/or on said second plane (π_2).

57. System according to claims 55 or 56, wherein said anchoring means (50) further including second elongated anchoring members (67) acting in correspondence of the other of said first plane (π_1) and said second plane (π_2), each of said second elongated anchoring members (67) defining a respective third axis (X_1').

58. System according to the preceding claim, wherein each of said second elongated anchoring members (67) connected each other at least two modular elements (10, 10'), preferably adjacent to each other.

59. System according to claim 57 or 58, wherein said first axis (X') and said third axis (X_1') are substantially parallel.

60. System according to claim 57, 58 or 59, wherein each of said modular elements (10) includes a second seat (43) to seat at least one portion of said second elongated anchoring members (67), said second seat (43) at the opposite side with respect to said first seat (40).

61. System according to the preceding claim, wherein each of said second seats (43) of each modular element (10) is at least partially open to allow the insertion/the removal of said second elongated anchoring members (67) therein/therefrom.

62. System according to claim 60 or 61, wherein each of said second seats (43) of each modular element (10) has at least one second housing (44) for the ends (68, 69) of the respective second elongated anchoring member (67).

63. System according to any one of the claims 57 to the preceding one, wherein said second elongated anchoring members (67) are grouped in a third set defining third axes ($X_1', X_1'', X_1'''...$) substantially parallel each other and in a fourth set defining fourth axes ($Y_1', Y_1'', Y_1'''...$) substantially parallel each other, said third axes ($X_1', X_1'', X_1'''...$) and fourth axes

(Y_1' , Y_1'' , Y_1''' ...) being substantially transversal to each other and preferably perpendicular to each other.

64. System according to any one of the preceding claims, wherein said third axes (X_1' , X_1'' , X_1''' ...) and fourth axes (Y_1' , Y_1'' , Y_1''' ...) define a respective third plane (π_5) and fourth plane (π_6) substantially parallel or coincident each other, said third plane (π_5) and fourth plane (π_6) being substantially parallel or coincident with one of said first plane (π_1) and second plane (π_2) and being spaced apart from the other of said first plane (π_1) and said second plane (π_2).

65. System according to the preceding claim, wherein said first axes (X' , X'' , X''' ...) and second axes (Y' , Y'' , Y''' ...) are spaced apart from said third axes (X_1' , X_1'' , X_1''' ...) and fourth axes (Y_1' , Y_1'' , Y_1''' ...).

66. System according to any one of the preceding claims, wherein said modular elements (10) and said anchoring means (50) are reciprocally coupled each other so as to withstand to the compressive, tensile and shear stresses imparted by a load acting on the structure (1).

67. System according to any one of the preceding claims, wherein said anchoring means (50) promote the reciprocal cooperation of the plate-shaped elements (20) and the functional zones (30) of the modular elements (10).

68. A modular kit for the dry building of building or nonbuilding structures (1), such as walls, floors, balconies, roofs or the like, comprising:

- a plurality of modular elements (10);
- means for reciprocally anchoring (50) said modular elements (10);

wherein each of said modular elements (10) includes:

- a plate-shaped element (20) which includes at least one upper or lower substantially planar wall (11);
- at least one side face (12) having a first end edge (13) in correspondence with said at least one substantially planar upper or lower wall (11) and a second end edge (14) opposite to the first one (13);
- a functional zone (30) transversely projecting from said plate-shaped element (20) that includes said second end edge (14);

wherein the plate-shaped elements (20) and the functional zones (30) of the

anchored modular elements (10) are susceptible to cooperate each other so that:

- the substantially planar walls (11) of the the plate-shaped elements (20) define a first plane (π_1) substantially parallel to or coinciding with the plane (π) of the structure (1) to be built; and
- said at least one side face (12) of each modular element (10) remains faced to a corresponding at least one side face (12') of the adjacent modular element (10').

69. Kit according to the preceding claim, wherein said modular elements (10) and/or said anchoring means (50) have one or more of the features according to one or more of the claims 2 to 67.

70. A modular element to be used with other modular elements and with anchoring means (50) for the dry building of building or nonbuilding structures (1) according to one or more of the preceding claims, comprising:

- a plate-shaped element (20) which includes at least one upper or lower substantially planar wall (11);
- at least one side face (12) having a first end edge (13) in correspondence with said at least one substantially planar upper or lower wall (11) and a second end edge (14) opposite to the first one (13);
- a functional zone (30) transversely projecting from said plate-shaped element (20) that includes said second end edge (14).



71. Modular element according to the preceding claim, wherein said modular elements (10) and/or said anchoring means (50) have one or more of the features according to one or more of the claims 2 to 67.

72. A method for the dry building of building or nonbuilding structures (1), such as walls, floors, balconies, roofs or the like, comprising the steps of:




- providing a plurality of modular elements (10), each including:
 - a plate-shaped element (20) which includes at least one upper or lower substantially planar wall (11);
 - at least one side face (12) having a first end edge (13) in correspondence with said at least one substantially planar upper or lower wall (11) and a second end edge (14) opposite to the first one (13);
 - a functional zone (30) transversely projecting from said plate-shaped






element (20) that includes said second end edge (14);

- reciprocally anchoring said modular elements (10) so that the plate-shaped elements (20) and the functional zones (30) thereof (10) cooperate to each other, so that the substantially planar walls (11) of the the plate-shaped elements (20) define a first plane (π_1) substantially parallel to or coinciding with the plane (π) of the structure (1) to be built; and so that said at least one side face (12) of each modular element (10) remains faced to a corresponding at least one side face (12') of the adjacent modular element (10').

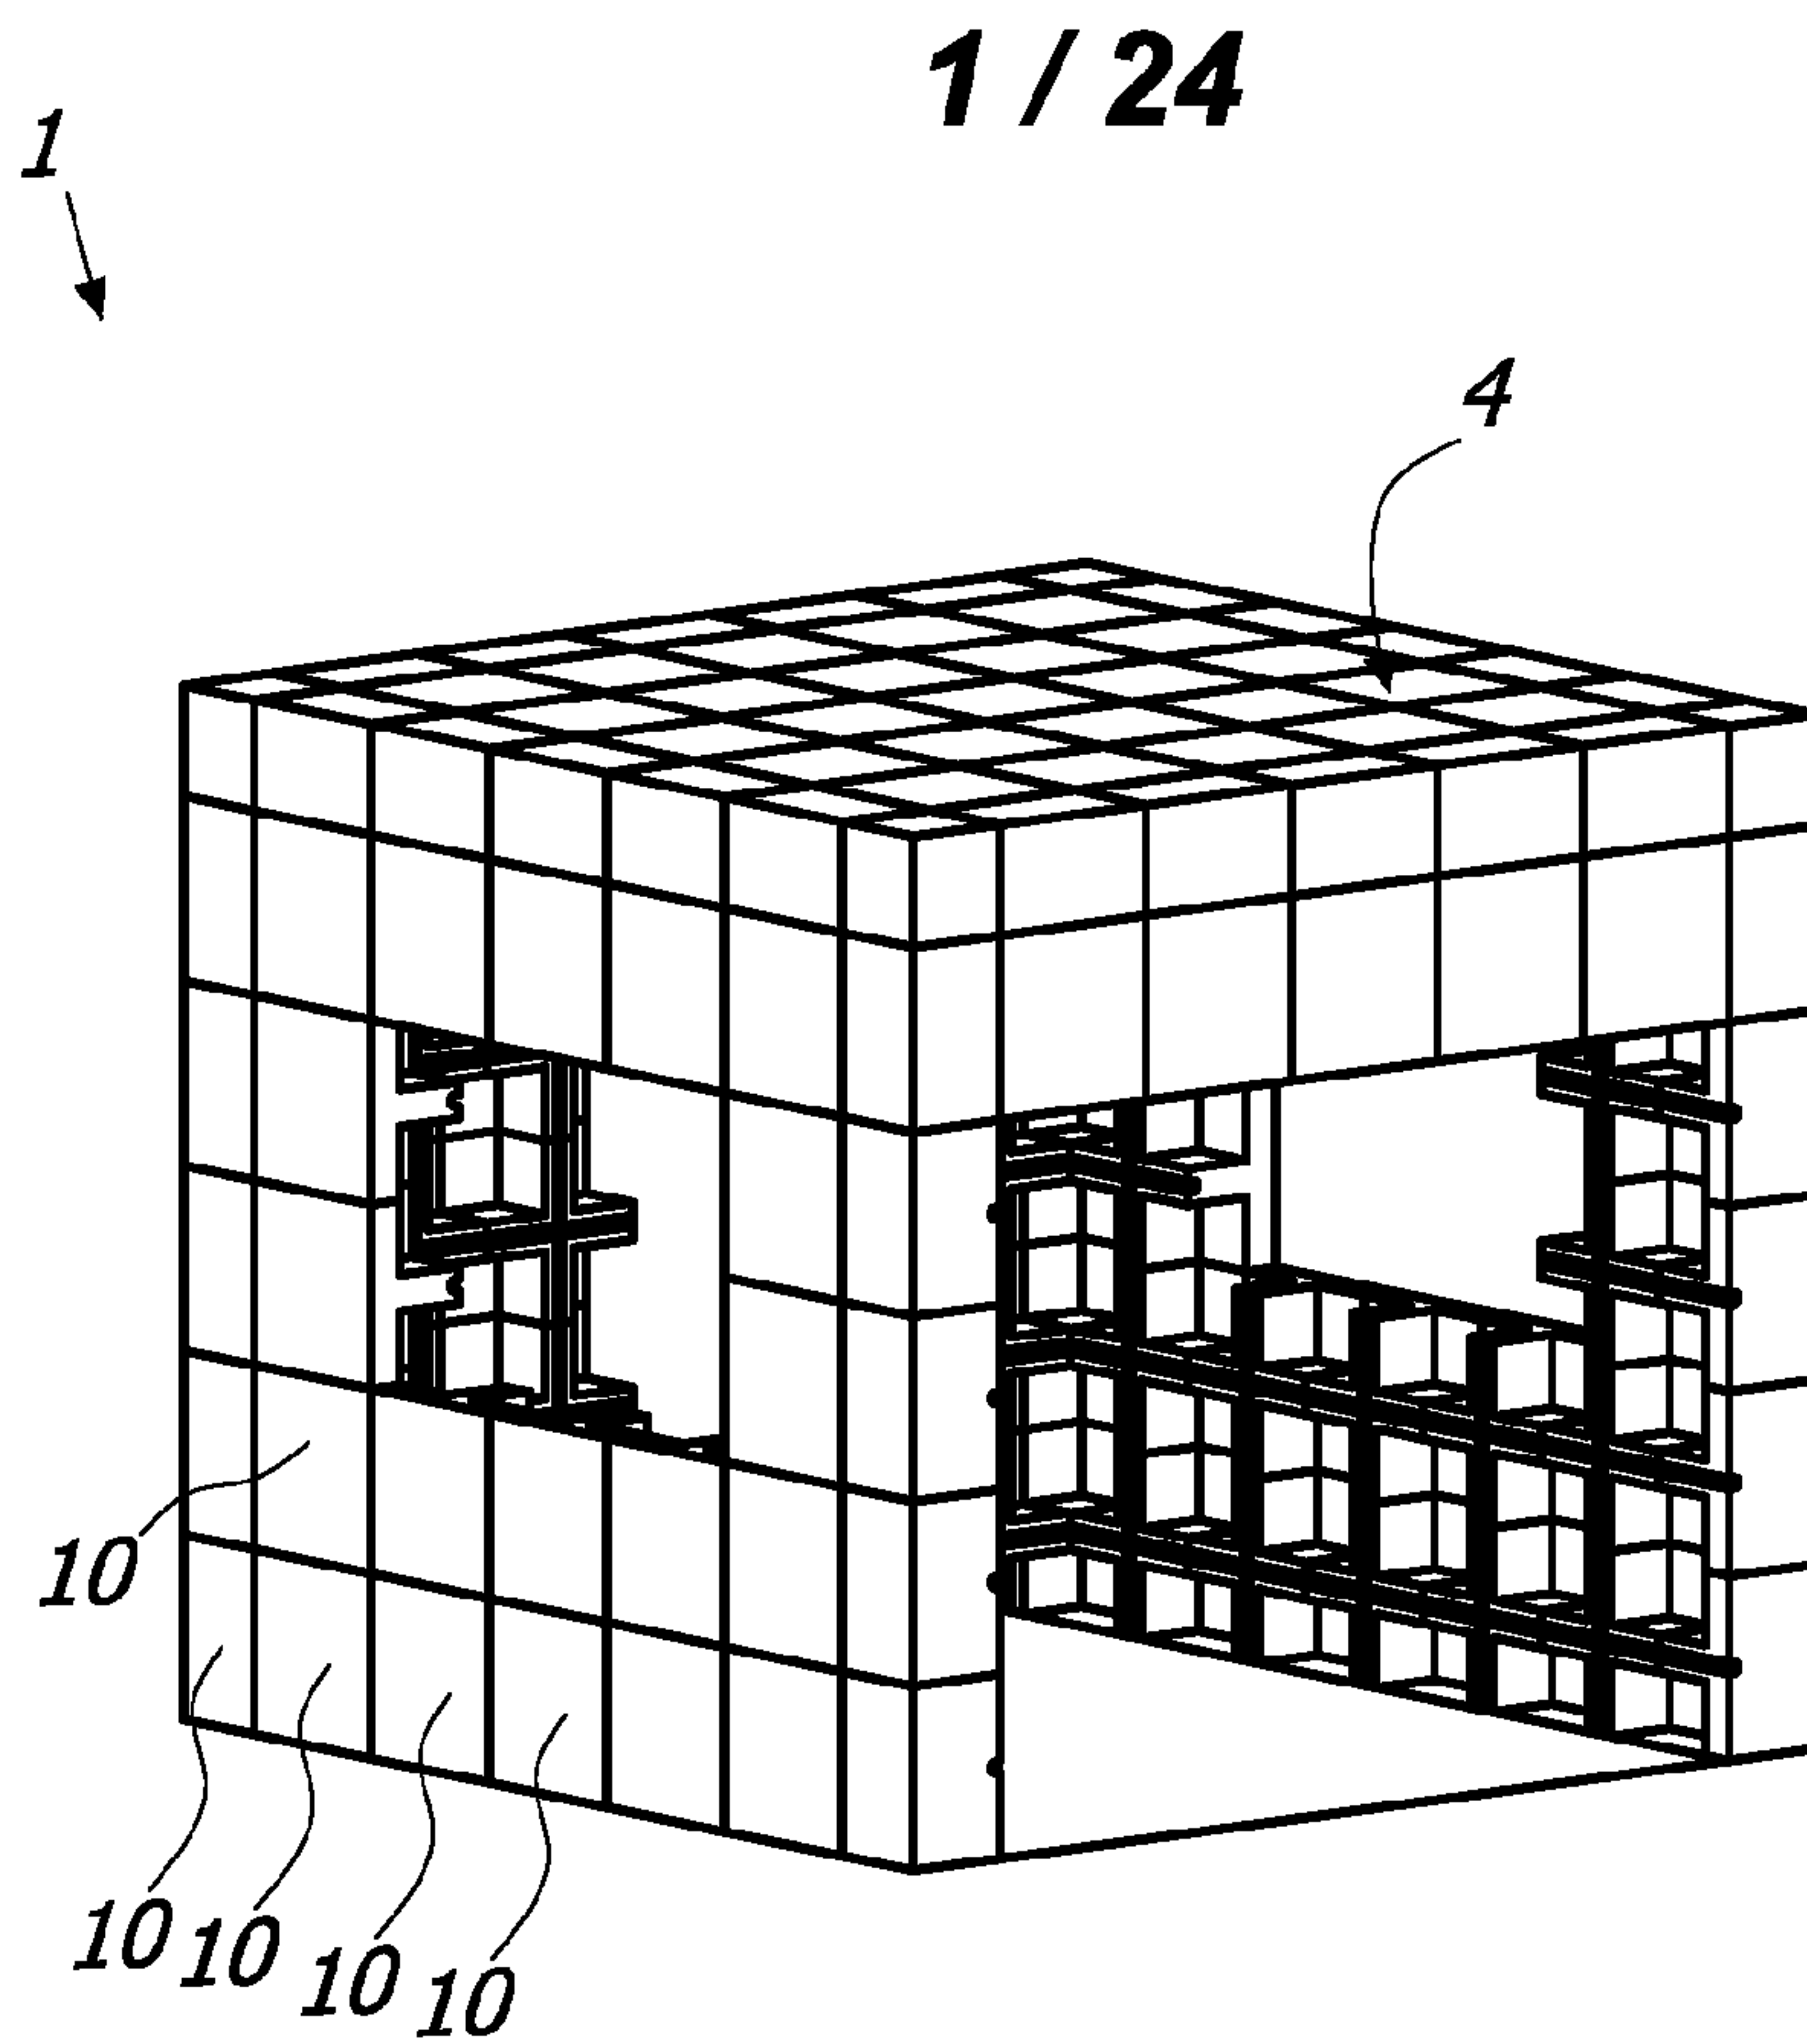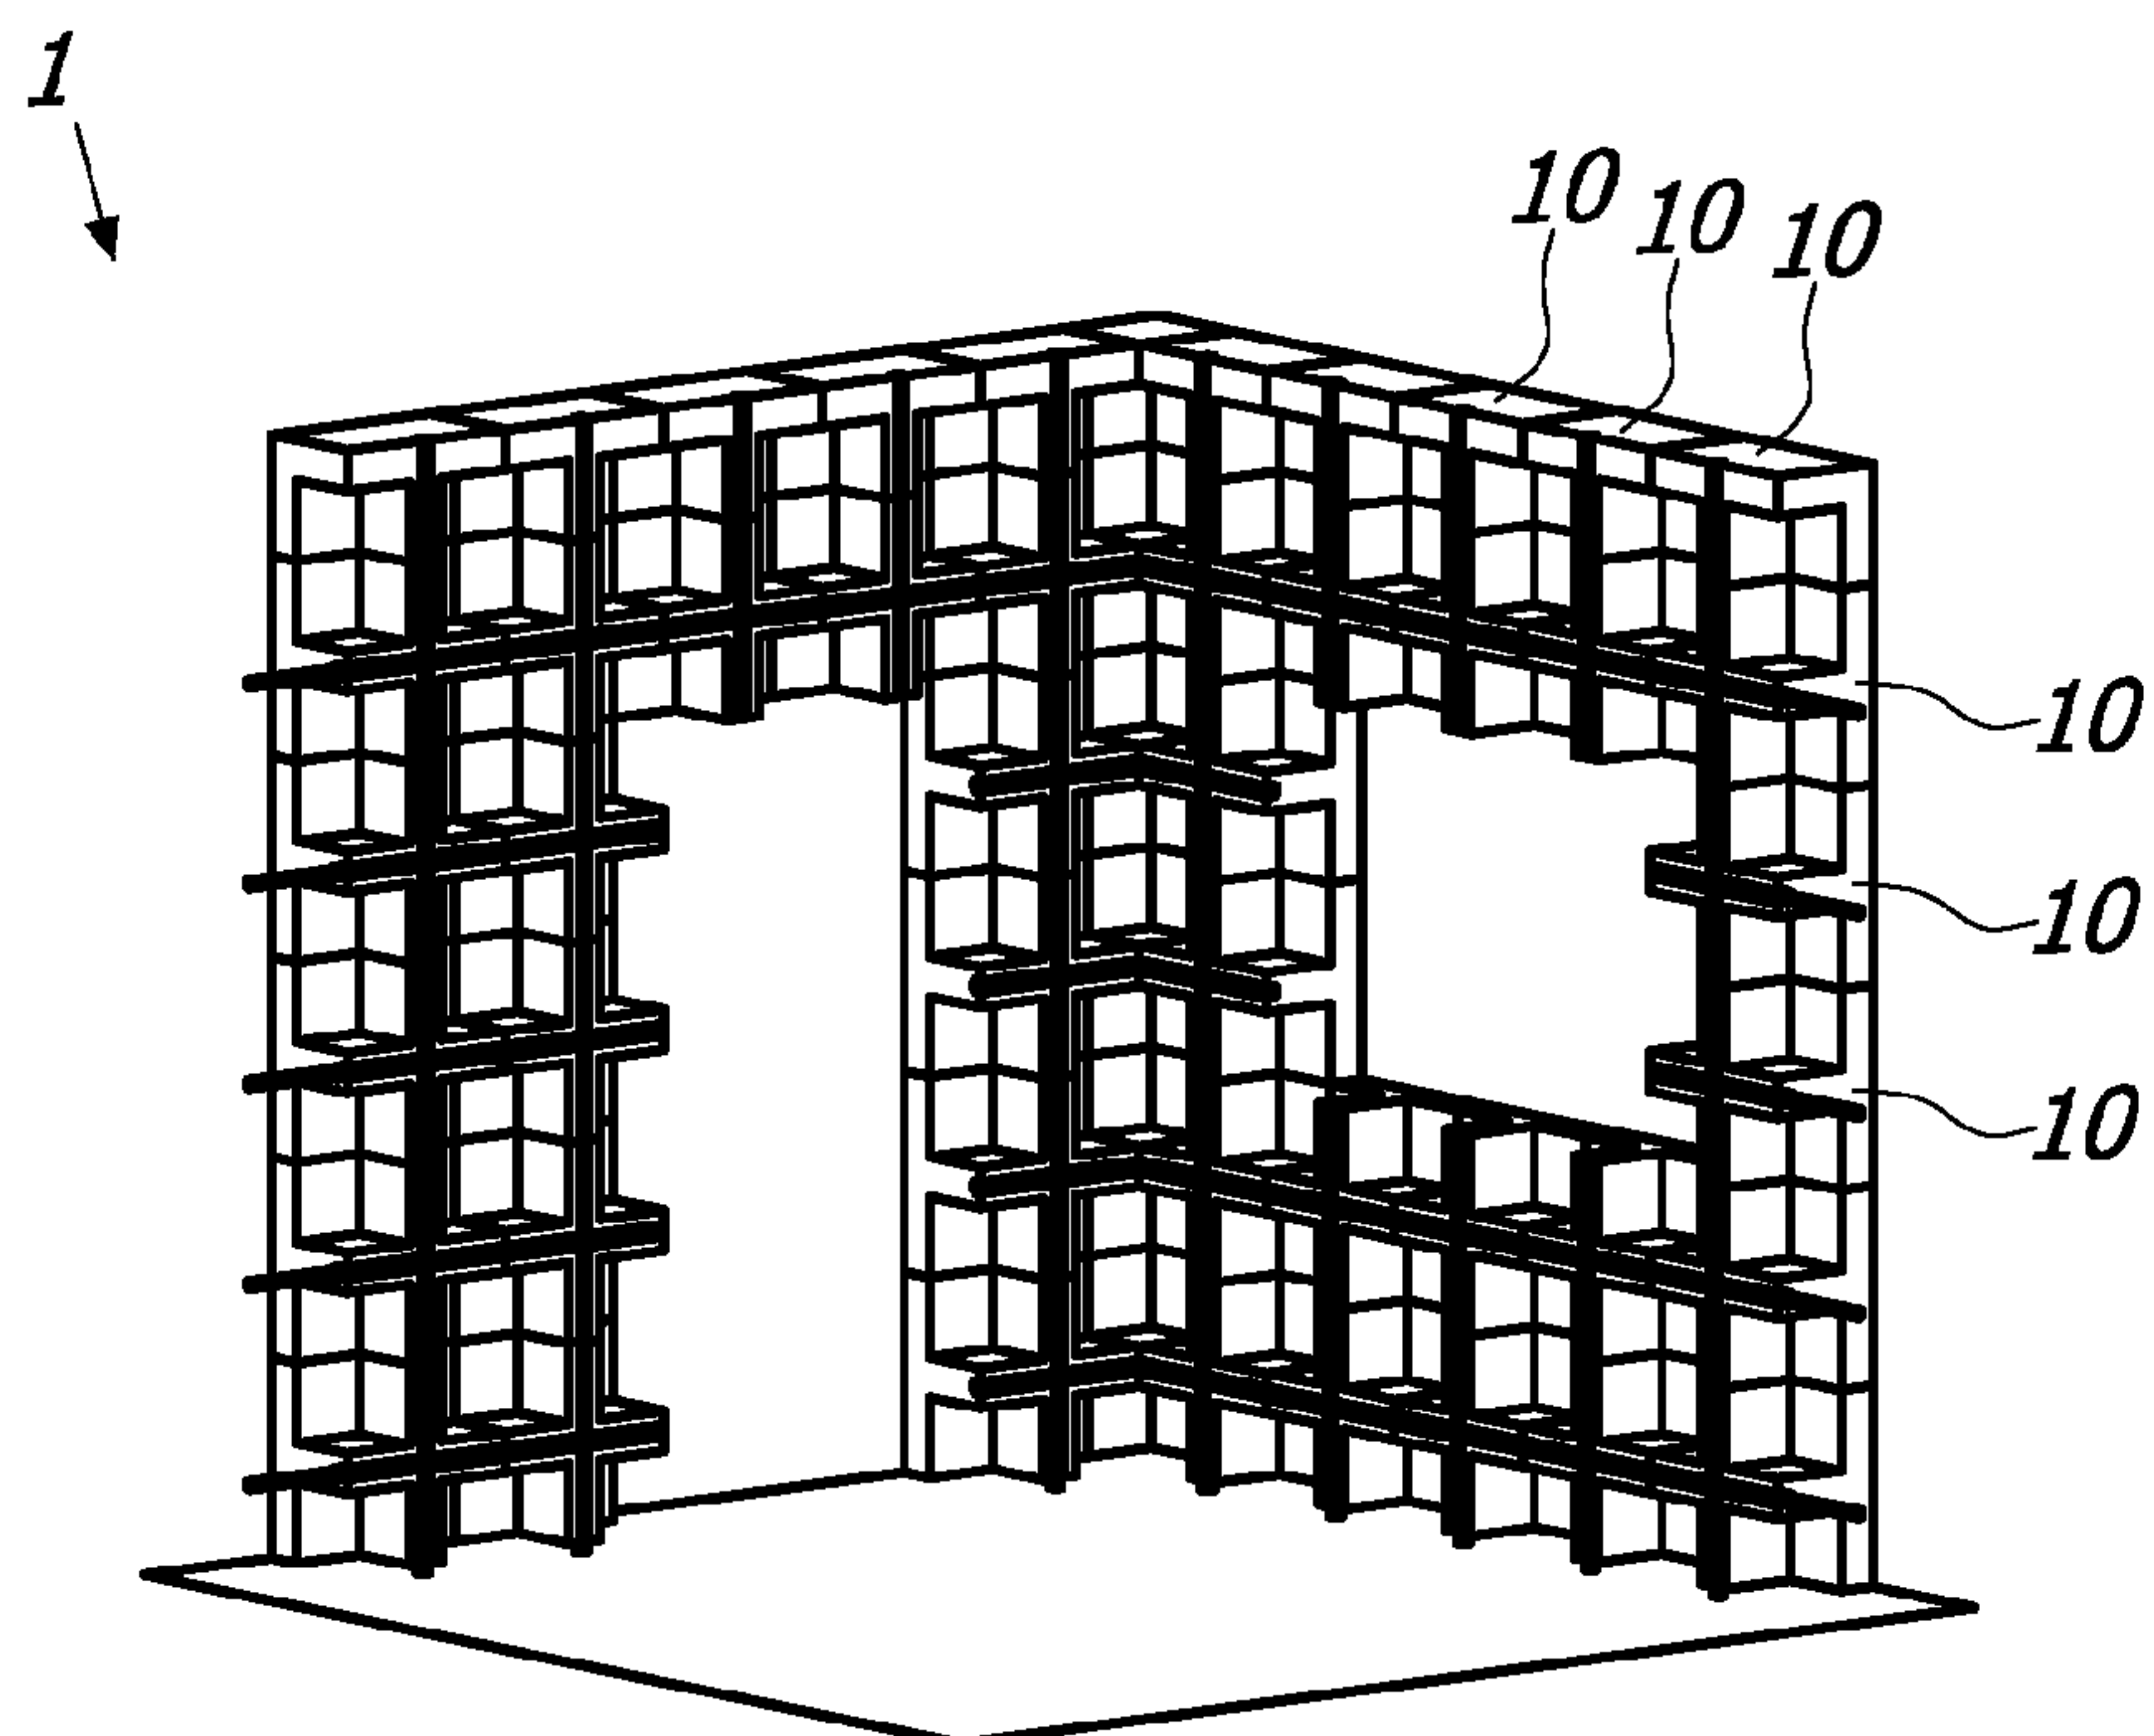**FIG. 1****FIG. 2**

2 / 24

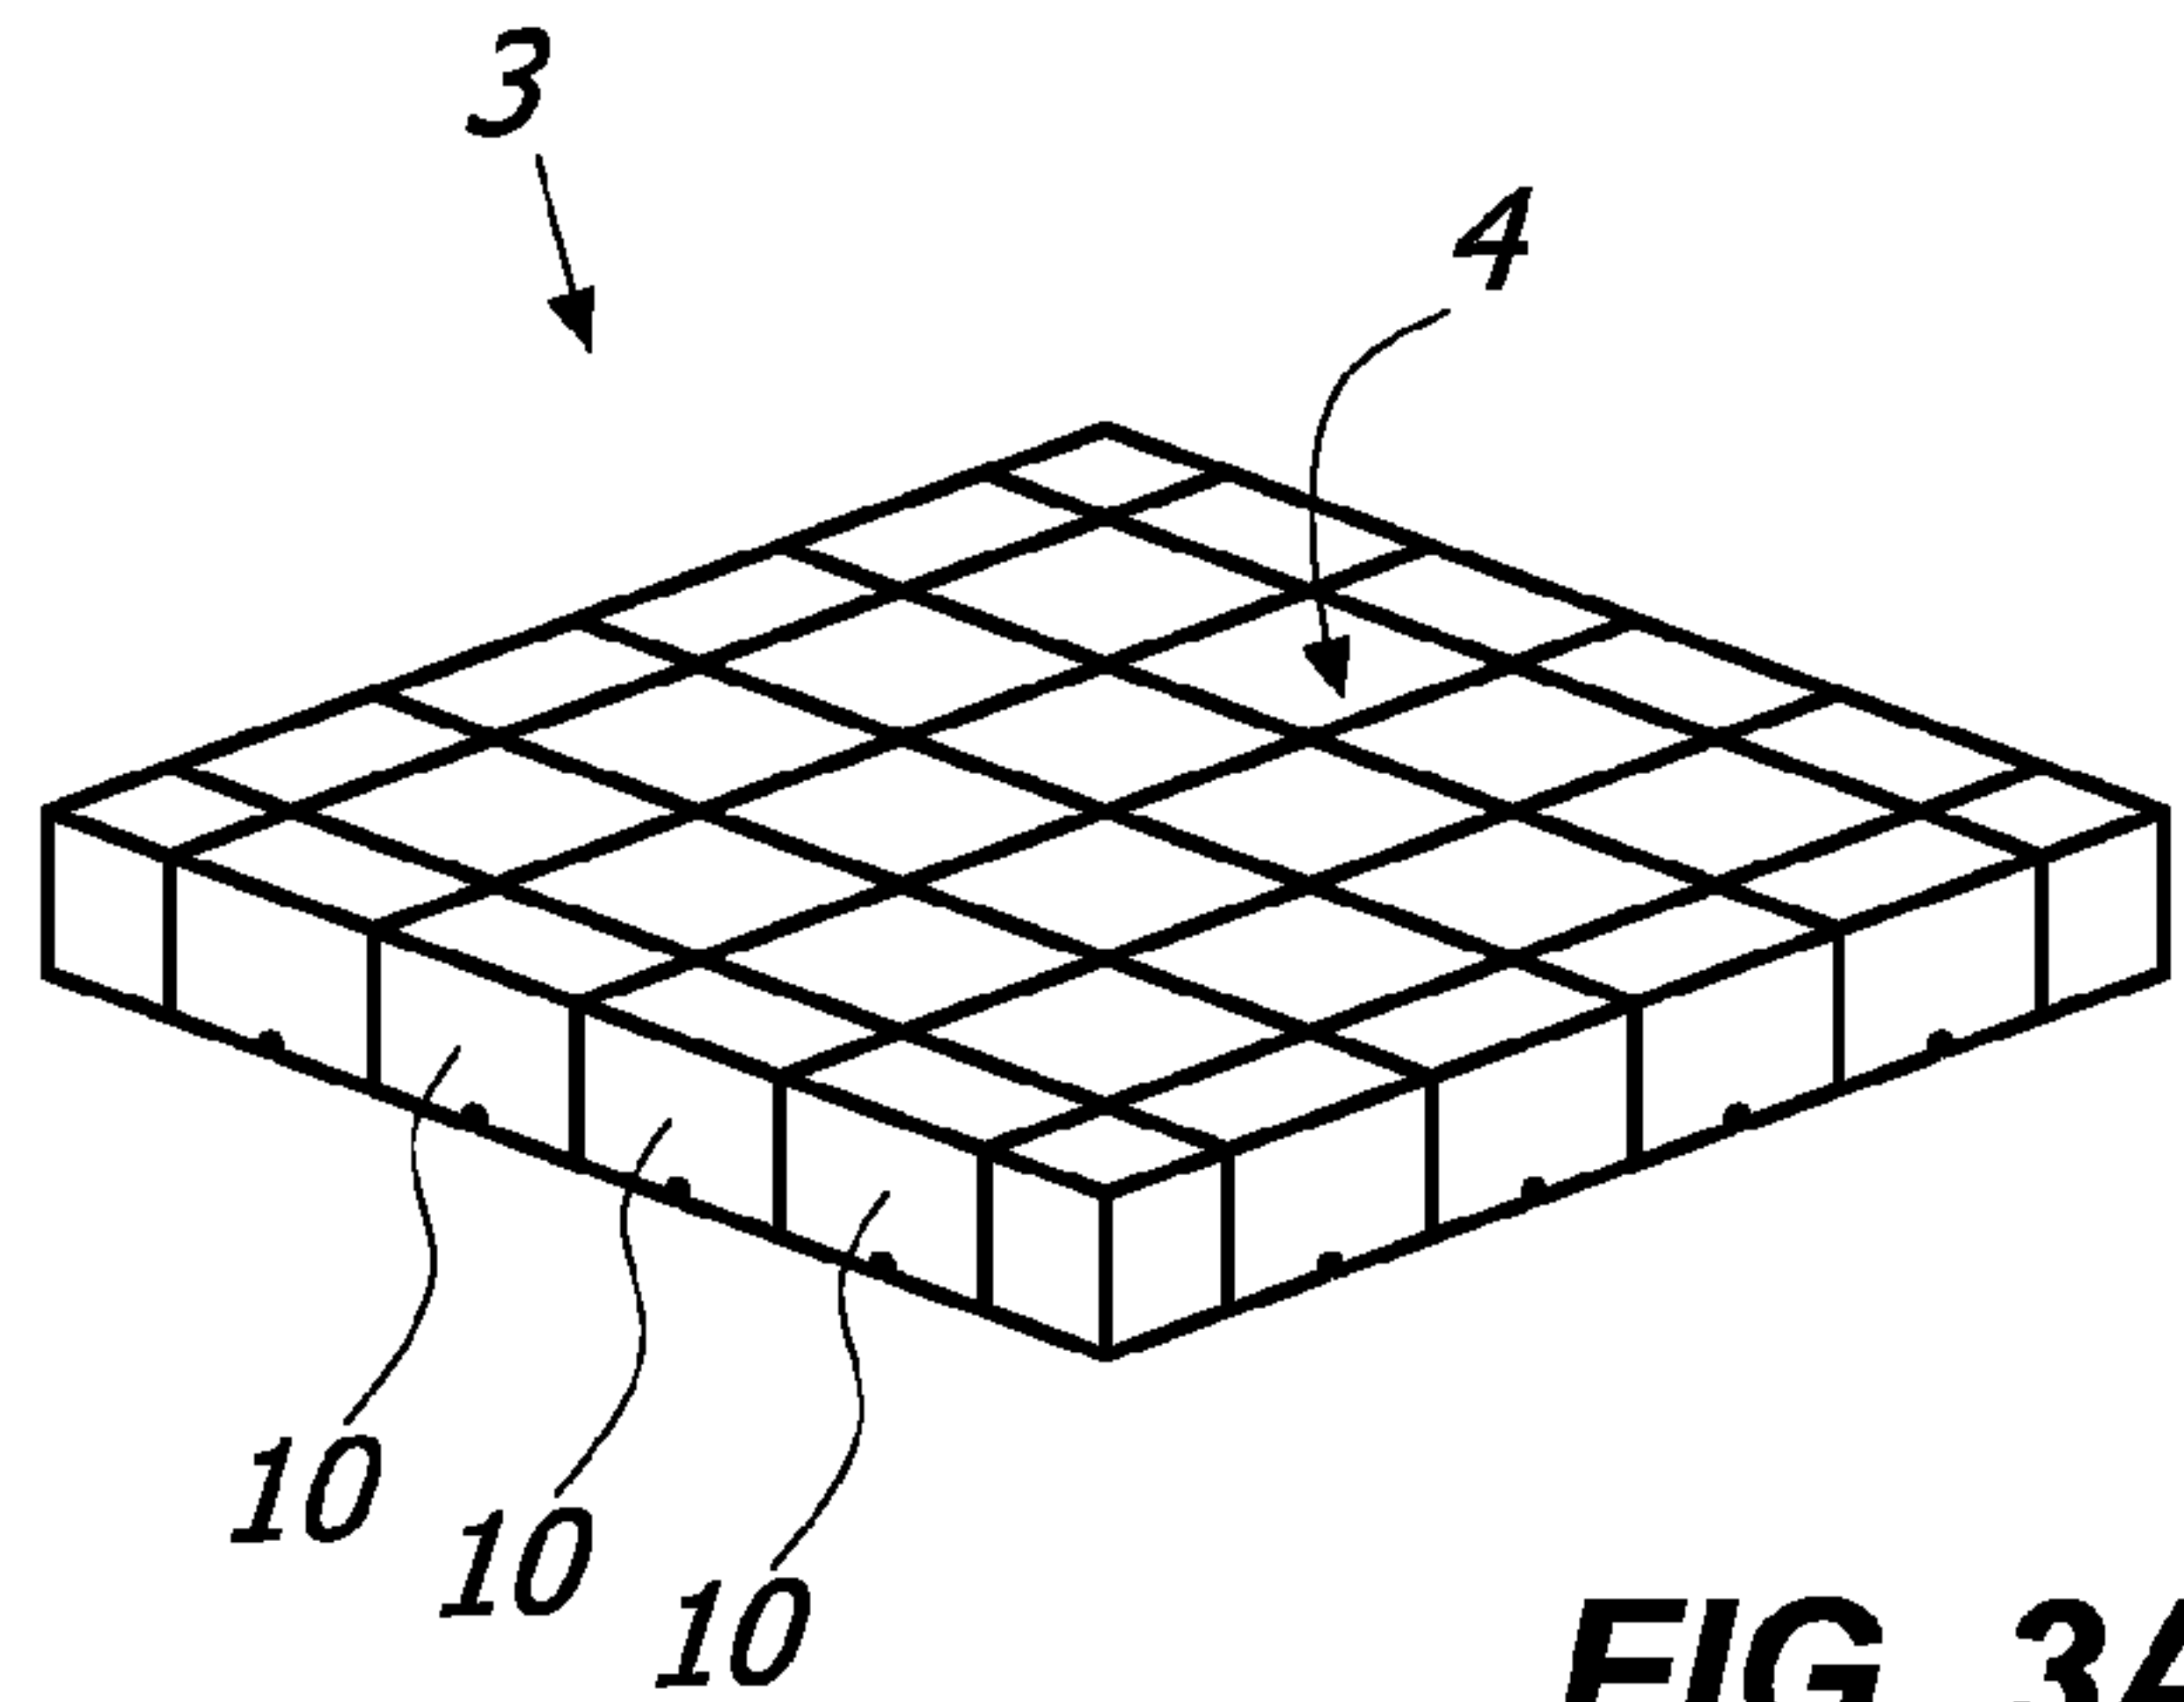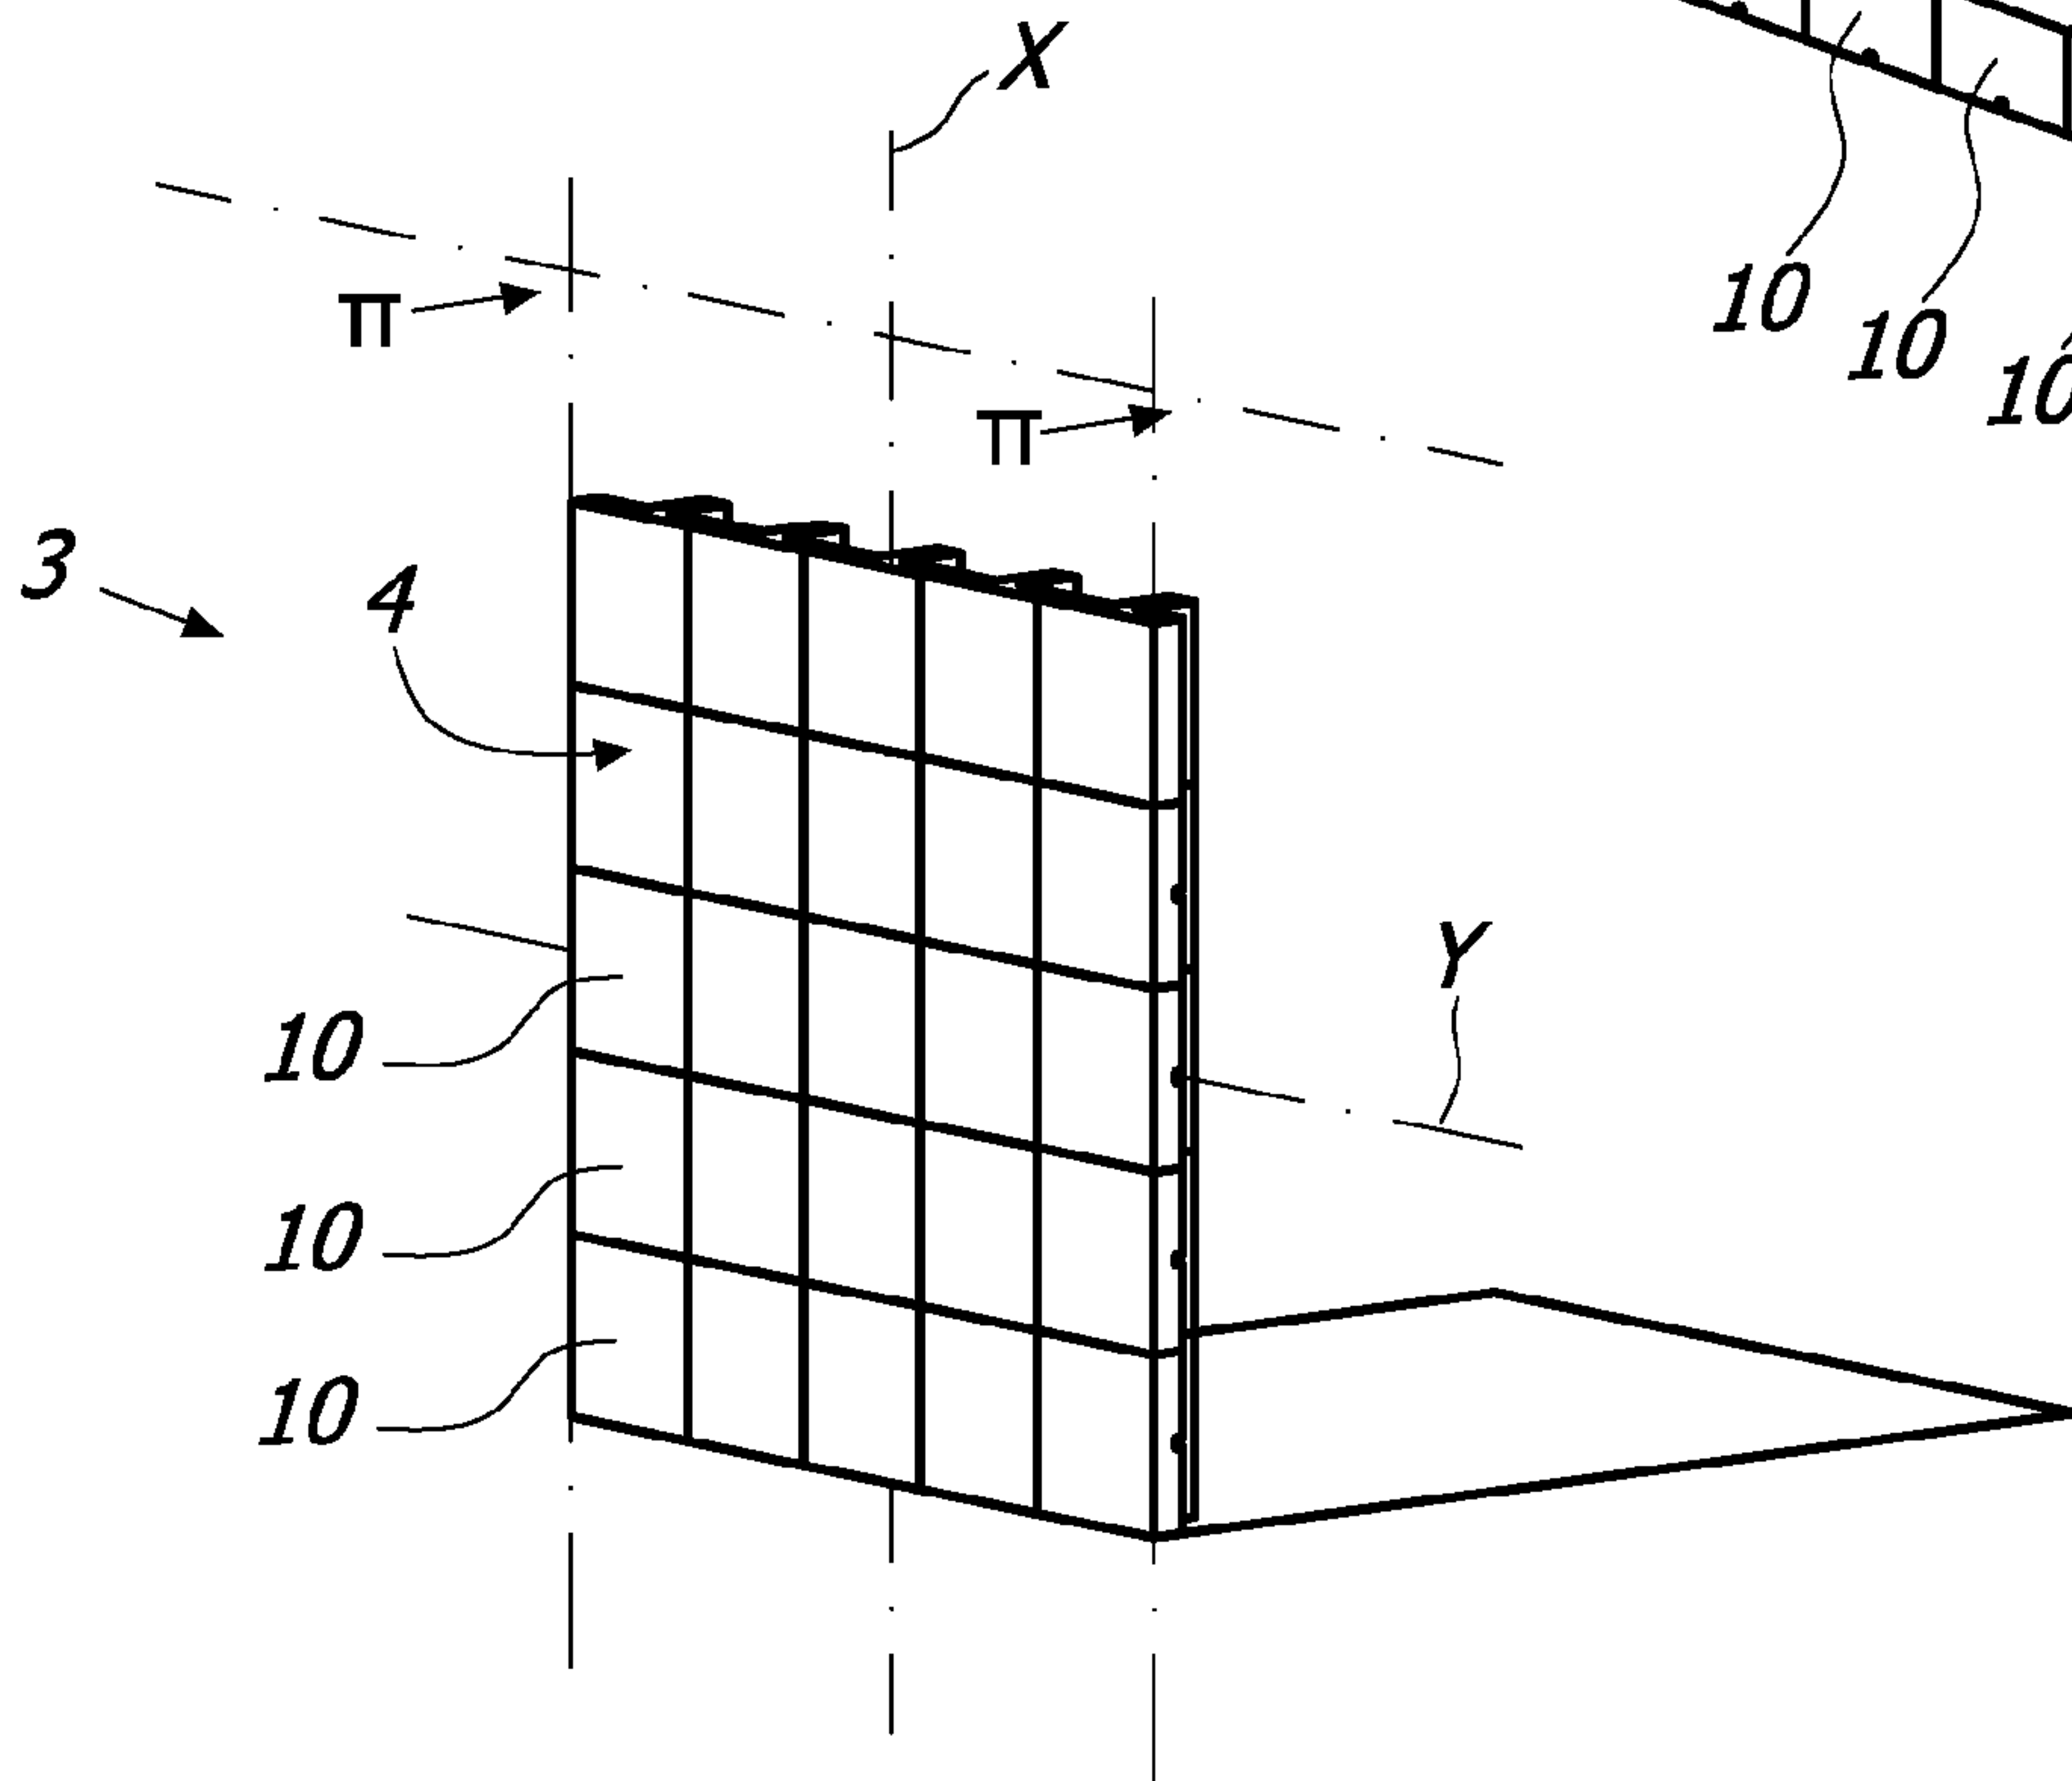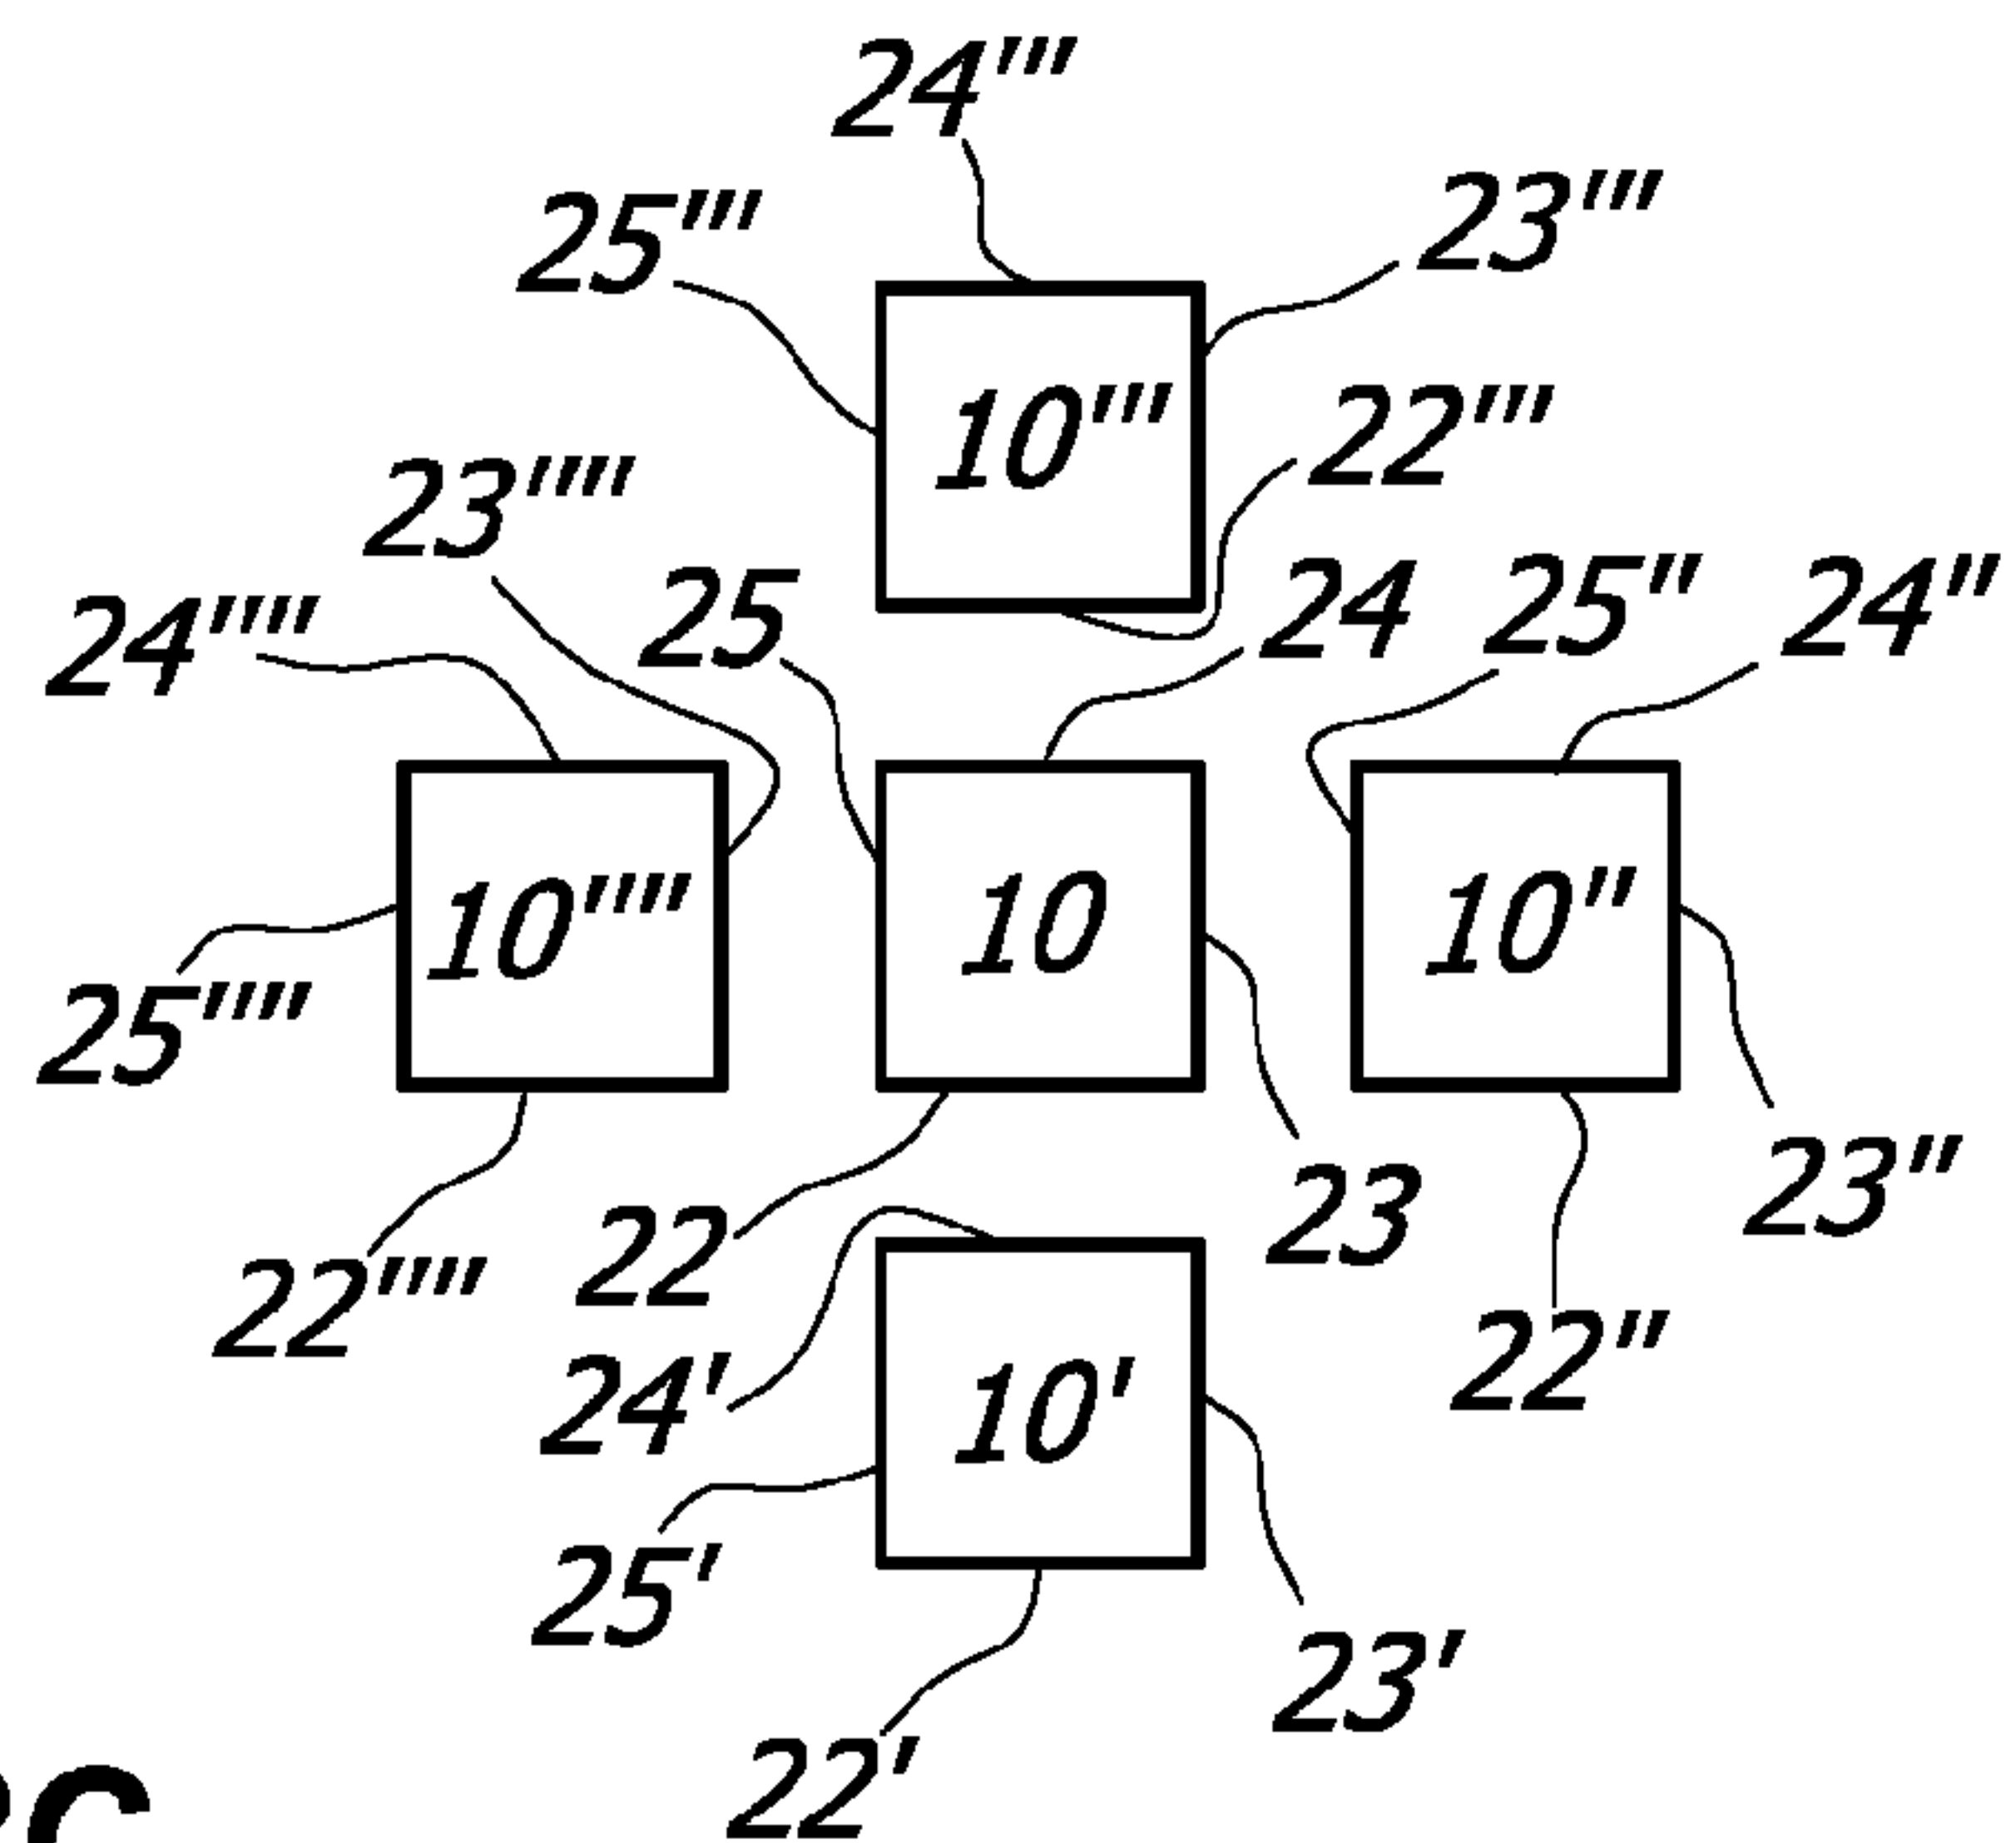**FIG. 3A****FIG. 3B****FIG. 3C**

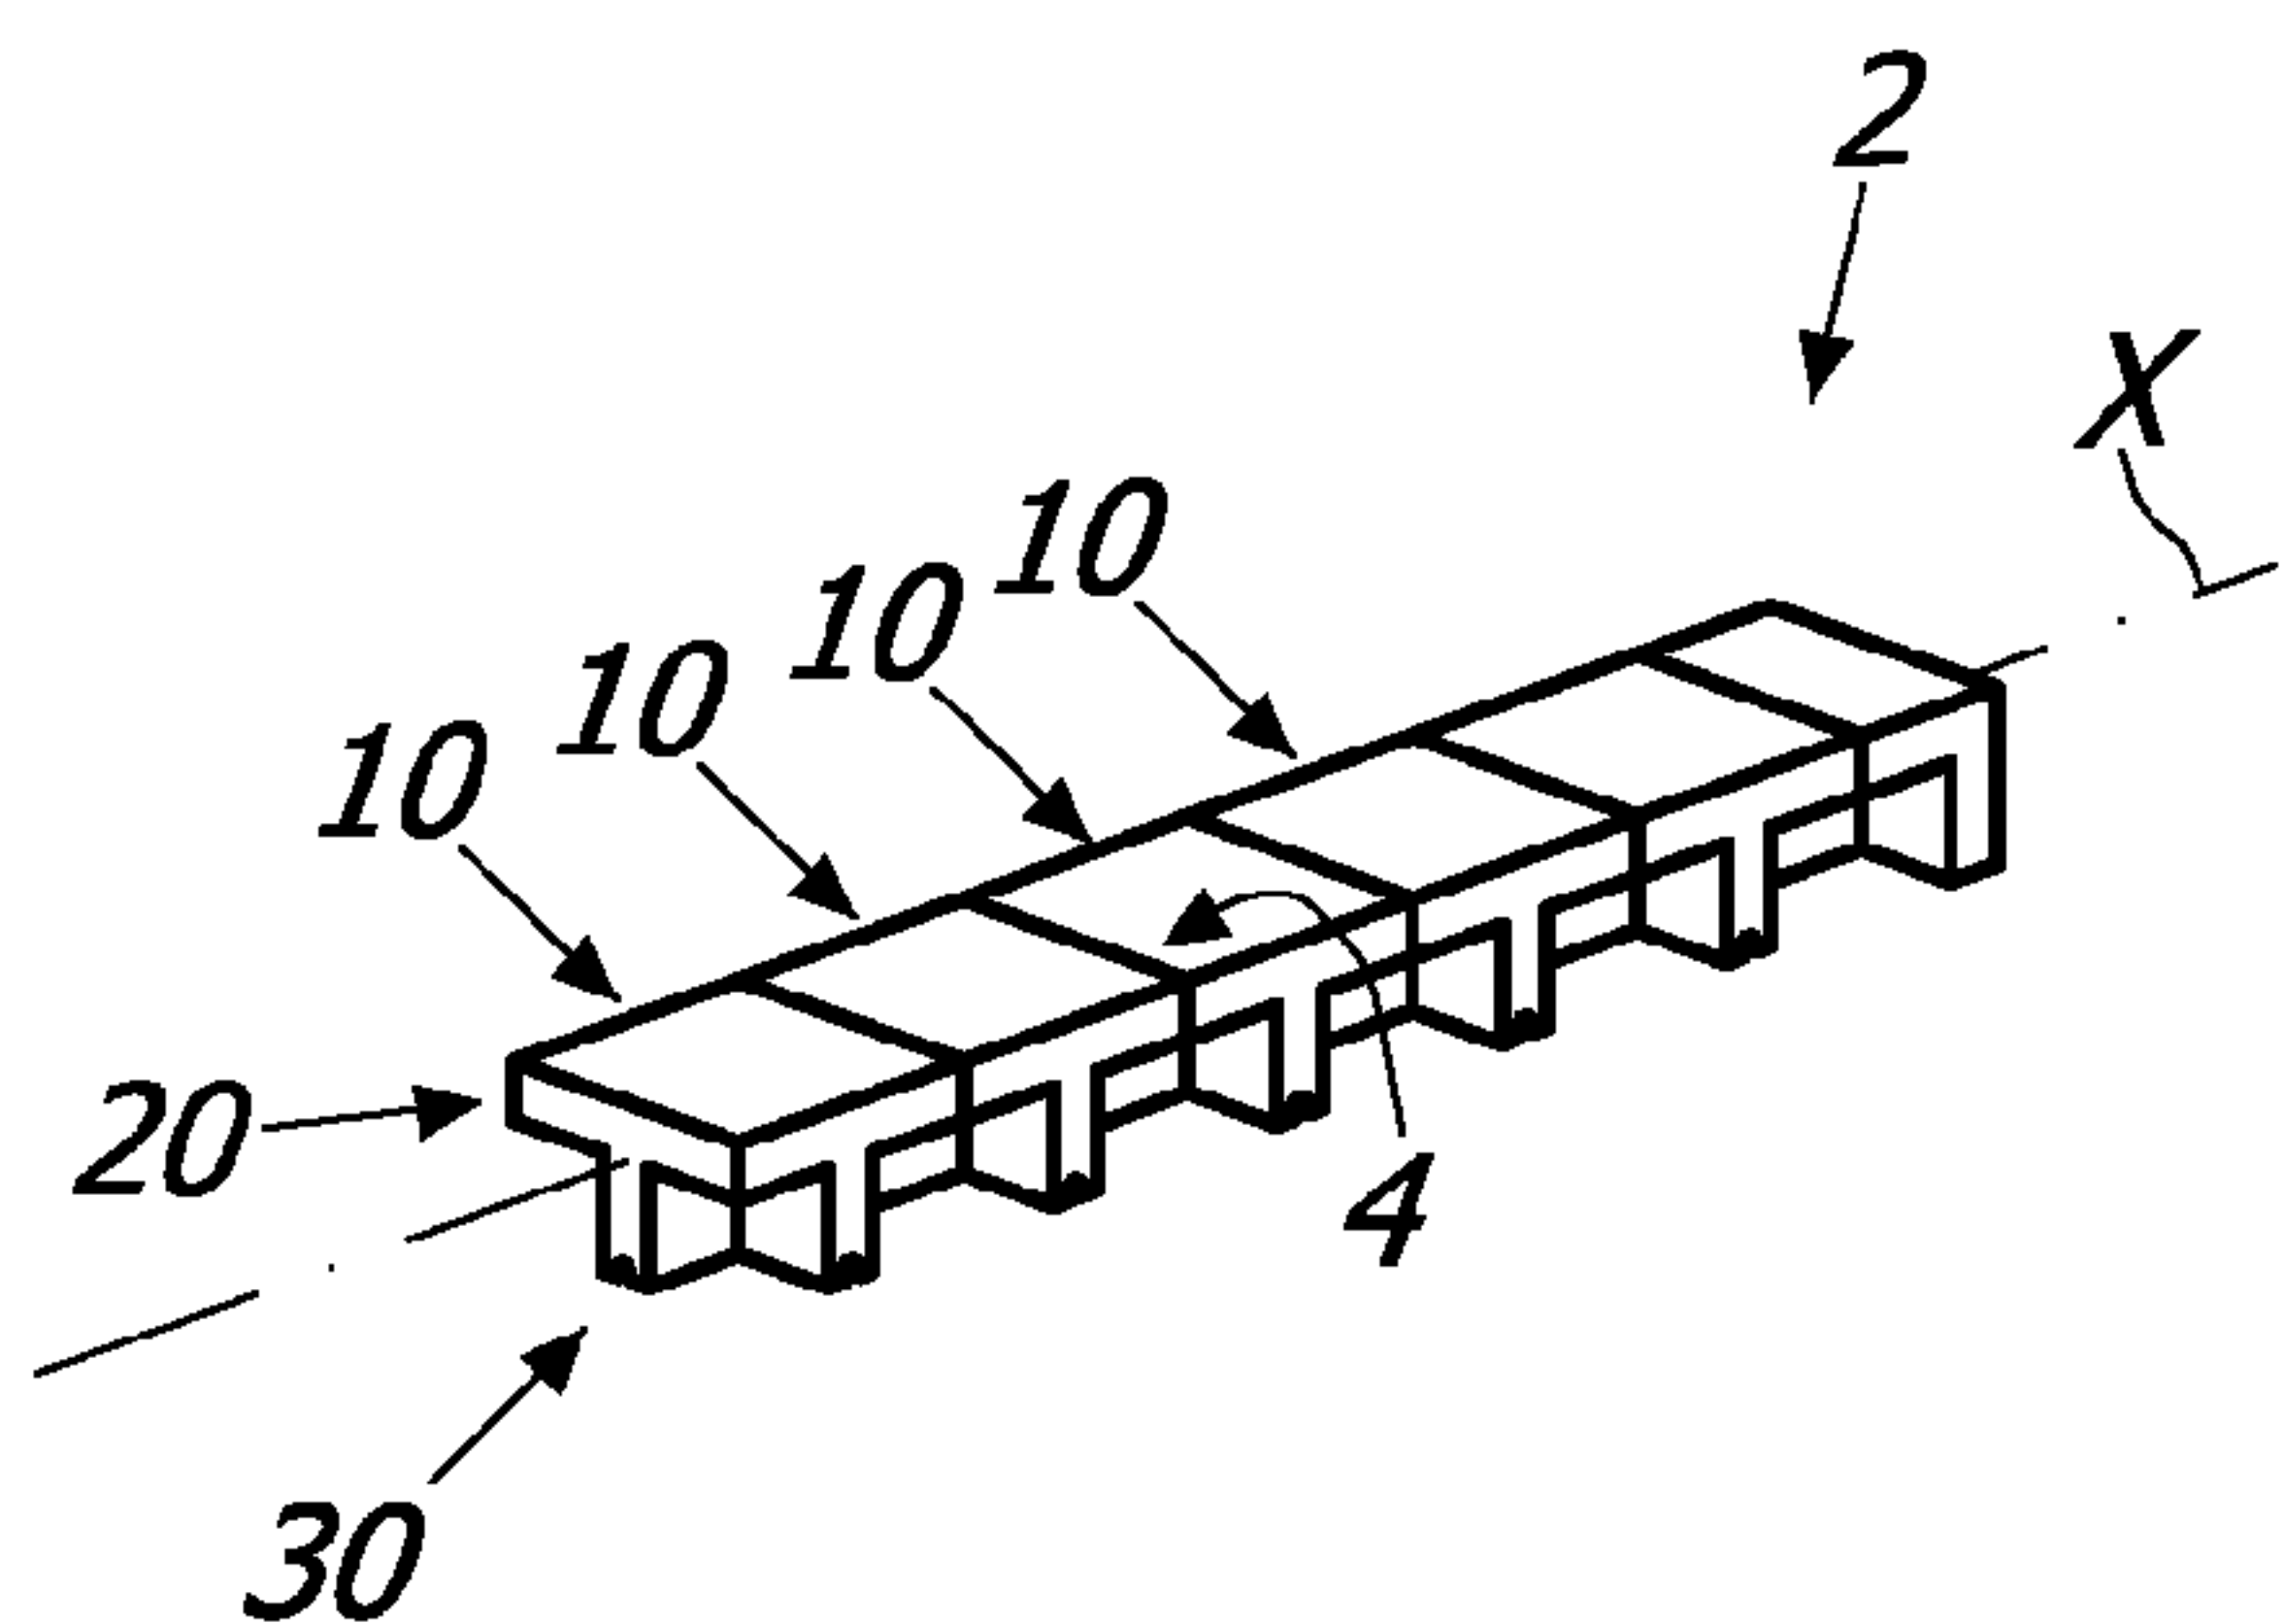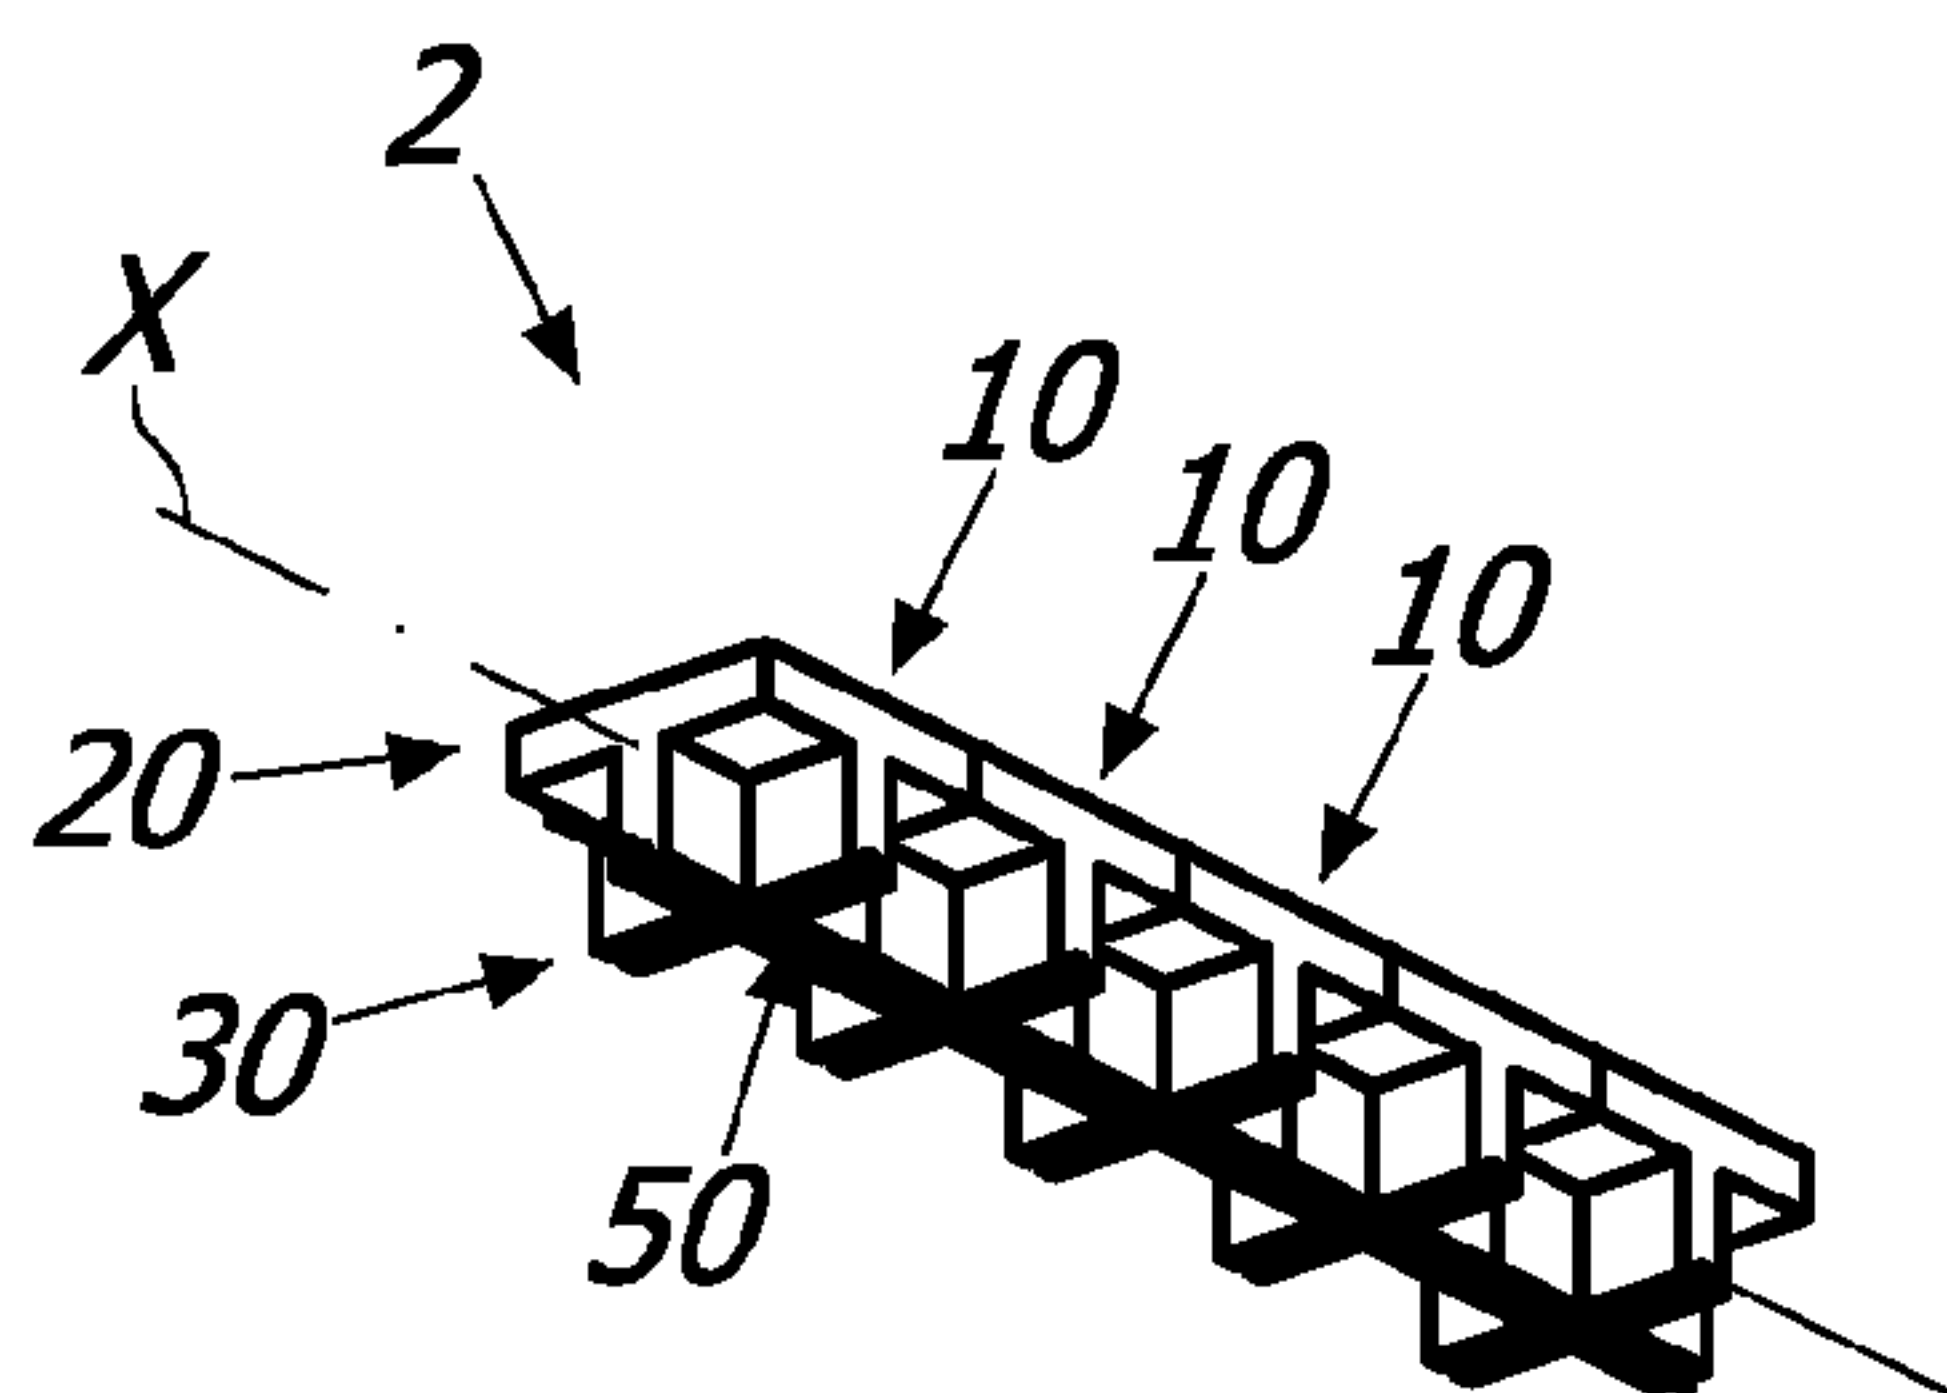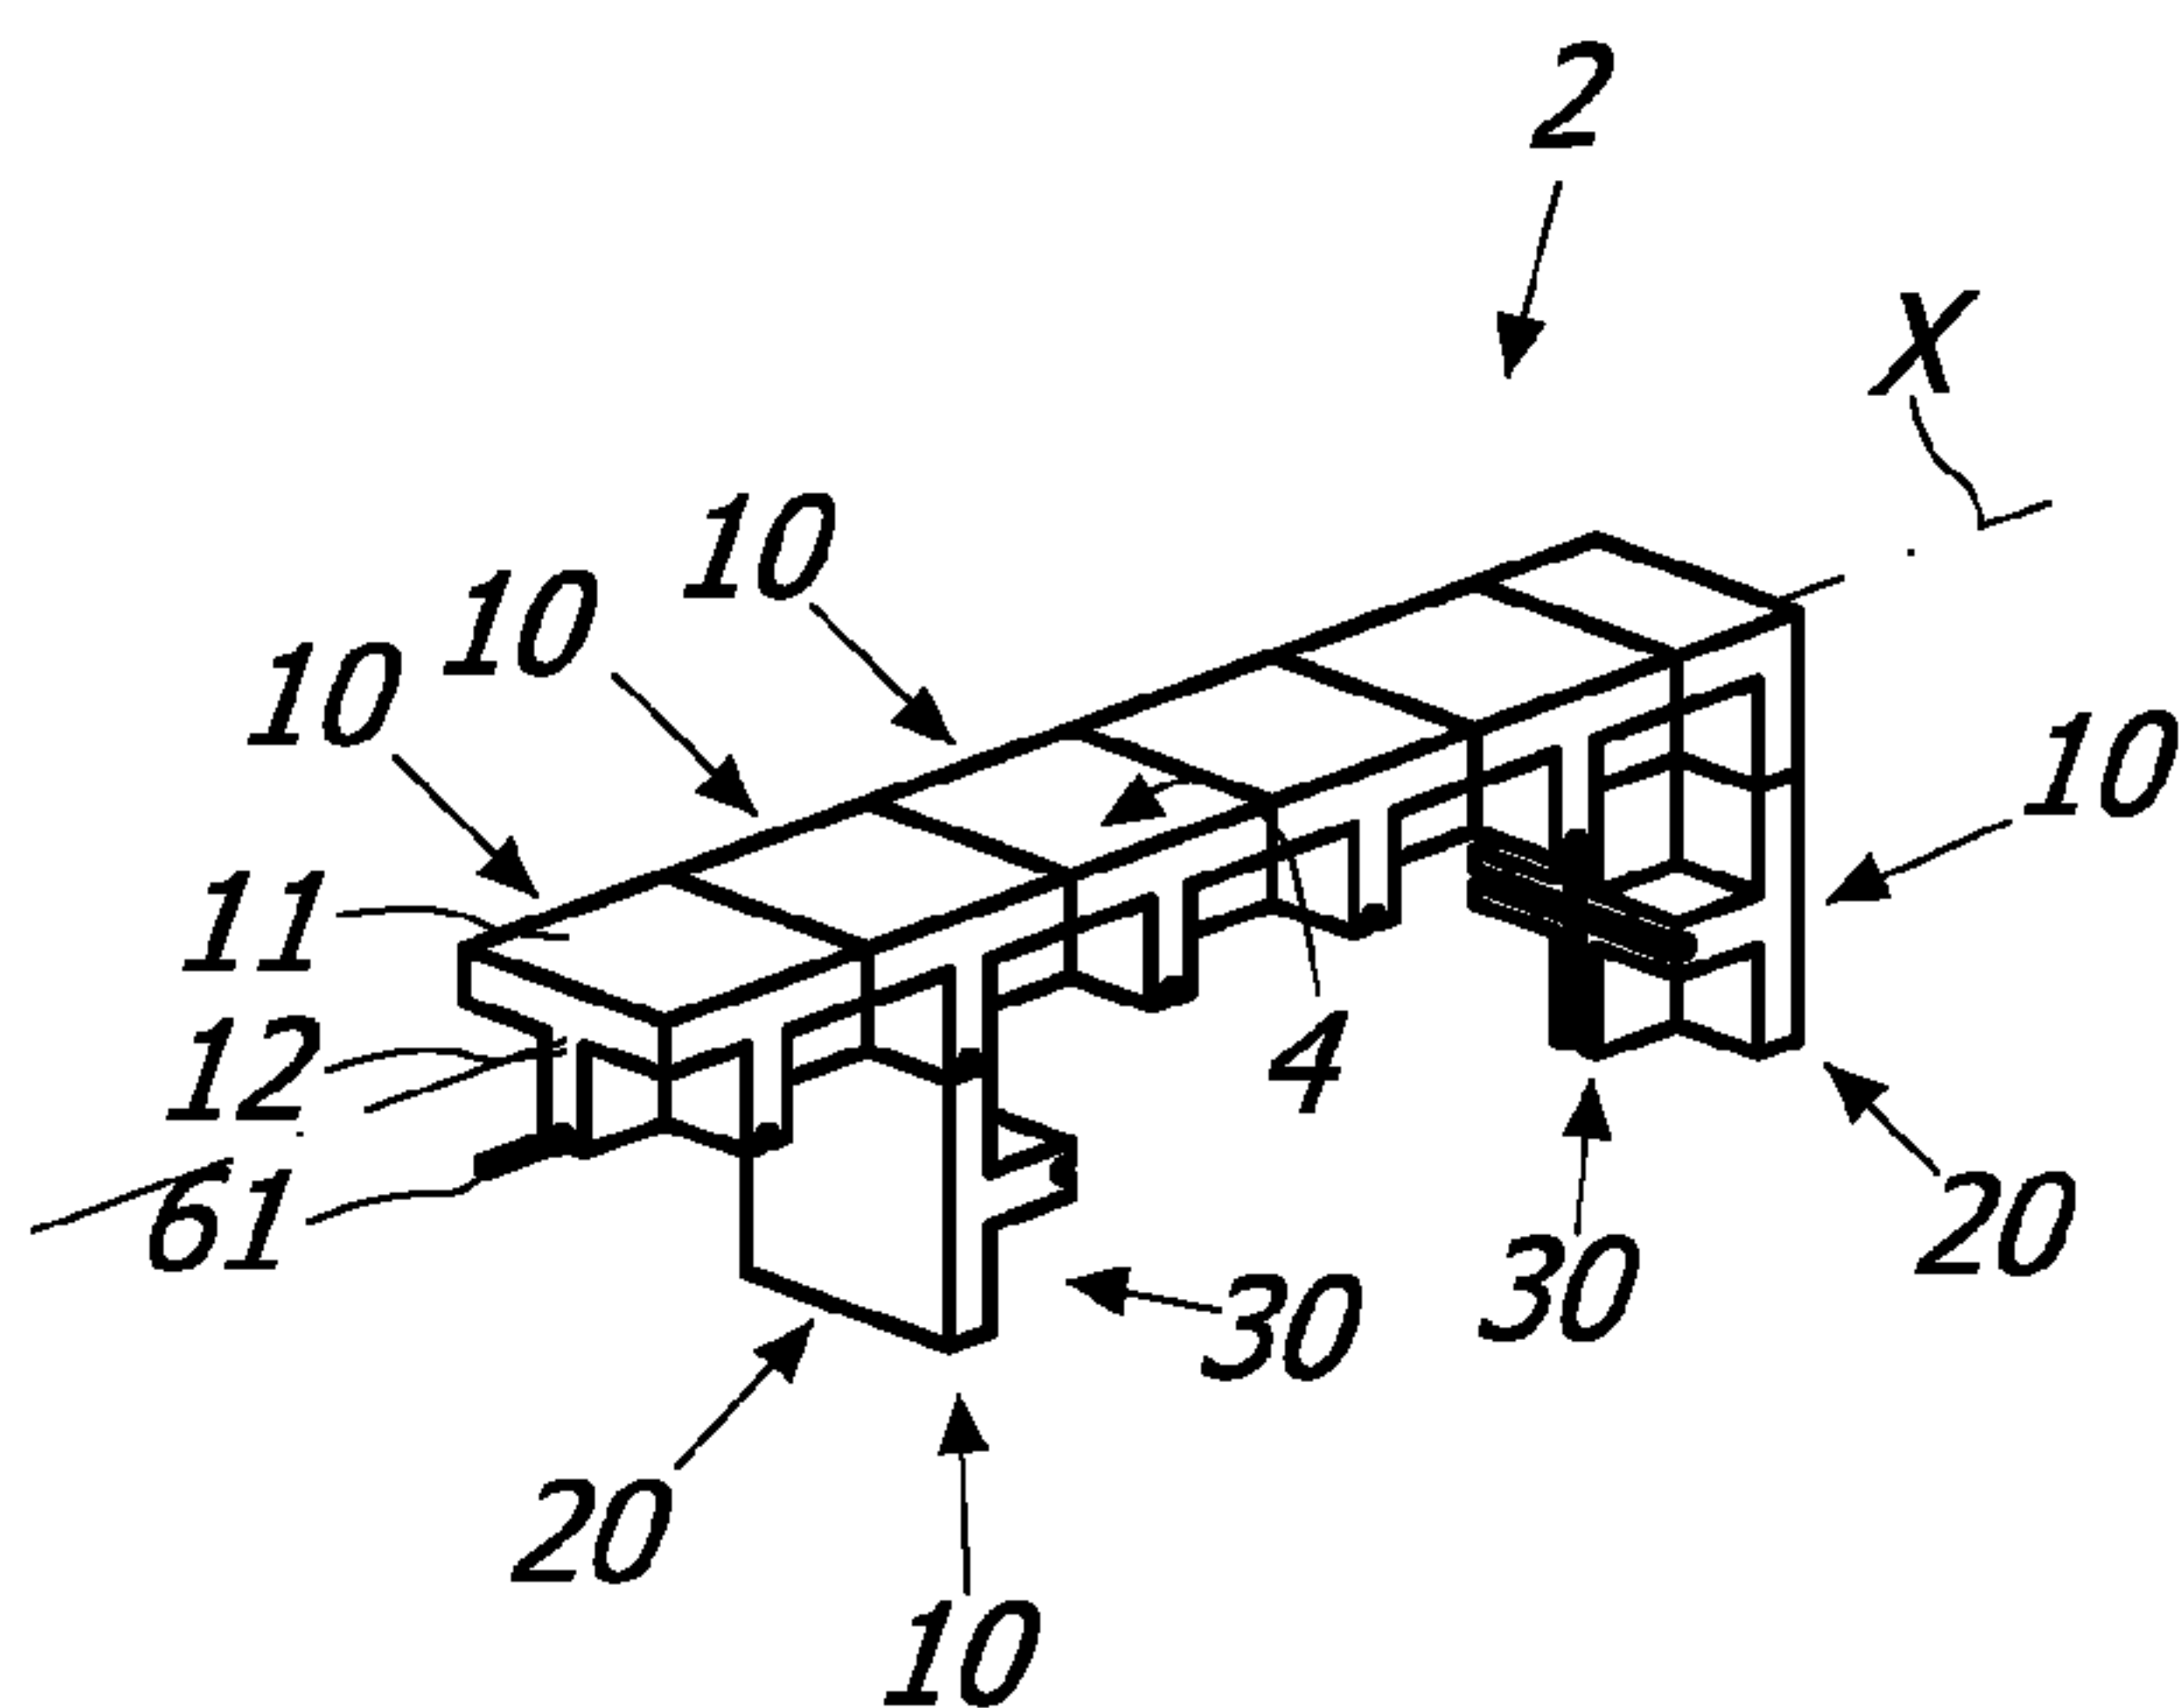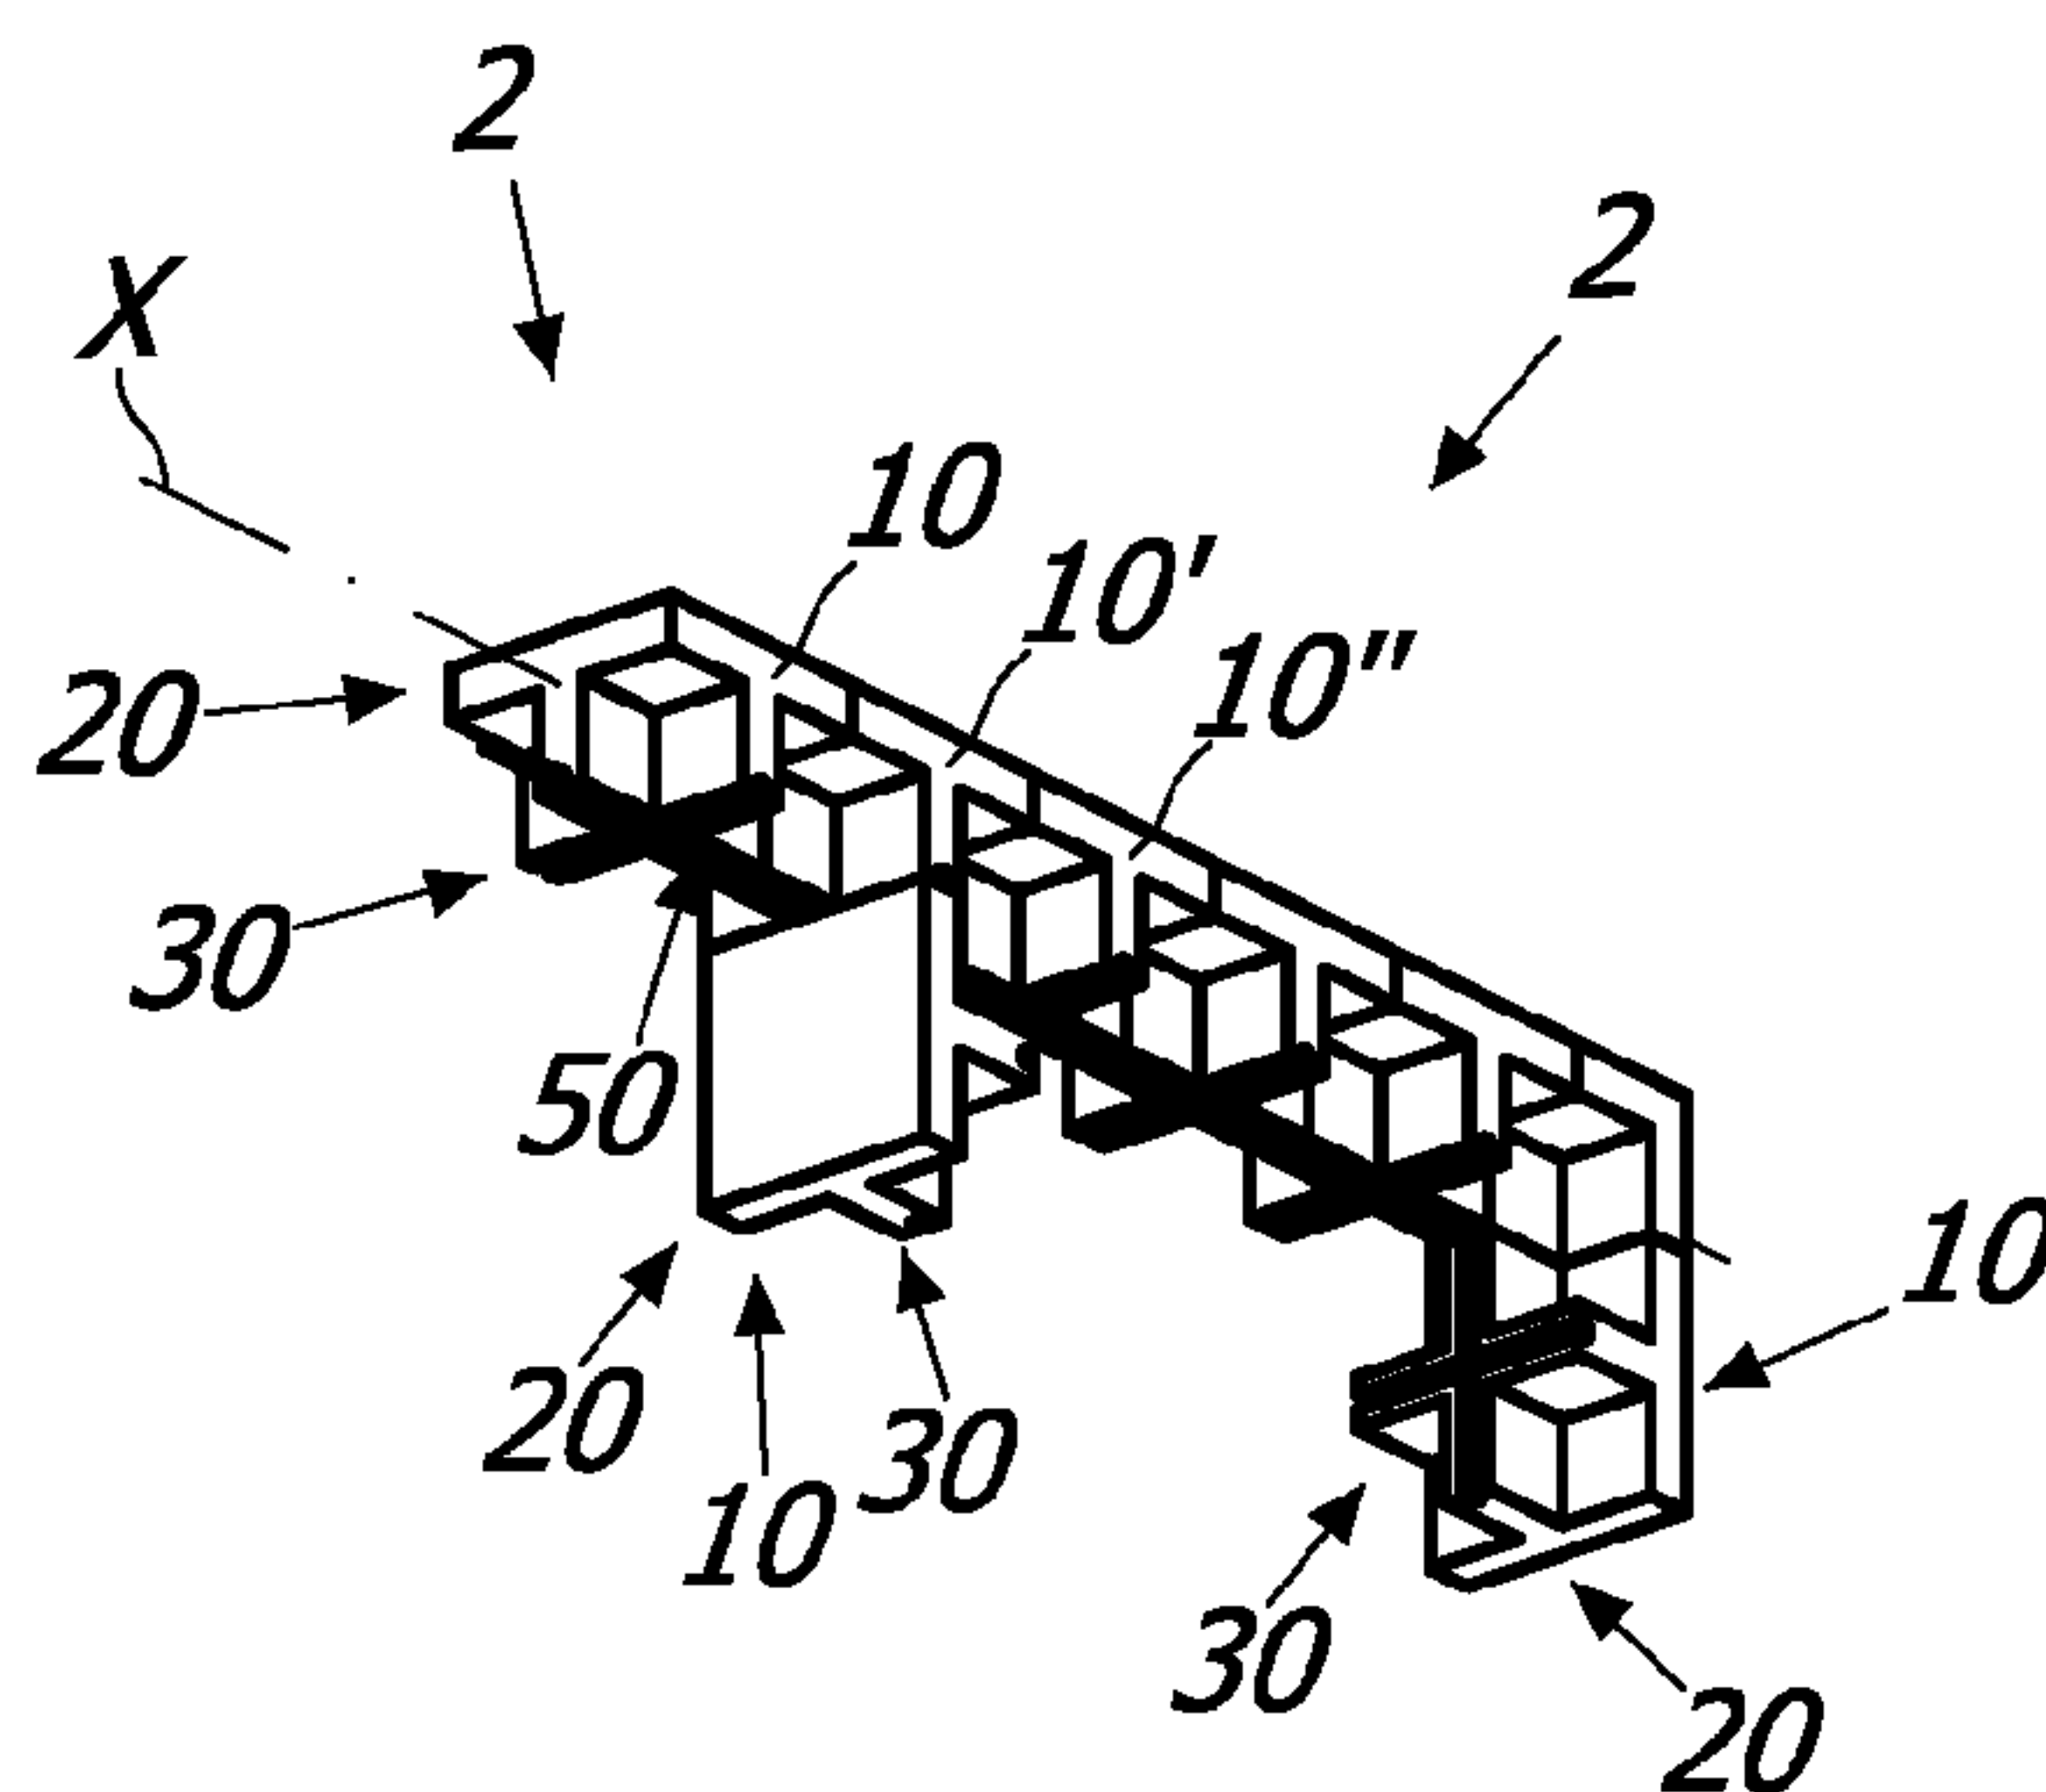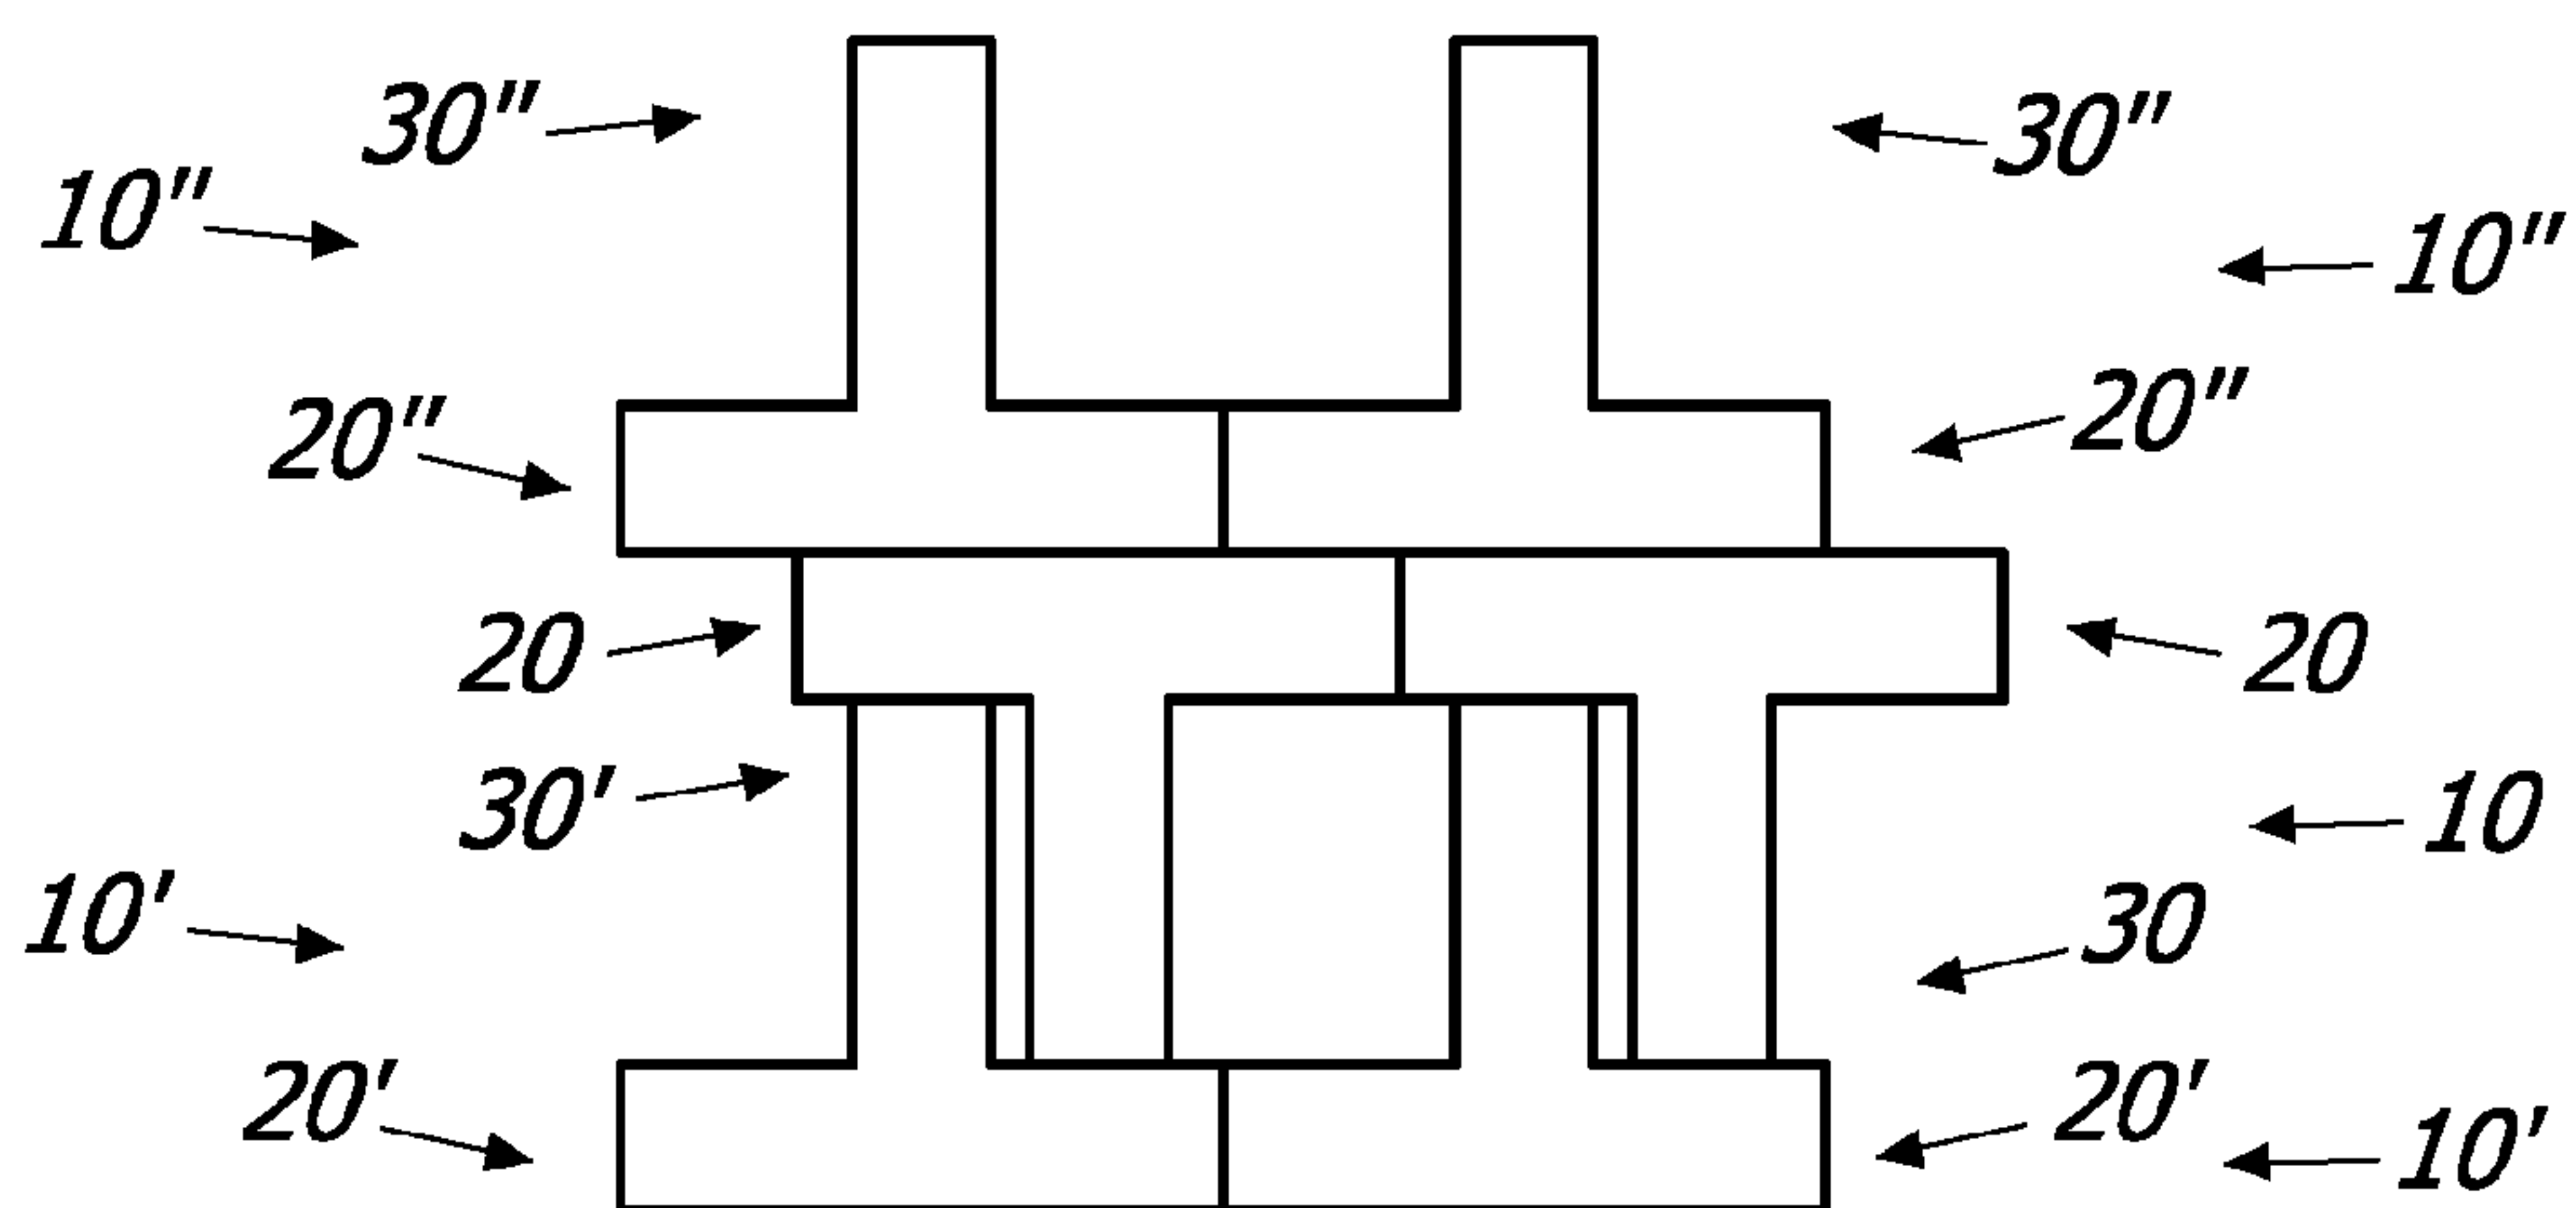3 / 24**FIG. 4A****FIG. 4B****FIG. 5A****FIG. 5B****FIG. 6**

4 / 24

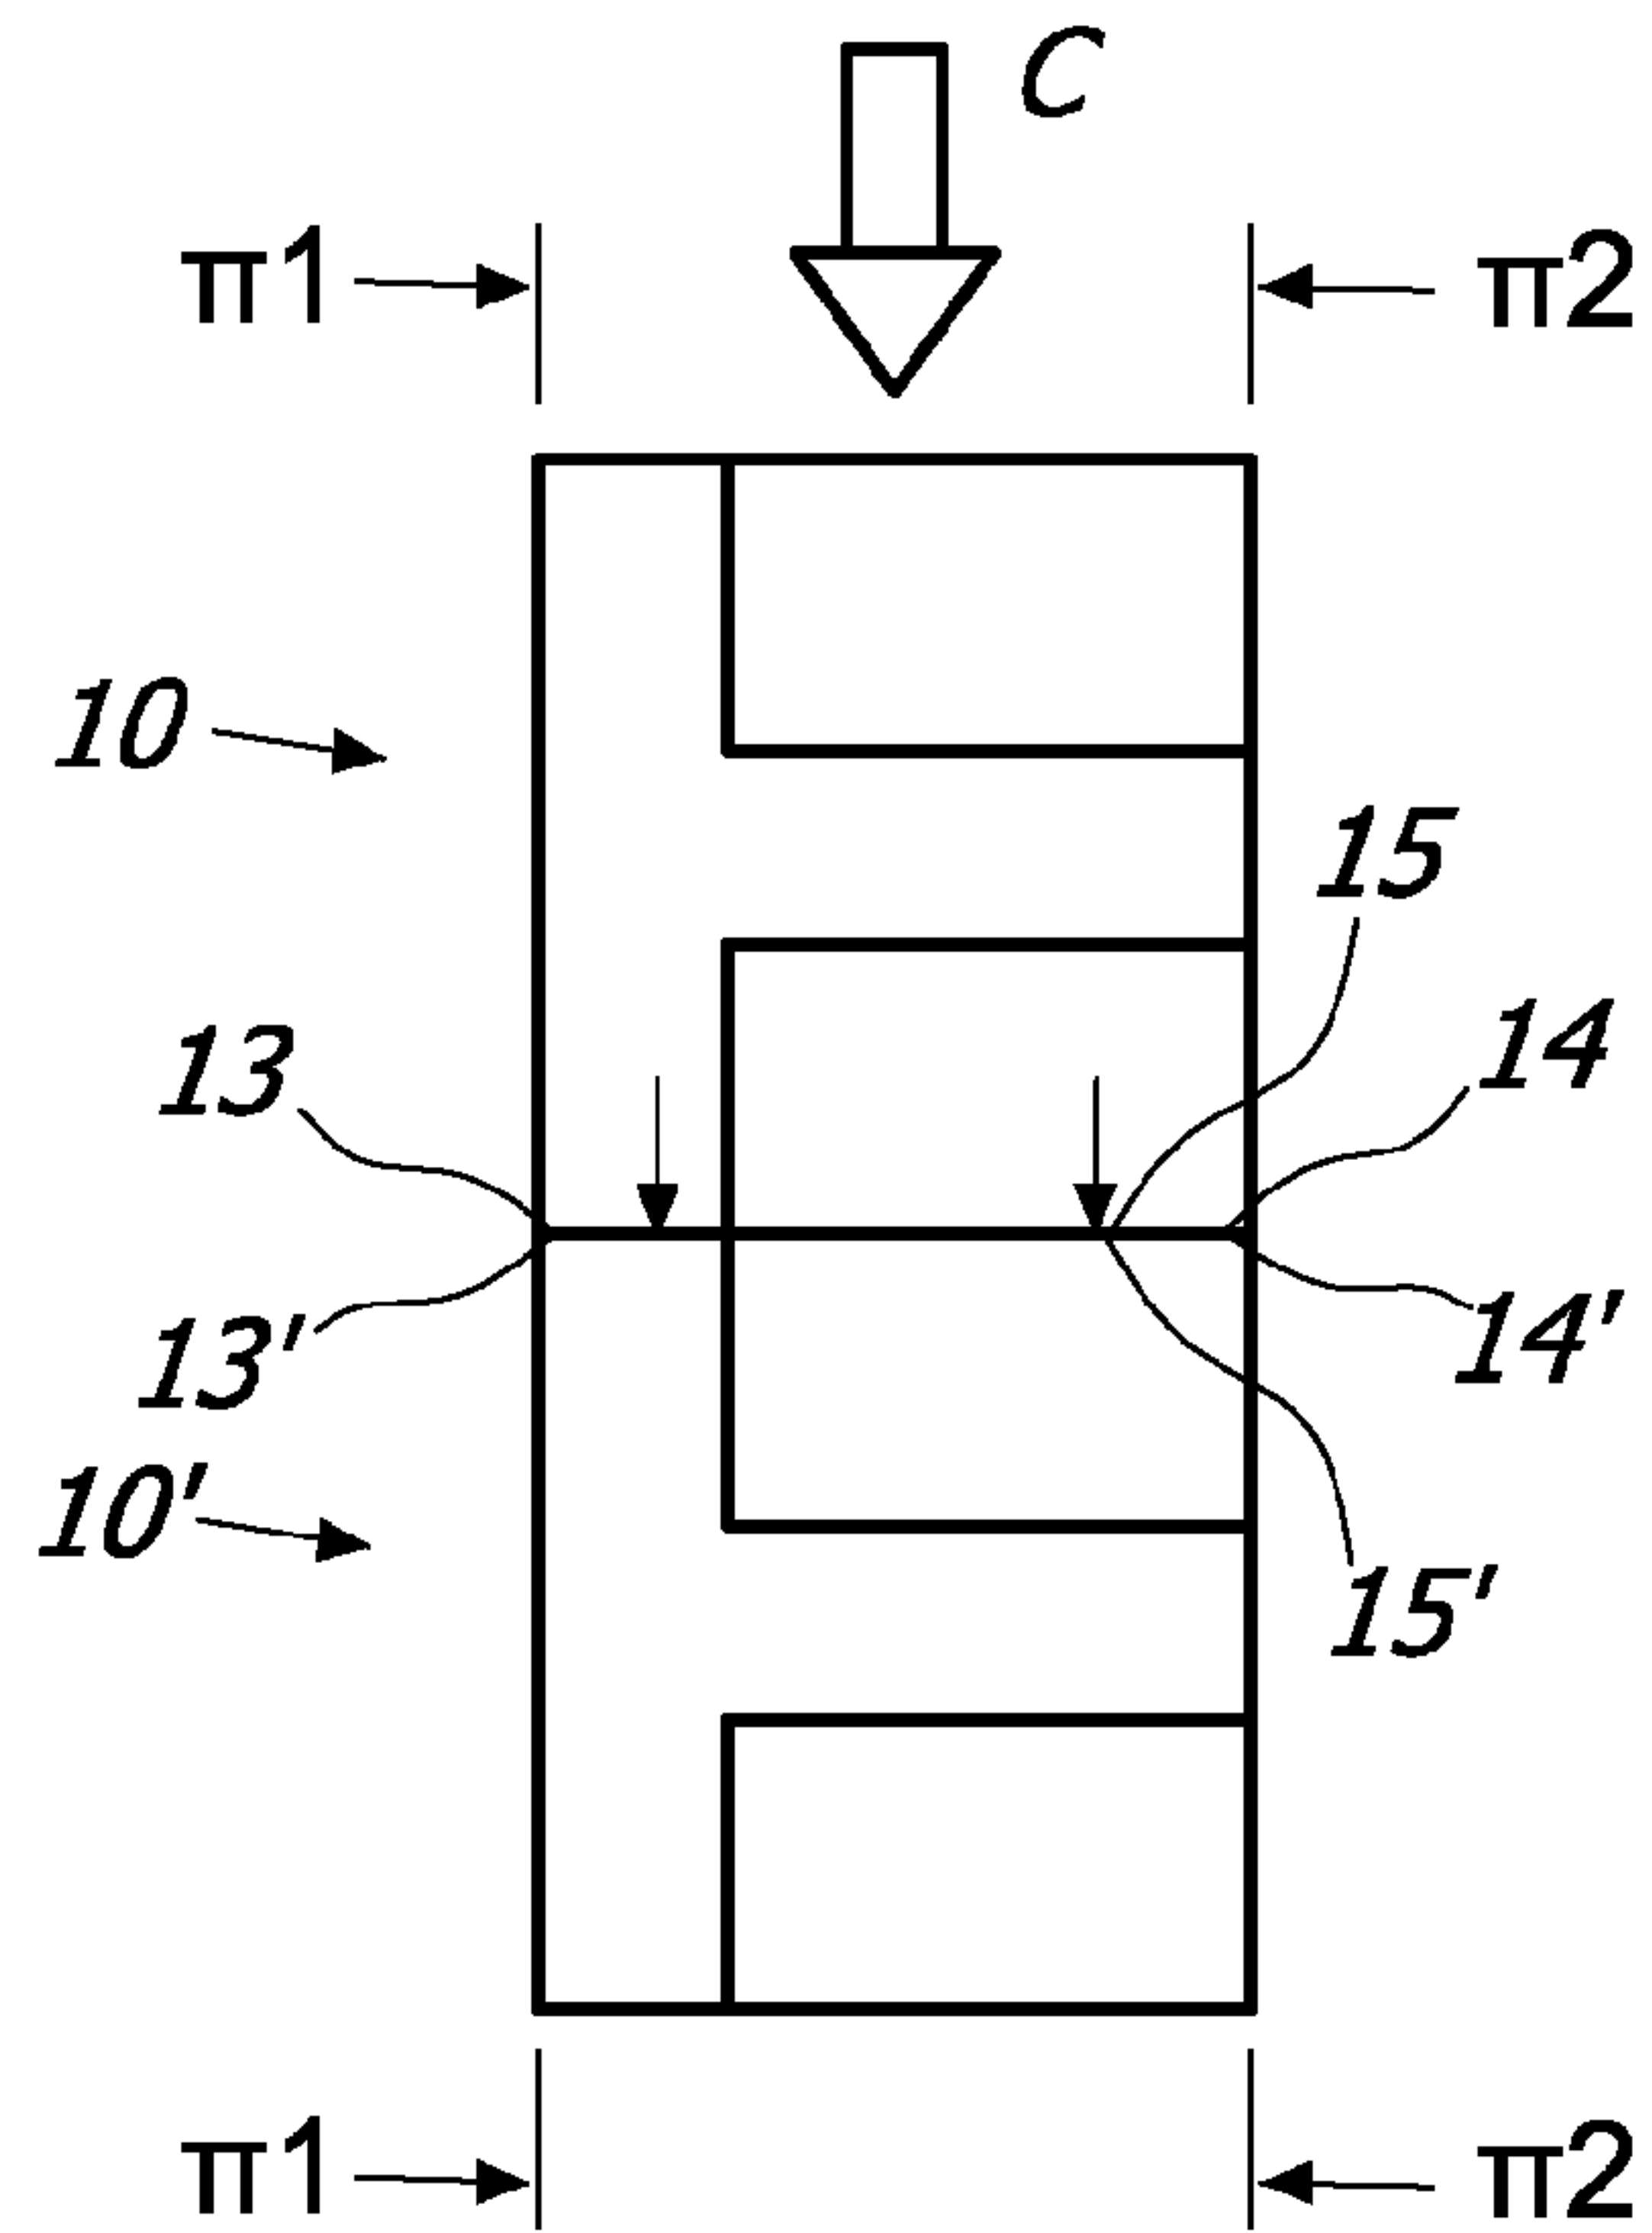


FIG. 7

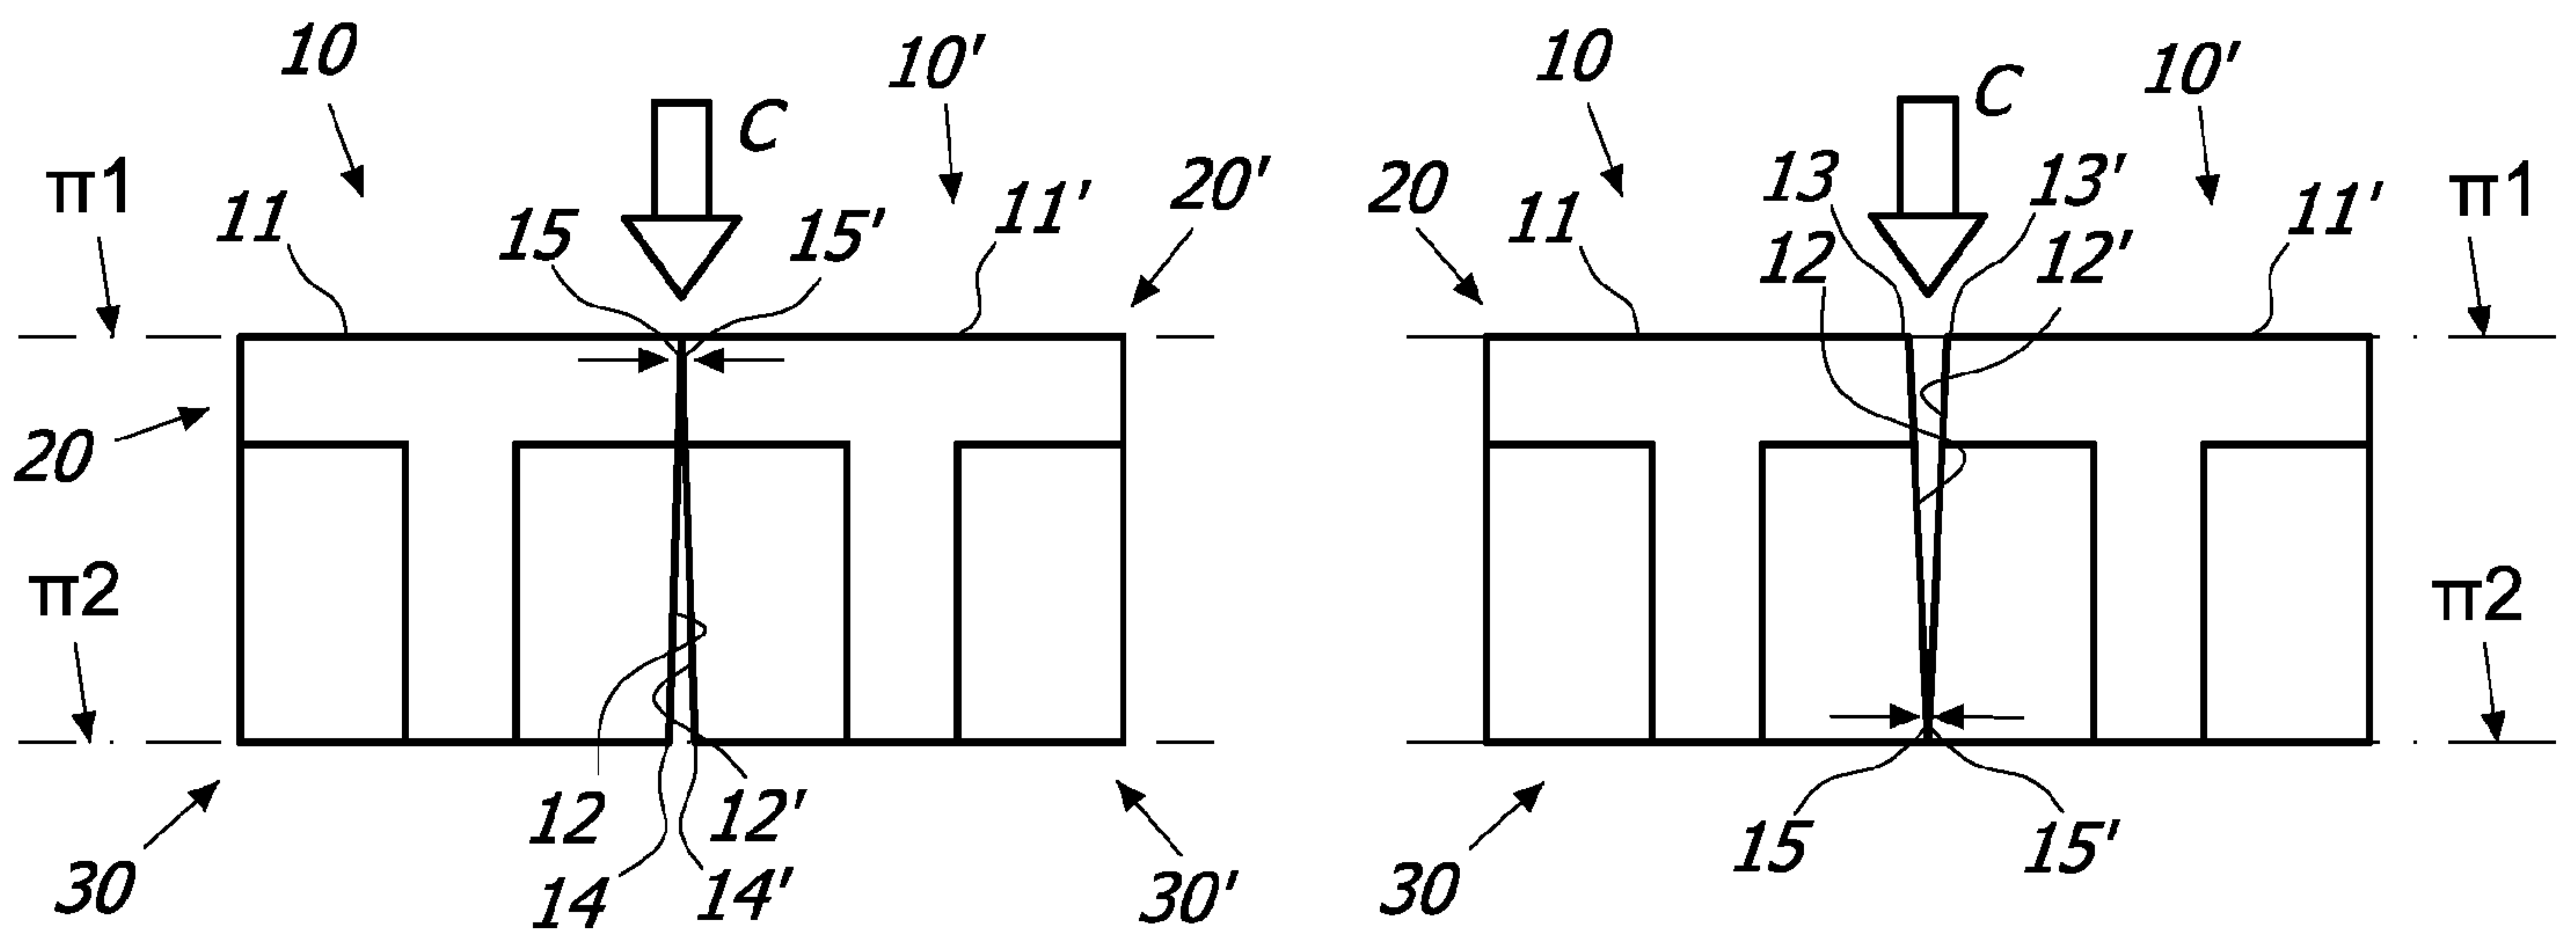


FIG. 8A

FIG. 8B

5 / 24

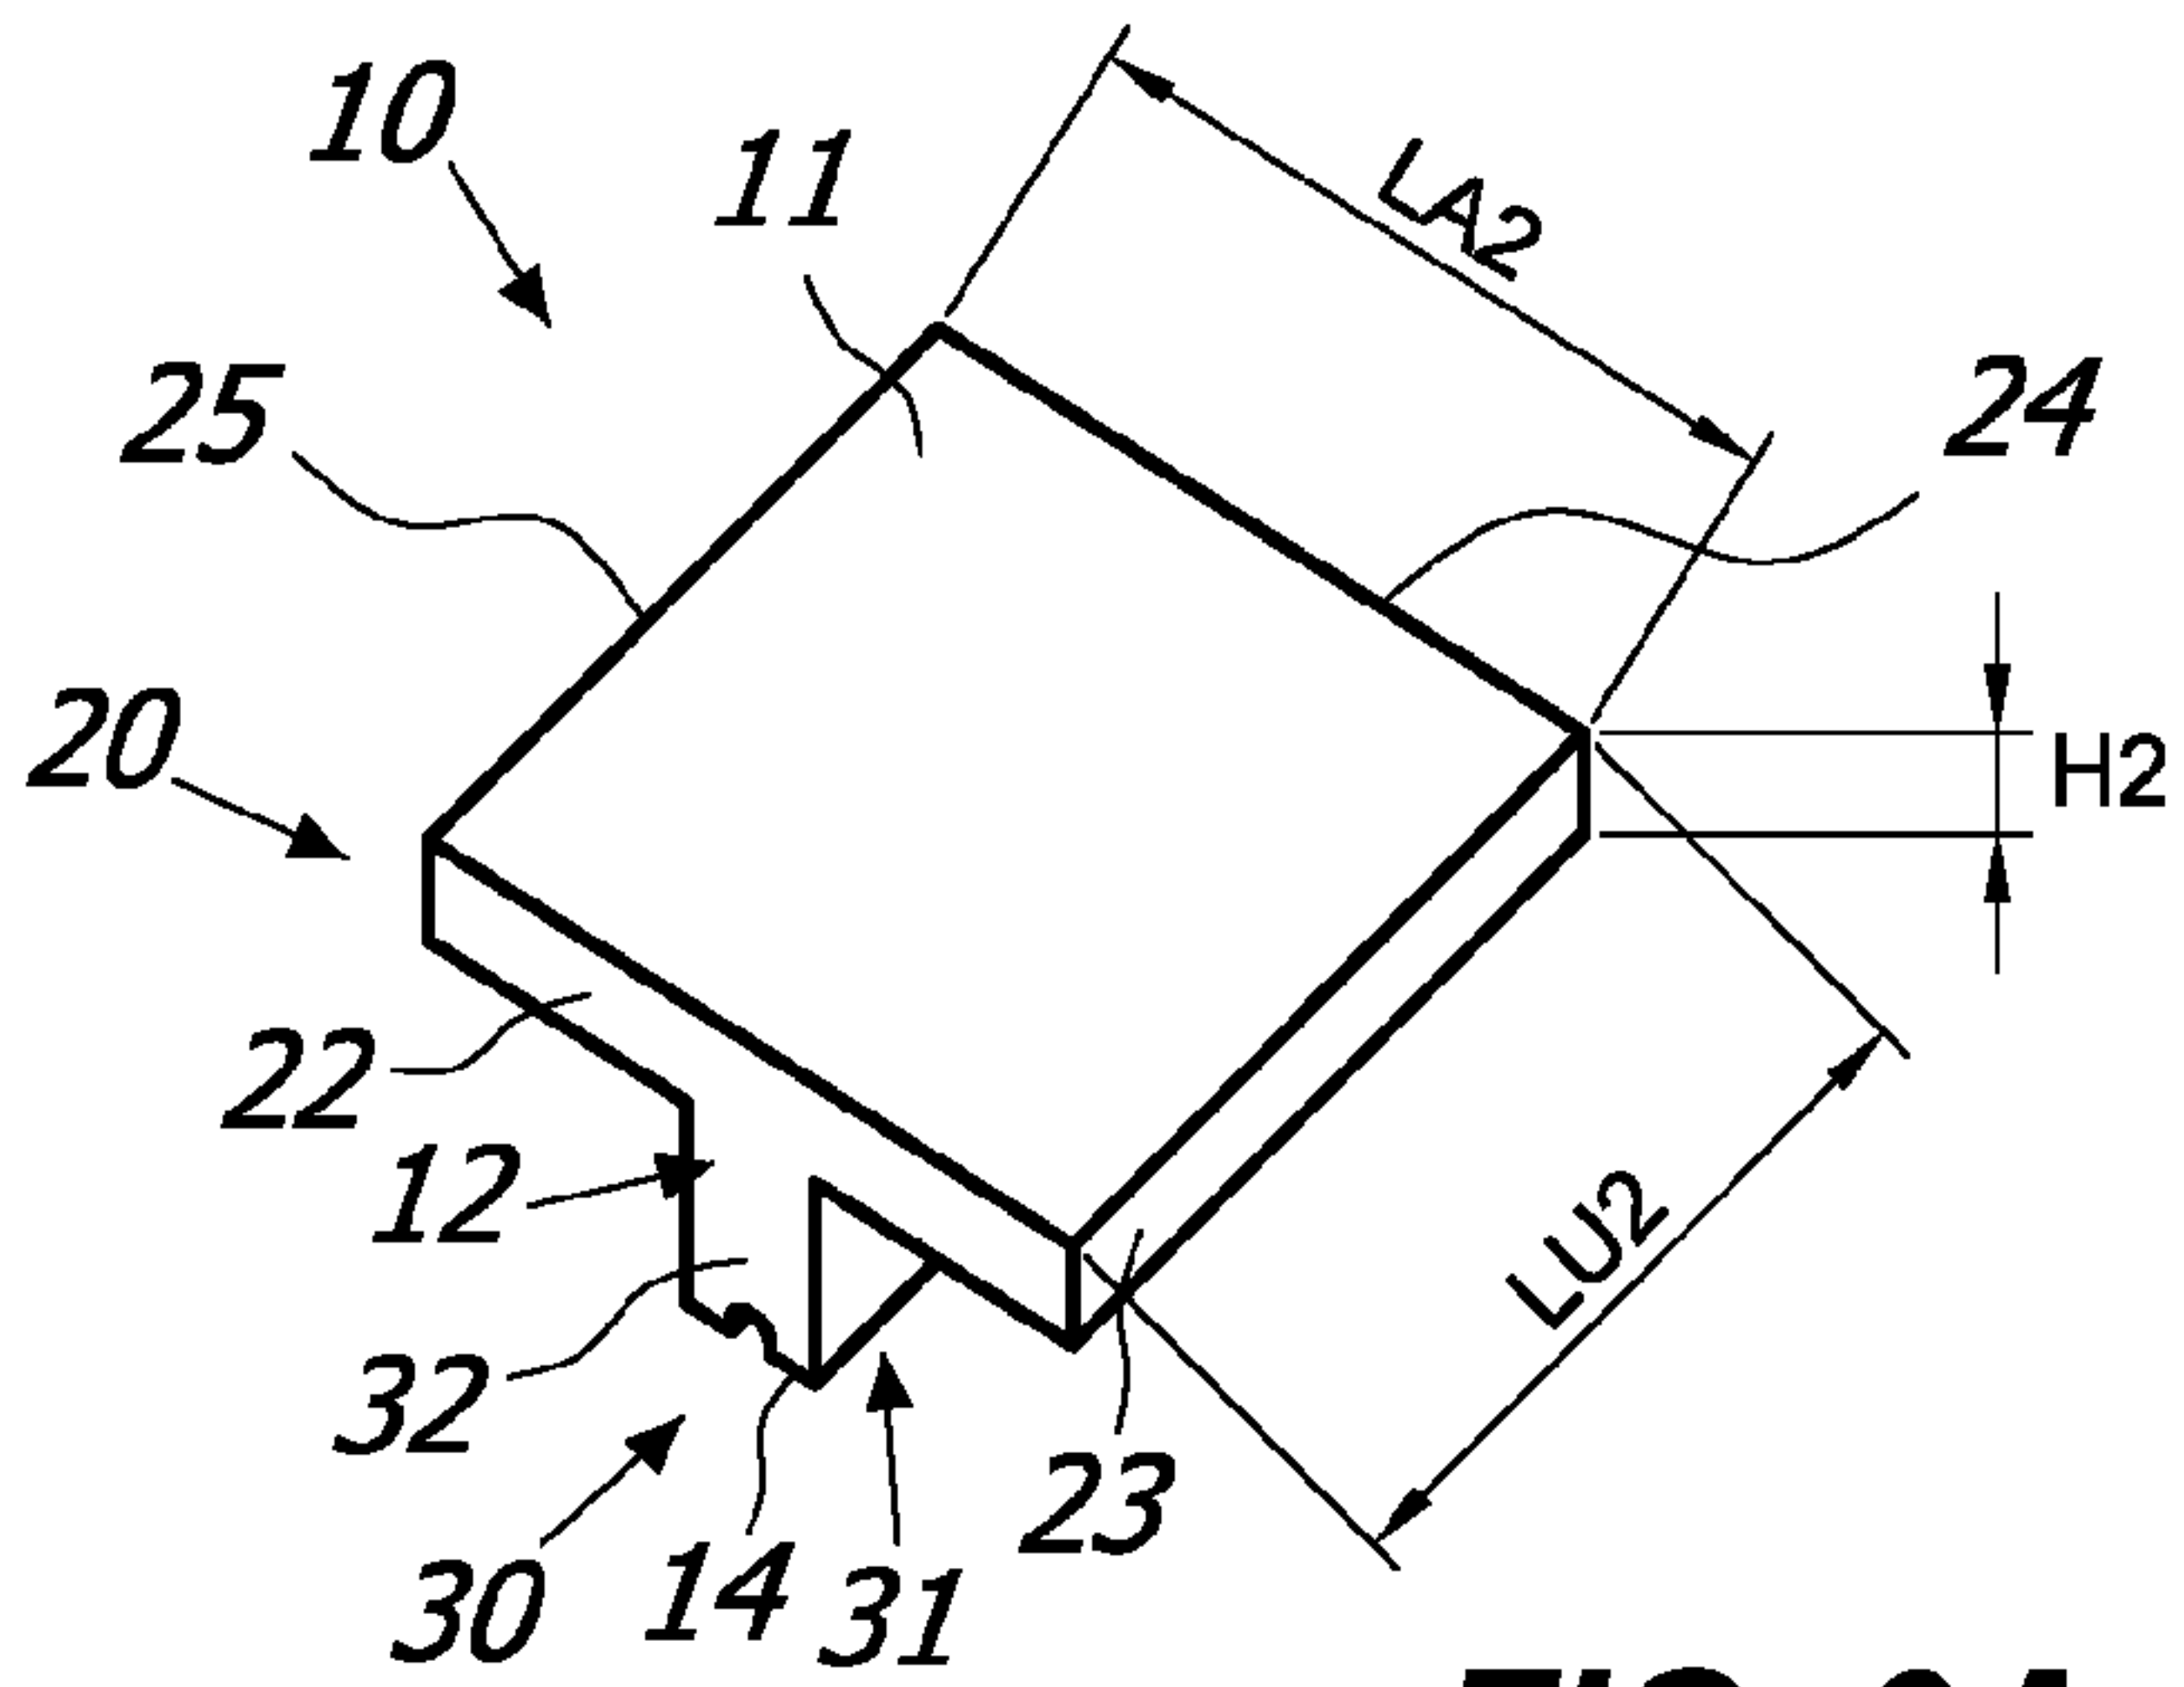


FIG. 9A

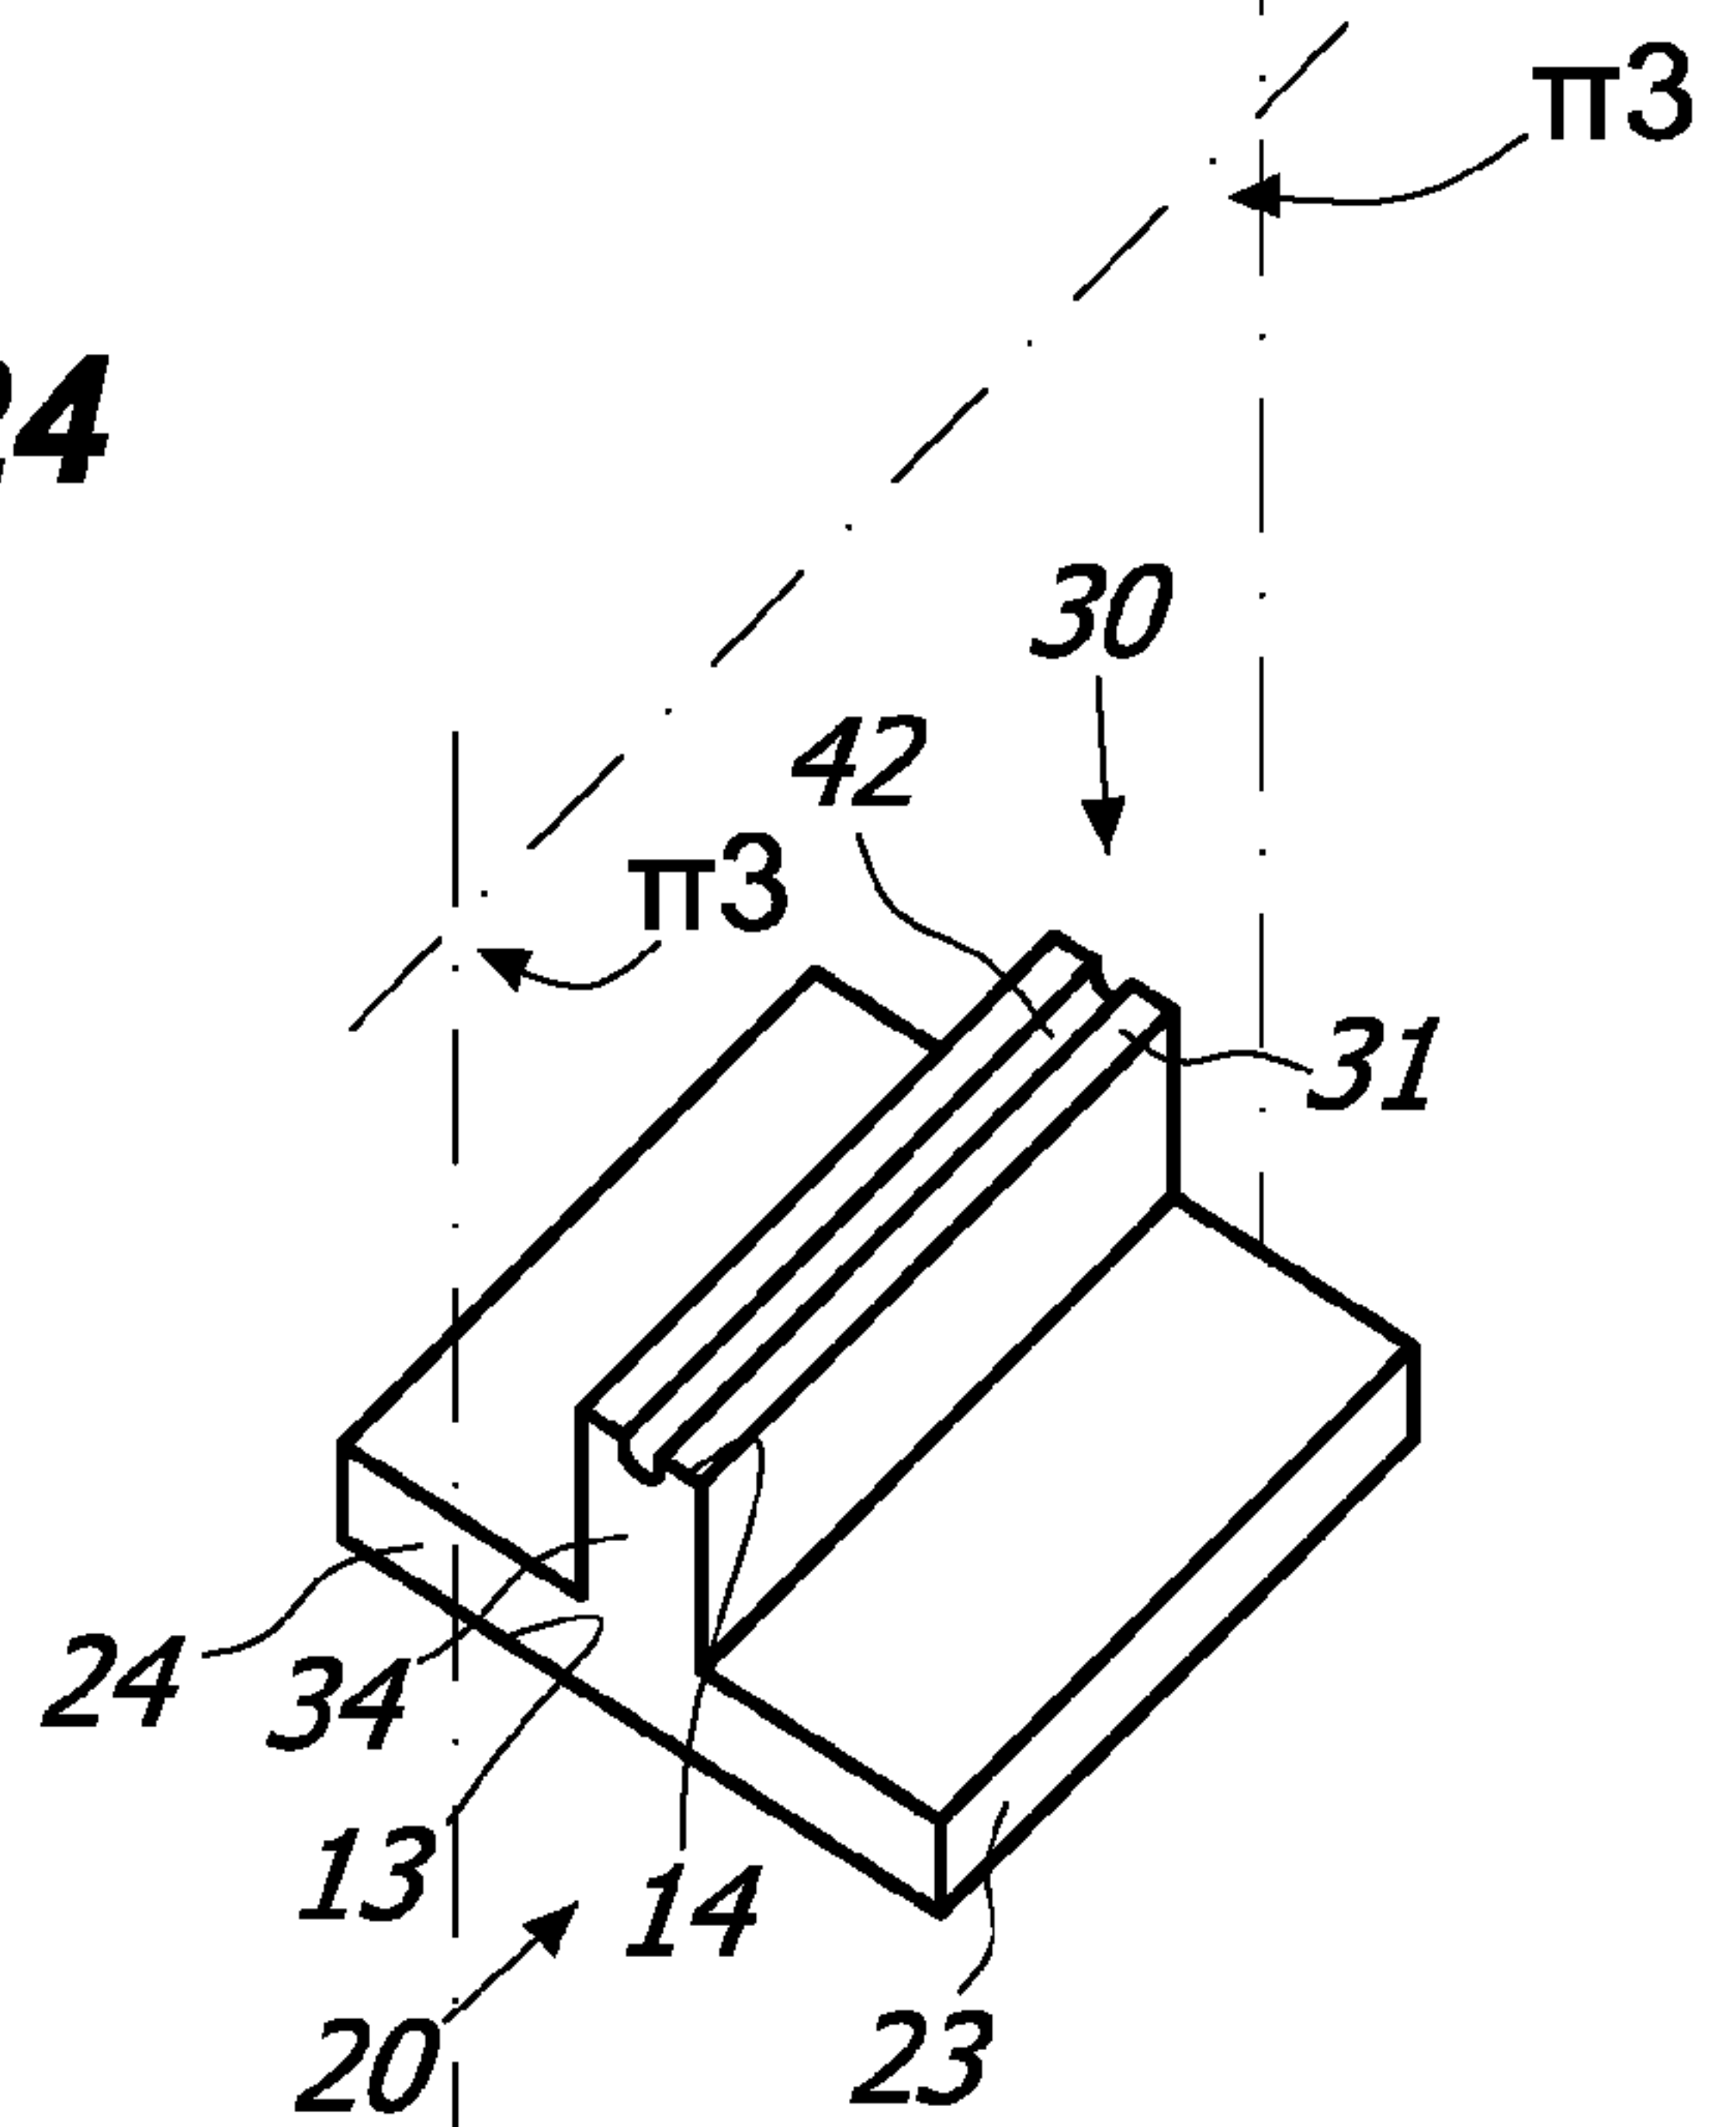


FIG. 9B

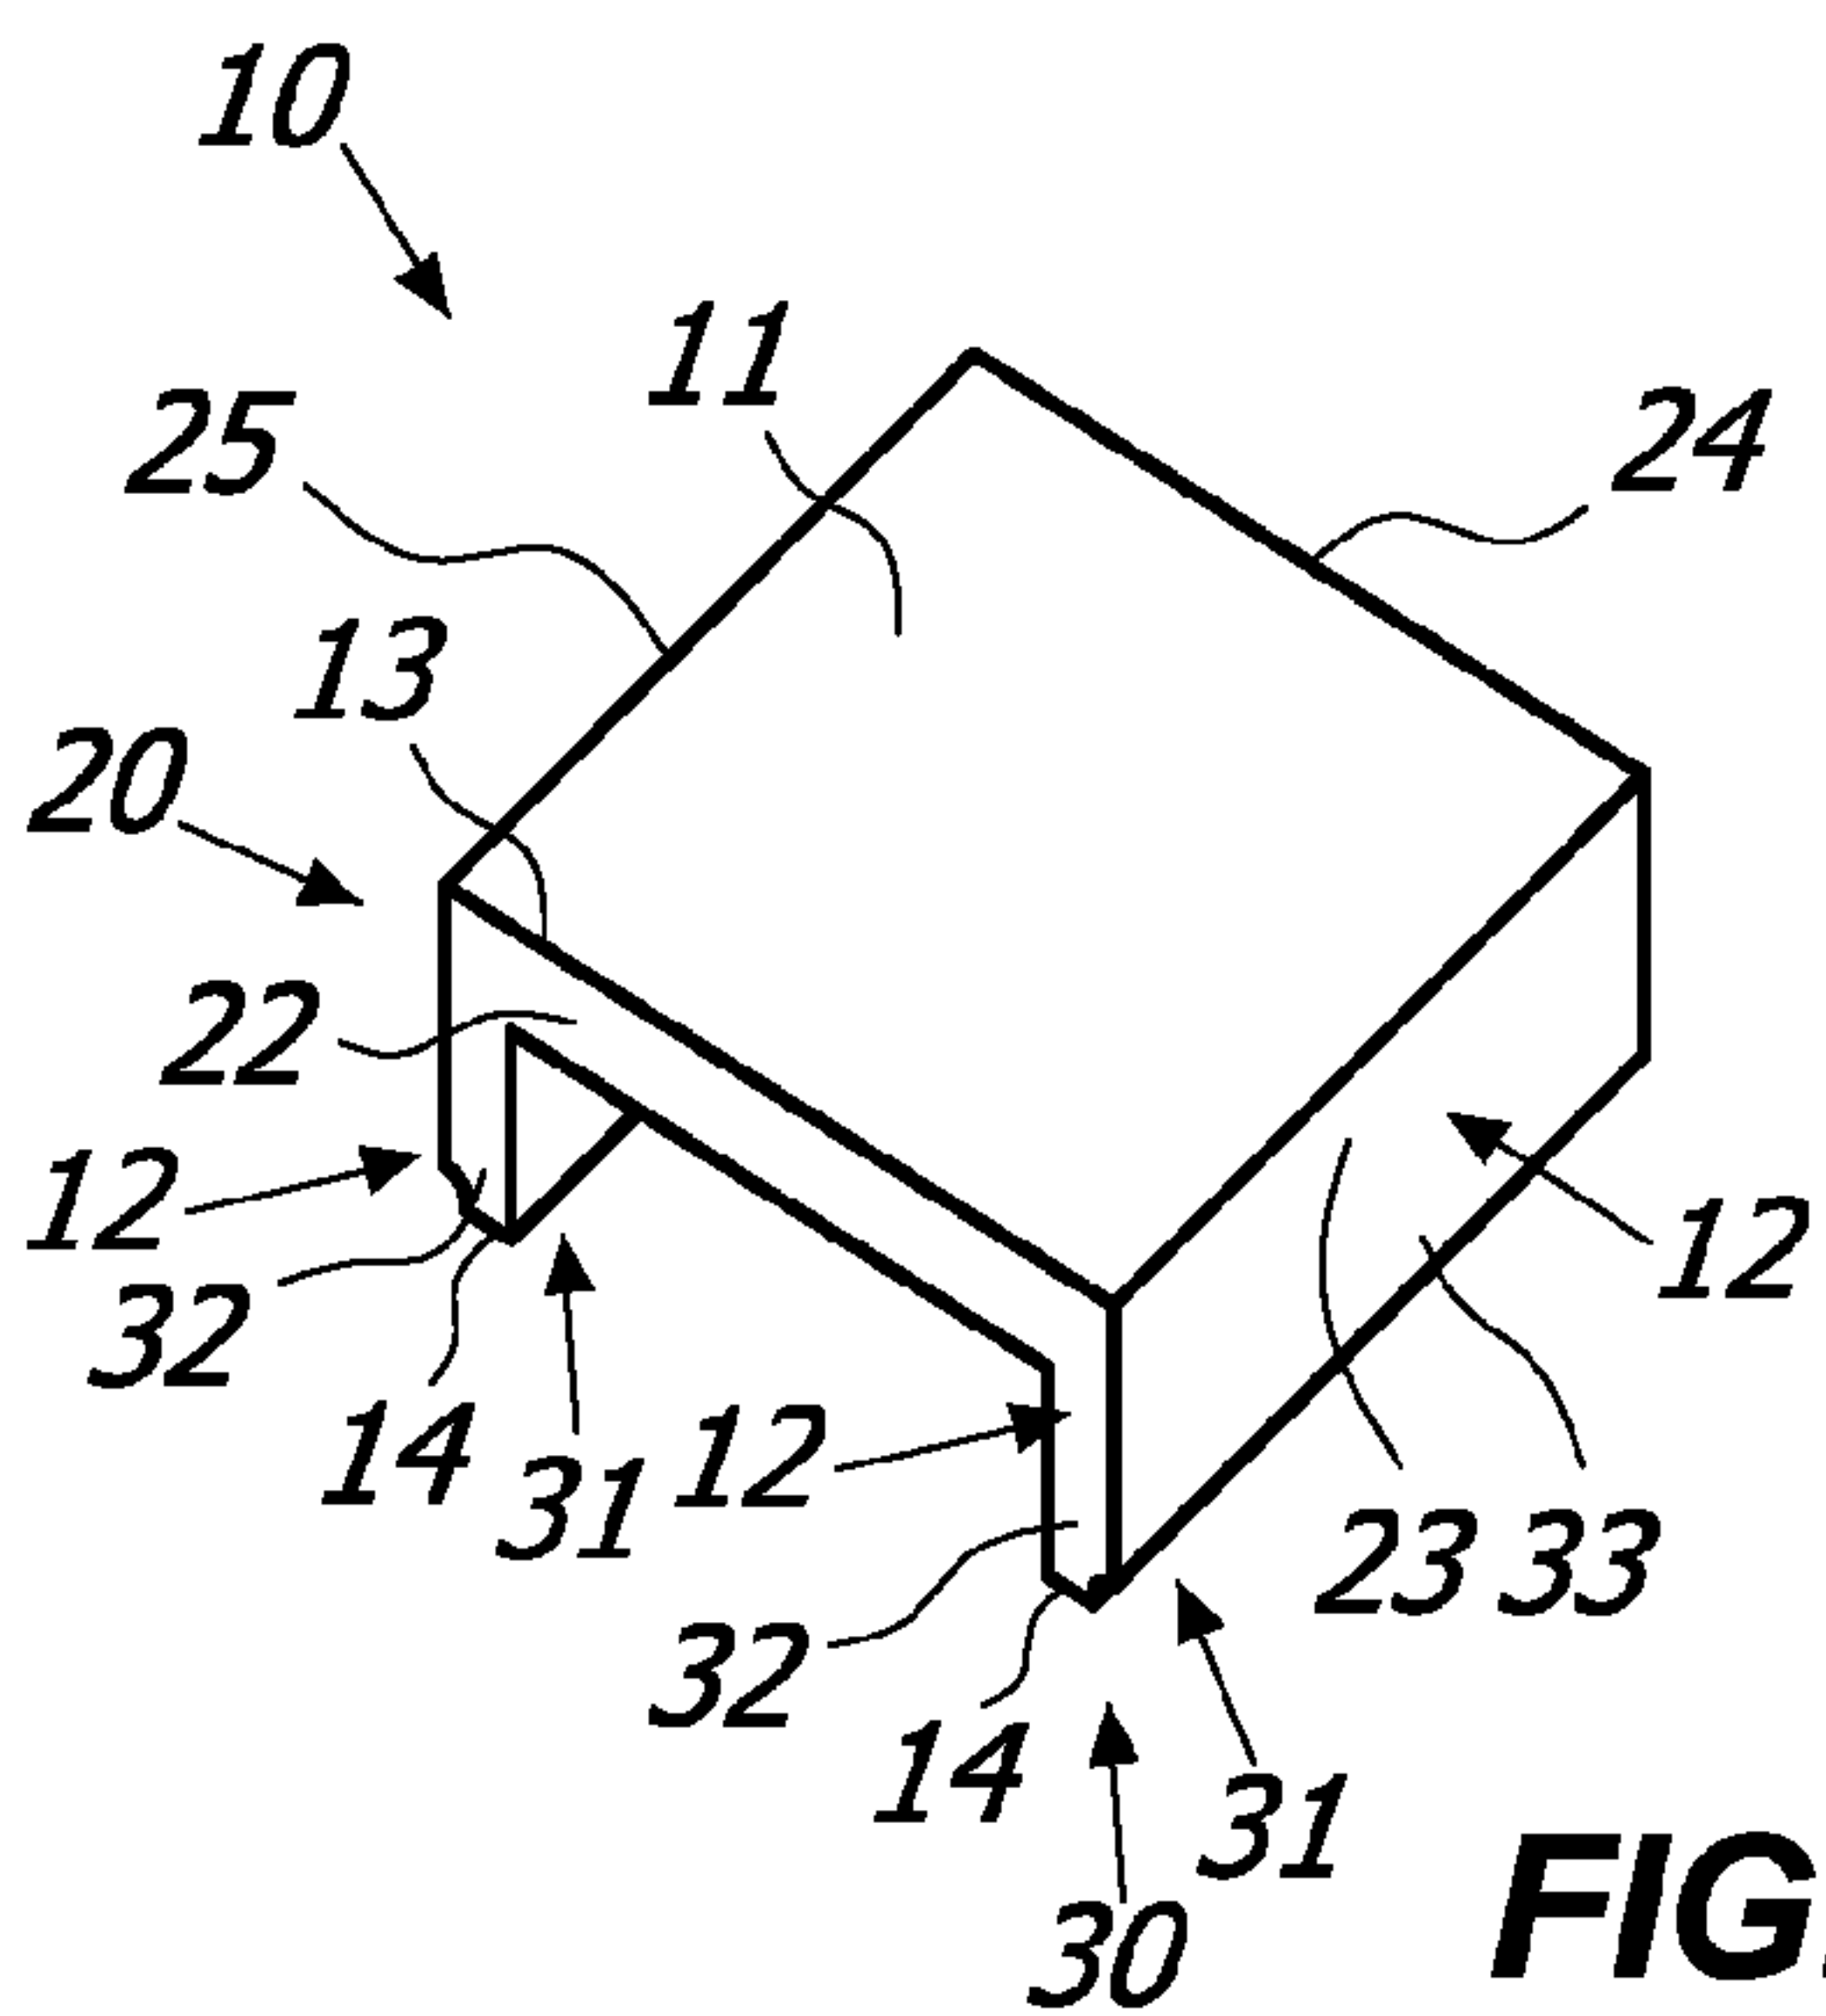


FIG. 10A

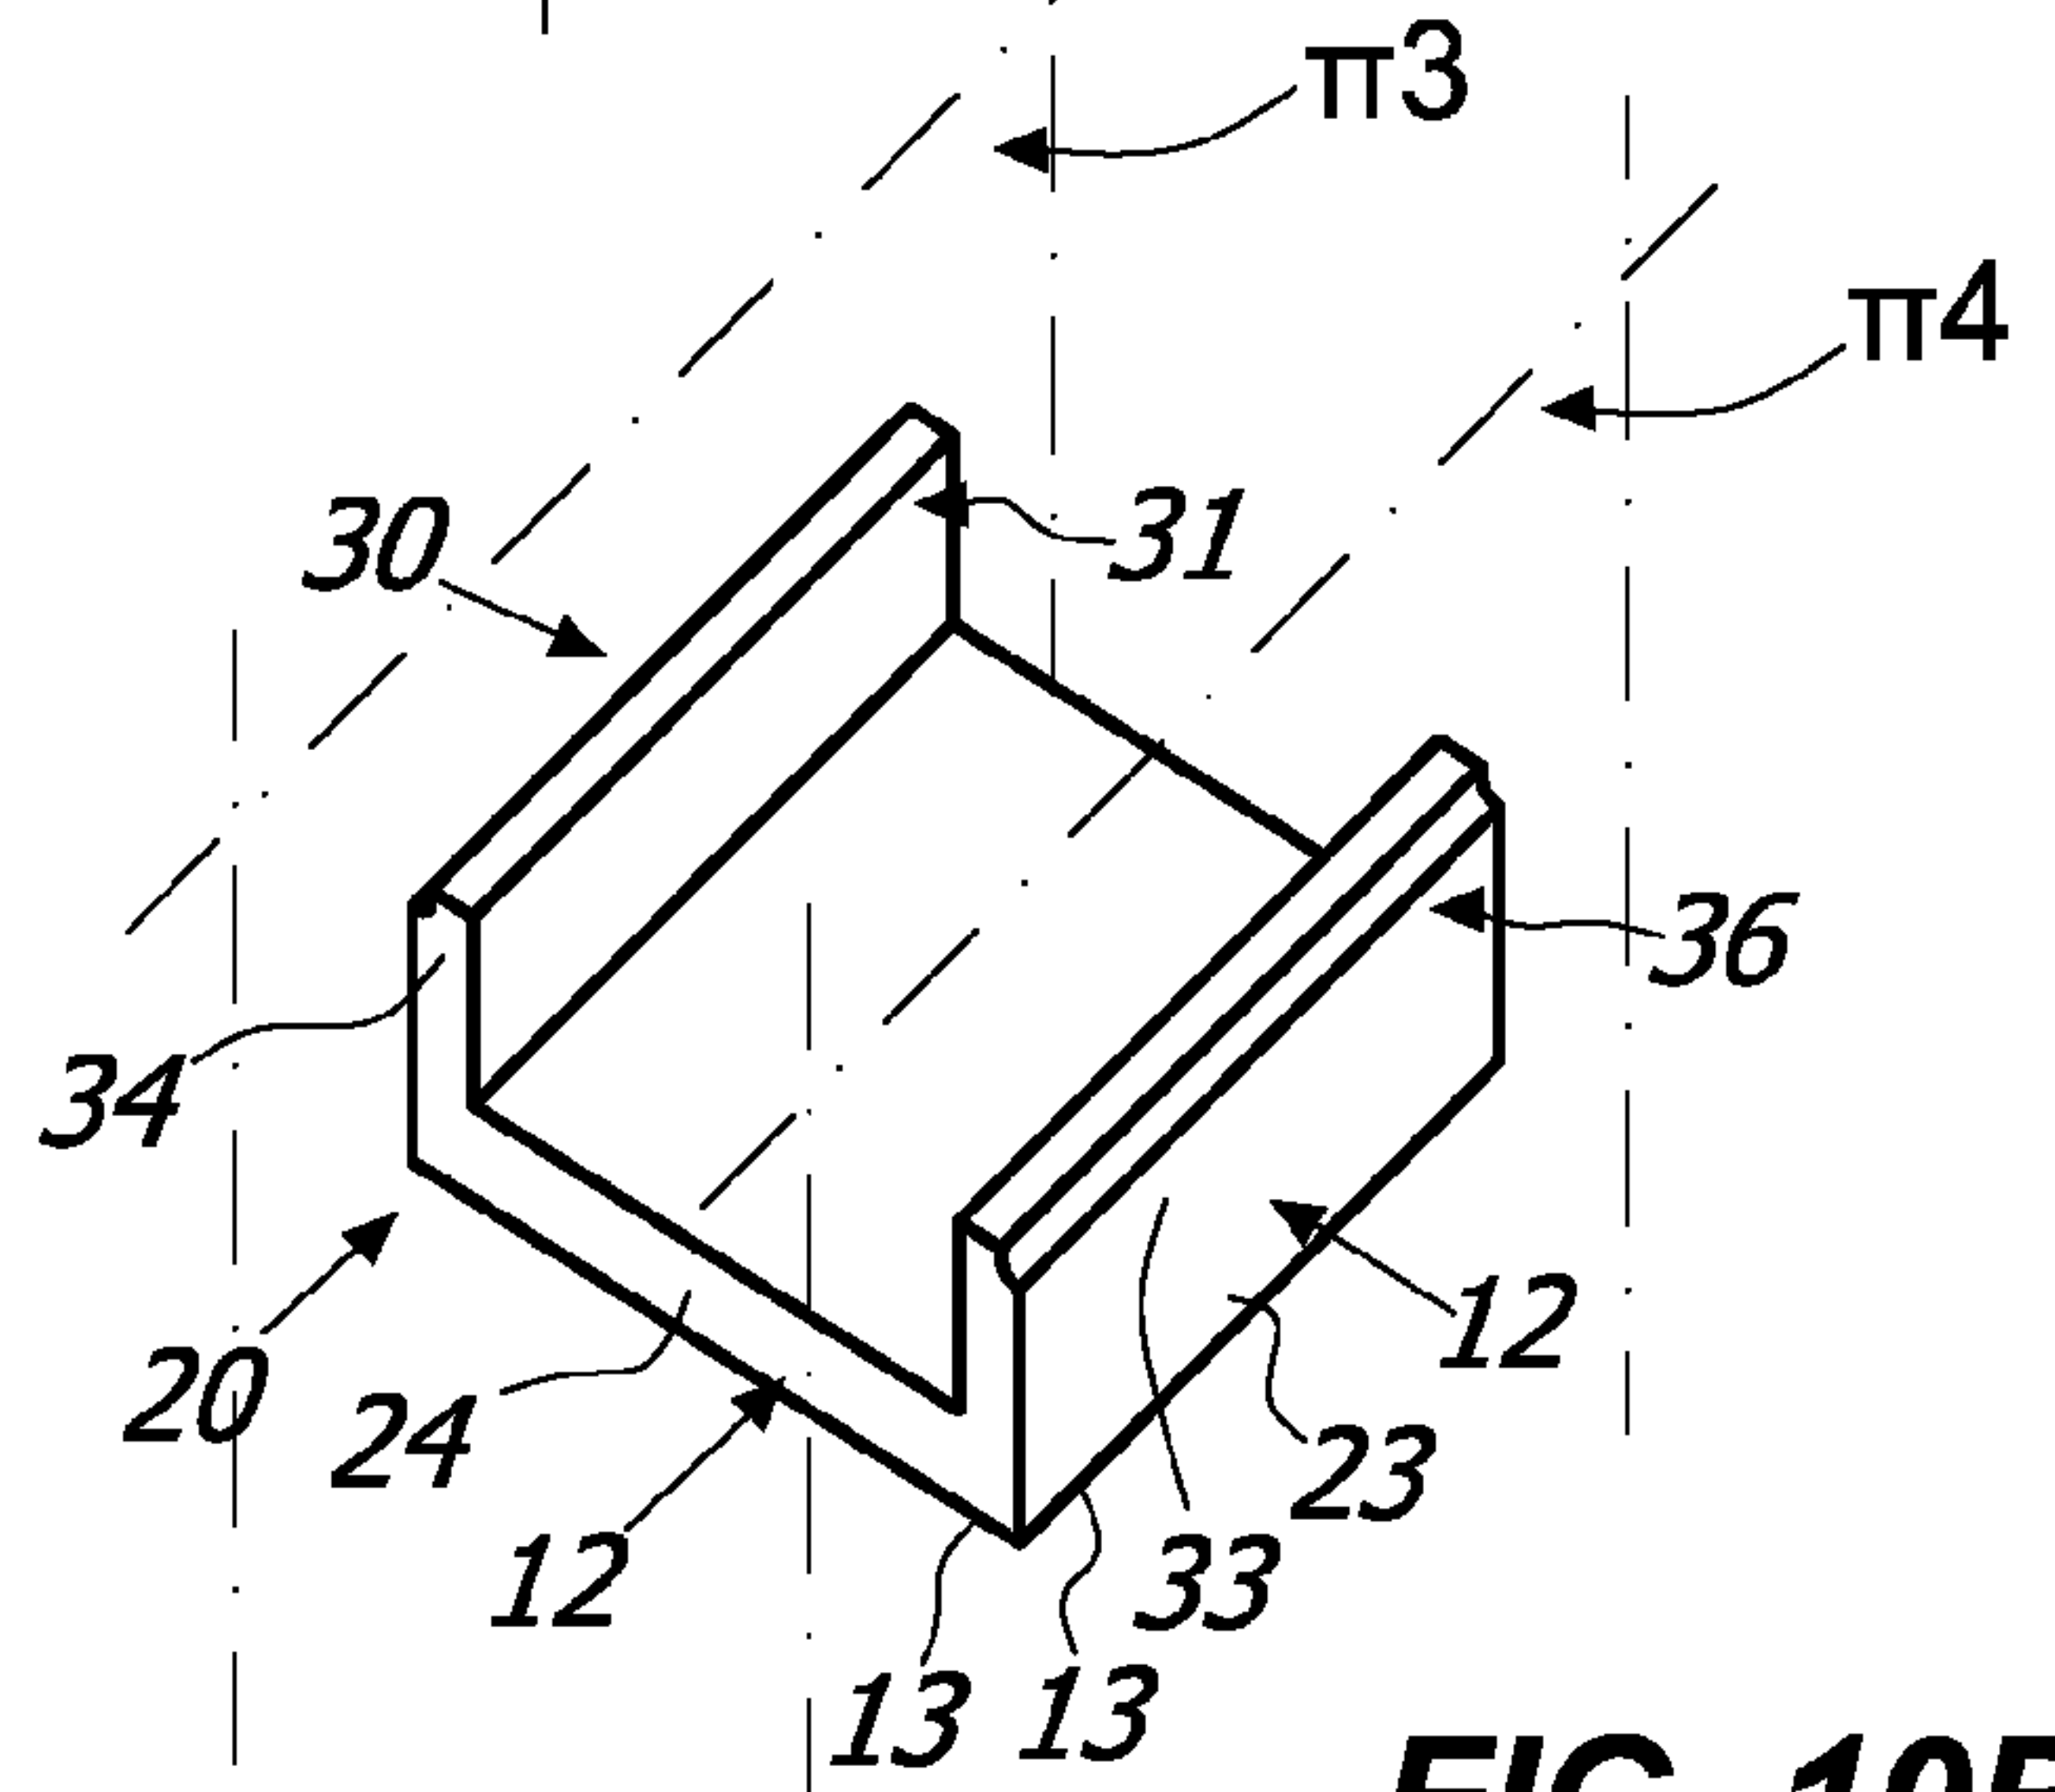


FIG. 10B

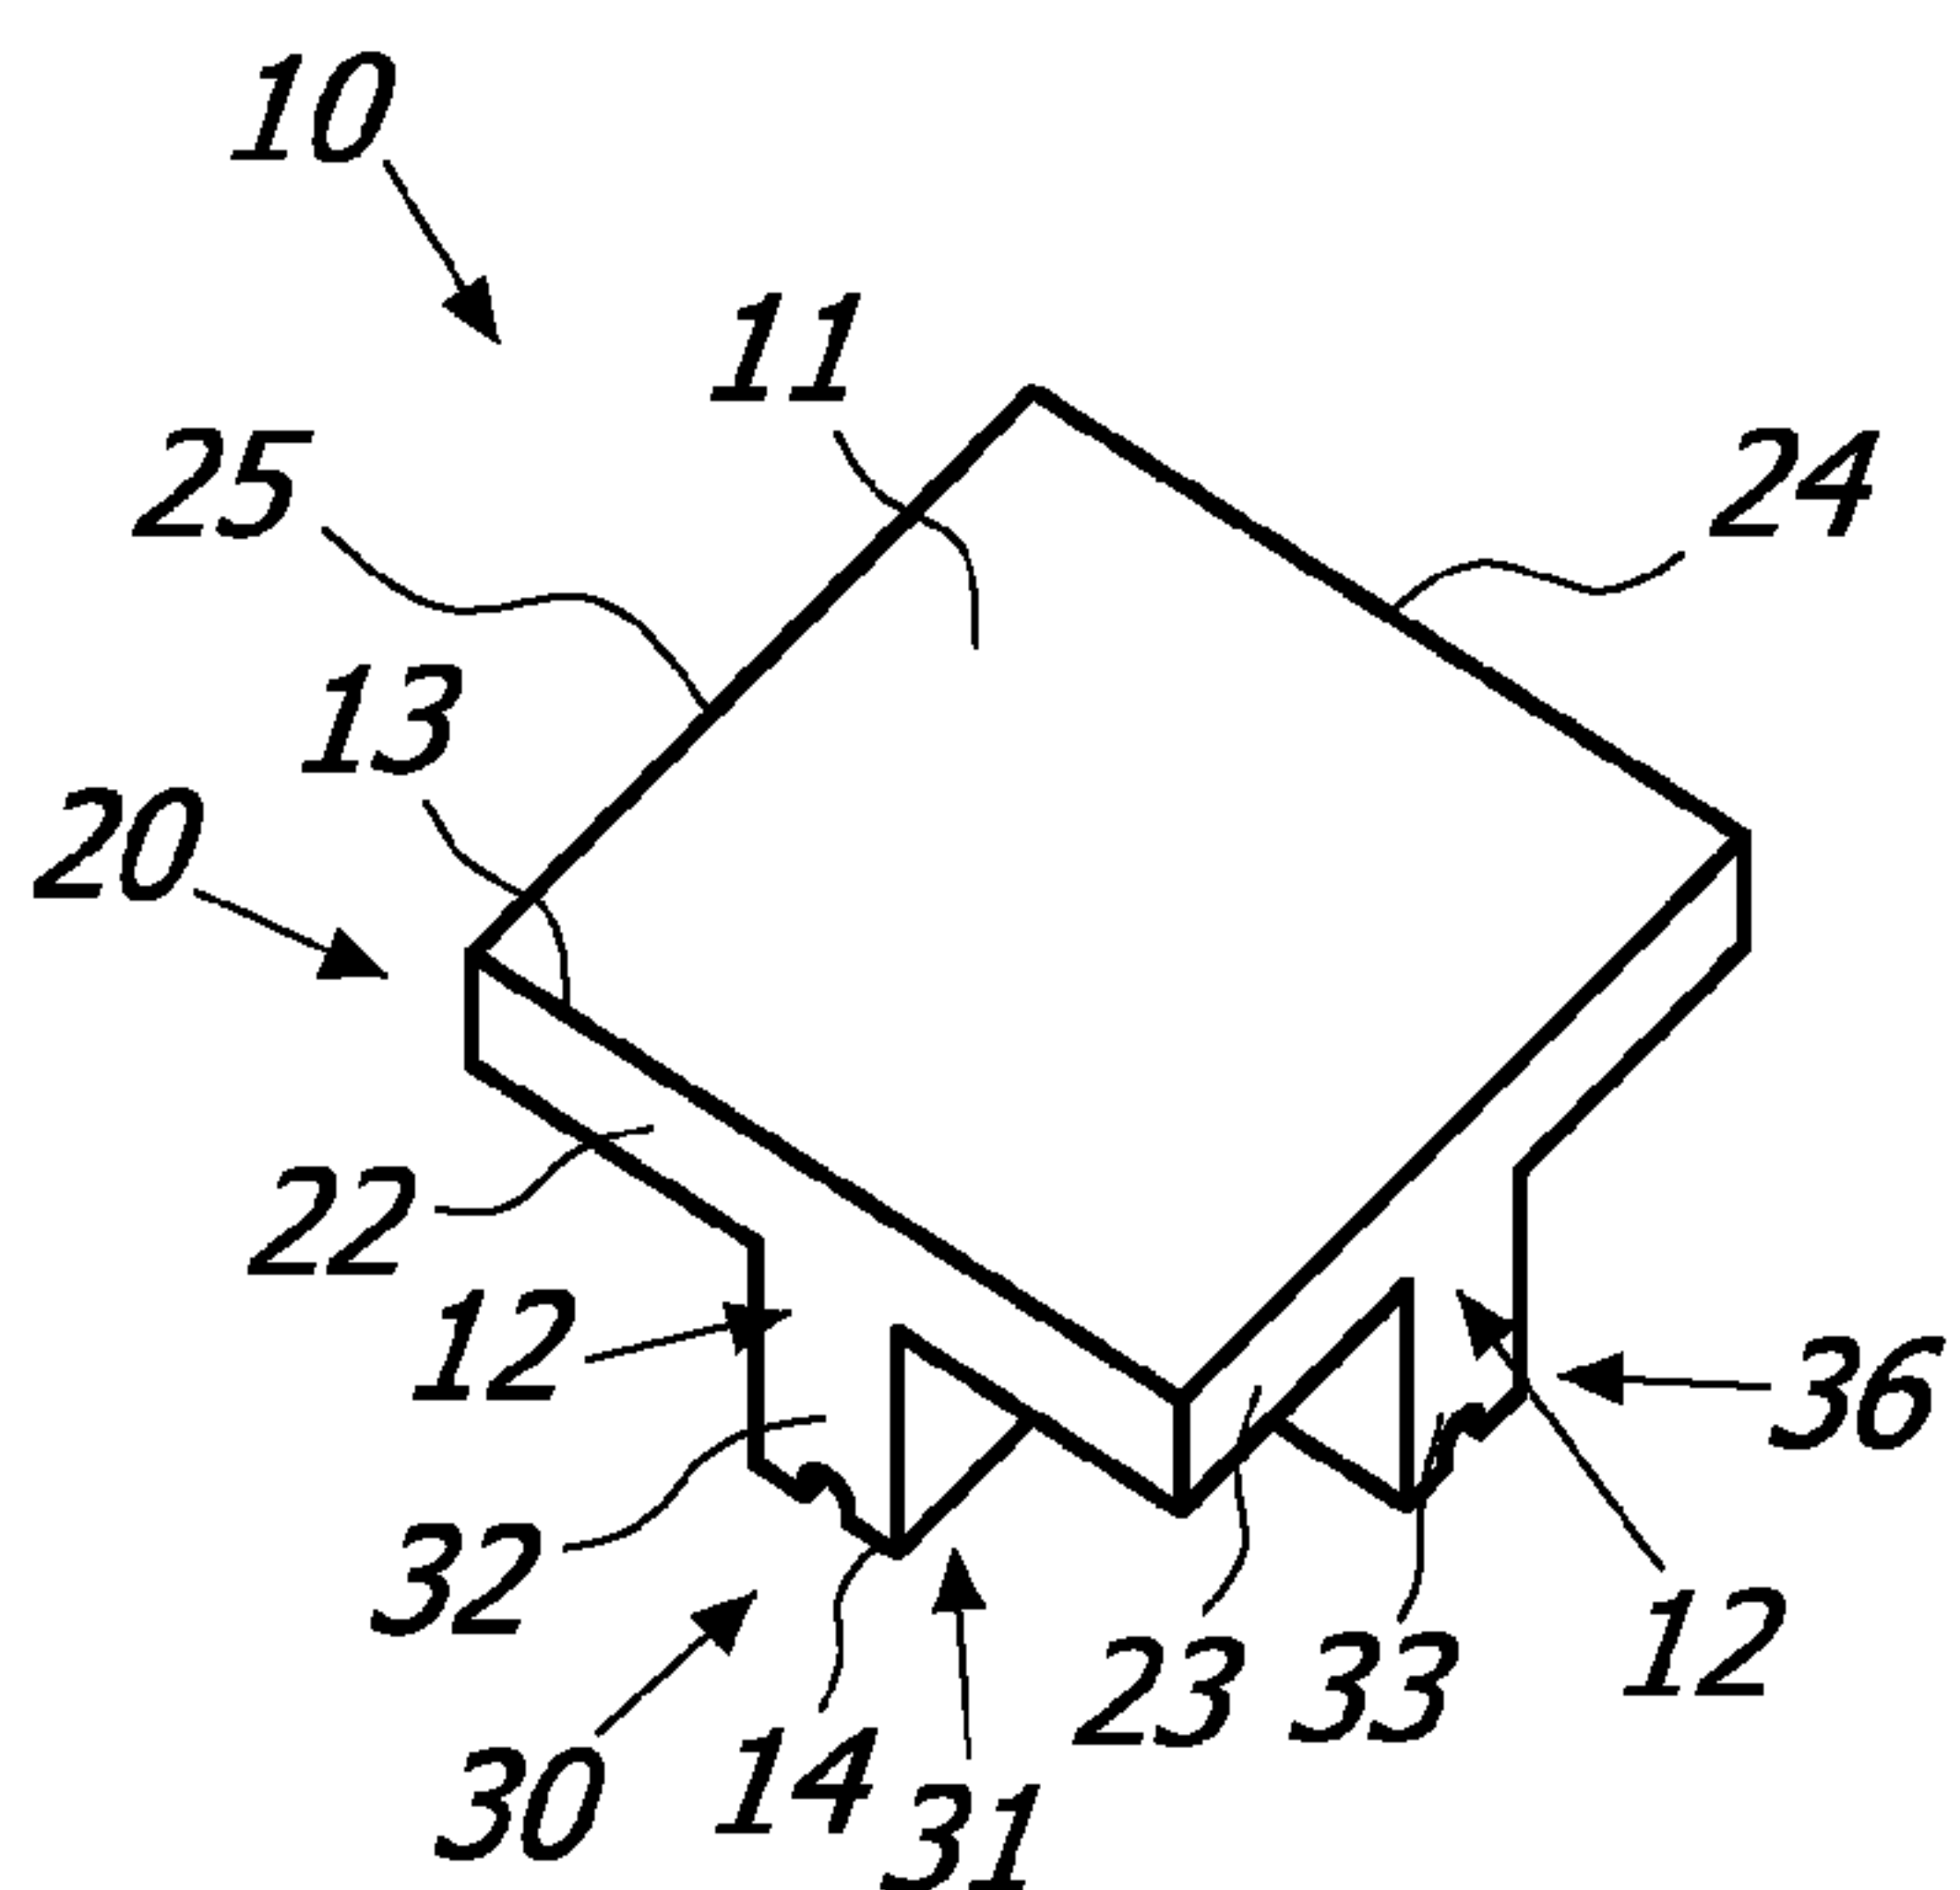


FIG. 11A

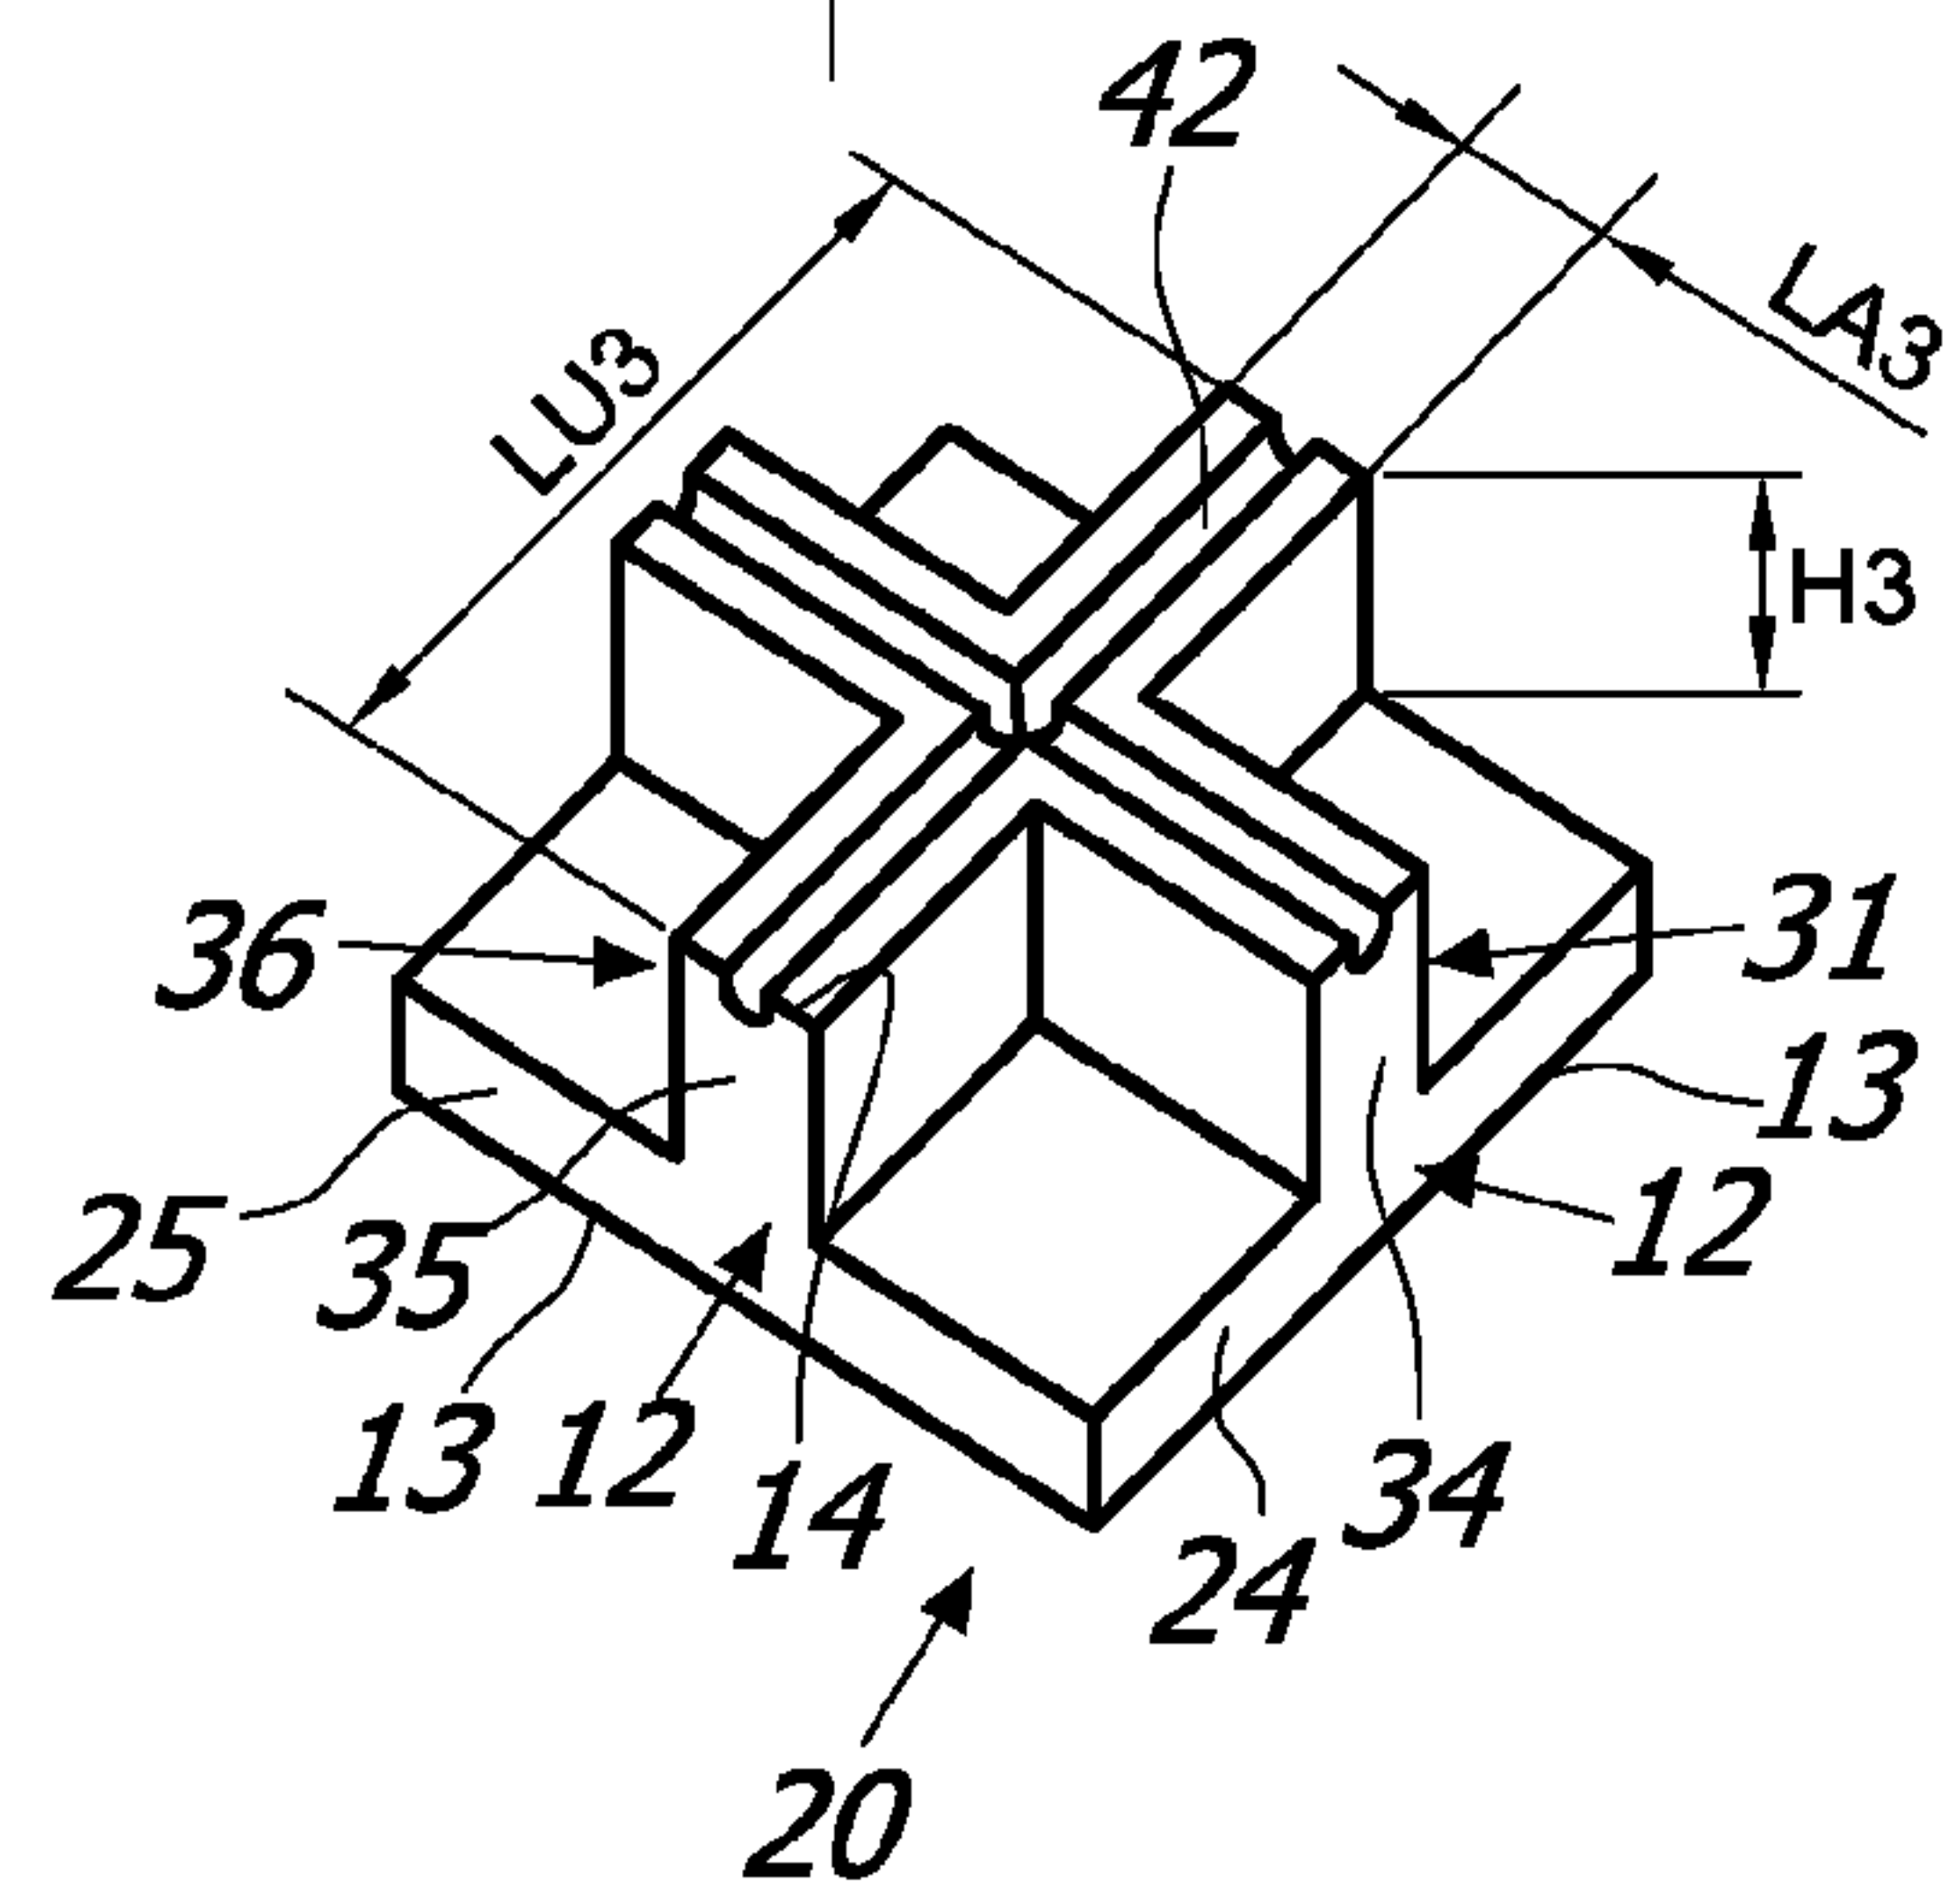


FIG. 11B

6 / 24

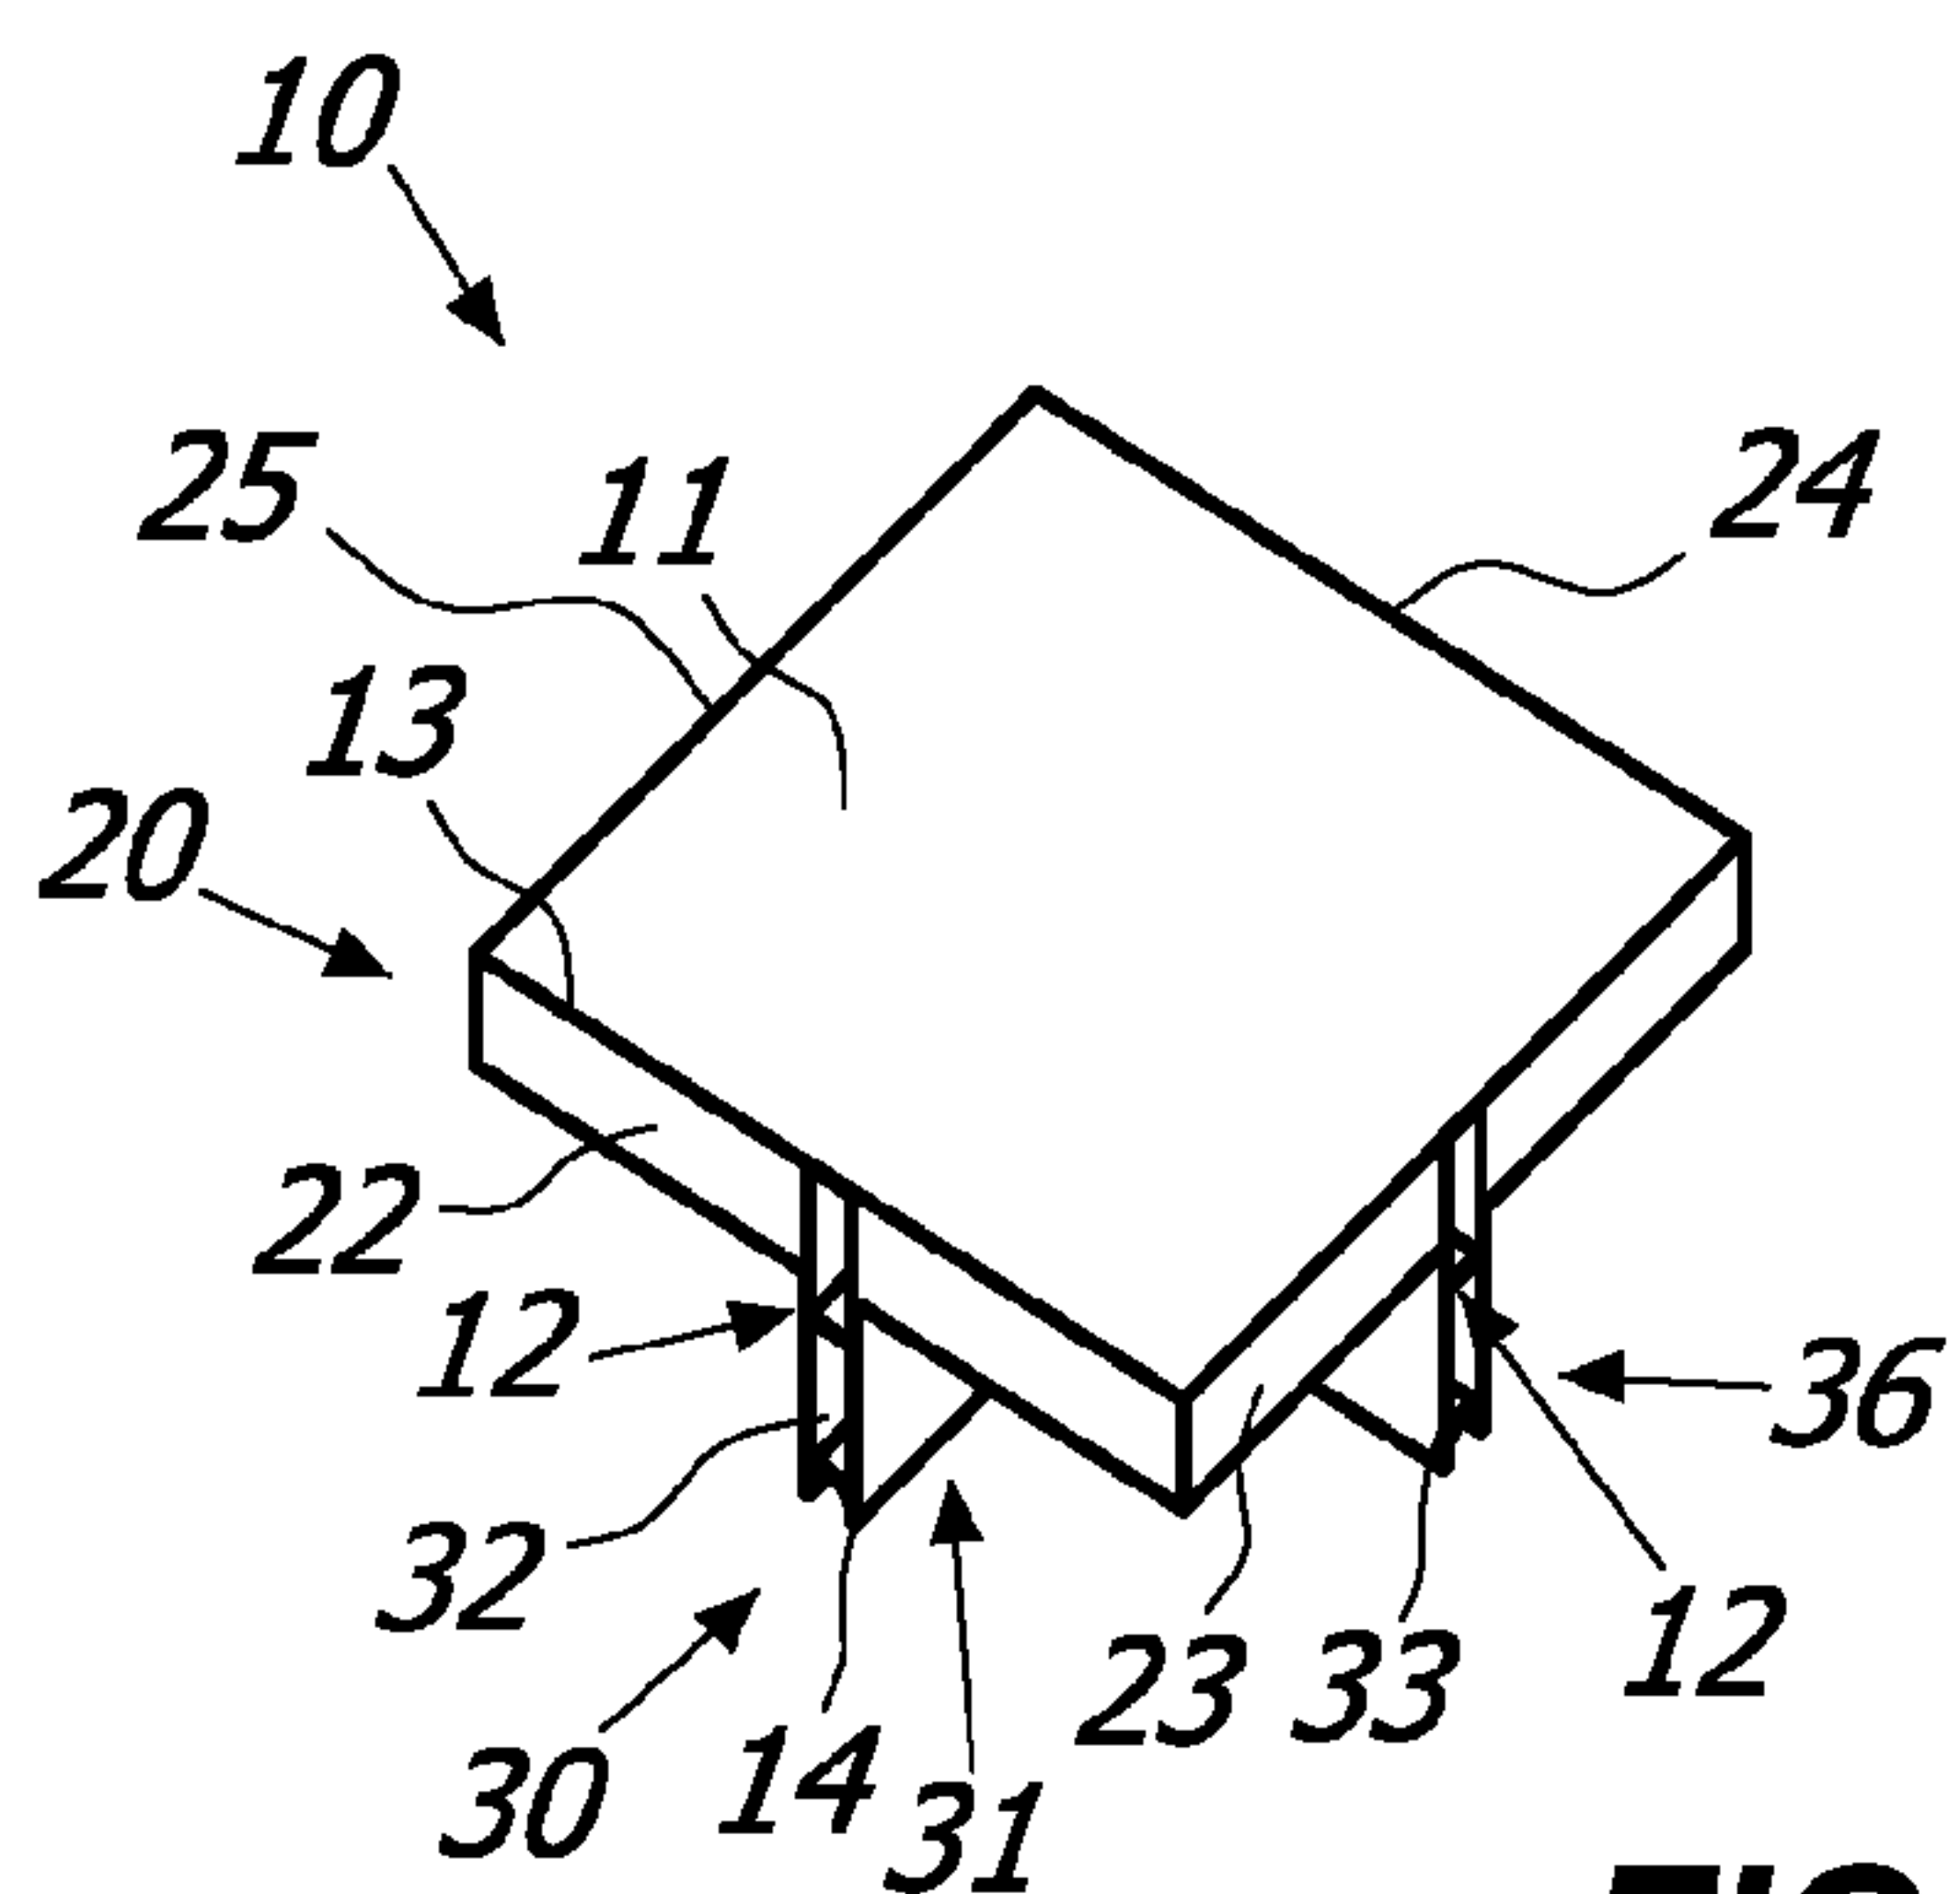


FIG. 12A

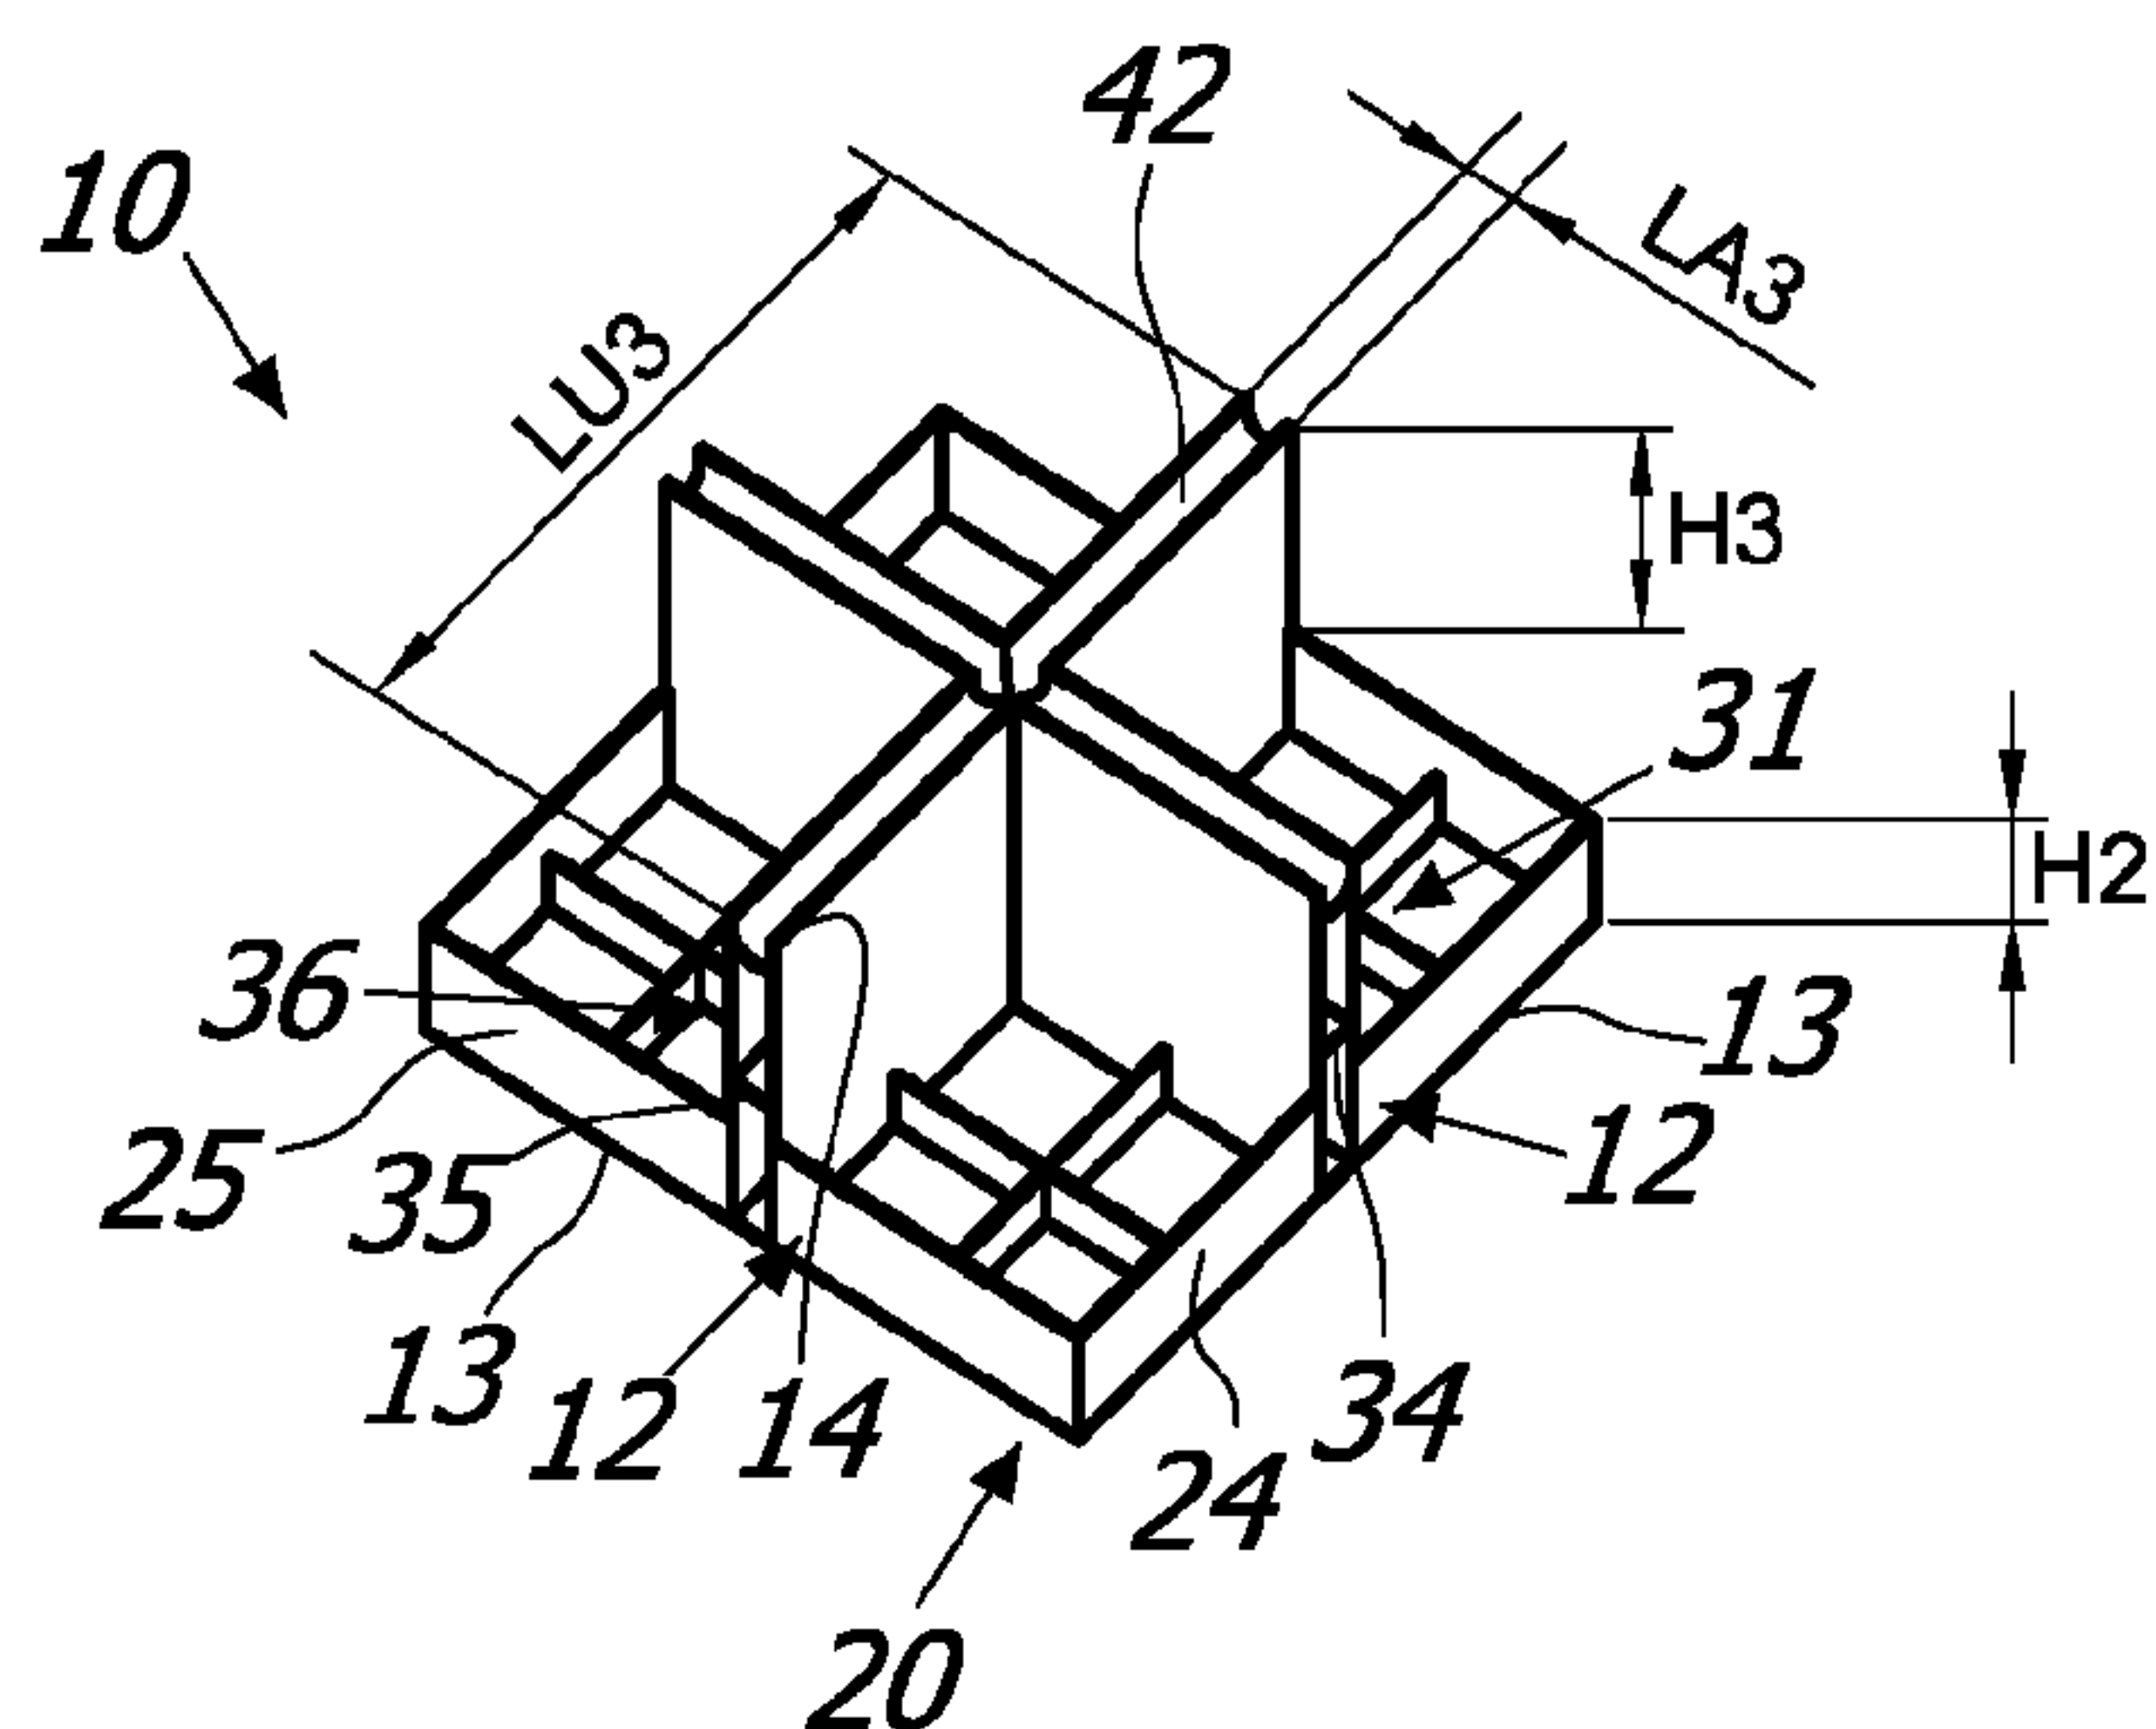


FIG. 12B

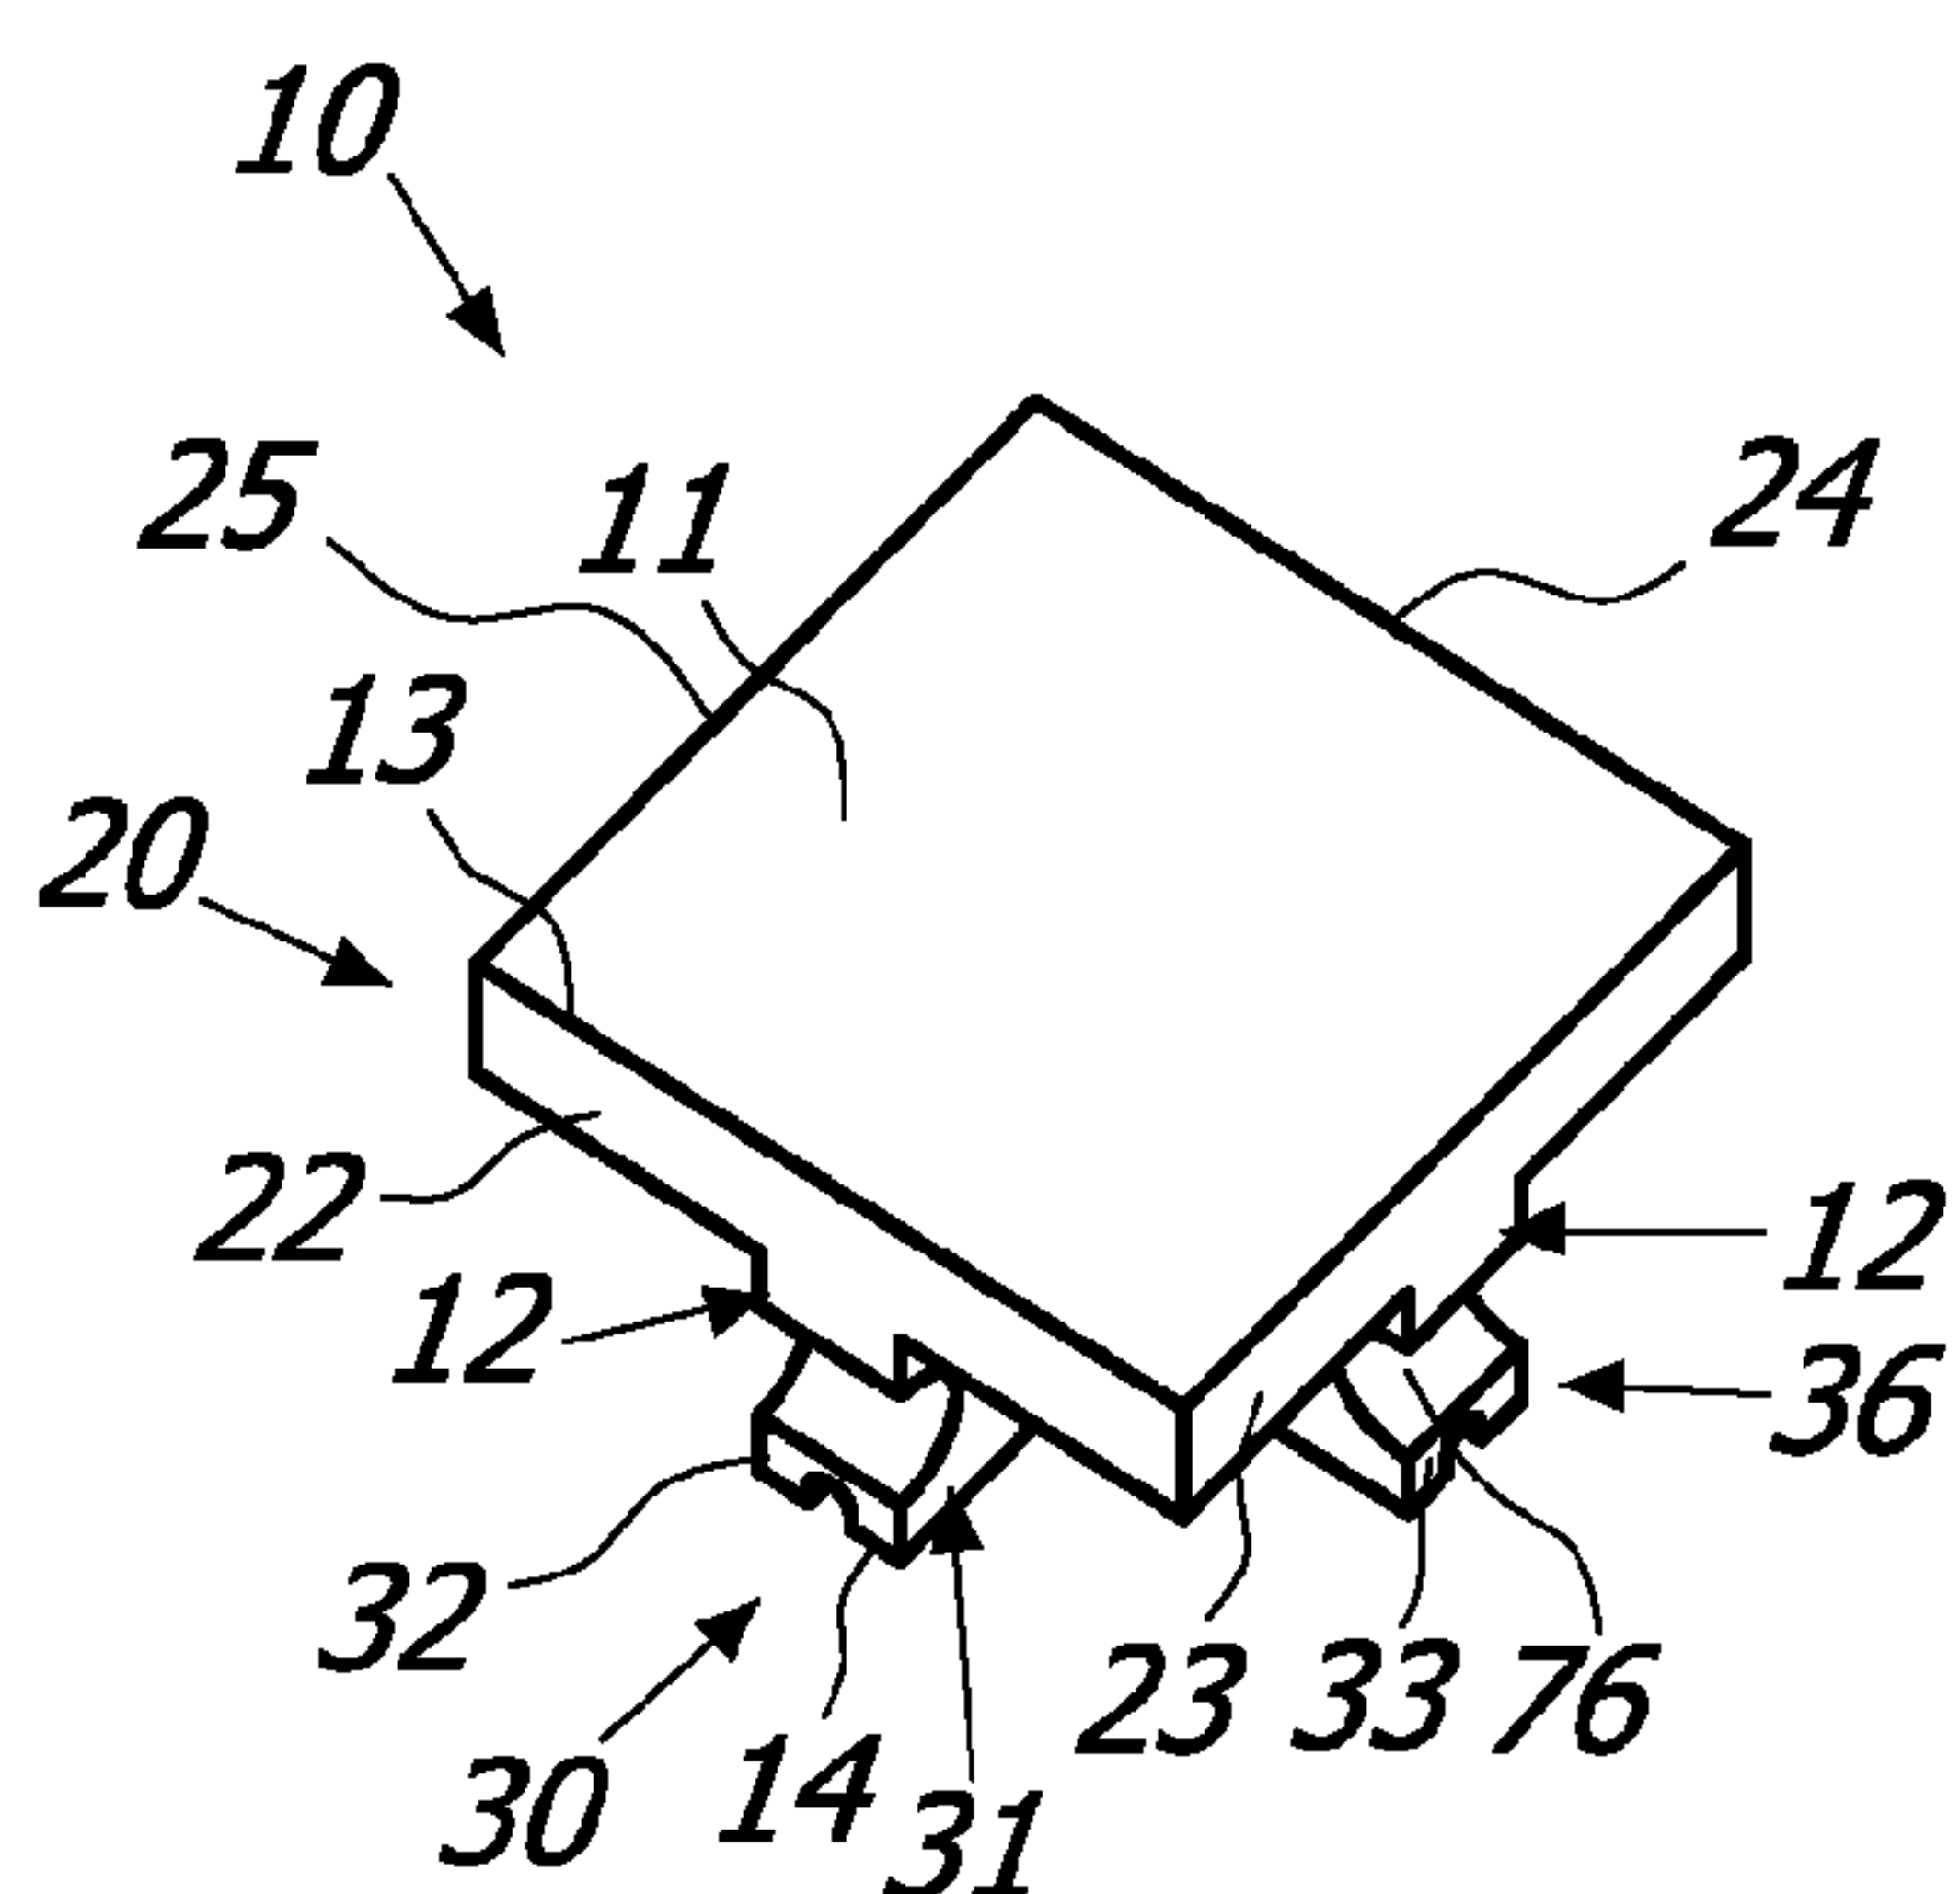


FIG. 13A

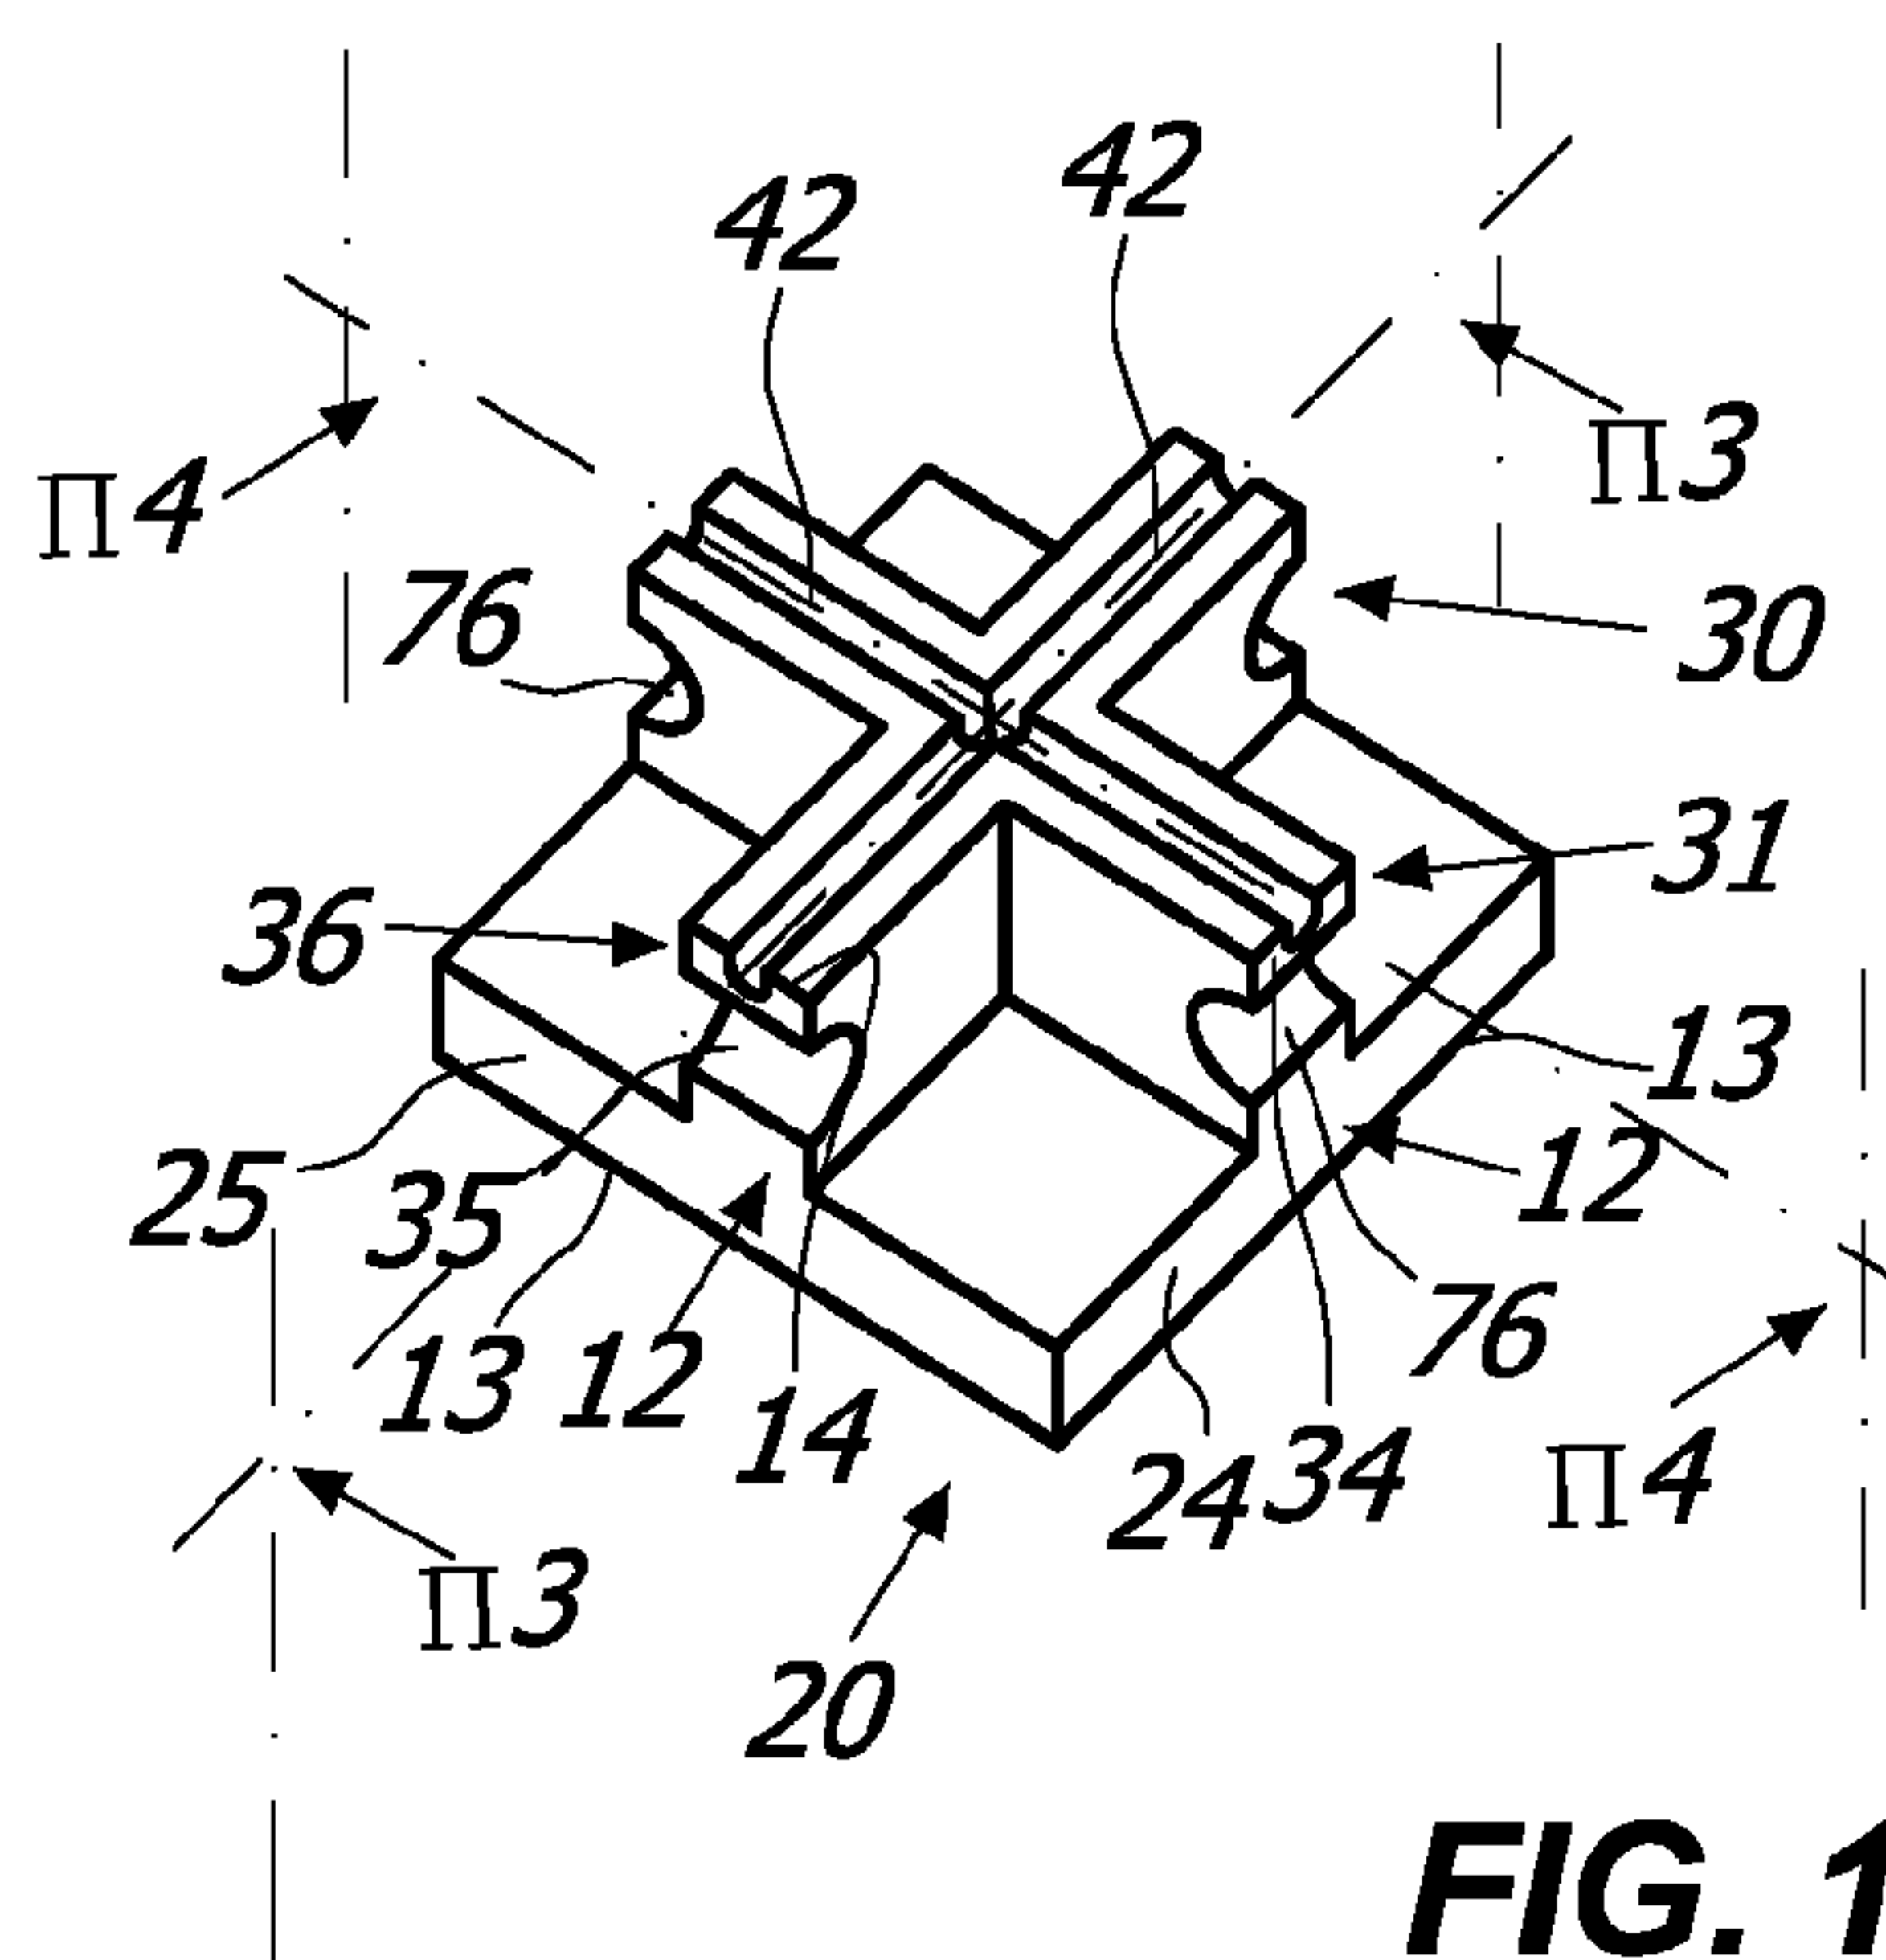


FIG. 13B

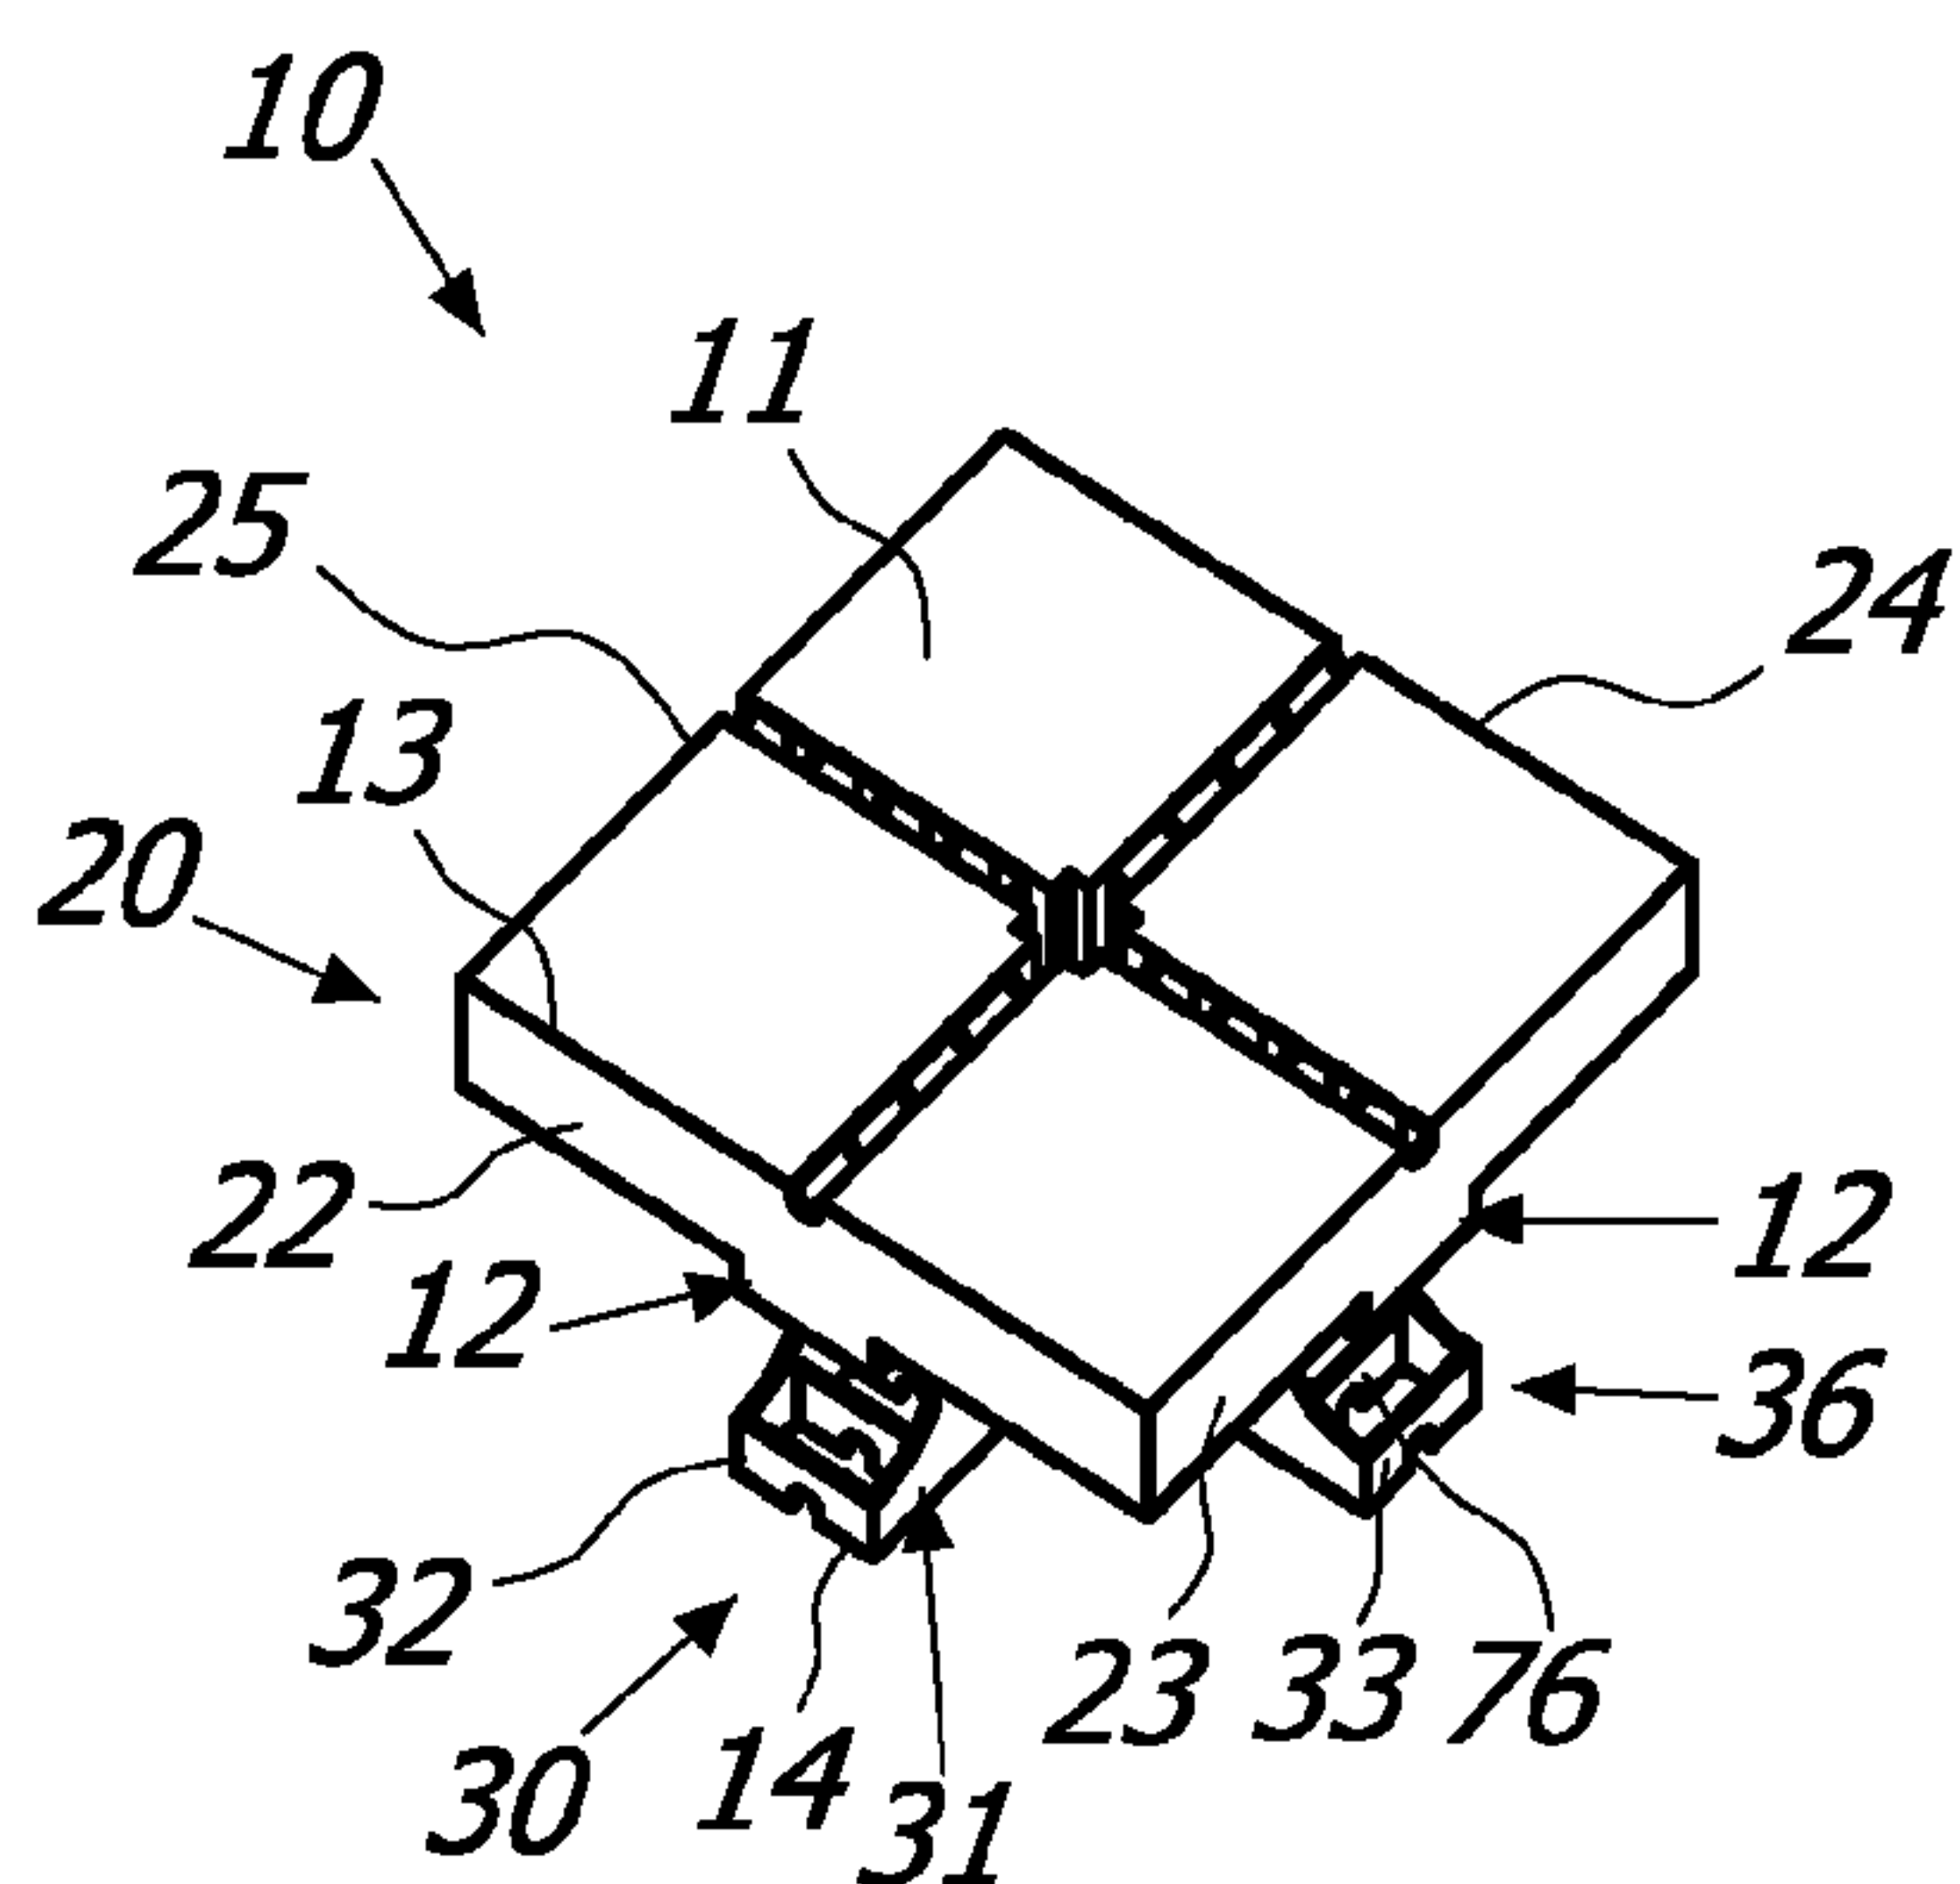


FIG. 14A

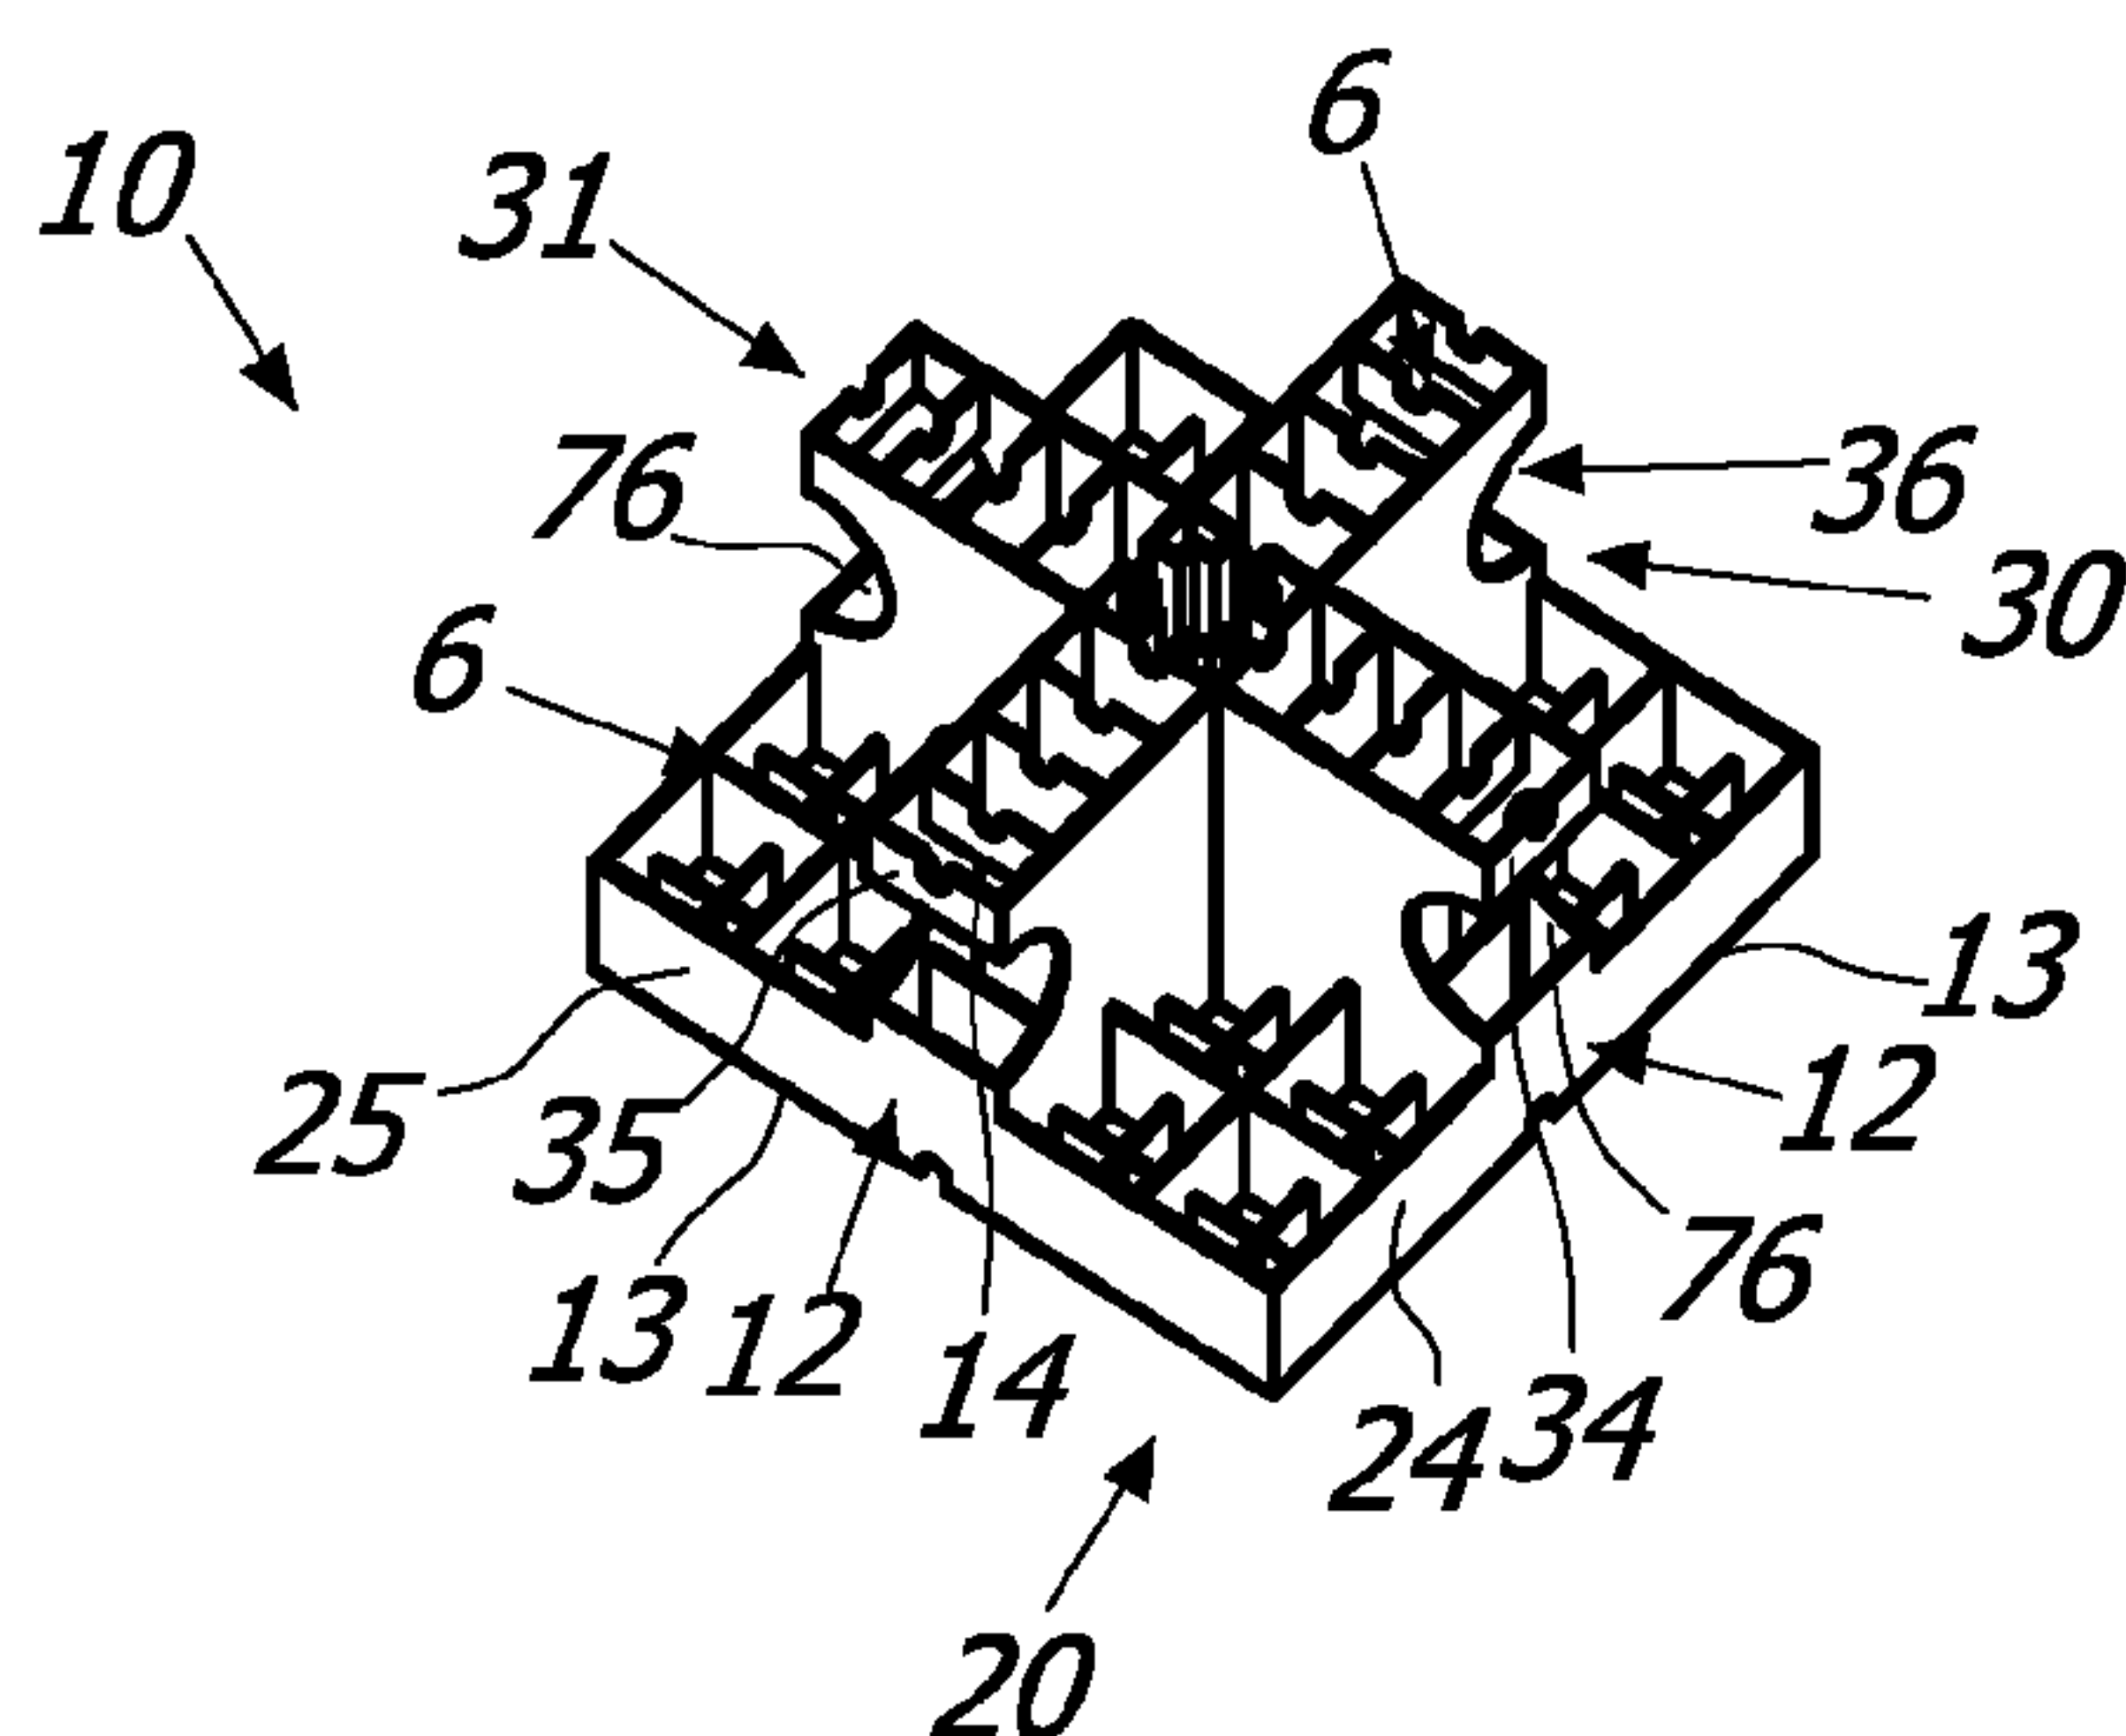
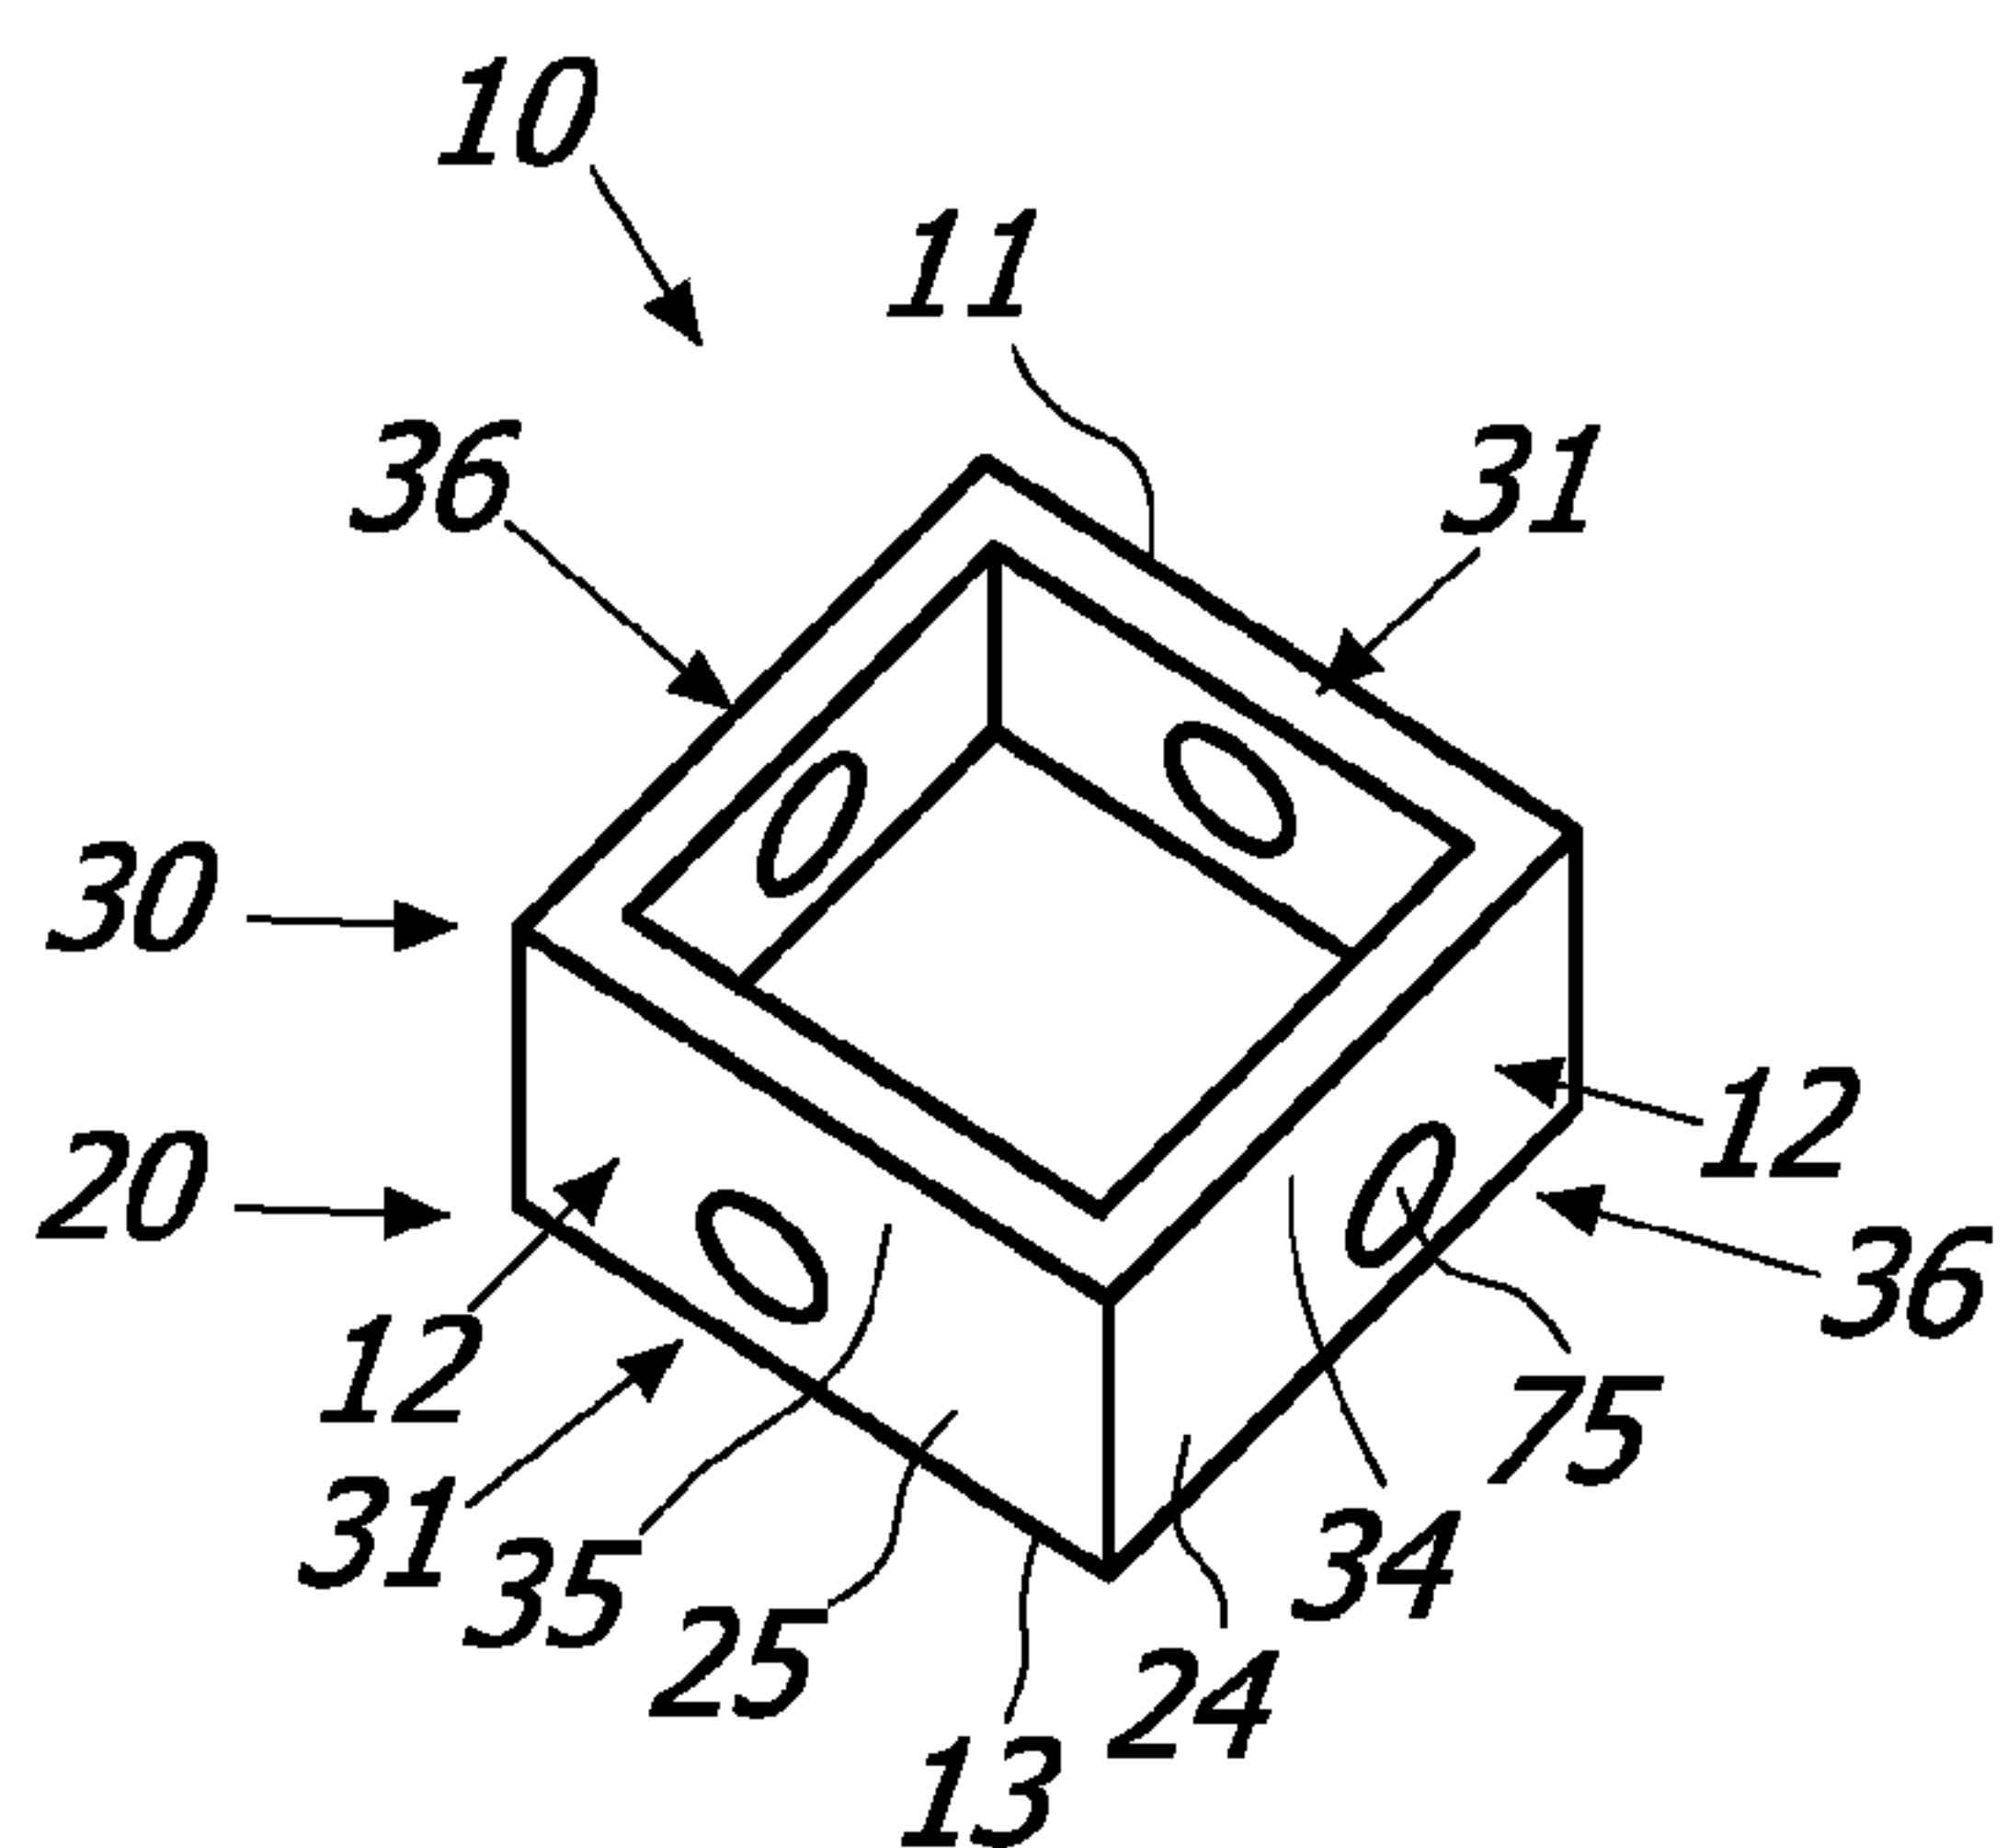
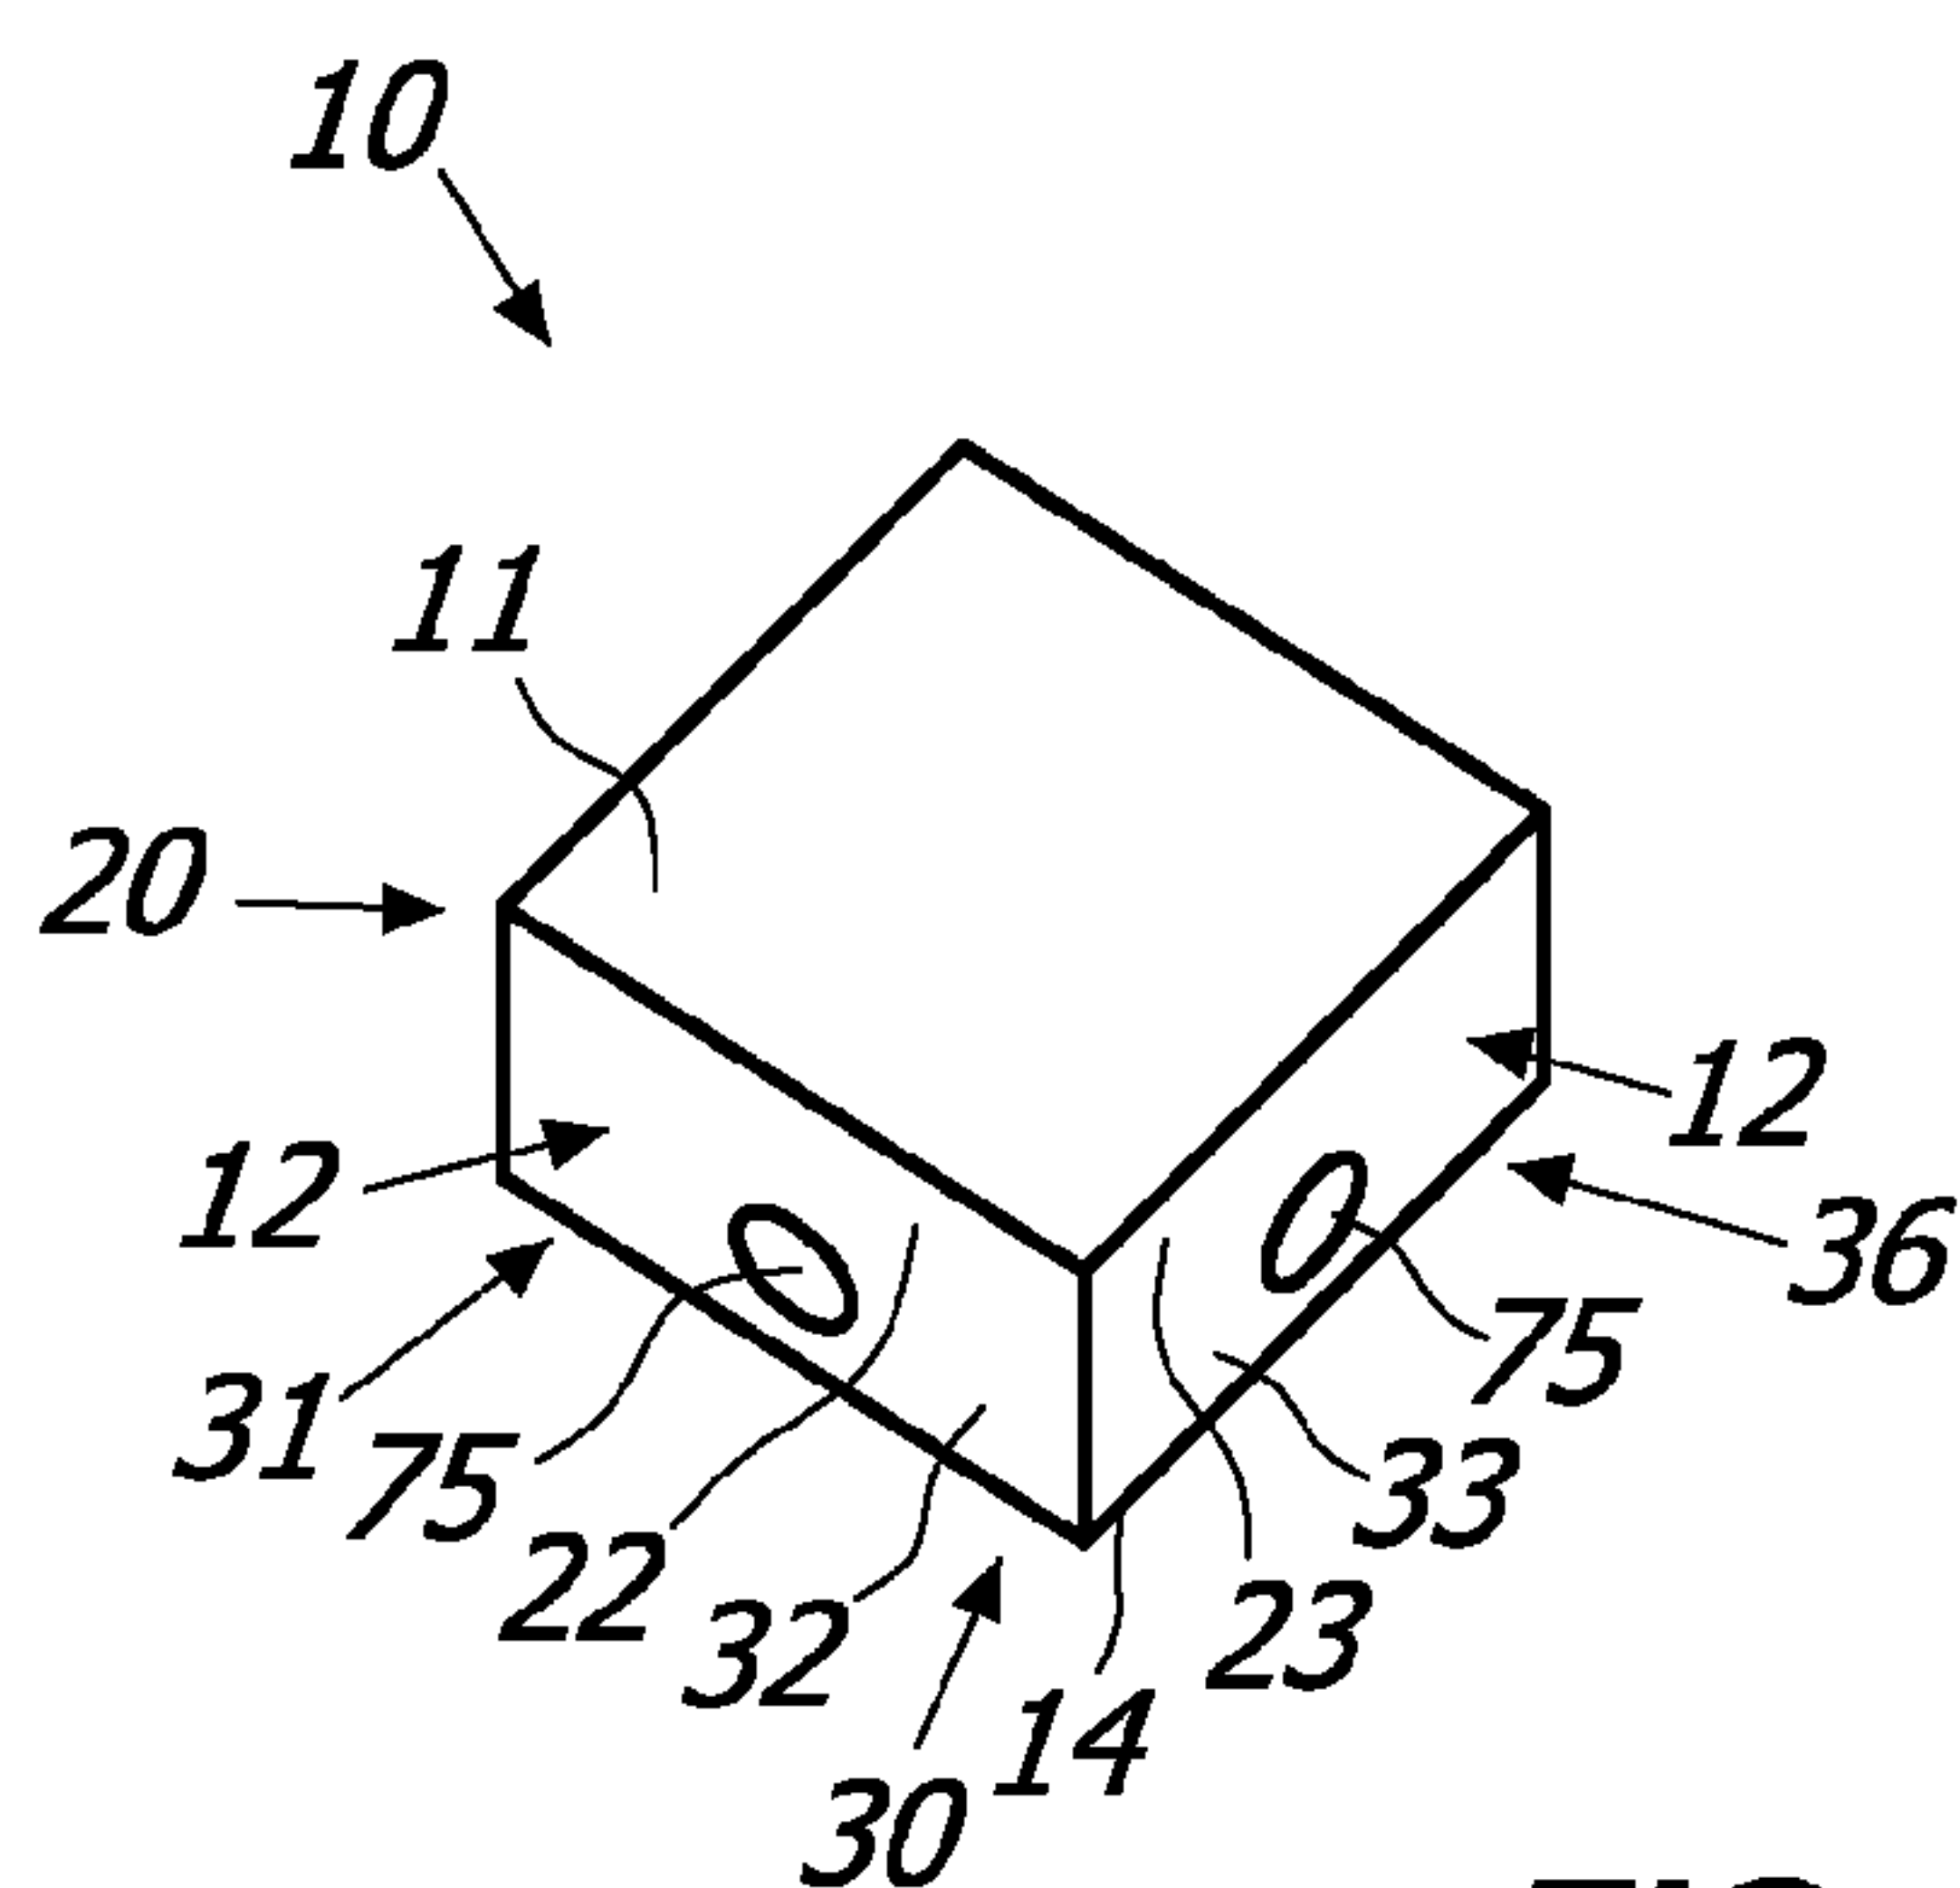
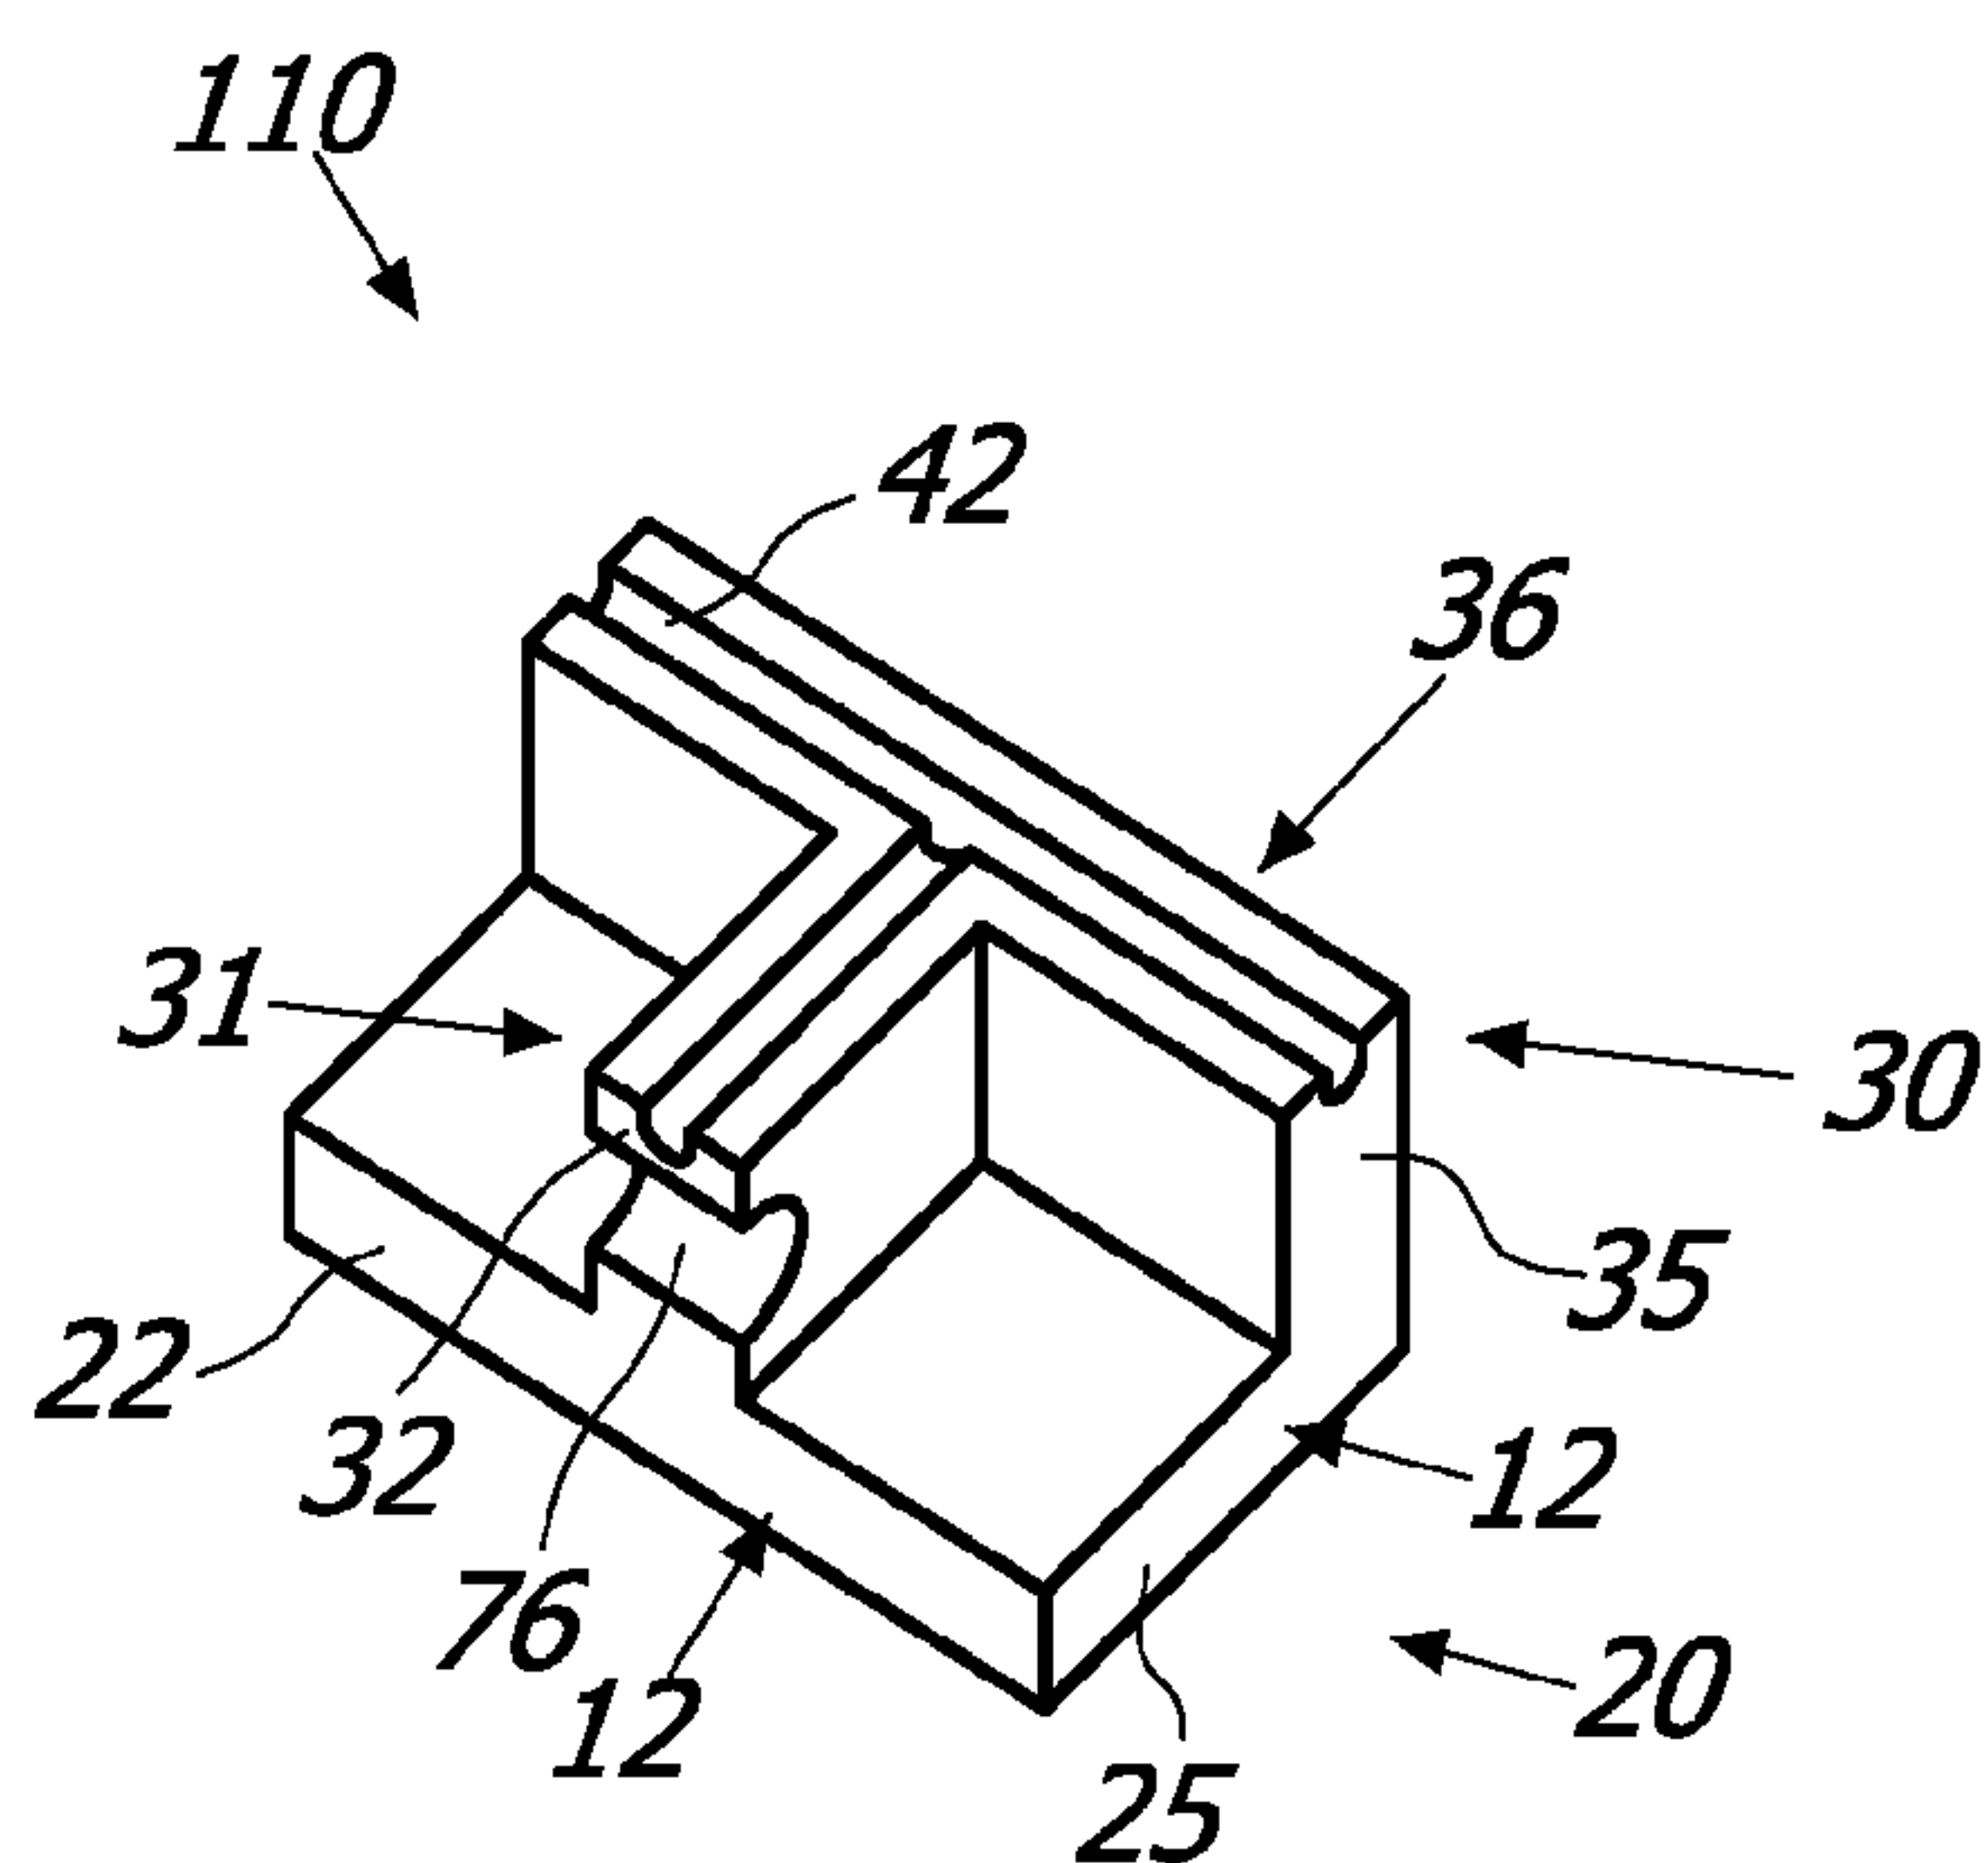
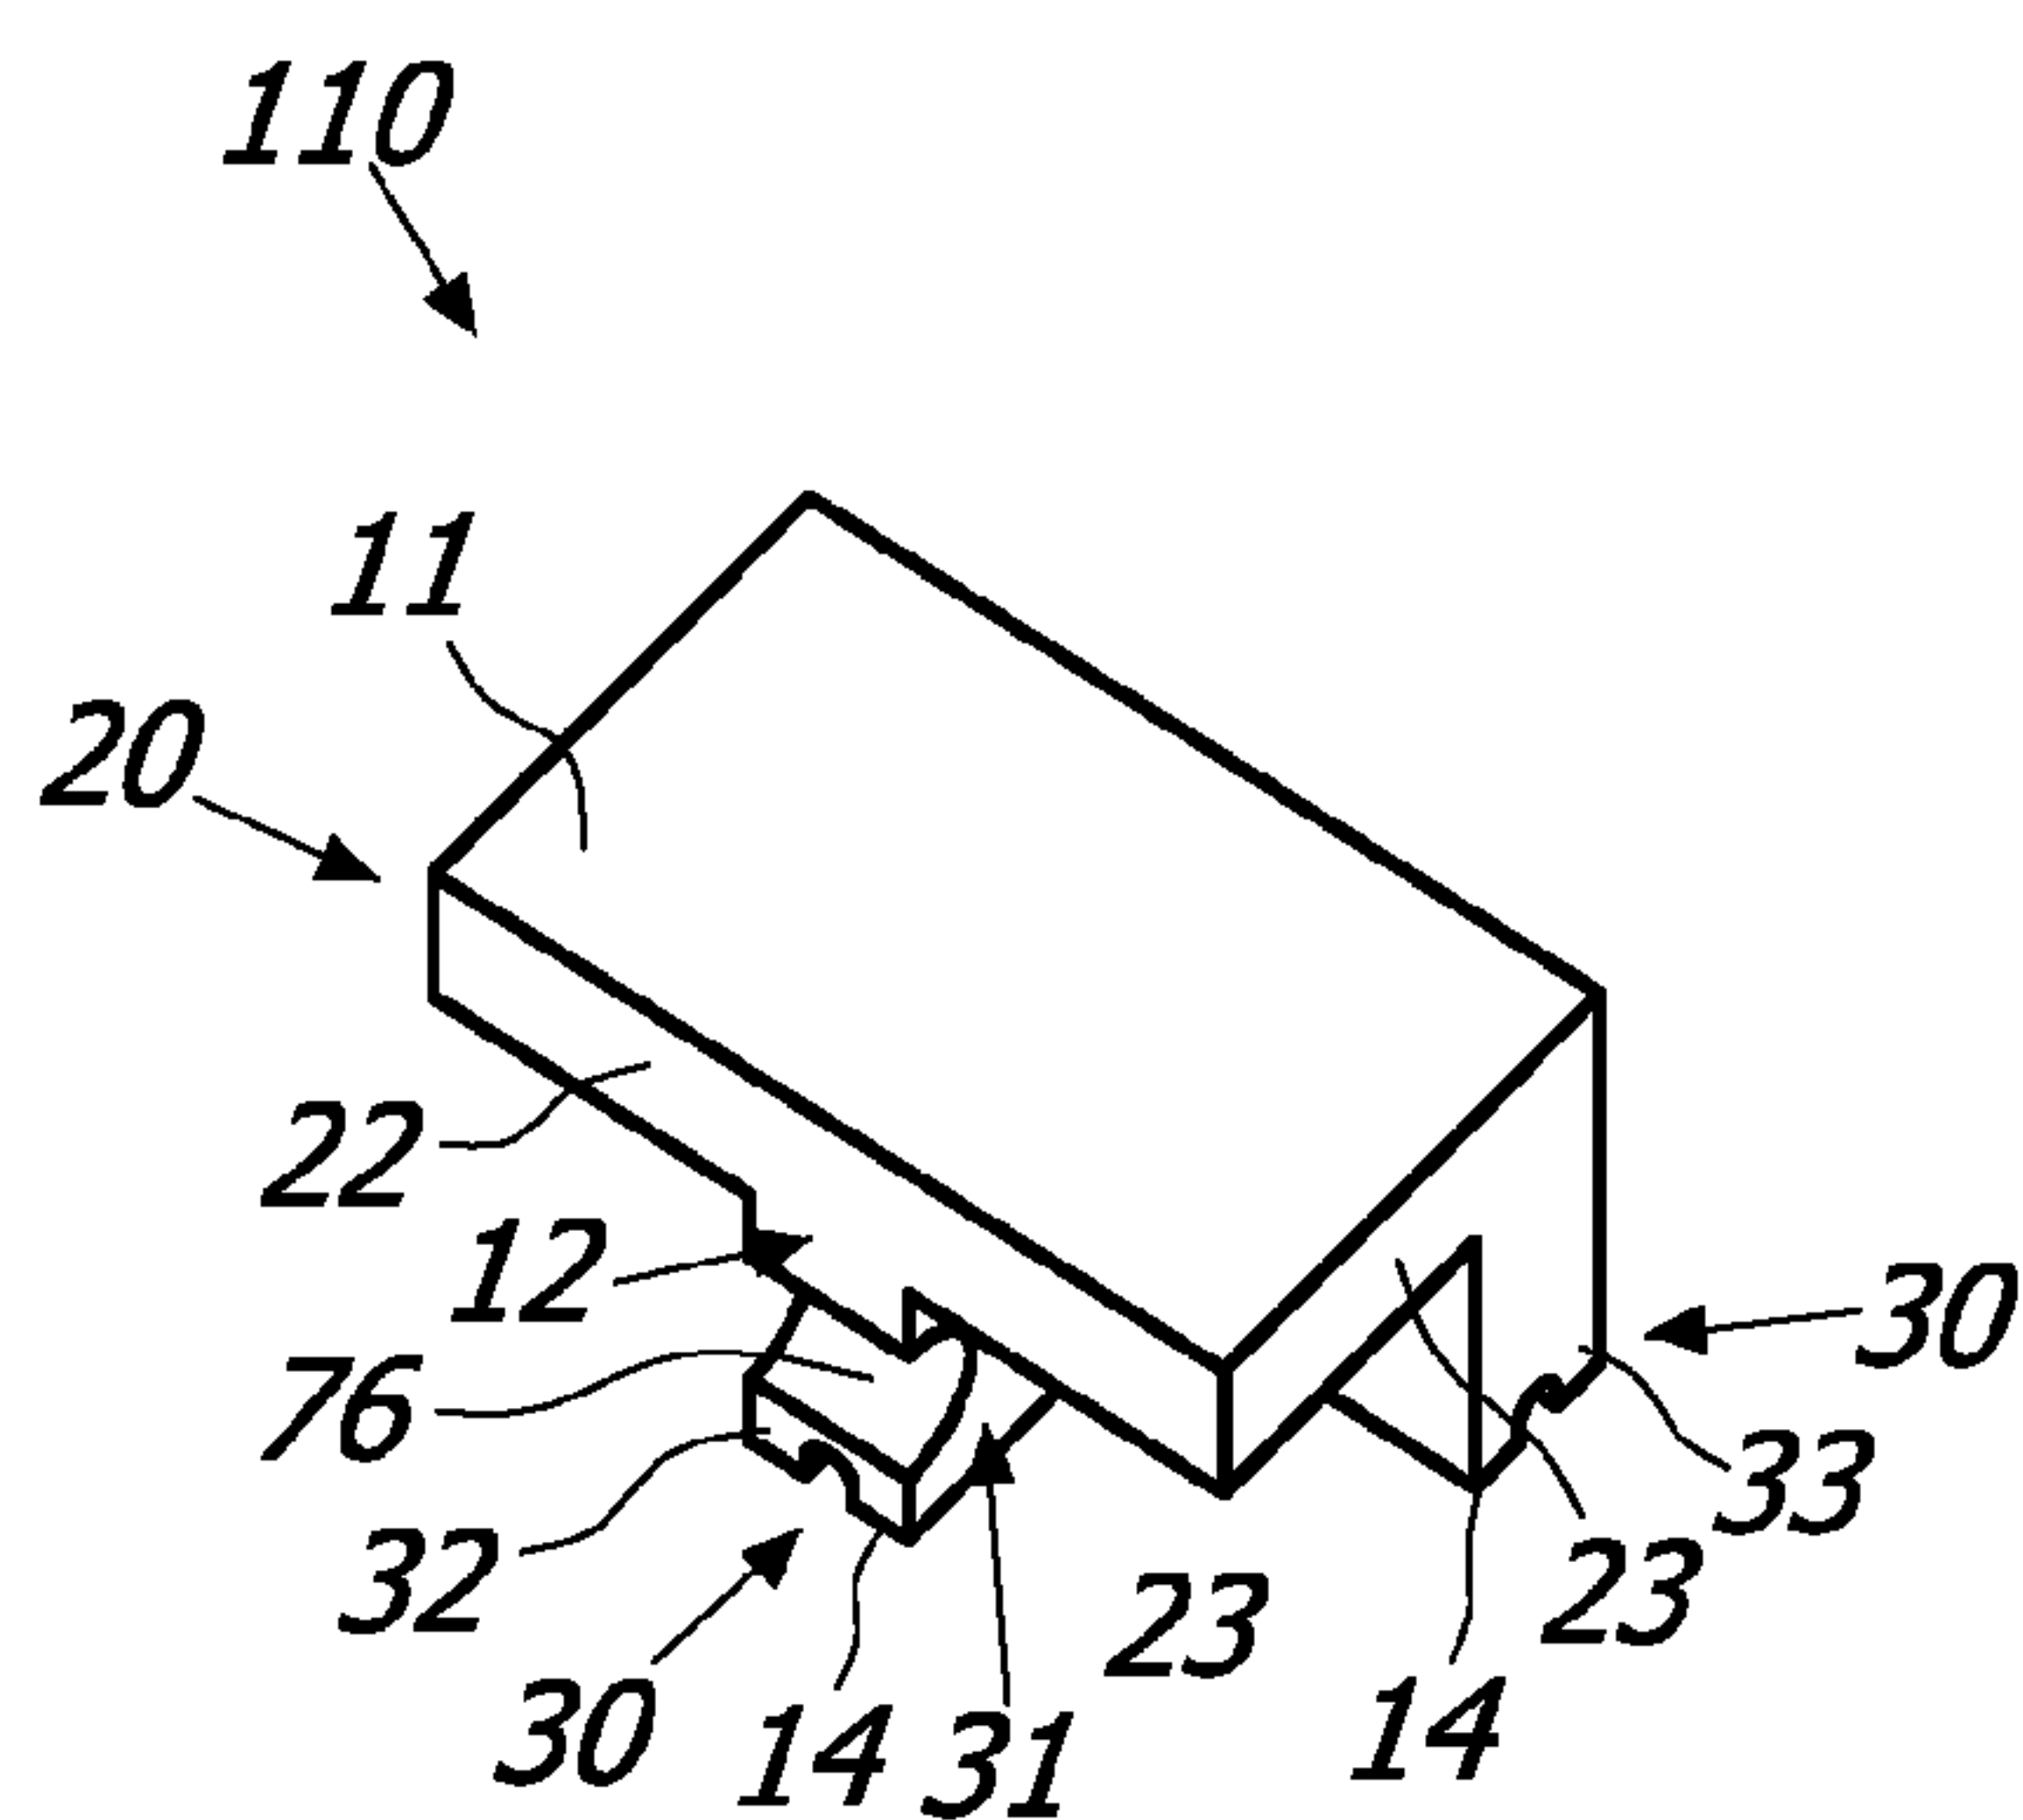
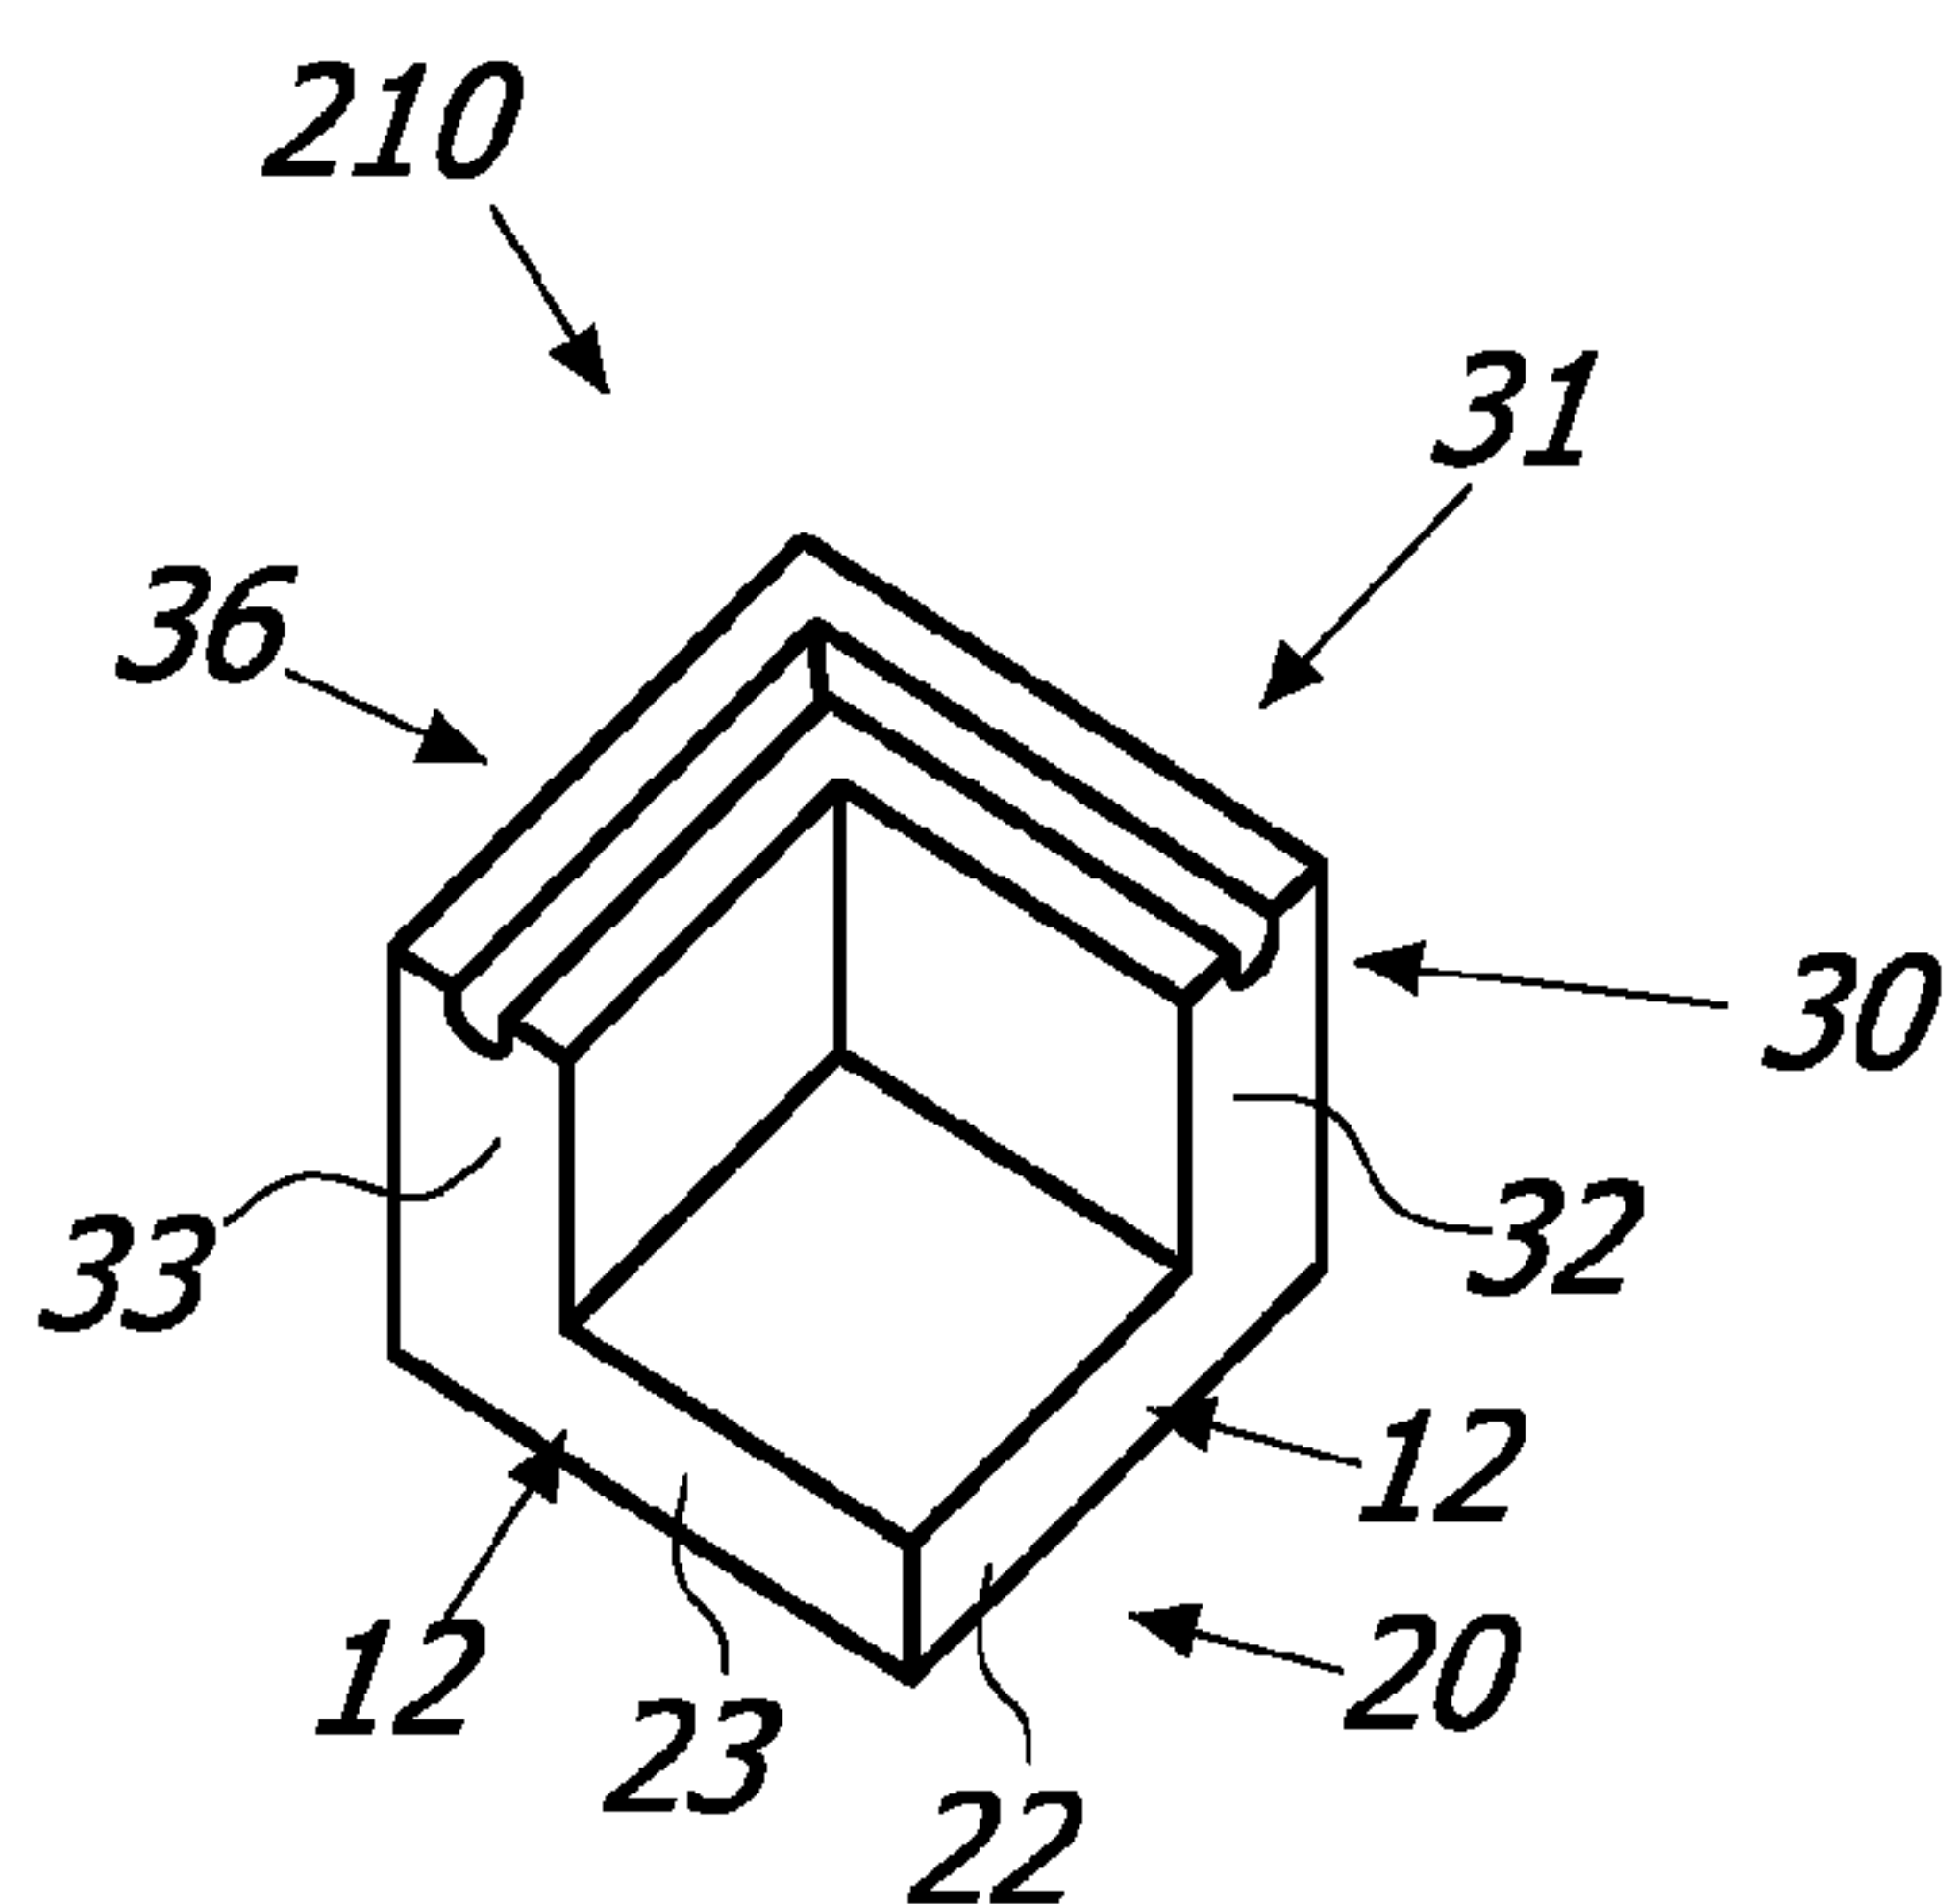
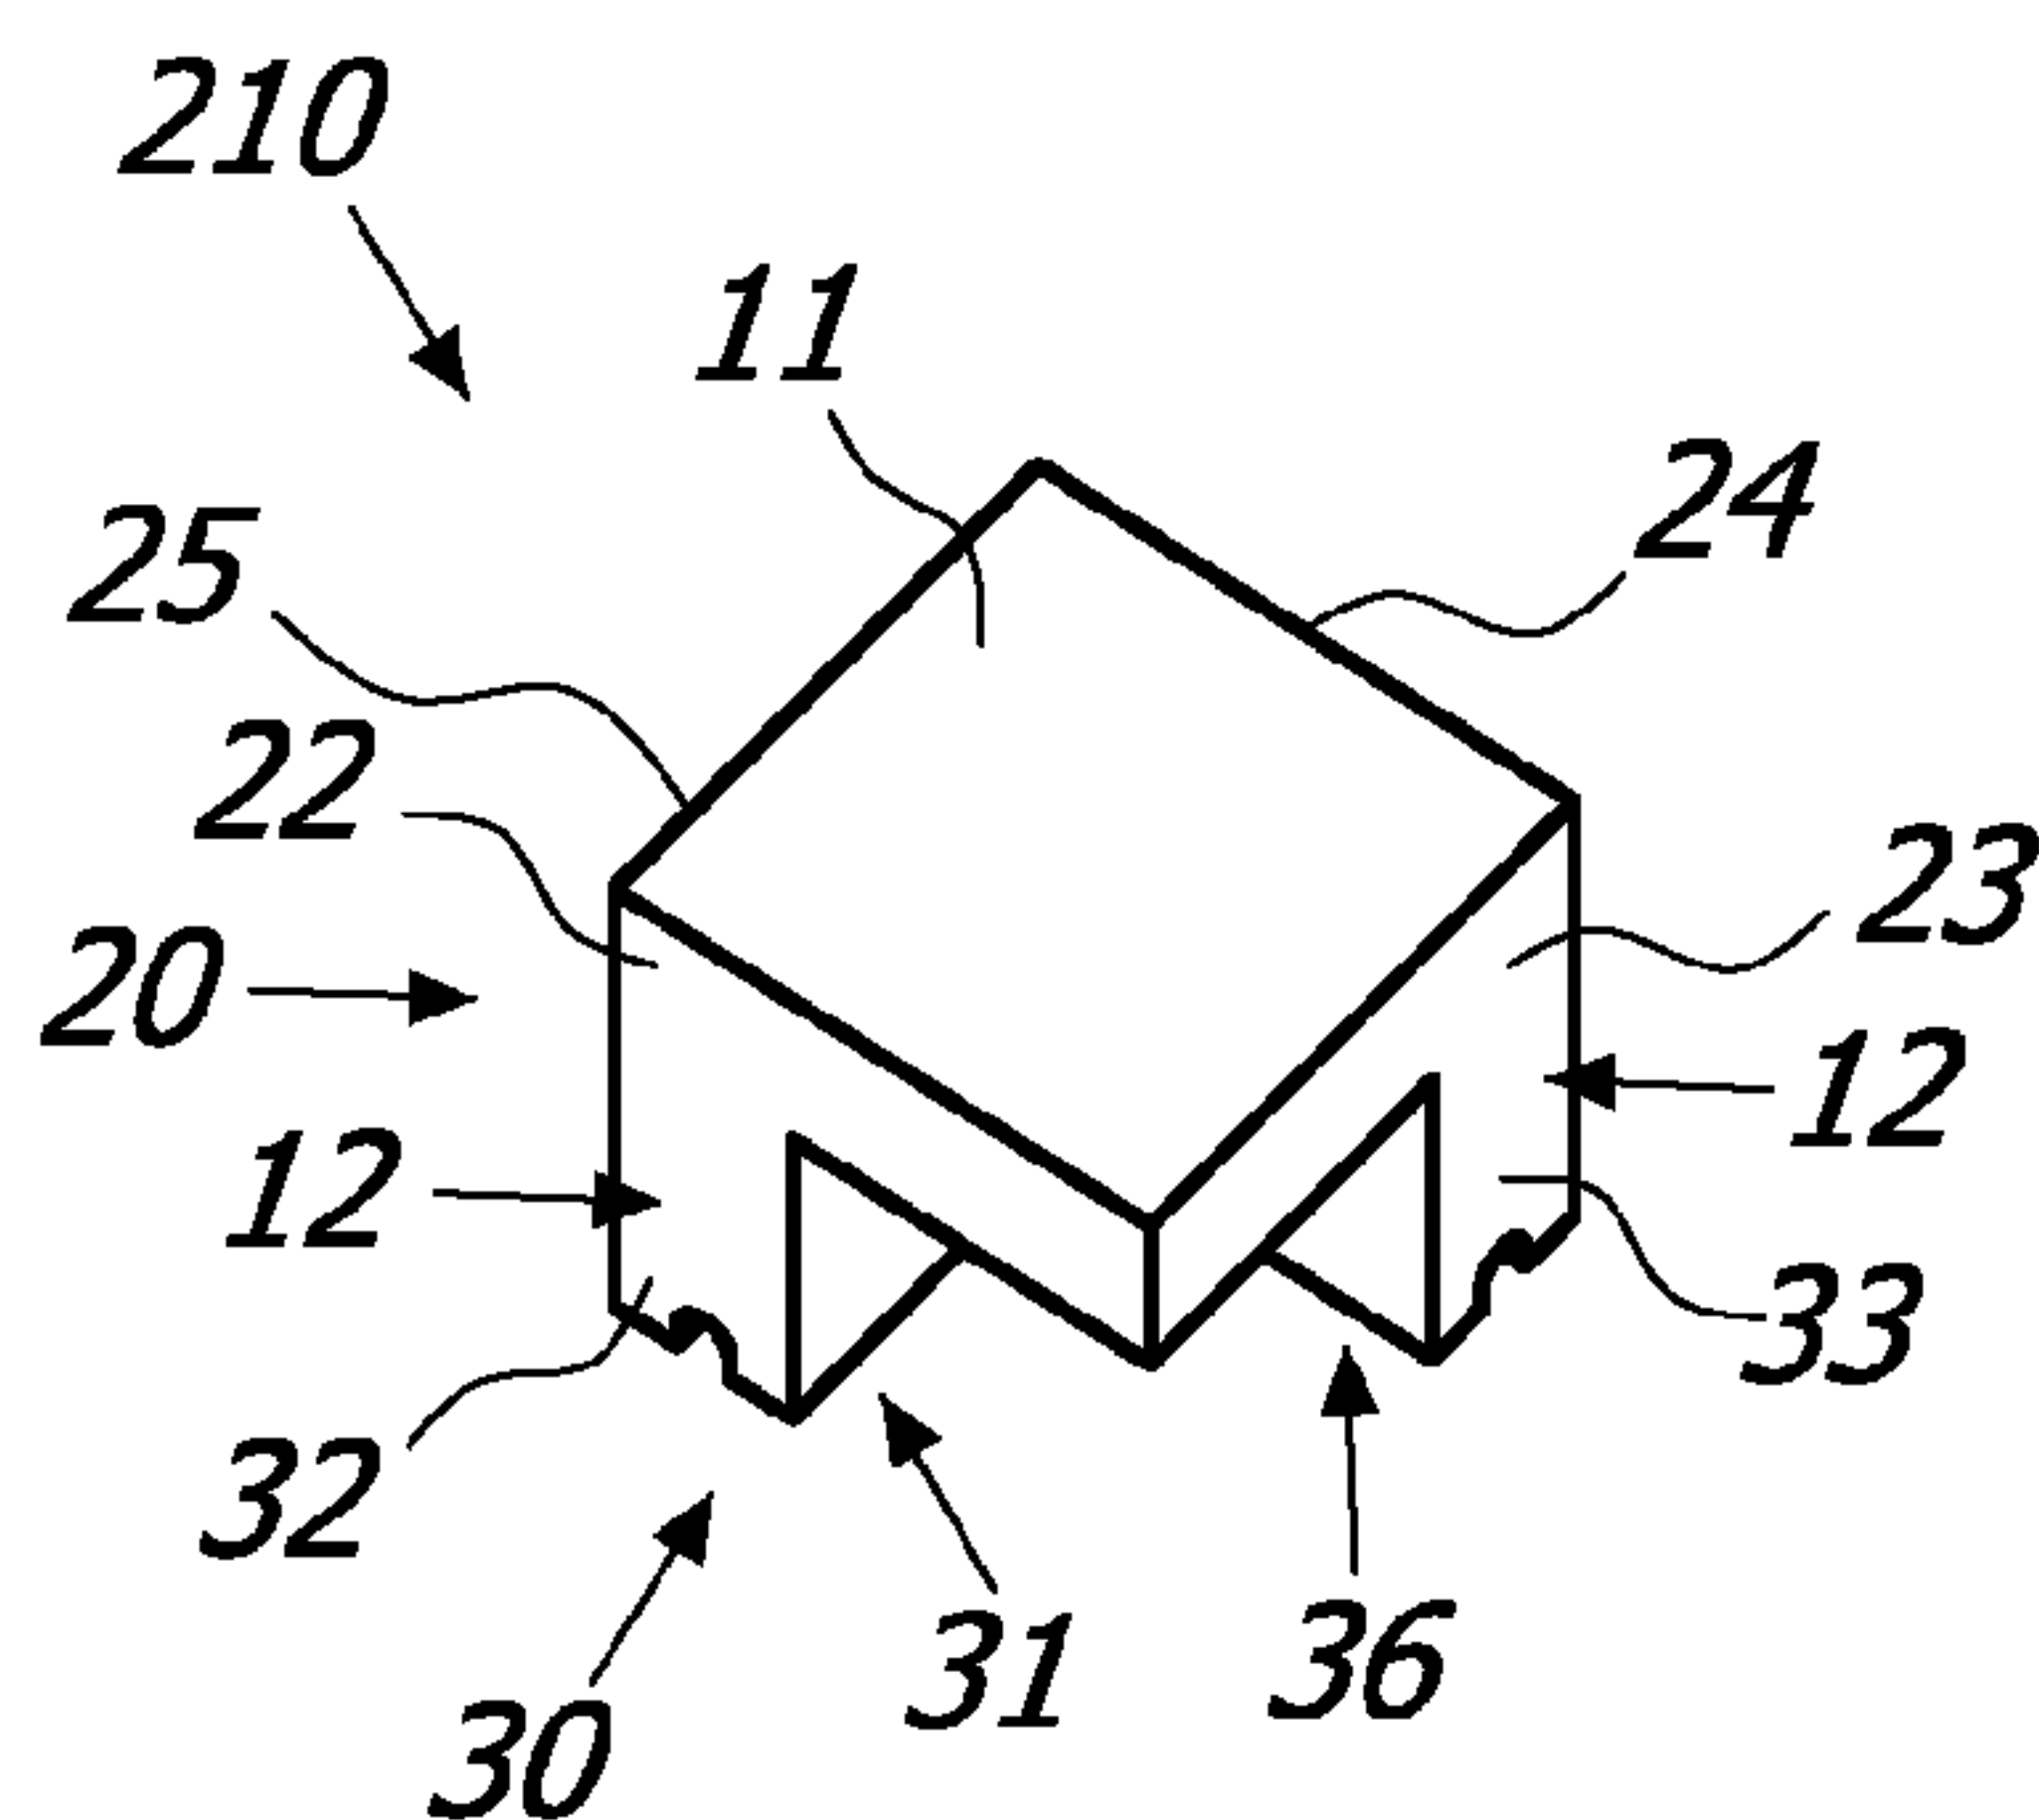


FIG. 14B

7 / 24

**FIG. 15A****FIG. 15B****FIG. 16A****FIG. 16B****FIG. 17A****FIG. 17B**

8 / 24

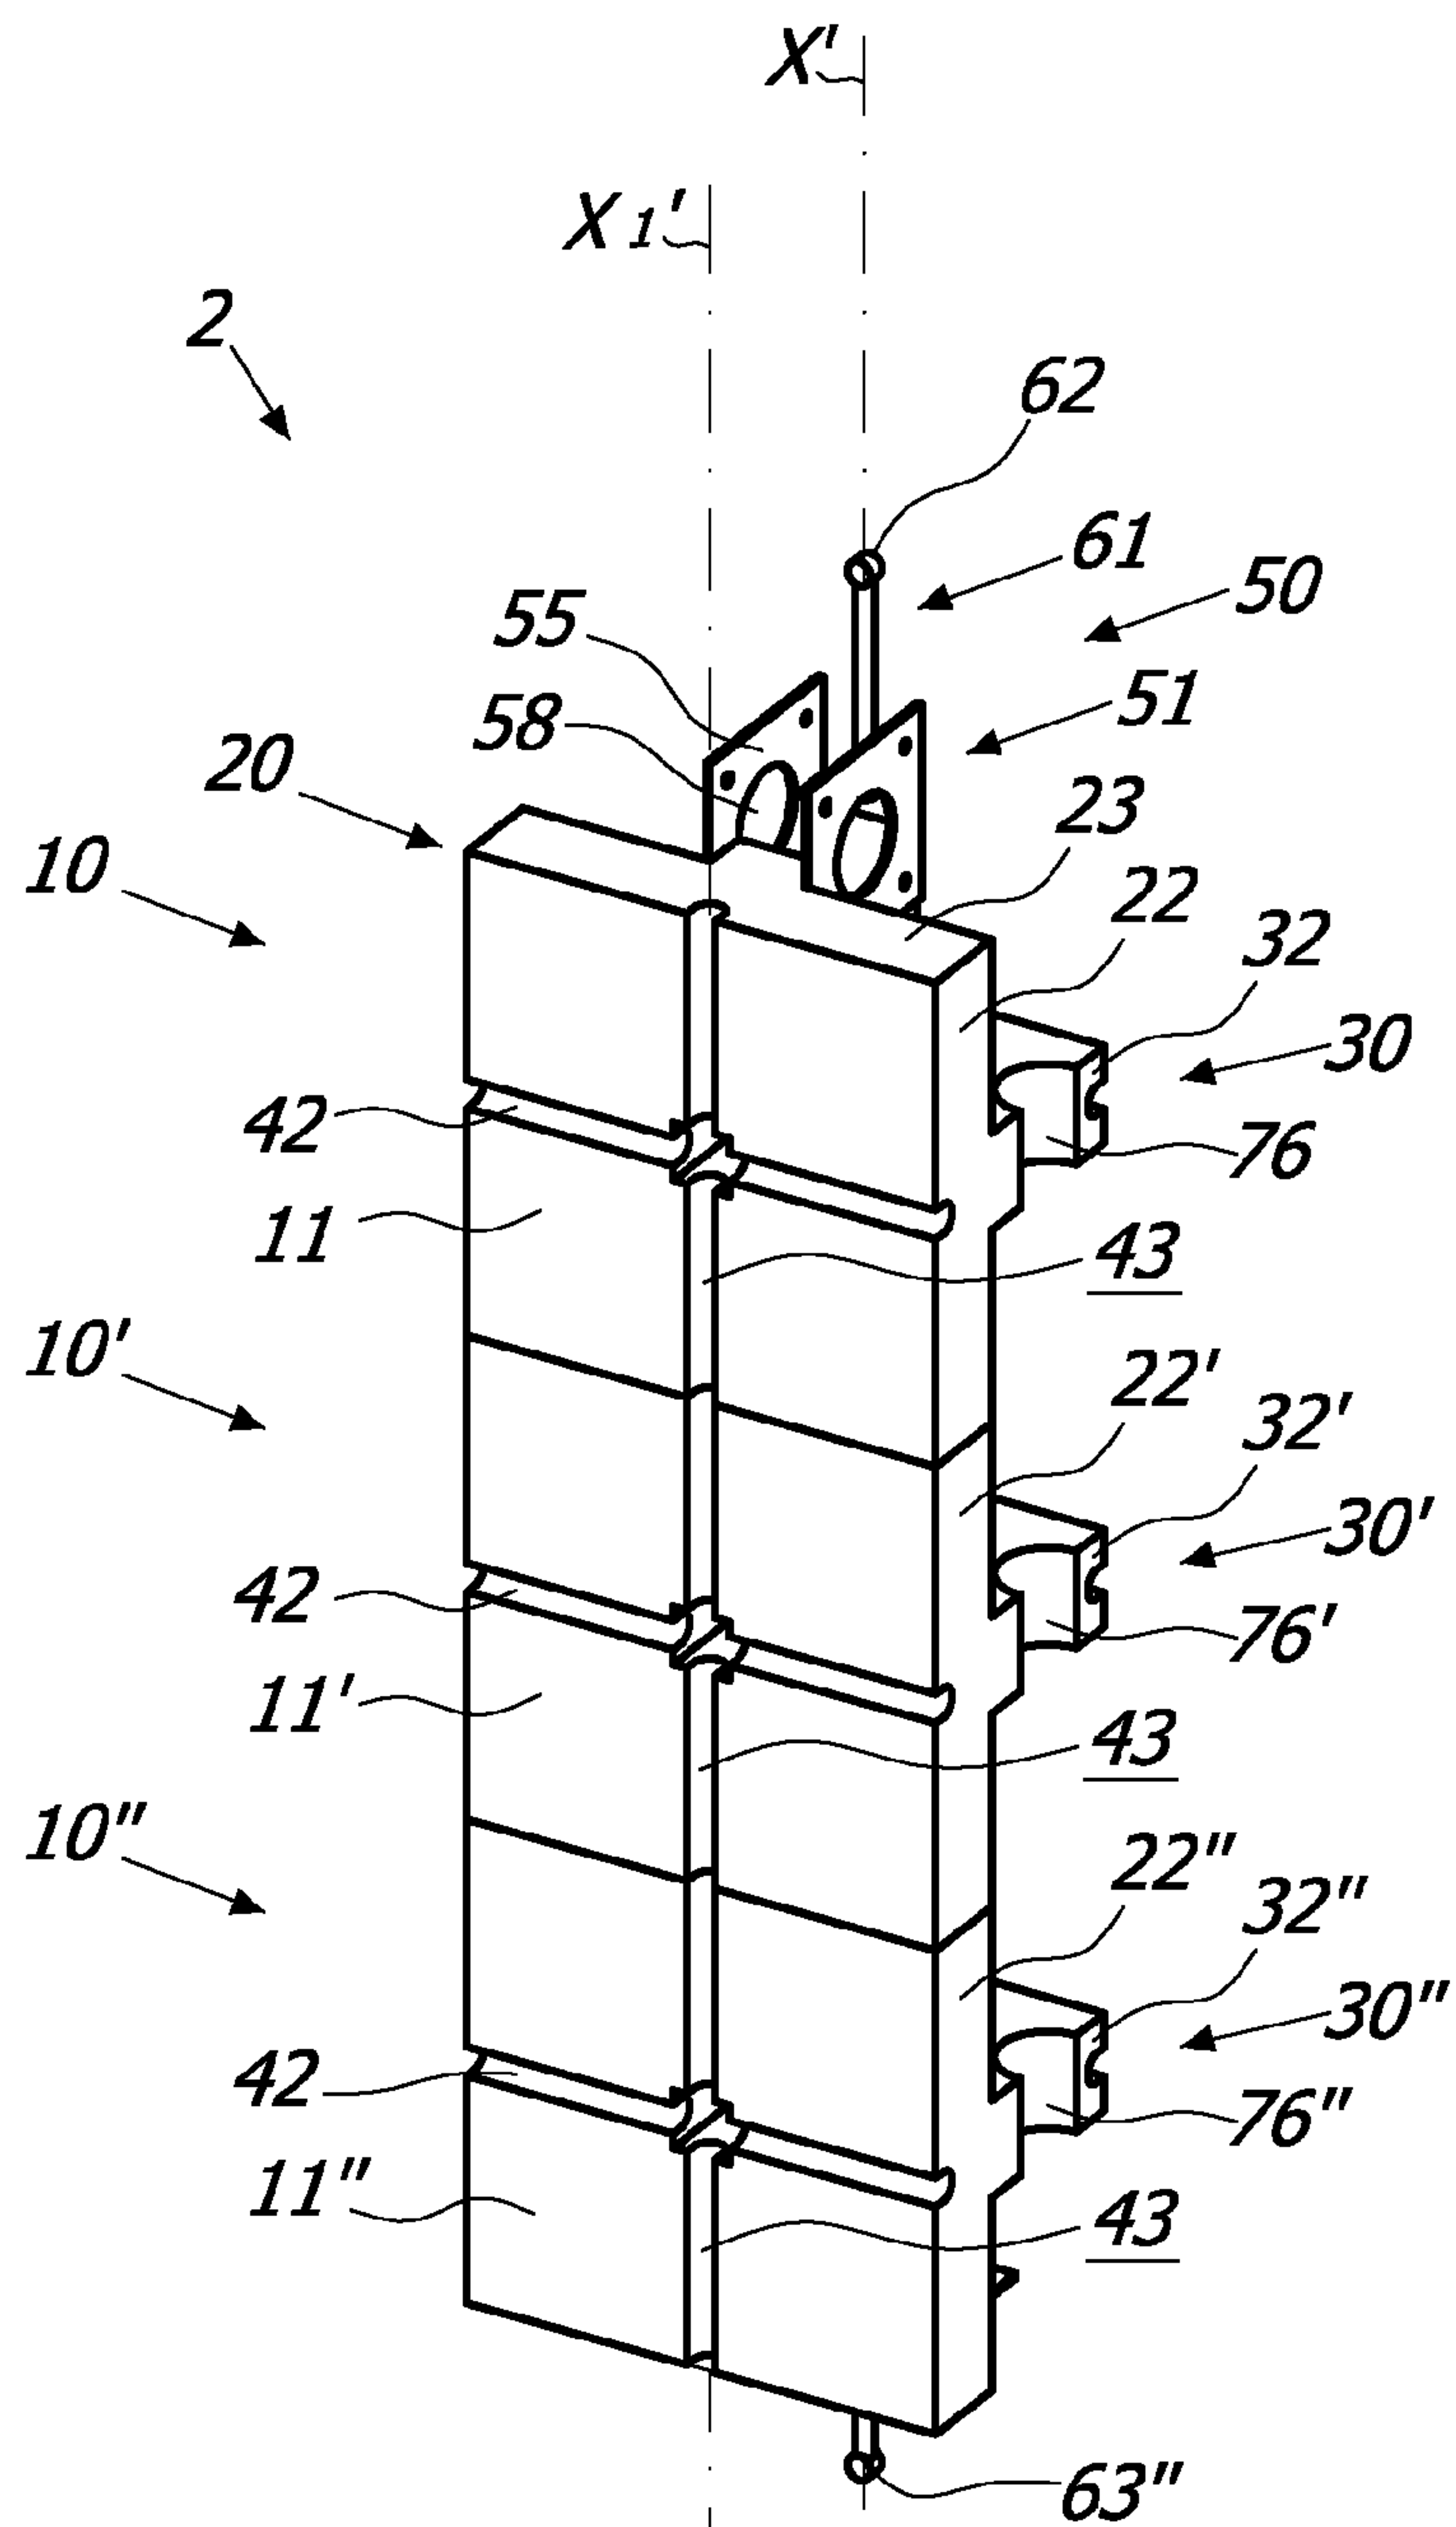


FIG. 18A





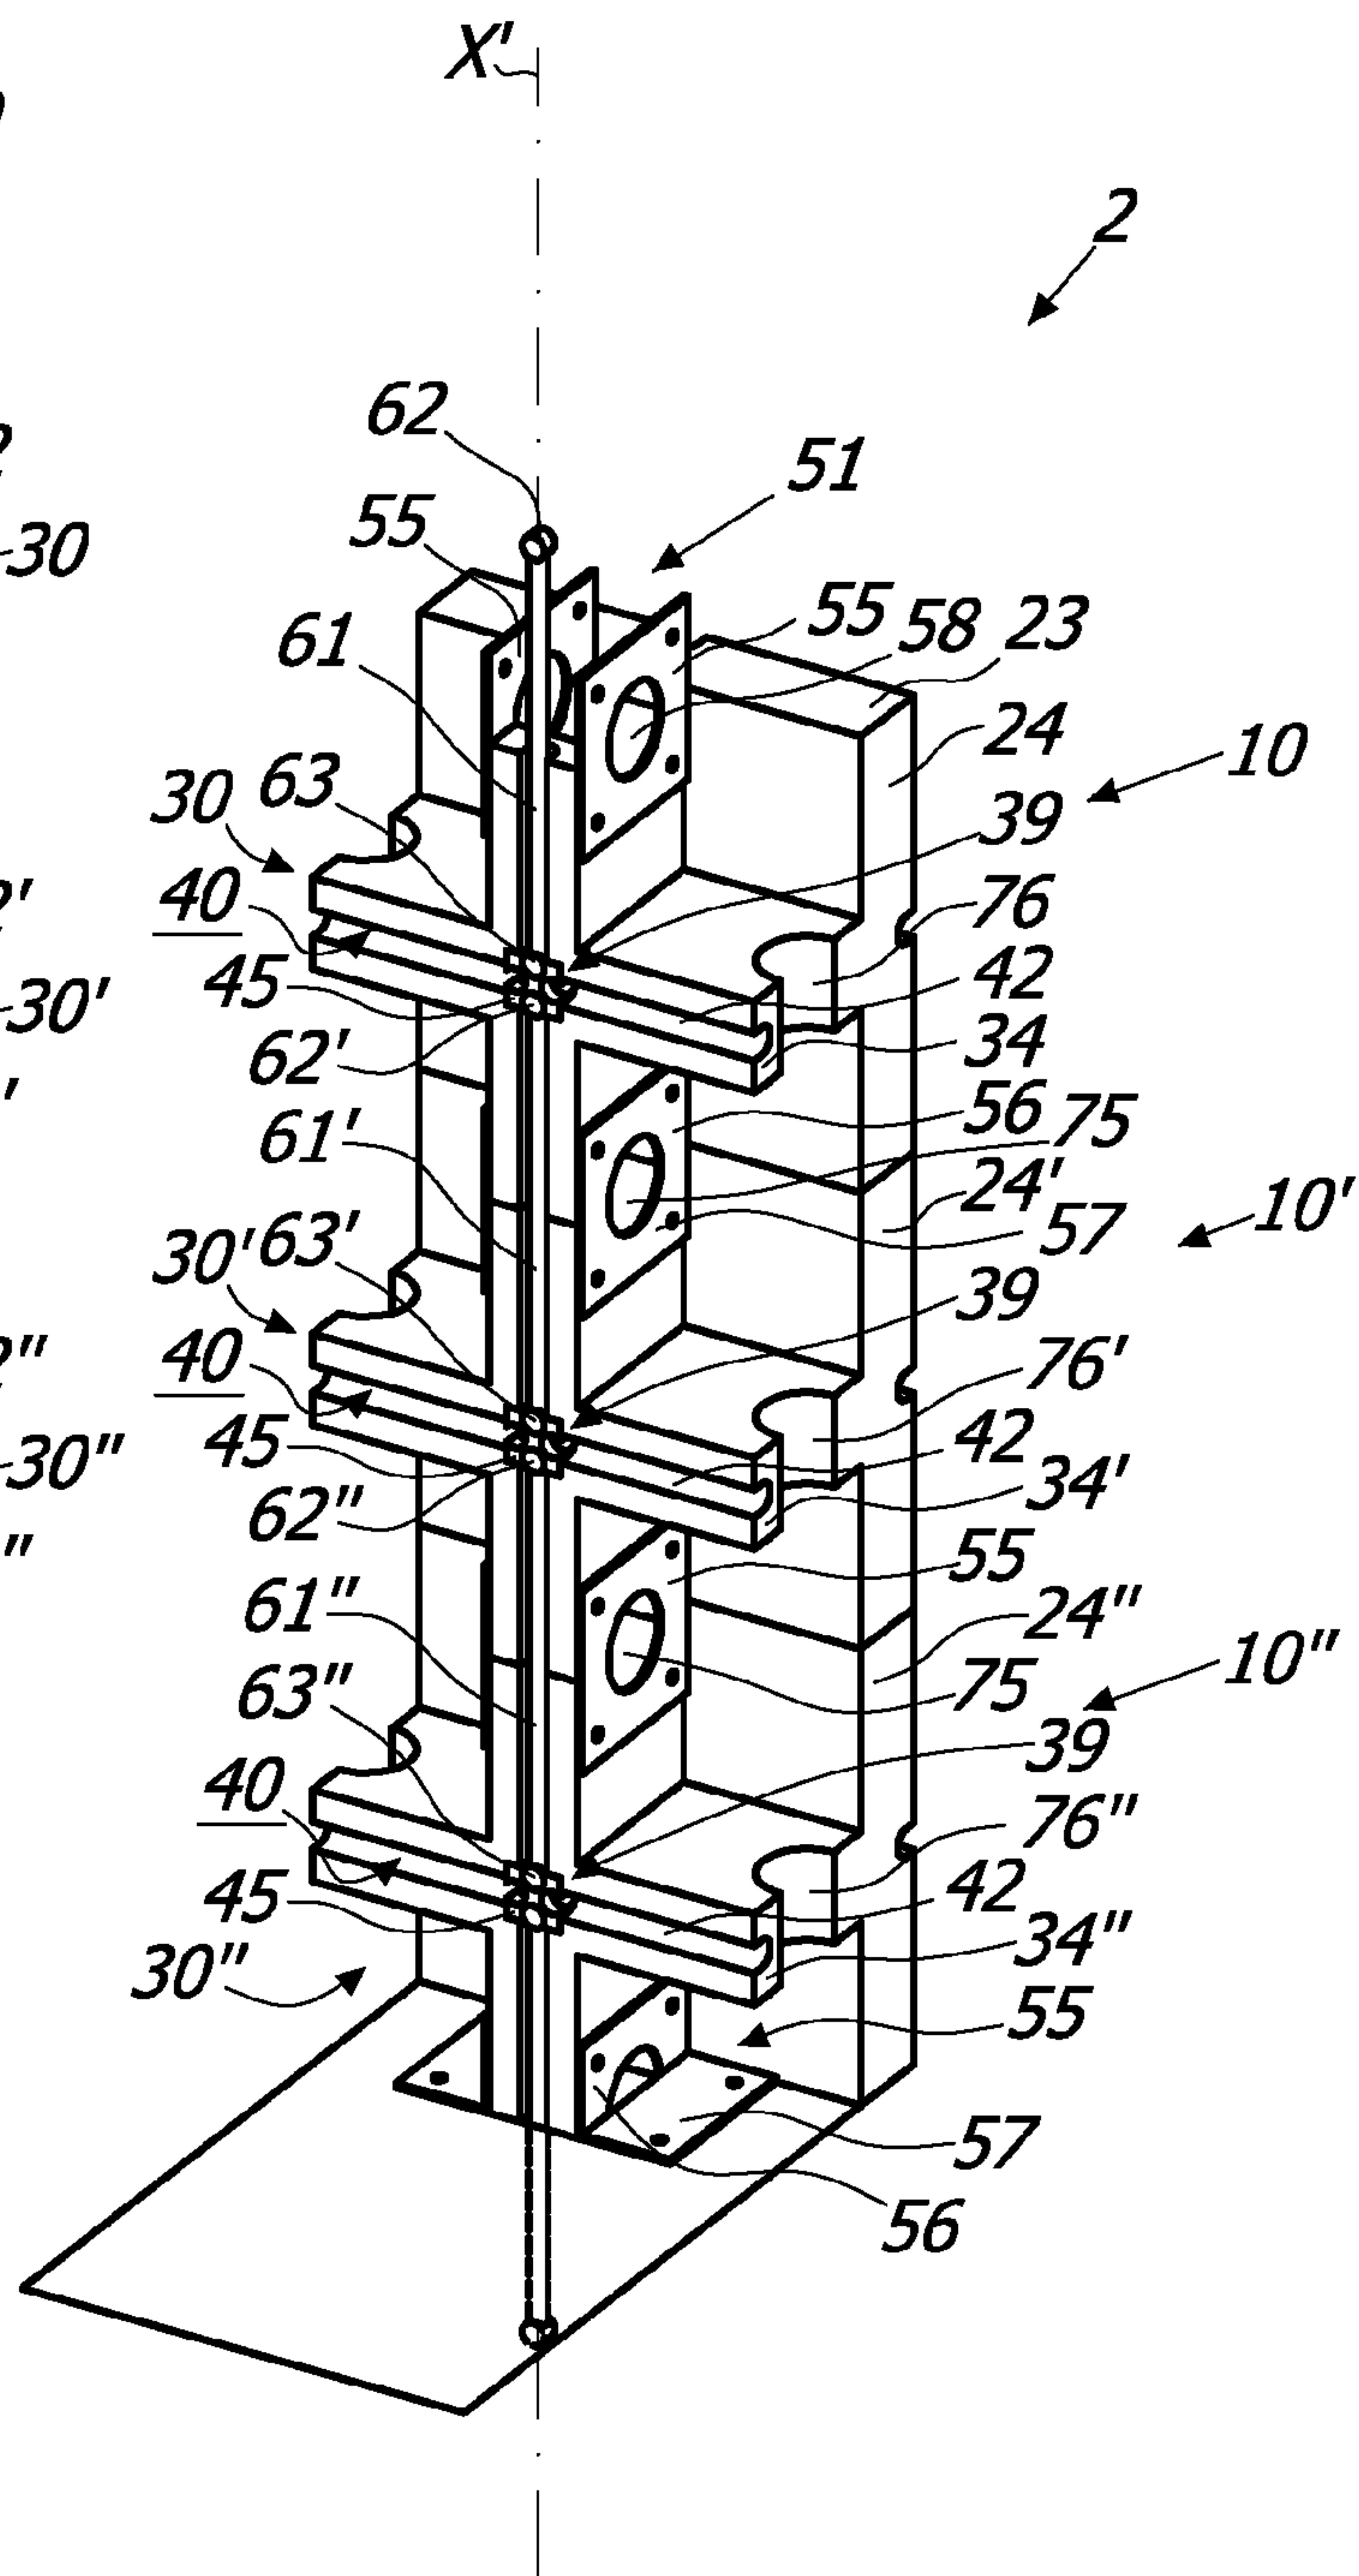


FIG. 18B

9 / 24

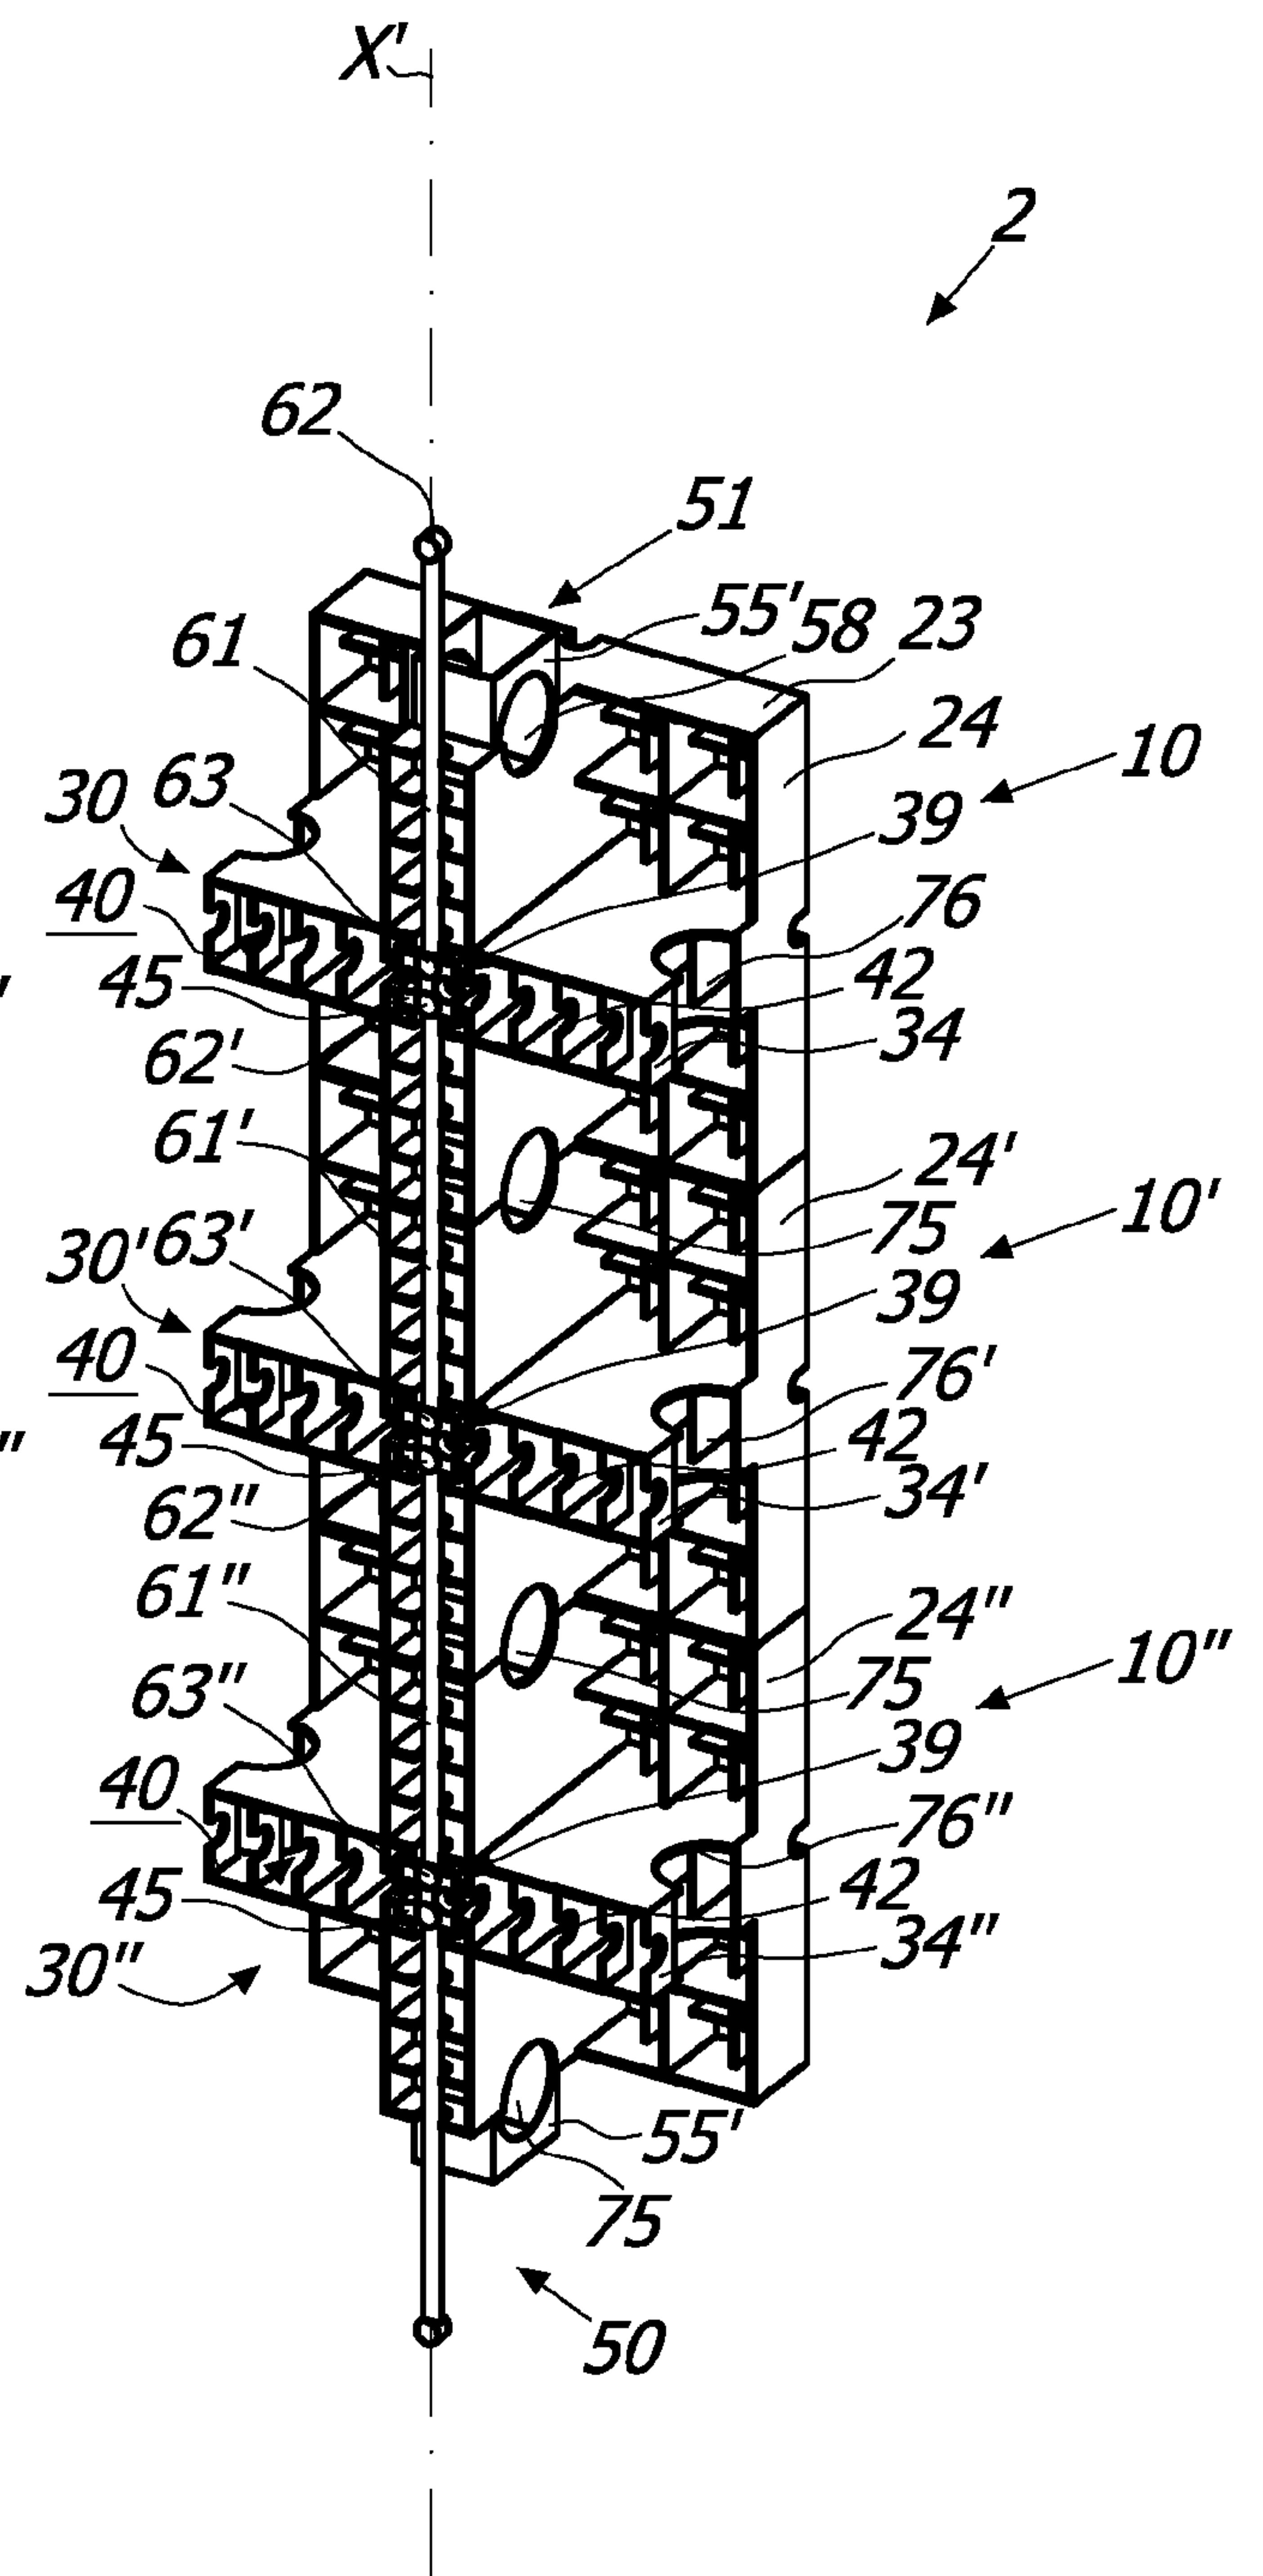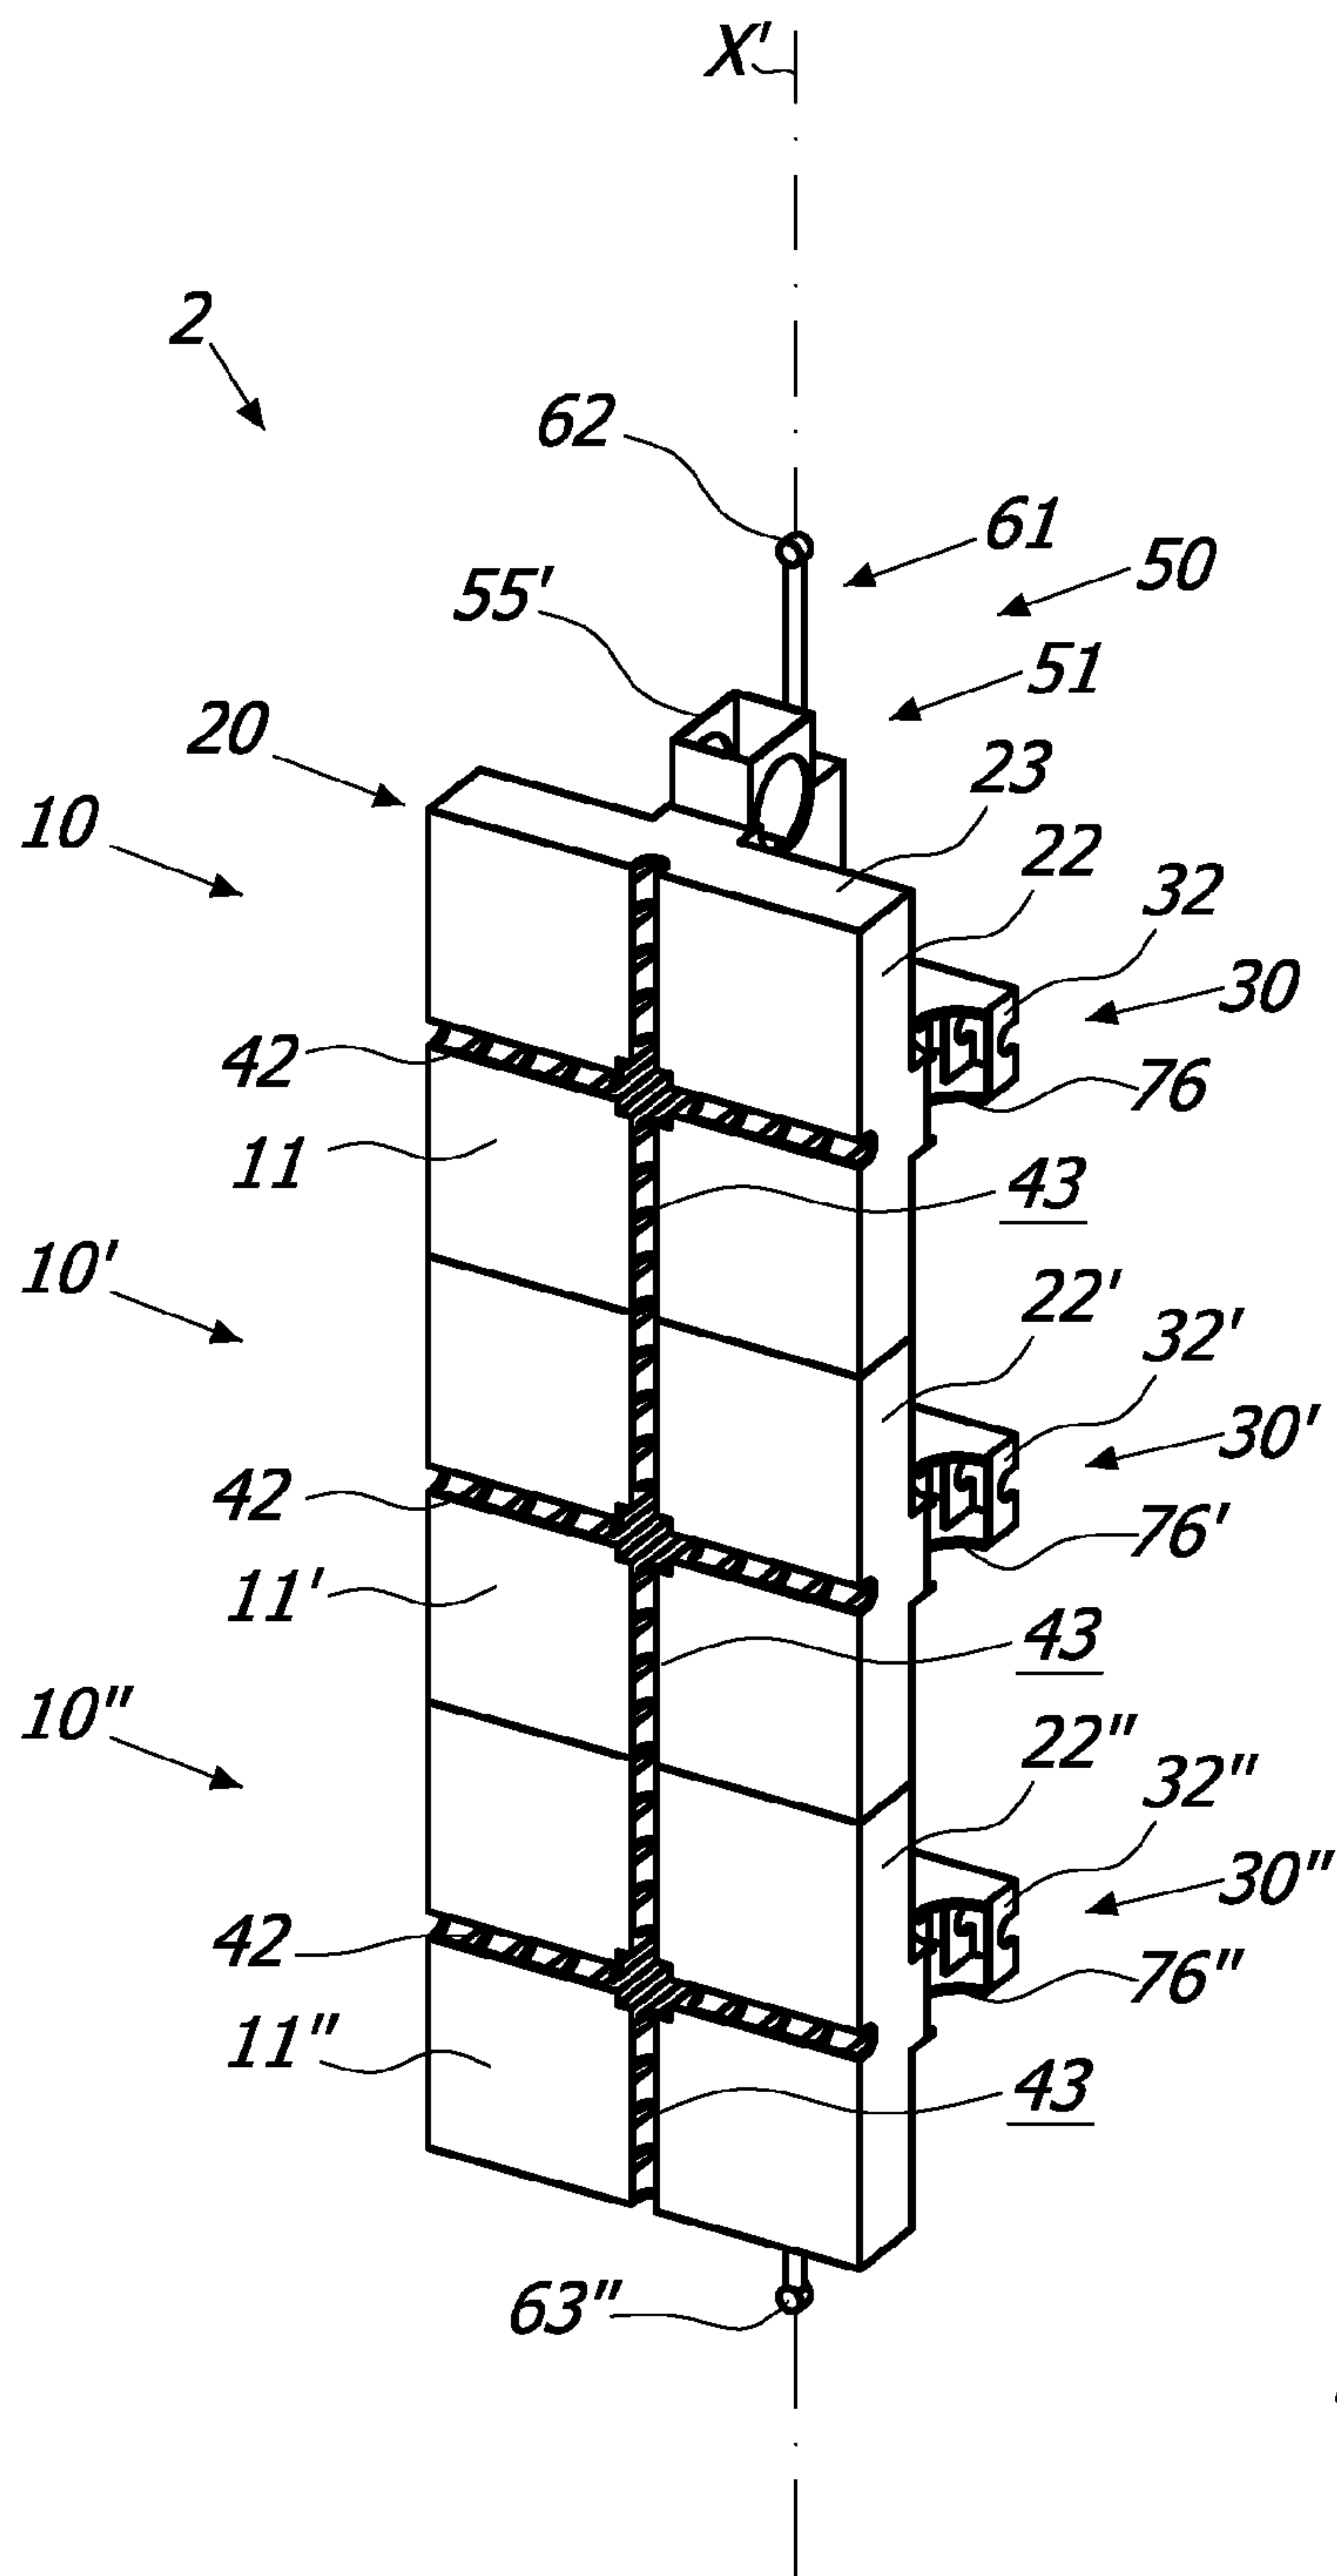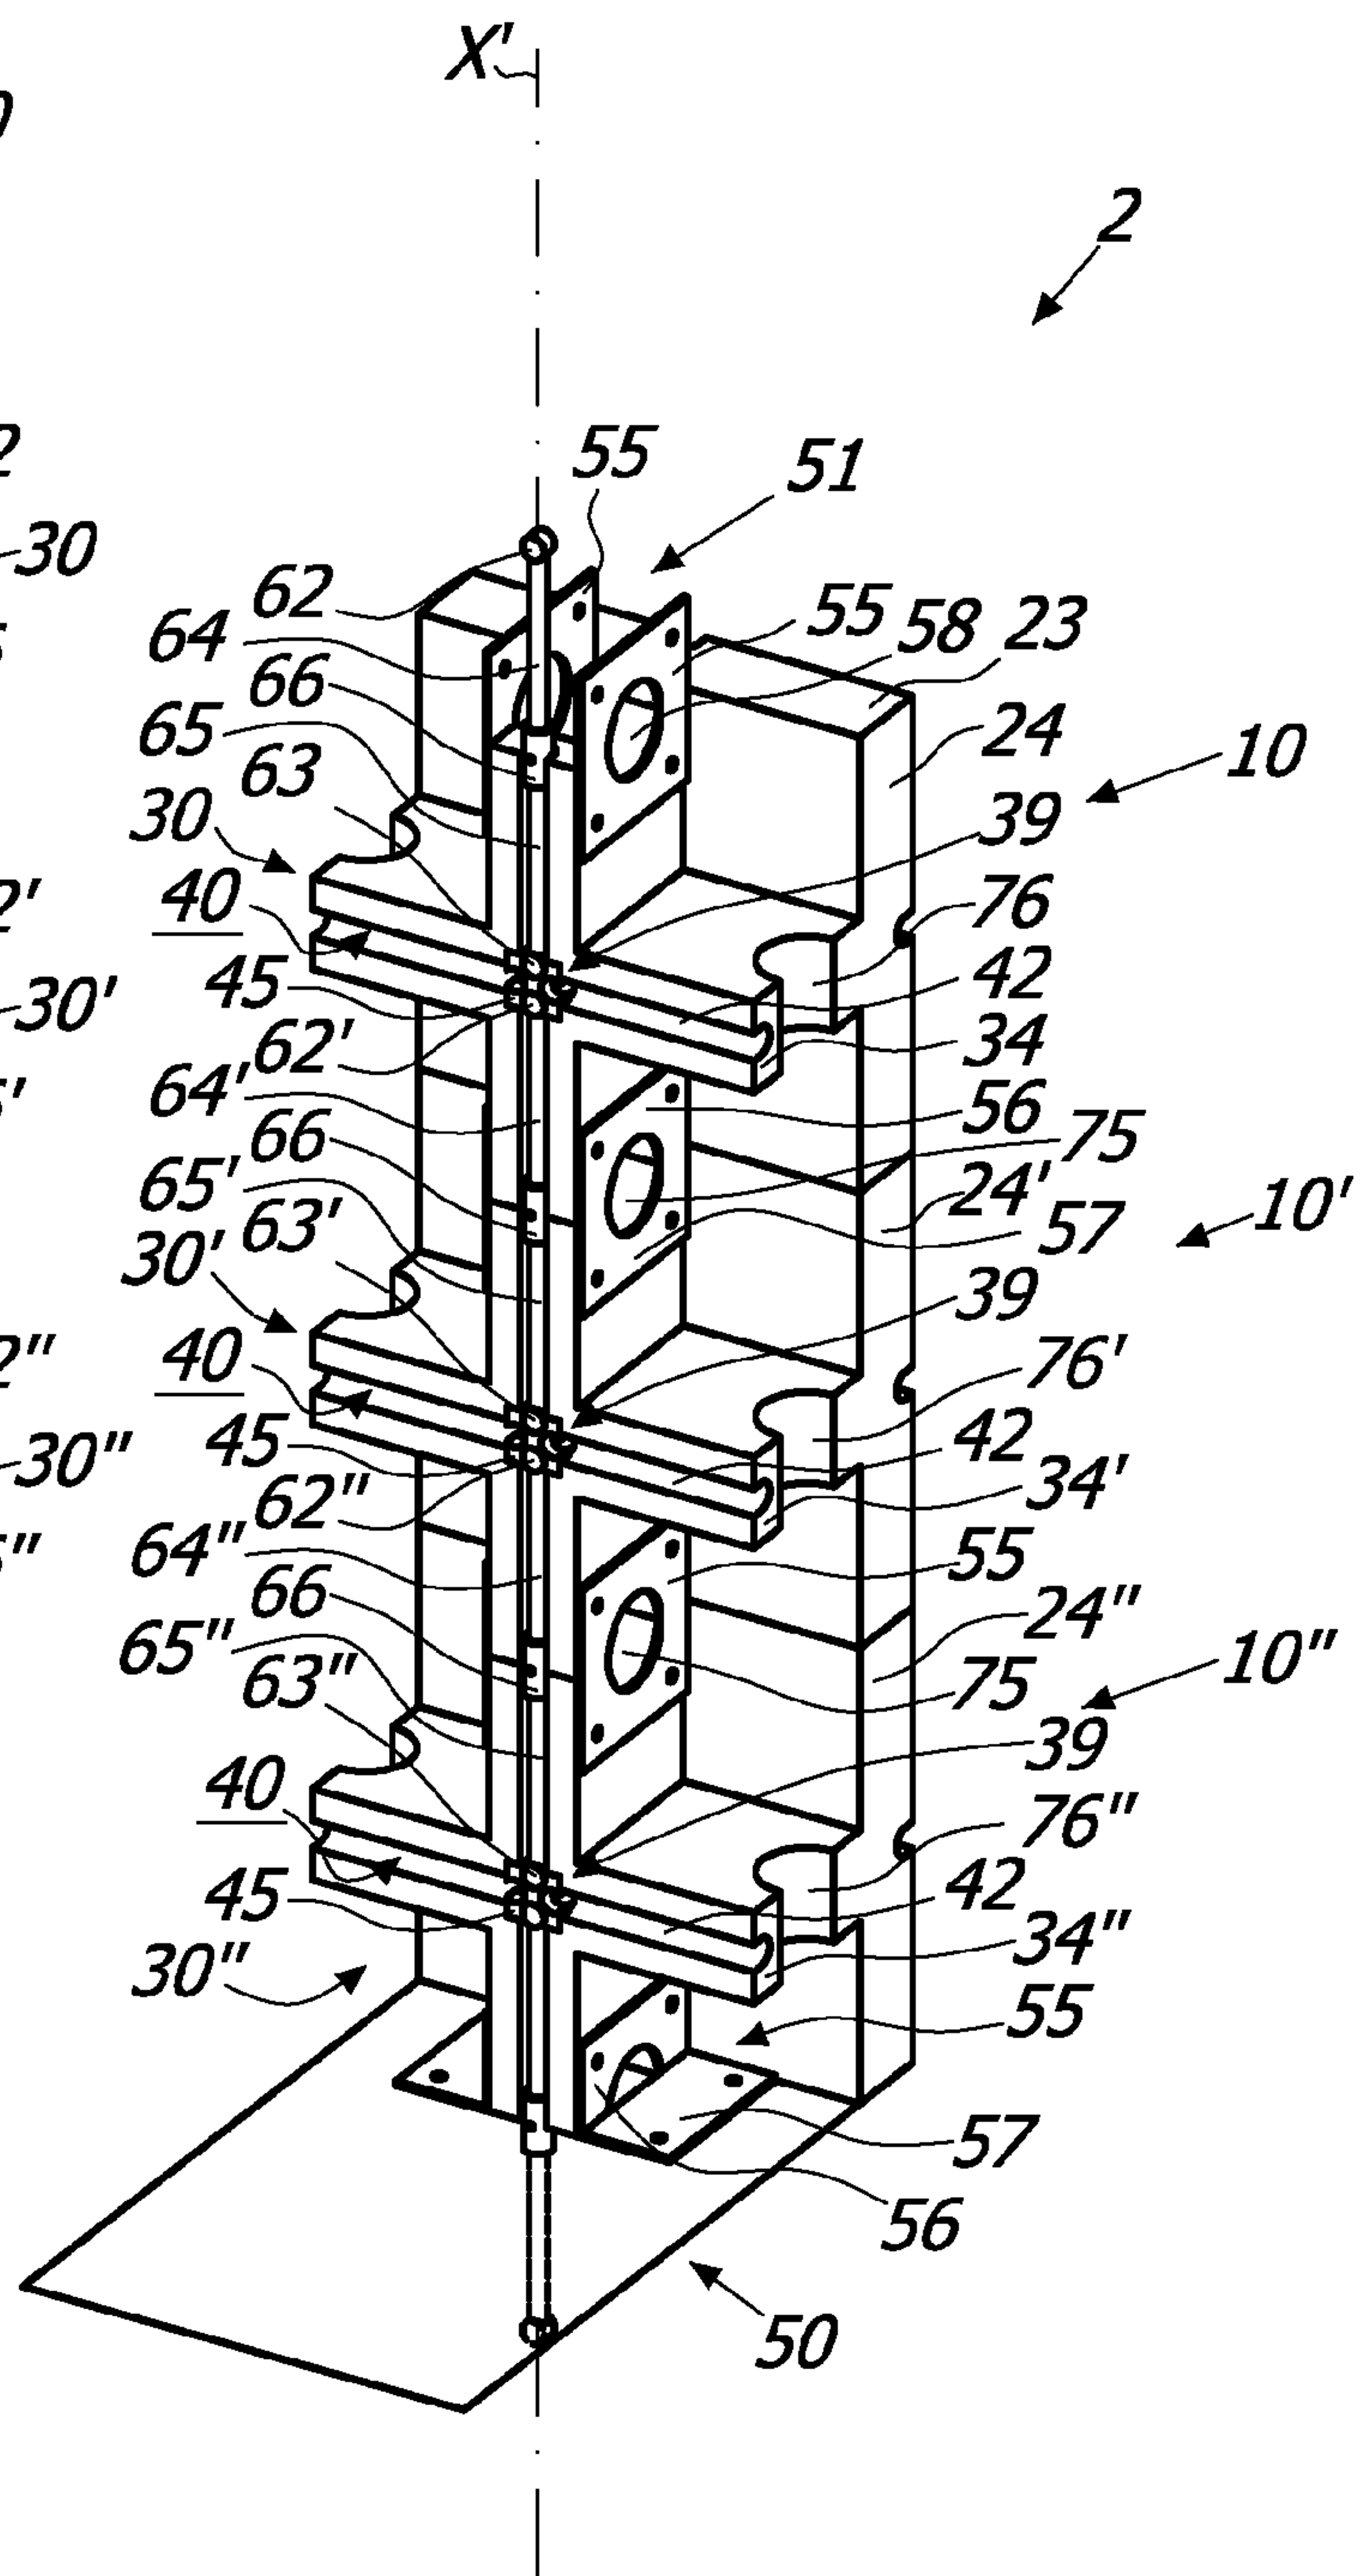

10 / 24

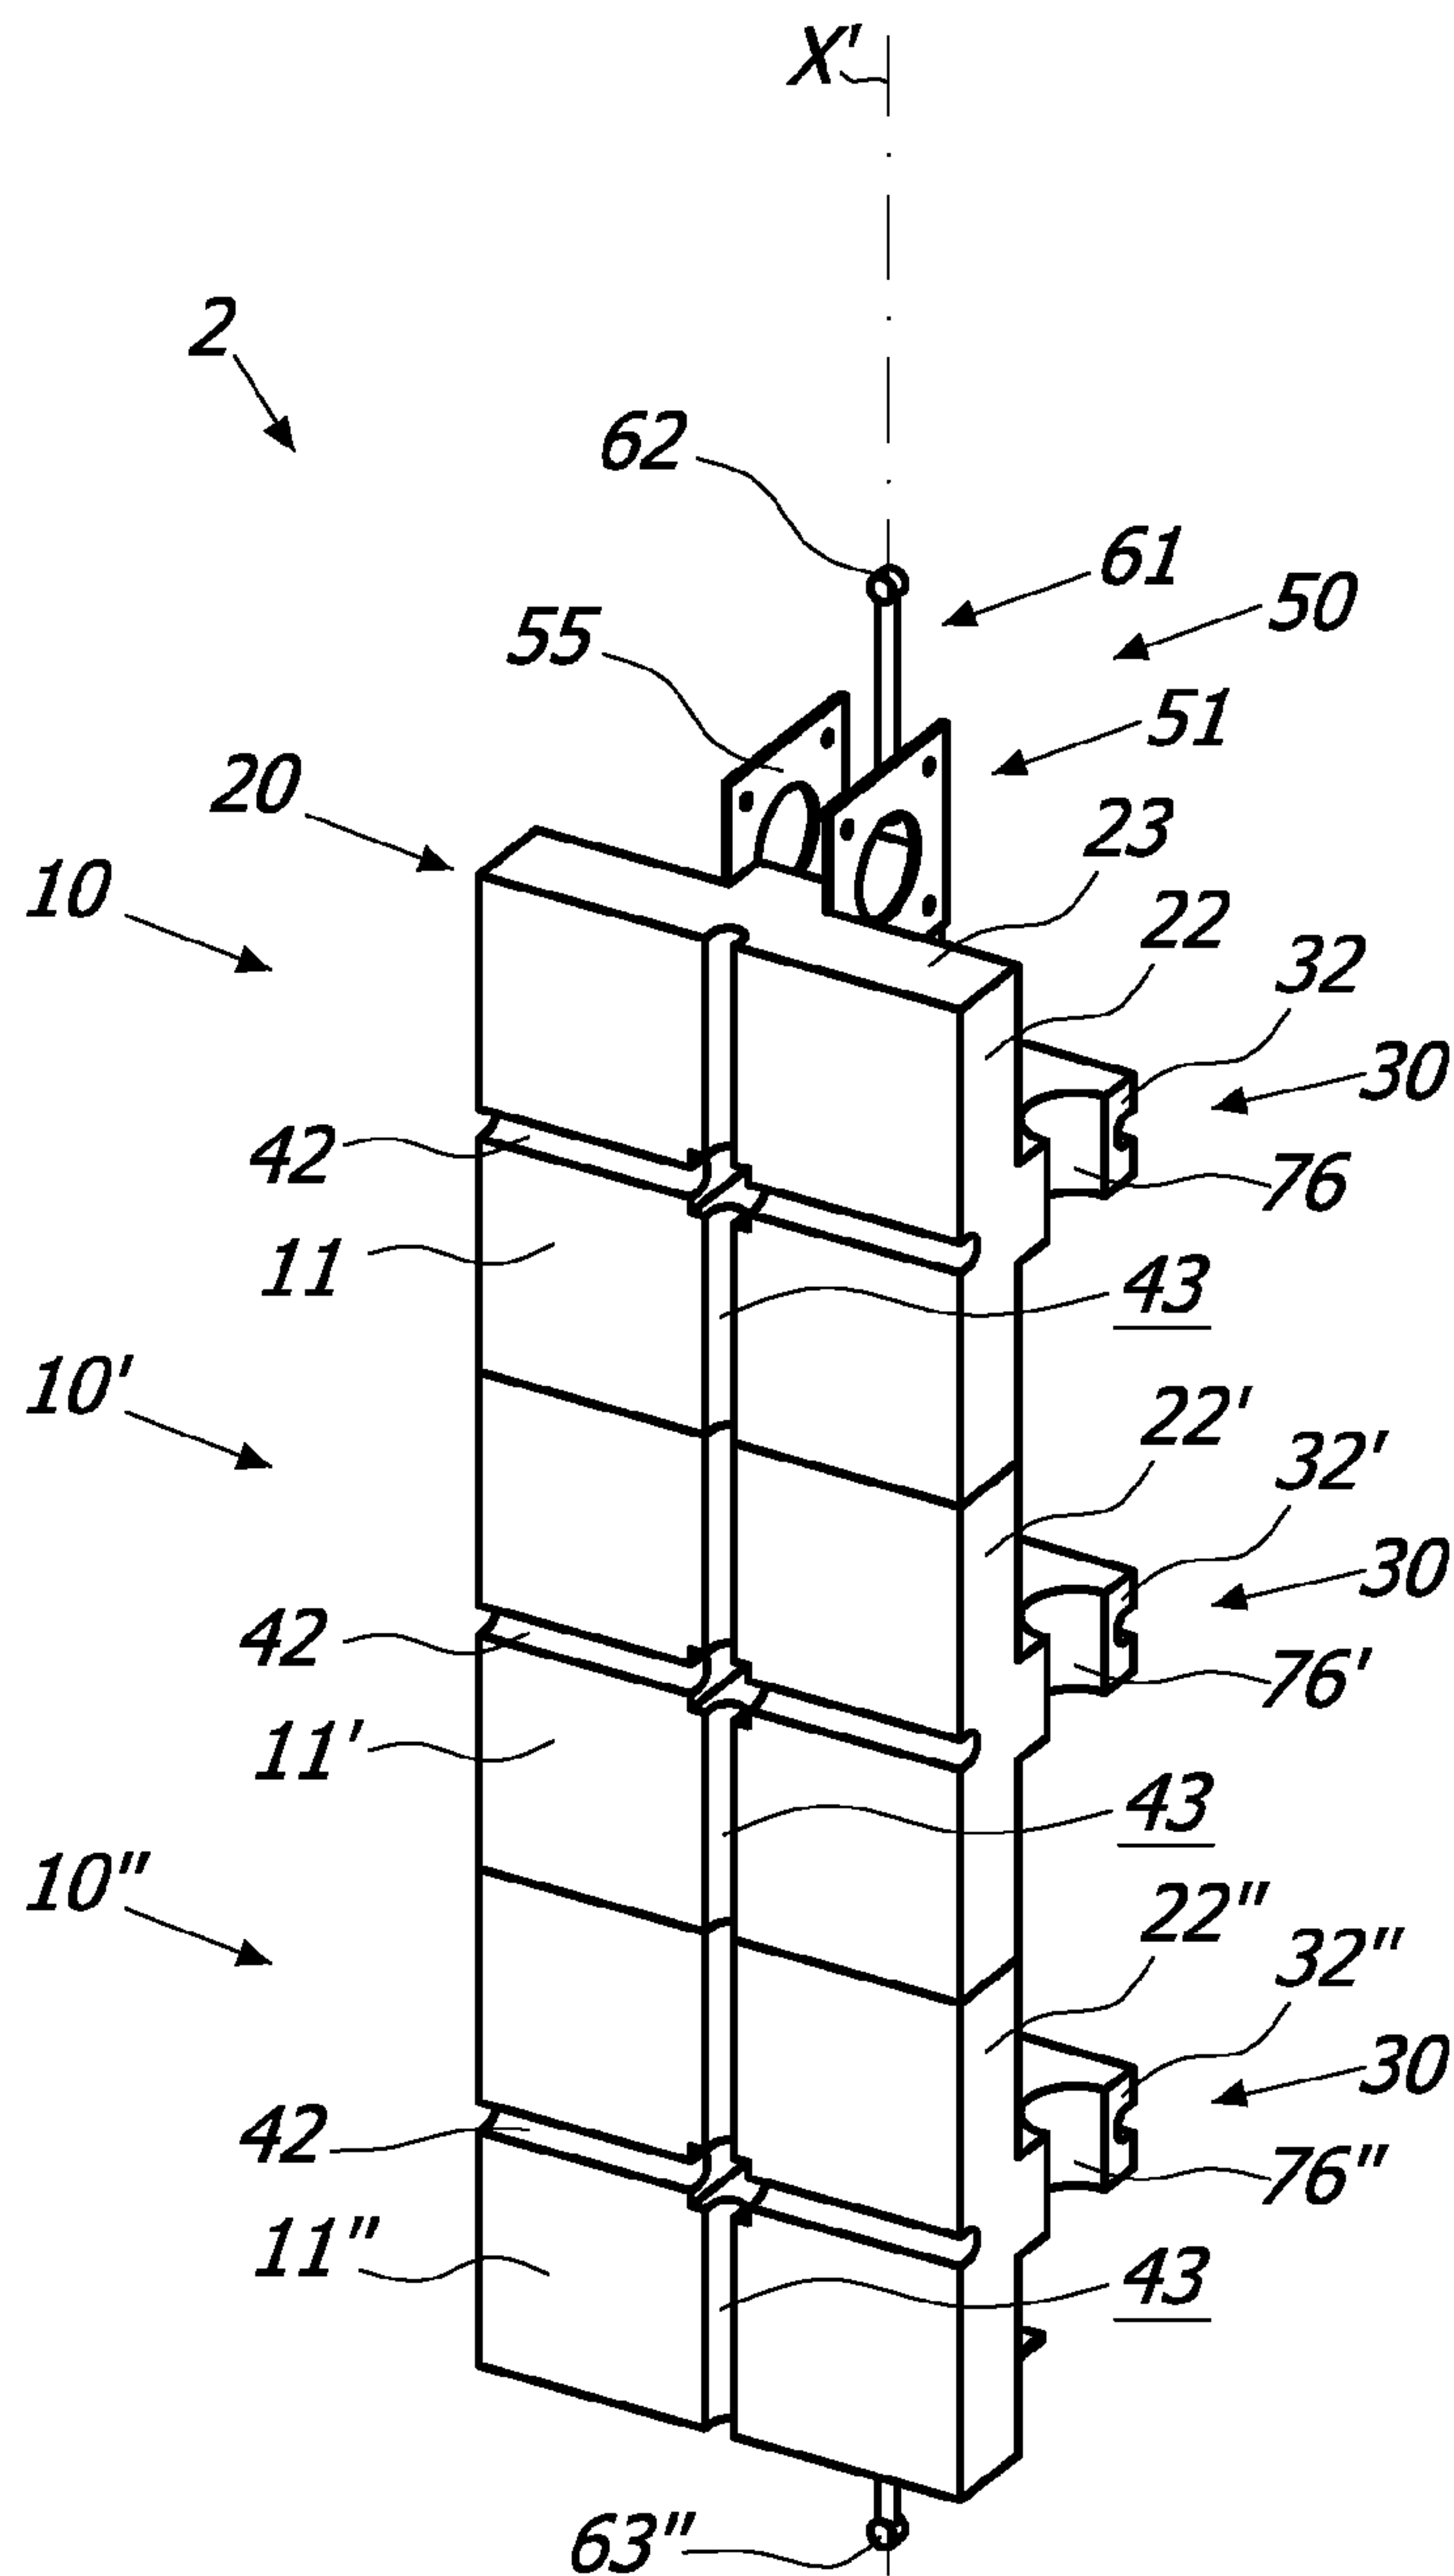

11 / 24

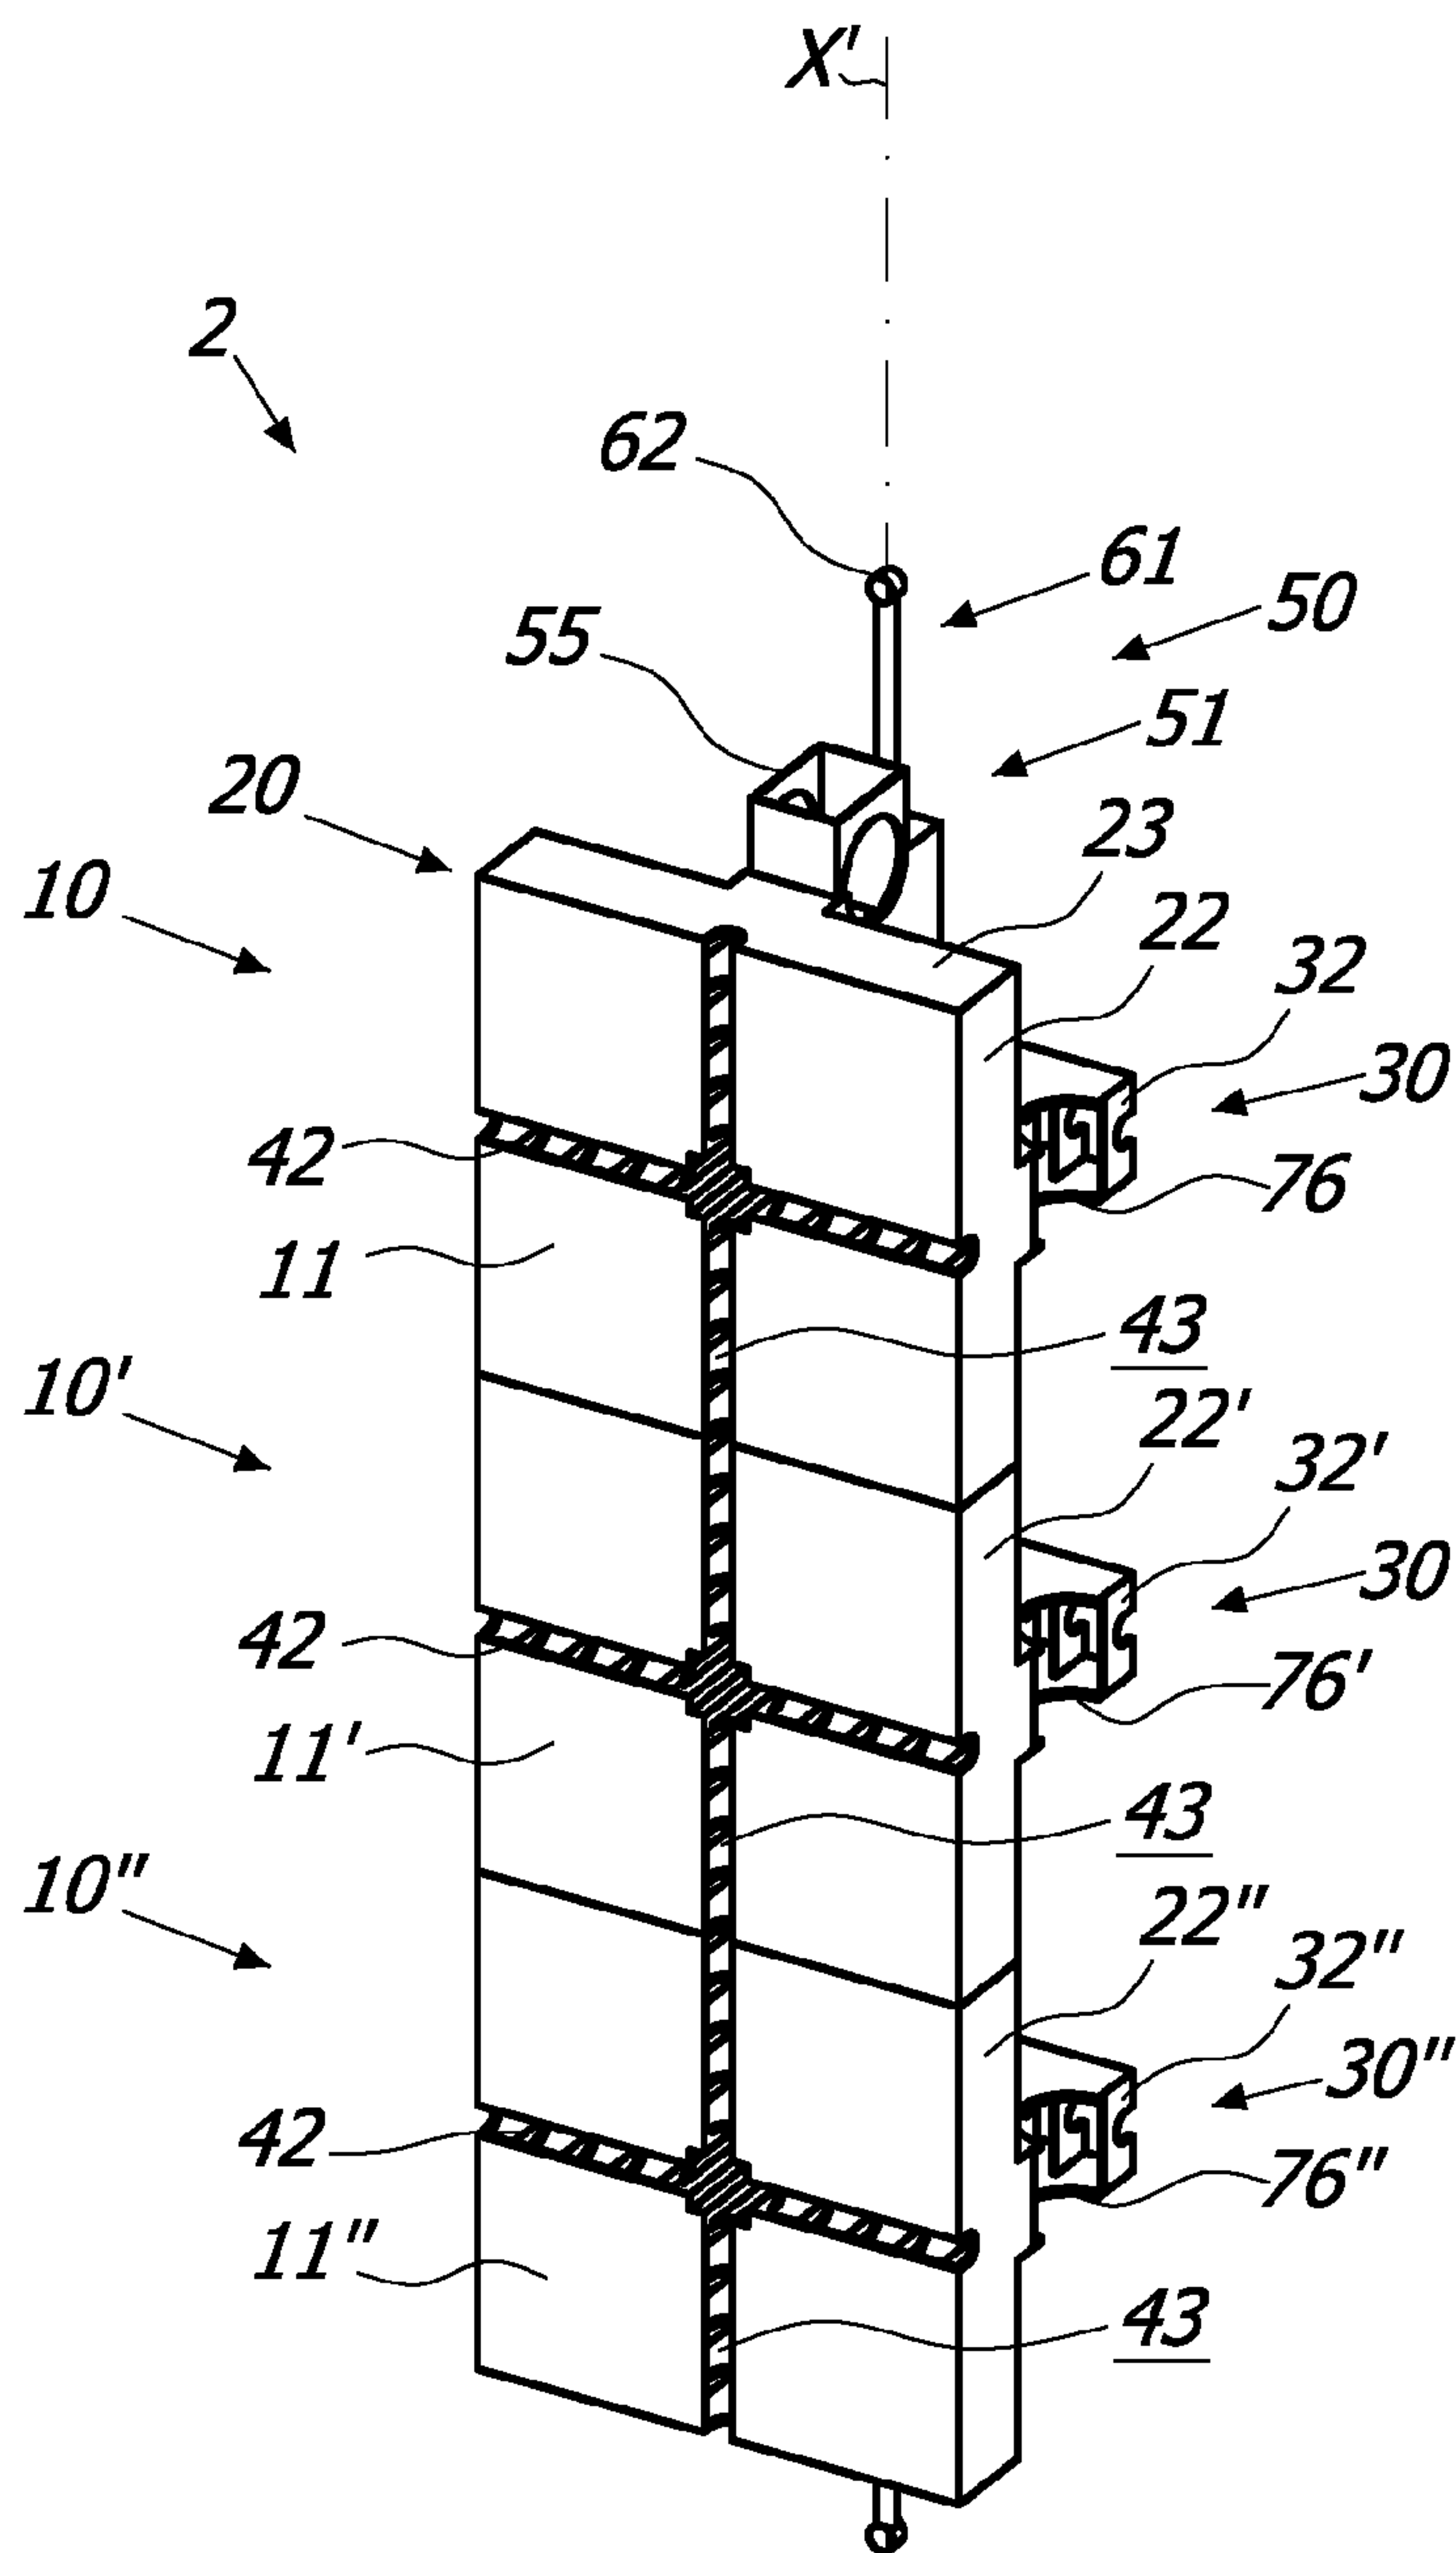


FIG. 21A

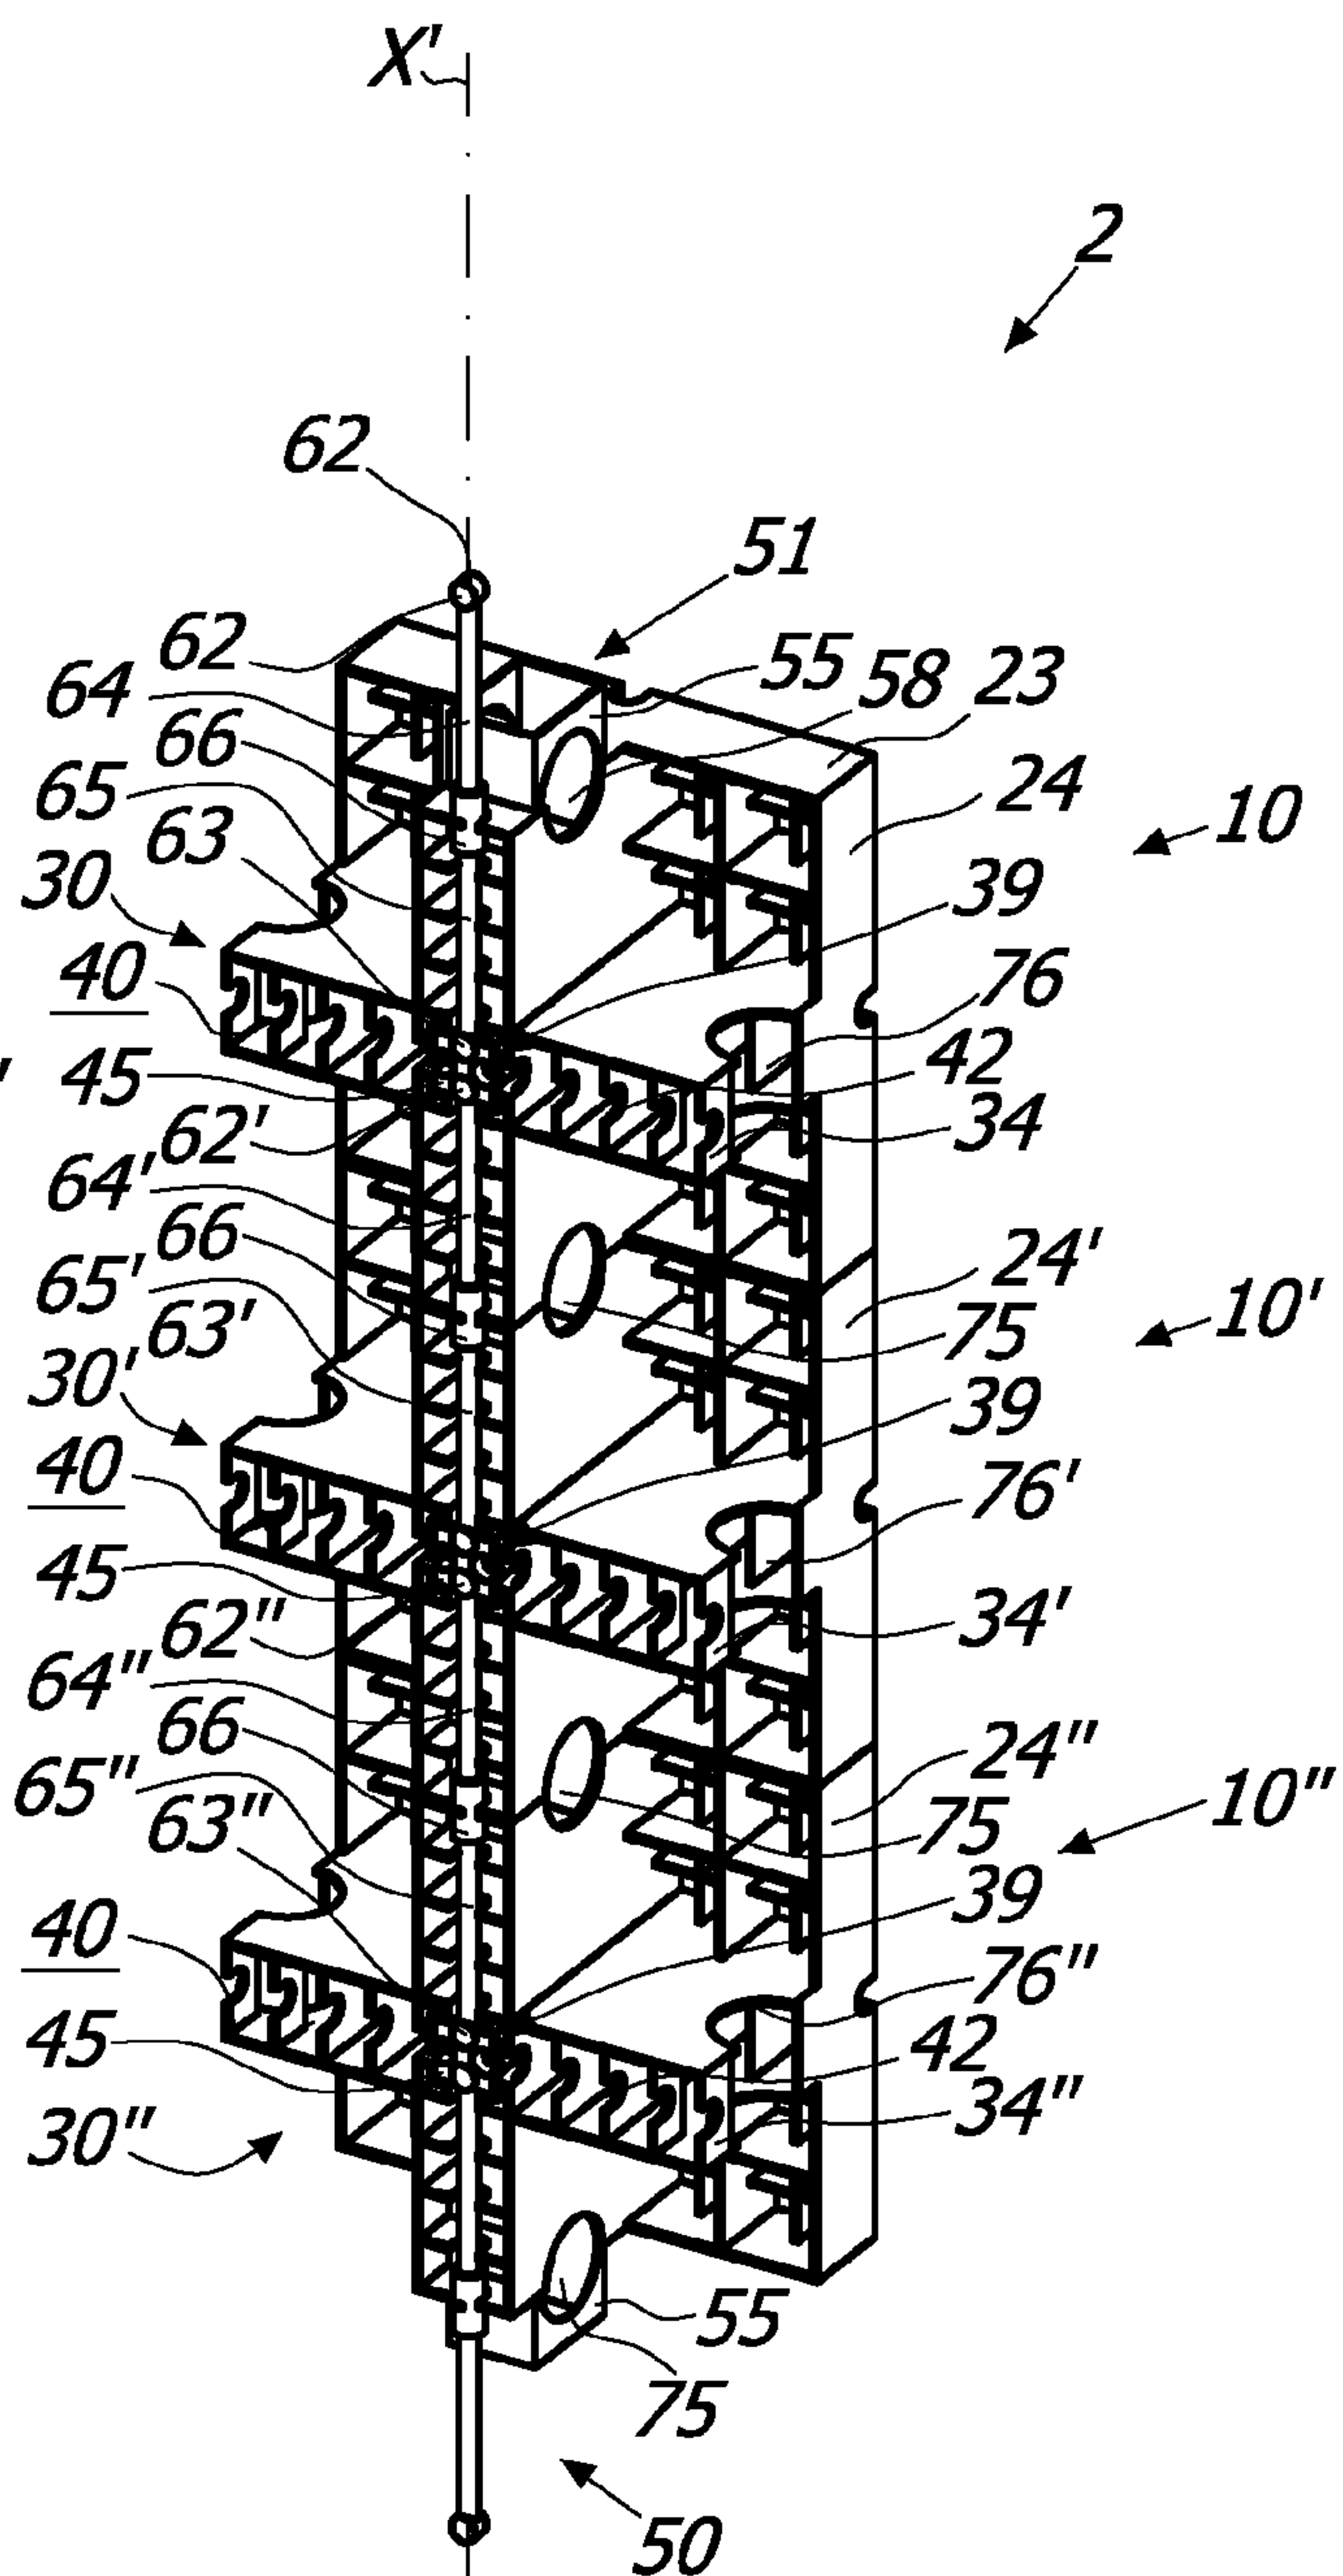


FIG. 21B

12 / 24

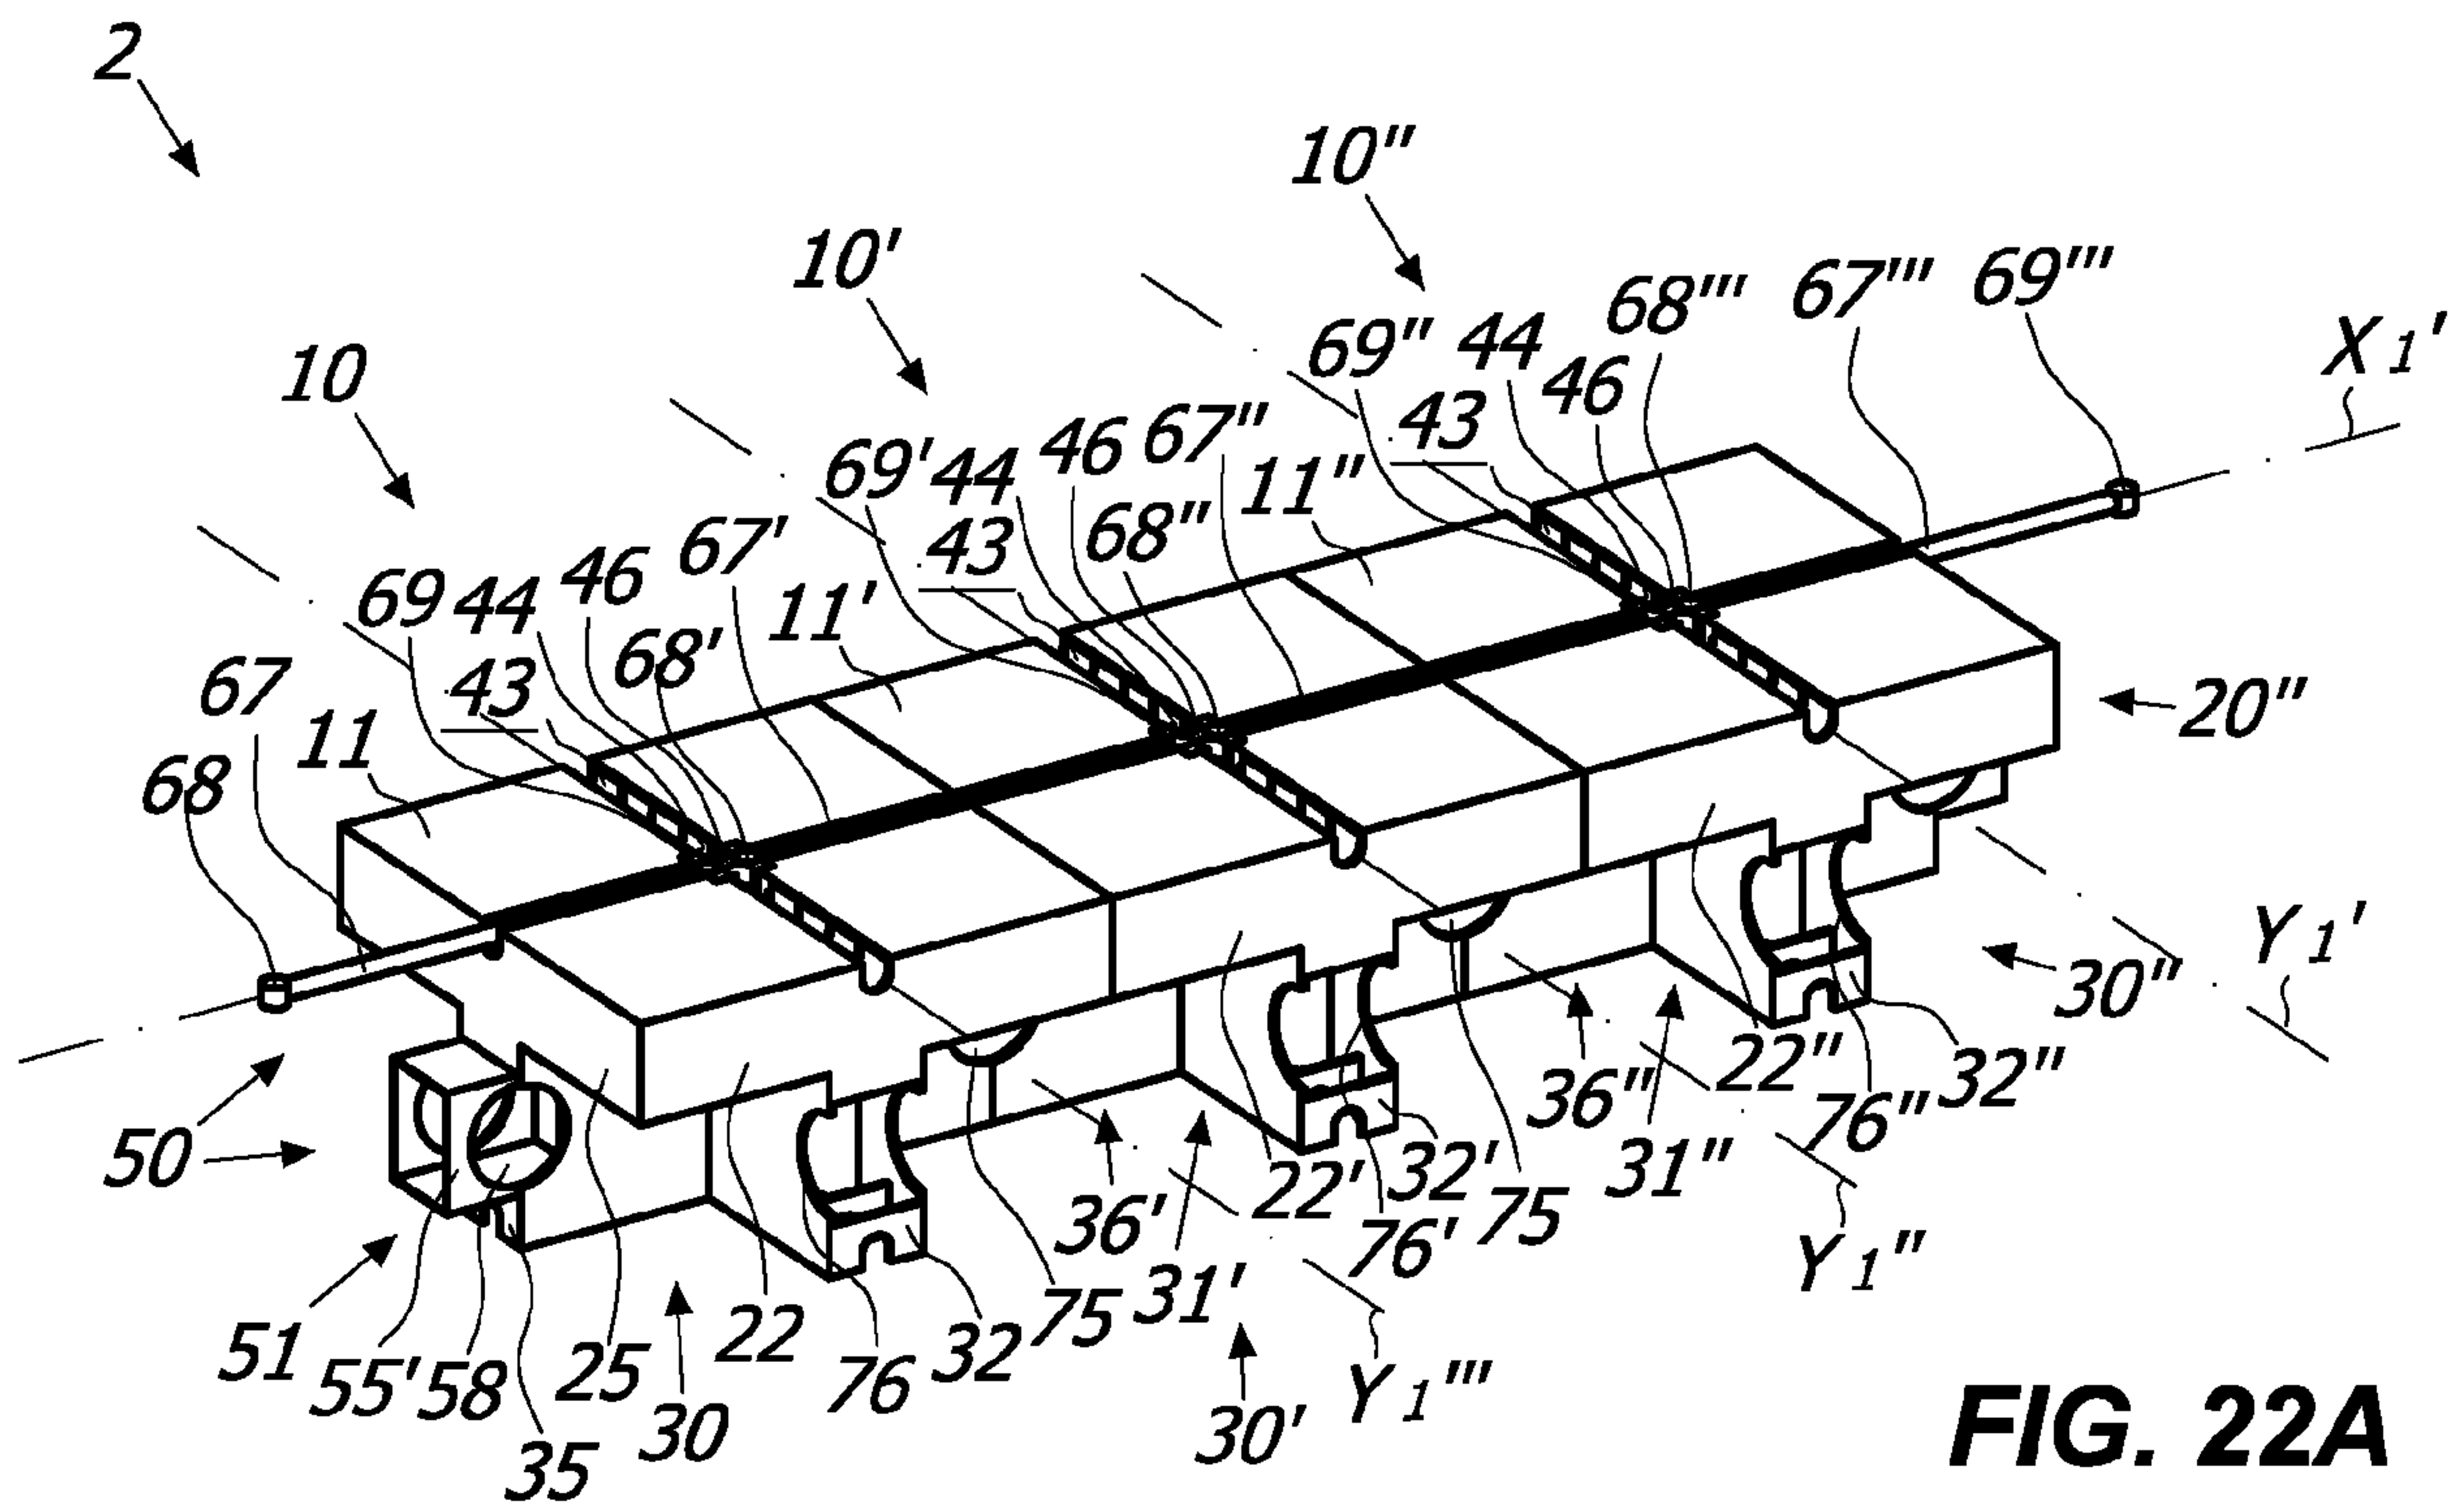


FIG. 22A

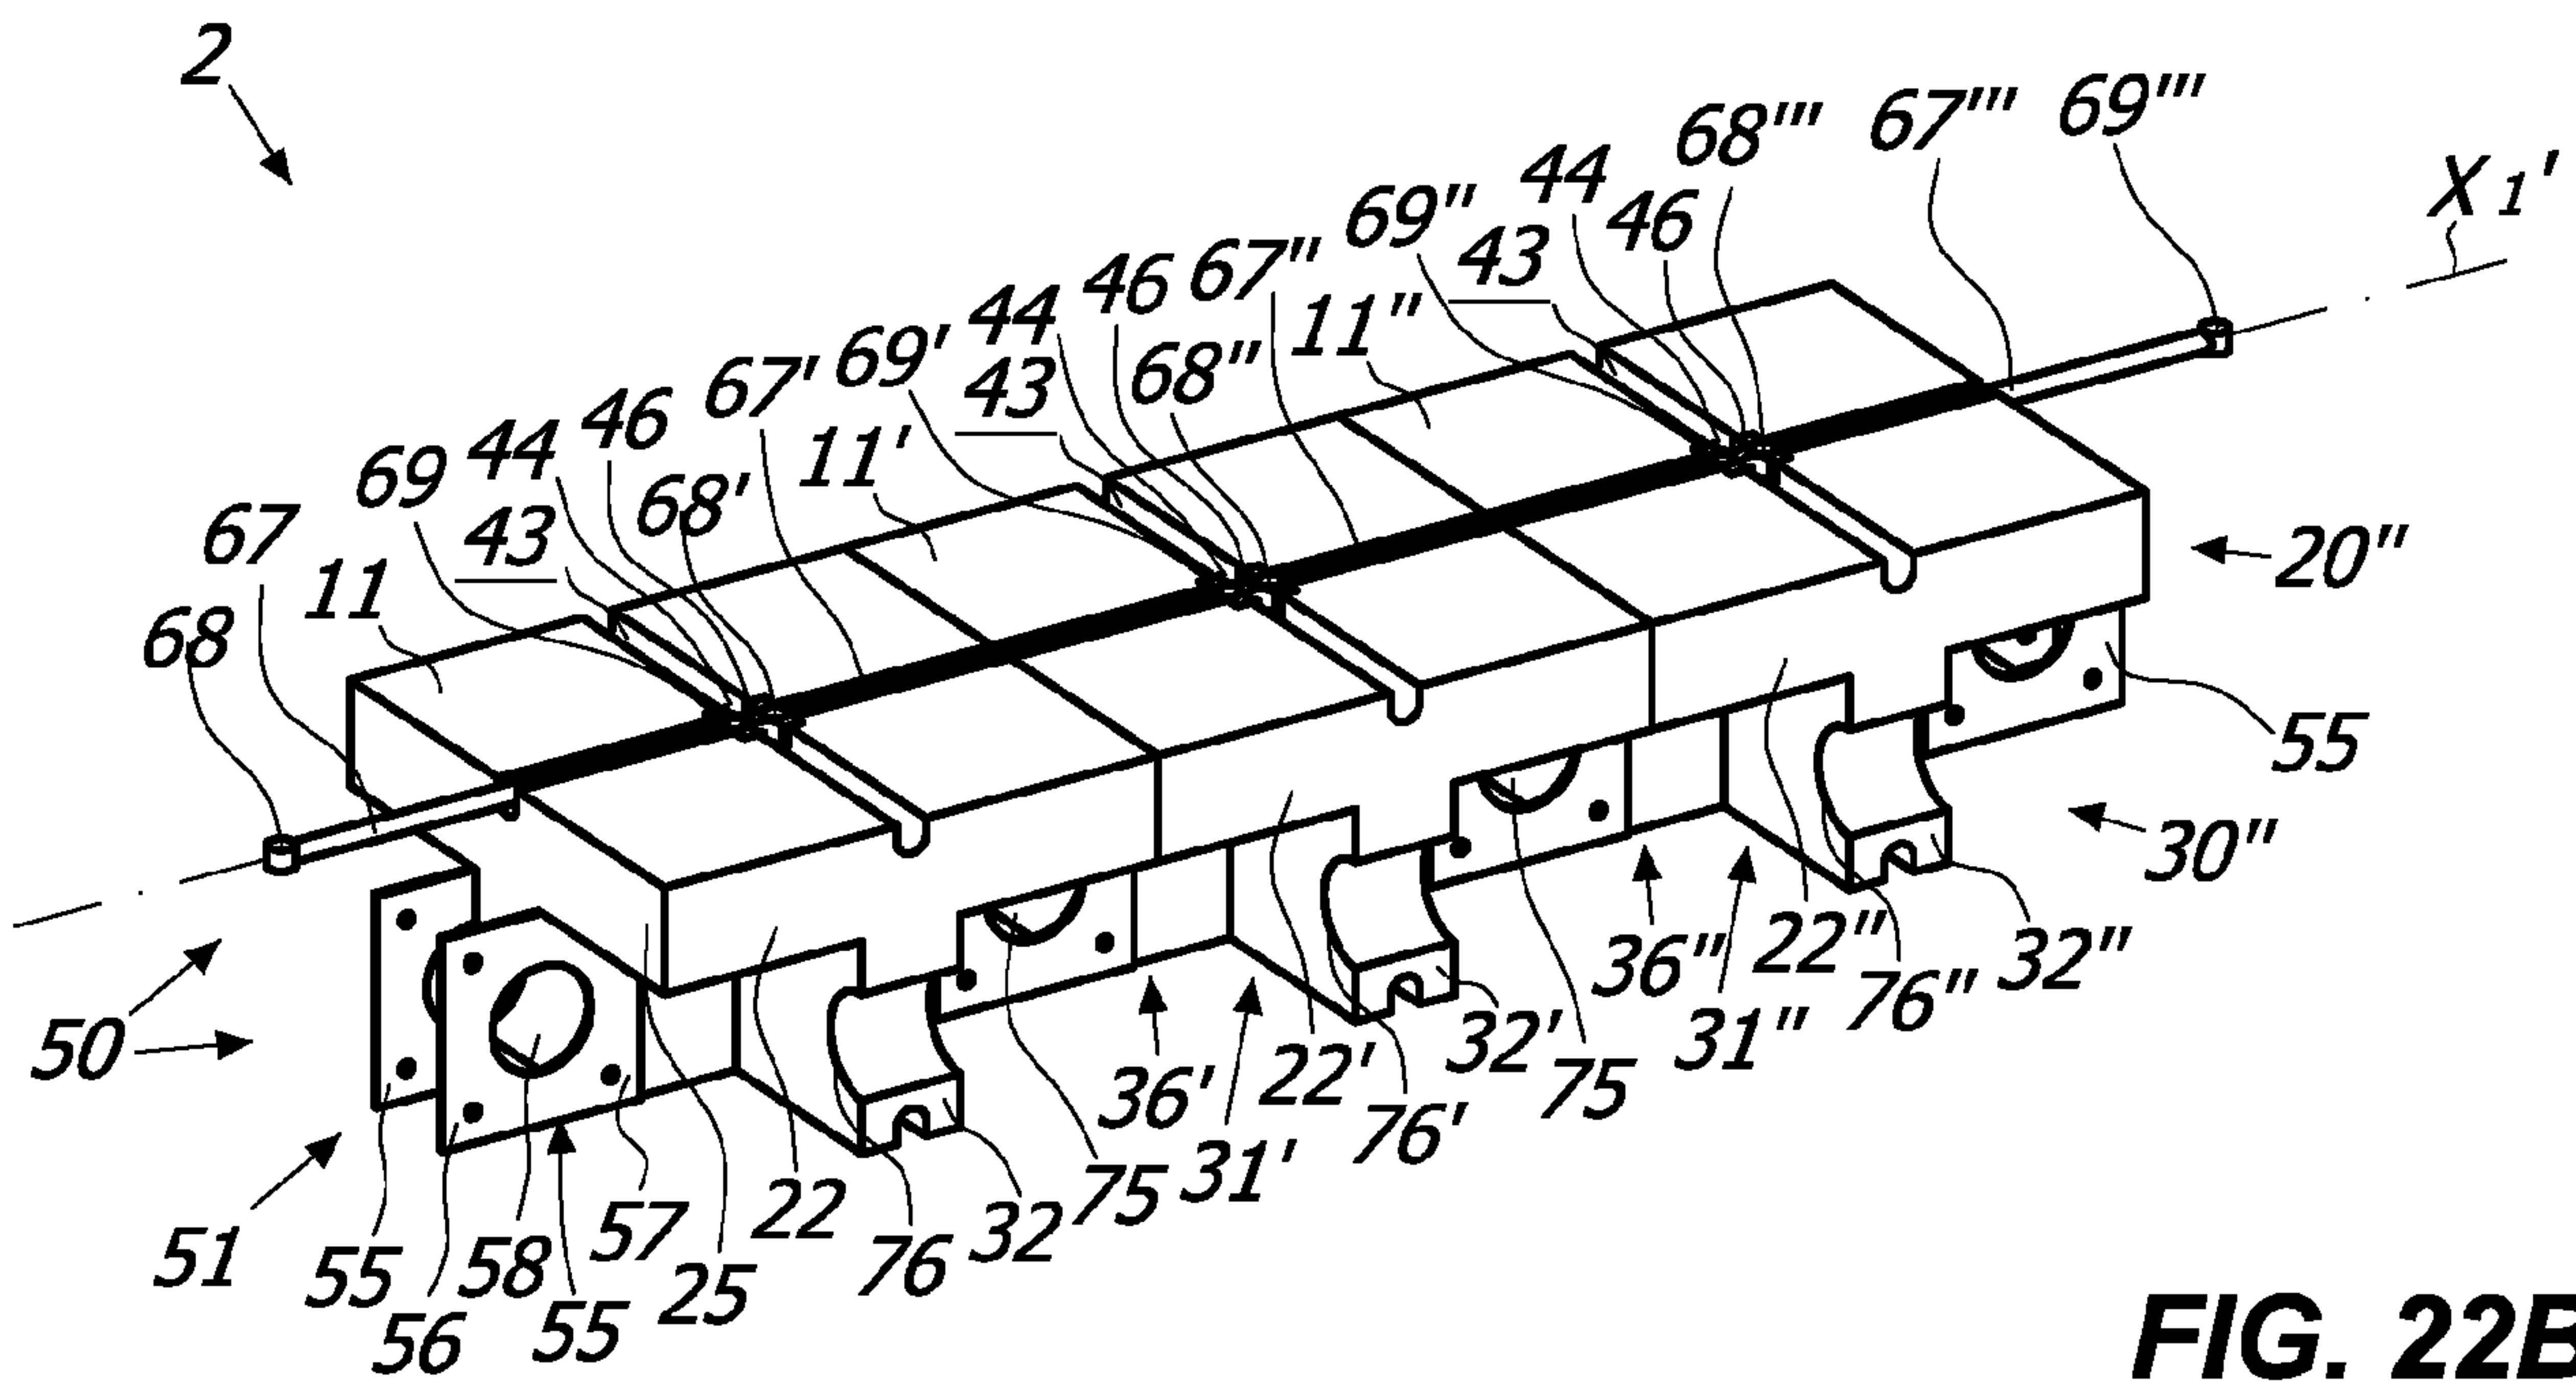


FIG. 22B

13 / 24

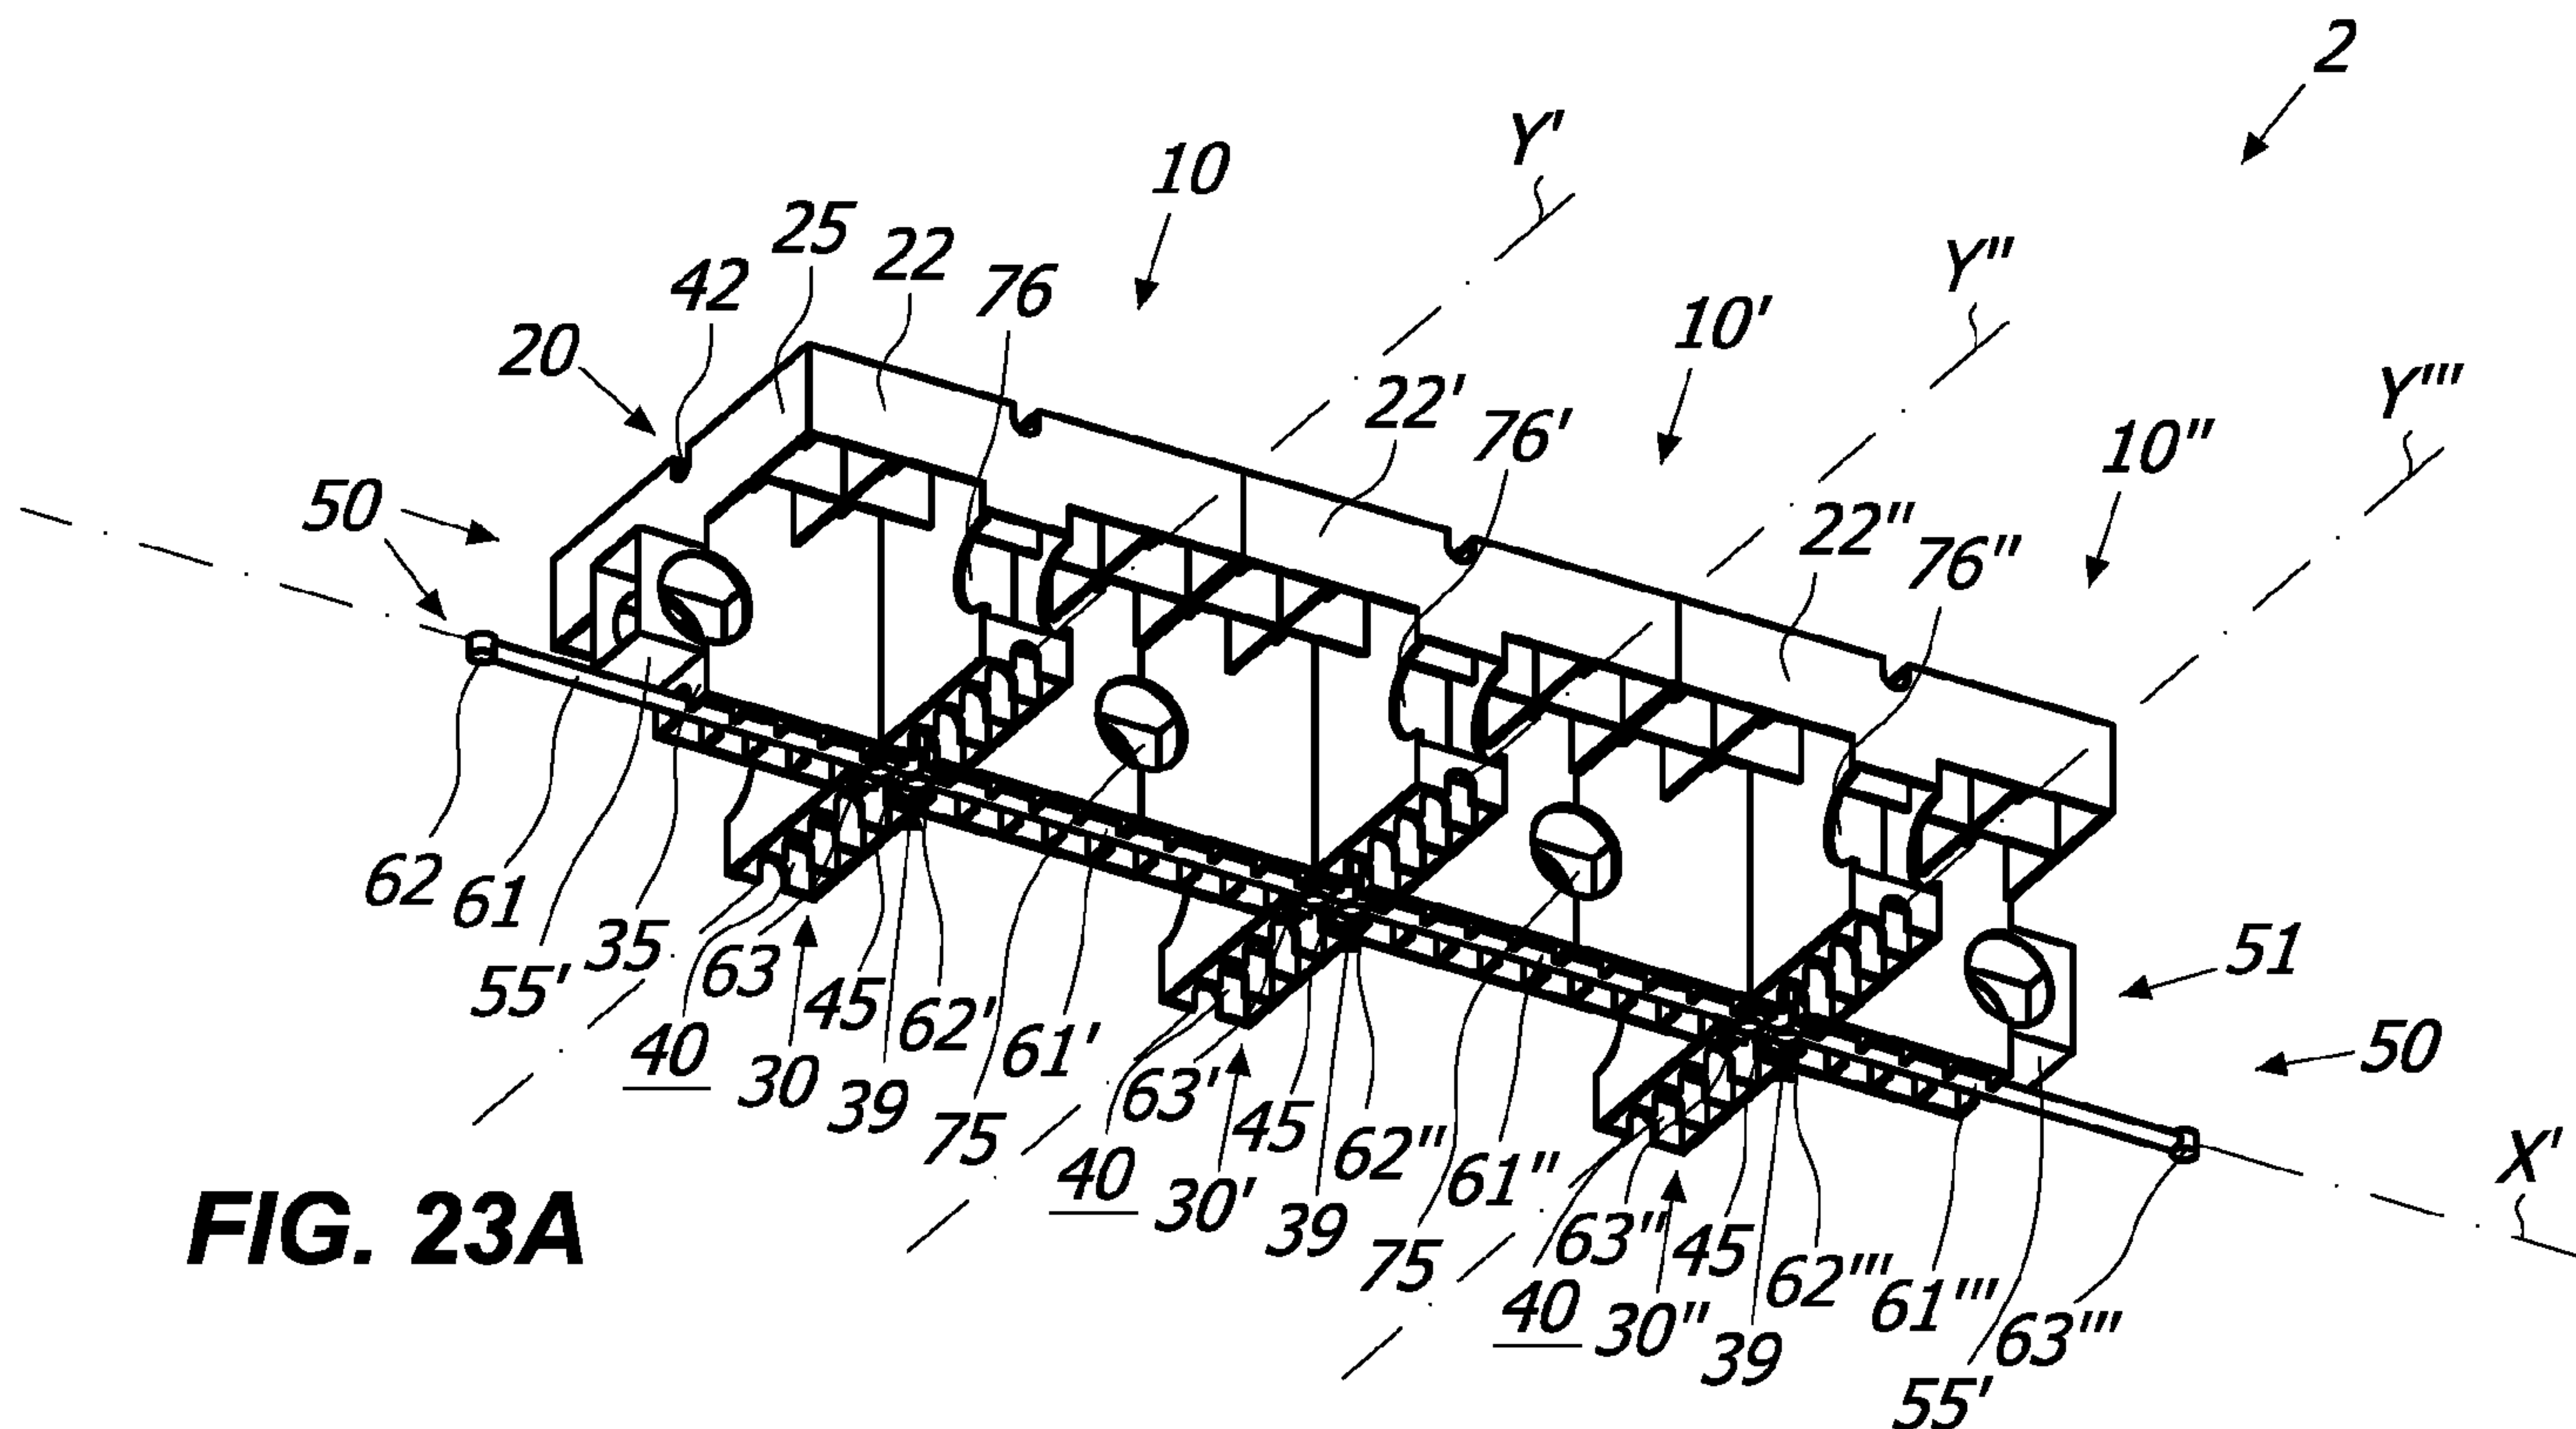


FIG. 23A

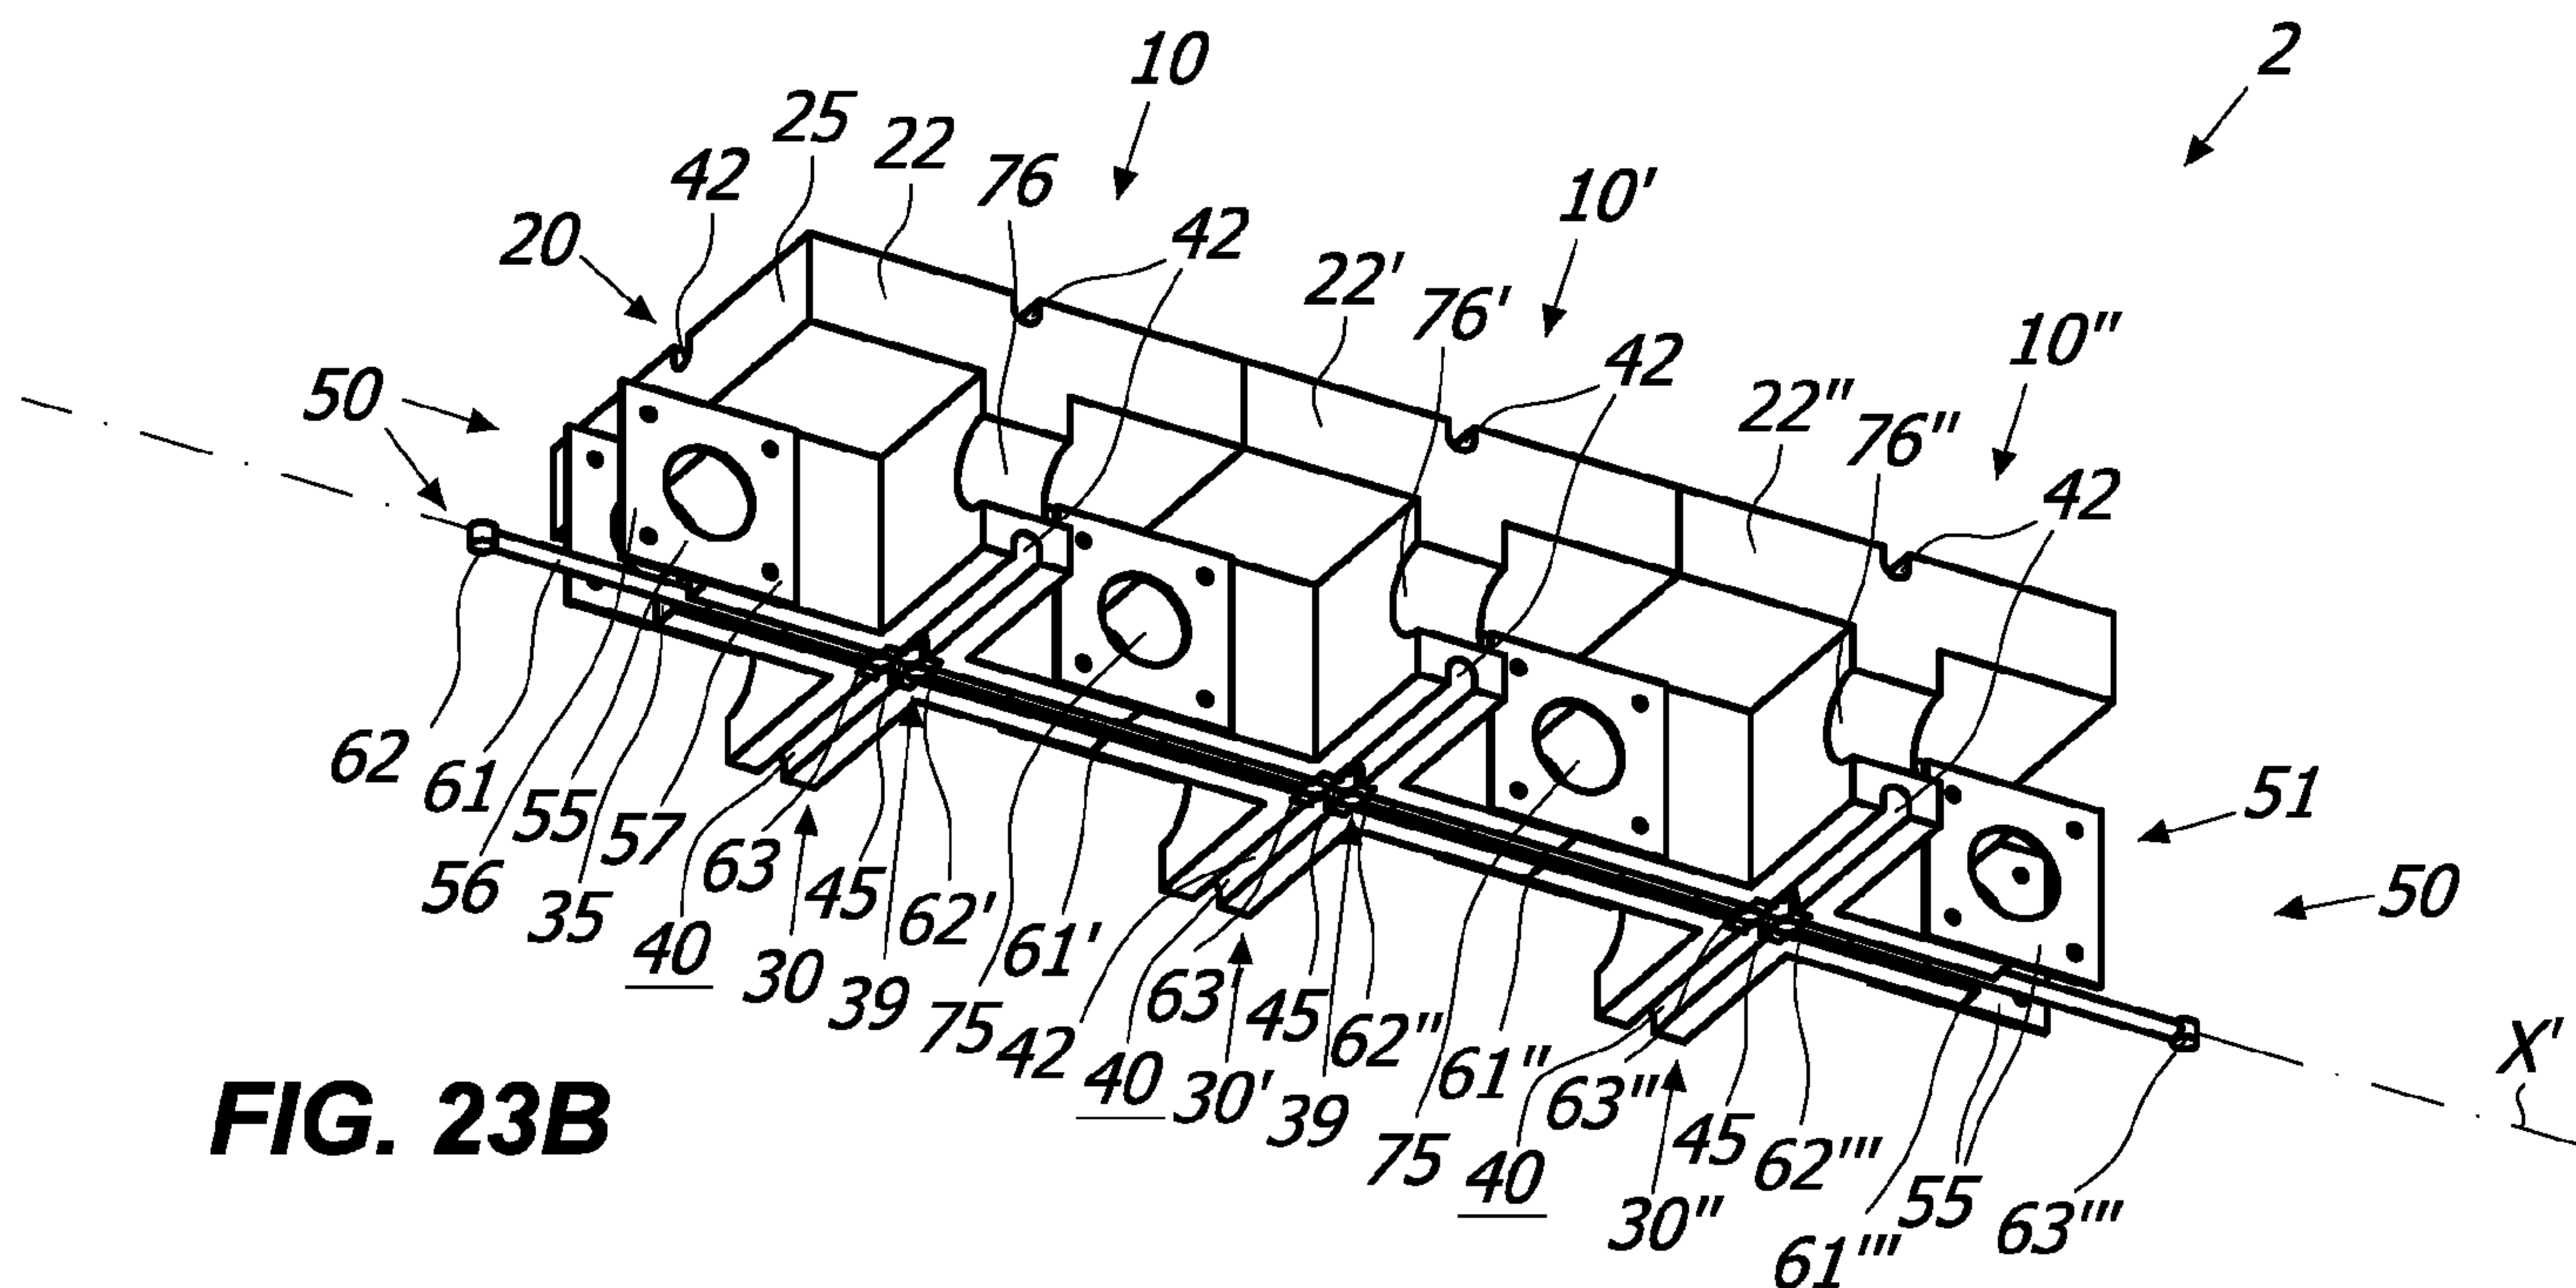


FIG. 23B

14 / 24

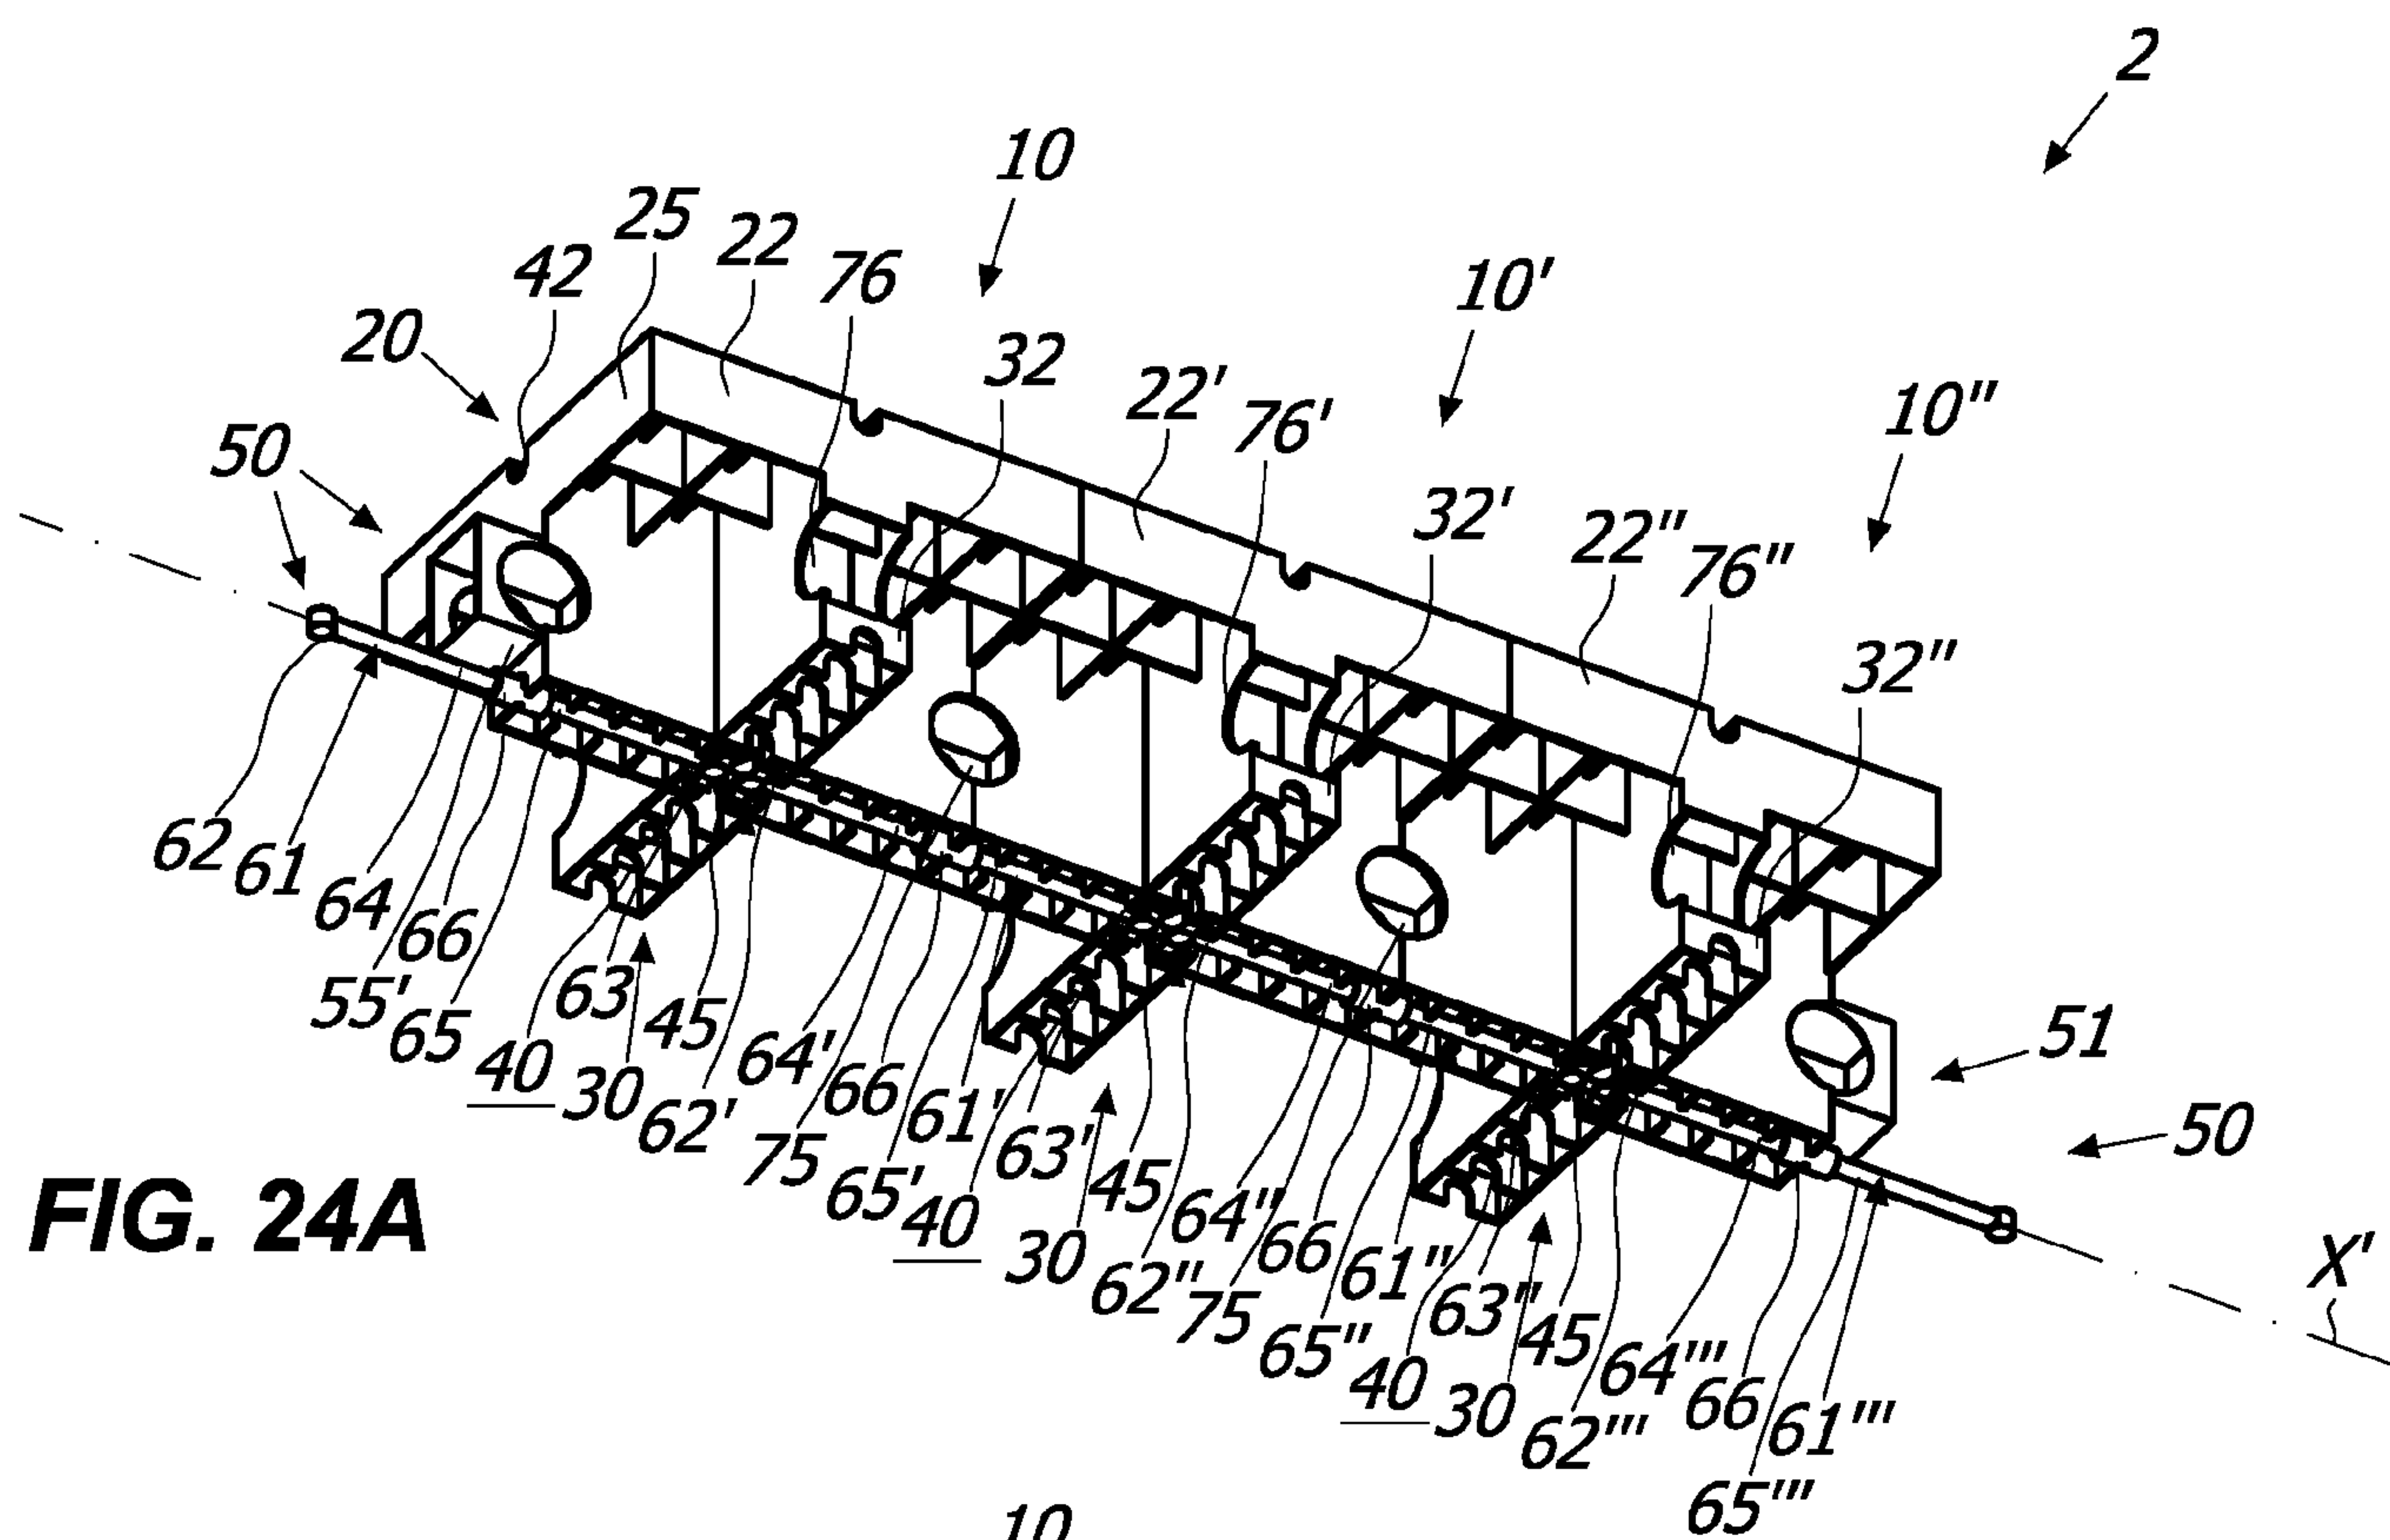


FIG. 24A



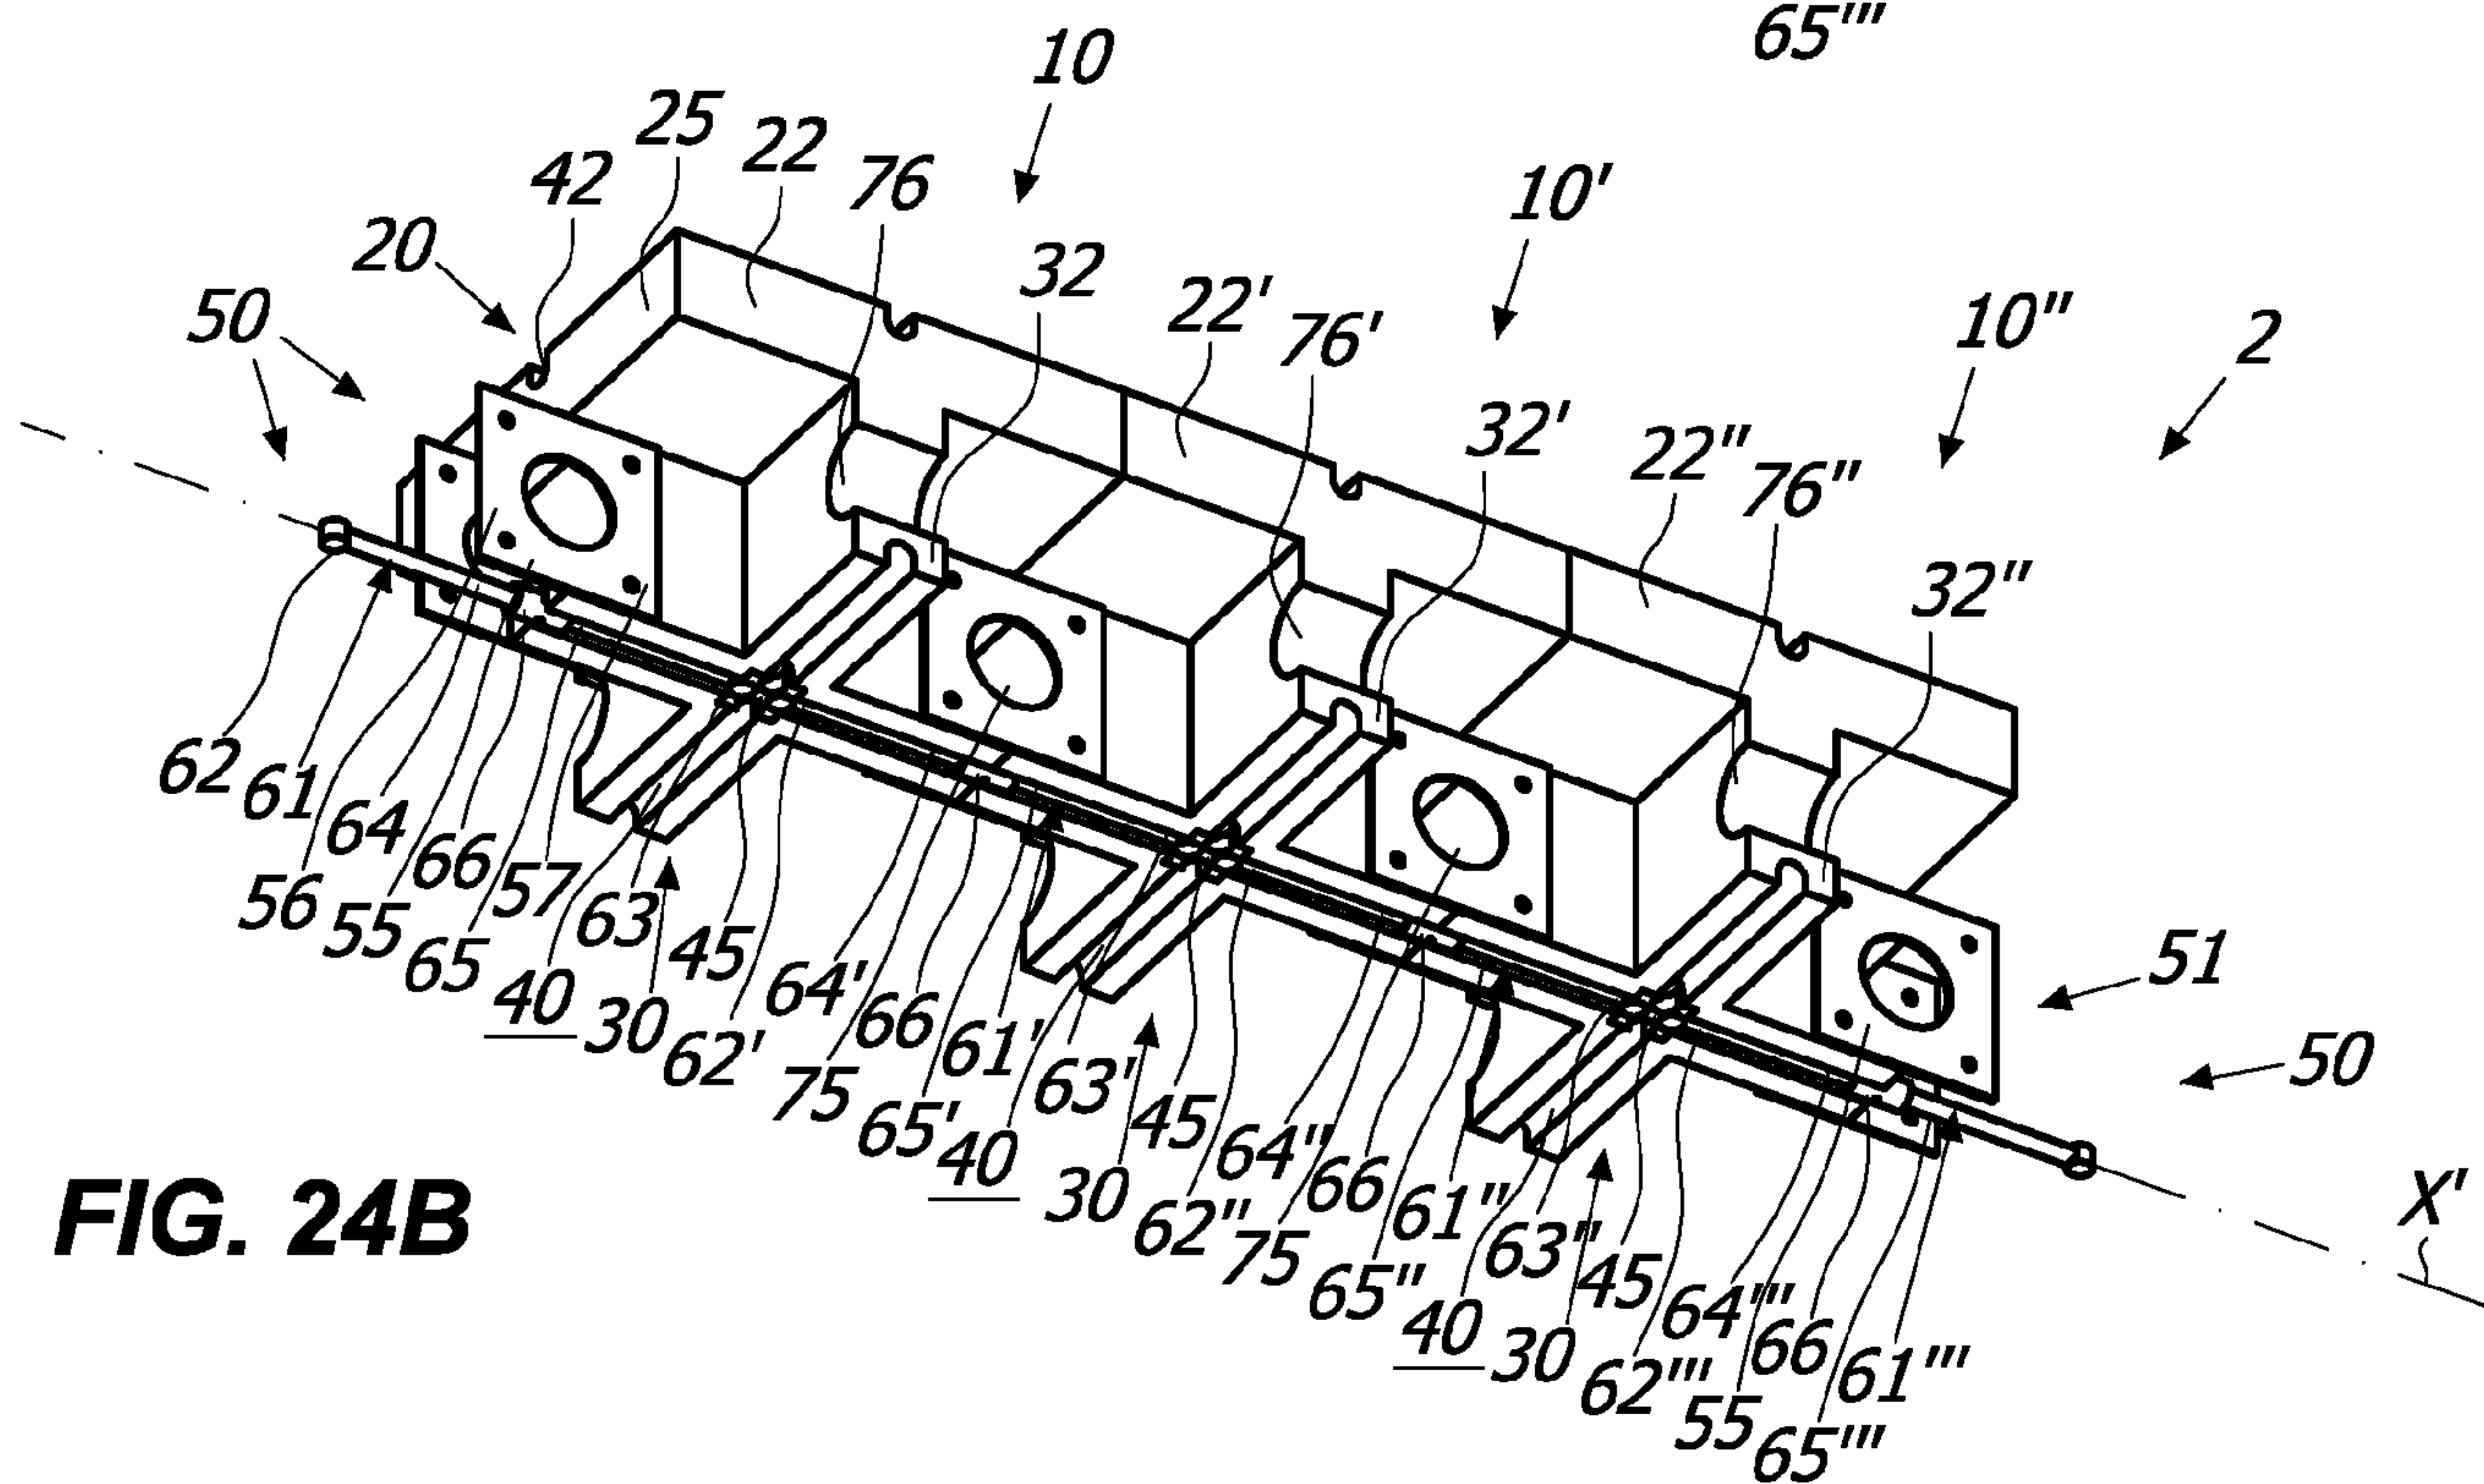


FIG. 24B

15 / 24

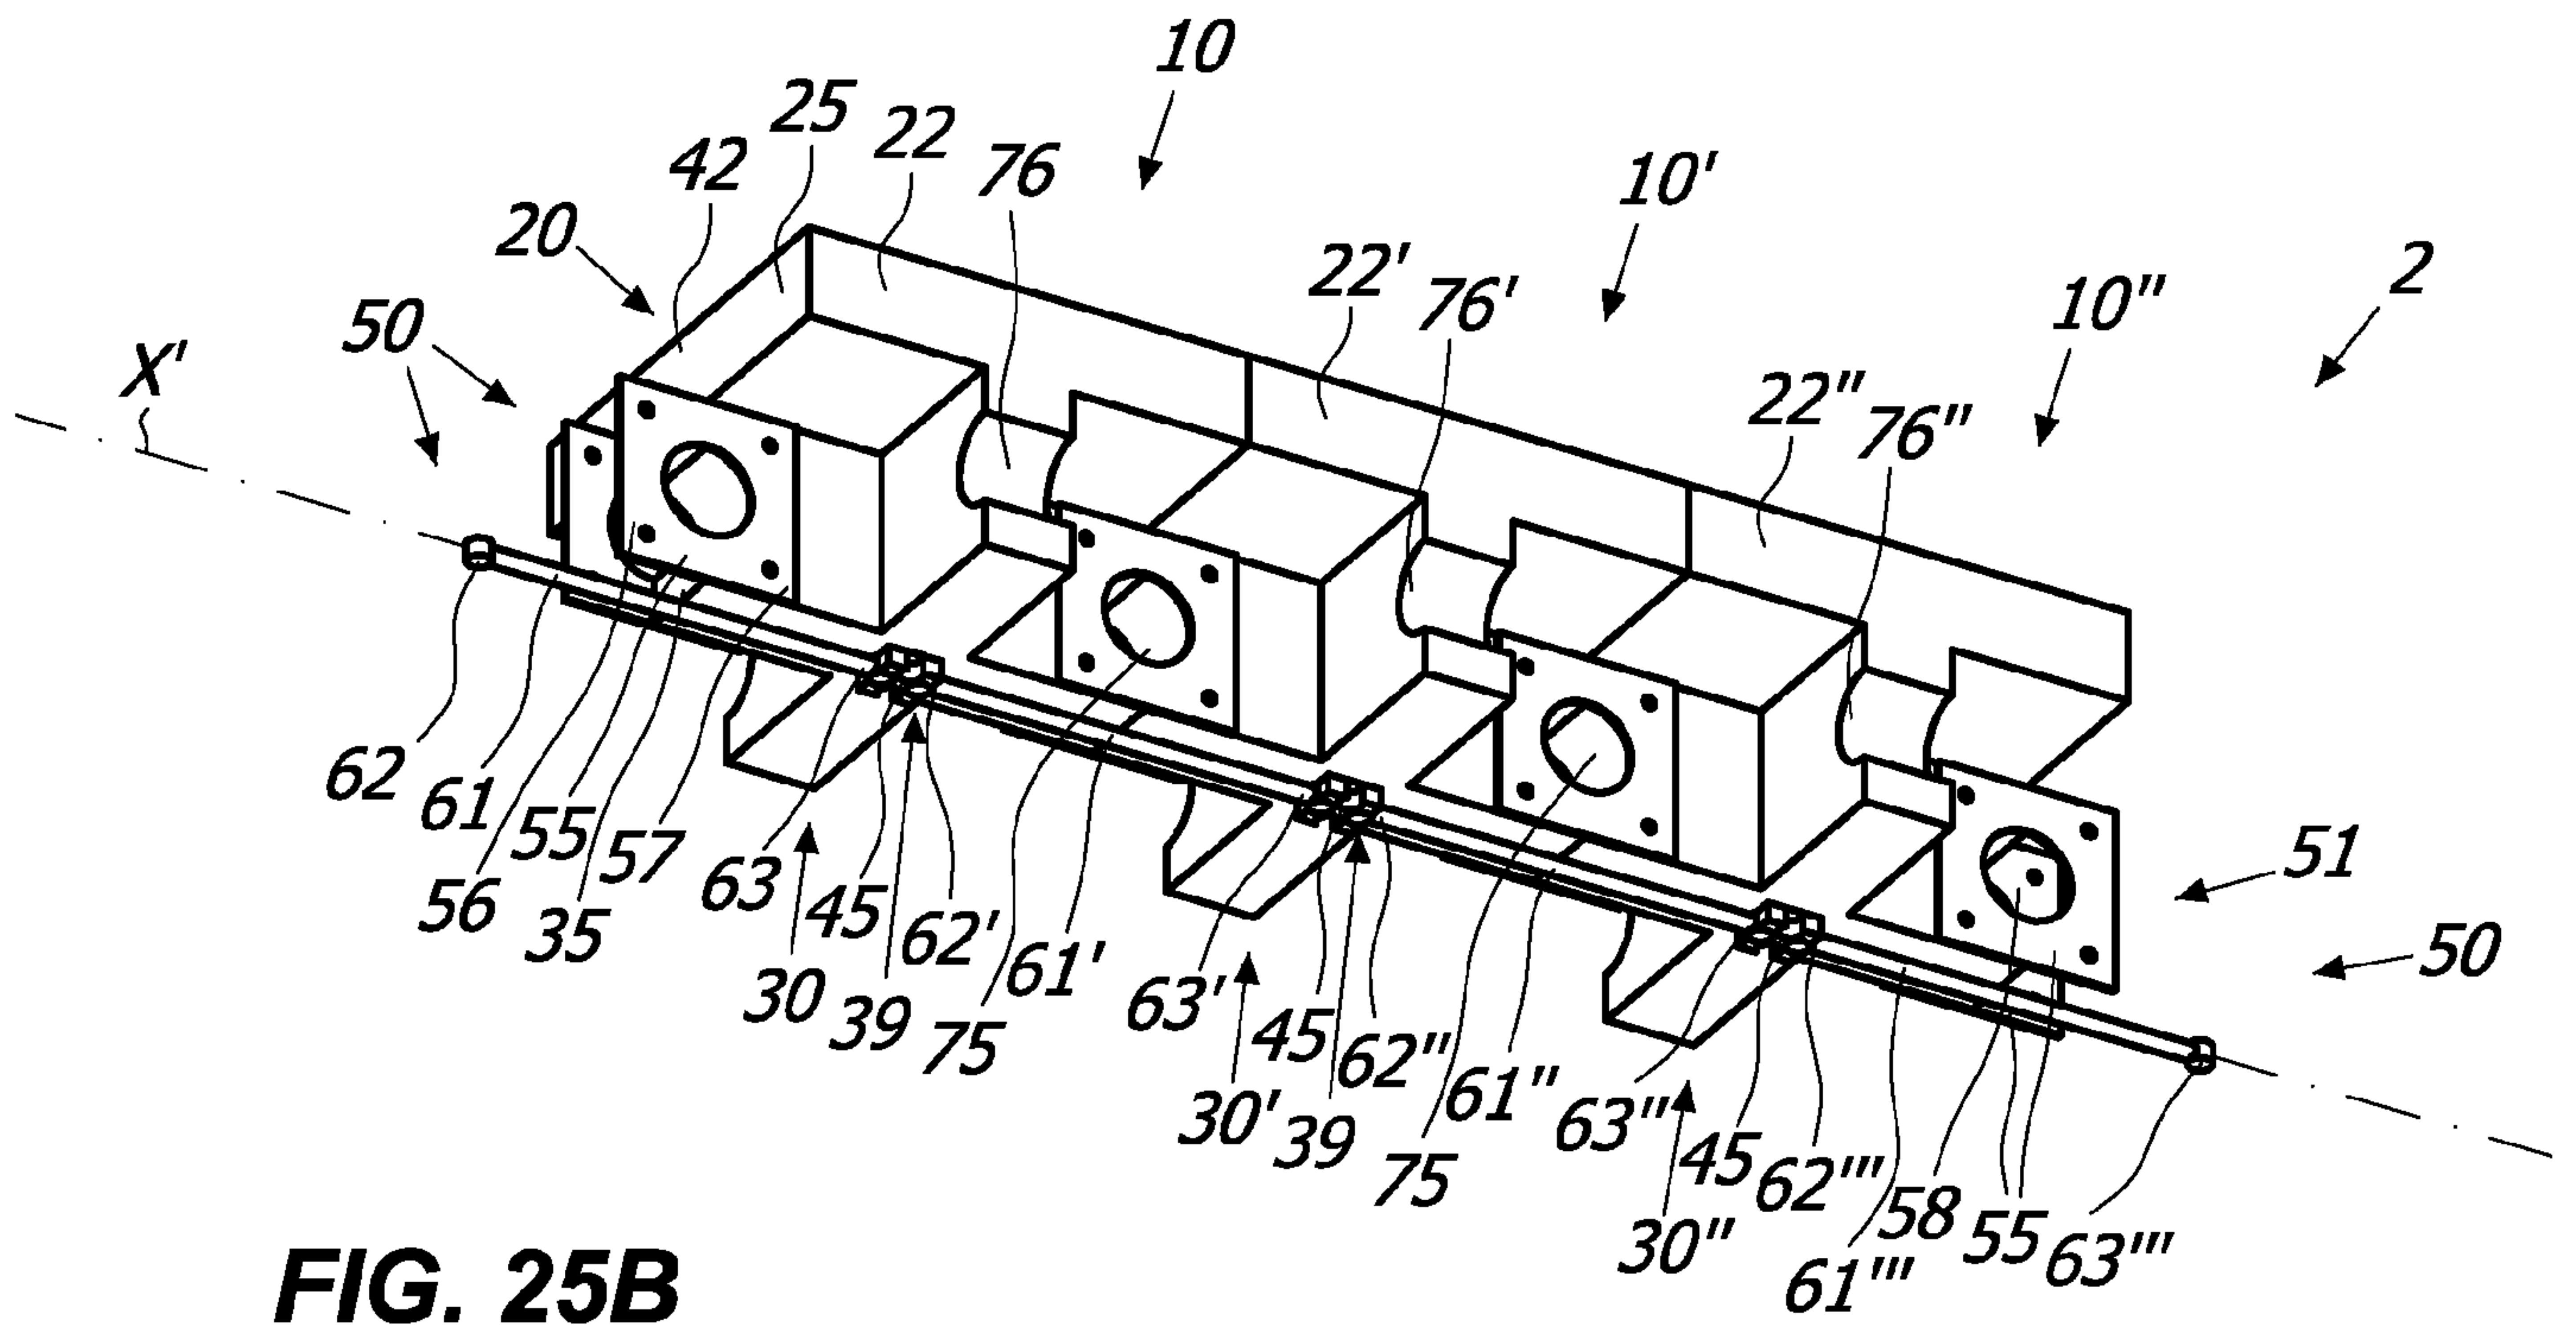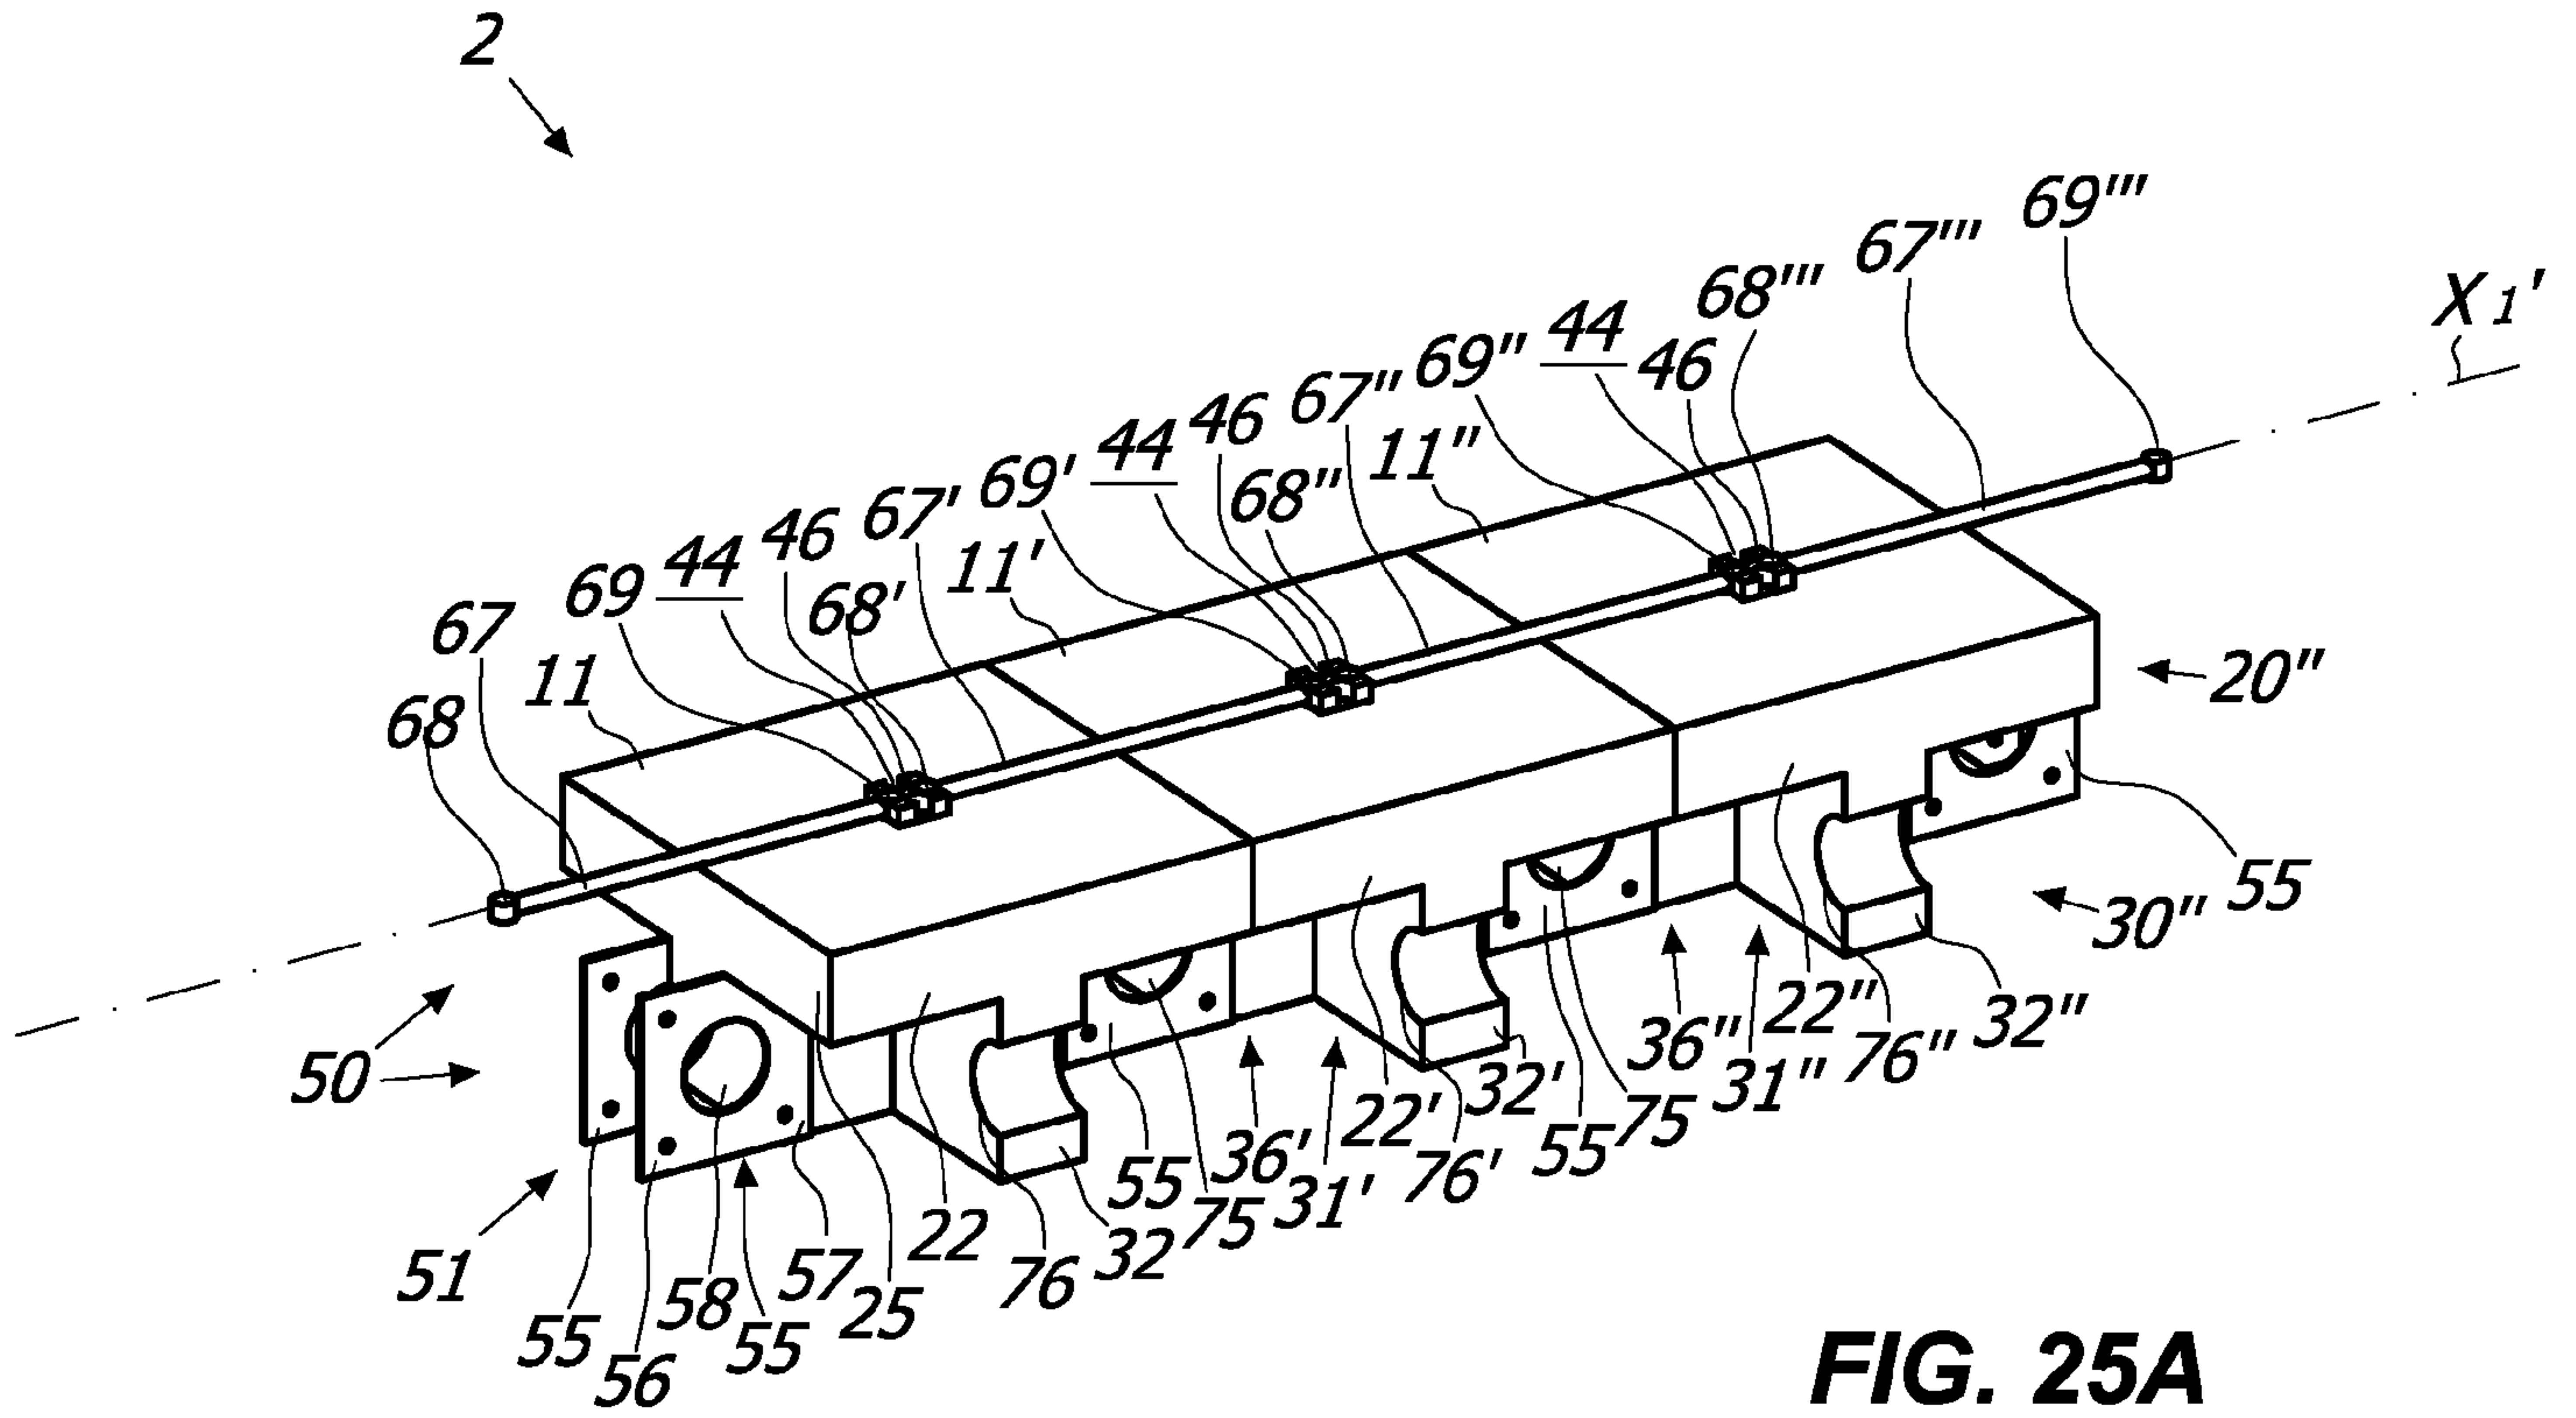

16 / 24






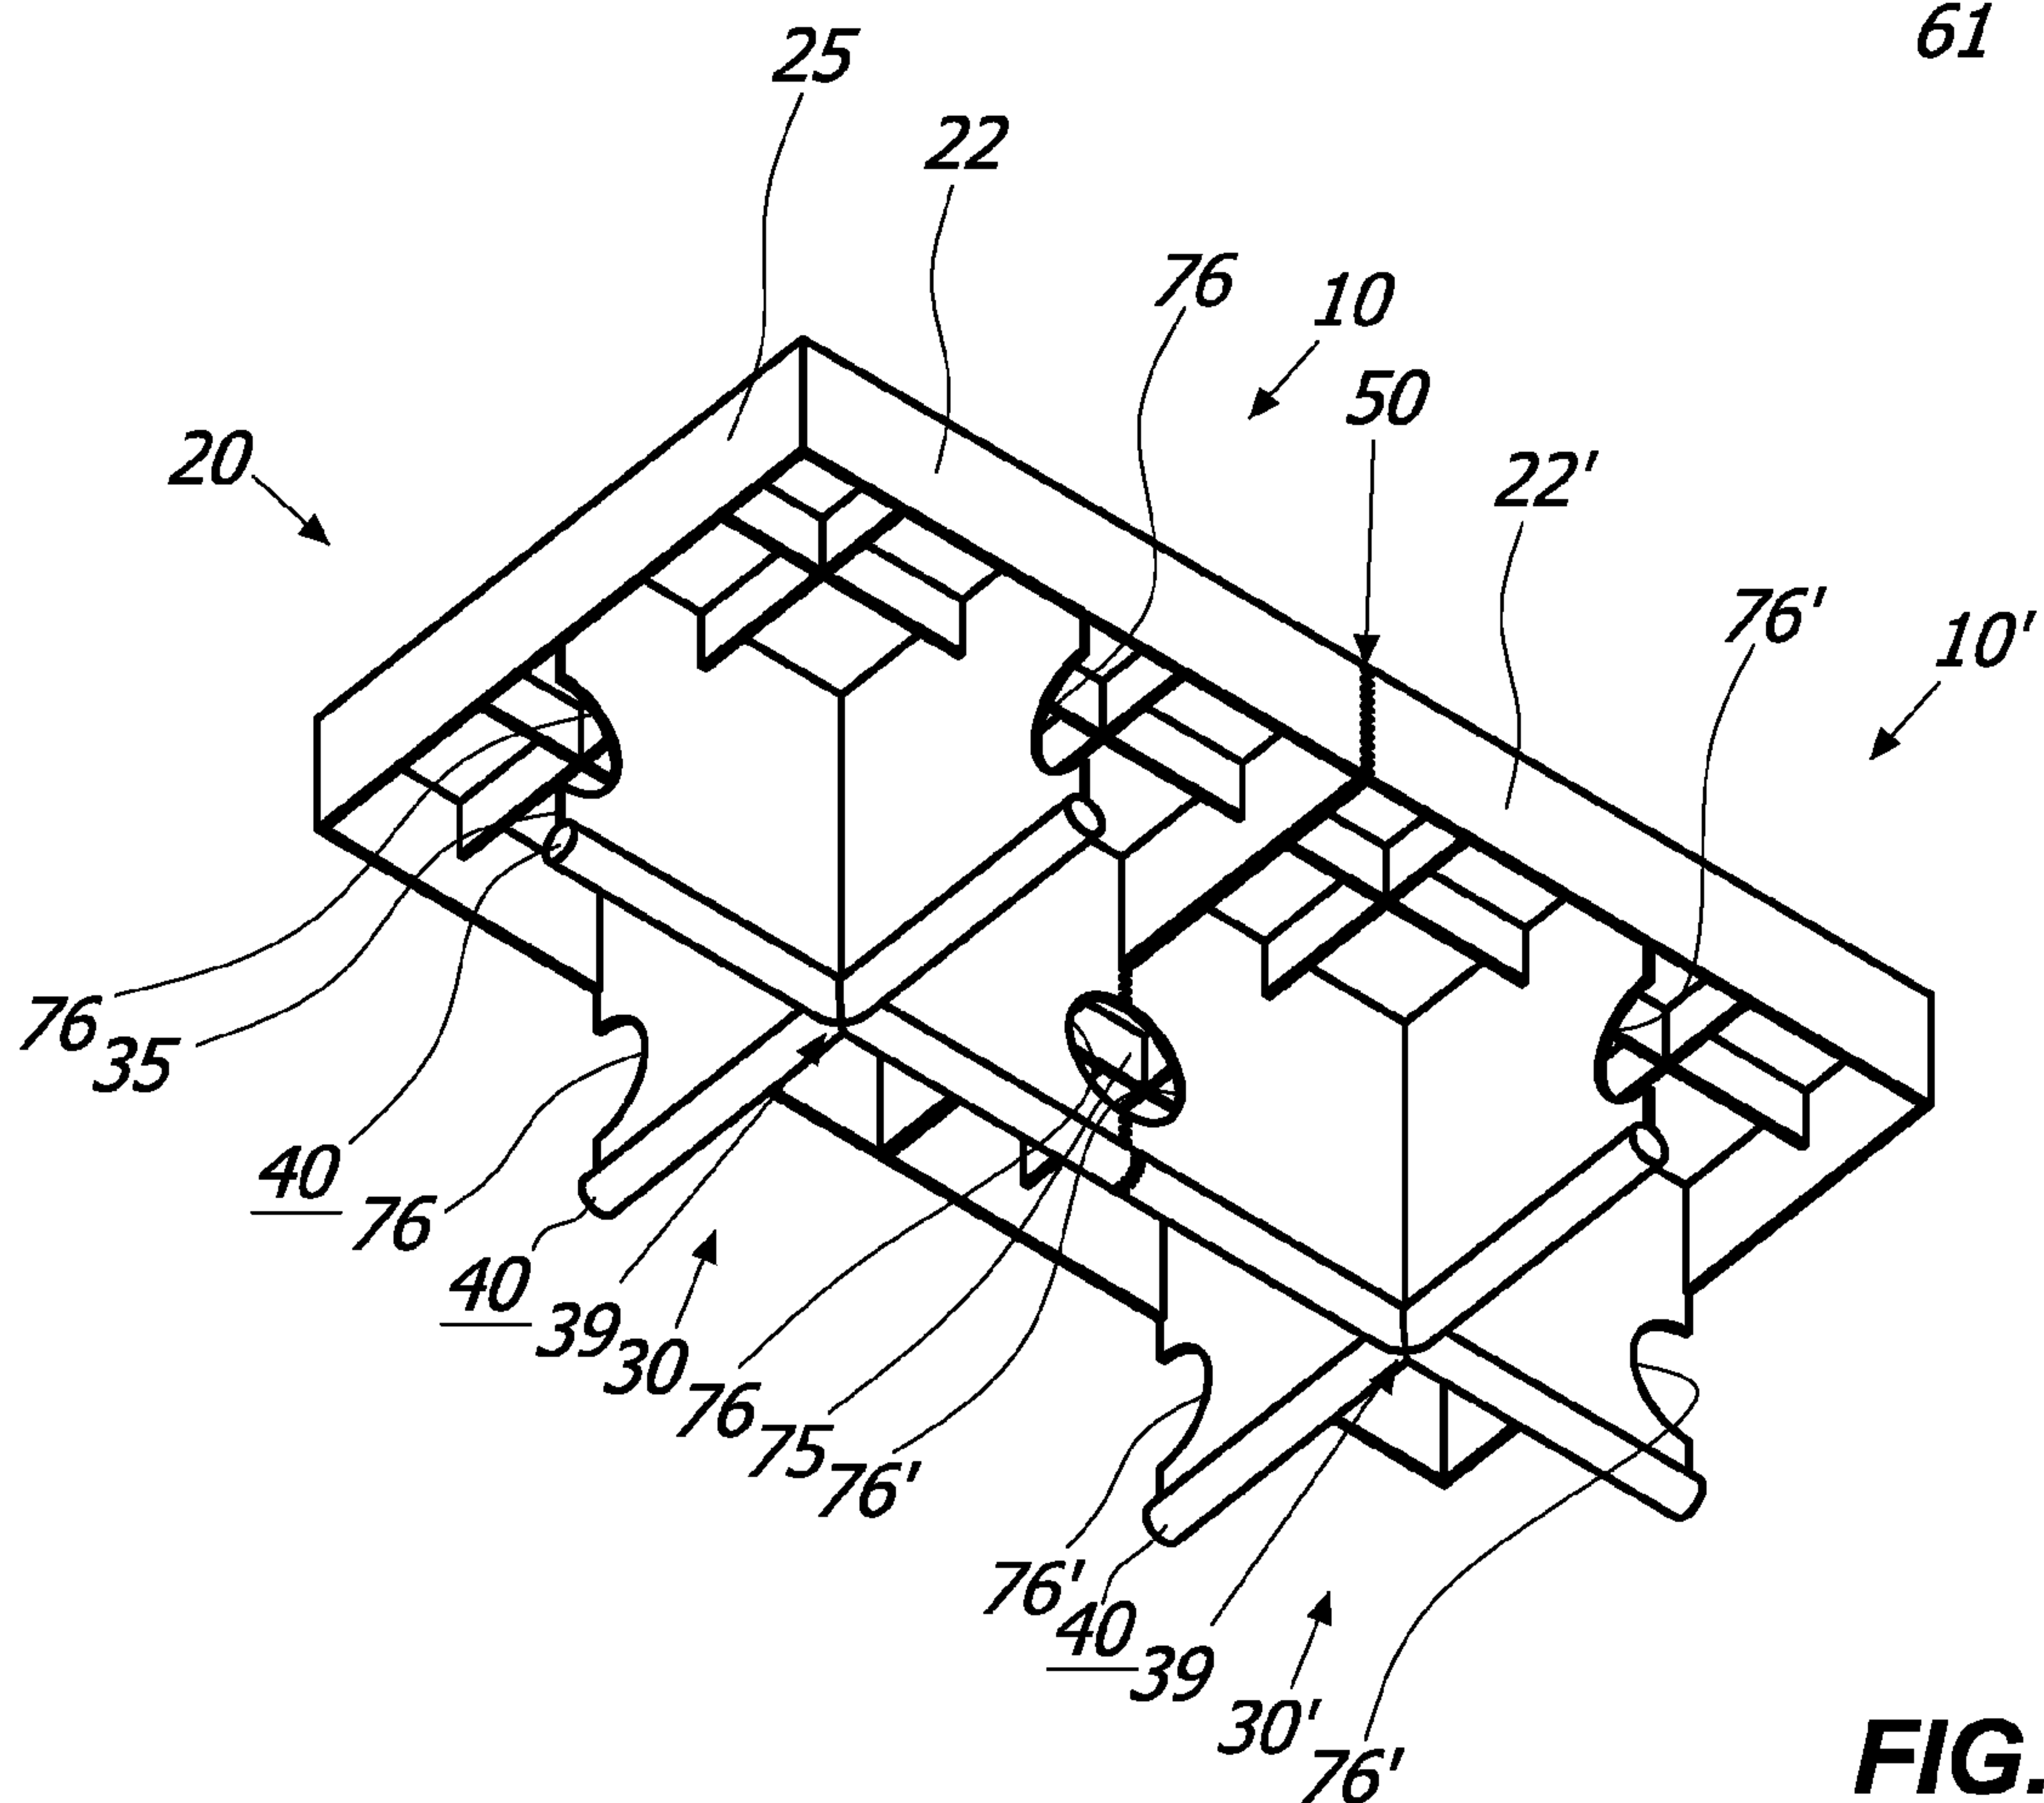


FIG. 27

17 / 24

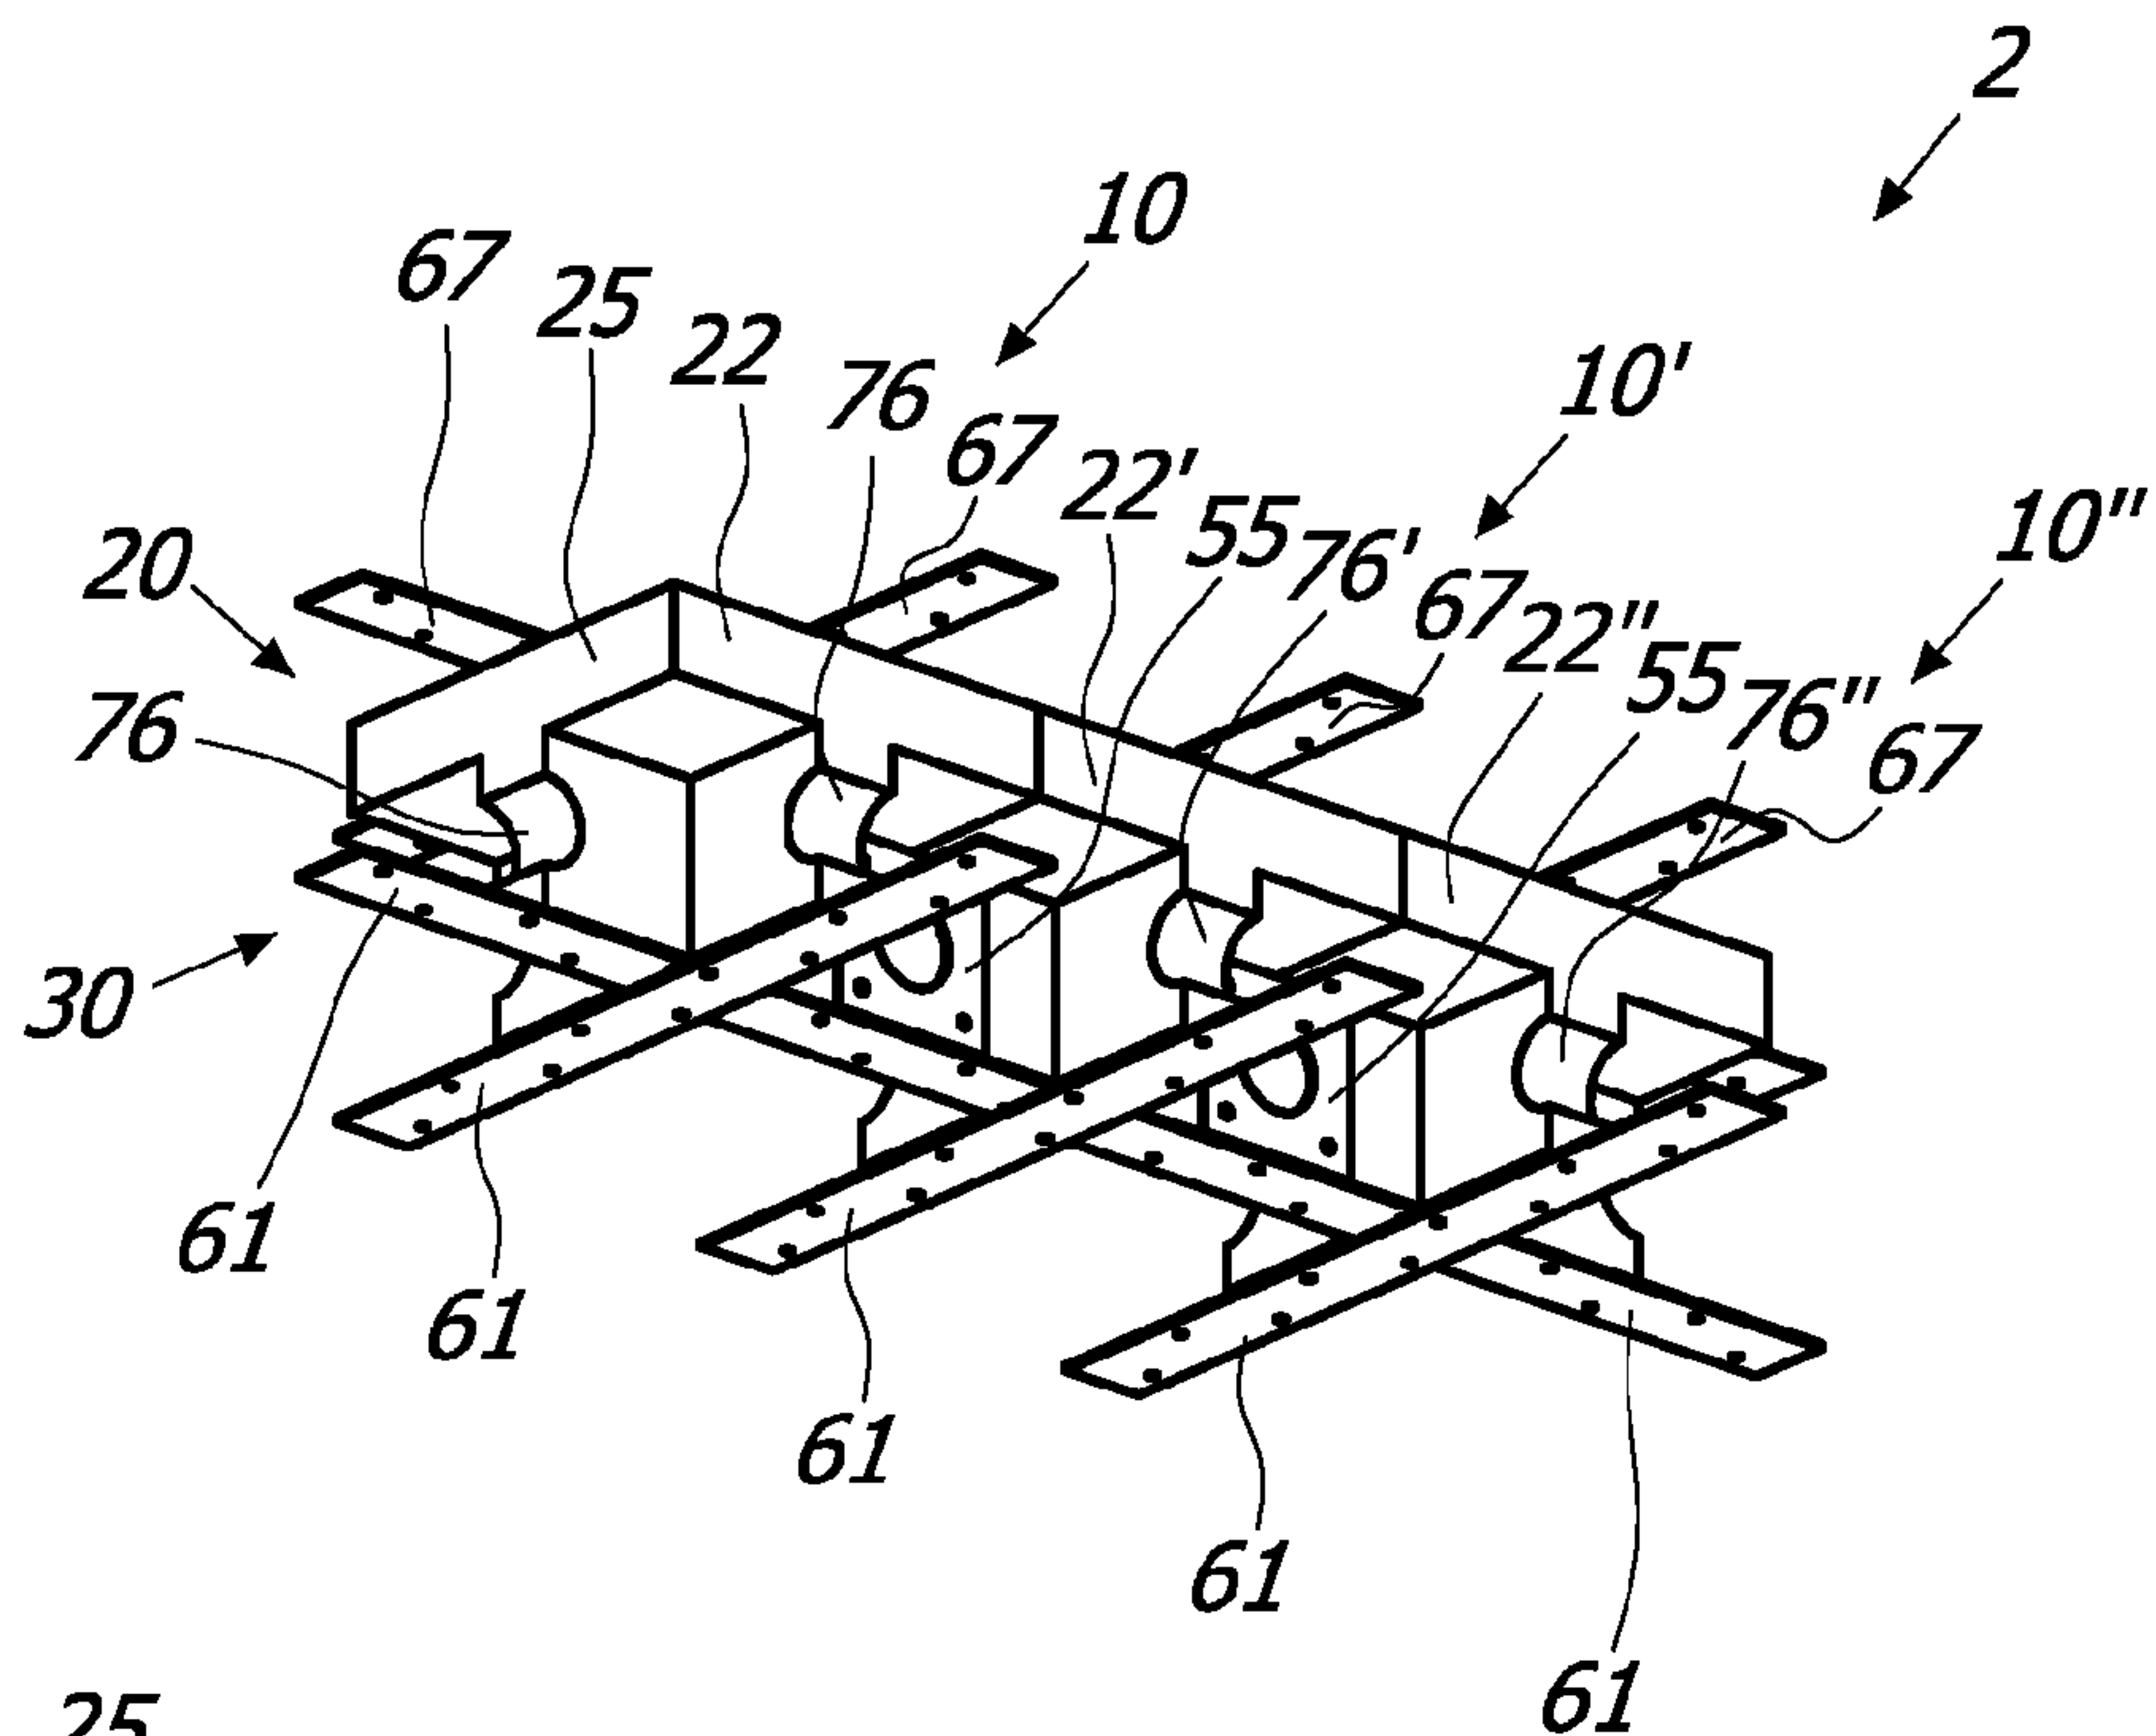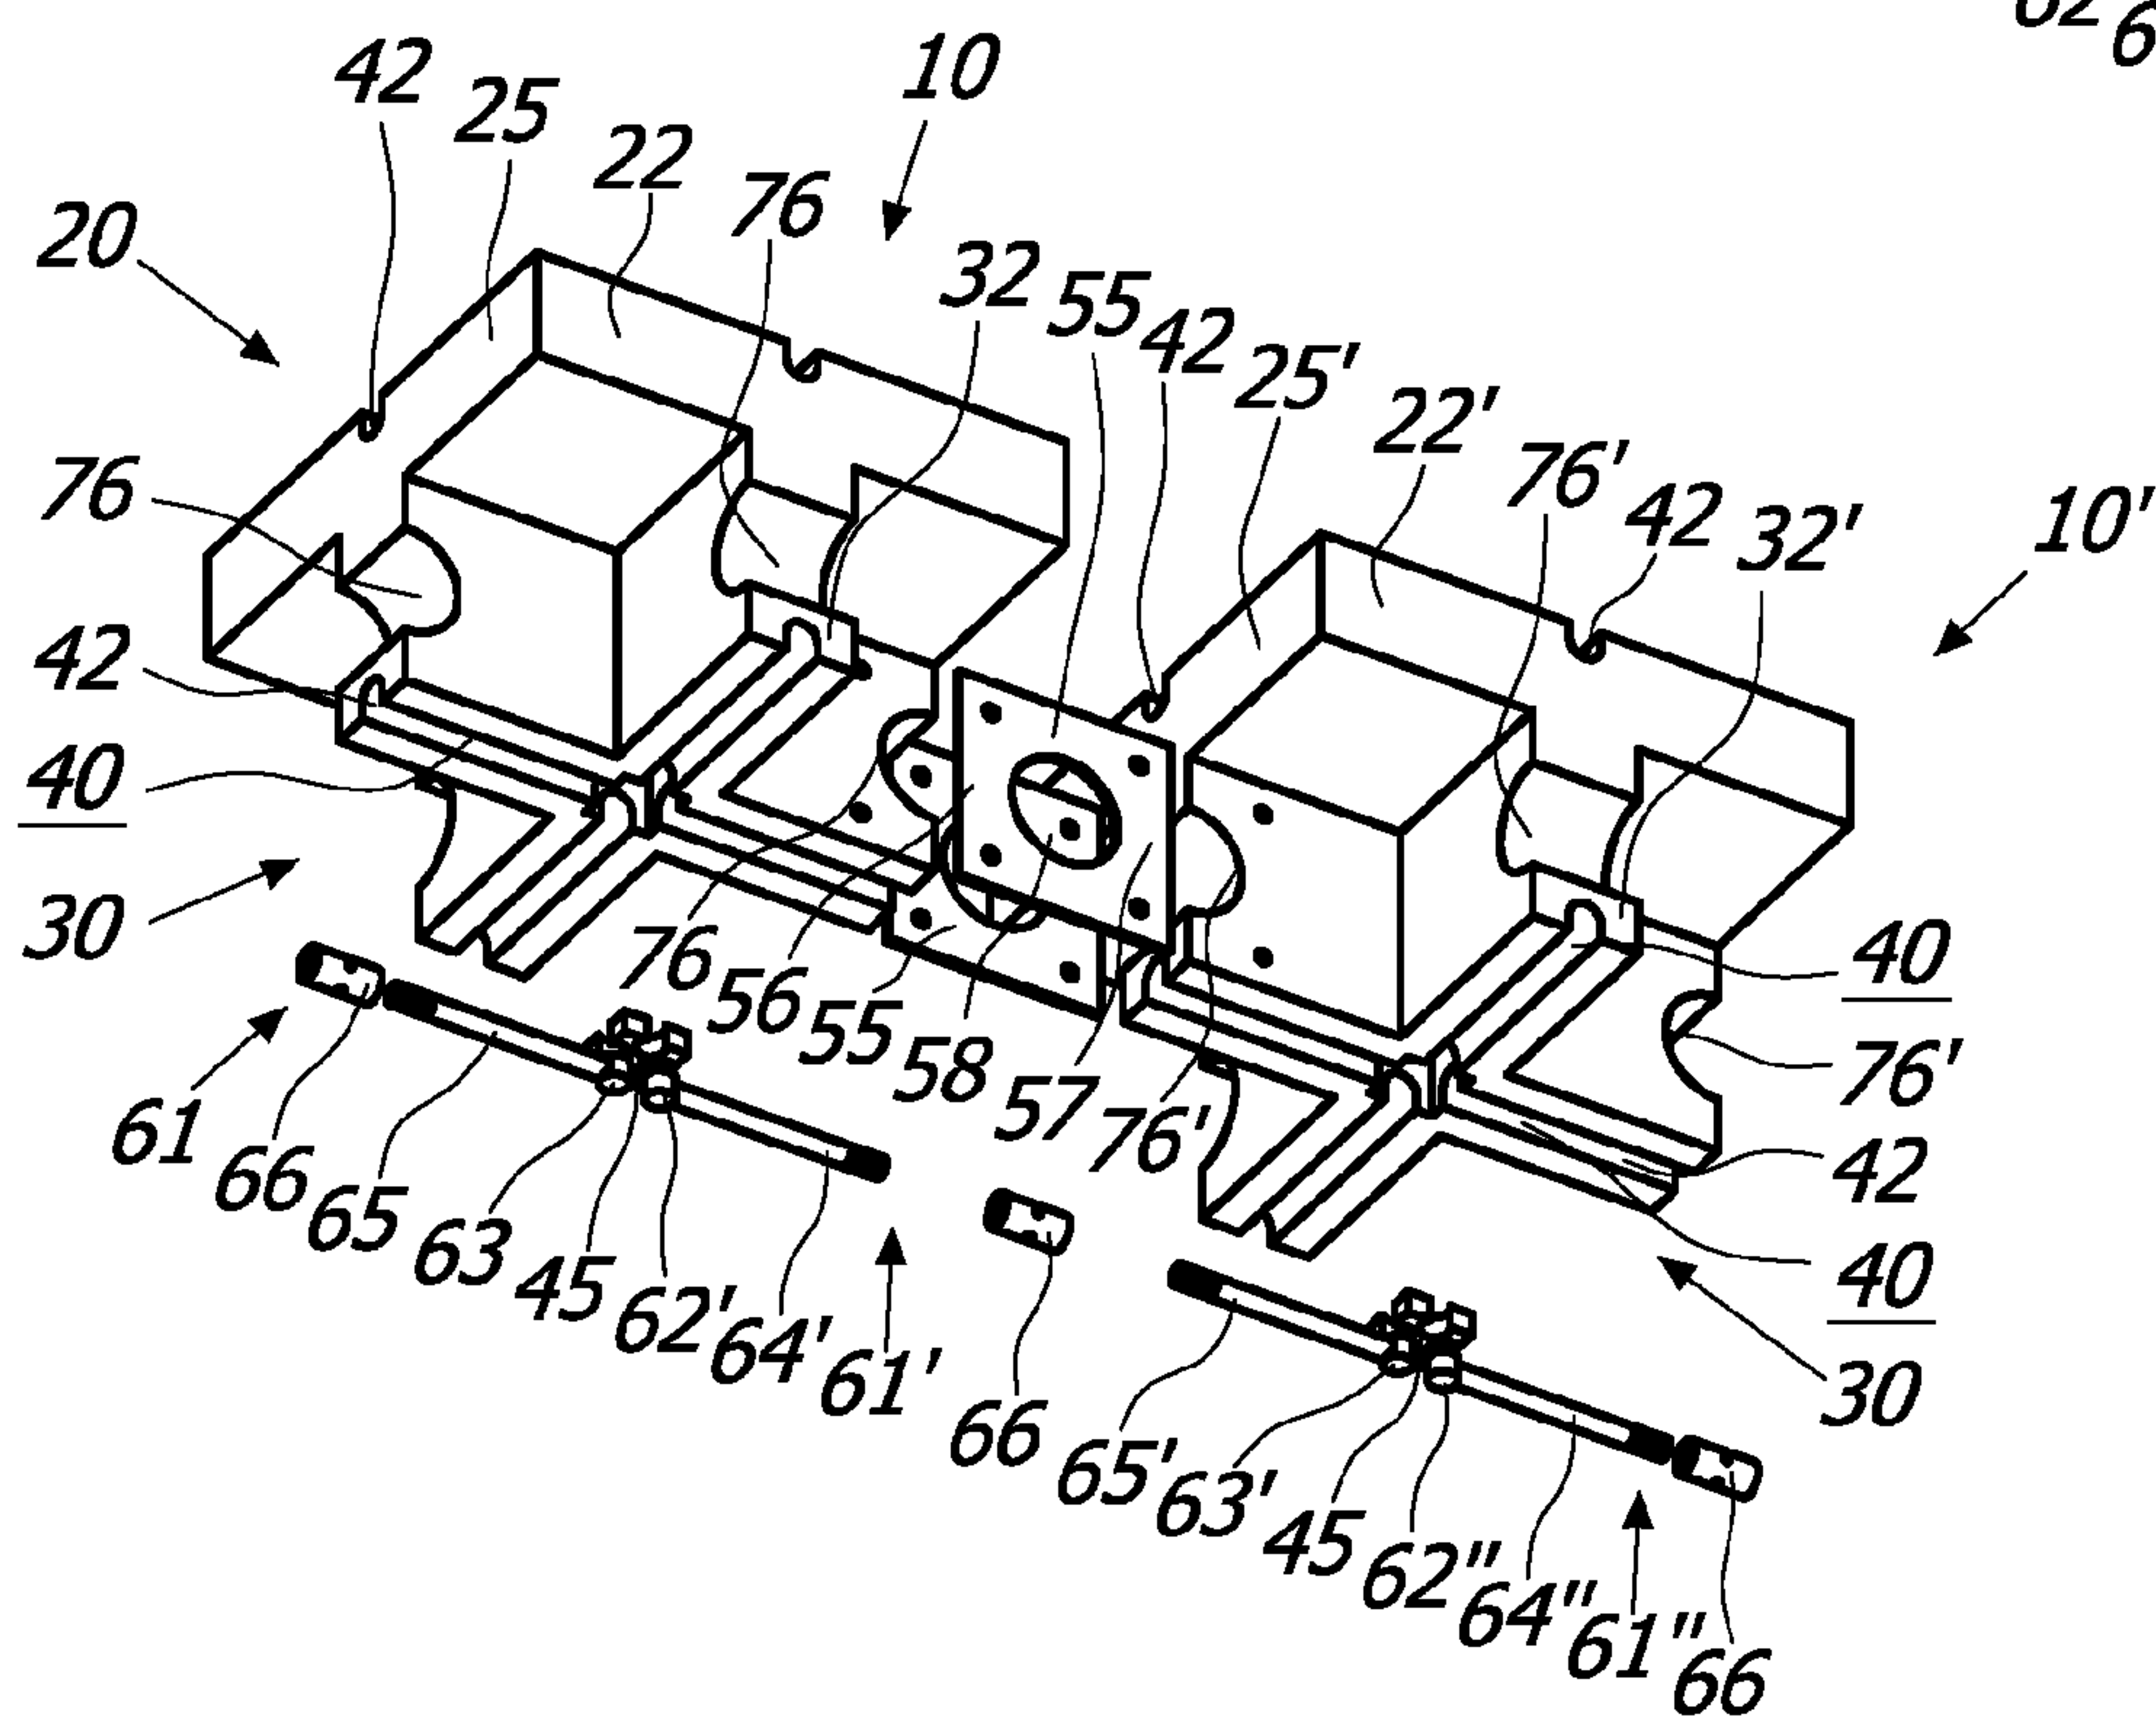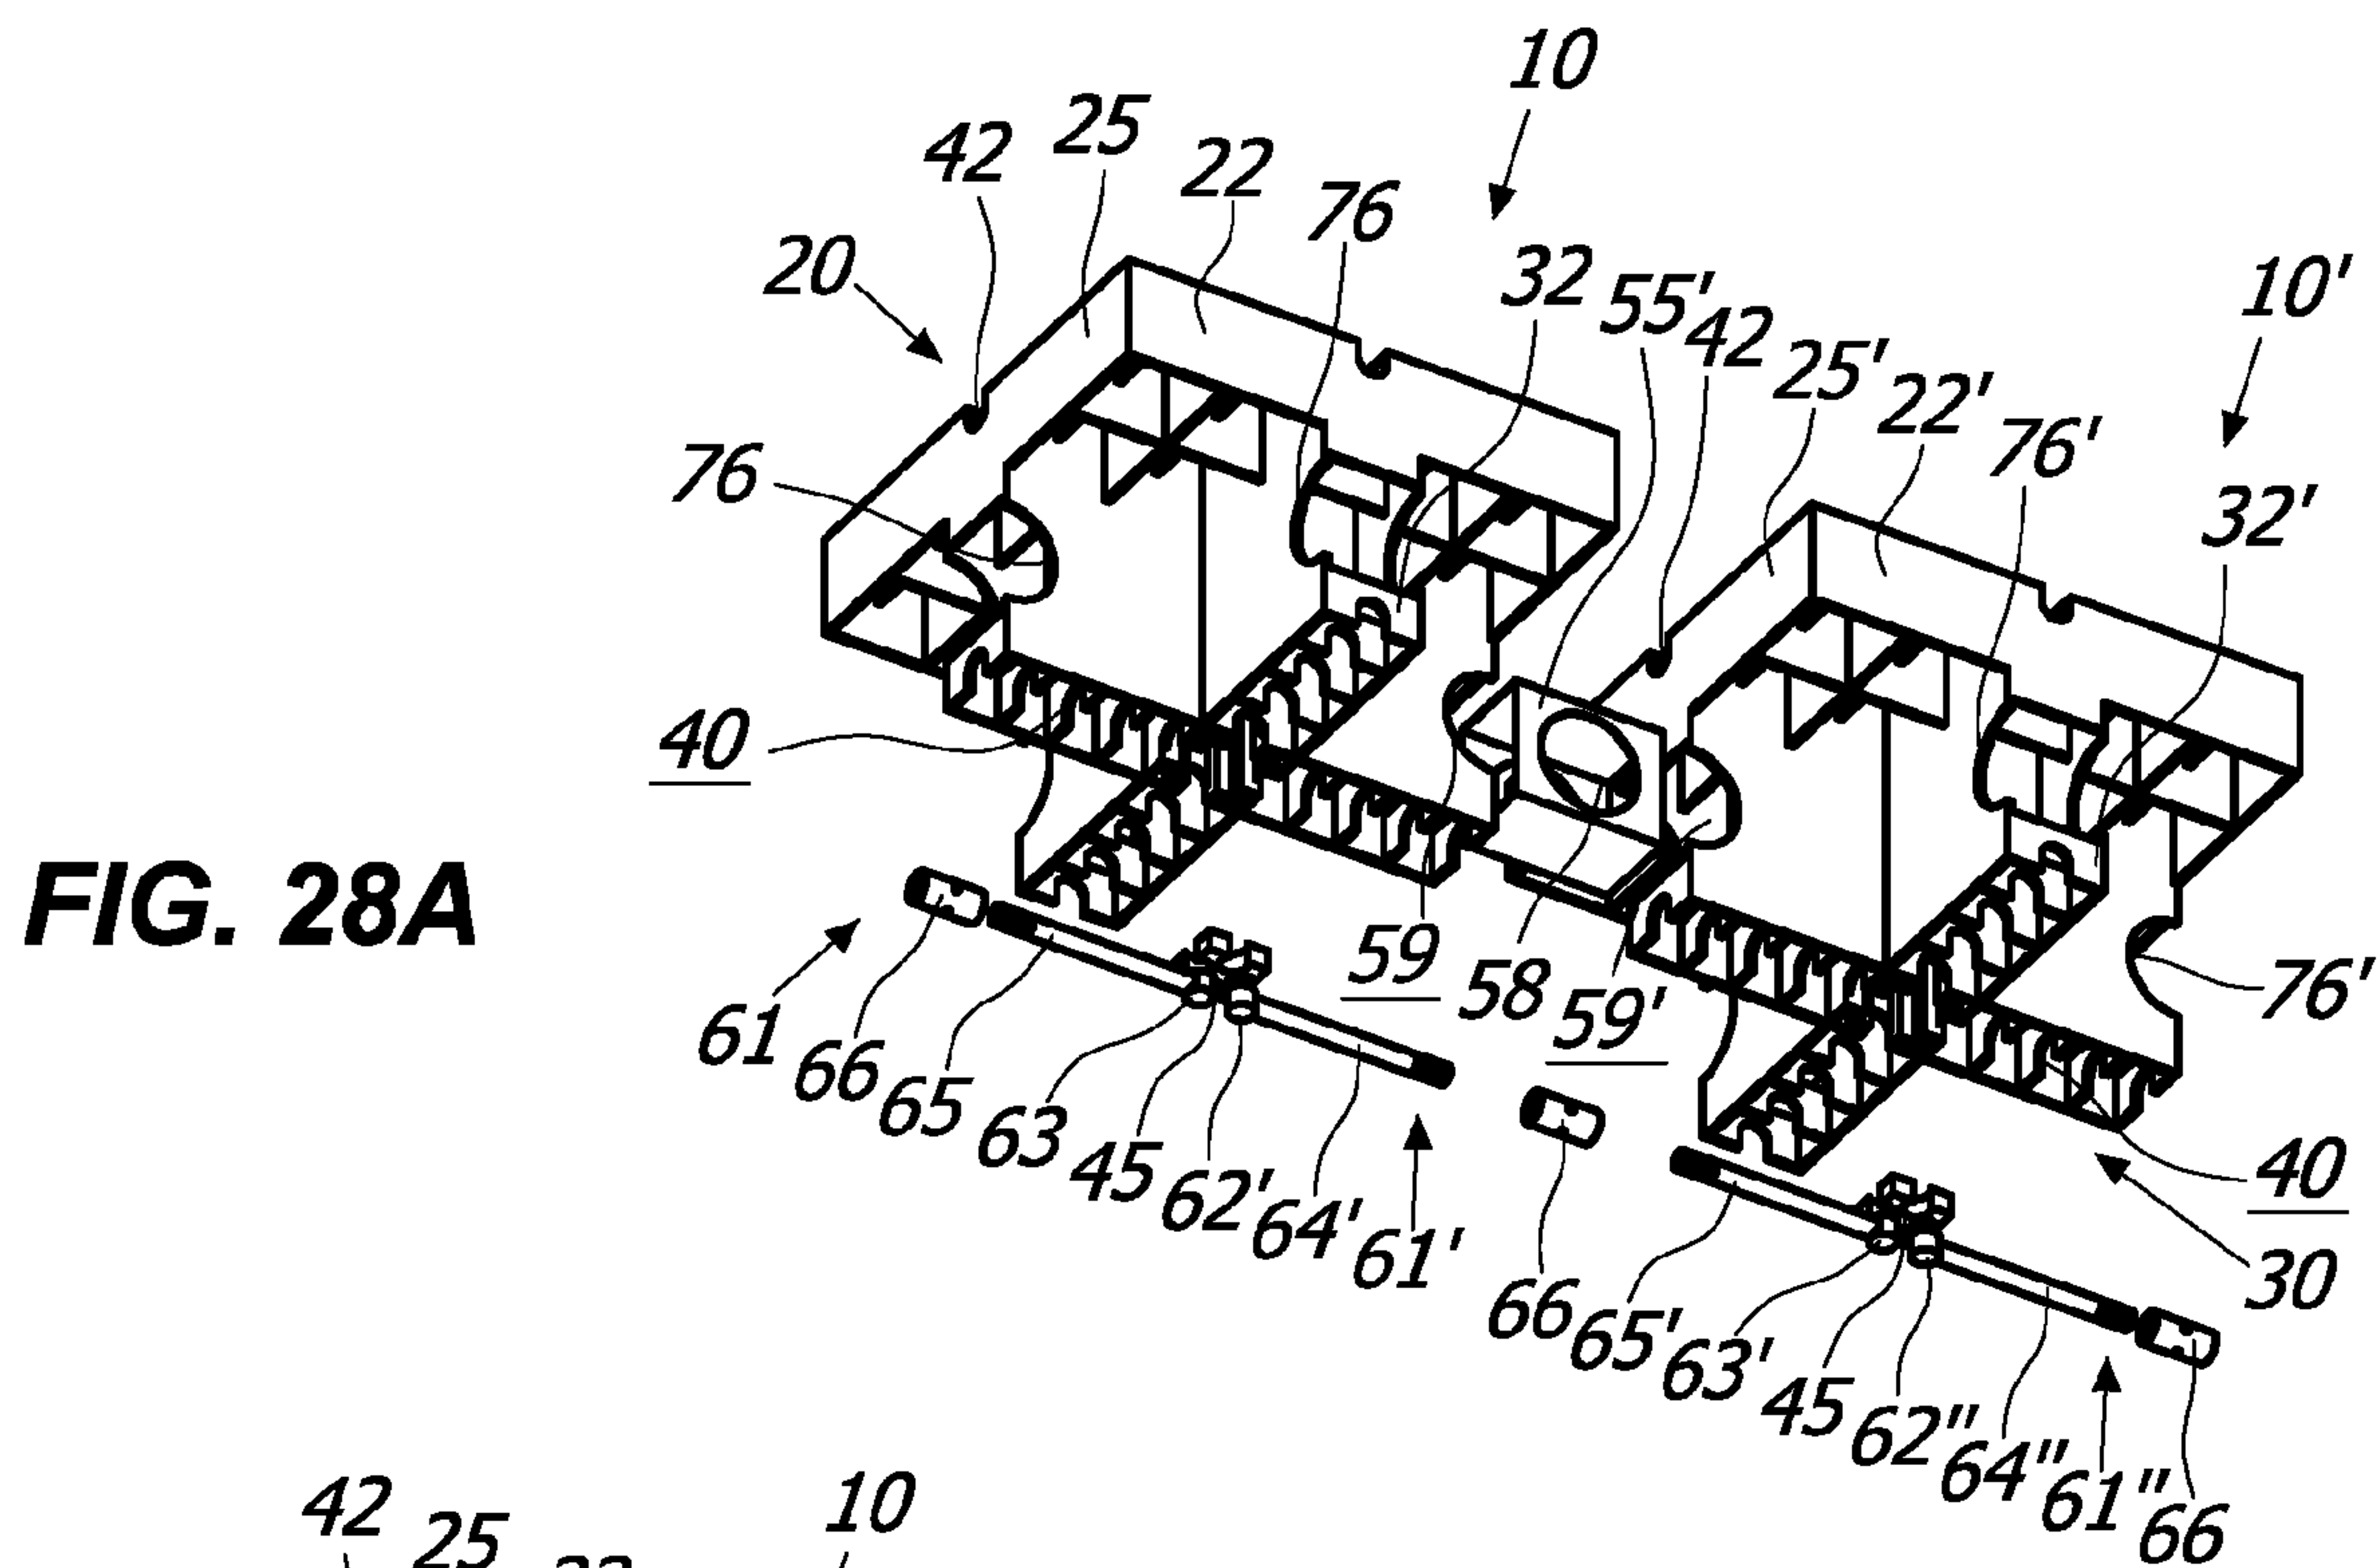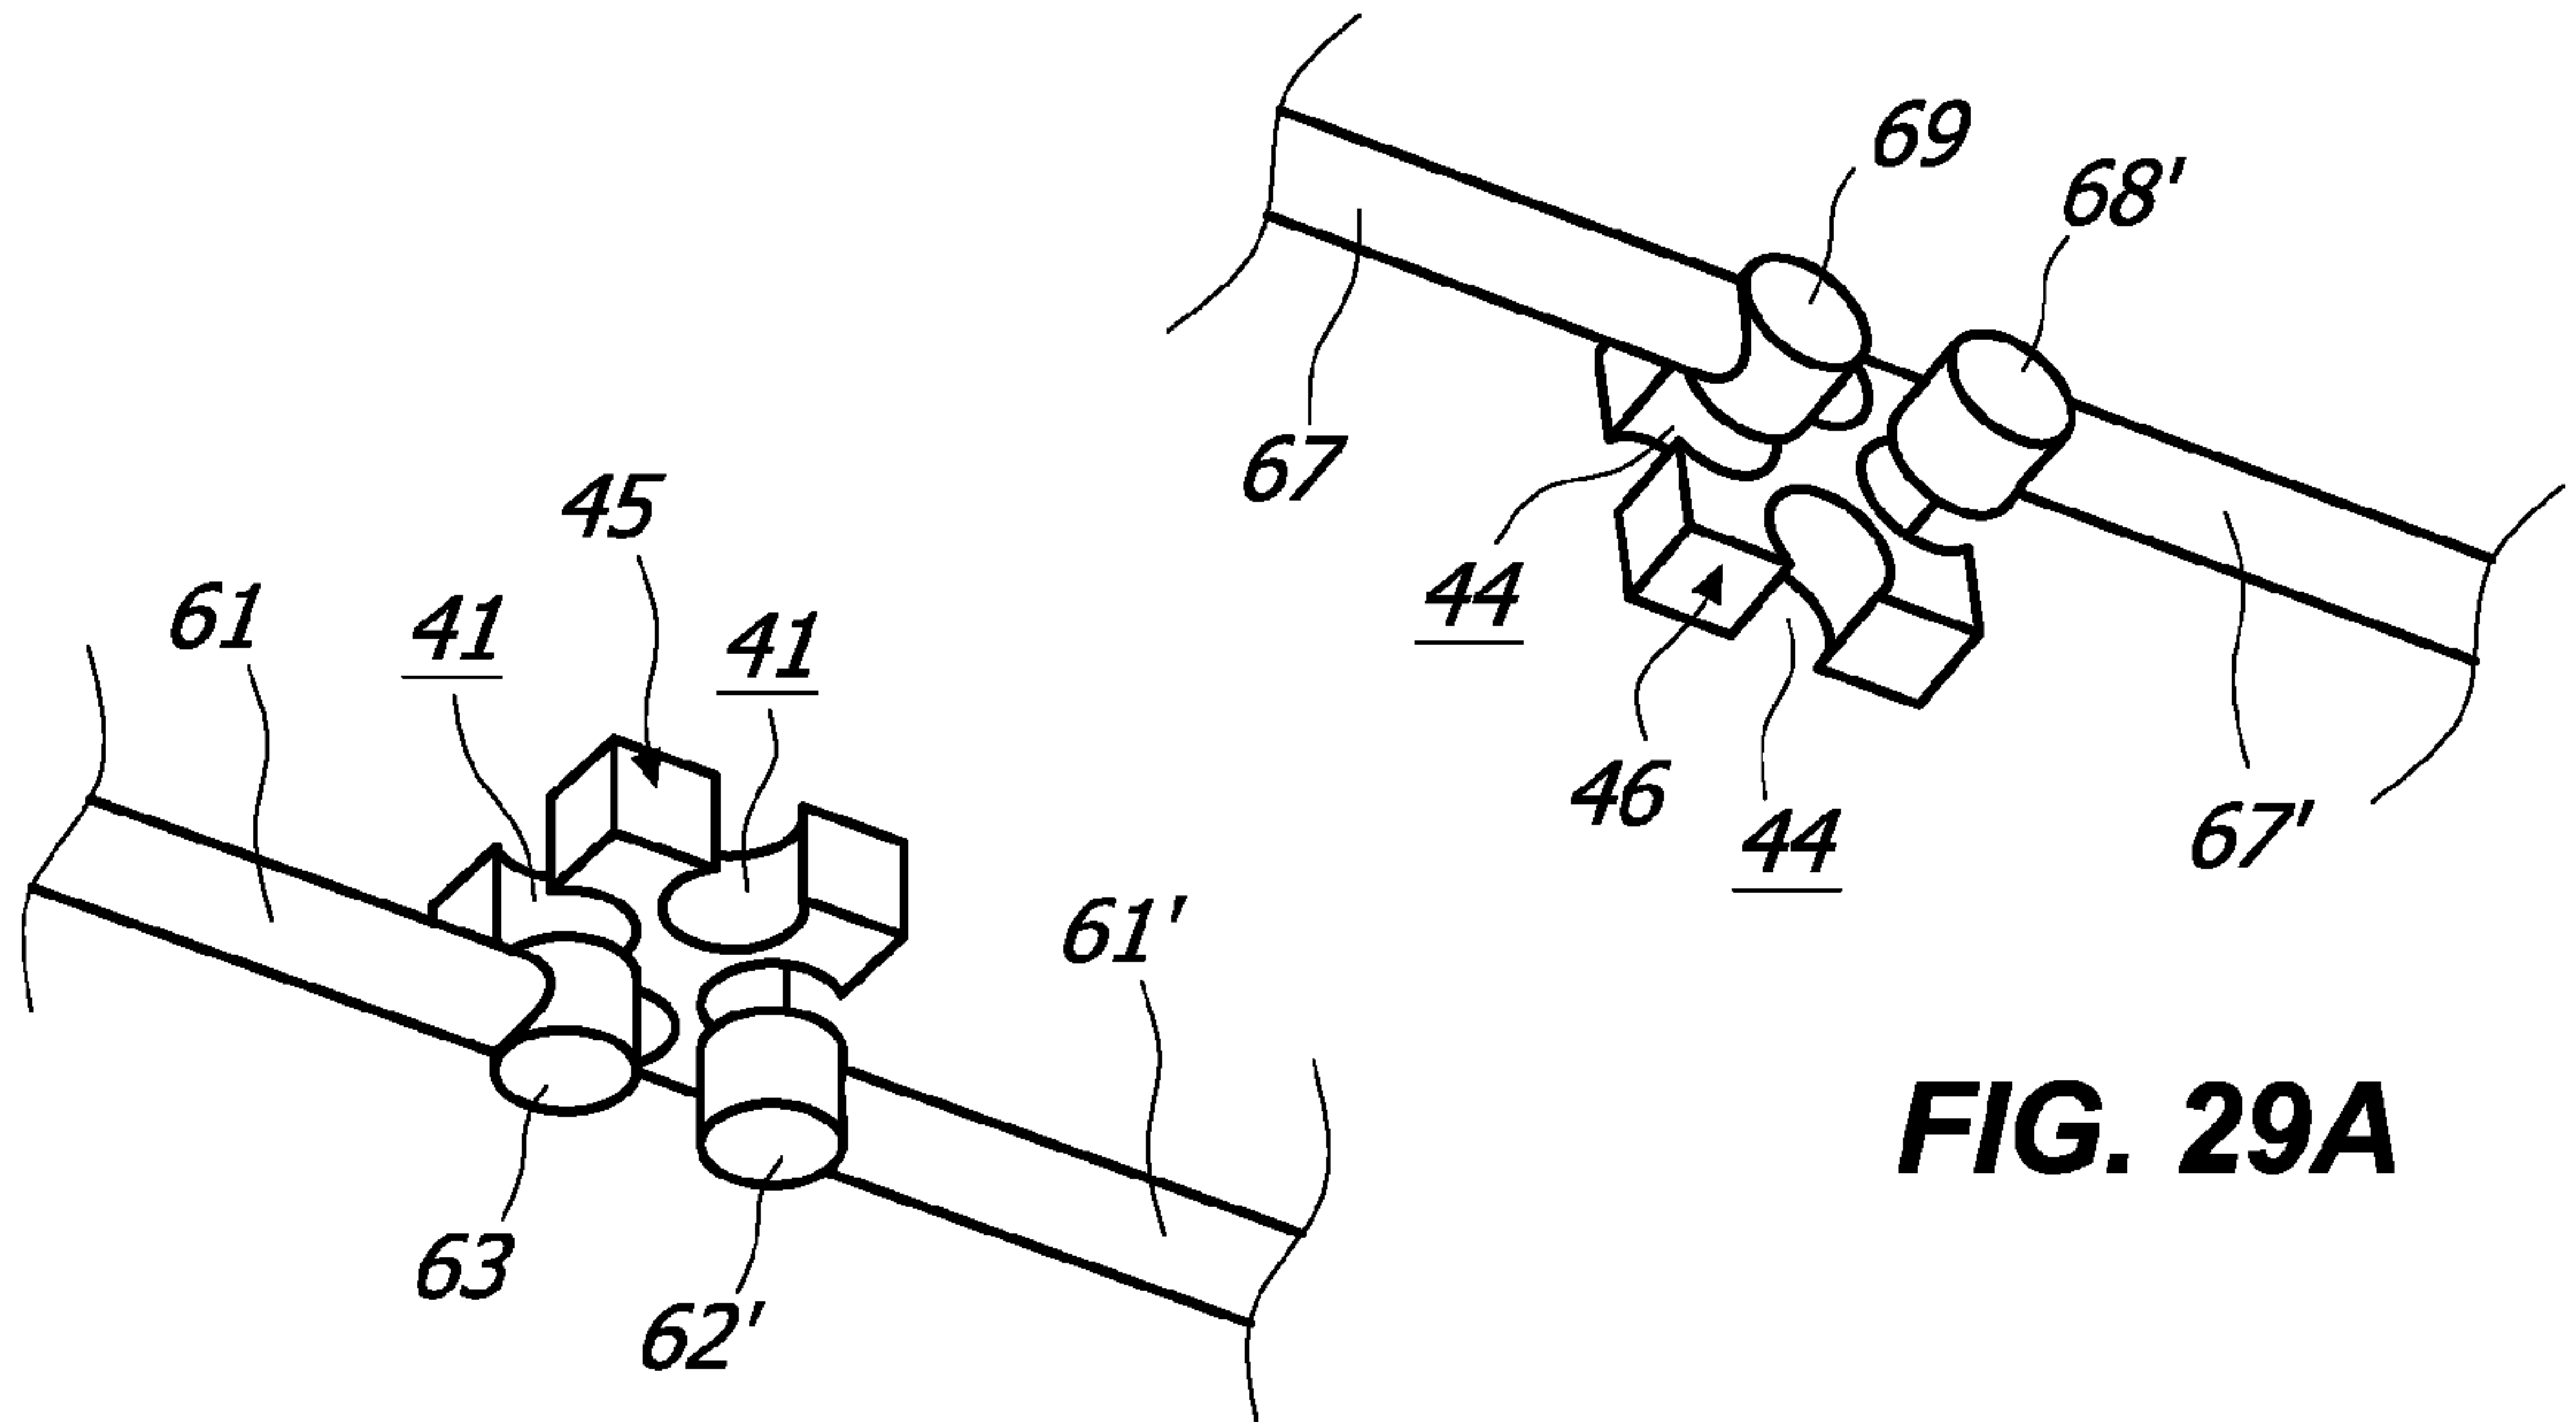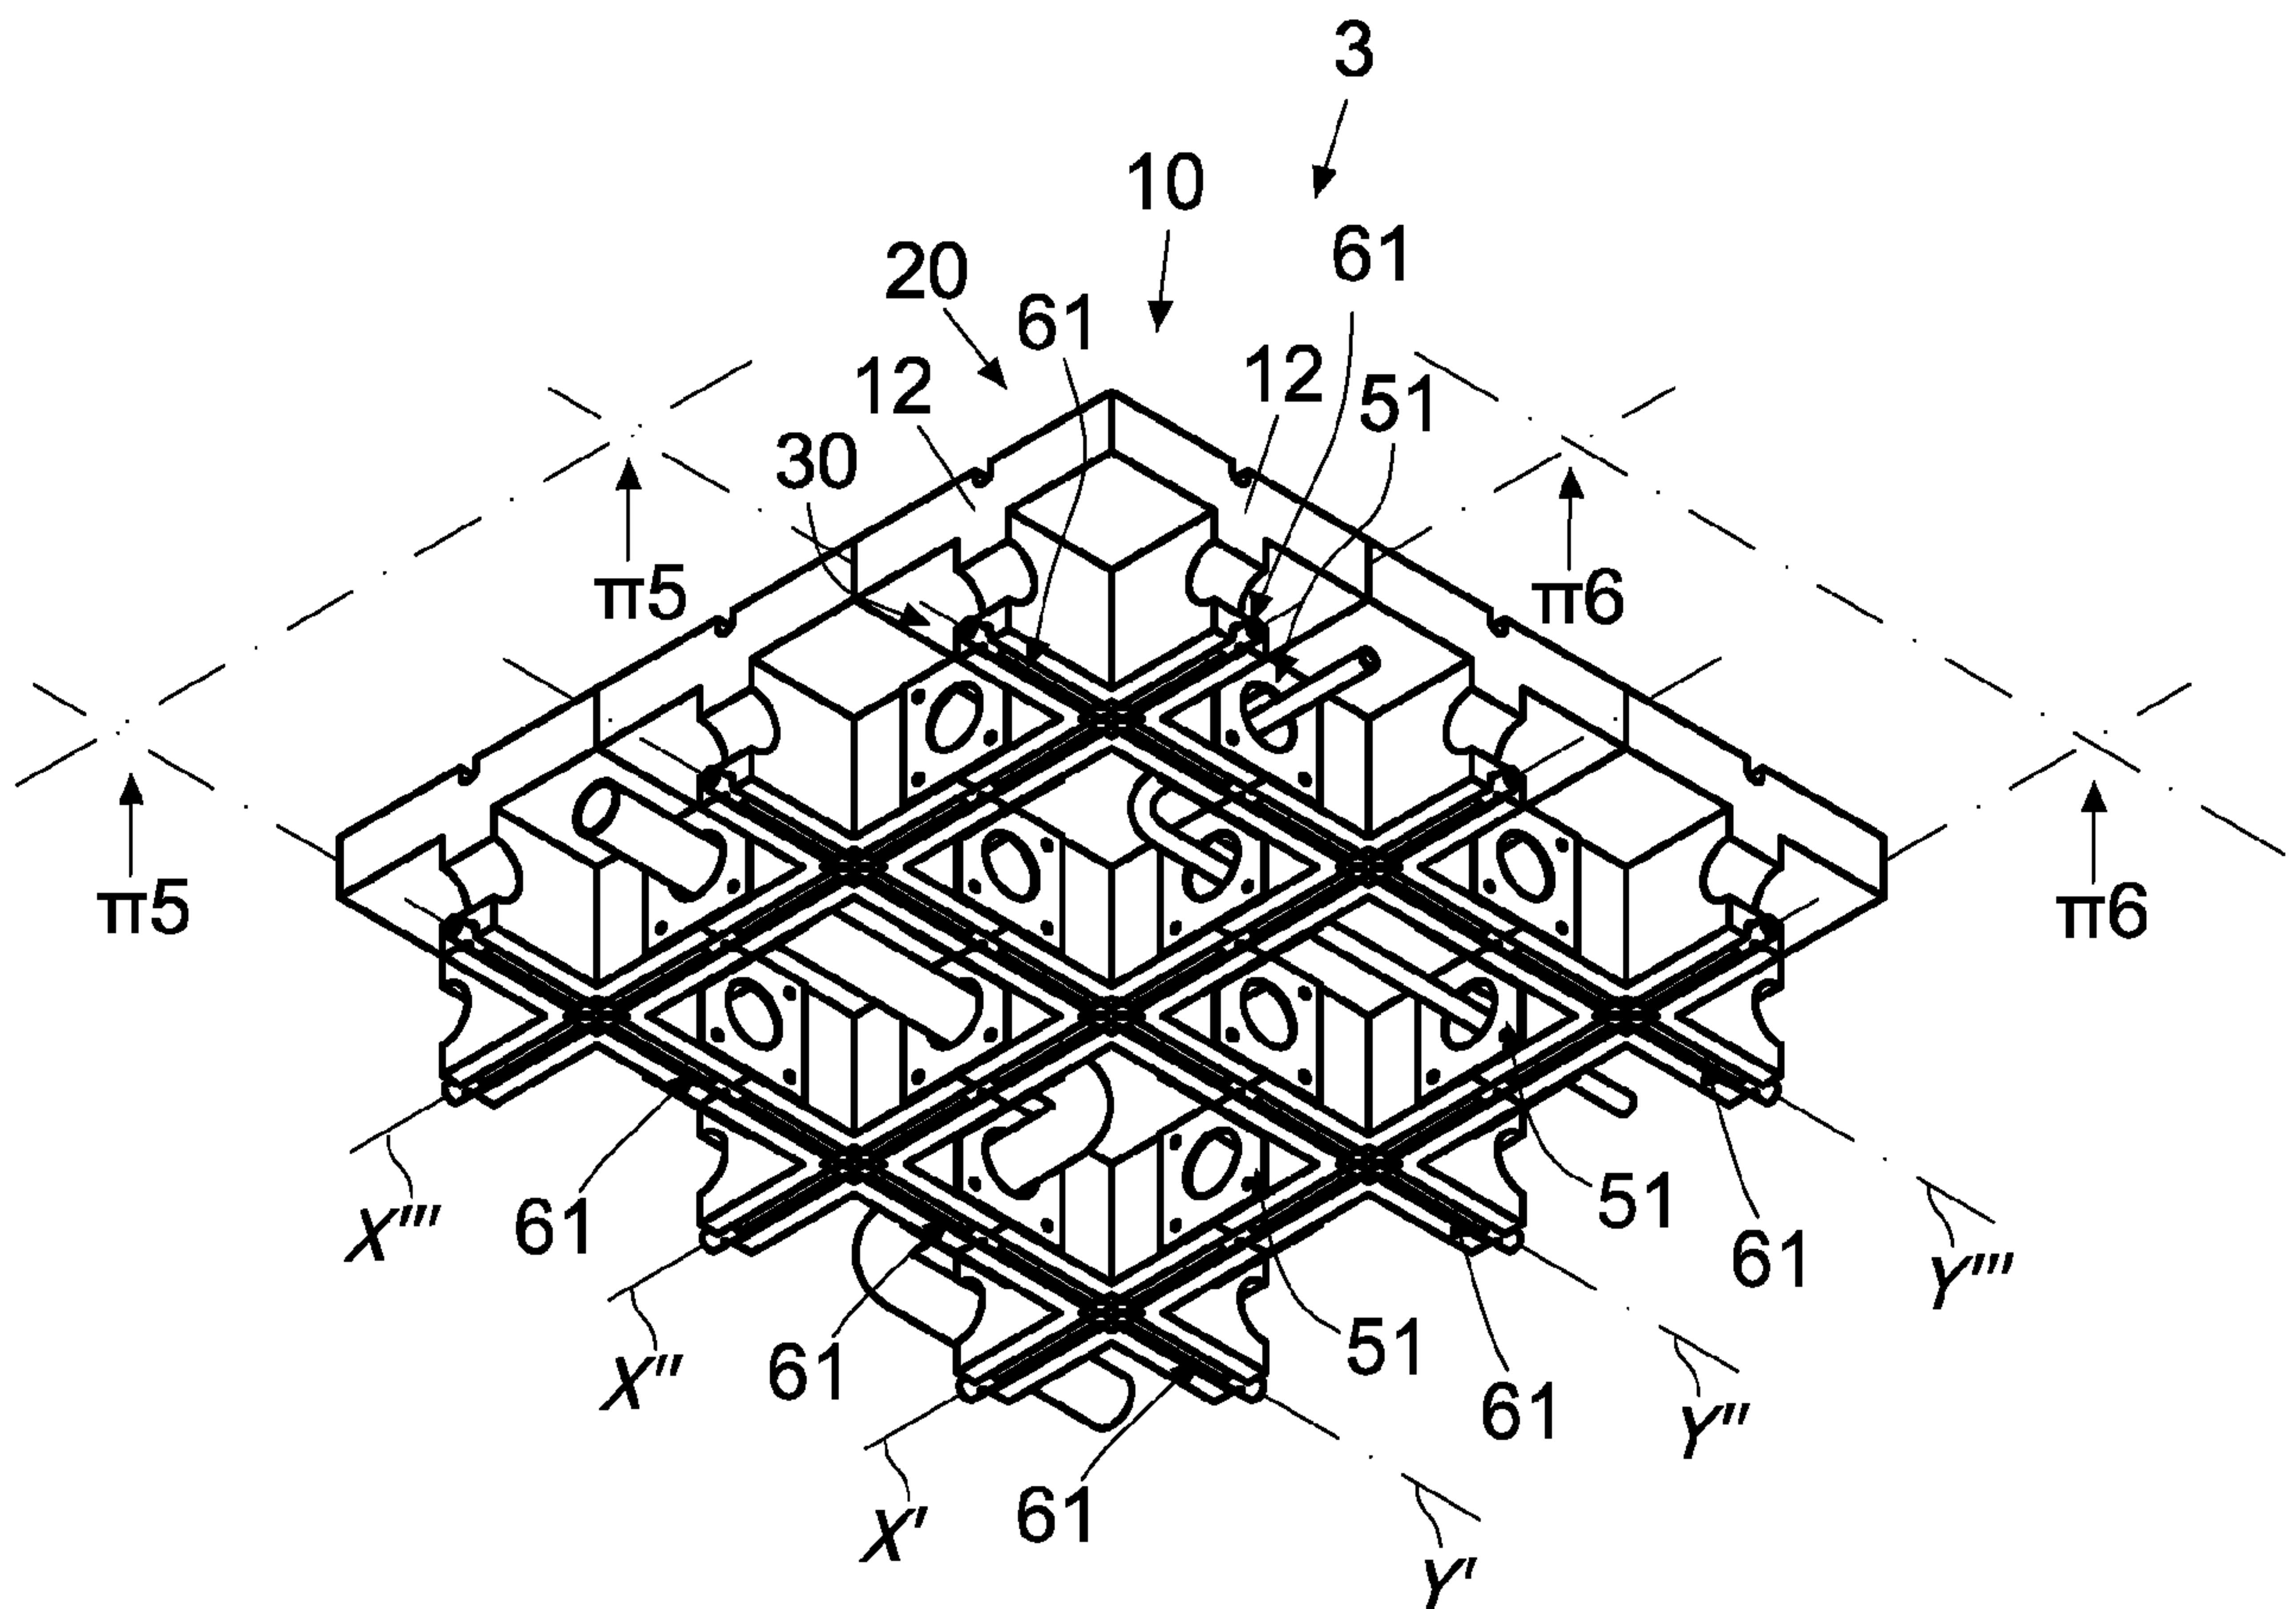

18 / 24**FIG. 29A****FIG. 29B****FIG. 30**

19 / 24

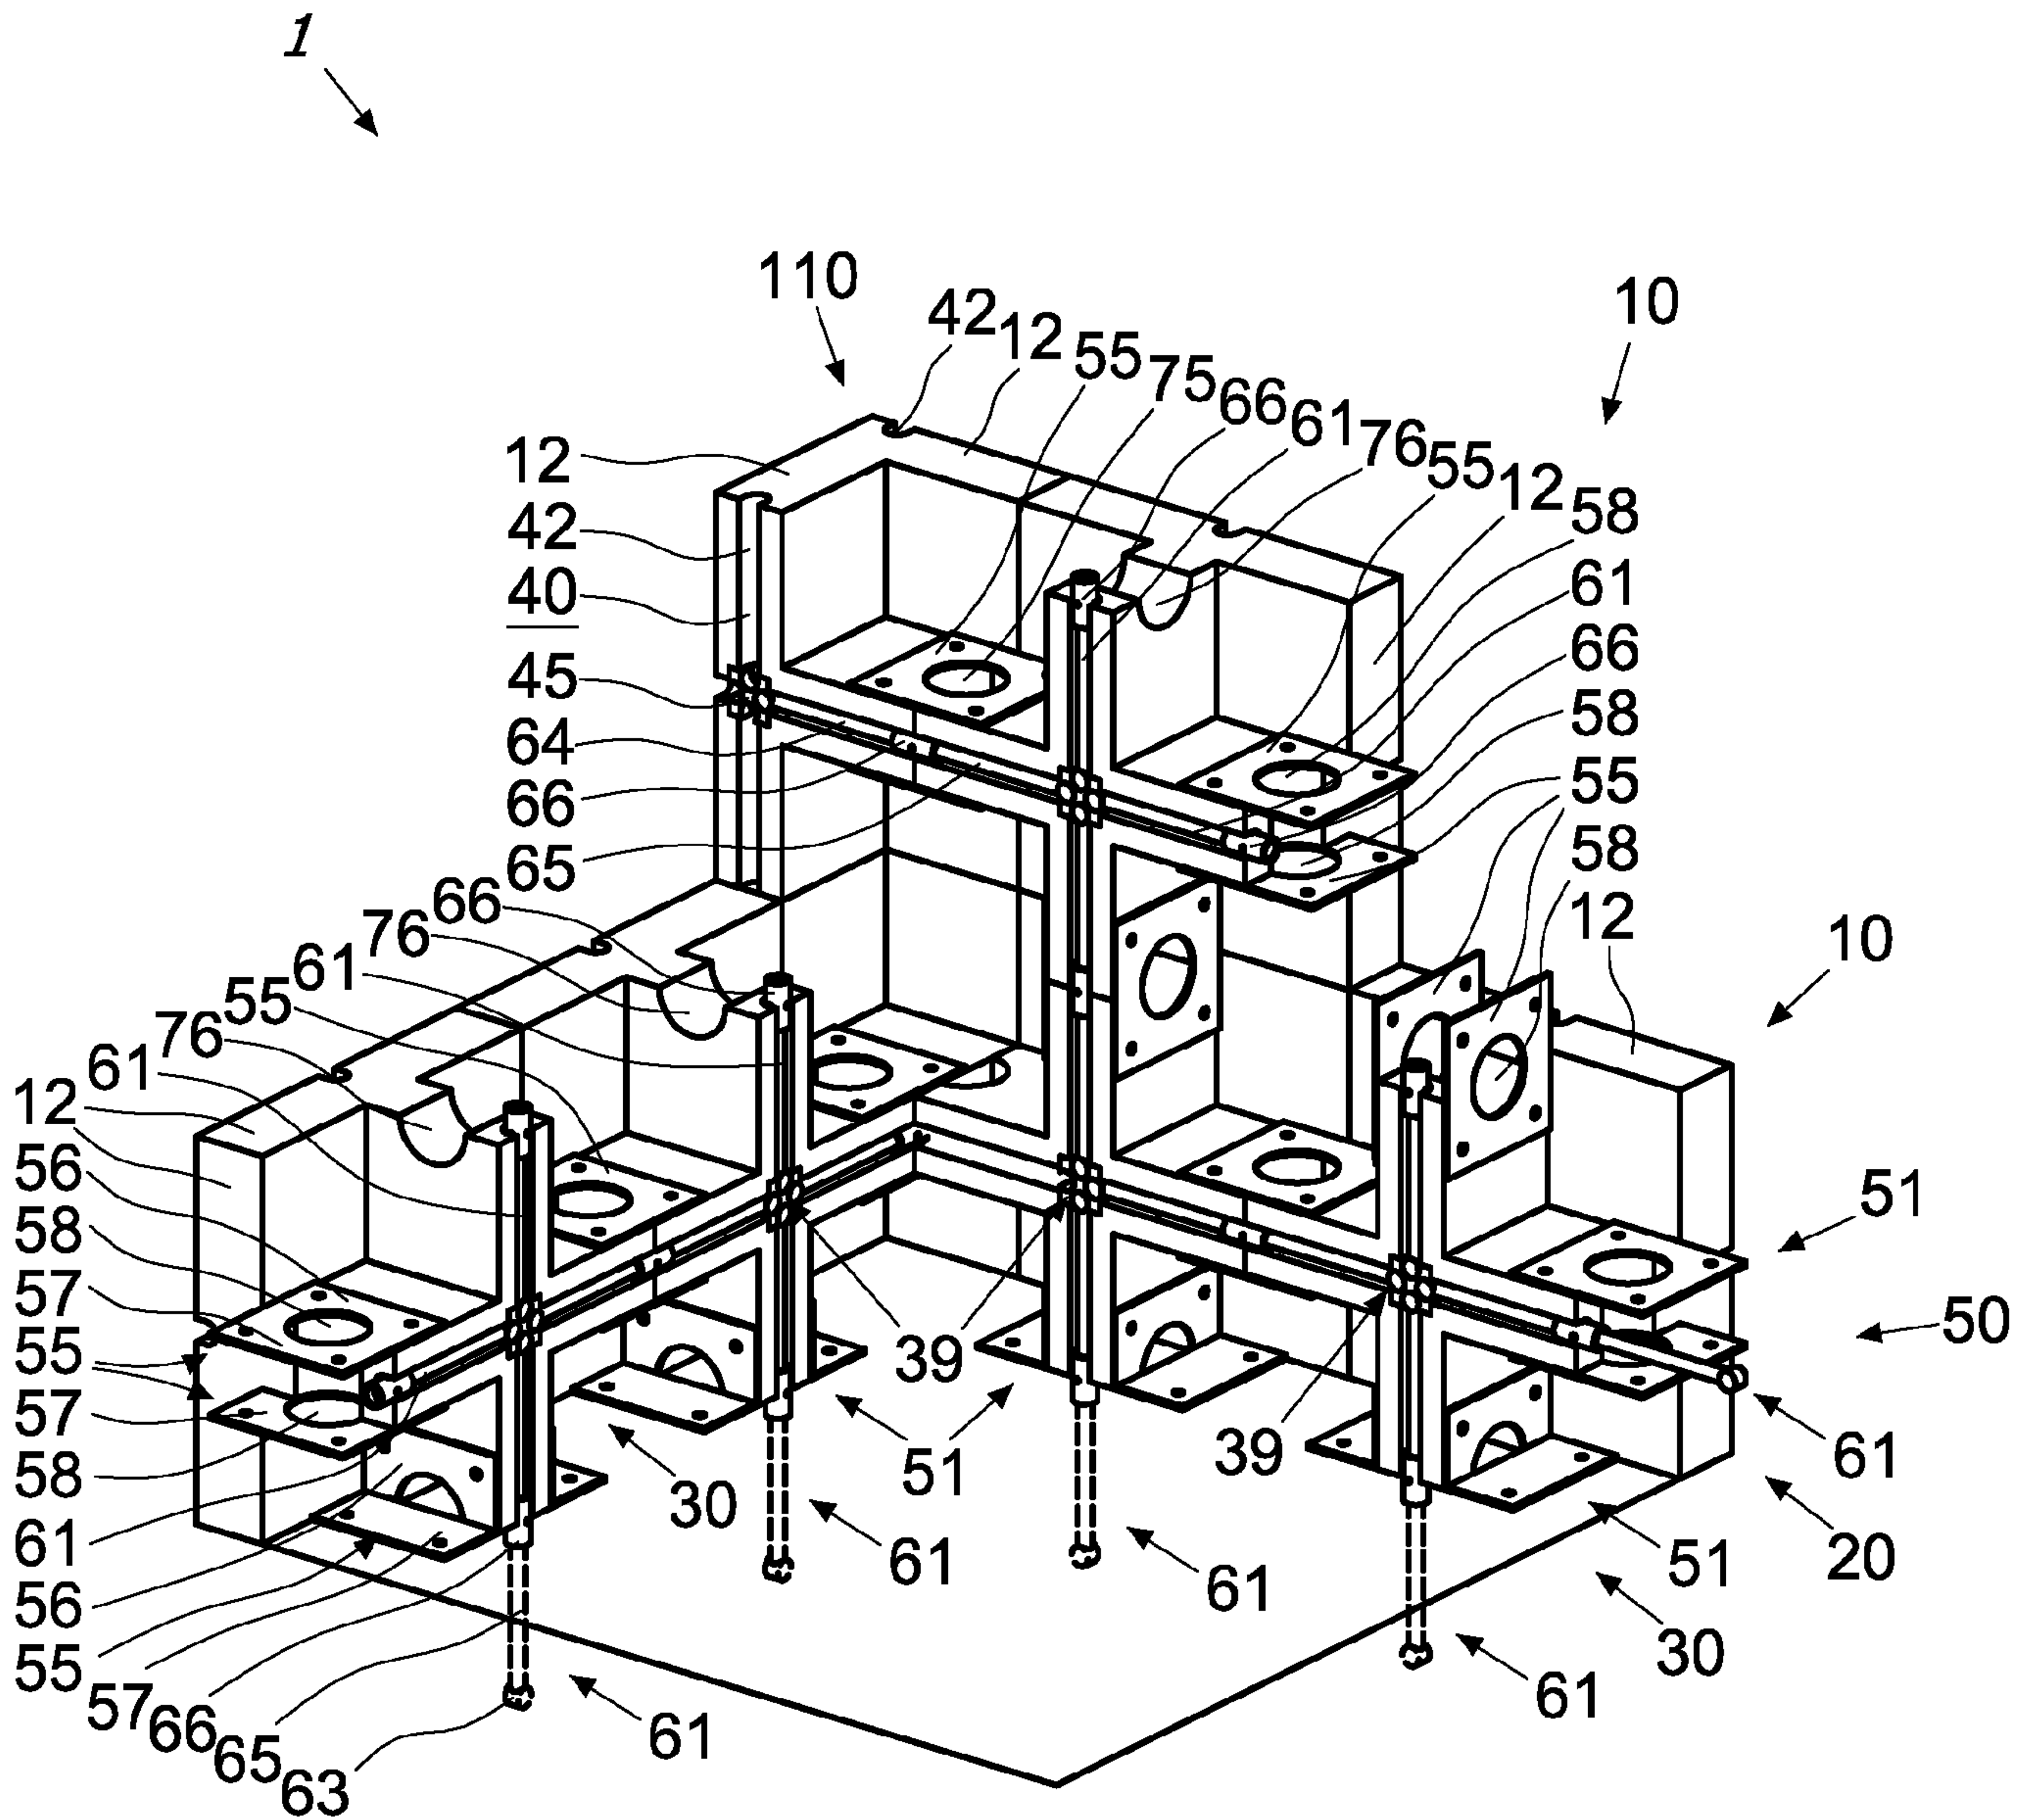


FIG. 31

20 / 24


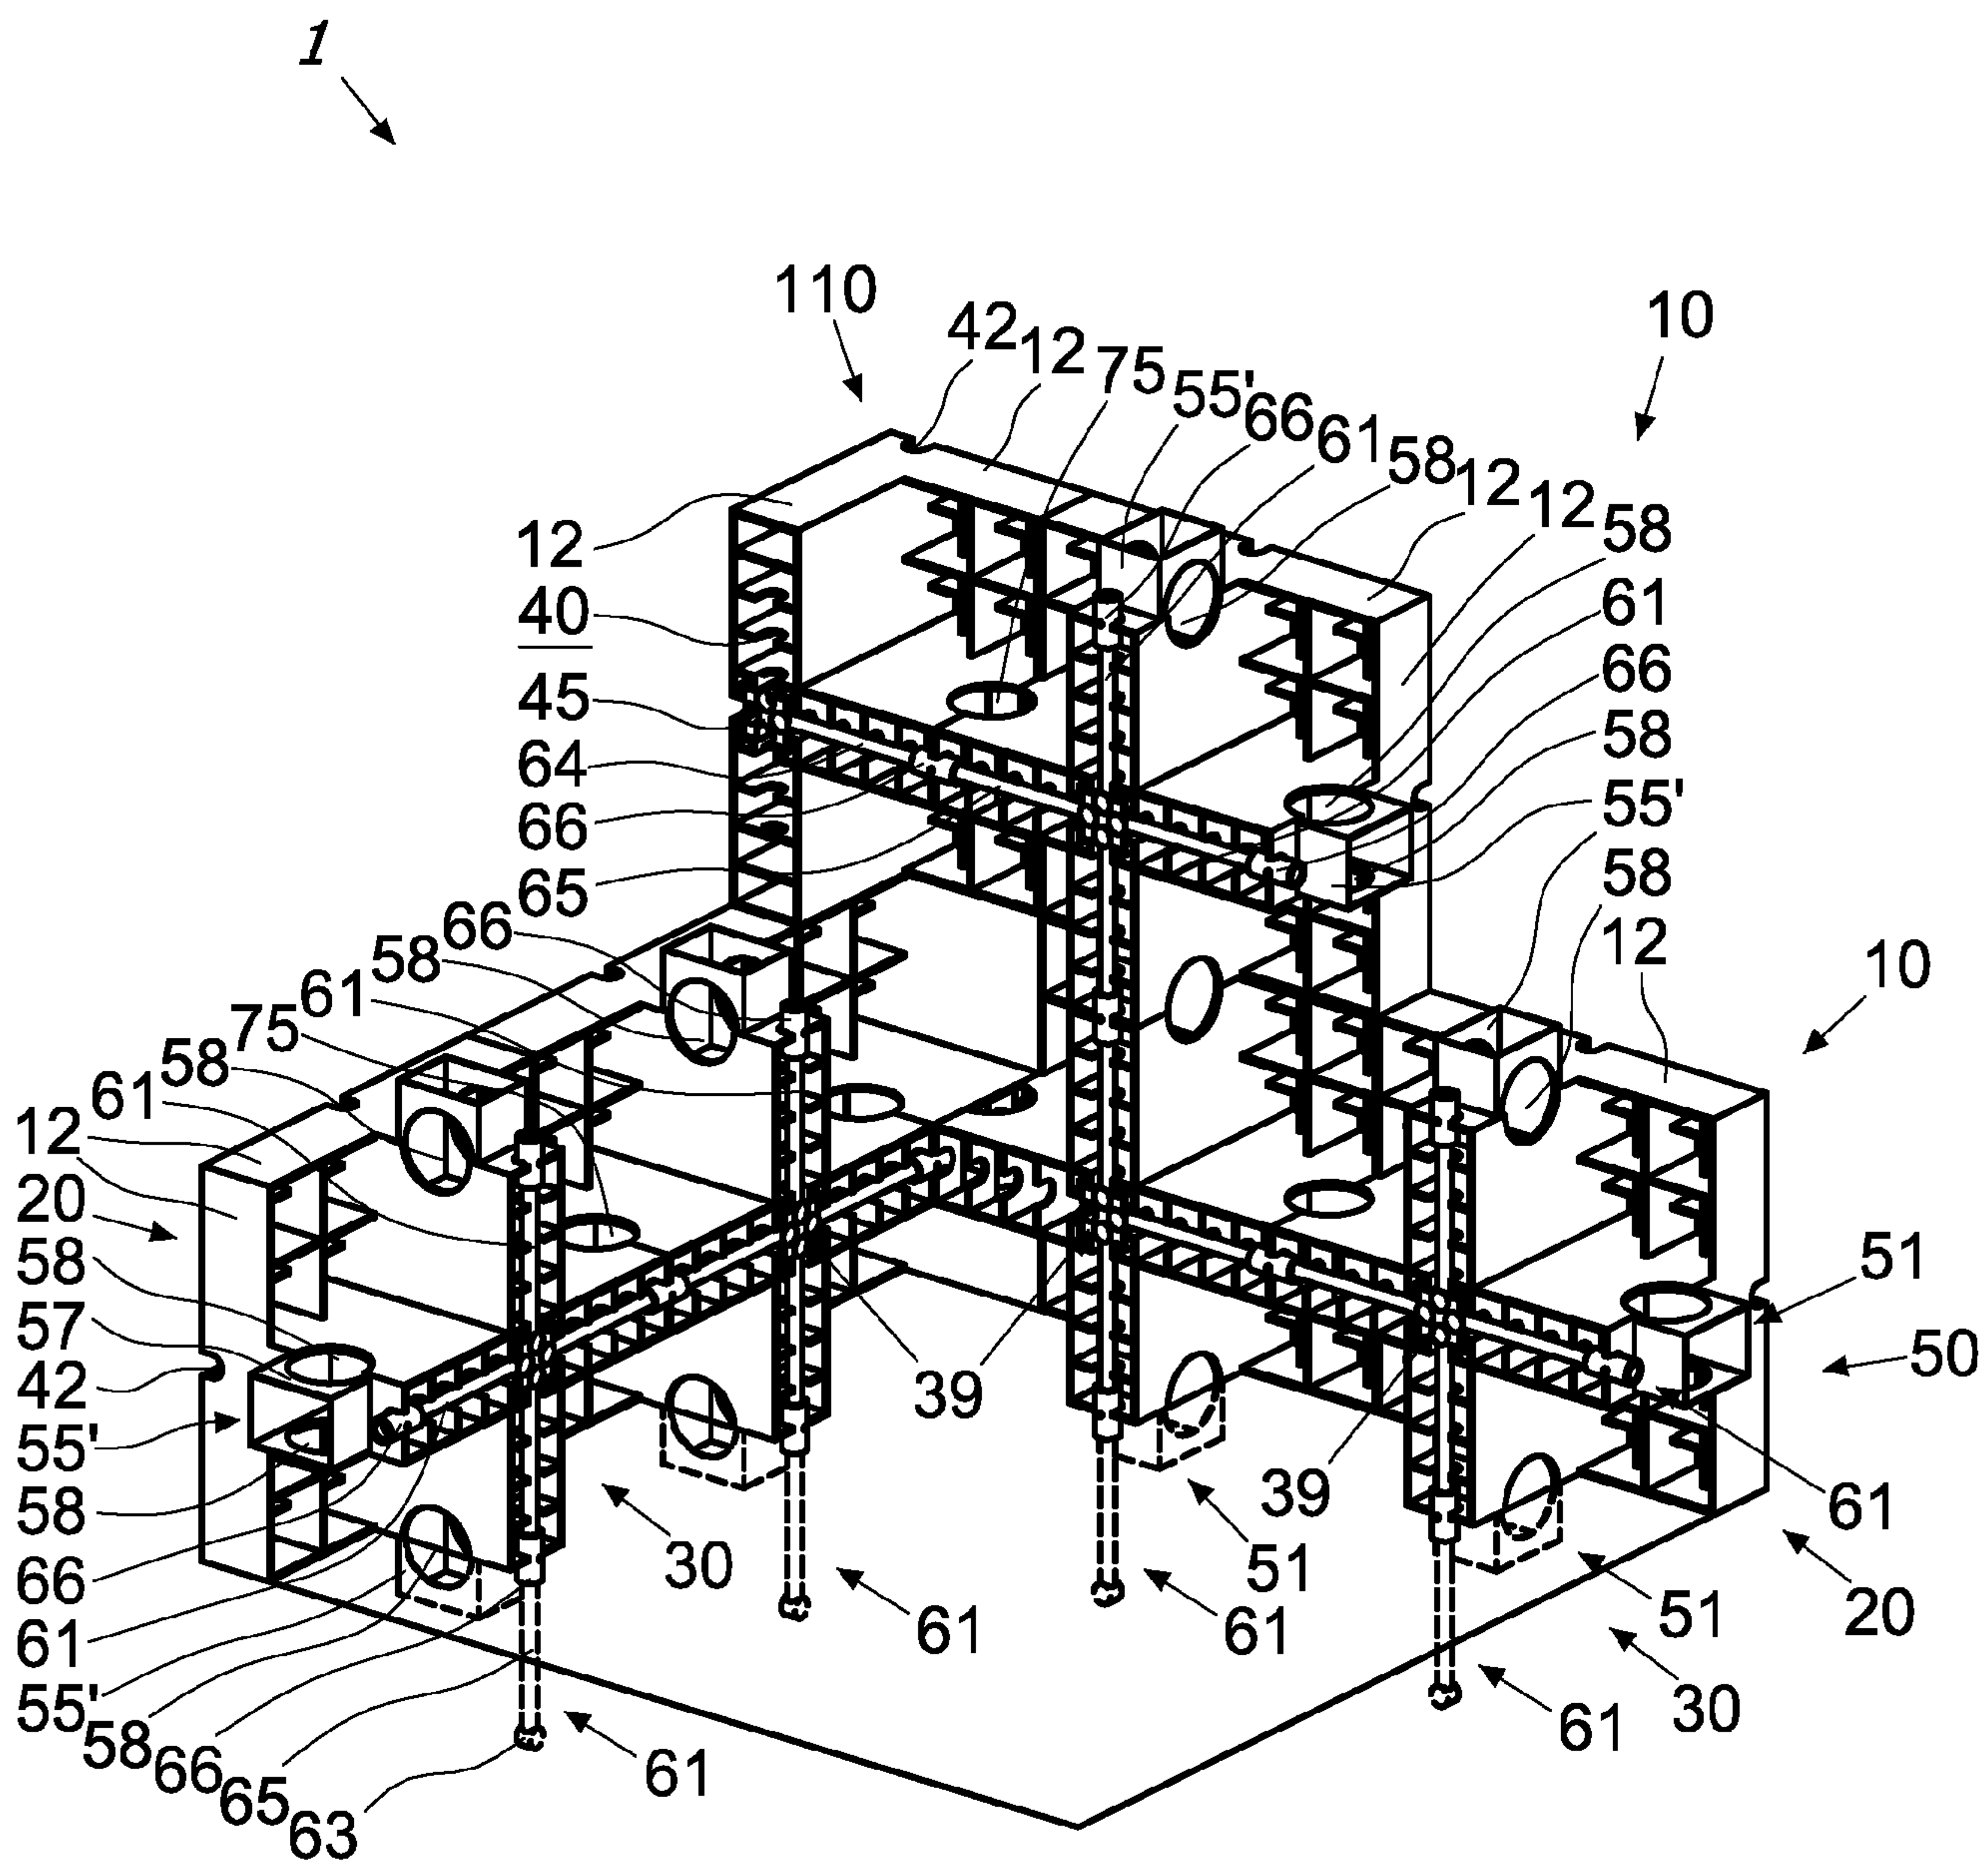


FIG. 32

21 / 24

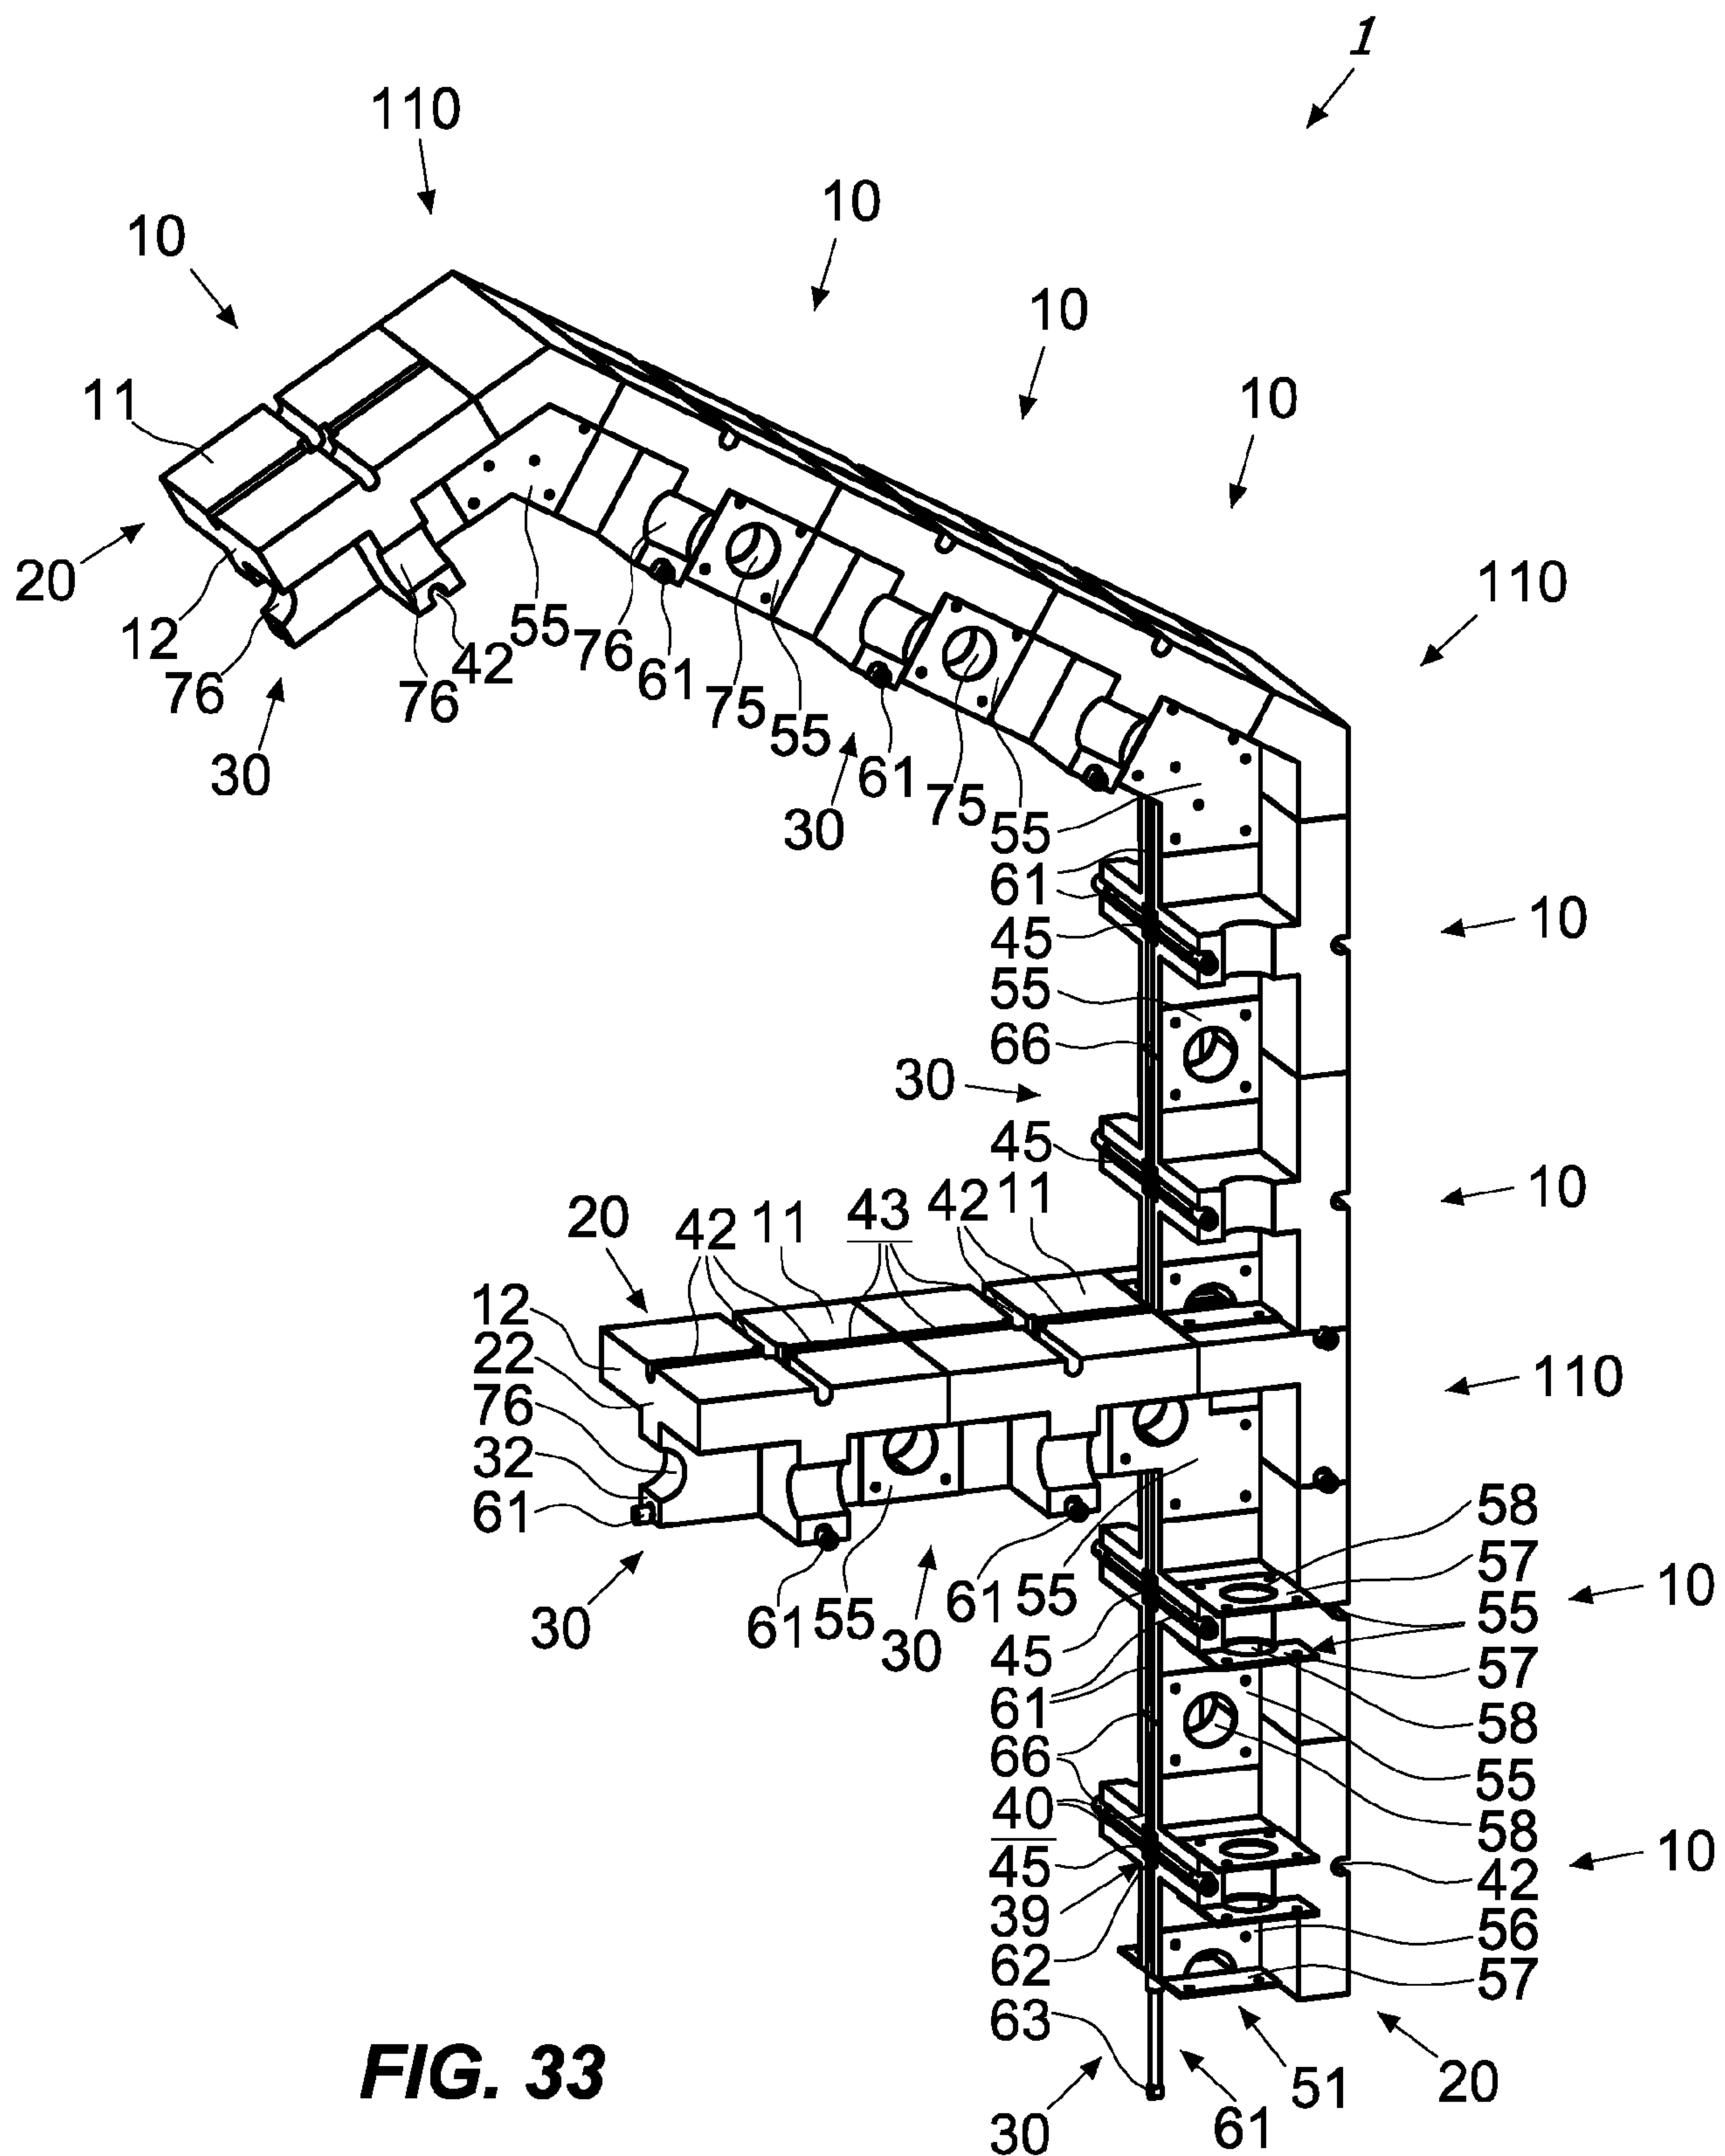

22 / 24

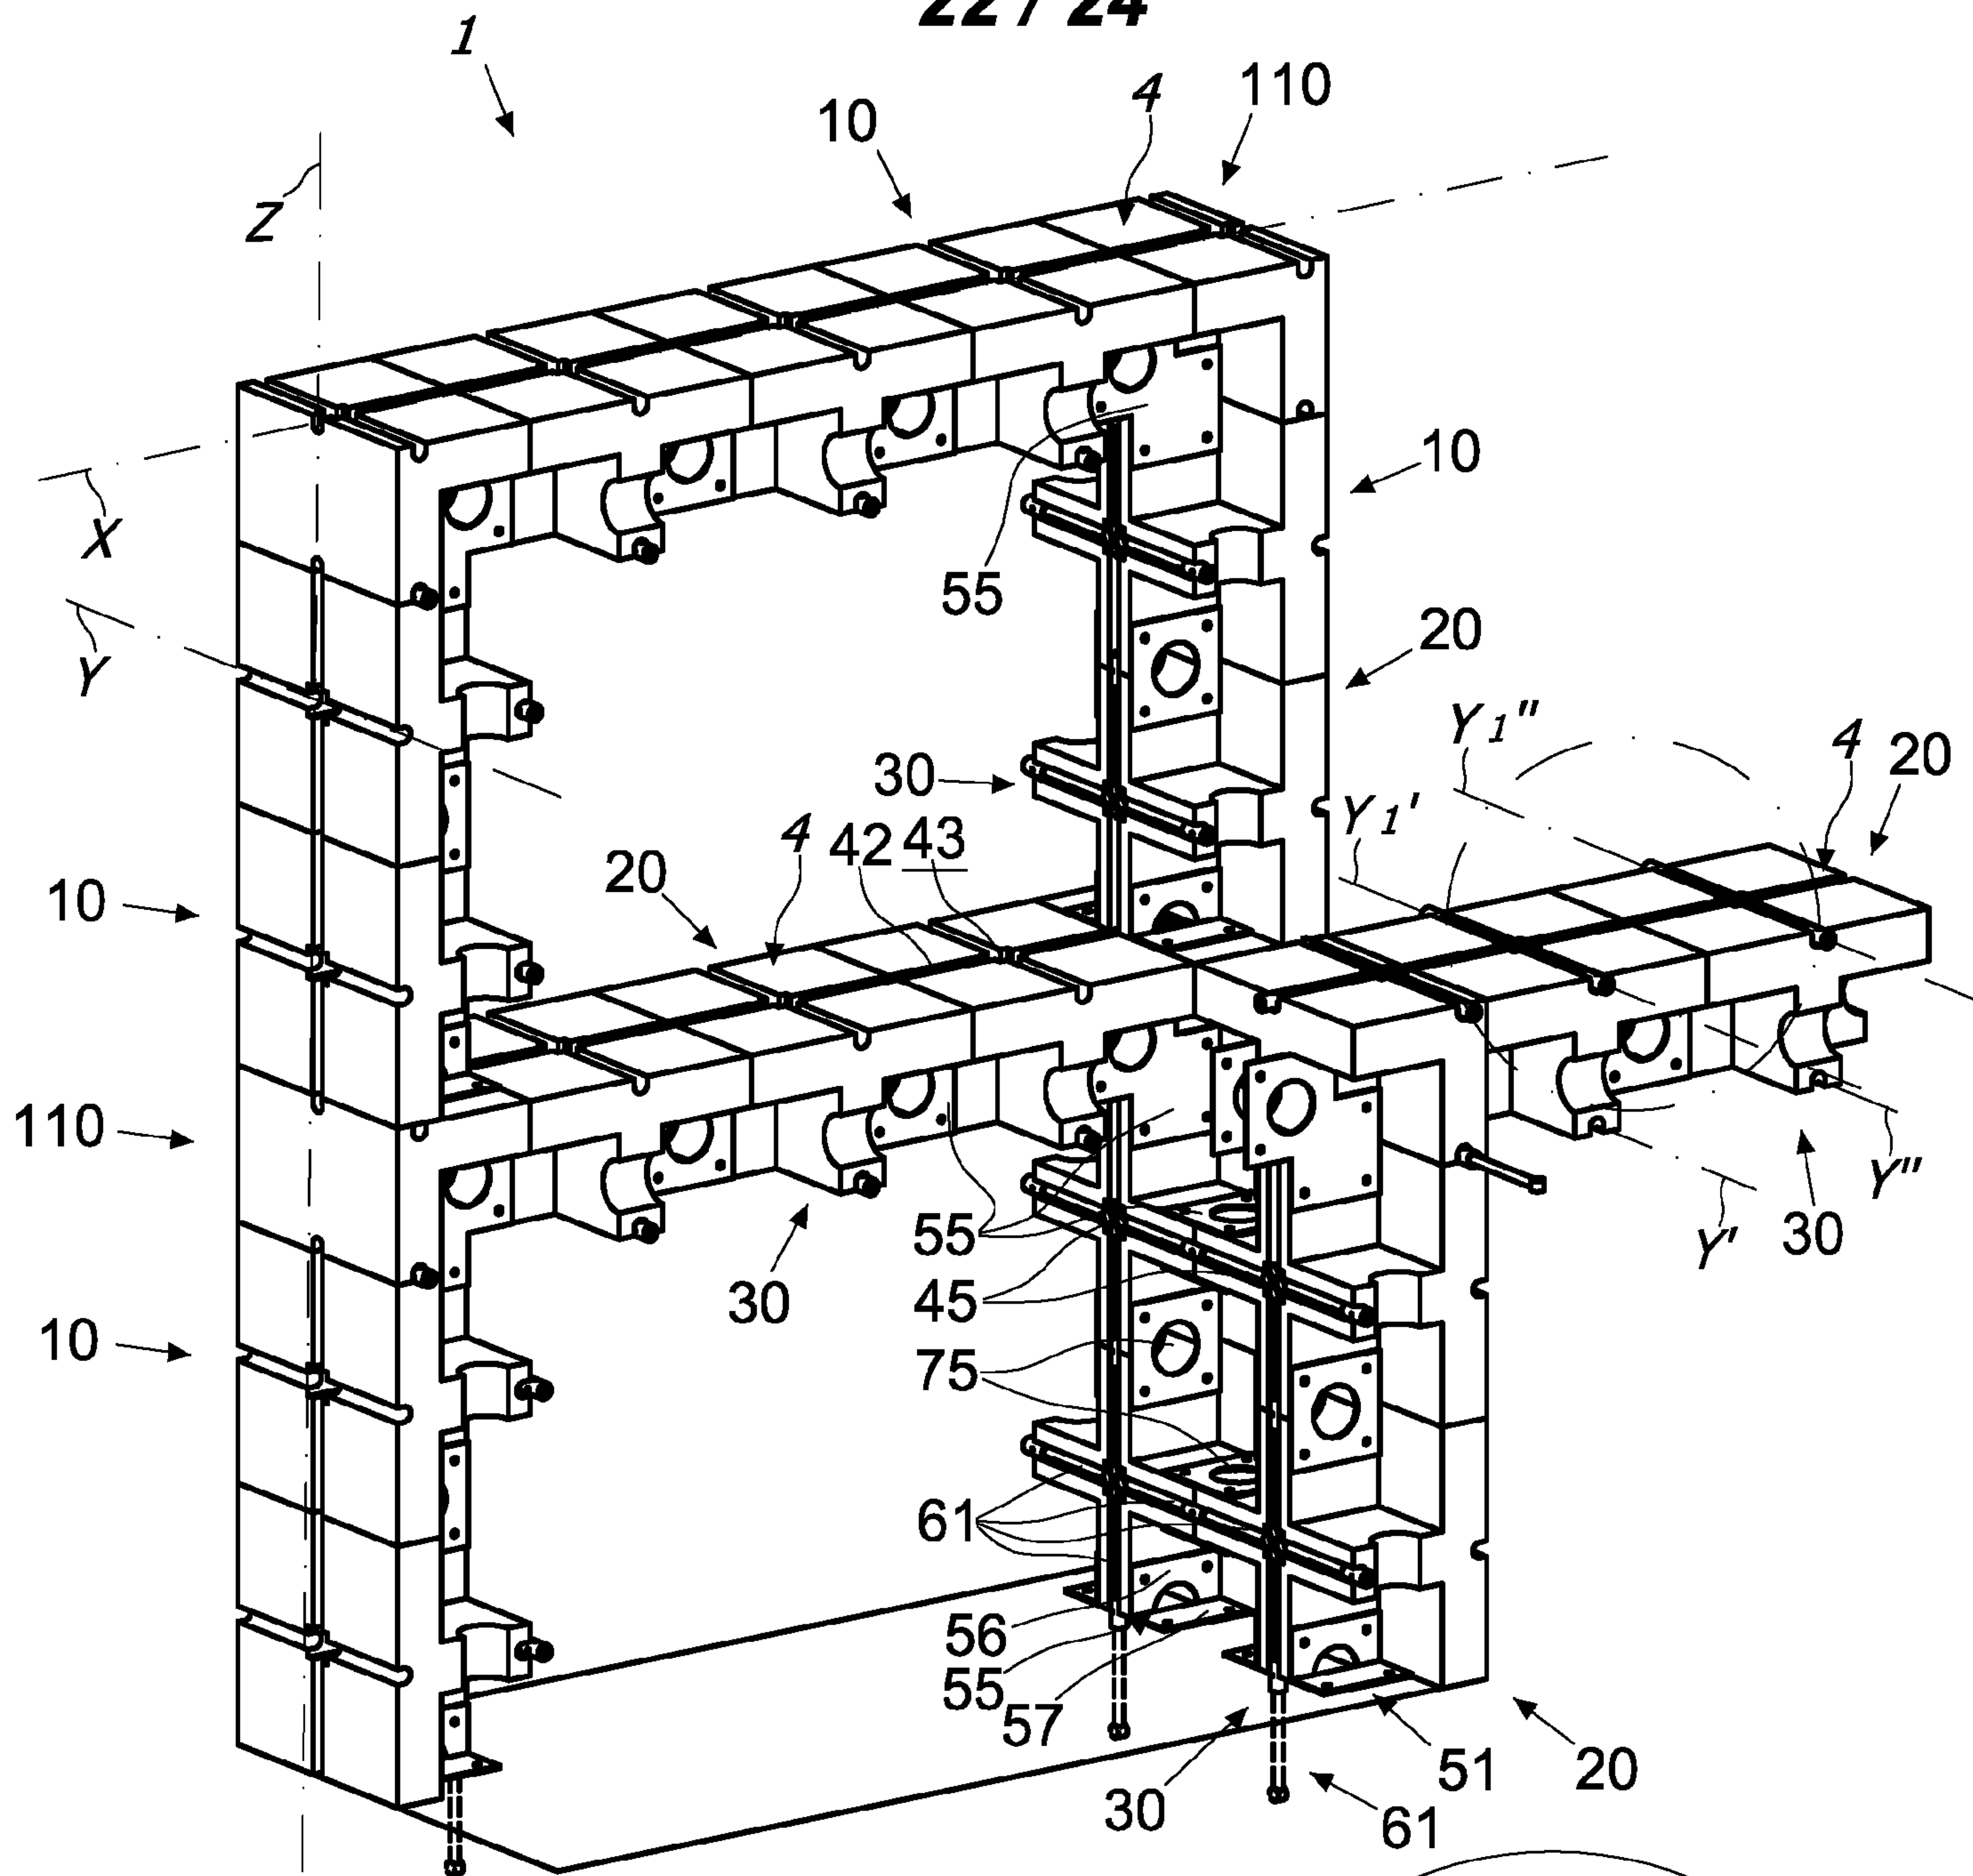


FIG. 34A

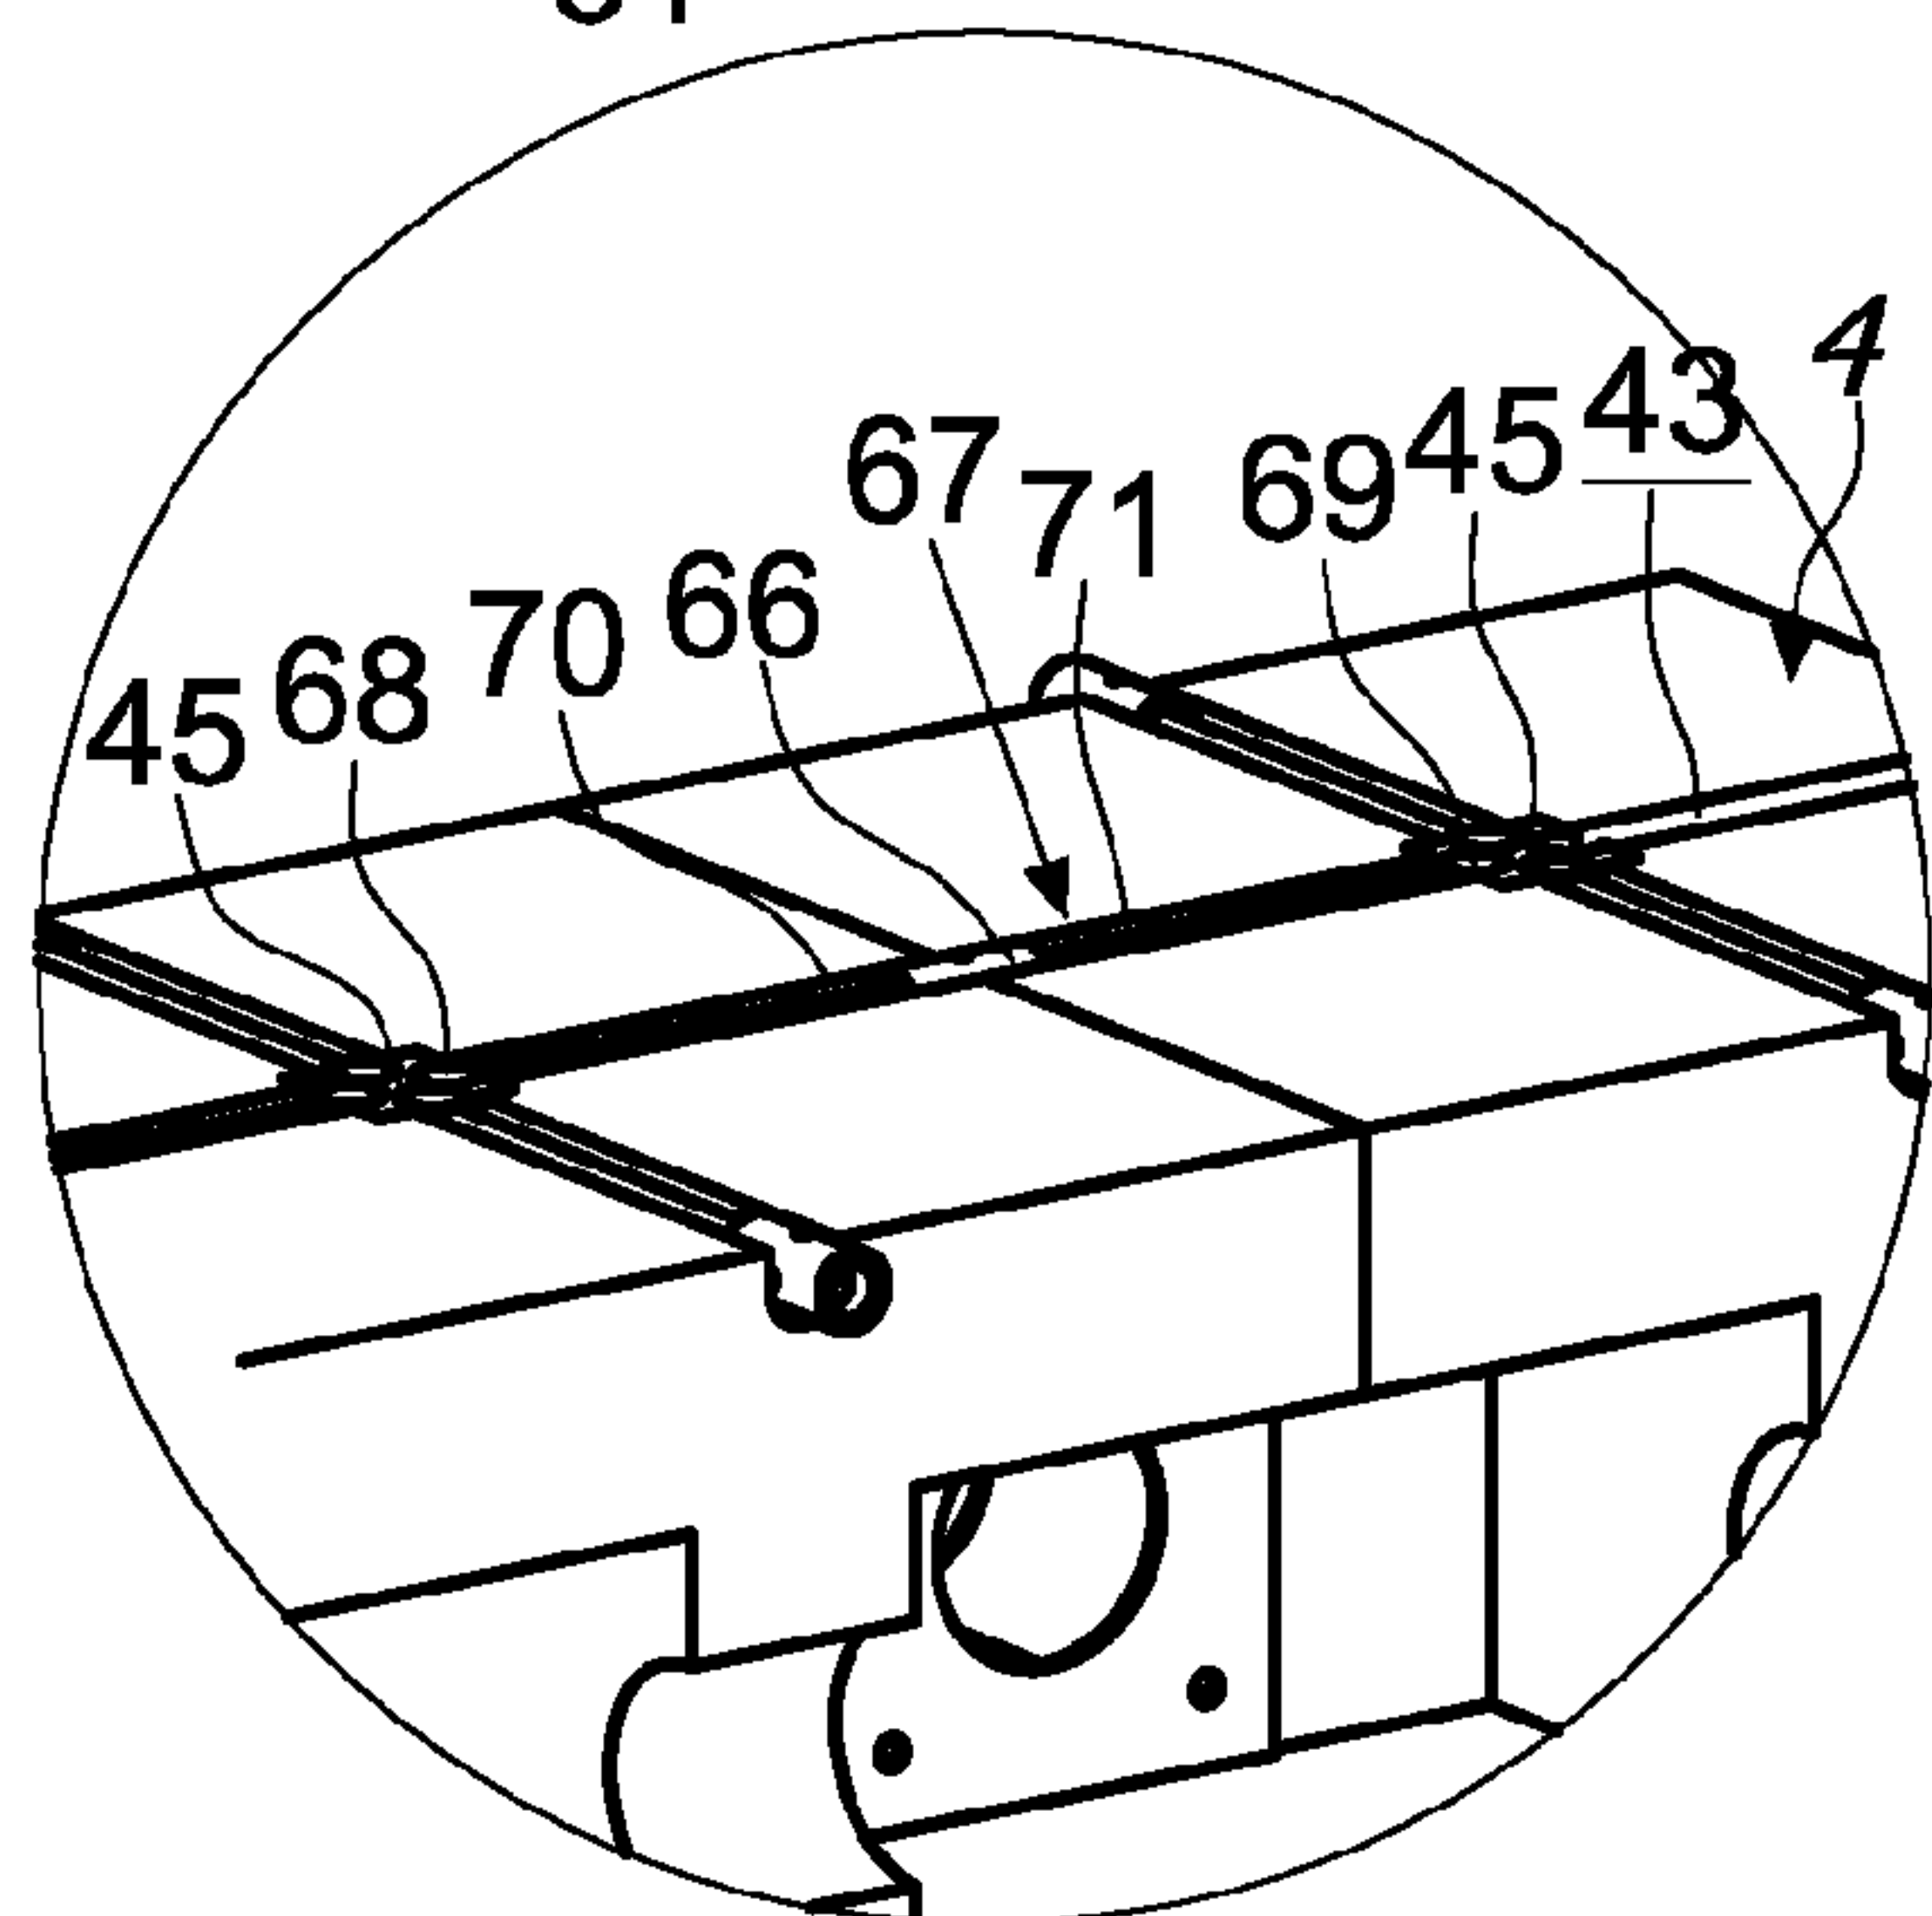
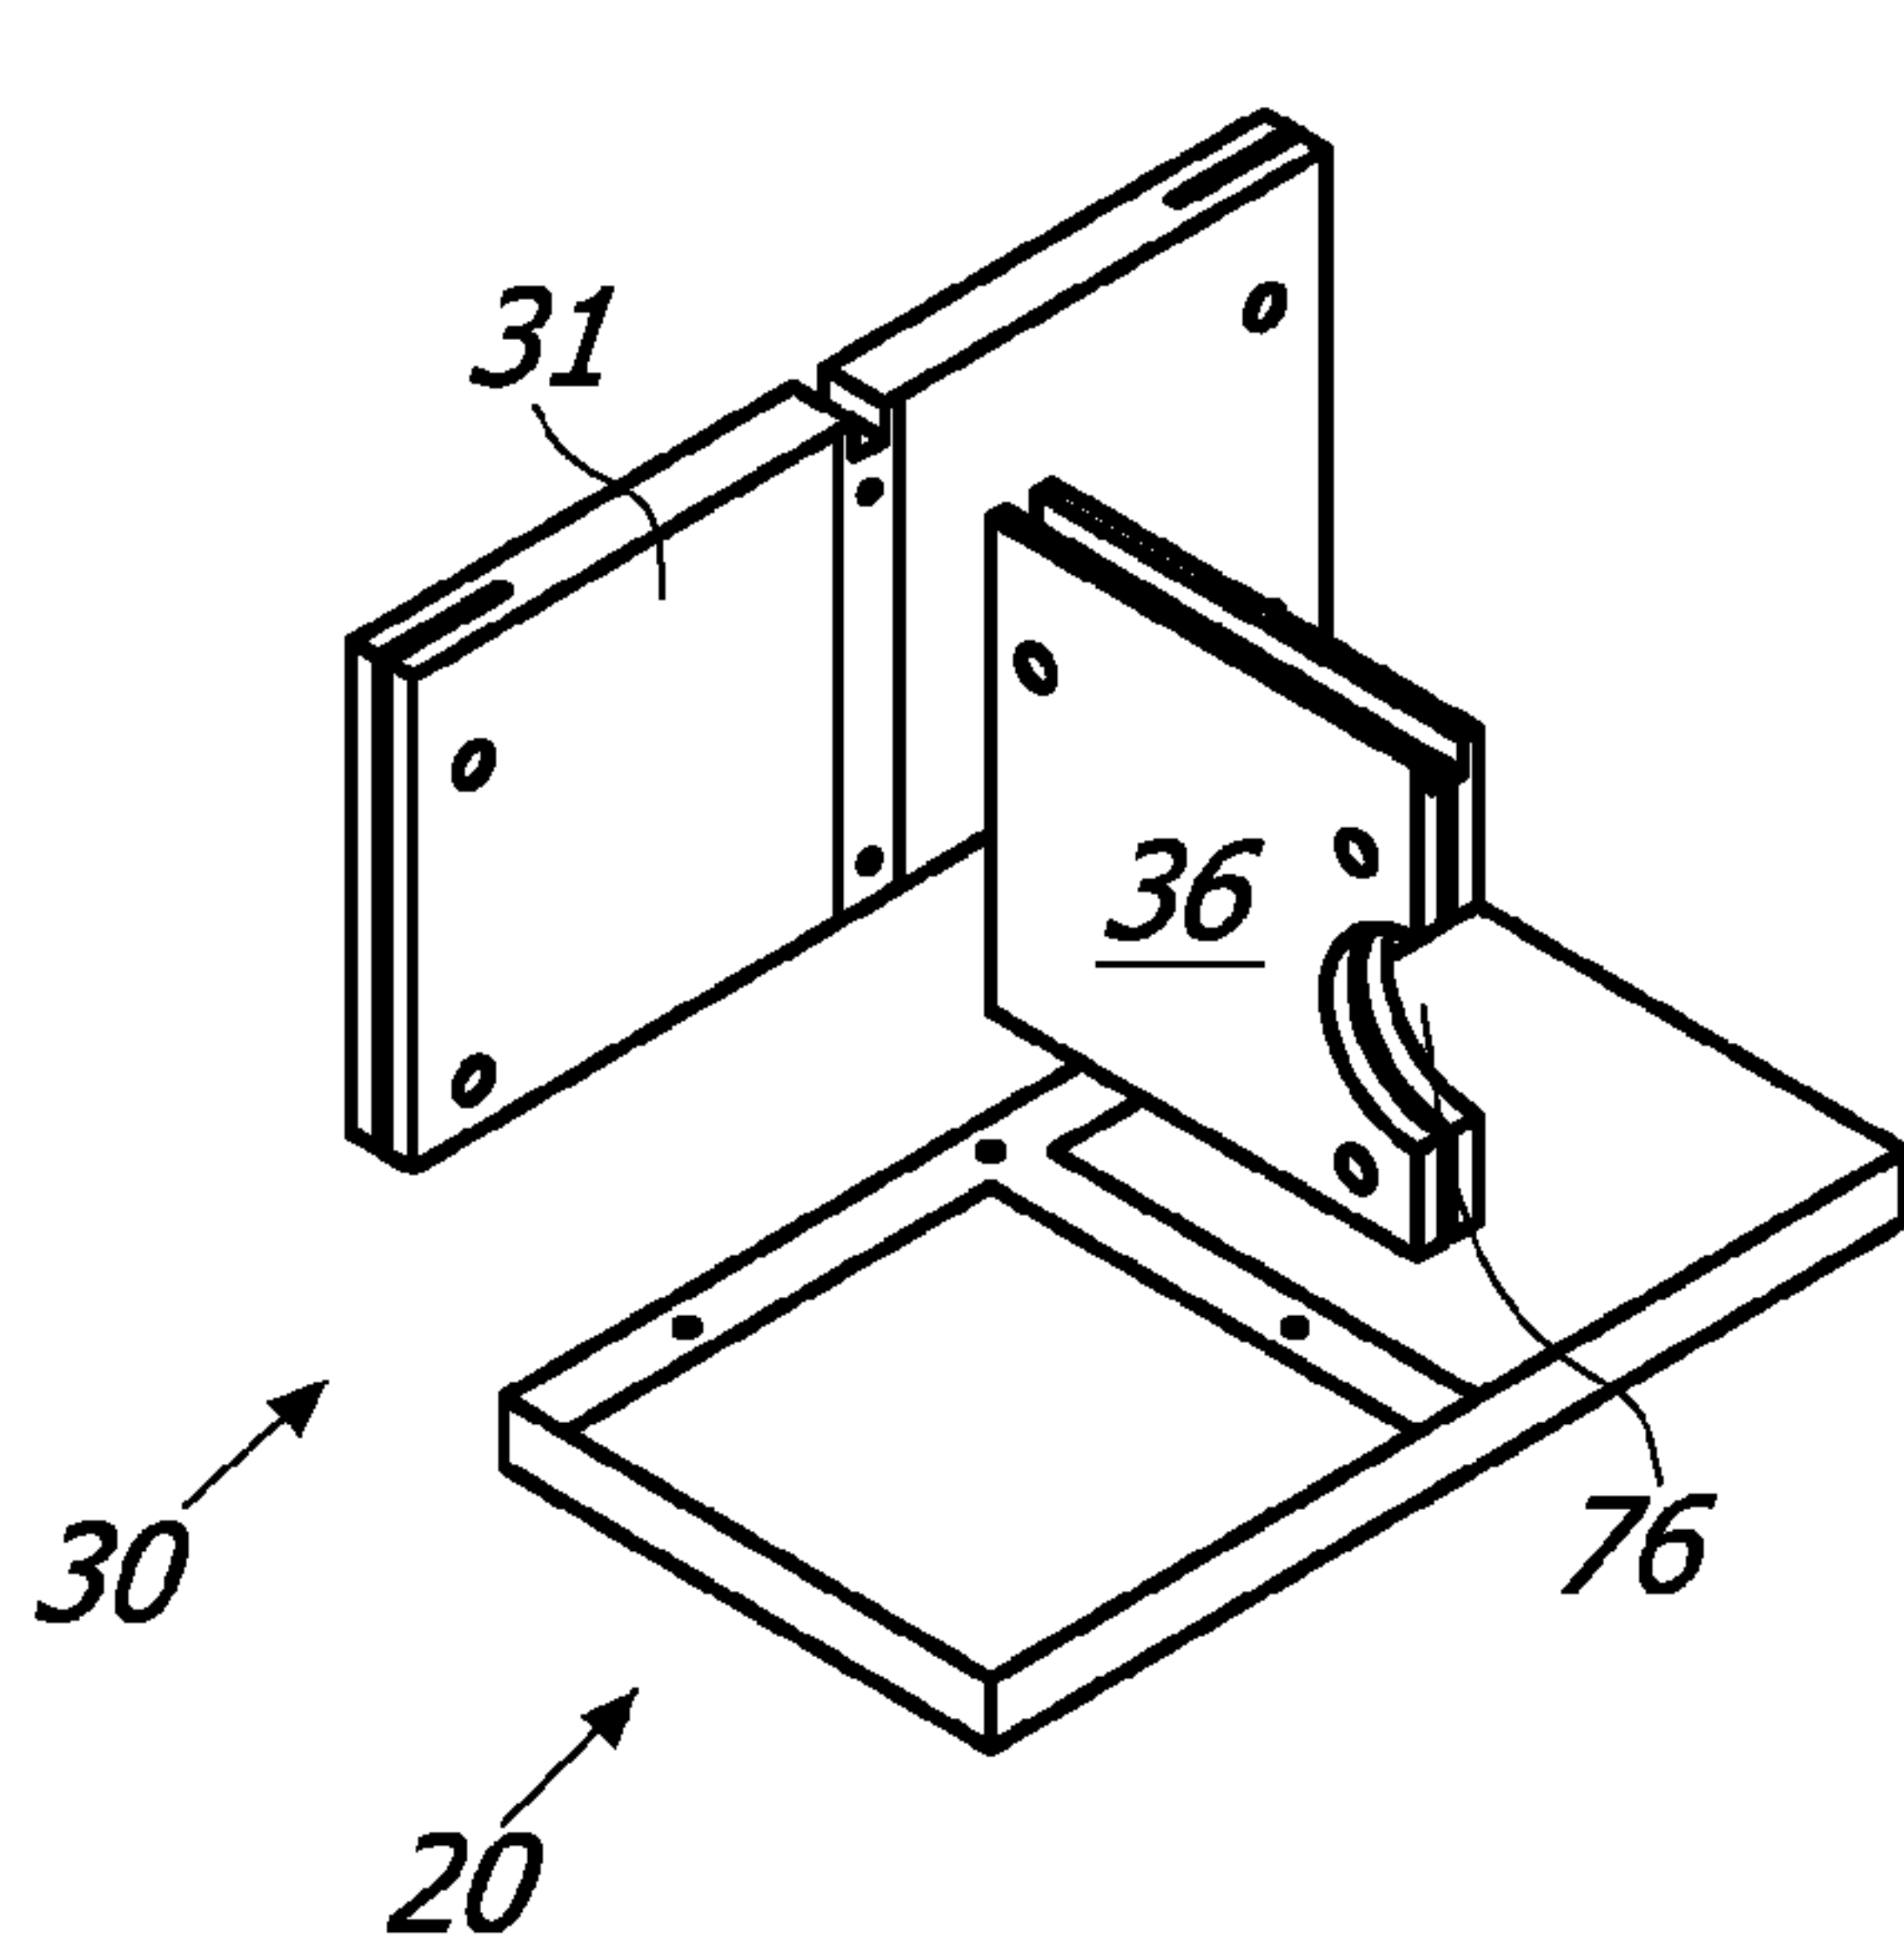
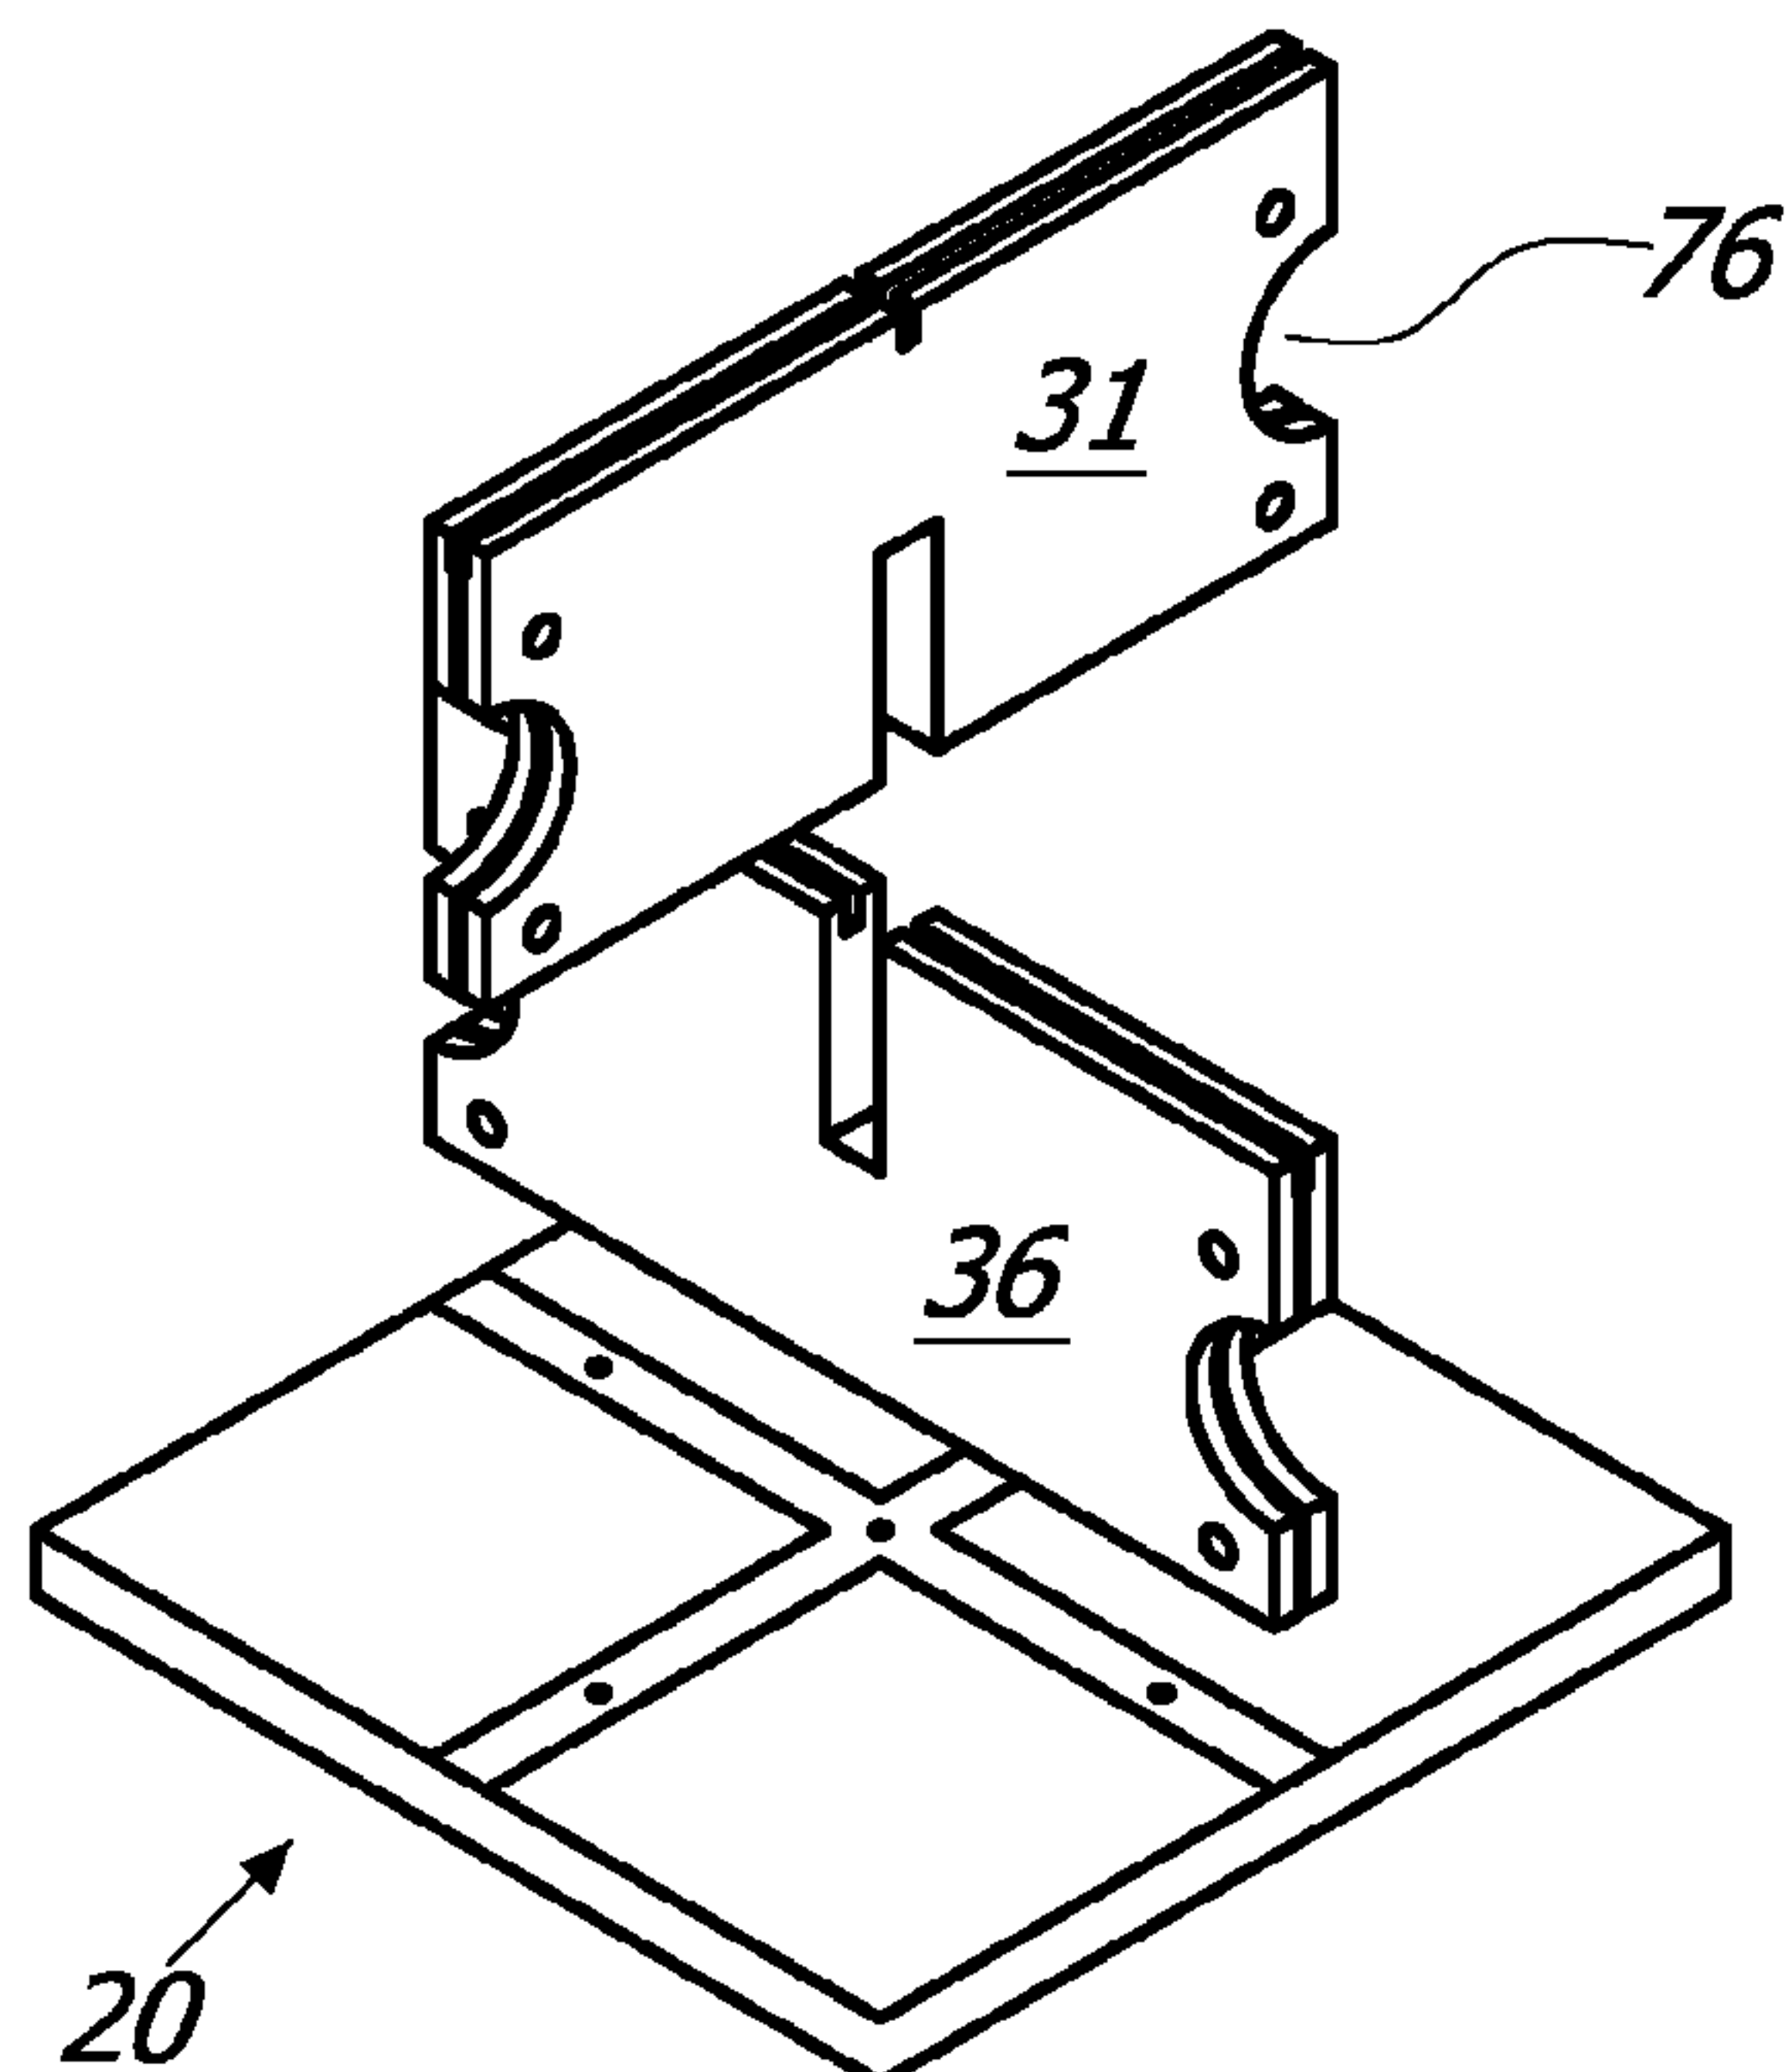
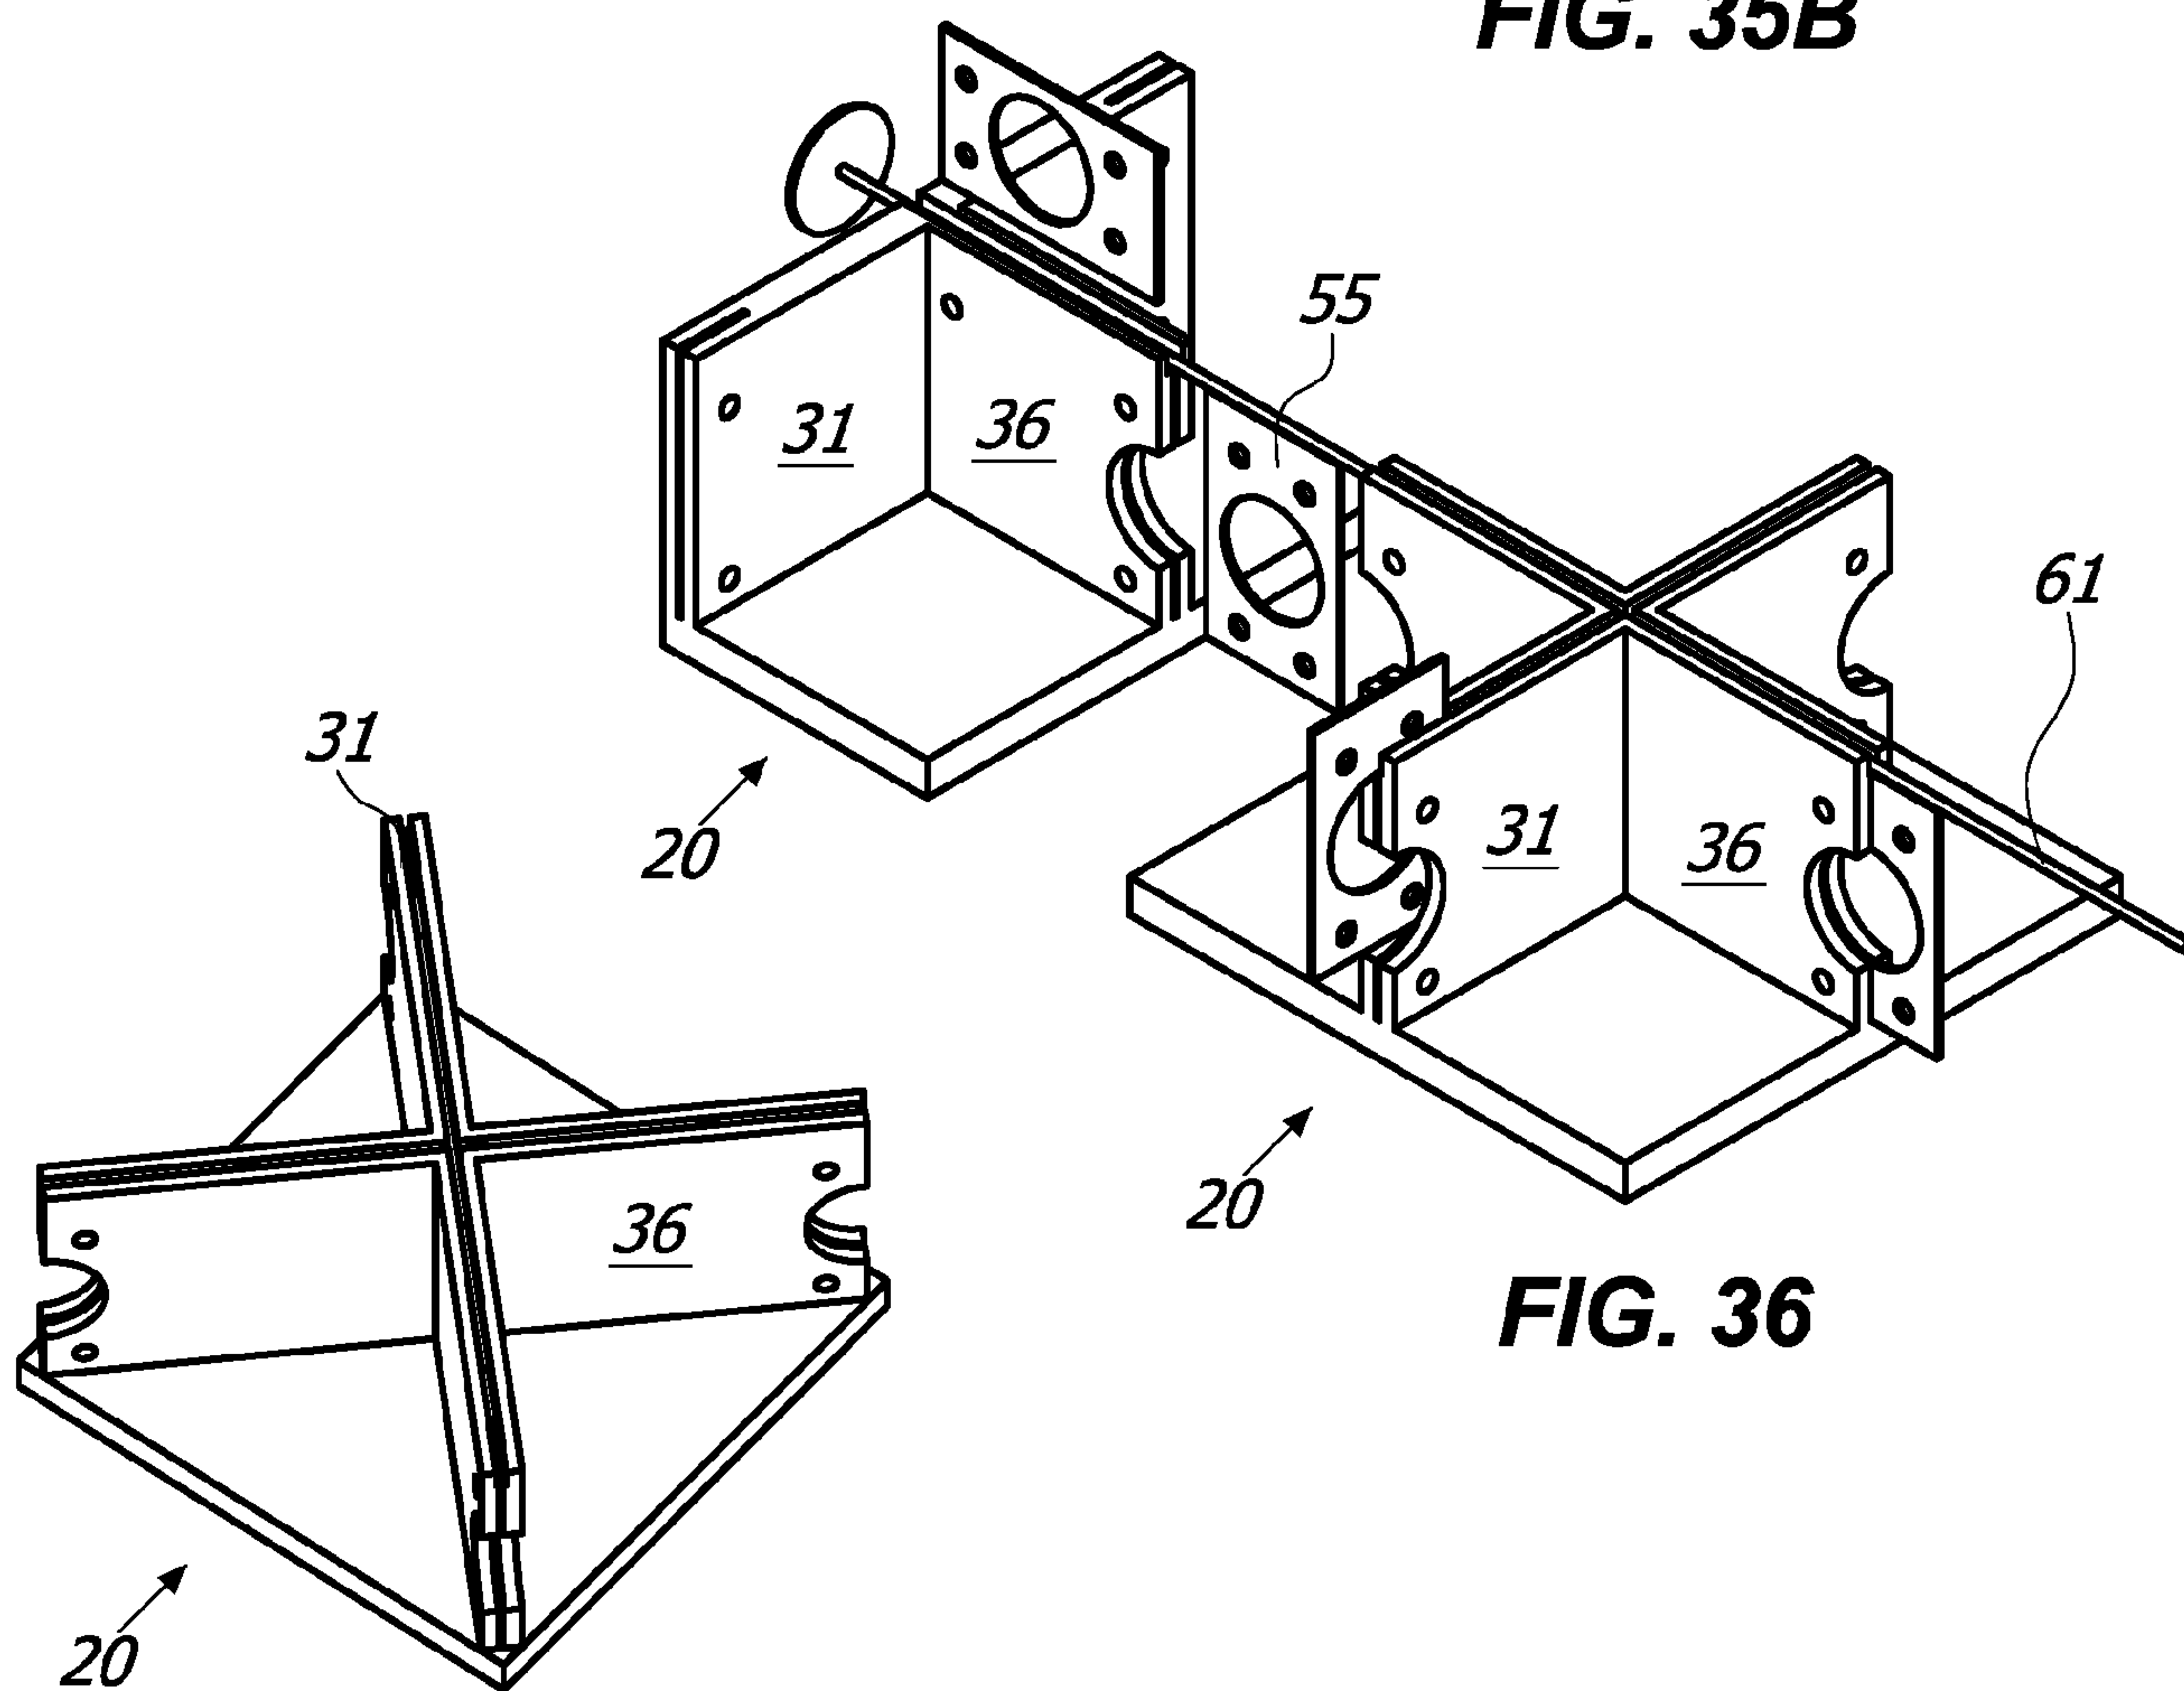
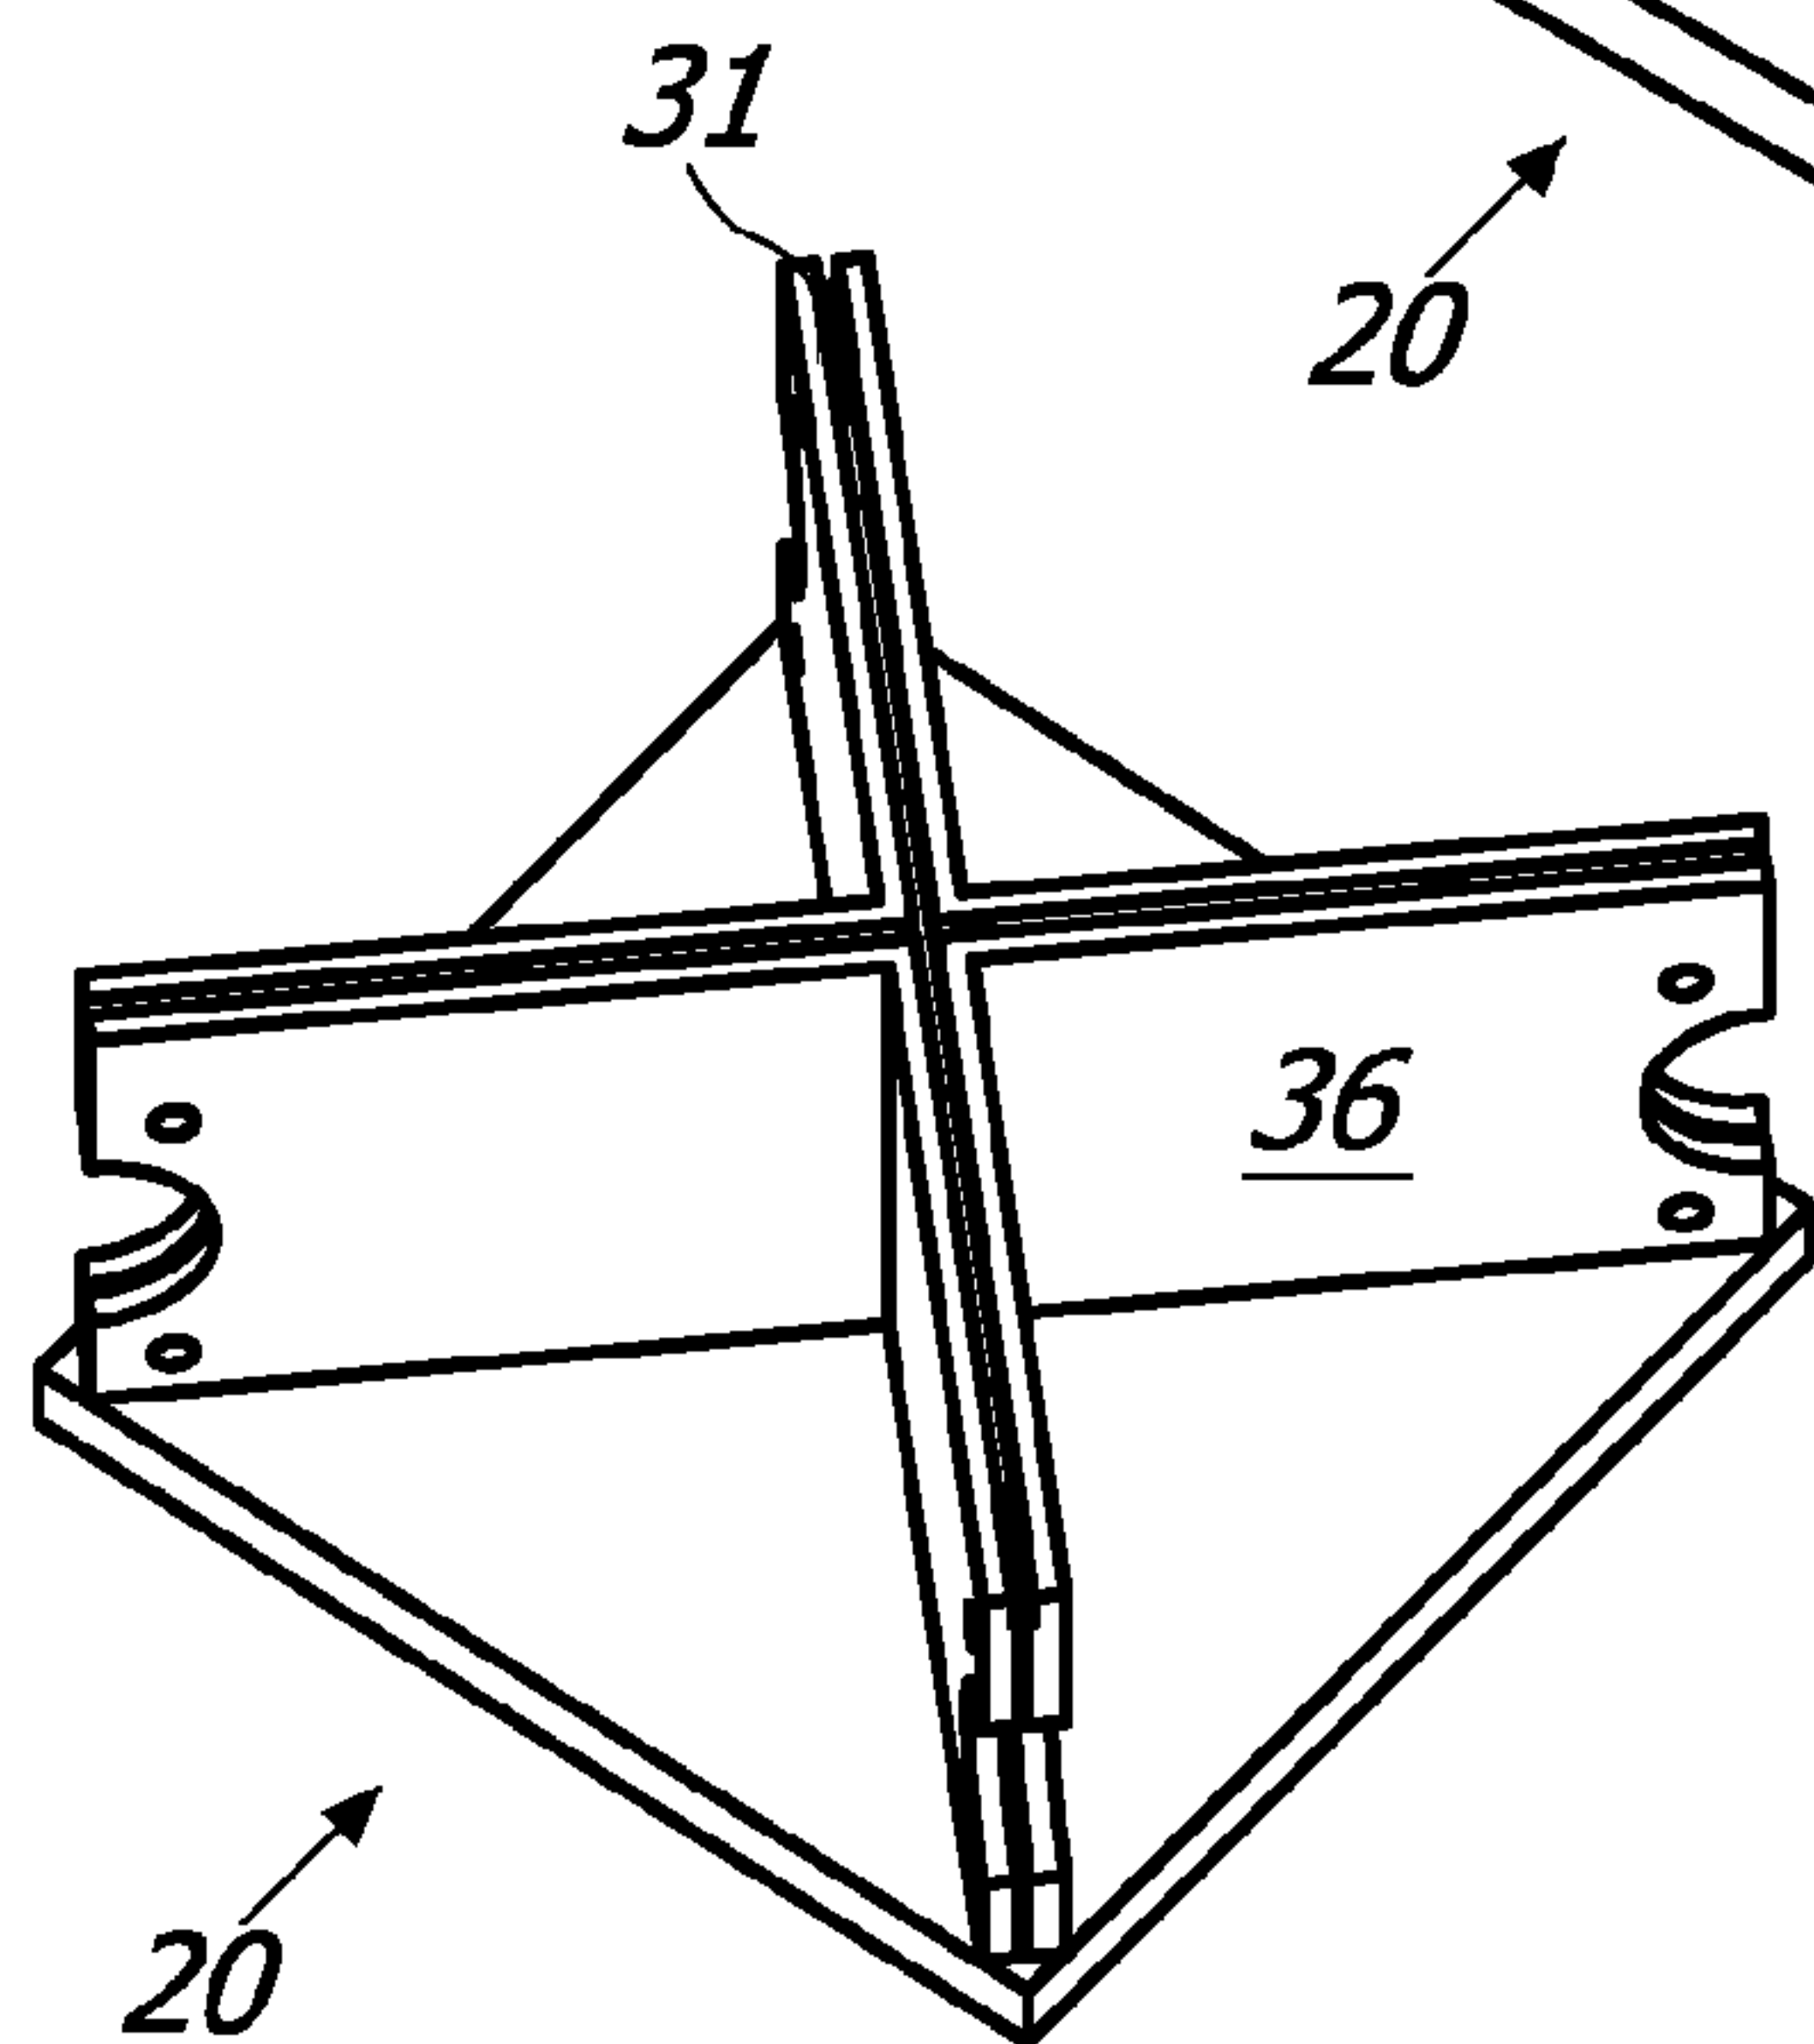
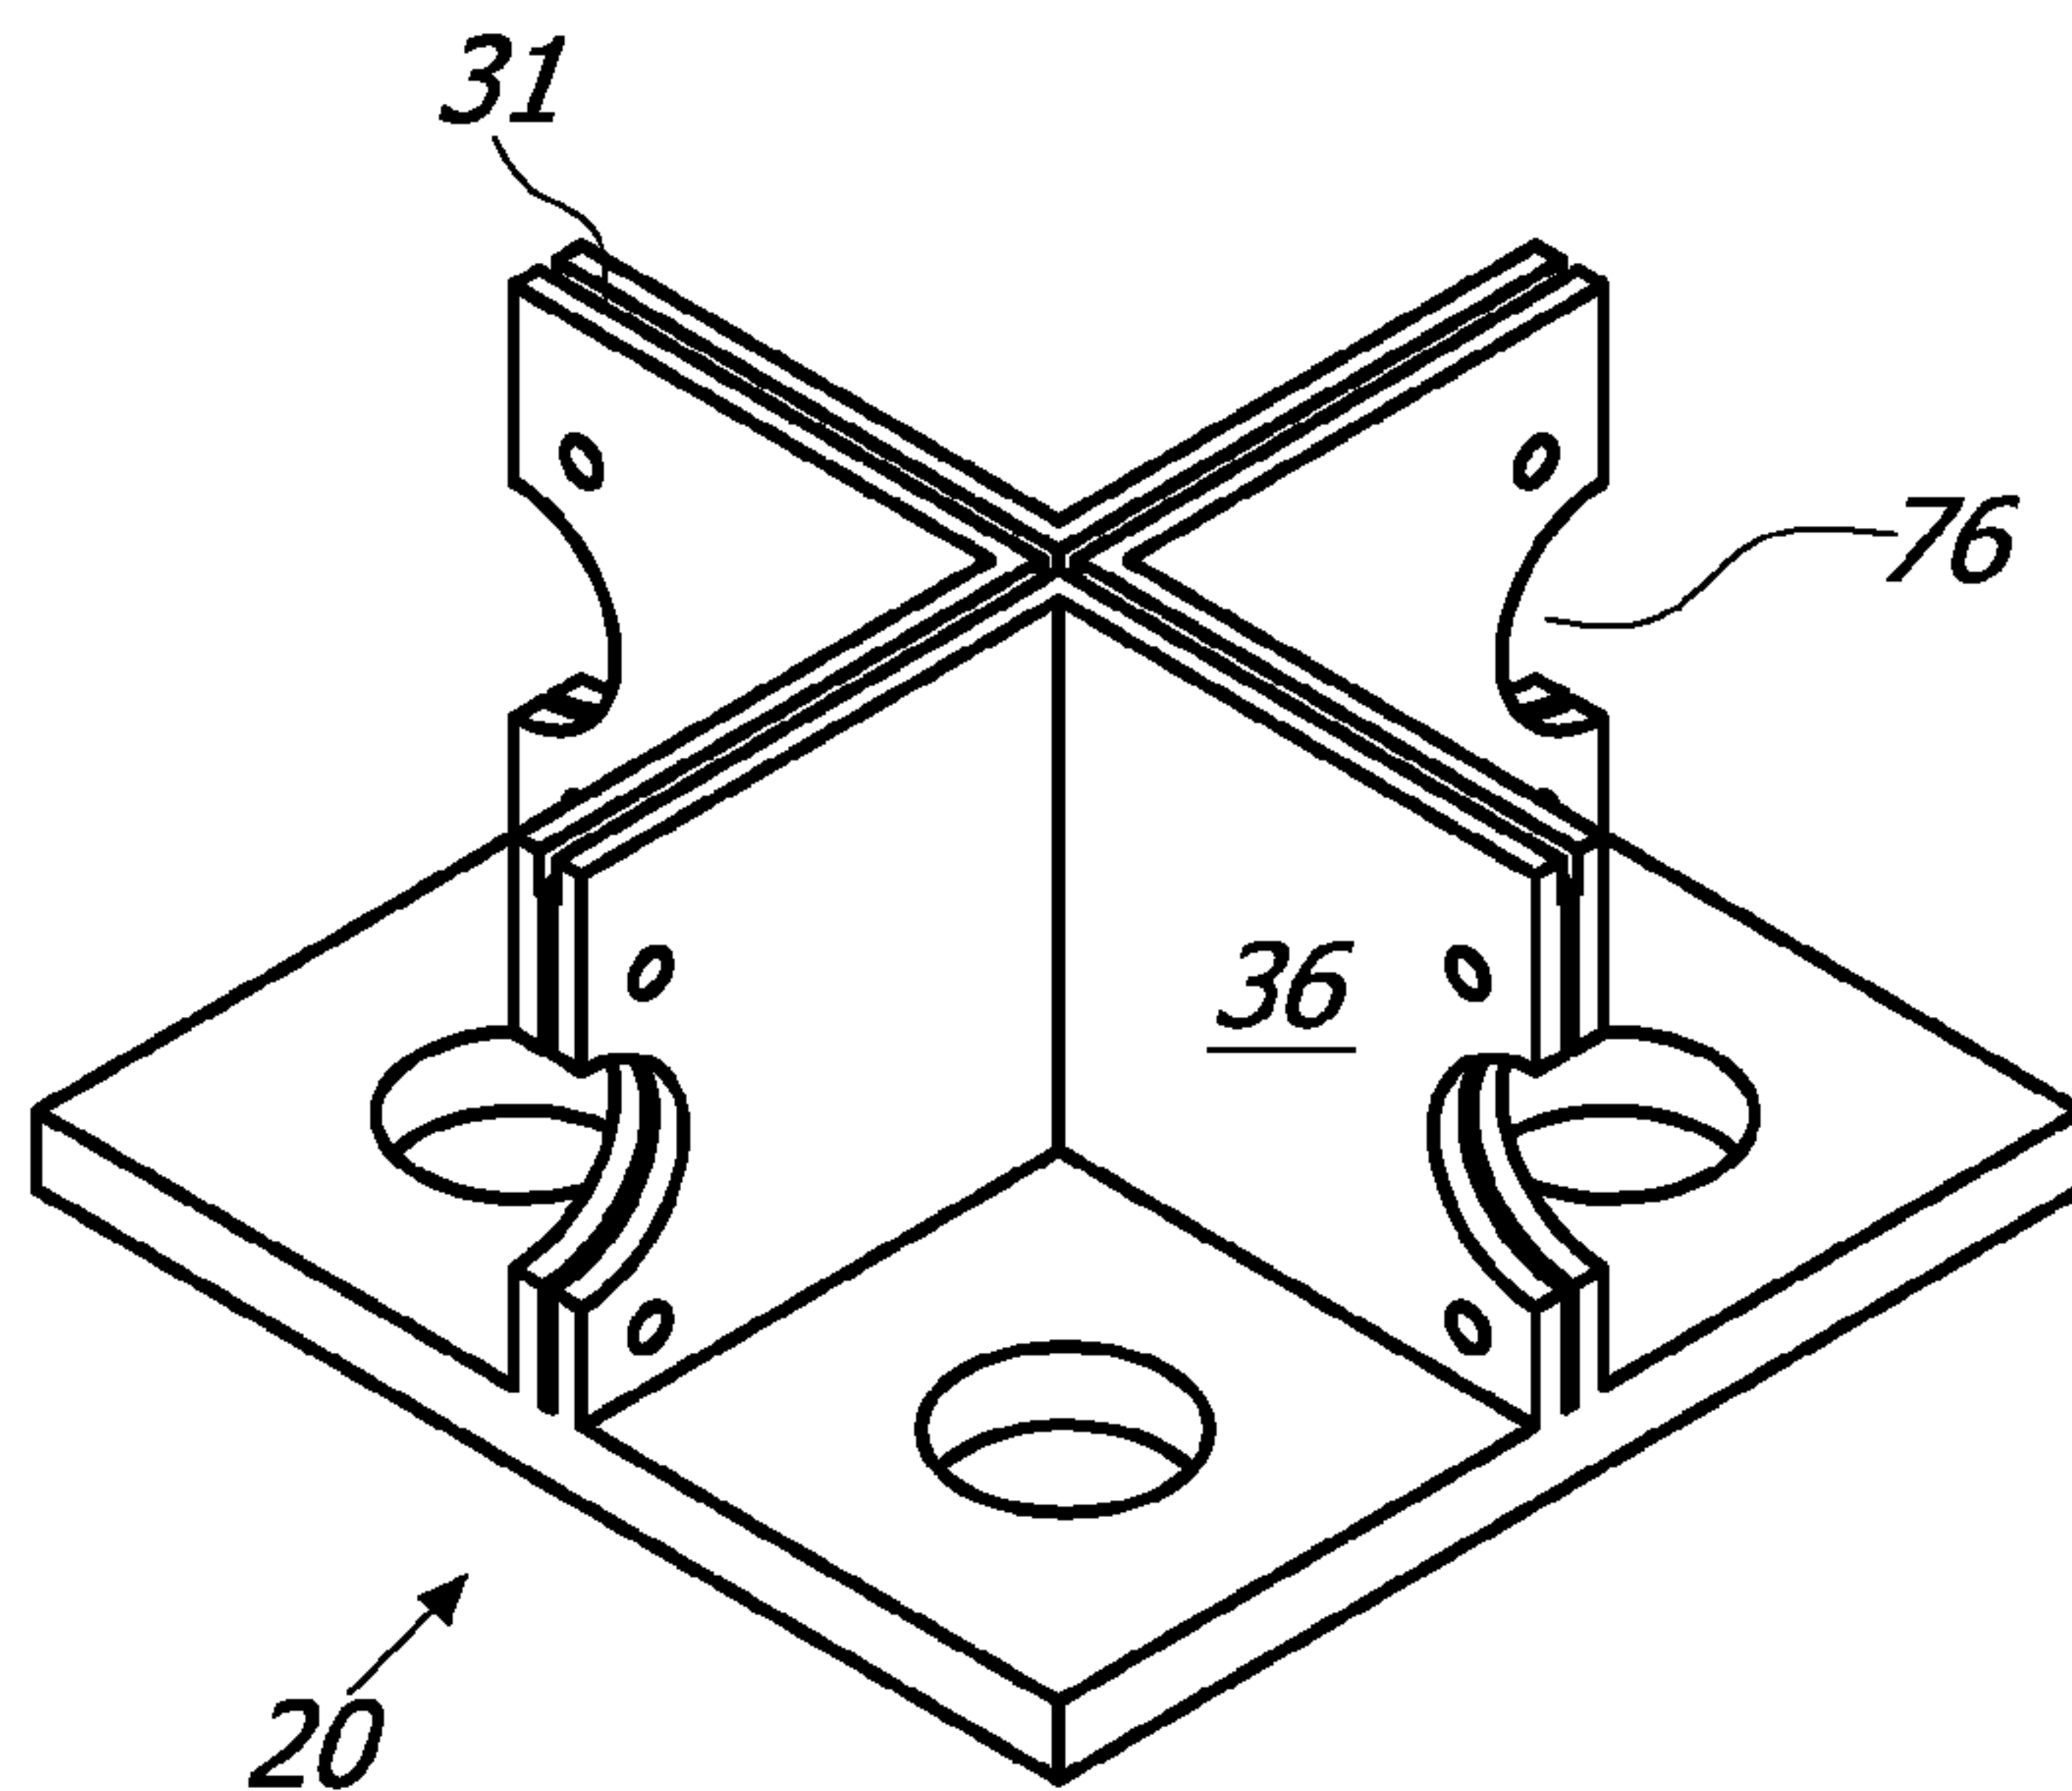
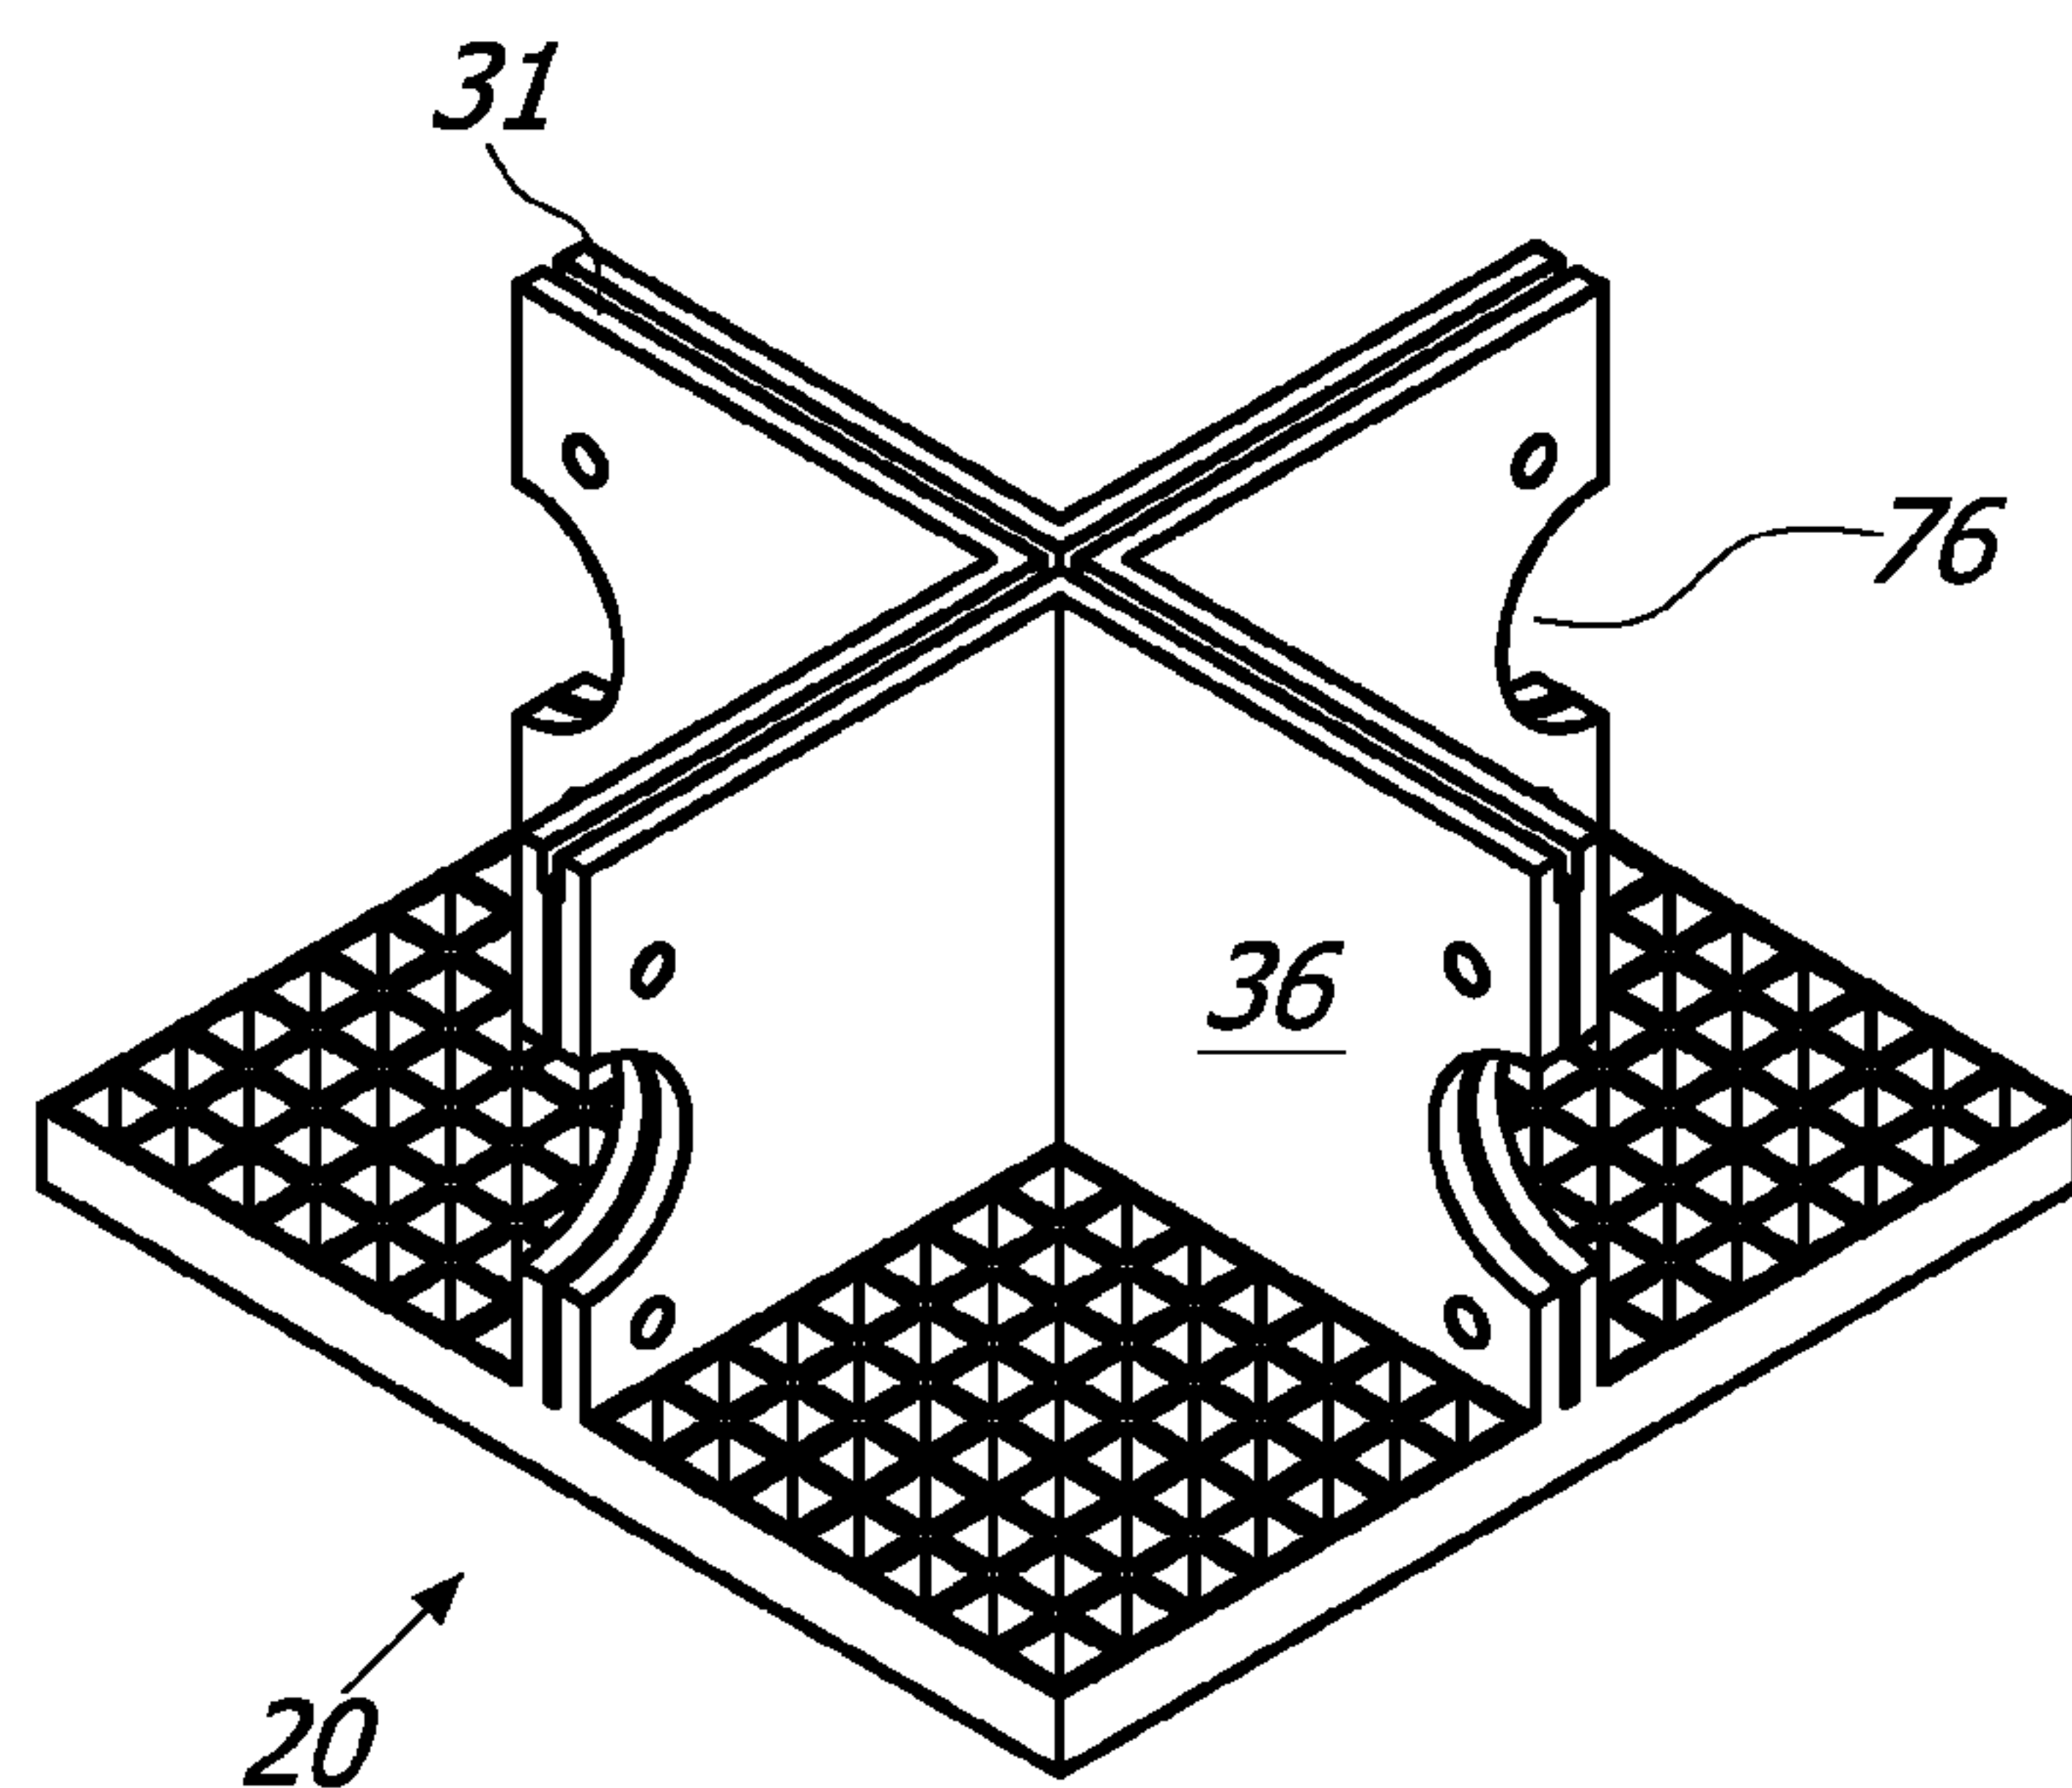


FIG. 34B

23 / 24**FIG. 35A****FIG. 35B****FIG. 36****FIG. 37**

24 / 24**FIG. 38****FIG. 39**

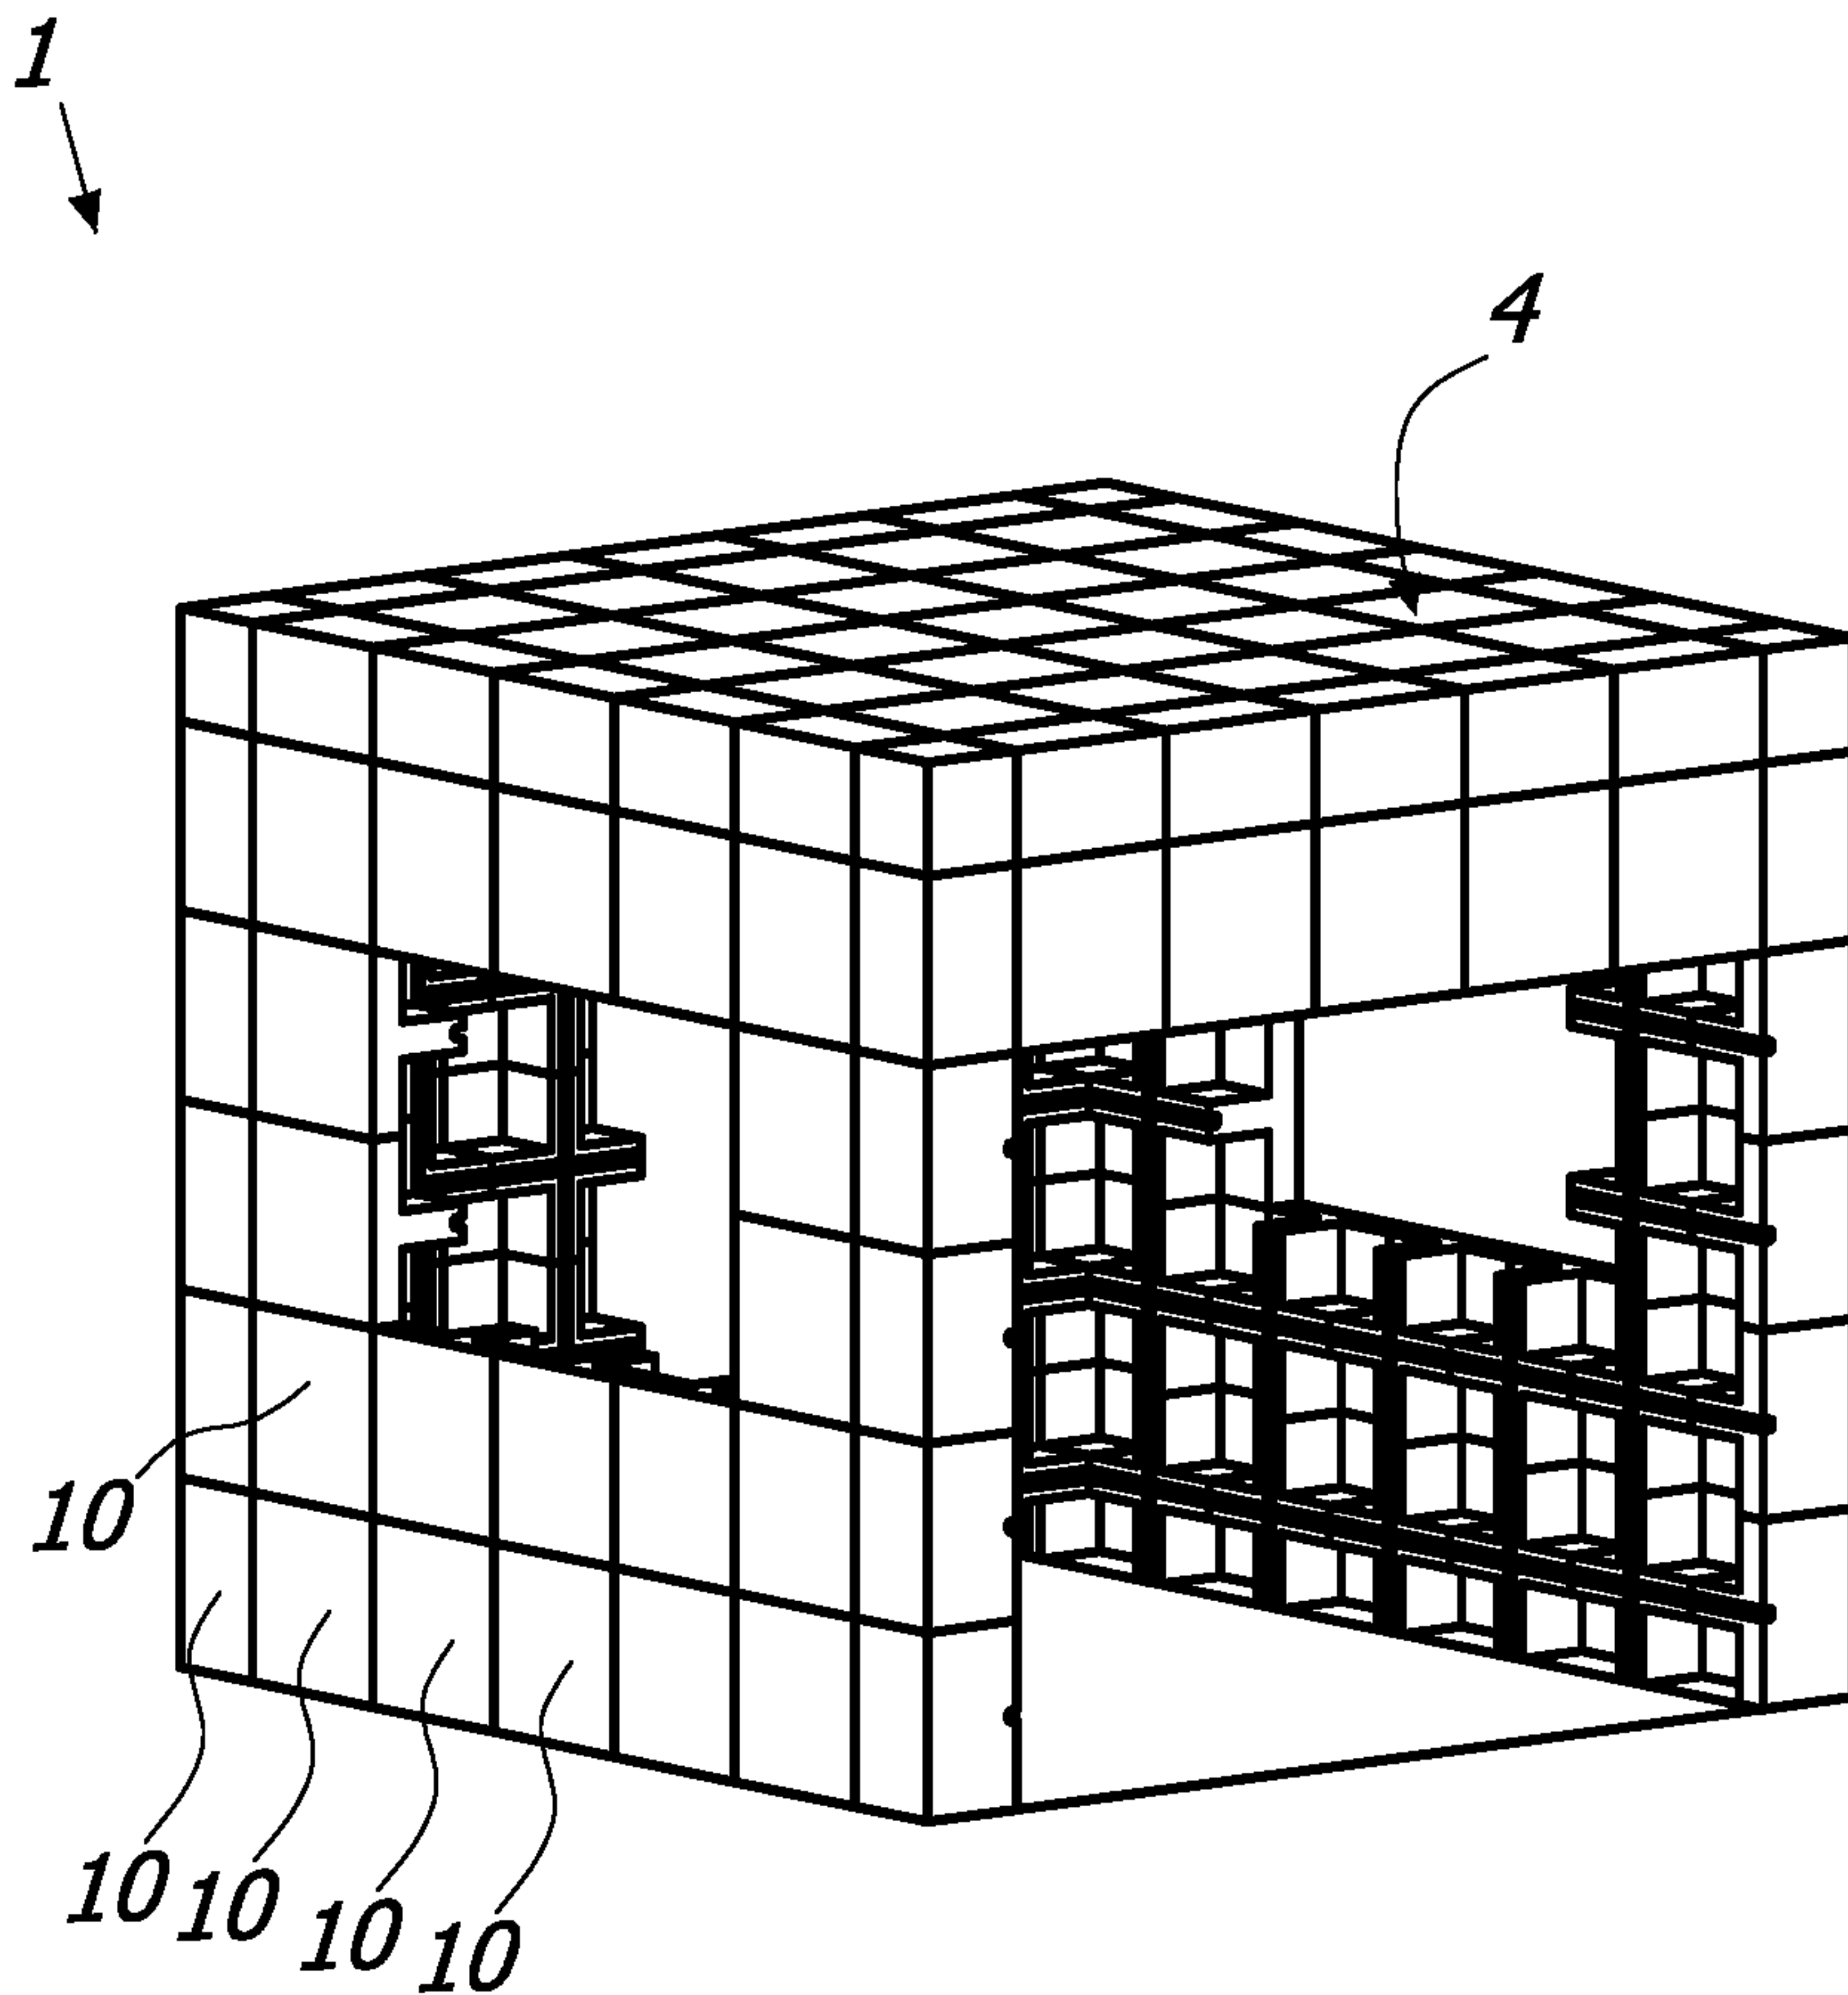


FIG. 1