



(86) Date de dépôt PCT/PCT Filing Date: 2011/10/19
(87) Date publication PCT/PCT Publication Date: 2012/04/26
(45) Date de délivrance/Issue Date: 2020/02/25
(85) Entrée phase nationale/National Entry: 2014/04/14
(86) N° demande PCT/PCT Application No.: US 2011/001788
(87) N° publication PCT/PCT Publication No.: 2012/054085
(30) Priorité/Priority: 2010/10/19 (US61/455,419)


(51) Cl.Int./Int.Cl. *A01K 29/00* (2006.01),
A61B 5/00 (2006.01), *A61D 1/16* (2006.01),
G01S 5/02 (2010.01)

(72) Inventeurs/Inventors:
RETTEDAL, NICHOLAS P., US;
WEILNAU, STEPHEN M., US;
COCKROFT, SCOTT R., US;
YEAGER, BILLY J., US;
HORNICK, JERRY A., US

(73) Propriétaire/Owner:
ST REPRODUCTIVE TECHNOLOGIES, LLC, US

(74) Agent: AIRD & MCBURNEY LP

(54) Titre : SYSTÈME DE SURVEILLANCE D'UN ANIMAL
(54) Title: ANIMAL MONITORING SYSTEM

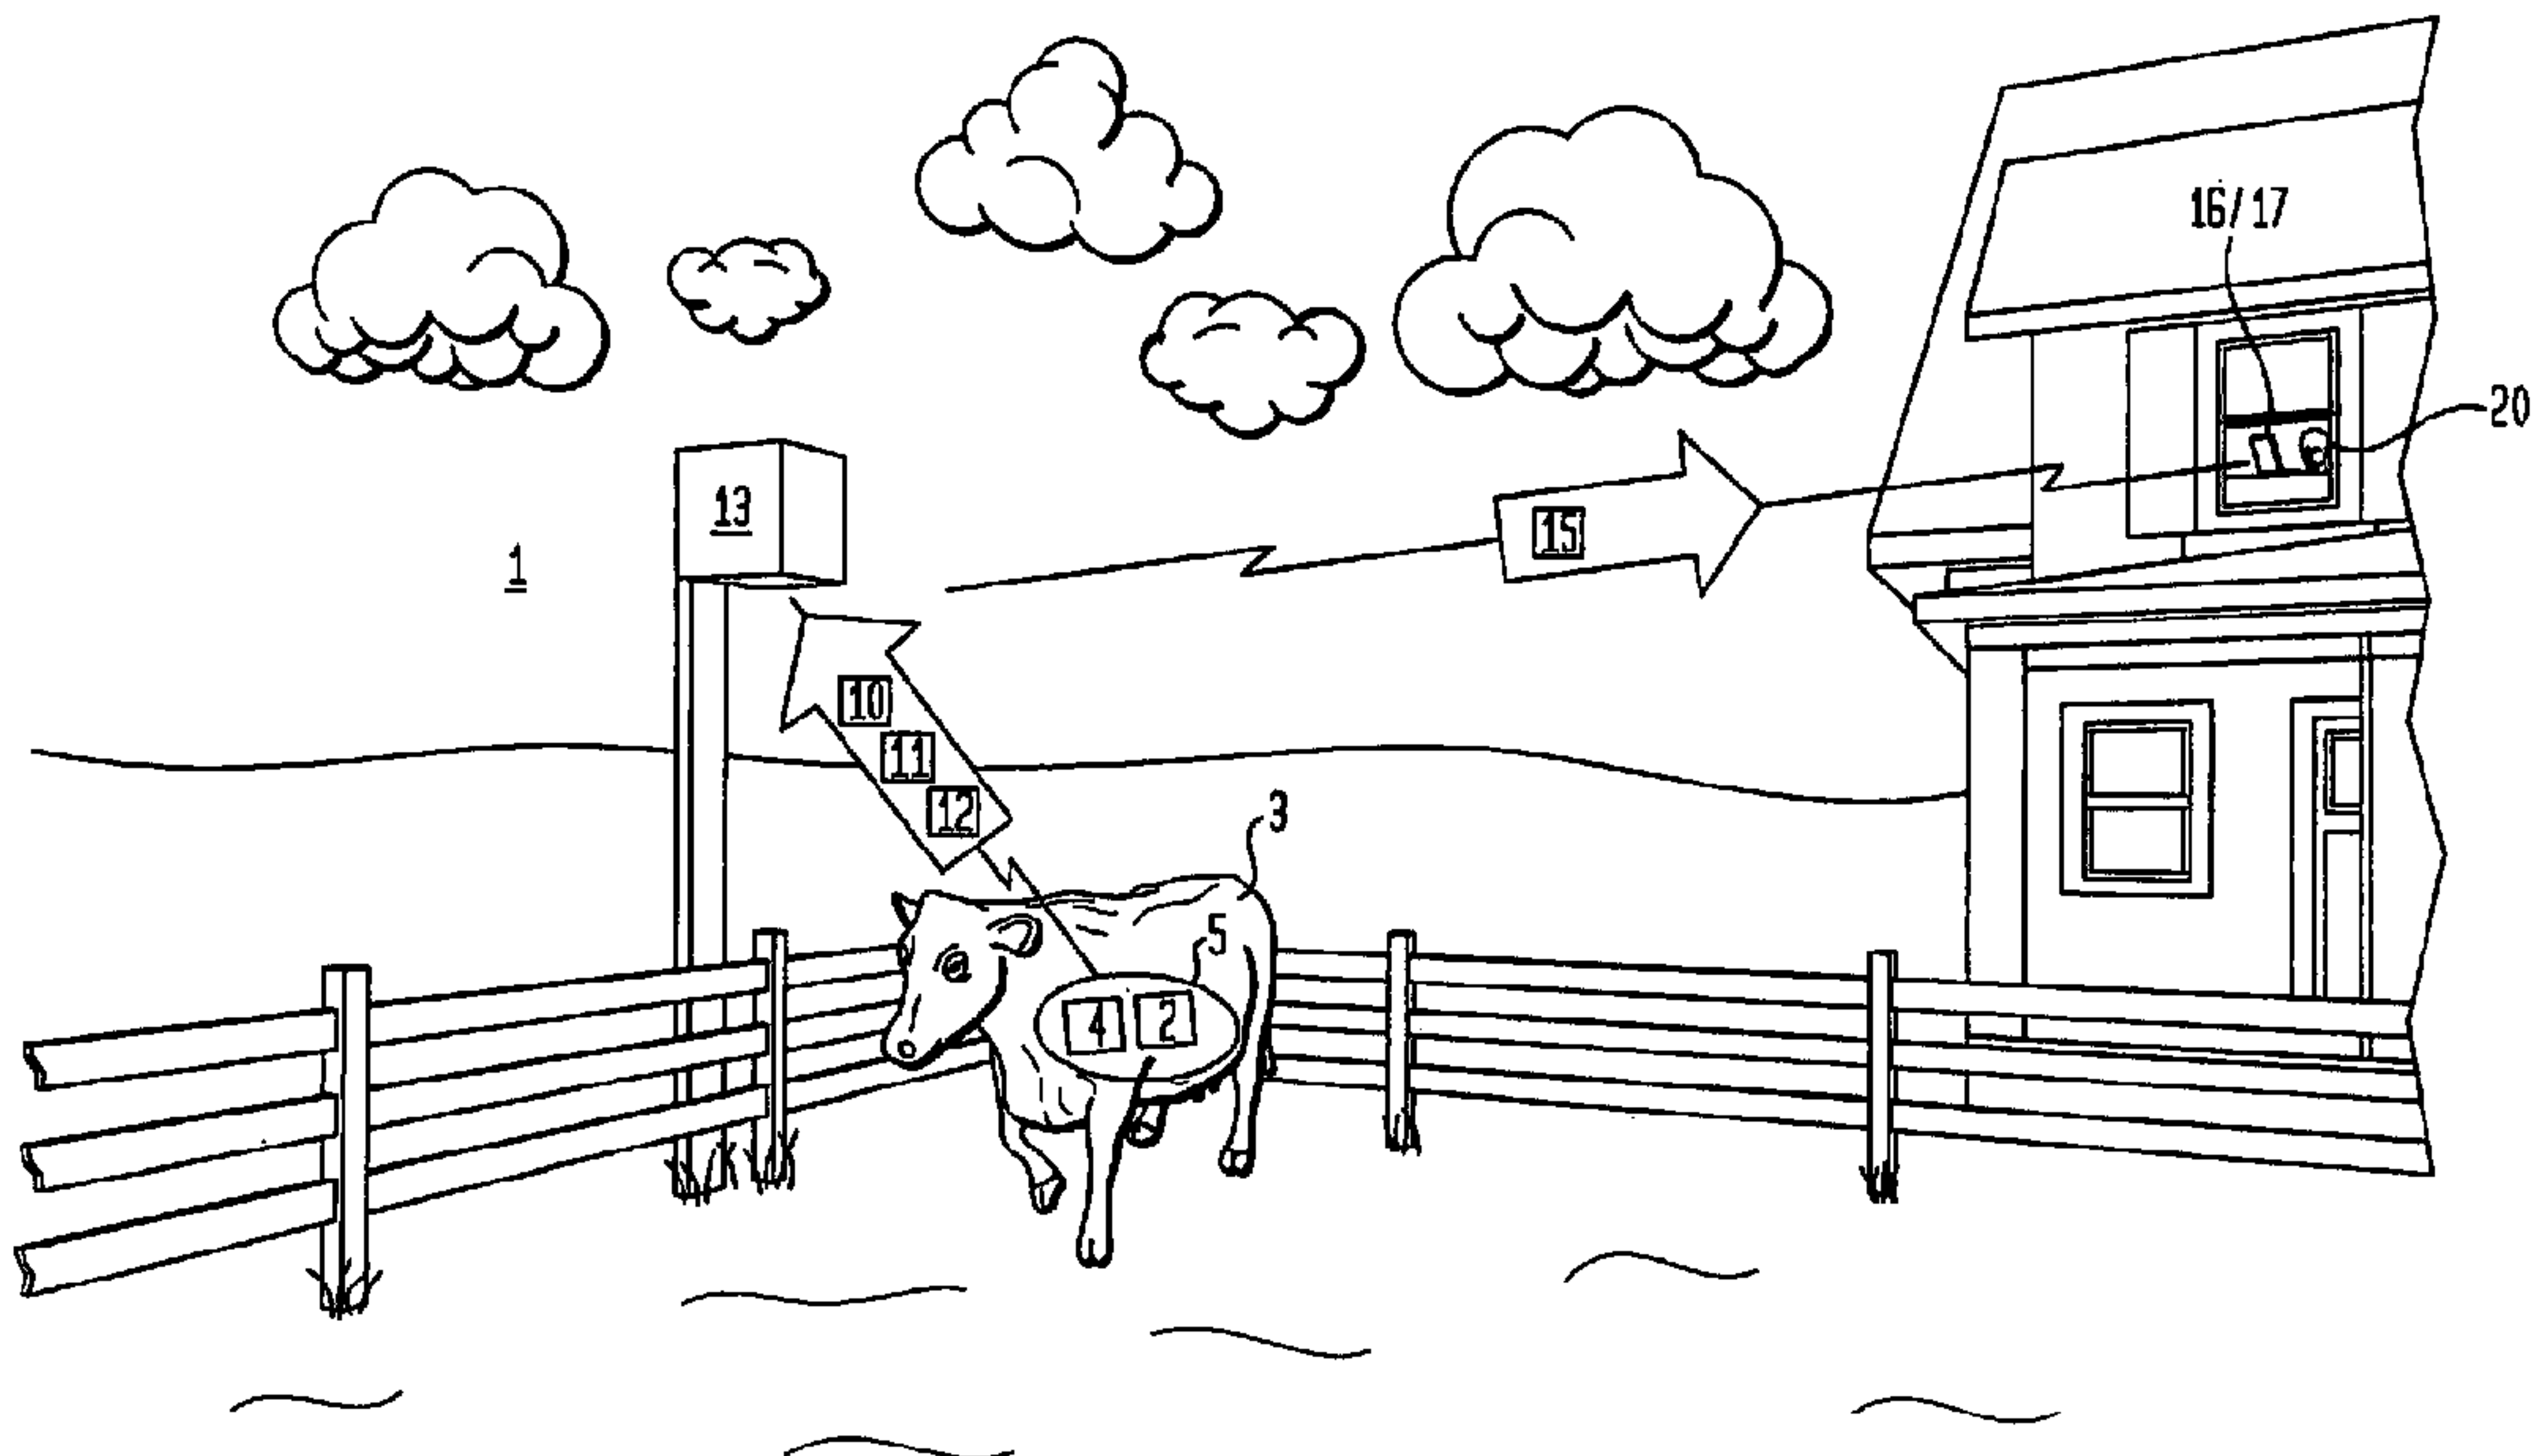

(57) **Abrégé/Abstract:**

An animal monitoring device configured as a bolus for oral administration to reside in an animal's stomach. The bolus has a substantially inert solid body with a hollow inside space to receive the animal monitoring device. The animal monitoring device includes a radio frequency generator, an animal identification information encoder for outputting the animal identification information of the particular animal. The animal monitoring device can further include sensors to detect physiological and non-physiological animal characteristics such as temperature and a sensed animal characteristic encoder for outputting sensed animal characteristic information. The animal monitoring device intermittently transmits encoded animal identification information and sensed animal characteristic information to a receiver which transmits the encoded information as packets to a specialized computer which allows a computer user access to decoded animal identification information and sensed animal characteristic information as numeric values.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
26 April 2012 (26.04.2012)(10) International Publication Number
WO 2012/054085 A3

(51) International Patent Classification:

A01K 29/00 (2006.01) *A61B 5/00* (2006.01)
A61D 1/16 (2006.01) *G01S 5/02* (2010.01)

(21) International Application Number:

PCT/US2011/001788

(22) International Filing Date:

19 October 2011 (19.10.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/455,419 19 October 2010 (19.10.2010) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:

US 61/455,419 (CIP)
 Filed on 19 October 2010 (19.10.2010)

(71) Applicant (for all designated States except US): **BELLA TECHNOLOGIES, LLC** [US/US]; 27906 Weld County Road 388, Kersey, CO 80644 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RETTEDAL, Nicholas, P.** [US/US]; 1401 14th Avenue, Greeley, CO 80631 (US). **WEILNAU, Stephen, M.** [US/US]; 5006 West 27th Street, Greeley, CO 80634 (US). **COCKROFT, Scott, R.** [US/US]; 27712 County Road 62, Greeley, CO 80631

(US). **YEAGER, Billy, J.** [US/US]; 351 E. Civic Center Drive #204, Gilbert, AZ 85233 (US). **HORNICK, Jerry, A.** [US/US]; 17998 E. Paseo Del Canto, Gold Canyon, AZ 85118 (US).

(74) Agent: **MILES, Craig, R.**; CR MILES P.C., 405 Mason Court, Suite 119, Fort Collins, CO 80524 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ANIMAL MONITORING SYSTEM

FIG. 1

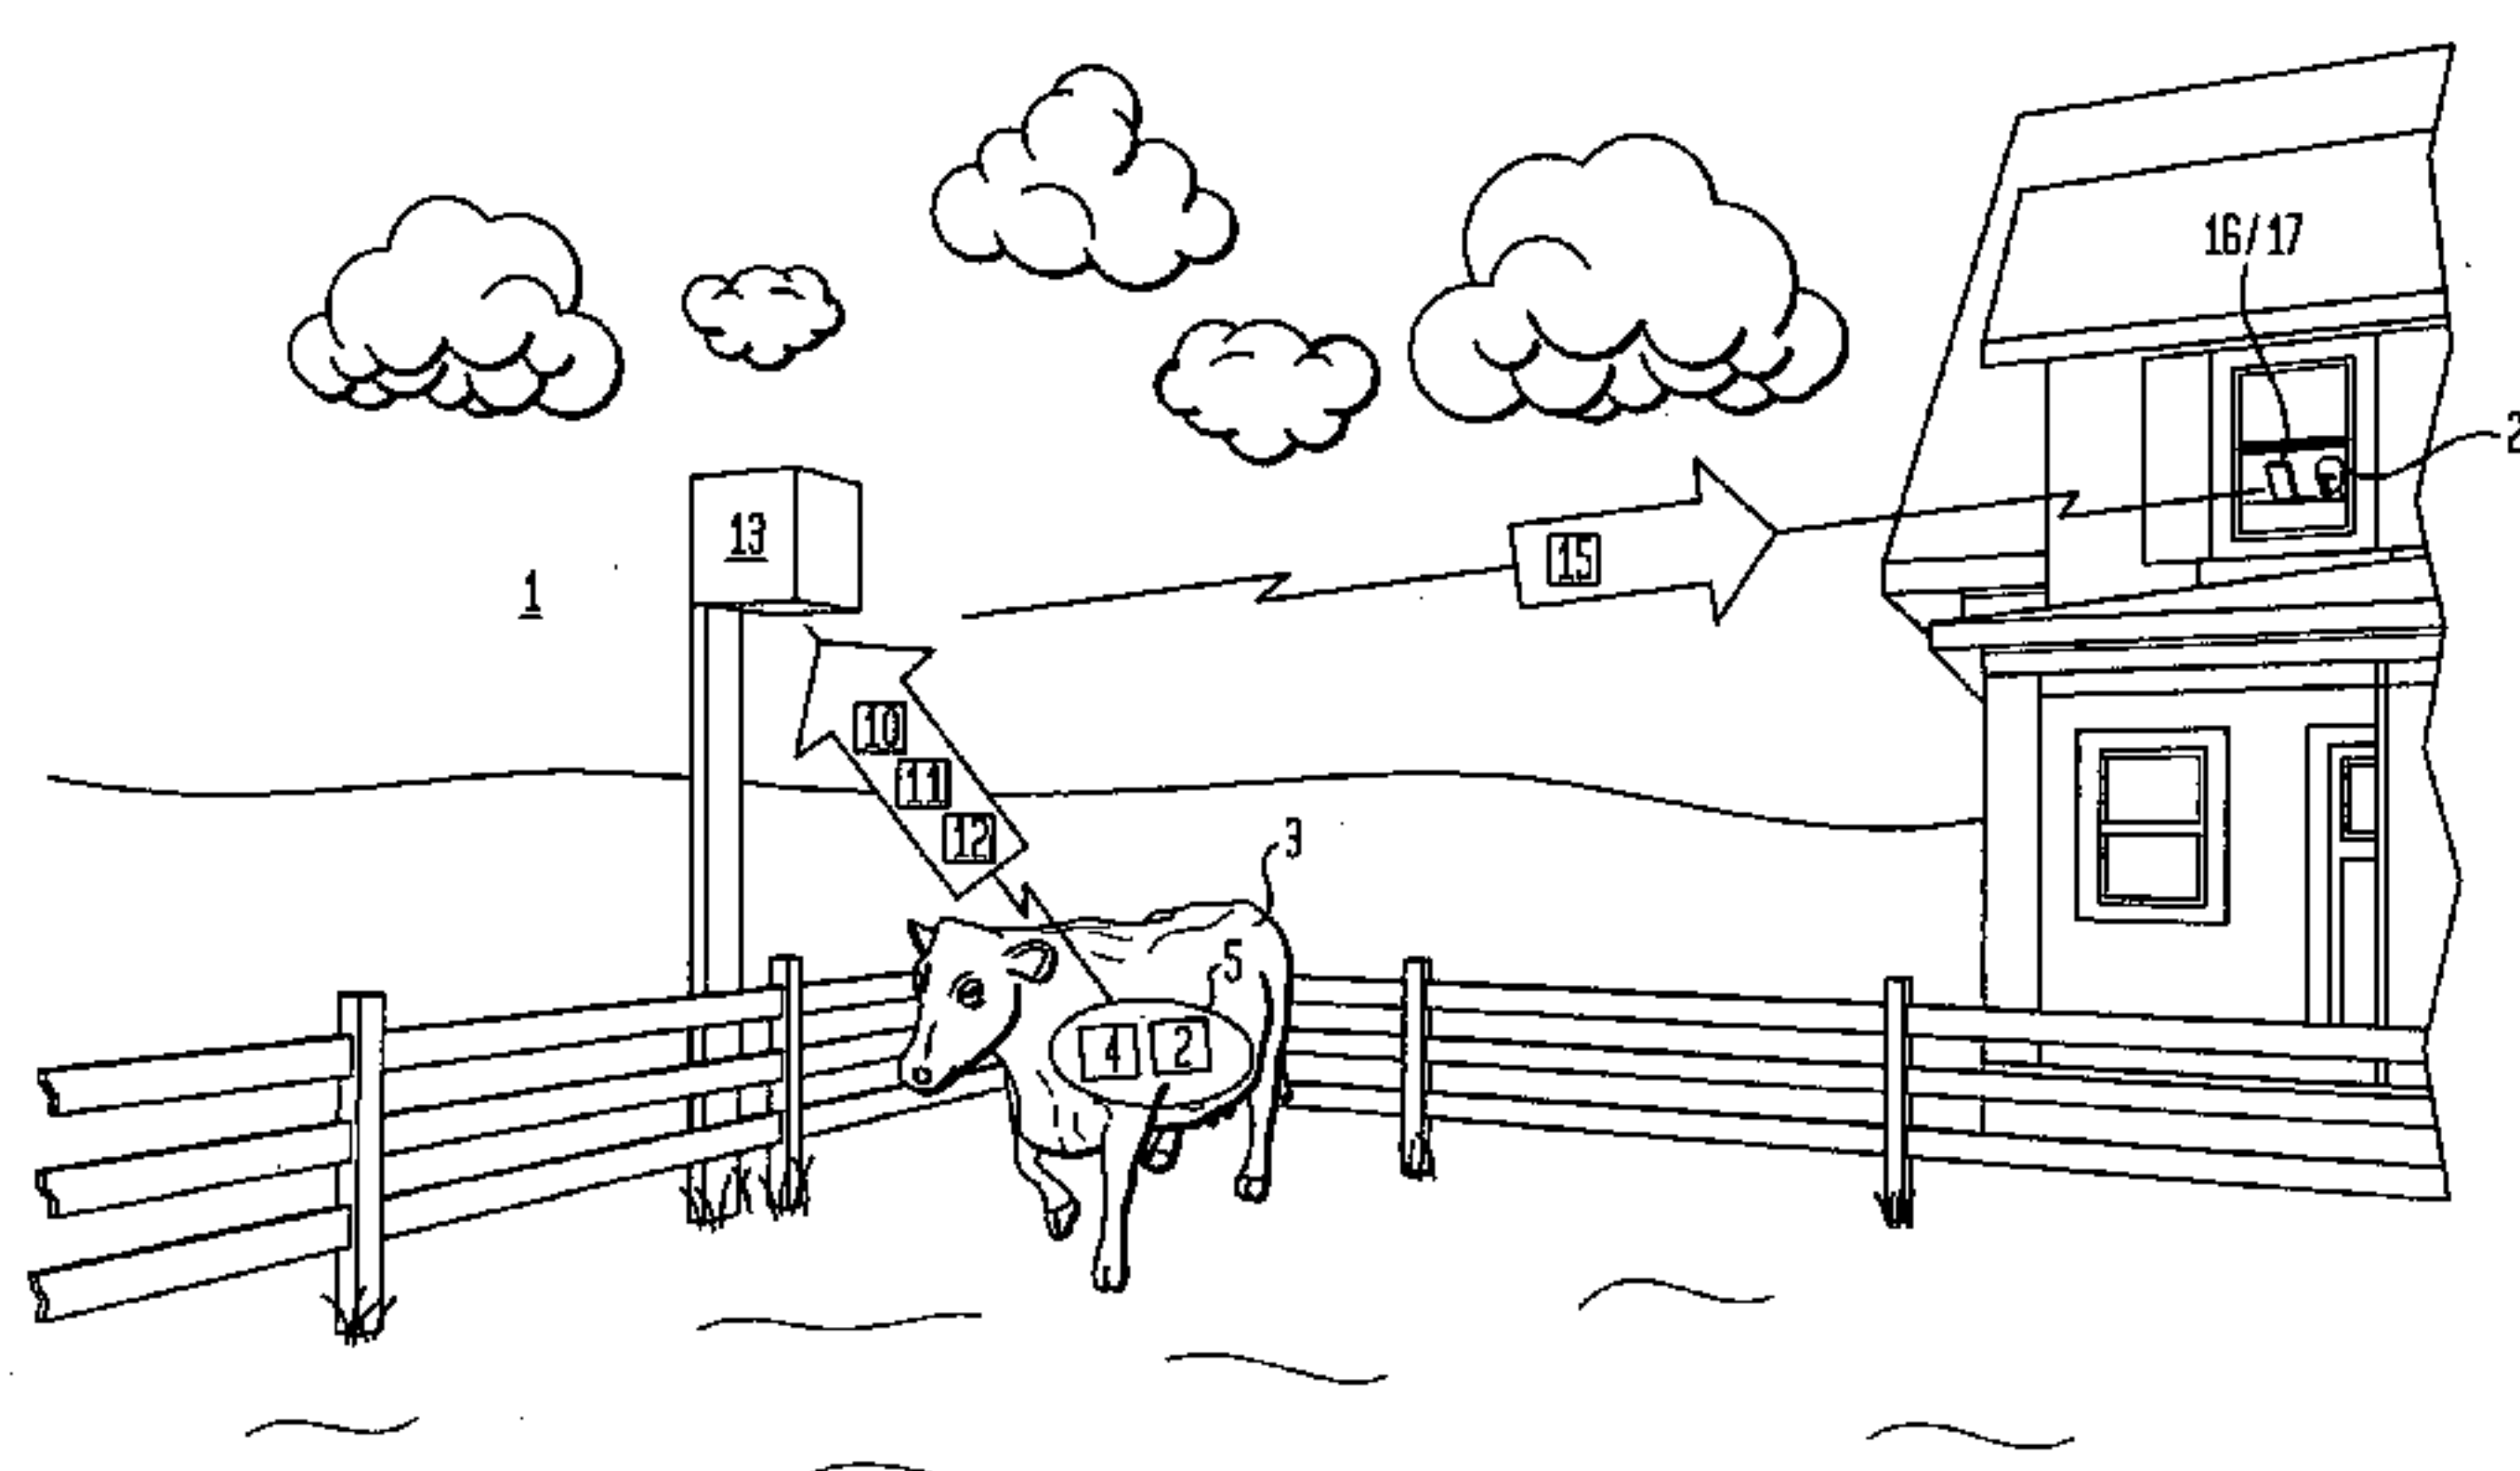

(57) Abstract: An animal monitoring device configured as a bolus for oral administration to reside in an animal's stomach. The bolus has a substantially inert solid body with a hollow inside space to receive the animal monitoring device. The animal monitoring device includes a radio frequency generator, an animal identification information encoder for outputting the animal identification information of the particular animal. The animal monitoring device can further include sensors to detect physiological and non-physiological animal characteristics such as temperature and a sensed animal characteristic encoder for outputting sensed animal characteristic information. The animal monitoring device intermittently transmits encoded animal identification information and sensed animal characteristic information to a receiver which transmits the encoded information as packets to a specialized computer which allows a computer user access to decoded animal identification information and sensed animal characteristic information as numeric values.

WO 2012/054085 A3



Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:

5 July 2012

ANIMAL MONITORING SYSTEM

This International Patent Cooperation Treaty Patent Application claims the benefit of United States Provisional Patent Application No. 611455,419, filed October 19, 2010.

5

I. TECHNICAL FIELD

Generally, an animal monitoring device configured as a bolus for oral administration to reside in an animal's stomach. The bolus has a substantially inert solid body which contains
10 within an animal monitoring device. The animal monitoring device includes a radio frequency generator, an animal identification information encoder for outputting animal identification information of the particular animal. The animal monitoring device can further include sensors to detect one or more physiological and non-physiological sensed animal characteristics and a sensed animal characteristic encoder for outputting sensed animal characteristic information.
15 The animal monitoring device intermittently transmits encoded animal identification information and encoded sensed animal characteristic information to a radio frequency reader which assembles and transmits encoded information as data packets to a reception device which allows a specialized computer to display decoded animal identification information and decoded sensed animal characteristic information as numeric values which can be accessed by
20 a user.

II. BACKGROUND

A variety of animal monitoring devices are in use to remotely track animal location and
25 remotely sense the temperature of animals. Certain of these devices include an orally administered, inserted, or ingested bolus containing microprocessors for processing animal identification information and signals from sensors to provide encoded data representations which can be transmitted by radio-frequency to a radio-frequency receiver. However, certain problems remain unresolved which relate to the structure and function of the bolus electrical
30 circuitry and the transmission of encoded data representations by these conventional animal monitoring devices.

One problem related to conventional bolus may be that there is no magnet located within the bolus which generates a magnetic field to collect metal materials ingested by the animal such as wire, nails, screws, tacks, barbed wire, or the like. Alternately, conventional bolus may contain within one or more magnets, but the magnetic field generated may dispose attracted metal elements in an orientation which projects outwardly from the bolus. These projecting metal elements can cause injury to the animal.

Another problem related to conventional bolus can be that the magnet has a location sufficiently close to or as a part of the components generating the radio- frequency which carries encoded data representations generated by the microcontroller or processor elements resulting in loss of encoded data representations during transmission to the radio frequency receiver.

Another problem related to conventional bolus may be that the mass of the animal in which the bolus has a location can demodulate the frequency of the radio signal such that the radio signal has a different frequency at the point of transmission than the frequency of the radio signal after passing through the mass of the animal. Accordingly, encoded data representations can be intermittently interrupted or portions or all of the transmitted encoded data representations can be lost.

As to each of these substantial problems, the animal monitoring system described herein provides a solution.

III. DISCLOSURE OF INVENTION

Accordingly, a broad aspect of an object of embodiments of the invention can be to provide a bolus orally administrable for retention in the digestive tract of an animal which contains an animal monitoring device having a structure and a function which improves transmission of encoded animal identification information and encoded sensed animal characteristic information from within an animal to a radiofrequency reader.

Another broad aspect of an object of embodiments of the invention can be to provide a bolus which includes one or more magnets disposed to generate one or more magnetic fields having a configuration which attracts metal objects to the external surface of the body of the bolus but

avoids disposing such metal objects in outwardly projecting relation the external surface of the body of the bolus.

Another broad aspect of an object of embodiments of the invention can be to provide an animal monitoring device on a printed circuit board which can be sufficiently isolated from the one or more magnets to allow transmission of encoded animal identification information and sensed animal characteristic information without interruption or loss of encoded information.

Another broad aspect of an object of the invention of the invention can be to provide a network frequency match element which functions as part of the animal monitoring device to compensate for the mass of the animal such that the radiofrequency signal generated by the animal monitoring device antenna located inside the animal can be received by the radio frequency reader antenna located outside of the animal.

In another aspect, there is provided an animal monitoring system, comprising: a) an inert bolus body adapted to allow oral administration to a ruminant animal; b) an animal monitoring device having a location inside said inert bolus body, including: i) at least one sensor which generates a signal which varies in relation to change in a sensed animal characteristic; ii) a sensor signal encoder which encodes said signal generated by said at least one sensor as encoded sensed animal characteristic information; iii) a radio frequency signal generator which generates a radio frequency signal capable of carrying said encoded sensed animal characteristic information; iv) a network frequency match element that detunes a radio frequency signal to compensate for demodulation of said radio frequency signal passing through the mass of said ruminant animal; v) an antenna which transmits said radio frequency signal; and vi) a power source which supplies power to said animal monitoring device; and c) a first magnet having a location inside said inert bolus body.

In another aspect, there is provided a method of producing an animal monitoring system, comprising the steps of: a) providing an inert bolus body adapted to allow oral administration to a ruminant animal; b) locating an animal monitoring device inside of said inert bolus body, said animal monitoring device including: i) at least one sensor capable of generating a signal which varies in relation to change in a sensed animal characteristic; ii) a sensor signal encoder which encodes said signal generated by said sensor as encoded sensed animal characteristic information;

iii) a radio frequency signal generator which generates a radio frequency signal capable of carrying said encoded sensed animal characteristic information; iv) a network frequency match element that detunes a radio frequency signal to compensate for demodulation of said radio frequency signal passing through the mass of said ruminant animal; v) a power source which supplies power to said animal monitoring device; and vi) an antenna which transmits said radio frequency signal; and c) locating a first magnet inside of said inert bolus body.

In yet another aspect, there is provided a method of monitoring an animal, comprising the steps of: a) orally administering to a ruminant animal a monitoring device and a first magnet contained inside of an inert bolus body, said animal monitoring device including: i) at least one sensor capable of generating a signal which varies in relation to change in a sensed animal characteristic; ii) a signal encoder which encodes said signal generated by said sensor as encoded sensed animal characteristic information; iii) a radio frequency signal generator which generates a radio frequency signal capable of carrying said encoded sensed animal characteristic information; iv) a network frequency match element that detunes a radio frequency signal to compensate for demodulation of said radio frequency signal passing through the mass of said ruminant animal; v) a power source which supplies power to said animal monitoring device; and vi) an antenna capable of transmitting said radio frequency signal carrying said encoded sensed animal characteristic information; and b) accessing said encoded sensed animal characteristic information carried by said radio frequency signal.

In yet another aspect, there is provided an animal monitoring system, comprising: a) an inert bolus body adapted to allow oral administration to a ruminant animal; b) an animal monitoring device having a location inside said inert bolus body, including: i) at least one sensor which generates a signal which varies in relation to change in a sensed animal characteristic; ii) a sensor signal encoder which encodes said signal generated by said at least one sensor as encoded sensed animal characteristic information; iii) a radio frequency signal generator which includes an oscillator which generates a first radio frequency signal capable of carrying said encoded sensed animal characteristic information to a location outside of said ruminant animal; iv) an antenna which transmits said radio frequency signal and receives a second radio frequency signal; and v) a battery which supplies power to said animal monitoring device; and c) a first magnet having a location inside said inert bolus body, wherein said first magnet has a pair of opposed faces defining

a north pole and a south pole, said south pole disposed in inward facing relation to said animal monitoring device, said north pole disposed in outward facing relation to said animal monitoring device.

In still another aspect, there is provided an animal monitoring system, comprising: a) an inert bolus body adapted to allow oral administration to a ruminant animal; b) an animal monitoring device located inside said inert bolus body, including: i) at least one sensor capable of generating a signal which varies in relation to change in a sensed animal characteristic; ii) a sensor signal encoder which encodes said signal generated by said sensor as encoded sensed animal characteristic information; iii) a radio frequency signal generator which generates a first radio frequency signal capable of carrying said encoded sensed animal characteristic information; iv) a power source which supplies power to said animal monitoring device; v) a radio frequency signal receiver capable of receiving a second radio frequency signal generated by a second radio frequency generator having a location outside of said ruminant animal; vi) a microcontroller having a programmable module operable to control one or more of said sensor signal encoder, said animal identification information encoder, and said radio frequency signal generator, said microcontroller capable of processing said second radio frequency signal to alter said programmable module; and vii) an antenna that transmits said radio frequency signal and receives said second radio frequency signal.

In still another aspect, there is provided a method of monitoring an animal, comprising: a) orally administering to a ruminant animal a monitoring device and a first magnet contained inside of an inert bolus body, said animal monitoring device including: i) at least one sensor capable of generating a signal which varies in relation to change in a sensed animal characteristic; ii) a sensor signal encoder which encodes said signal generated by said sensor as encoded sensed animal characteristic information; iii) a radio frequency signal generator which generates a first radio frequency signal capable of carrying said encoded sensed animal characteristic information; iv) a power source which supplies power to said animal monitoring device; v) a radio frequency signal receiver capable of receiving a second radio frequency signal generated by a second radio frequency generator having a location outside of said ruminant animal; and vi) an antenna that transmits said radio frequency signal and receives said second radio frequency signal, wherein the inert bolus further comprises a first magnet having a location inside said inert bolus body, wherein

said first magnet has a pair of opposed faces defining a north pole and a south pole, said south pole disposed in inward facing relation to said animal monitoring device, said north pole disposed in outward facing relation to said animal monitoring device.

5 In still another aspect, there is provided a method of producing an animal monitoring system, comprising the steps of: a) providing an inert bolus body adapted to allow oral administration to a ruminant animal; b) locating an animal monitoring device inside of said inert bolus body, said animal monitoring device, including: at least one sensor capable of generating a signal which varies in relation to change in a sensed animal characteristic; a sensor signal encoder which encodes said signal generated by said sensor as encoded sensed animal characteristic
10 information; a radio frequency signal generator which generates a first radio frequency signal capable of carrying said encoded sensed animal characteristic information; a power source which supplies power to said animal monitoring device; a radio frequency signal receiver capable of receiving a second radio frequency signal generated by a second radio frequency generator having a location outside of said ruminant animal; a microcontroller having a programmable module
15 operable to control one or more of said sensor signal encoder, said animal identification information encoder, and said radio frequency signal generator, said microcontroller capable of processing said second radio frequency signal to alter said programmable module; and an antenna which transmits said radio frequency signal and receives said second radio frequency signal.

In still another aspect, there is provided a method of monitoring an animal, comprising: a)
20 orally administering to a ruminant animal a monitoring device contained inside of an inert bolus body; b) generating with a sensor in said animal monitoring device a signal that varies in relation to change in a sensed animal characteristic; c) encoding in said signal generated by said sensor encoded sensed animal characteristic information; d) generating a radio frequency signal carrying said encoded sensed animal characteristic information; e) detuning a frequency of the radio
25 frequency signal to compensate for demodulation of said radio frequency signal passing through the mass of said ruminant animal; f) transmitting the radio frequency signal carrying said encoded sensed animal characteristic information from the interior of the ruminant animal; and g) accessing transmitted encoded sensed animal characteristic information carried by said radio frequency signal.

In still another aspect, there is provided an animal monitoring system, comprising: a) an inert bolus body adapted to allow oral administration to a ruminant animal; b) an animal monitoring device having a location inside said inert bolus body, including: i) at least one sensor which generates a signal which varies in relation to change in a sensed animal characteristic; ii) a sensor signal encoder which encodes said signal generated by said at least one sensor as encoded sensed animal characteristic information; iii) a radio frequency signal generator which generates a radio frequency signal capable of carrying said encoded sensed animal characteristic information; iv) an antenna which transmits said radio frequency signal; and v) a power source which supplies power to said animal monitoring device; and c) a first magnet having a location inside said inert bolus body.

In still another aspect, there is provided a method of producing an animal monitoring system, comprising the steps of: a) providing an inert bolus body adapted to allow oral administration to a ruminant animal; b) locating an animal monitoring device inside of said inert bolus body, said animal monitoring device including: i) at least one sensor capable of generating a signal which varies in relation to change in a sensed animal characteristic; ii) a sensor signal encoder which encodes said signal generated by said sensor as encoded sensed animal characteristic information; iii) a radio frequency signal generator which generates a radio frequency signal capable of carrying said encoded sensed animal characteristic information; iv) a power source which supplies power to said animal monitoring device; and v) an antenna which transmits said radio frequency signal; and c) locating a first magnet inside of said inert bolus body.

In still another aspect, there is provided a method of monitoring an animal, comprising the steps of: a) orally administering to a ruminant animal a monitoring device and a first magnet contained inside of an inert bolus body, said animal monitoring device including: i) at least one sensor capable of generating a signal which varies in relation to change in a sensed animal characteristic; ii) a signal encoder which encodes said signal generated by said sensor as encoded sensed animal characteristic information; iii) a radio frequency signal generator which generates a radio frequency signal capable of carrying said encoded sensed animal characteristic information; iv) a power source which supplies power to said animal monitoring device; and v) an antenna capable of transmitting said radio frequency signal carrying said encoded sensed animal

characteristic information; and b) accessing said encoded sensed animal characteristic information carried by said radio frequency signal.

Naturally further aspects of objects of the invention are disclosed throughout the detailed description of the preferred embodiments of the invention and the figures.

5 IV. BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is diagram which shows a particular method of using an embodiment of the animal monitoring system.

Figure 2 is a block diagram which shows a particular embodiment of a specialized computer in relation to a particular embodiment of a radio frequency reader and bolus.

10 Figure 3 is a block diagram which shows a particular embodiment of a radio frequency reader.

Figure 4 is an exploded view of a particular embodiment of the bolus.

Figure 5 is an exploded view of another particular embodiment of the bolus.

Figure 6 is block diagram of a particular embodiment of the animal monitoring device
15 which can be contained in a various embodiments of the bolus.

Figure 7 is a bar graph which compares strength of radio frequency transmission against orientation of magnetic field of a first magnet contained in bolus.

5 Figure 8 is a bar graph which compares strength of radio frequency transmission against orientation of magnetic field of a first magnet contained in the bolus when magnetically coupled to a second magnet outside of the bolus.

10 Figure 9 is a bar graph which compares strength of radio frequency transmission with the first magnet contained in the bolus oriented to provide greatest strength of radio frequency transmission as compared to strength of radio frequency transmission with the first magnet contained in the bolus oriented to provide greatest strength of radio frequency transmission with a second magnet outside of the bolus magnetically coupled to the first magnet.

15 V. MODE(S) FOR CARRYING OUT THE INVENTION

Now referring primarily to Figures 1 and 2, which illustrates a general computer implemented method of using an animal monitoring system (1) to monitor one or more sensed physiological and non-physiological parameters (“animal characteristics (2)”) of an animal (3).
 20 A bolus (4) can be orally administered to reside in a reticulum (5) of the animal (3)(although the bolus (4) can be implanted in the animal (3) to reside at other locations). The bolus (4) can include an animal monitoring device (6)(see for example Figures 4 and 5) including one more sensors (9) which can sense animal characteristics (2). A microcontroller (7) having one or more processors (8) continually or intermittently transform analog or digital signals from the
 25 one or more sensors (9) to generate encoded sensed animal characteristic information (10). The encoded sensed characteristic information (10) varies in relation to monitored change in the sensed animal characteristics (2). The animal monitoring device (6) can further generate encoded animal identification information (11) associated the individual monitored animal (3). The animal monitoring device (6) can further operate to generate and transmit a radio
 30 frequency signal (12) (also referred to as an “RF signal”) which can carry encoded animal identification information (11) and encoded sensed animal characteristic information (10).

Again referring primarily to Figures 1 and 2, one or more radio frequency reader(s)(13) can be located to receive the radiofrequency signal (12) carrying the encoded animal

identification information (11) and the encoded sensed animal characteristic information (10). As to particular embodiments, the one or more radiofrequency readers (13) can further operate to decode the received radiofrequency signal (12) and generate one or more bit segments (14) representing the encoded animal identification information (11) and representing the encoded sensed animal characteristic information (10)(see for example Figure 3). As to particular
5 embodiments, the one or more radio frequency readers (13) can further operate to assemble the bit segments (14) into a data packet (15) which can be transmitted and received by a wired or wireless reception device (16). The reception device (16) can transfer the data packet (15) to a specialized computer (17) for transforming the bit segments (14) to output an animal
10 identification value (18) and to output a sensed animal characteristic value (19). A computer user (20) can access the sensed animal characteristic value (19) associated with the animal identification value (18)(along with other information encoded by the animal monitoring device (6) or the radio frequency reader (13) or a remote second computer (21)) by use of a specialized computer (17).

15

Now referring primarily to Figure 2, the specialized computer (17) configured to allow access by the computer user (20) of the sensed animal characteristic values (19) associated with the animal identification value (18) is described herein in terms of functional block components, screen shots, and various process steps. It should be appreciated that such
20 functional blocks may be realized by any number of hardware or software components configured to perform the specified functions. For example, the computer implemented animal management system (1) may employ various integrated circuit components which function without limitation as: memory elements, radio frequency signal modulators, processing elements, logic elements, look-up tables, or the like, which may carry out a variety of
25 functions under the control of one or more microprocessors or other control devices.

Similarly, the software elements of the present invention may be implemented with any programming or scripting language such as C, C++, Java, COBOL, assembler, PERL, Labview or any graphical user interface programming language, extensible markup language
30 (XML), Microsoft's Visual Studio .NET, Visual Basic, or the like, with the various algorithms or Boolean Logic being implemented with any combination of data structures, objects, processes, routines or other programming elements. Further, it should be noted that the present invention might employ any number of conventional wired or wireless techniques for data transmission, signaling, data processing, network control, and the like.

It should be appreciated that the particular computer implementations shown and described herein are illustrative of the invention and its best mode and are not intended to otherwise limit the scope of the present invention in any way. Indeed, for the sake of brevity, conventional data networking, application development and other functional aspects of the systems (and components of the individual operating components of the systems) may not be described in detail herein. Furthermore, the connecting lines shown in the various figures contained herein are intended to represent exemplary functional relationships and/or physical couplings between the various elements. It should be noted that many alternative or additional functional relationships or physical connections may be present in a practical animal monitoring system (1).

As will be appreciated by one of ordinary skill in the art, the present invention may be embodied in the alternative as a method, a data processing system, a device for data processing, a computer program product, or the like. Accordingly, the present invention may take the form of an entirely software embodiment, an entirely hardware embodiment, or an embodiment combining aspects of both software and hardware. Furthermore, the present invention may take the form of a computer program product on a computer-readable storage medium having computer-readable program code means embodied in the storage medium. Any suitable computer-readable storage medium may be utilized, including hard disks, CD-ROM, optical storage devices, magnetic storage devices, ROM, flash RAM, or the like.

The present invention may be described herein with reference to screen shots, block diagrams and flowchart illustrations of the data encoder-decoder system to describe computer programs, applications, or modules which can be utilized separately or in combination in accordance with various aspects or embodiments of the invention. It will be understood that each functional block of the block diagrams and the flowchart illustrations, and combinations of functional blocks in the block diagrams and flowchart illustrations, respectively, can be implemented by computer program instructions. These computer program instructions may be loaded onto a general purpose computer, special purpose computer or other programmable data processing apparatus to produce a machine, such that the instructions which execute on the computer or other programmable data processing apparatus for implementing the functions specified in the flowchart block or blocks.

These computer program instructions may also be stored in a computer-readable memory that can direct a computer or other programmable data processing apparatus to function in a particular manner, such that the instructions stored in the computer-readable memory produce an article of manufacture including instruction means which implement the function specified in the flowchart block or blocks. The computer program instructions may also be loaded onto a computer or other programmable data processing apparatus to cause a series of operational steps to be performed on the computer or other programmable apparatus to produce a computer-implemented process such that the instructions which execute on the computer or other programmable apparatus provide steps for implementing the functions specified in the flowchart block or blocks.

Accordingly, functional blocks of the block diagrams and flowchart illustrations support combinations of means for performing the specified functions, combinations of steps for performing the specified functions, and program instruction means for performing the specified functions. It will also be understood that each functional block of the block diagrams and flowchart illustrations, and combinations of functional blocks in the block diagrams and flowchart illustrations, can be implemented by either special purpose hardware based computer systems which perform the specified functions or steps, or suitable combinations of special purpose hardware and computer instructions.

Again referring to Figure 2, the computer implemented animal monitoring system (1) can include a specialized computer (17) for receiving, processing and transforming signals from a reception device (16) to generate animal identification values (18) and sensed animal characteristic values (17) accessible by the computer user (20)). The specialized computer (17) can include at least one processing unit (22), a memory element (23), and a bus (24) which operably couples components of the computer (17), including, without limitation the memory element (23) to the processing unit (22). The computer (17) may be a conventional computer, a distributed computer, or any other type of computer which may contain all or a part of the elements described or shown to accomplish the functions described herein; the invention is not so limited. The processing unit (22) can comprise without limitation one central-processing unit (CPU), or a plurality of processing units which operate in parallel to process digital information, or a digital signal processor (DSP) plus a host processor, or the like. The bus (24) can be without limitation any of several types of bus configurations such as a memory bus or memory controller, a peripheral bus, and a local bus using any of a variety of bus

architectures. The memory element (23) can without limitation be a read only memory (ROM)(25) or a random access memory (RAM)(26), or both. A basic input/output system (BIOS)(27) containing routines that assist transfer of data between the components of the specialized computer (17), for example during start-up, can be stored in ROM (25). The computer (17) can further include a hard disk drive (28) for reading from and writing to a hard disk (not shown), a magnetic disk drive (29) for reading from or writing to a removable magnetic disk (30), and an optical disk drive (31) for reading from or writing to a removable optical disk (32) such as a CD ROM or other optical media.

The hard disk drive (28), magnetic disk drive (29), and optical disk drive (31) and the reception device (16) can be connected to the bus (24) by a hard disk drive interface (33), a magnetic disk drive interface (34), and an optical disk drive interface (35), and a reception device interface (36), respectively. The drives and their associated computer-readable media provide nonvolatile storage of computer-readable instructions, data structures, program modules and other data for the computer (17). It can be appreciated by those skilled in the art that any type of computer-readable media that can store data that is accessible by a computer, such as magnetic cassettes, flash memory cards, digital video disks, Bernoulli cartridges, random access memories (RAMs), read only memories (ROMs), RFID devices or the like, may be used in the exemplary operating environment.

The computer (17) can further include an operating system (37) and an animal monitoring program (38)(AMP) which as to particular embodiments of the invention can include an animal monitoring device encoder-decoder module (39)(AMD encoder-decoder module) for programming animal identification values (18) to the animal monitoring device (AMD)(6) using an animal monitoring device programmer (40) connected to the bus (24) by an AMD interface (41). The AMD encoder-decoder module can be stored on or in the hard disk, magnetic disk (30), optical disk (32), ROM (25), in RAM (26) the specialized computer (17) or alternately the functionalities of the AMD encoder-decoder module (39) may be implemented as an application specific integrated chip (ASIC) or field programmable gate array (FPGA), or the like.

The computer user (20) can enter commands and information into the computer (17) through input devices such as a keyboard (42) and a pointing device (43) such as a mouse. Other input devices (not shown) may include a microphone, joystick, game pad, satellite dish,

scanner, magnetic strip of a card, or the like. These and other input devices are often connected to the processing unit (22) through a serial port interface (44) that can be coupled to the bus (24), but may be connected by other interfaces, such as a parallel port, game port, or a universal serial bus (USB). A monitor (45) or other type of display device can also be
5 connected to the bus (24) via interfaces such as a video adapter (46), or the like. In addition to the monitor (45), the computer (17) can further include a peripheral output device (51), such as speakers and printers.

A “click event” occurs when the computer user (20) operates at least one function of
10 the AMP (38) or the animal monitoring device encoder-decoder module (39), or other program or other application function, through an action or the use of a command which for example can include pressing or releasing a left mouse button (47) while a pointer element (48) is located over a control icon (49) displayed on the monitor (45). However, it is not intended that a “click event” be limited to the press and release of the left mouse button (46) while a pointer
15 element (45) is located over a control icon (49). Rather, the term “click event” is intend to broadly encompass any action or command by the computer user (20) through which a function of the operating system (37) or animal monitoring program (38), animal monitoring device encoder-decoder module (39), or other program or application is activated or performed, whether through clickable selection of one or a plurality of control icon(s) (49) or
20 by computer user (20) voice command, keyboard stroke(s), mouse button, touch screen, touch pad, or otherwise. It is further intended that control icons (49) can be configured without limitation as a point, a circle, a triangle, a square (or other geometric configurations or combinations or permutations thereof), or as a check box, a drop down list, a menu, or other index containing a plurality of selectable options, an information field which can contain or
25 which allows input of a string of alphanumeric characters such as a street address, zip code, county code, or natural area code, animal identification number or by inputting a latitude/longitude or projected coordinate X and Y, animal pen number, or other notation, script, character, or the like.

30 The computer (17) may operate in a networked environment using logical connections (50) to one or a plurality of remote second computers (21). These logical connections (50) can be achieved by a communication device (52) coupled to or a part of the computer (17). Each of the plurality of remote computers (51) can include a part or all of the elements as included in the specialized computer (17) although only a single box has been illustrated in Figure 2 for

the remote second computer (51). The logical connections (50) depicted in Figure 2 can establish a local-area network (LAN) or a wide-area network (WAN). Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets and the Internet (53).

5

When used in a LAN-networking environment, the computer (17) can be connected to the local network through a network interface (54). When used in a WAN-networking environment, the computer (17) typically includes a modem (55), or other type of communications device, for establishing communications over the wide area network, such as the Internet (53). The modem (55), which may be internal or external to the specialized computer (17), can be connected to the bus (24) via the serial port interface (44). In a networked environment, the animal monitoring program (38), or portions thereof, may be stored in any one or more of the plurality of remote second computers (51). It is appreciated that the logical connections (50) shown are exemplary and other hardware means and communications means can be utilized for establishing a communications link between the specialized computer (17) and one or more of the a plurality of remote second computers (21).

While the computer means and the network means shown in Figure 2 can be utilized to practice the invention including the best mode, it is not intended that the description of the best mode of the invention or any preferred embodiment of the invention be limiting with respect to the utilization of a wide variety of similar, different, or equivalent computer means or network means to practice embodiments of the invention which include without limitation hand-held devices, such as personal digital assistants or camera/cell phone, multiprocessor systems, microprocessor-based or programmable consumer electronics, network PCs, minicomputers, mainframe computers, PLCs, or the like.

Now referring primarily to Figures 1 and 3, the animal monitoring system (1) can further include one or more radio frequency readers (13)(RF readers). The RF reader (13) can receive a radio-frequency signal (12) from an AMD (6) within a bolus (4) implanted in, retained by, or held in the reticulum (5) of an animal (3). The AMD (6) within the bolus (4) can send encoded animal identification information (10) and the encoded sensed animal characteristic information (2) using the radio-frequency signal (12), as above described.

One non-limiting embodiment of the RF reader (13) as shown in Figures 1 and 3,

provides a reader microcontroller (56) which includes a reader processor (57) which controls the functions of a variety of reader processor elements (58) stored in a reader memory element (59) each of which provides a response to events related to receiving the radio-frequency signal (12) from the AMD (6) within the bolus (4) carrying encoded animal identification information (11) and sensed animal characteristic information (10), or receiving reader sensor signals (60) from reader sensors (61) which monitor environmental parameters proximate the RF reader (13) such as ambient temperature; or generating data packets (15) which include all or parts of such information, or sending data packets (15) to the computer (17) or a remote second computer (21) for access by a computer user (20). A reader microcontroller (56) suitable for use with embodiments of the RF reader (13) can be obtained from Microchip Technology, Inc., 2355 West Chandler Blvd., Chandler, Arizona, Part No. PIC18F4620-I/PT, or similar or equivalent components can be suitable as a reader microcontroller (56) programmable to perform the above-described functions of the RF reader (13).

Again referring primarily to Figure 3, a reader antenna (62) can receive encoded animal identification information (10) and encoded sensed animal characteristic information (11) and other information generated by operation of the AMD (6) within the bolus (4) within an animal (3). The reader antenna (62) can be tuned to the radio-frequency signal (12) generated by the AMD (6) by a reader matching network element (63). A reader receiver (64)(or transceiver) can be controlled by a first reader processor element (65) to convert the radio-frequency signal (12) received by the reader antenna (62) from analog to digital baseband signals.

Again referring primarily to Figure 3, the reader sensor (61) can take the form of an ambient temperature sensor (66) which can be located to sense the ambient temperature (67) surrounding the RF reader (13). The ambient temperature sensor (66) can take the form of a thermistor. A suitable thermistor for use in embodiments of the RF reader (13) is available from Microchip Technology, Inc., 2355 West Chandler Blvd., Chandler, Arizona, Part No. MCP98242, and similar and equivalent parts. The ambient temperature sensor (66) can be operated under the control a second reader processor (68) which functions to regulate power to the ambient temperature sensor (66) and converts the reader sensor signal (60) from the ambient temperature sensor (66) into a digital representation of the ambient temperature (67). The second reader processor (68) can further function to encode or re-encode from time to

time an amount of reader temperature calibration data (70) which allows calculation and output of an ambient temperature value (71).

Again referring primarily to Figure 3, a clock element (72) can operate under the control of a third reader processor element (73) which functions to generate a date and time signal (74) that represents a date and time value (75).

Again referring primarily to Figure 3, a fourth reader processor element (76) can function to assemble data packets (15) which include a representation of, the ambient temperature value (71) and the date and time value (75) at which the information from the AMD (6) was received by the RF reader (13). The assembled data packet (15) can be stored and retrieved from the reader memory element (59) under the control of the fourth reader processor element (76).

Again referring primarily to Figure 3, a fifth reader processor element (77) can function to provide an ether net interface (78) for an ether net controller (79) to receive requests from the computer (17)(or remote computer (21) and retrieve from the reader memory element (59) one or more data packets (15) containing information relating to one or a plurality of animals (3) which entrain a bolus (4) with an AMD (6). The fifth reader processor element (77) can further function to send the retrieved data packets (15) to the ether net controller (79) for transmission to the computer (17).

Now referring primarily to Figures 4 through 6, embodiments of the animal monitoring system (1) can include an inert bolus (4) orally administrable to an animal (or implantable in an animal) (3) containing the AMD (6) which includes one or more of a microcontroller (7), one or more processors (8), at least one sensor (9), and a radio frequency generator (81) including one or more of an oscillator (80), a radio frequency stabilizer (82), an antenna (83), and a power source (84) which operate to generate the radio frequency signal (12). Depending on the embodiment, a first magnet (85)(see example shown in Figure 5) or a pair of magnets (94)(see example shown in Figure 4) can be further included in the inert bolus (4). Certain configurations of the bolus (4) can be orally administered to ruminant animals (3), such as cows, deer, and sheep, and be retained in a part of the stomach, such as the reticulum (5), as shown in Figure 1; although the invention is not so limited, and certain embodiments of the bolus (4) can be implanted or be otherwise affixed to an animal (3).

Embodiments of the bolus (4) which are orally administered to an animal (3) can provide an inert bolus body (86) having external dimensional relations adapted to allow oral administration and retention of the bolus (4) in a part of the stomach, such as the reticulum (5) of a particular species of animal (3). As one non-limiting example, the inert bolus body (86) can include an amount of cured plastic resin (87) cast about the animal monitoring device (6) and as to particular embodiments about the pair of magnets (94) or the first magnet (85) along with any spacers. The amount of cured plastic resin (87) can for example comprise a plastic resin such as urethane resin, epoxy resin, polyester resin, or the like used in accordance with the manufacturer's instructions. As to other embodiments, the inert bolus body (86) can comprise a sealable container (88) which defines a hollow inside space (89) which receives said animal monitoring device (6) and said first magnet (85). As to other embodiments, the sealable container having the animal monitoring device (6) received in the hollow space (89)(and as to particular embodiments further including the first magnet (85) received in the hollow space) can have the amount of plastic resin (87) cast about the animal monitoring device (6) and the first magnet (85) located within said sealable container (88).

As one illustrative example, a bolus (4) suitable for oral administration to an animal (3) can be generally cylindrical with a diameter in perpendicular cross section in the range of about one-half inch to about one inch and having a length disposed between a first bolus end (90) and a second bolus end (91) in the range of about two inches and about five inches. Particular embodiments of the bolus (4) can have a length of about three and one-half inches and a diameter in perpendicular cross section of about three-quarters of an inch. While the Figures show the bolus (4) in the constructional form of a cylinder with end caps; the invention is not so limited, and the bolus (4) can have numerous and varied external surface configurations which allow oral administration and retention within the reticulum (5)(or other part of the digestive tract) of an animal (3). Typically, retention of the bolus (4) in a part of a stomach or retention by way of implant will be for all or a substantial portion of the life of the animal (3). The inert bolus body (86) can be molded, cast, or machined from biocompatible (or biologically inert) non-magnetic materials which allow transmission of the radio frequency signal (12) from within the bolus (4) to outside of the animal (3). As examples, the inert bolus body can be made from plastics such as nylon, fluorocarbon, polypropylene, polycarbonate, urethane, epoxy, polyethylene, or the like; or metals such as stainless steel; or other materials such as glass can be utilized.

The hollow inside space (89) inside of the inert bolus body (86) can be of sufficient volume to house one or more of the microcontroller (7), the sensor (9), the oscillator (80) the radio frequency stabilizer (82), the antenna (83) and the power source (84) along with the associated circuitry. Now referring primarily to Figure 4, as to certain embodiments of the bolus body (86), the hollow inside space (89) can have sufficient volume to further house non-conductive insulators (92), and non-conductive spacers (93) to establish a particular distance between a pair of magnets (94), while as to embodiments of the invention similar to that shown in Figure 5, the hollow inside space (89) can have sufficient volume to further house a first magnet (85). As to embodiments of the bolus (4) as shown in Figures 4 and 5 or similar embodiments, the hollow inside space (89) can be configured as a cylindrical volume having a diameter of about three-eighths of an inch and about five-eighths inch and a length disposed between the first bolus end (90) and the second bolus end (91) of between about two inches and about four inches. A particular non-limiting embodiment of the hollow inside space (89) can be about one-half inch in diameter and having a length of about three inches.

As to those embodiments of the bolus (4) including a sealable container (88), as above described, the sealable container (88) can further provide at least one end cap (95) removably sealable with a first bolus end (90) or a second bolus end (91) or both ends (90)(91) of the bolus (4) to allow access to the hollow inside space (89) for location of the various components of the animal monitoring device (6). As to certain embodiments of the invention, the bolus (4) can take the form of a closed end tube having one end cap (95) or a cylindrical tube having an end cap (95) fitted to each of the first bolus end (90) and the second bolus end (92). The end cap(s) (95) can also take the form of a plug sealably inserted into one or both ends of the sealable container (88), as shown in Figures 4 and 5. Alternately, the end cap (95) and the bolus (4) can provide rotatably matable spiral threads. Additionally, the end cap (95) can take the form of a permanent seal to one or both ends of the sealable container (88) of the bolus (4) such as a castable polymer which cures to seal one or both ends of the bolus (4). The bolus (4) can also take the form of matable halves (whether longitudinal or latitudinal) which can avoid the use of end caps (95).

The bolus (4) having a hollow inside space (89) can be generated by a wide variety of procedures such as molding, casting, fabrication or the like. As one non-limiting example, a cylindrical tube having an external diameter and an internal diameter, as above described, can

be divided into sections of suitable length to which the end caps can be fitted. Alternately, a bore can be made in a cylindrical solid rod having an external diameter, as above described, to provide a closed end tube with the bore having sufficient dimension to provide the hollow inside space (89). An end cap (95) or seal can be fitted to the open end of the closed end tube.

5

Now referring primarily to Figures 4 through 6, a printed circuit board (96) can be utilized to mechanically support and electrically connect the microcontroller (7), the sensor (9), the oscillator (80), the radio frequency stabilizer (82), and the antenna (83). The printed circuit board (96) can be configured as a disk having a circular boundary (97) and a thickness
10 disposed between two generally planar surfaces (98)(99). The disk shaped printed circuit board (96) can be disposed with the planar surfaces (98)(99) in substantially perpendicular relation to a longitudinal axis (100) of the hollow inside space (89) when configured as a cylindrical volume, as shown in Figures 4 or 5; however, the invention is not so limited, and the components can be mounted on any suitable supporting surface in any configuration or
15 arrangement which allows the components to function as further described below.

Again referring primarily to Figure 6, which provides a block diagram which represents the various integrated circuit components of the animal monitoring device (6) which function as processing elements, memory elements, logic elements, look-up tables, or the like,
20 to carry out a variety of functions under the control of one or more microprocessors or other control devices, as further described below. In the particular embodiments of the invention shown in Figures 4 through 6, the microcontroller (7) can take the form of a small computer on one or more integrated circuits having one or more processors (8) which control the functions of a variety of processing elements (101) stored in a programmable memory element
25 (102) each of which provides a response to events related to the surveillance, identification, and measurement of values in relation to an individual animal (3) or other object. A microcontroller (7) as available from Microchip Technology, Inc., 2355 West Chandler Blvd., Chandler, Arizona, Part Nos. PIC18LF14K22 or PIC18LF15K22, or similar or equivalent components, can be suitable for use with embodiments of the animal monitoring device (6).

30

A first processor element (103) can function to encode and continuously or intermittently output an amount of encoded animal identification information (11) which can represent a an animal identification value (18) such bolus identification number (104), an

animal identification value (105), or other value which associates information received from a bolus (4) to a particular animal (3) or object.

5 A second processor element (106) can function to intermittently encode and output an amount of encoded sensed animal characteristic information (10) representing a sensed animal characteristic (2) of an animal (3) or object. For the purposes of this invention, an animal characteristic (2) of an animal (3) or object can include any one or more of a physiological characteristics of the animal (3) such as temperature, pH, heart rate, blood pressure, partial pressures of dissolved gases, or the like; or a non-physiological parameter such as animal
10 location, animal tilt, humidity, or the like. The second processor element (106) can in part function to receive analog signals or digital signals from a sensor (9) configured to sense a particular animal characteristic (2). As a non-limiting examples, the sensor (9)(or sensors) can be an omnidirectional tilt and vibration Sensor (PN SQ-SEN-200) distributed by Signal Quest Precision Microsensors; a betachip thermistor (PN 1K2OG3) distributed by BetaTHERM
15 Sensors; a humidity sensor (PN HCZ-D5) distributed by Ghitron Technology CO., Ltd; an ultra miniature pressure transducer (PN COQ-062) distributed by Kulite, a proximity sensor (PN PY3-AN-3) distributed by Automation Direct.com.

Variation of the sensed animal characteristic(s)(2) can be continuously or intermittently
20 updated by encoding or re-encoding the a digital representation of the signal generated by the sensor (9). The second processor element (106) can further function to encoded or re-encoded from time to time an amount of calibration data (128) which allows calculation and output of a sensed animal characteristic value (19) of the animal (3). As to the particular embodiment of the invention shown in Figures 4 and 5, the second processor element (106) can receive and
25 encode signals received from a thermistor (a type of resistor whose resistance varies with change in temperature). A suitable thermistor for use in embodiment of the invention is available from Microchip Technology, Inc., 2355 West Chandler Blvd., Chandler, Arizona, Part No. MCP98242, and similar and equivalent parts.

30 A third processor element (107) functions to control the oscillator (80) to generate a stable radio frequency signal (12). An oscillator (80) suitable for use with the invention is available from Freescale Semiconductor, Part No. MC1319x, MC1320x, MC1321x, and MC1322x, and similar or equivalent parts. The third processor element (107) can further function to control a radio frequency stabilizer (82) which functions to offset oscillator (80)

wave flux caused by changes in temperature or power to the oscillator (80). A frequency stabilizer (82) suitable for use with the invention is available from Hope Microelectronics Co., Ltd, Part No. HF433E, RF Monolithics, Inc., Part No. RF1172C, and similar or equivalent parts. In regard to the particular embodiment of the invention shown in Figures 4 and 5, the oscillator (80) and frequency stabilizer (82) can generate a radio frequency signal (12) stable between about 410MHz and about 440MHz. A particular embodiment of the invention generates a radio frequency signal (12) of about 433MHz to be received by the RF reader (13).

A fourth processor element (108) functions to control a network frequency match element (109). The network frequency match element (109) can include capacitors and resistors in combination to deliver a particular radio frequency signal (12) under the conditions of the method utilized (for example the method above described) to the antenna (83). As a non-limiting example, the network frequency match element (109) can detune a 433 MHz radio frequency signal (12) to generate a signal of between about 418-425 MHz. The detuned signal can compensate for demodulation of the radio frequency signal (12) due to interaction with the mass of animal (3). The degree of demodulation can be substantially consistent and repeatable from animal (3) to animal (3). Accordingly, the network frequency match element (109) can be configured to compensate for the signal demodulation due to the mass of the animal (3) such that the radio frequency signal (12) transmitted outside of the mass of the animal (3) can be at about 433 MHz (or other selected frequency).

As to particular embodiments, the antenna (83) can be imprinted on the printed circuit board (96) proximate the circular boundary (97) to provide an antenna (83) of generally partial circular configuration having a length of about 37 millimeters and a width of about 1 millimeter (see for example Figures 4 and 5). The antenna (83) operates to transmit the radio frequency signal (12) at the wavelengths above described. An advantage of this configuration of antenna (83) can be that it does not require winding upon or interaction with the magnetic field (110) of the first magnet (85) or one or both of a pair of magnets (95)(or any magnet) to transmit a radio frequency signal (12). Accordingly, this configuration of antenna (83) can provide a lesser amount of interference from the magnetic field (110) of the one or more magnets (85)(95) contained in the bolus (4) resulting a lower incidence of loss of the radio frequency signal (12), less modulation of the radio frequency signal (12) which results in a greater consistency (or lesser amount of lost data) in transmission of animal identification information (11) and sensed animal characteristic information (10).

Again referring to Figures 4 and 5, the bolus (4) can further include a power source (84) located within the hollow inside space (89). The power source (84) shown in Figures 4 and 5 takes the form of a battery (111) such as a AA battery, a AAA battery, or the like. The battery (111) can be inserted or stacked within the hollow inside space (89) proximate the printed circuit board (96). A non-conductive insulator (112) can be disposed between the printed circuit board (96) and the power source (84). The power source (84) provides power to the electronic components supported on the printed circuit board (96). A first battery lead (113) connects the positive battery terminal (109) of the printed circuit board (96) to the positive pole (114) of the battery (111) (or power source) and a second battery lead (115) connects the negative battery terminal (116) of the printed circuit board (96) to the negative pole (116) of the battery (111)(or power source).

Now referring primarily to Figure 4, in particular embodiments of the invention a first non-conductive spacer (117) can be disposed in the hollow inside space (89) of the bolus (4) adjacent to the printed circuit board (96) and a second non-conductive spacer (118) can be disposed in the hollow inside space (89) of the bolus (4) adjacent the battery (111). A first of the pair of magnets (95) can be disposed adjacent the first non-conductive spacer (117) and a second of the pair of magnets (95) can be disposed adjacent the second non-conductive spacer (118). The first of the pair of magnets (94) and the second of the pair of magnets (94) can be configured as magnetic disks or cylinders each having a pair of opposed circular faces disposed a distance apart by the thickness of the magnet. By providing a pair of magnets (94) disposed a distance apart, a first magnetic field (119) generated by the first of the pair of magnets (95) and a second magnetic field (120) generated by the second of the pair of magnets () can attractingly interact with metal objects (121), such as coins, washers, wire, nails, tacks, barbs from barbed wire, or the like, ingested by the animal (3) to magnetically engage these metal objects (121) with the external surface of the bolus (4) such that the metal objects (121) generally align with the longitudinal axis (100) of the bolus (4), for example, substantially the entire length of the metal object (121) can lie against the external surface of the bolus (4) as shown in Figure 4 as opposed to projecting outwardly from the external surface of the bolus (4). Depending upon the configuration of the external surface of the bolus (4), the size, power, and distance separating the first of the pair of magnets (94) and the second of the pair of magnet (95) can be adjusted to correspondingly adjust the interaction of the first magnetic field (119) and the second magnetic field (120) to act on metal objects (121), as above

described. For example, in the embodiment of the invention shown in Figure 4, either the particular configuration of the first of the pair of magnets (94) and the second of a pair of magnets (94)(dimensional relations and power) or the particular configuration of the first non-conductive spacer (117) and the second non-conductive spacer (118) can be adjusted to allow
5 metal objects (121) to interact with the external surface of the bolus (4). A second advantage of providing a pair of magnets (94) disposed a distance apart, can be that the printed circuit board (96) can be located between, and a sufficient distance from, either of the pair of magnets (94) to reduce interference with the transmission of the radio frequency signal (12).

10 Again referring primarily to Figure 4, the printed circuit board (96) supporting the electronic components, the non-conductive insulator (112), the non-conductive spacers (117)(118), and the pair of magnets (95) can be overwrapped with a non-conductive wrap element (122) to allow the several elements to moved as a single piece. As one non-limiting example, the non-conductive wrap element (122) can comprise a plastic tube shrinkable in
15 dimension by application of heat to conform the external surface of the components aligned as above described. Accordingly, the overwrapped elements can be inserted into the hollow inside space (89) as a single piece and the at least one end cap (95) can be sealably engaged with first bolus end (90) or second bolus end (91) of the bolus (4). The non-conductive wrap element (122) can have one or more apertures (123). An amount of plastic resin (87), as above
20 described, can flow through the one more apertures to be cast about the components of the animal monitoring device (6).

Now referring primarily to Figure 5, other embodiments of the invention can have a constructional as above described and shown in Figure 4 with the exception of the form and
25 placement of the pair of magnets (94). In the embodiment shown in Figure 5, the pair of magnets (94) and their corresponding magnetic fields (119)(120) along with the non-conductive spacers (117)(118) can be replaced by a first magnet (85) placed adjacent the animal monitoring device (6) and as to those embodiments having a non-conductive wrap element (122) located outside of the non-conductive wrap (122). The animal monitoring
30 device (6) along with the first magnet (85) can be located inside of the inert bolus body (86) whether within an amount of plastic resin (87) or within a sealable container (88)(whether or not the sealable container (88) is also filled with plastic resin (87). As to particular embodiments, the first magnet (85) can have a first and second opposed magnetic faces (123)(124) defining a south pole and a north pole, with the first magnetic face (123)(as to the

embodiment shown the south pole) disposed in inward facing relation to the animal monitoring device (6) and the second magnetic face (124)(as to the embodiment shown the north pole) disposed in outward facing relation to said animal monitoring device (6). As to certain preferred embodiments, the first magnet (85) can have a generally rectangular shape having four sides (125) defining the area of a first magnet face (123)(south pole) and the second magnet face (124)(north pole) disposed in substantially parallel opposed relation a distance apart with the first face (123)(south pole) disposed in inward facing relation to the animal monitoring device (6).

Now referring primary to Figure 7, a bar graph plots the strength of the radio frequency (12) against the orientation of the first magnet (85) in relation to the animal monitoring device (6) located within the inert bolus body (86)(as described for embodiments similar to that shown in Figure 5). Importantly, the orientation of the first magnet (85) in relation to the animal monitoring device (6) can result in a substantial difference in the strength of the received radio frequency signal (12) outside of the bolus (4). Placement of the first magnet (85) with the second magnetic face (124)(north pole) facing outward in relation to the animal monitoring device (6) (north pole designated as “north up” in Figure 7) increases the strength of the received radio frequency signal (12) from the animal monitoring device (6) outside of the bolus (4) as compared to having the first magnetic face (123)(south pole) facing outward in relation to the animal monitoring device (6)(south pole designated as “south up” in Figure 7). Depending upon the type and kind of the first magnet (85), the method in accordance with embodiments of the invention, defines the first magnetic face (123) as the magnetic face which in inward facing relation to the animal monitoring device (6) increases strength of the radio frequency signal (12) received at the radio frequency reader (13). The first magnetic face (123) may define the south pole as described; however, the invention is not so limited, and the first magnetic face (123) may also define the north pole of the first magnet (85), the method selecting the first magnetic face (123) as that face which in the inward facing relation to the animal monitoring device (6) produces the greater strength of radio signal frequency outside of the bolus (4).

Additionally, having placed the first magnetic face (123)(south pole) facing inwardly to increase strength of the received radio signal (12), the first magnet (85) can be rotated to through 180 degrees to find the orientation which further increases the strength of the radio frequency signal (12) outside of the bolus (4). As shown by Figure 7, the first magnetic (85)

having the first magnetic face (123)(south pole) facing inwardly in relation to the animal monitoring device (6) and the elongate body of the first magnet (85) substantially aligned with the longitudinal axis (100) of the animal monitoring device (6) is oriented at zero degrees of rotation in relation to the longitudinal axis (100) (as shown in Figure 5). As to this
5 embodiment of the invention, this orientation can produce a substantially increased strength of received radio signal frequency (12) outside of the bolus (4) as compared to having the opposed ends (126)(127) oriented at 180 degrees of rotation in relation to the longitudinal axis (100)(not shown).

10 Now referring primarily, to Figure 8, embodiments of the invention can further include a second magnet (130) having a location outside of the bolus (4). The second magnet (130) can be orally administered to an animal (3) in similar fashion to the bolus (4). The second magnet (130) can comprise a conventional magnet orally administered to animals (3) to magnetically capture metal objects (121) within the rumen of the animal (3). Particular
15 embodiments of the second magnet (127) can have dimensional relations the same or similar to the first magnet (85) located inside the inert bolus body (86). Interestingly, as shown in Figure 8, magnetic coupling of the second magnet (130) to the first magnet (85) within the bolus (4) can increase the strength of the radio frequency signal (12) outside of the bolus (4), regardless of orientation of the first magnet (85) within the bolus (4), even though the first
20 magnet face (123)(south pole) inwardly facing and in zero degree relation to the longitudinal axis (100) of the animal monitoring device (6) already had the greatest strength of radio frequency signal (12) outside of the bolus (4)(shown as “north up” in Figure 7).

The results set out in the example shown by Figures 7 and 8, was achieved by
25 submerging the bolus (4) of the embodiment shown in Figure 5, and as above described, in an amount of saline solution prepared by dissolving about 27 grams of sodium chloride per liter of water. The bolus (4) submerged in the saline solution was placed about 25 feet from the RF reader (13) to approximate receiving a signal from a bolus (4) within the rumen of a ruminant animal (3) at 75 feet. The bolus (4) between trials was unaltered, except for the orientation of
30 the first magnet (85) in relation to the animal monitoring device (6) contained inside the inert bolus body (86). The first magnet (85) was disposed in a first trial with the north face facing outwardly from the animal monitoring device, and in a second trial with the south face facing outwardly from the animal monitoring device (6). The designation of the first magnetic face (123) of the first magnet (85) was defined by the magnetic face which facing inwardly

generates the greatest radio frequency signal (12) received by the RF reader (13). Accordingly, as to the particular embodiment of the invention shown in Figure 5, the south face of the first magnetic (85) faces inwardly toward the animal monitoring device (6) and defines the first magnetic face (123), while the north pole of the first magnet (85) faces outwardly in relation to the animal monitoring device (6) and defines the second magnetic face (124). The first face (123) being defined by the south pole of the first magnet (85), a third trial was conducted in which the first magnet (85) was rotated 180 degrees in relation to the longitudinal axis (100) of the animal monitoring device (6) in reversed relation to the zero degree position. The strength of the radio frequency signal (12) received by the RF reader (13) was determined and the first magnet was placed in zero degree or 180 degree relation to the animal monitoring device (6). The results of the trials are set out in the bar graph shown in Figure 7.

The results set out in the example shown by Figure 8, were achieved by submerging the bolus (4) of the embodiment shown in Figure 5 and above described in an amount of saline solution prepared by dissolving about 27 grams of sodium chloride per liter of water. The bolus (4) submerged in the saline solution was placed about 25 feet from the RF reader (13) to approximate receiving a signal from a bolus (4) within the rumen of a ruminant animal (3). As to each trial shown in Figure 7, and described above, an additional trial was conducted by submerging a second magnet (127) in the saline solution in which the bolus (4) containing the first magnet (85) was submerged. In each trial, the second magnet (127) was allowed to magnetically couple the first magnet (85) and the strength of the radio frequency signal (12) was determined. The results being summarized in the bar graph shown in Figure 8. Interestingly, as shown by Figure 9, magnetic coupling of the second magnet (127) with the first magnet (85) increased the strength of the radio frequency signal (12).

The radio frequency signal (12) strength calculated based on the reads gathered by the RF reader (13) during a period of 15 minutes and then multiplied by the signal to noise ratio to produce a RF value utilized to compare strength of radio frequency. As one illustrative example, for a particular bolus if the reads are 2 during the 15 minute period and the signal to noise ratio is 90.7 then the RF value is 181.4.

As can be easily understood from the foregoing, the basic concepts of the present invention may be embodied in a variety of ways. The invention involves numerous and varied embodiments of animal monitoring system including the best mode.

As such, the particular embodiments or elements of the invention disclosed by the description or shown in the figures or tables accompanying this application are not intended to be limiting, but rather exemplary of the numerous and varied embodiments generically encompassed by the invention or equivalents encompassed with respect to any particular element thereof. In addition, the specific description of a single embodiment or element of the invention may not explicitly describe all embodiments or elements possible; many alternatives are implicitly disclosed by the description and figures.

It should be understood that each element of an apparatus or each step of a method may be described by an apparatus term or method term. Such terms can be substituted where desired to make explicit the implicitly broad coverage to which this invention is entitled. As but one example, it should be understood that all steps of a method may be disclosed as an action, a means for taking that action, or as an element which causes that action. Similarly, each element of an apparatus may be disclosed as the physical element or the action which that physical element facilitates. As but one example, the disclosure of "an animal monitor" should be understood to encompass disclosure of the act of "monitoring an animal" -- whether explicitly discussed or not -- and, conversely, were there effectively disclosure of the act of "monitoring an animal", such a disclosure should be understood to encompass disclosure of "an animal monitor" and even a "means for animal monitoring." Such alternative terms for each element or step are to be understood to be explicitly included in the description.

In addition, as to each term used it should be understood that unless its utilization in this application is inconsistent with such interpretation, common dictionary definitions should be understood to be included in the description for each term as contained in the Random House Webster's Unabridged Dictionary, second edition.

Moreover, for the purposes of the present invention, the term "a" or "an" entity refers to one or more of that entity unless otherwise limited. As such, the terms "a" or "an", "one or more" and "at least one" can be used interchangeably herein. For example, "a memory element" refers to one or more memory elements. Furthermore, a compound "selected from the group consisting

of refers to one or more of the elements in the list that follows, including combinations of two or more of the elements.

All numeric values herein are assumed to be modified by the term "about", whether or not explicitly indicated. For the purposes of the present invention, ranges may be expressed as from "about" one particular value to "about" another particular value. When such a range is expressed, another embodiment includes from the one particular value to the other particular value. The recitation of numerical ranges by endpoints includes all the numeric values subsumed within that range. A numerical range of one to five includes for example the numeric values 1, 1.5, 2, 2.75, 3, 3.80, 4, 5, and so forth. It will be further understood that the endpoints of each of the ranges are significant both in relation to the other endpoint, and independently of the other endpoint. When a value is expressed as an approximation by use of the antecedent "about," it will be understood that the particular value forms another embodiment. The term "about" generally refers to a range of numeric values that one of skill in the art would consider equivalent to the recited numeric value or having the same function or result.

Thus, the applicant(s) should be understood to claim at least: i) each of the animal monitoring devices herein disclosed and described, ii) the related methods disclosed and described, iii) similar, equivalent, and even implicit variations of each of these devices and methods, iv) those alternative embodiments which accomplish each of the functions shown, disclosed, or described, v) those alternative designs and methods which accomplish each of the functions shown as are implicit to accomplish that which is disclosed and described, vi) each feature, component, and step shown as separate and independent inventions, vii) the applications enhanced by the various systems or components disclosed, viii) the resulting products produced by such systems or components, ix) methods and apparatuses substantially as described hereinbefore and with reference to any of the accompanying examples, x) the various combinations and permutations of each of the previous elements disclosed.

The background section of this patent application provides a statement of the field of endeavor to which the invention pertains. This section may also contain paraphrasing of certain United States patents, patent applications, publications, or subject

matter of the claimed invention useful in relating information, problems, or concerns about the state of technology to which the invention is drawn toward. It is not intended that any United States patent, patent application, publication, statement or other information cited or incorporated herein be interpreted, construed or deemed to be admitted as prior art with
5 respect to the invention.

The claims set forth in this specification, if any, are hereby incorporated by reference as part of this description of the invention, and the applicant expressly reserves the right to use all of or a portion of such incorporated content of such claims as additional description to
10 support any of or all of the claims or any element or component thereof, and the applicant further expressly reserves the right to move any portion of or all of the incorporated content of such claims or any element or component thereof from the description into the claims or vice-versa as necessary to define the matter for which protection is sought by this application or by any subsequent application or continuation, division, or continuation-in-part application
15 thereof, or to obtain any benefit of, reduction in fees pursuant to, or to comply with the patent laws, rules, or regulations of any country or treaty, and such content incorporated by reference shall survive during the entire pendency of this application including any subsequent continuation, division, or continuation-in-part application thereof or any reissue or extension thereon.

20 The claims set forth in this specification, if any, are further intended to describe the metes and bounds of a limited number of the preferred embodiments of the invention and are not to be construed as the broadest embodiment of the invention or a complete listing of embodiments of the invention that may be claimed. The applicant does not waive any right to
25 develop further claims based upon the description set forth above as a part of any continuation, division, or continuation-in-part, or similar application.

We claim:

1. An animal monitoring system, comprising:
 - a) an inert bolus body adapted to allow oral administration to a ruminant animal;
 - 5 b) an animal monitoring device having a location inside said inert bolus body, including:
 - i) at least one sensor which generates a signal which varies in relation to change in a sensed animal characteristic;
 - ii) a sensor signal encoder which encodes said signal generated by said at
10 least one sensor as encoded sensed animal characteristic information;
 - iii) a radio frequency signal generator which generates a radio frequency signal capable of carrying said encoded sensed animal characteristic information;
 - iv) a network frequency match element that detunes a radio frequency signal to compensate for demodulation of said radio frequency signal passing through the mass
15 of said ruminant animal;
 - v) an antenna which transmits said radio frequency signal; and
 - vi) a power source which supplies power to said animal monitoring device;
 - and
 - c) a first magnet having a location inside said inert bolus body.
20
2. The animal monitoring system of claim 1, wherein said inert bolus body comprises a cured resin cast about said animal monitoring device and said first magnet.
3. The animal monitoring system of claim 1, wherein said inert bolus body comprises a
25 sealable container which defines a hollow inside space which receives said animal monitoring device and said first magnet.
4. The animal monitoring system of claim 3, further comprising a cured resin cast about said animal monitoring device and said first magnet located within said sealable container.
30
5. The animal monitoring system of claim 1, wherein said first magnet has a pair of opposed faces defining a north pole and a south pole, said south pole disposed in inward facing

relation to said animal monitoring device, said north pole disposed in outward facing relation to said animal monitoring device.

6. The animal monitoring system of claim 5, wherein said first magnet has a generally rectangular shape having four sides defining the area of a first magnet face and a second magnet face disposed in substantially parallel opposed relation a distance apart, said first face disposed in inward facing relation to said animal monitoring device, said first face defining said south pole.

10 7. The animal monitoring system of claim 1, wherein one or more said sensed animal characteristics is selected from the group consisting of: temperature, pH, heart rate, blood pressure, and partial pressures of dissolved gases.

15 8. The animal monitoring system of claim 7, wherein one or more said sensor is selected from the group consisting of a tilt sensor, a vibration sensor; temperature sensor, a blood pressure sensor, a dissolved gases sensor, a pH sensor, and a heart rate sensor.

20 9. The animal monitoring system of claim 1, further comprising an animal identification information encoder which encodes animal identification information associated with said sensed animal characteristic as encoded animal identification information.

10. The animal monitoring system of claim 1, wherein said radio frequency generator comprises at least an oscillator which generates said radio frequency signal.

25 11. The animal monitoring system of claim 10, further comprising a radio frequency stabilizer which operates to maintain said radio frequency signal within a radio frequency range.

30 12. The animal monitoring system of claim 11, wherein said a radio frequency stabilizer maintains said radio frequency signal in the range of about 410MHz and about 440MHz.

13. The animal monitoring system of claim 9, further comprising a microcontroller which controls one or more of said sensor signal encoder, said animal identification information encoder, said radio frequency signal generator.
- 5 14. The animal monitoring system of claim 13, further comprising a printed circuit board which supports and electrically connects one or more of said microcontroller, said sensor signal encoder, said animal identification information encoder said radio frequency signal generator, and said antenna.
- 10 15. The animal monitoring system of claim 14, wherein said printed circuit board has a circular boundary and said antenna comprises an imprinted antenna having a generally circular configuration disposed proximate said circular boundary of said printed circuit board.
- 15 16. The animal monitoring system of claim 1, wherein said power source comprises a battery.
17. The animal monitoring system of claim 1, wherein said battery comprises a dry cell battery.
- 20 18. The animal monitoring system of claim 1, further comprising a second magnet adapted to allow oral administration to a ruminant animal separate from said inert bolus body containing said animal monitoring device and said first magnet.
- 25 19. The animal monitoring system of claim 9, wherein said second magnet magnetically coupled to said first magnet increases transmission of said radio frequency signal capable of carrying said encoded animal identification information and said encoded sensed animal characteristic information.
- 30 20. The animal monitoring system of claim 9, one or more radio frequency readers which receive and send said encoded animal identification information and said encoded sensed animal characteristic information.

21. The animal monitoring system of claim 20, further comprising a reception device which receives said encoded animal identification information and said encoded sensed animal characteristic information sent by said one or more radio frequency readers.
- 5 22. The animal monitoring system of claim 21, further comprising a computer configured to receive and provide a user access to said encoded animal identification information and said encoded sensed animal characteristic information.
23. A method of producing an animal monitoring system, comprising the steps of:
- 10 a) providing an inert bolus body adapted to allow oral administration to a ruminant animal;
- b) locating an animal monitoring device inside of said inert bolus body, said animal monitoring device including:
- 15 i) at least one sensor capable of generating a signal which varies in relation to change in a sensed animal characteristic;
- ii) a sensor signal encoder which encodes said signal generated by said sensor as encoded sensed animal characteristic information;
- iii) a radio frequency signal generator which generates a radio frequency signal capable of carrying said encoded sensed animal characteristic information;
- 20 iv) a network frequency match element that detunes a radio frequency signal to compensate for demodulation of said radio frequency signal passing through the mass of said ruminant animal;
- v) a power source which supplies power to said animal monitoring device;
- and
- 25 vi) an antenna which transmits said radio frequency signal; and
- c) locating a first magnet inside of said inert bolus body.
24. The method of producing an animal monitoring system of claim 23, wherein said step of providing an inert bolus body comprises the step of casting a resin about said animal
- 30 monitoring device and said first magnet.
25. The method of producing an animal monitoring system of claim 23, wherein said step of providing an inert bolus body comprises the step of providing a sealable container which

defines a hollow inside space which receives said animal monitoring device and said first magnet.

26. The method of producing an animal monitoring system of claim 25, further comprising
5 the steps of:

a) disposing an amount of resin about said animal monitoring device and said first magnet located within said sealable container; and

b) curing said amount of resin about said animal monitoring device and said first magnet located within said sealable container.

10

27. The method of producing an animal monitoring system of claim 23, wherein said magnet has opposed faces defining a north pole and a south pole, and further comprising the steps of:

a) disposing said south face of said magnet in inward facing relation to said animal
15 monitoring device; and

b) disposing said north pole of said magnet in outward facing relation to said animal monitoring device.

28. The method of producing an animal monitoring system of claim 27, further comprising
20 the steps of:

a) providing said magnet in a generally rectangular shape having four sides defining the area of a first face and a second face disposed in generally parallel opposed relation a distance apart; and

b) disposing said first face in inward facing relation to said animal monitoring
25 device, said first face defining said south pole.

29. The method of producing an animal monitoring system of claim 23, further comprising the step of providing a second magnet separate from said first magnet contained in said inert bolus body, said second magnet adapted to increase strength of said radio frequency signal
30 capable of carrying said encoded animal identification information and said encoded sensed animal characteristic information.

30. The method of producing an animal monitoring system of claim 29, further comprising the step of adapting said second magnet to allow oral administration to a ruminant animal separate from said inert bolus body containing said animal monitoring device and said first magnet.

5

31. The method of producing an animal monitoring system of claim 23, further comprising the step of selecting one or more of said sensed animal characteristic from the group consisting of: temperature, pH, heart rate, blood pressure, and partial pressures of dissolved gases.

10 32. The method of producing an animal monitoring system of claim 31, further comprising the step of selecting one or more of said sensors from the group consisting of: a tilt sensor, a vibration sensor; temperature sensor, a pressure sensor, a dissolved gases sensor, a pH sensor, and a heart rate sensor.

15 33. The method of producing an animal monitoring system of claim 23, wherein said step of locating an animal monitoring device inside of said inert bolus body further comprises the step of including an animal identification information encoder which encodes animal identification information associated with said sensed animal characteristic as encoded animal identification information.

20

34. The method of producing an animal monitoring system of claim 23, wherein said radio frequency generator comprises an oscillator and further comprising the step of providing a radio frequency stabilizer which maintains said radio frequency signal within a selected radio frequency range.

25

35. The method of producing an animal monitoring system of claim 34, wherein said a radio frequency stabilizer maintains said radio frequency signal in the range of about 410MHz and about 440MHz.

30 36. The method of producing an animal monitoring system of claim 33, wherein said step of locating an animal monitoring device inside of said inert bolus body further comprises the step of providing a microcontroller which controls one or more of said sensor signal encoder, said animal identification information encoder, and said radio frequency signal generator.

37. The method of producing an animal monitoring system of claim 33, wherein said step of locating an animal monitoring device inside of said inert bolus body further comprises the step of supporting one or more of one or more of said microcontroller, said sensor signal encoder, said animal identification information encoder said radio frequency signal generator, and said antenna.

38. The method of producing an animal monitoring system of claim 37, further comprising the step of configuring said printed circuit board to define a circular boundary and imprinting said antenna on said printed circuit board proximate said circular boundary.

39. The method of producing an animal monitoring system of claim 23 wherein said power source comprises a battery.

40. The method of producing an animal monitoring system of claim 39, wherein said battery comprises a dry cell battery.

41. The method of producing an animal monitoring system of claim 23, further comprising the step of providing one or more radio frequency readers capable of receiving said radiofrequency signal carrying said encoded animal identification information and said encoded sensed animal characteristic information at a distance from said which can be located a distance from said animal monitoring device.

42. The method of producing an animal monitoring system of claim 41, further comprising the step of providing a reception device which receives and sends said encoded animal identification information and said encoded sensed animal characteristic information.

43. The method of producing an animal monitoring system of claim 42, further comprising the step of providing a specialized computer configured to receive and provide a user access to said encoded animal identification information and said encoded sensed animal characteristic information.

44. A method of monitoring an animal, comprising the steps of:

- a) orally administering to a ruminant animal a monitoring device and a first magnet contained inside of an inert bolus body, said animal monitoring device including:
- i) at least one sensor capable of generating a signal which varies in relation to change in a sensed animal characteristic;
 - 5 ii) a signal encoder which encodes said signal generated by said sensor as encoded sensed animal characteristic information;
 - iii) a radio frequency signal generator which generates a radio frequency signal capable of carrying said encoded sensed animal characteristic information;
 - iv) a network frequency match element that detunes a radio frequency
10 signal to compensate for demodulation of said radio frequency signal passing through the mass of said ruminant animal;
 - v) a power source which supplies power to said animal monitoring device;
and
 - vi) an antenna capable of transmitting said radio frequency signal carrying
15 said encoded sensed animal characteristic information; and
- b) accessing said encoded sensed animal characteristic information carried by said radio frequency signal.

45. The method of monitoring an animal of claim 44, further comprising the step of orally
20 administering to said ruminant animal a second magnet separate from said first magnet contained inside of said inert bolus body, said second magnet adapted to magnetically couple said first magnet contained inside of said inert bolus body to increase transmission of said radio frequency signal capable of carrying said encoded animal identification information and said encoded sensed animal characteristic information.

25

46. The method of monitoring an animal of claim 44, wherein said encoded sensed animal characteristic information is selected from the group consisting of: temperature, pH, heart rate, blood pressure, and partial pressures of dissolved gases, or combinations thereof.

30 47. The method of monitoring an animal of claim 46, wherein said ruminant animal a monitoring device further includes an animal identification information encoder which encodes animal identification information related to said sensed animal characteristic as encoded animal identification information, and further comprising the steps of:

a) accessing said encoded animal identification information carried by said radio frequency signal; and

b) matching said encoded animal identification information with said encoded sensed animal characteristic information carried by said radio frequency signal.

5

48. The method of monitoring an animal of claim 47, further comprising the step of locating one or more radio frequency readers capable of receiving said radiofrequency signal carrying said encoded animal identification information and said encoded sensed animal characteristic information at a distance from said animal monitoring device.

10

49. The method of monitoring an animal of claim 48, further comprising the step of transmitting said encoded animal identification information and said encoded sensed animal characteristic information from said one or more radio frequency readers.

15

50. The method of monitoring an animal of claim 49, further comprising the step of receiving said encoded animal identification information and said encoded sensed animal characteristic information from said one or more radio frequency readers with a reception device.

20

51. The method of monitoring an animal of claim 50, further comprising the step of using a computer configured to receive and provide a user access to said encoded animal identification information and said encoded sensed animal characteristic information received by said reception device.

25

52. The method of monitoring an animal of claim 44, wherein said radio frequency generator comprises an oscillator which generates said radio frequency signal.

30

53. The method of monitoring an animal of claim 52, wherein said radio frequency generator further comprises a radio frequency stabilizer which operates to maintain said radio frequency signal within a radio frequency range.

54. The method of monitoring an animal of claim 53, wherein said a radio frequency stabilizer maintains said radio frequency signal in the range of about 410MHz and about 440MHz.
- 5 55. The method of monitoring an animal of claim 47, wherein said animal monitoring device further includes a microcontroller which controls one or more of said sensor signal encoder, said animal identification information encoder, and said radio frequency signal generator.
- 10 56. The method of monitoring an animal of claim 55, wherein said animal monitoring device further includes a printed circuit board which supports and electrically connects one or more of said microcontroller, said sensor signal encoder, said animal identification information encoder said radio frequency signal generator, and said antenna.
- 15 57. The method of monitoring an animal of claim 56, wherein said printed circuit board defines a circular boundary having said antenna imprinted proximate said circular boundary.
58. The method of monitoring an animal of claim 44, wherein said power source comprises a battery.
- 20 59. The method of monitoring an animal of claim 58, wherein said battery comprises a dry cell battery.
60. An animal monitoring system, comprising:
- 25 a) an inert bolus body adapted to allow oral administration to a ruminant animal;
- b) an animal monitoring device having a location inside said inert bolus body, including:
- i) at least one sensor which generates a signal which varies in relation to
- 30 change in a sensed animal characteristic;
- ii) a sensor signal encoder which encodes said signal generated by said at least one sensor as encoded sensed animal characteristic information;
- iii) a radio frequency signal generator which includes an oscillator which

generates a first radio frequency signal capable of carrying said encoded sensed animal characteristic information to a location outside of said ruminant animal;

iv) an antenna which transmits said radio frequency signal and receives a second radio frequency signal; and

5 v) a battery which supplies power to said animal monitoring device; and

c) a first magnet having a location inside said inert bolus body, wherein said first magnet has a pair of opposed faces defining a north pole and a south pole, said south pole disposed in inward facing relation to said animal monitoring device, said north pole disposed in outward facing relation to said animal monitoring device.

10

61. The animal monitoring system of claim 60, wherein said inert bolus body comprises a cured resin cast about said animal monitoring device.

15

62. The animal monitoring system of claim 60, wherein said inert bolus body comprises a sealable container which defines a hollow inside space which receives said animal monitoring device.

63. The animal monitoring system of claim 62, further comprising a cured resin cast about said animal monitoring device located within said sealable container.

20

64. The animal monitoring system of claim 60, wherein said first magnet has a generally rectangular shape having four sides defining the area of a first magnet face and a second magnet face disposed in substantially parallel opposed relation a distance apart, said first face disposed in inward facing relation to said animal monitoring device, said first face defining
25 said south pole.

65. The animal monitoring system of claim 60, wherein said sensed animal characteristics is selected from the group consisting of: tilt, conductivity of a biological fluid, blood pressure, and partial pressures of dissolved gases.

30

66. The animal monitoring system of claim 60, further comprising an animal identification information encoder which encodes animal identification information

associated with said sensed animal characteristic as encoded animal identification information.

67. The animal monitoring system of claim 66, further comprising a printed circuit board
5 which supports and electrically connects each of said sensor signal encoder, said animal identification information encoder, said radio frequency signal generator, and said antenna.

68. The animal monitoring system of claim 67, wherein said printed circuit board has a
circular boundary and said antenna comprises an imprinted antenna having only one generally
10 circular configuration imprint disposed proximate said circular boundary of said printed circuit board.

69. The animal monitoring system of claim 60, wherein said battery comprises a dry cell
battery.
15

70. The animal monitoring system of claim 60, further comprising a second magnet adapted
to allow oral administration to a ruminant animal separate from said inert bolus body containing
said animal monitoring device and said first magnet, wherein said second magnet magnetically
coupled to said first magnet having said south pole disposed in inward facing relation to said
20 animal monitoring device, said north pole disposed in outward facing relation to said animal
monitoring device increases transmission of said first radio frequency signal capable of
carrying said encoded sensed animal characteristic information.

71. The animal monitoring system of claim 60, further comprising one or more radio
25 frequency readers which receive and send said encoded sensed animal characteristic
information.

72. The animal monitoring system of claim 71, further comprising a reception device which
receives said encoded sensed animal characteristic information sent by said one or more radio
30 frequency readers.

73. The animal monitoring system of claim 72, further comprising a computer having a
configuration to receive and provide a user access to said encoded sensed animal characteristic

information.

74. An animal monitoring system, comprising:

- a) an inert bolus body adapted to allow oral administration to a ruminant animal;
- 5 b) an animal monitoring device located inside said inert bolus body, including:
 - i) at least one sensor capable of generating a signal which varies in relation to change in a sensed animal characteristic;
 - ii) a sensor signal encoder which encodes said signal generated by said sensor as encoded sensed animal characteristic information;
 - 10 iii) a radio frequency signal generator which generates a first radio frequency signal capable of carrying said encoded sensed animal characteristic information;
 - iv) a power source which supplies power to said animal monitoring device;
 - v) a radio frequency signal receiver capable of receiving a second radio
 - 15 frequency signal generated by a second radio frequency generator having a location outside of said ruminant animal;
 - vi) a microcontroller having a programmable module operable to control one or more of said sensor signal encoder, said animal identification information encoder, and said radio frequency signal generator, said microcontroller capable of processing said
 - 20 second radio frequency signal to alter said programmable module; and
 - vii) an antenna that transmits said radio frequency signal and receives said second radio frequency signal.

75. A method of monitoring an animal, comprising:

- 25 a) orally administering to a ruminant animal a monitoring device and a first magnet contained inside of an inert bolus body, said animal monitoring device including:
 - i) at least one sensor capable of generating a signal which varies in relation to change in a sensed animal characteristic;
 - ii) a sensor signal encoder which encodes said signal generated by said
 - 30 sensor as encoded sensed animal characteristic information;
 - iii) a radio frequency signal generator which generates a first radio frequency signal capable of carrying said encoded sensed animal characteristic information;

iv) a power source which supplies power to said animal monitoring device;

v) a radio frequency signal receiver capable of receiving a second radio frequency signal generated by a second radio frequency generator having a location outside
5 of said ruminant animal; and

vi) an antenna that transmits said radio frequency signal and receives said second radio frequency signal,

wherein the inert bolus further comprises a first magnet having a location inside said inert bolus body, wherein said first magnet has a pair of opposed faces defining a
10 north pole and a south pole, said south pole disposed in inward facing relation to said animal monitoring device, said north pole disposed in outward facing relation to said animal monitoring device.

15 76. A method of producing an animal monitoring system, comprising the steps of:

a) providing an inert bolus body adapted to allow oral administration to a ruminant animal;

b) locating an animal monitoring device inside of said inert bolus body, said animal monitoring device, including:

20 at least one sensor capable of generating a signal which varies in relation to change in a sensed animal characteristic;

a sensor signal encoder which encodes said signal generated by said sensor as encoded sensed animal characteristic information;

25 a radio frequency signal generator which generates a first radio frequency signal capable of carrying said encoded sensed animal characteristic information;

a power source which supplies power to said animal monitoring device;

a radio frequency signal receiver capable of receiving a second radio frequency signal generated by a second radio frequency generator having a location outside of said ruminant animal;

30 a microcontroller having a programmable module operable to control one or more of said sensor signal encoder, said animal identification information encoder, and said radio frequency signal generator, said microcontroller capable of processing said second radio frequency signal to alter said programmable module; and

an antenna which transmits said radio frequency signal and receives said second radio frequency signal.

77. A method of monitoring an animal, comprising:

- 5 a) orally administering to a ruminant animal a monitoring device contained inside of an inert bolus body;
- b) generating with a sensor in said animal monitoring device a signal that varies in relation to change in a sensed animal characteristic;
- c) encoding in said signal generated by said sensor encoded sensed animal
10 characteristic information;
- d) generating a radio frequency signal carrying said encoded sensed animal characteristic information;
- e) detuning a frequency of the radio frequency signal to compensate for demodulation of said radio frequency signal passing through the mass of said ruminant
15 animal;
- f) transmitting the radio frequency signal carrying said encoded sensed animal characteristic information from the interior of the ruminant animal; and
- g) accessing transmitted encoded sensed animal characteristic information carried by said radio frequency signal.

20

78. An animal monitoring system, comprising:

- a) an inert bolus body adapted to allow oral administration to a ruminant animal;
 - b) an animal monitoring device having a location inside said inert bolus body, including:
 - 25 i) at least one sensor which generates a signal which varies in relation to change in a sensed animal characteristic;
 - ii) a sensor signal encoder which encodes said signal generated by said at least one sensor as encoded sensed animal characteristic information;
 - iii) a radio frequency signal generator which generates a radio frequency
30 signal capable of carrying said encoded sensed animal characteristic information;
 - iv) an antenna which transmits said radio frequency signal; and
 - v) a power source which supplies power to said animal monitoring device;
- and

c) a first magnet having a location inside said inert bolus body.

79. The animal monitoring system of claim 78, wherein said inert bolus body comprises a cured resin cast about said animal monitoring device and said first magnet.

5

80. The animal monitoring system of claim 78, wherein said inert bolus body comprises a sealable container which defines a hollow inside space which receives said animal monitoring device and said first magnet.

10 81. The animal monitoring system of claim 80, further comprising a cured resin cast about said animal monitoring device and said first magnet located within said sealable container.

82. The animal monitoring system of claim 78, wherein said first magnet has a pair of opposed faces defining a north pole and a south pole, said south pole disposed in inward facing relation to said animal monitoring device, said north pole disposed in outward facing relation to said animal monitoring device.

83. The animal monitoring system of claim 82, wherein said first magnet has a generally rectangular shape having four sides defining the area of a first magnet face and a second magnet face disposed in substantially parallel opposed relation a distance apart, said first face disposed in inward facing relation to said animal monitoring device, said first face defining said south pole.

84. The animal monitoring system of claim 78, wherein one or more said sensed animal characteristics is selected from the group consisting of: temperature, pH, heart rate, blood pressure, and partial pressures of dissolved gases.

85. The animal monitoring system of claim 84, wherein one or more said sensor is selected from the group consisting of a tilt sensor, a vibration sensor; temperature sensor, a blood pressure sensor, a dissolved gases sensor, a pH sensor, and a heart rate sensor.

86. The animal monitoring system of claim 78, further comprising an animal identification information encoder which encodes animal identification information associated with said sensed animal characteristic as encoded animal identification information.

5 87. The animal monitoring system of claim 78, wherein said radio frequency generator comprises at least an oscillator which generates said radio frequency signal.

88. The animal monitoring system of claim 87, further comprising a radio frequency stabilizer which operates to maintain said radio frequency signal within a radio frequency
10 range.

89. The animal monitoring system of claim 88, wherein said a radio frequency stabilizer maintains said radio frequency signal in the range of about 410MHz and about 440MHz.

15 90. The animal monitoring system of claim 86, further comprising a microcontroller which controls one or more of said sensor signal encoder, said animal identification information encoder, said radio frequency signal generator.

91. The animal monitoring system of claim 90, further comprising a printed circuit board
20 which supports and electrically connects one or more of said microcontroller, said sensor signal encoder, said animal identification information encoder said radio frequency signal generator, and said antenna.

92. The animal monitoring system of claim 91, wherein said printed circuit board has a
25 circular boundary and said antenna comprises an imprinted antenna having a generally circular configuration disposed proximate said circular boundary of said printed circuit board.

93. The animal monitoring system of claim 78, wherein said power source comprises a
30 battery.

94. The animal monitoring system of claim 78, wherein said battery comprises a dry cell battery.

95. The animal monitoring system of claim 78, further comprising a second magnet adapted to allow oral administration to a ruminant animal separate from said inert bolus body containing said animal monitoring device and said first magnet.
- 5 96. The animal monitoring system of claim 86 wherein said second magnet magnetically coupled to said first magnet increases transmission of said radio frequency signal capable of carrying said encoded animal identification information and said encoded sensed animal characteristic information.
- 10 97. The animal monitoring system of claim 86, one or more radio frequency readers which receive and send said encoded animal identification information and said encoded sensed animal characteristic information.
- 15 98. The animal monitoring system of claim 97, further comprising a reception device which receives said encoded animal identification information and said encoded sensed animal characteristic information sent by said one or more radio frequency readers.
- 20 99. The animal monitoring system of claim 98, further comprising a computer configured to receive and provide a user access to said encoded animal identification information and said encoded sensed animal characteristic information.
100. A method of producing an animal monitoring system, comprising the steps of:
- a) providing an inert bolus body adapted to allow oral administration to a ruminant animal;
 - 25 b) locating an animal monitoring device inside of said inert bolus body, said animal monitoring device including:
 - i) at least one sensor capable of generating a signal which varies in relation to change in a sensed animal characteristic;
 - ii) a sensor signal encoder which encodes said signal generated by said
 - 30 sensor as encoded sensed animal characteristic information;
 - iii) a radio frequency signal generator which generates a radio frequency signal capable of carrying said encoded sensed animal characteristic information;
 - iv) a power source which supplies power to said animal monitoring device; and

- v) an antenna which transmits said radio frequency signal; and
- c) locating a first magnet inside of said inert bolus body.

101. The method of producing an animal monitoring system of claim 100, wherein said step
5 of providing an inert bolus body comprises the step of casting a resin about said animal
monitoring device and said first magnet.

102. The method of producing an animal monitoring system of claim 100, wherein said step
of providing an inert bolus body comprises the step of providing a sealable container which
10 defines a hollow inside space which receives said animal monitoring device and said first
magnet.

103. The method of producing an animal monitoring system of claim 102, further comprising
the steps of:

- 15 a) disposing an amount of resin about said animal monitoring device and said first
magnet located within said sealable container; and
- b) curing said amount of resin about said animal monitoring device and said first
magnet located within said sealable container.

20 104. The method of producing an animal monitoring system of claim 100, wherein said
magnet has opposed faces defining a north pole and a south pole, and further comprising the
steps of:

- a) disposing said south face of said magnet in inward facing relation to said animal
monitoring device; and
- 25 b) disposing said north pole of said magnet in outward facing relation to said
animal monitoring device.

105. The method of producing an animal monitoring system of claim 104, further comprising
the steps of:

- 30 a) providing said magnet in a generally rectangular shape having four sides
defining the area of a first face and a second face disposed in generally parallel opposed relation
a distance apart; and

b) disposing said first face in inward facing relation to said animal monitoring device, said first face defining said south pole.

106. The method of producing an animal monitoring system of claim 100, further comprising
5 the step of providing a second magnet separate from said first magnet contained in said inert bolus body, said second magnet adapted to increase strength of said radio frequency signal capable of carrying said encoded animal identification information and said encoded sensed animal characteristic information.

10 107. The method of producing an animal monitoring system of claim 106, further comprising the step of adapting said second magnet to allow oral administration to a ruminant animal separate from said inert bolus body containing said animal monitoring device and said first magnet.

15 108. The method of producing an animal monitoring system of claim 100, further comprising the step of selecting one or more of said sensed animal characteristic from the group consisting of: temperature, pH, heart rate, blood pressure, and partial pressures of dissolved gases.

20 109. The method of producing an animal monitoring system of claim 108, further comprising the step of selecting one or more of said sensors from the group consisting of: a tilt sensor, a vibration sensor; temperature sensor, a pressure sensor, a dissolved gases sensor, a pH sensor, and a heart rate sensor.

25 110. The method of producing an animal monitoring system of claim 100, wherein said step of locating an animal monitoring device inside of said inert bolus body further comprises the step of including an animal identification information encoder which encodes animal identification information associated with said sensed animal characteristic as encoded animal identification information.

30 111. The method of producing an animal monitoring system of claim 100, wherein said radio frequency generator comprises an oscillator and further comprising the step of providing a radio frequency stabilizer which maintains said radio frequency signal within a selected radio frequency range.

112. The method of producing an animal monitoring system of claim 111, wherein said a radio frequency stabilizer maintains said radio frequency signal in the range of about 410MHz and about 440MHz.

5

113. The method of producing an animal monitoring system of claim 110, wherein said step of locating an animal monitoring device inside of said inert bolus body further comprises the step of providing a microcontroller which controls one or more of said sensor signal encoder, said animal identification information encoder, and said radio frequency signal generator.

10

114. The method of producing an animal monitoring system of claim 110, wherein said step of locating an animal monitoring device inside of said inert bolus body further comprises the step of supporting one or more of one or more of said microcontroller, said sensor signal encoder, said animal identification information encoder said radio frequency signal generator, and said antenna.

15

115. The method of producing an animal monitoring system of claim 114, further comprising the step of configuring said printed circuit board to define a circular boundary and imprinting said antenna on said printed circuit board proximate said circular boundary.

20

116. The method of producing an animal monitoring system of claim 100 wherein said power source comprises a battery.

117. The method of producing an animal monitoring system of claim 116, wherein said battery comprises a dry cell battery.

25

118. The method of producing an animal monitoring system of claim 100, further comprising the step of providing one or more radio frequency readers capable of receiving said radiofrequency signal carrying said encoded animal identification information and said encoded sensed animal characteristic information at a distance from said which can be located a distance from said animal monitoring device.

30

119. The method of producing an animal monitoring system of claim 118, further comprising the step of providing a reception device which receives and sends said encoded animal identification information and said encoded sensed animal characteristic information.

5 120. The method of producing an animal monitoring system of claim 119, further comprising the step of providing a specialized computer configured to receive and provide a user access to said encoded animal identification information and said encoded sensed animal characteristic information.

10 121. A method of monitoring an animal, comprising the steps of:

a) orally administering to a ruminant animal a monitoring device and a first magnet contained inside of an inert bolus body, said animal monitoring device including:

i) at least one sensor capable of generating a signal which varies in relation to change in a sensed animal characteristic;

15 ii) a signal encoder which encodes said signal generated by said sensor as encoded sensed animal characteristic information;

iii) a radio frequency signal generator which generates a radio frequency signal capable of carrying said encoded sensed animal characteristic information;

iv) a power source which supplies power to said animal monitoring device; and

20 v) an antenna capable of transmitting said radio frequency signal carrying said encoded sensed animal characteristic information; and

b) accessing said encoded sensed animal characteristic information carried by said radio frequency signal.

25 122. The method of monitoring an animal of claim 121, further comprising the step of orally administering to said ruminant animal a second magnet separate from said first magnet contained inside of said inert bolus body, said second magnet adapted to magnetically couple said first magnet contained inside of said inert bolus body to increase transmission of said radio frequency signal capable of carrying said encoded animal identification information and said
30 encoded sensed animal characteristic information.

123. The method of monitoring an animal of claim 121, wherein said encoded sensed animal characteristic information is selected from the group consisting of: temperature, pH, heart rate, blood pressure, and partial pressures of dissolved gases, or combinations thereof.

5 124. The method of monitoring an animal of claim 123, wherein said ruminant animal a monitoring device further includes an animal identification information encoder which encodes animal identification information related to said sensed animal characteristic as encoded animal identification information, and further comprising the steps of:

10 a) accessing said encoded animal identification information carried by said radio frequency signal; and

b) matching said encoded animal identification information with said encoded sensed animal characteristic information carried by said radio frequency signal.

125. The method of monitoring an animal of claim 124, further comprising the step of
15 locating one or more radio frequency readers capable of receiving said radiofrequency signal carrying said encoded animal identification information and said encoded sensed animal characteristic information at a distance from said animal monitoring device.

126. The method of monitoring an animal of claim 125, further comprising the step of
20 transmitting said encoded animal identification information and said encoded sensed animal characteristic information from said one or more radio frequency readers.

127. The method of monitoring an animal of claim 126, further comprising the step of
25 receiving said encoded animal identification information and said encoded sensed animal characteristic information from said one or more radio frequency readers with a reception device.


128. The method of monitoring an animal of claim 127, further comprising the step of using
30 a computer configured to receive and provide a user access to said encoded animal identification information and said encoded sensed animal characteristic information received by said reception device.

129. The method of monitoring an animal of claim 121, wherein said radio frequency generator comprises an oscillator which generates said radio frequency signal.
130. The method of monitoring an animal of claim 129, wherein said radio frequency generator further comprises a radio frequency stabilizer which operates to maintain said radio frequency signal within a radio frequency range.
131. The method of monitoring an animal of claim 130, wherein said a radio frequency stabilizer maintains said radio frequency signal in the range of about 410MHz and about 440MHz.
132. The method of monitoring an animal of claim 124, wherein said animal monitoring device further includes a microcontroller which controls one or more of said sensor signal encoder, said animal identification information encoder, and said radio frequency signal generator.
133. The method of monitoring an animal of claim 132, wherein said animal monitoring device further includes a printed circuit board which supports and electrically connects one or more of said microcontroller, said sensor signal encoder, said animal identification information encoder said radio frequency signal generator, and said antenna.
134. The method of monitoring an animal of claim 133, wherein said printed circuit board defines a circular boundary having said antenna imprinted proximate said circular boundary.
135. The method of monitoring an animal of claim 121, wherein said power source comprises a battery.
136. The method of monitoring an animal of claim 135, wherein said battery comprises a dry cell battery.

30


1/7

FIG. 1

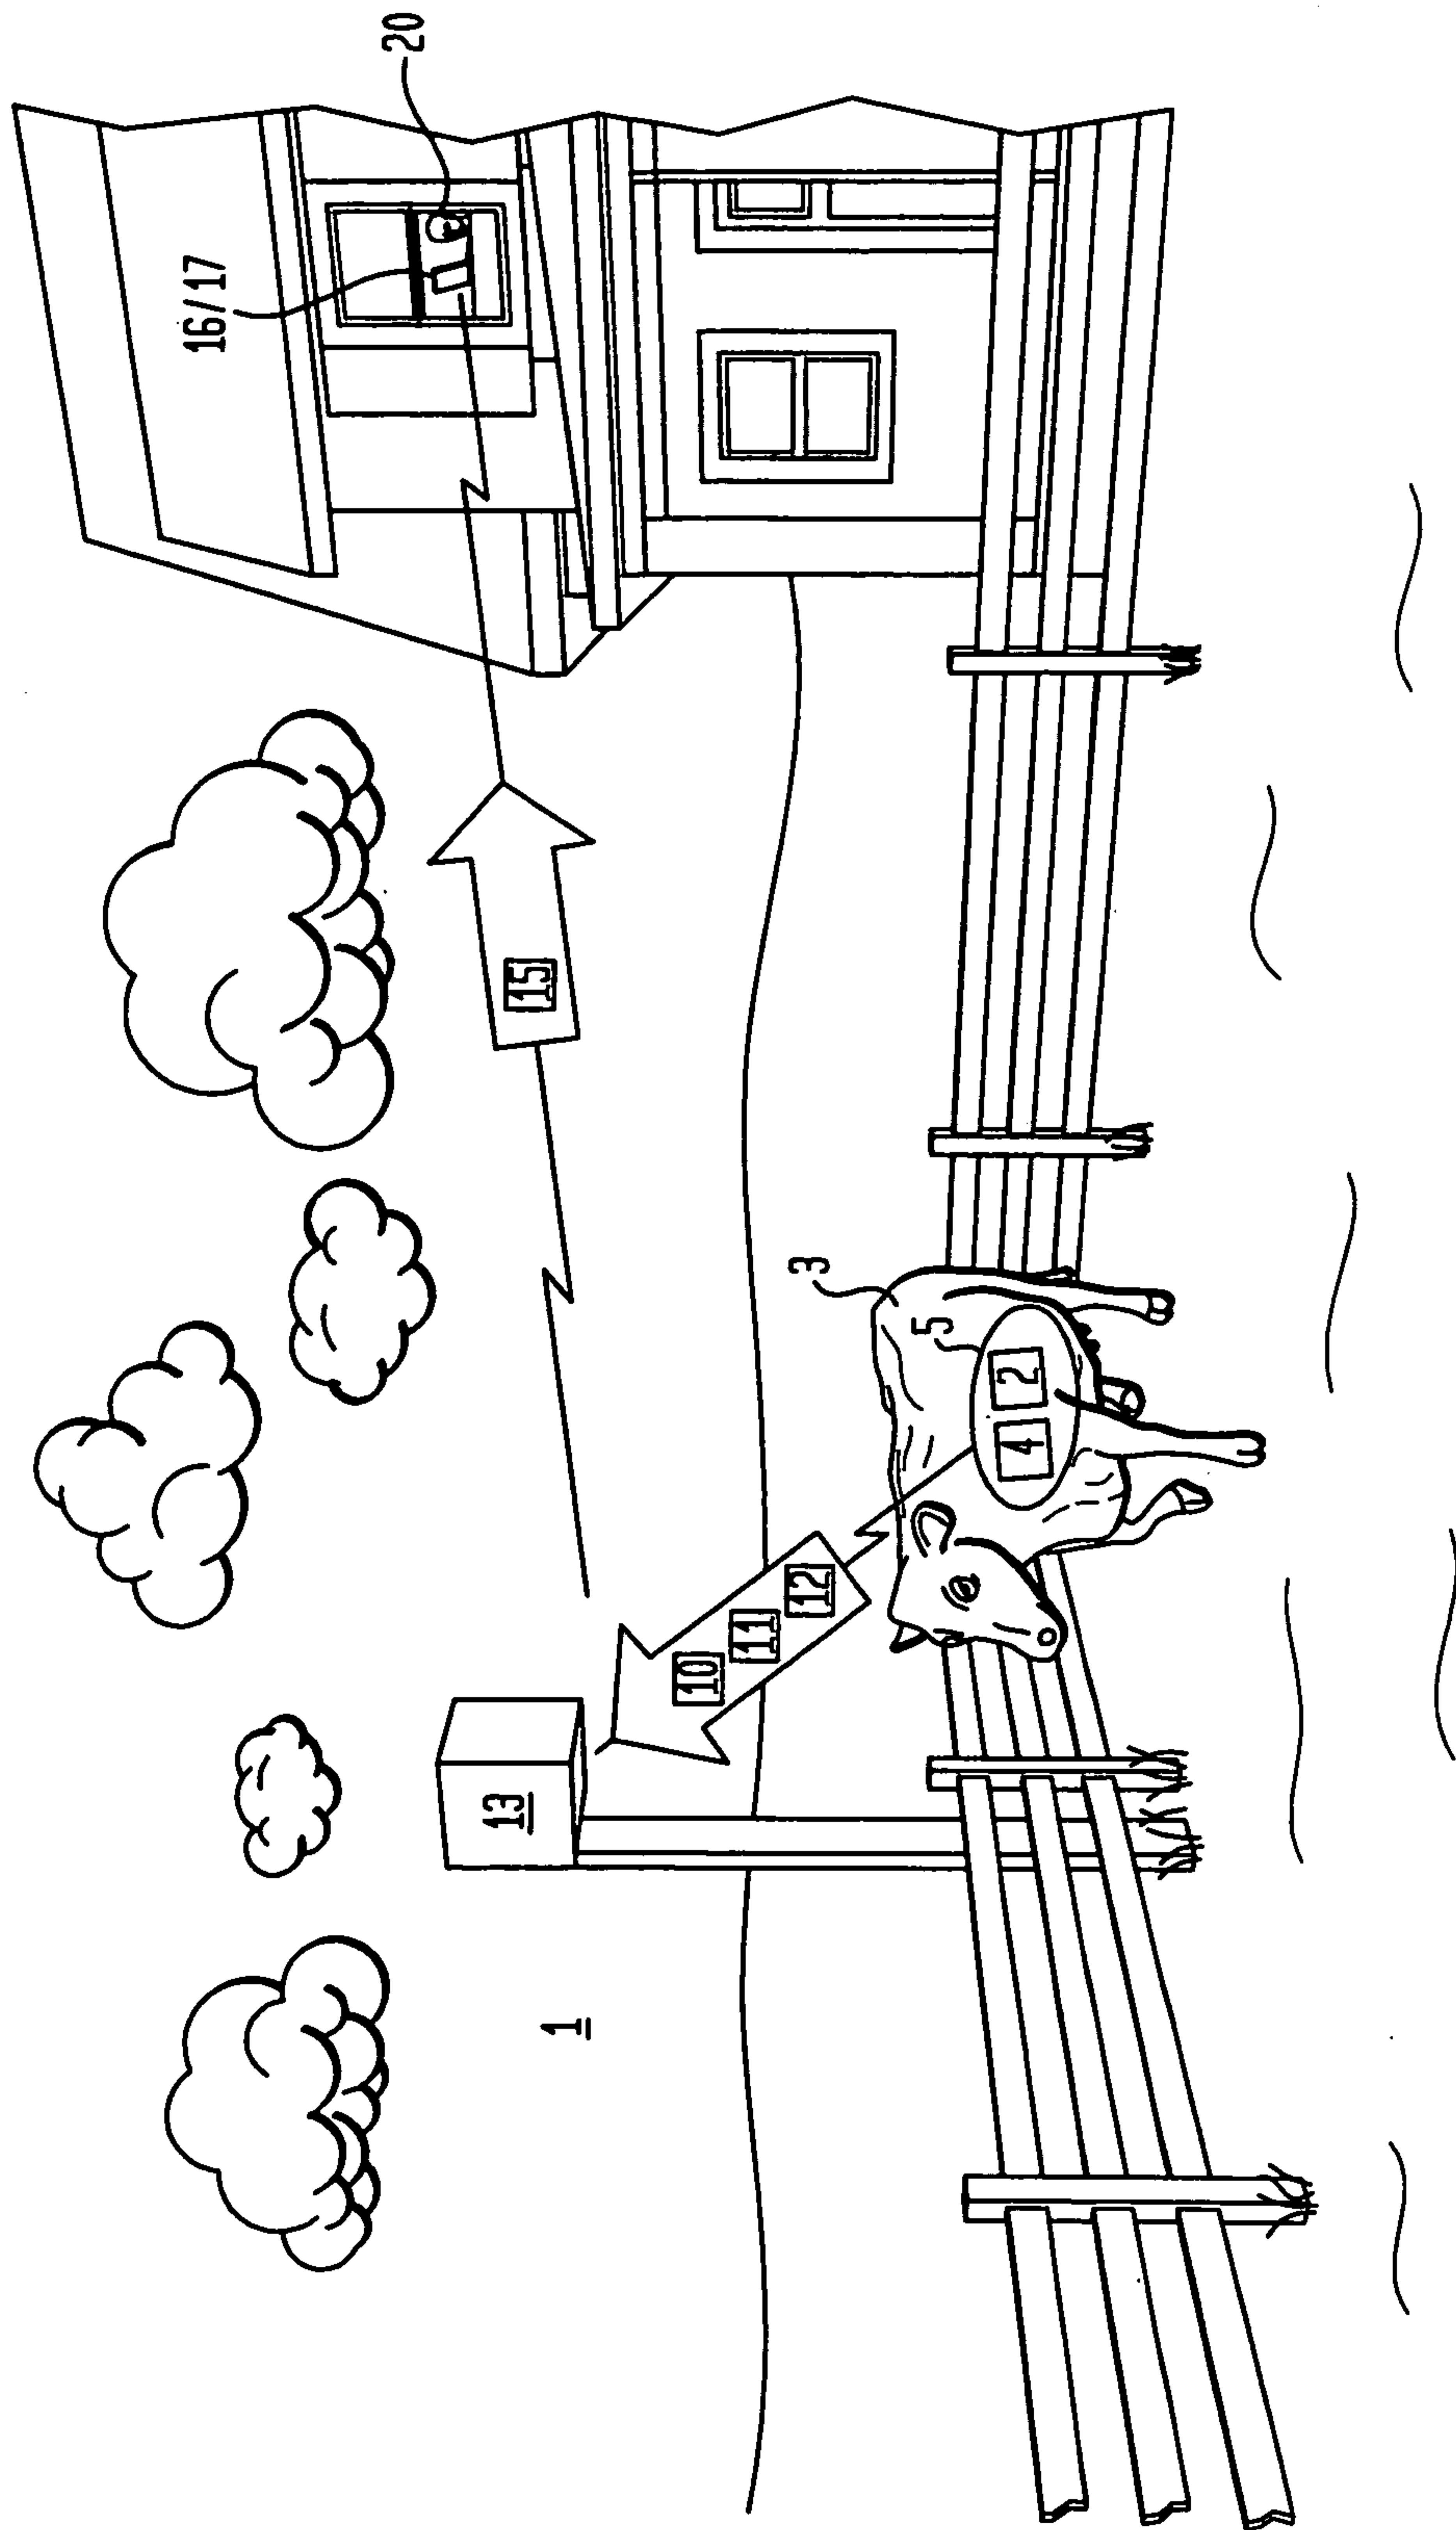


2/7


FIG. 2

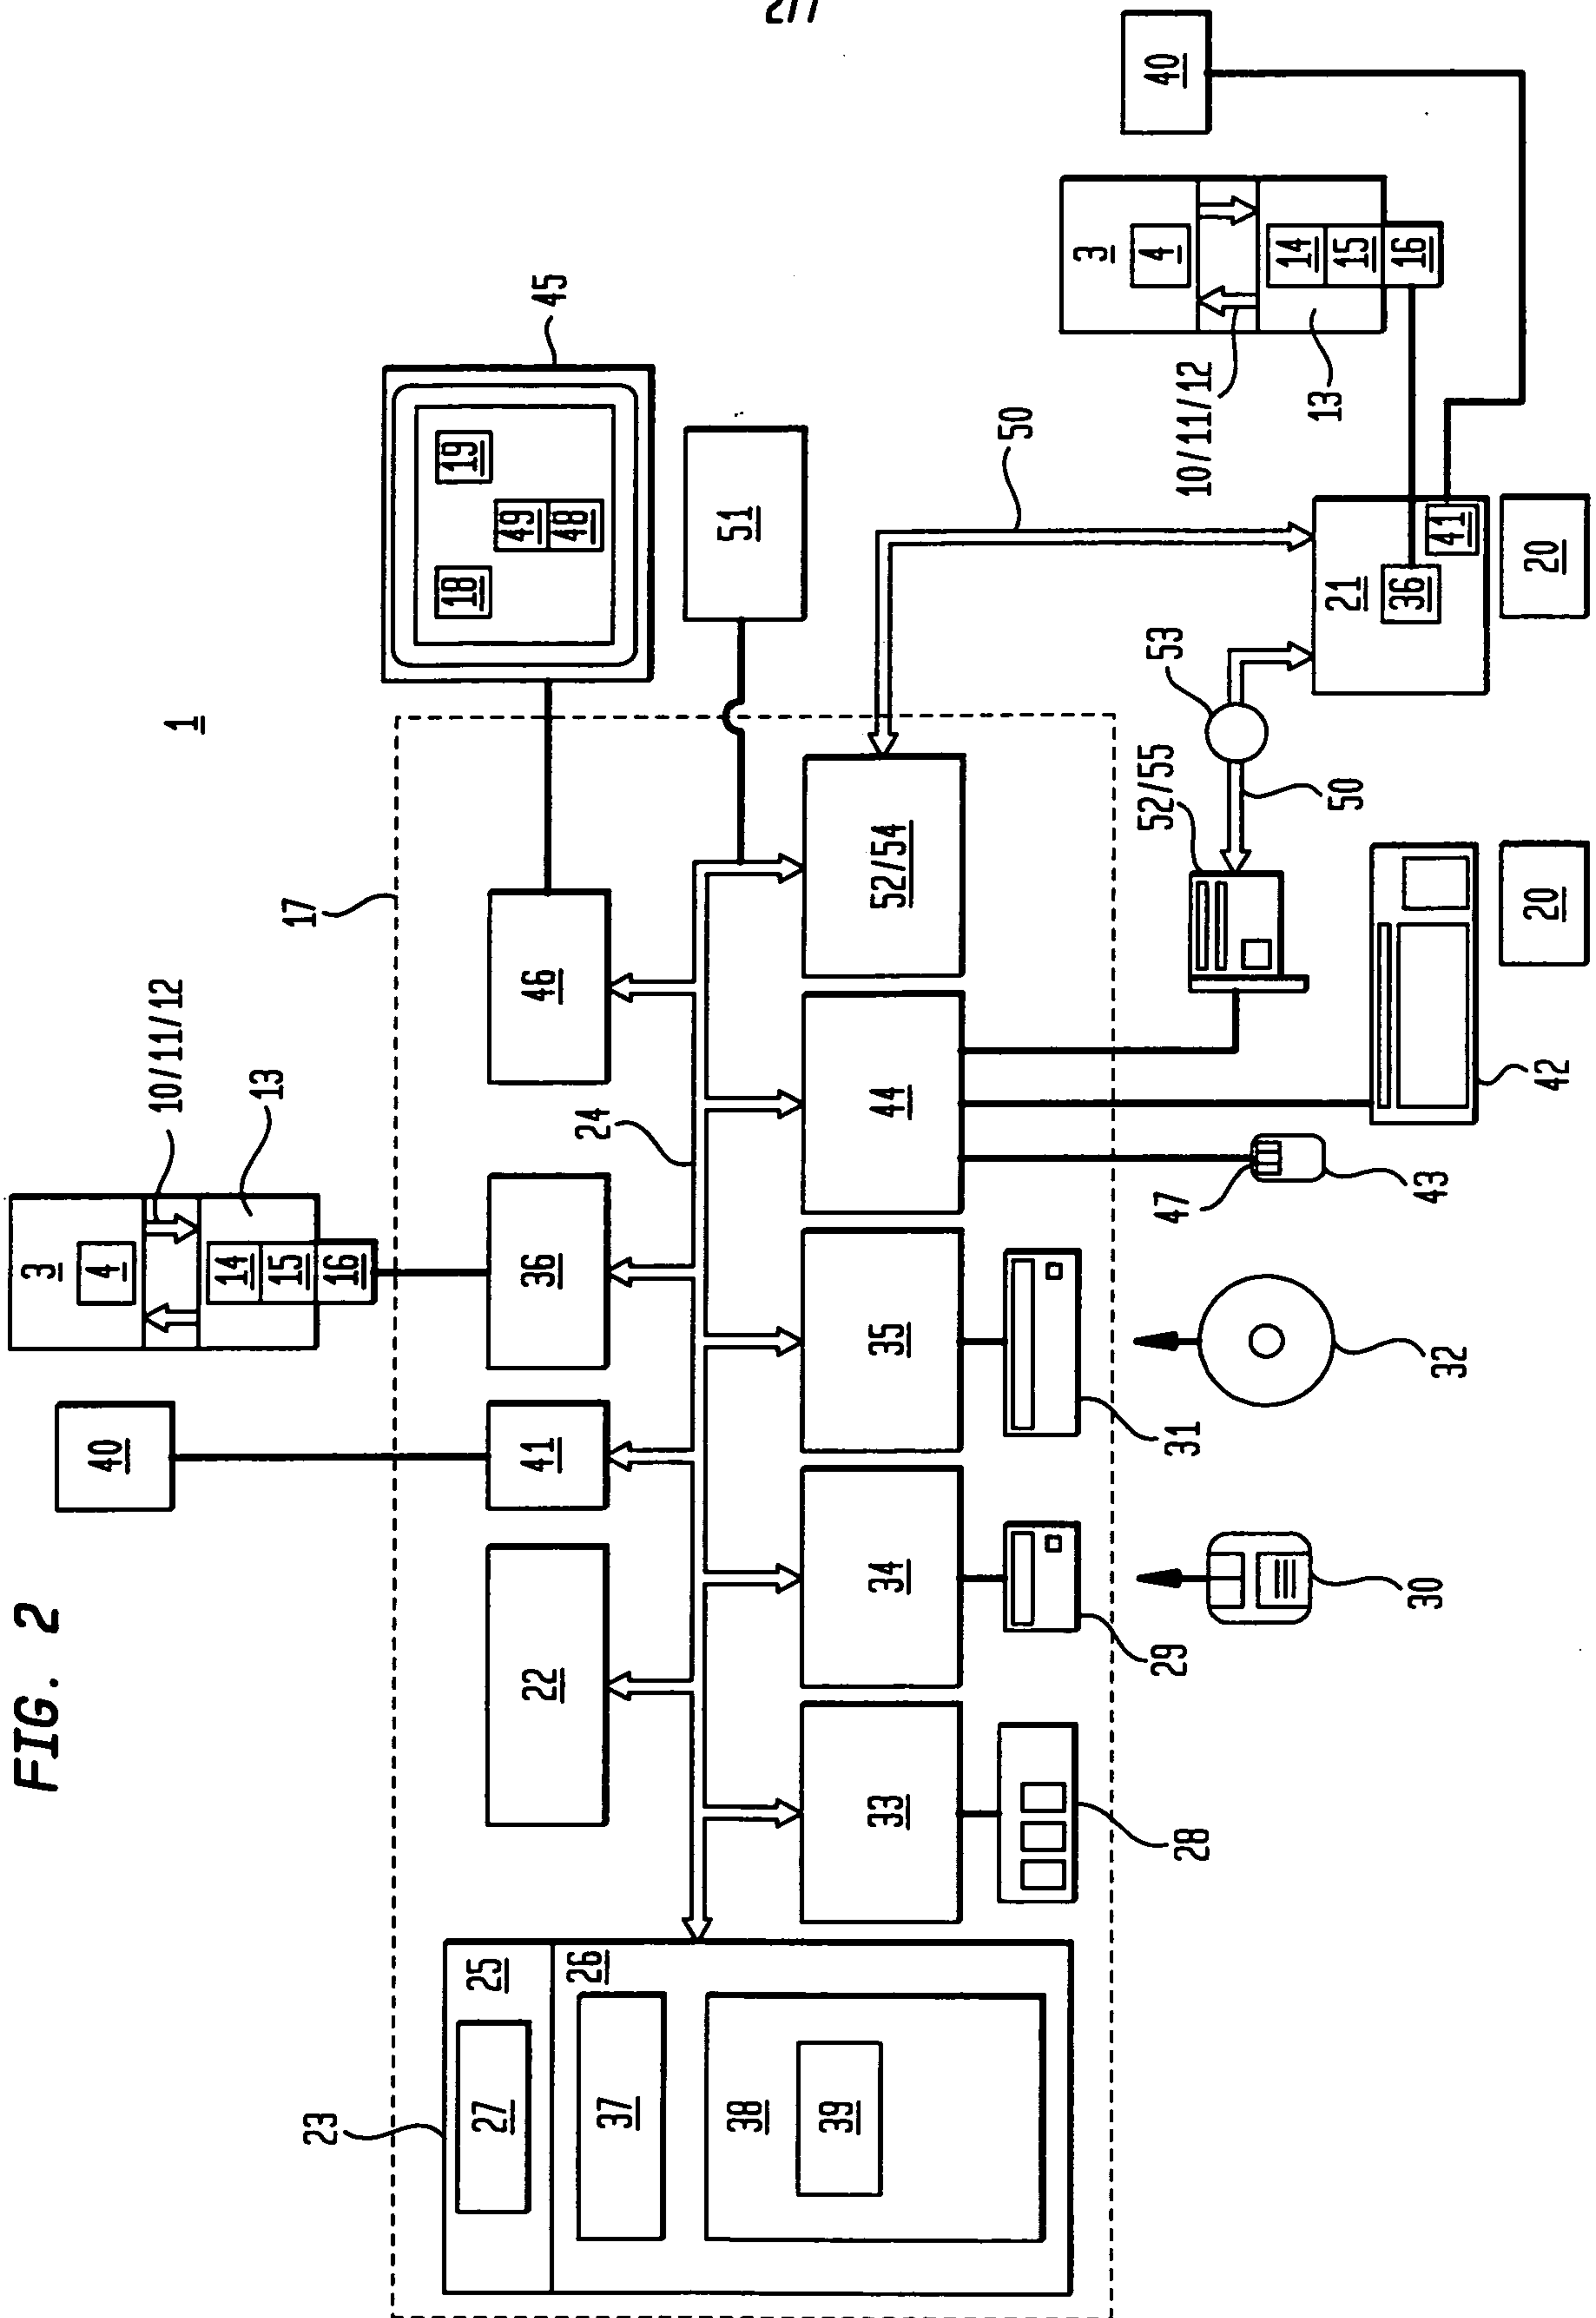


3/7

FIG. 3
READER BLOCK DIAGRAM

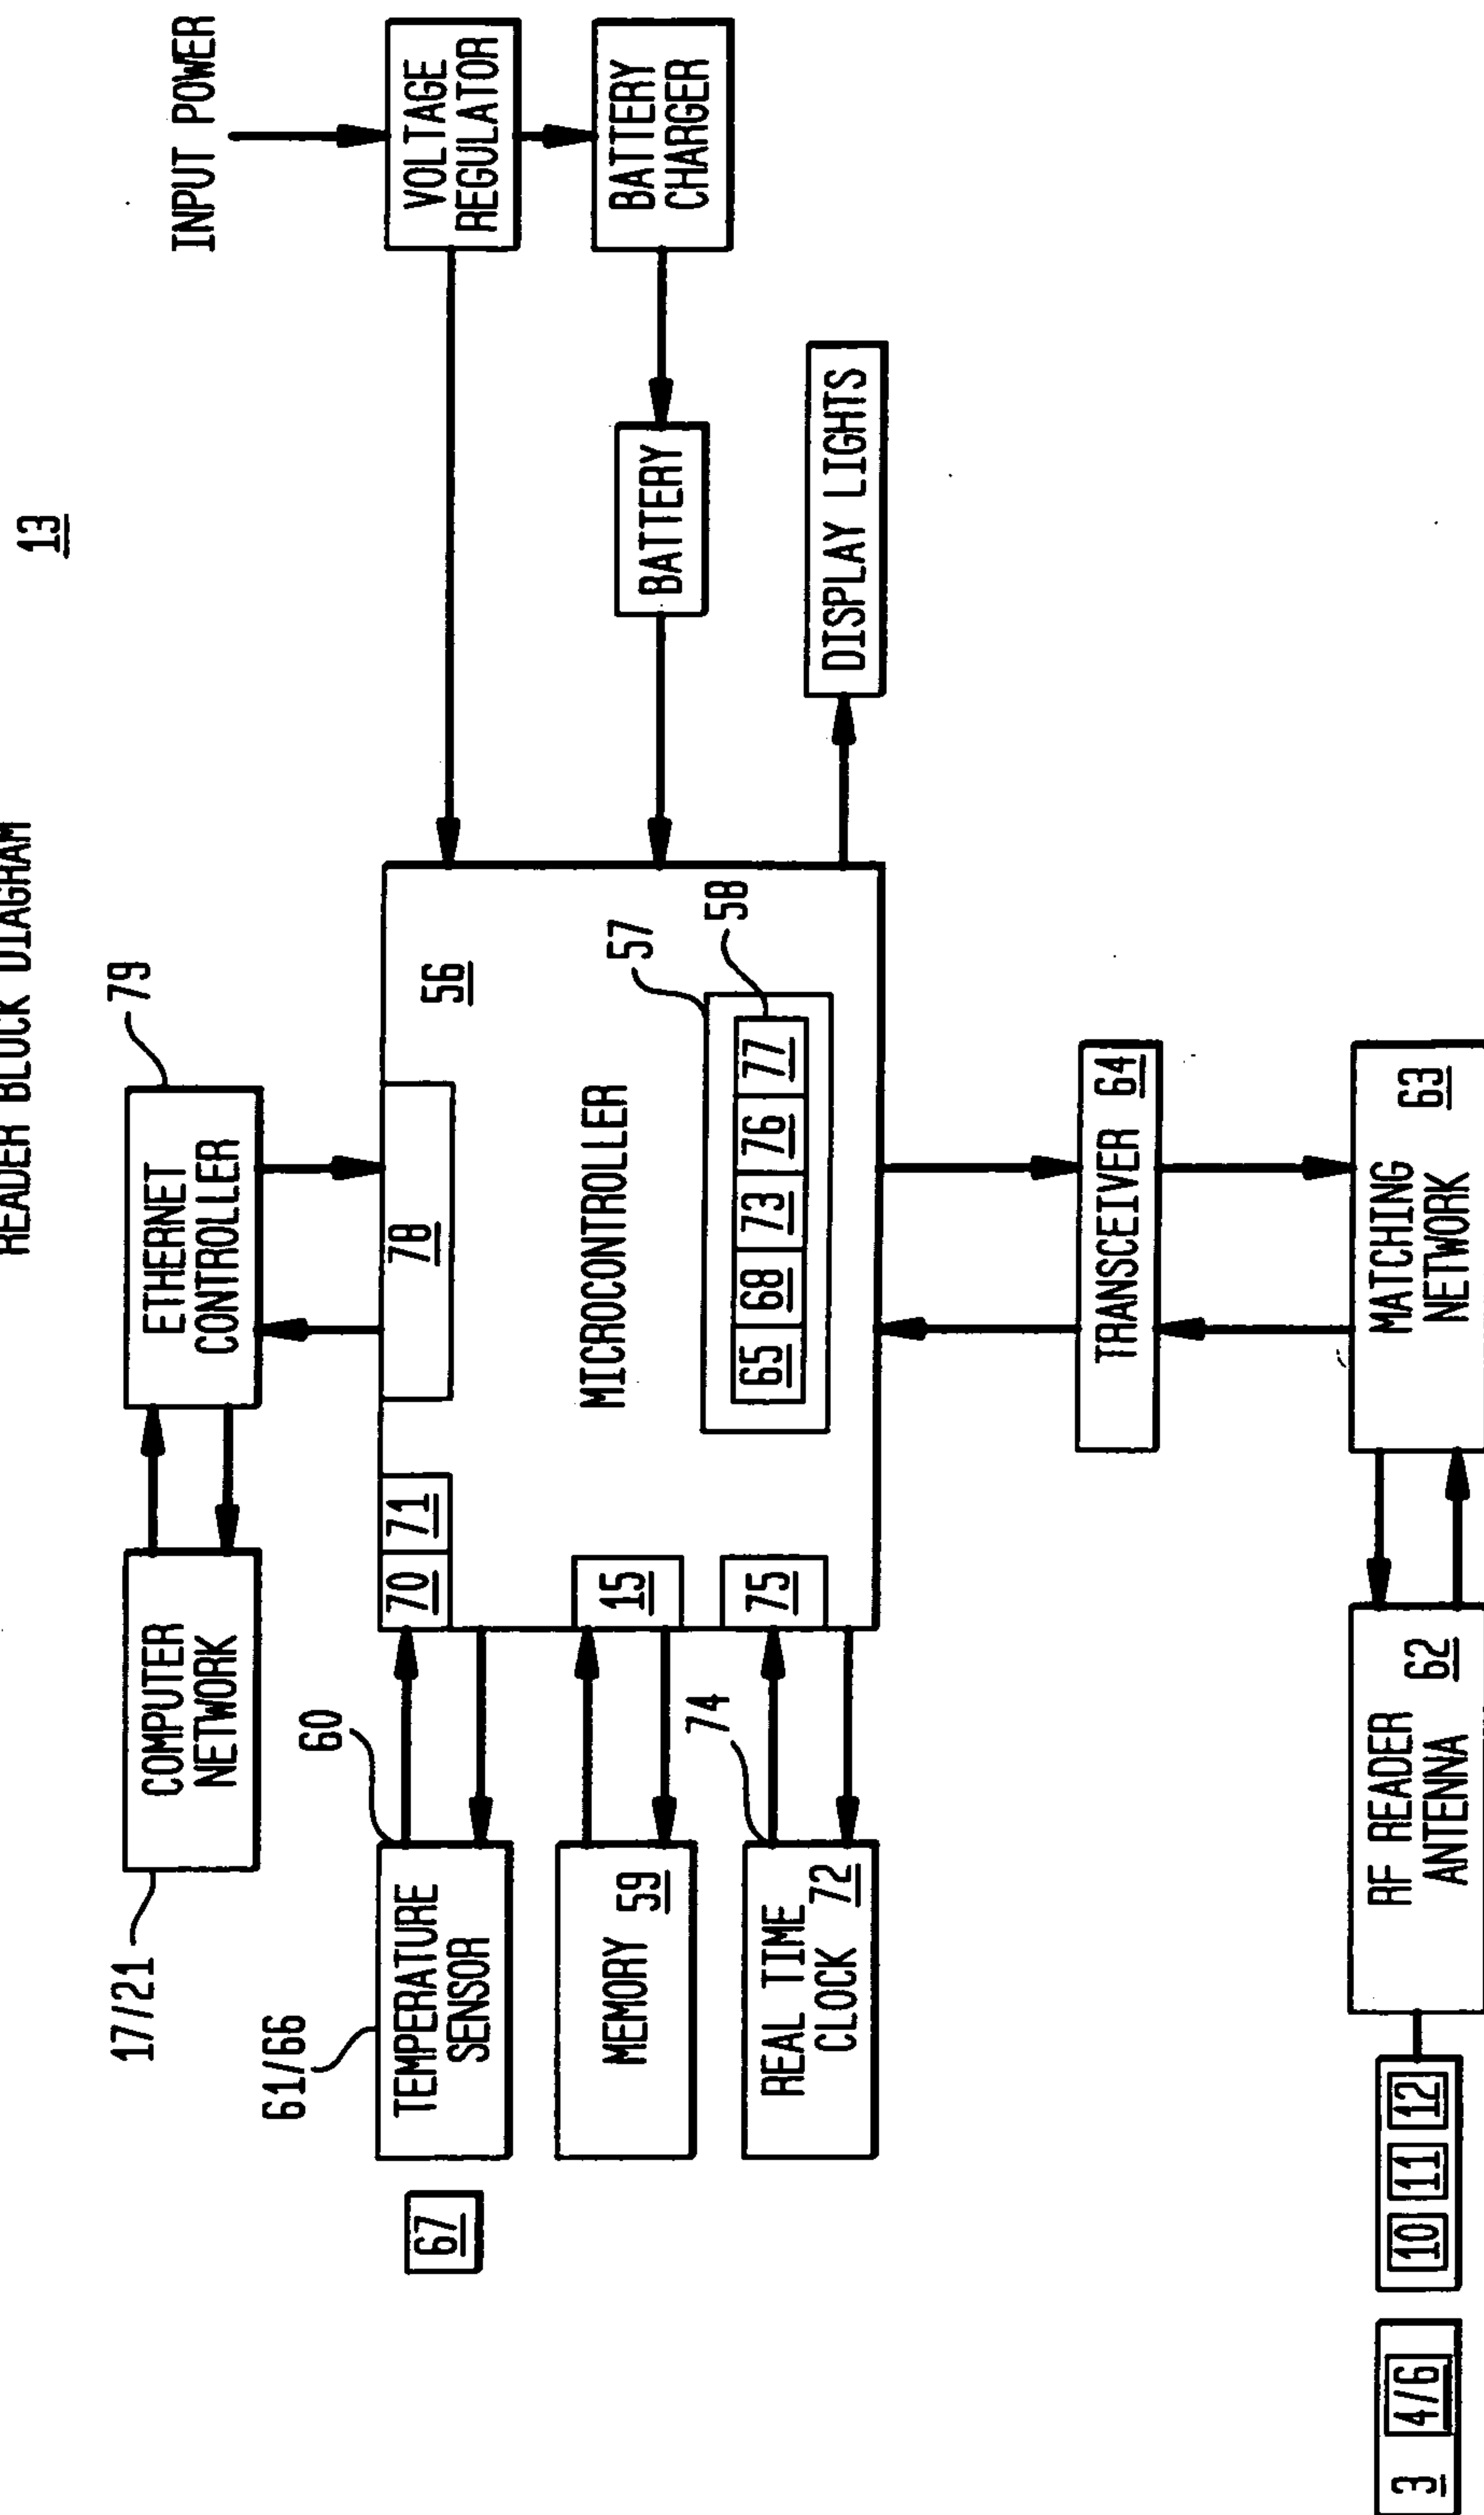

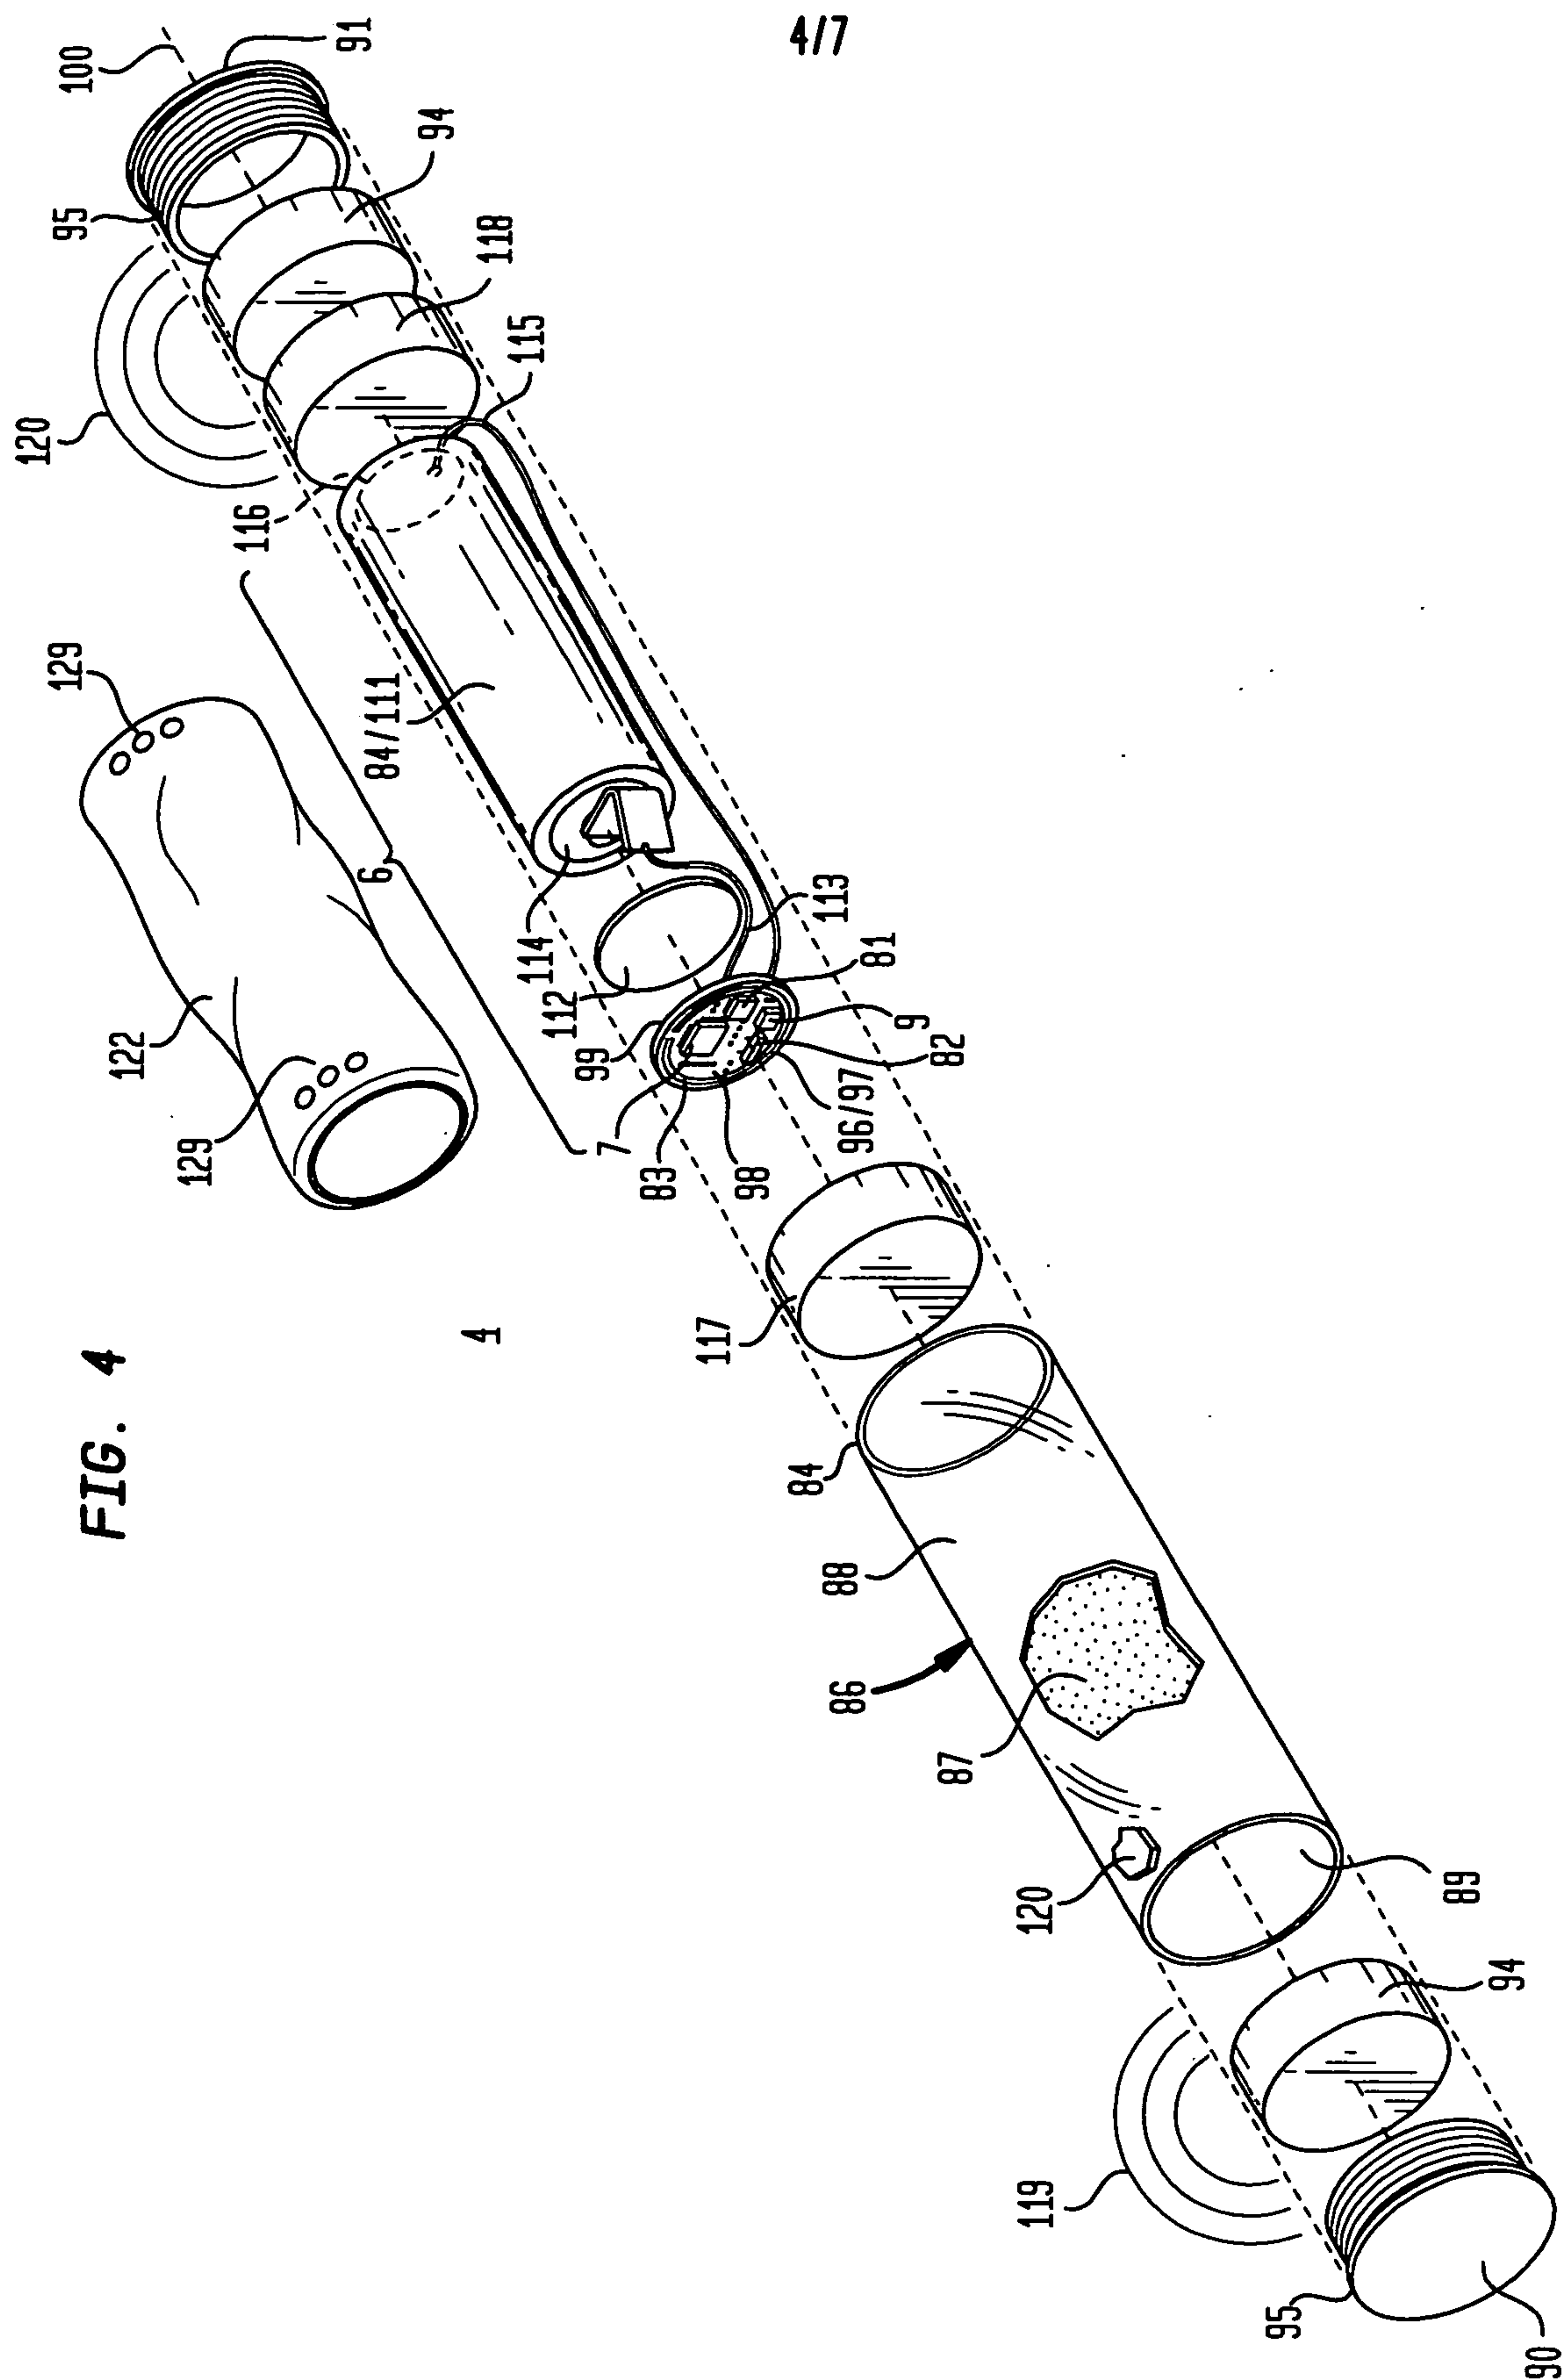

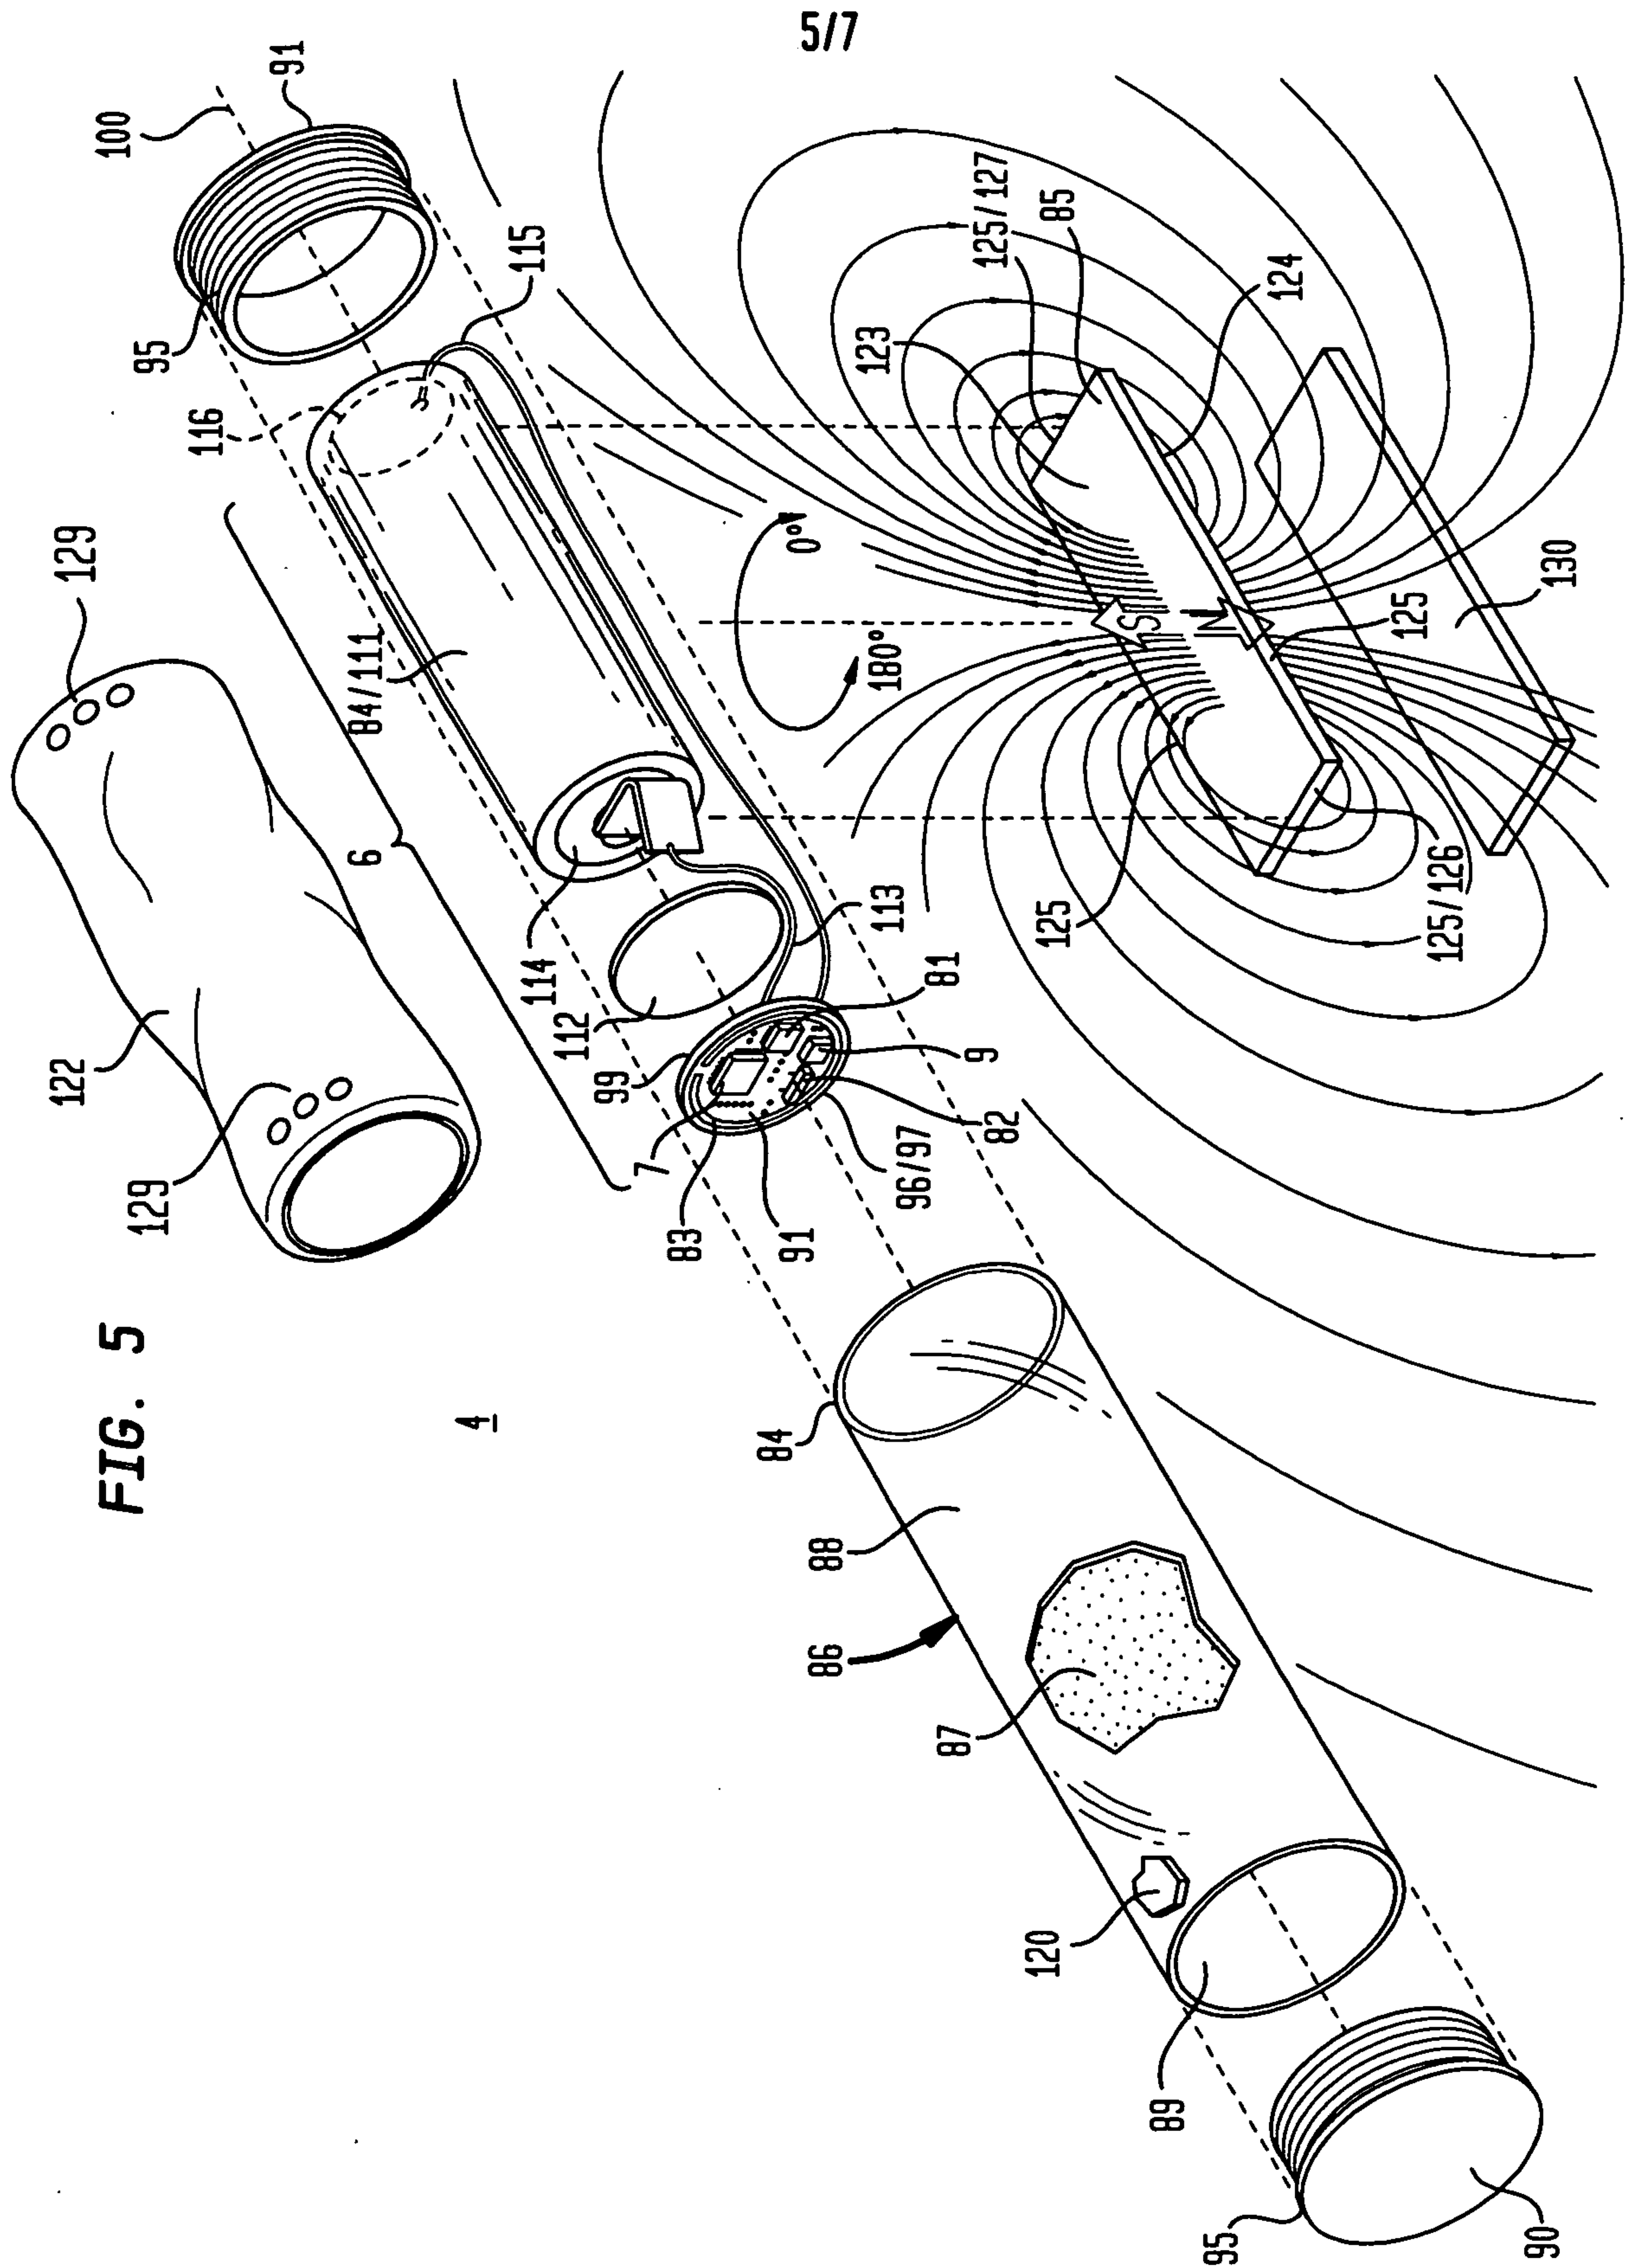

6/7

FIG. 6

