




- (51) **International Patent Classification:**
H03K 19/177 (2006.01) *G06F 21/76* (2013.01)
- (21) **International Application Number:**
PCT/US2012/060750
- (22) **International Filing Date:**
18 October 2012 (18.10.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/279,370 24 October 2011 (24.10.2011) US
13/279,371 24 October 2011 (24.10.2011) US
- (71) **Applicant:** EASTMAN KODAK COMPANY [US/US];
343 State Street, Rochester, NY 14650-2201 (US).
- (72) **Inventor:** GEZ, Arie; 343 State Street, Rochester, NY
14650-2201 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

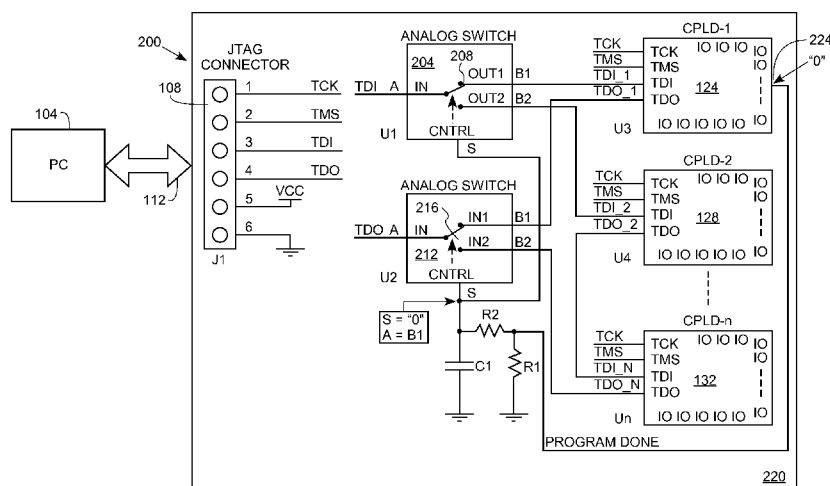(54) **Title:** SAFETY COMPONENT IN A PROGRAMMABLE COMPONENTS CHAIN**FIG. 2**

- (57) **Abstract:** An electronic circuit includes a plurality of programmable components connected in an electronic chain (128, 132). An interface (108) is adapted to connect the programmable components (124, 128, 132) to an external controller (104) wherein the controller (104) is adapted to program the programmable components (124, 128, 132). A component isolation element (204, 212) is connected to the interface (108) at an input end and to the electronic chain (128, 132) of the programmable components at an output end wherein the isolation element (204, 212) is adapted to isolate one component (124) of the programmable components from the electronic chain (128, 132) and wherein the one component (124) is a safety component.

SAFETY COMPONENT IN A PROGRAMABLE COMPONENTS CHAIN**FIELD OF THE INVENTION**

This invention relates in general to programming a complex programmable logic device (CPLD) and in particular to programming a safety
5 electronic circuit.

BACKGROUND OF THE INVENTION

Computer-to-plate (CTP) imaging devices use laser diodes for imaging on a substrate. Leakage of laser light from the imaging device during imaging operation may be hazardous to people in proximity to the device.
10 Various safety measures may be required as high power invisible laser (IR) beams are present at least in the optical fibers of the device during operation and could cause eye damage if they leaked from the device. Interlock sensors are deployed in the device at various locations to notify of hazardous situations or to prevent, for example, opening the device door during operation. The sensors are integrated
15 with specific electronic circuitry as shown in FIG. 1. When one or more of the interlock and safety sensors goes off, indicating a potential leak of laser light, the laser sources are disabled and fault warning activated.

Safety devices are mandatory in potentially hazardous products, and are required to be installed by international safety standards. Safety measures
20 in devices can be incorporated by various means such as software, electronic CPLD components or electro-mechanical components. In the case of CPLD components, the CPLD components are installed on an circuit board, which may include more than one CPLD component. One of the CPLD components may be used for safety.

25 CPLD components are programmable and the programming is done via a joint test action group (JTAG) port residing on the electronic board and connected typically to a personal computer by an appropriate cable. The CPLD reprogramming may be done by service engineers in the field, therefore it is essential to prevent reprogramming of the CPLD components related to safety and
30 make sure they are programmed only at the manufacturing site. Reprogramming of CPLDs which are intended for safety control in the field is dangerous since it

may hinder safe operation of the product, and thus may cause irreversible harm to the product operators, during product operation.

FIG. 1 shows several CPLD components (124, 128, 132) residing on electronic board 100. The JTAG interface is connected to each of the CPLD components by input and output pins (TDI, TDO) and timing and clock pins (TMS, TCK). The signals TDI, TDO, TMS and TCK are used for accessing and programming of the CPLDs residing on electronic board 100. The CPLD components are concatenated between each other via the input and output pins (TDI, TDO). The TDI signal from JTAG interface 108 is connected to first CPLD 124 via its TDI line. The output line TDO of CPLD 124 is further connected to the input line TDI of the next CPLD in the chain 128. The output pin TDO of the last CPLD in the chain 132 is connected to the TDO line of JTAG interface 108 to form a complete chain of the CPLDs on electronic board 100. The timing TMS and clock pin TCK are connected in parallel from JTAG interface 108 to all CPLDs (124, 128, 132) and controlled by timing and clock pins (TMS, TCK).

The programming of the CPLD components is performed by an external controller 104. The programming data is delivered to JTAG interface 108 via interface lines 112. The content of each of the CPLD components (124, 128, 132) can be independently programmed by controller 104. CPLD 124, which is selected to serve safety measures, has to be treated with more caution than other CPLDs, therefore programming of CPLD 124 should be permitted only once and at the manufacturing site only. Programming at a customer site is unacceptable.

SUMMARY OF THE INVENTION

Briefly, according to one aspect of the present invention an electronic circuit includes a plurality of programmable components connected in an electronic chain. An interface is adapted to connect the programmable components to an external controller wherein the controller is adapted to program the programmable components. A component isolation element is connected to the interface at an input end and to the electronic chain of the programmable components at an output end wherein the isolation element is adapted to isolate one component of the programmable components from the electronic chain and wherein the one component is a safety component.

The invention and its objects and advantages will become more apparent in the detailed description of the preferred embodiment presented below.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a prior art schematic showing several concatenated CPLD components;

FIG. 2 is a schematic showing the first CPLD (safety CPLD) concatenated with several other CPLD components before programming; and

FIG. 3 is a schematic showing the first CPLD (safety CPLD) concatenated with several other CPLD components after programming.

DETAILED DESCRIPTION OF THE INVENTION

In the following detailed description, numerous specific details are set forth in order to provide a thorough understanding of the disclosure. However, it will be understood by those skilled in the art that the teachings of the present disclosure may be practiced without these specific details. In other instances, well-known methods, procedures, components and circuits have not been described in detail so as not to obscure the teachings of the present disclosure.

FIG. 2 and FIG. 3 show an electronic board 200. Board 200 is formed with a similar configuration to the prior art shown with board 100 in FIG. 1. The difference between board 100 and board 200 is in that board 200 is equipped with electronic means adapted to isolate CPLD 124 from the other CPLD in CPLDs chain (128, 132).

The isolation of CPLD 124 which is the safety CPLD is achieved by addition of analog switches 204 and 212. Analog switch 204 switches line TDI between CPLD 124 and the chain of the other CPLDs (128, 132). Similarly analog switch 212 switches line TDO between CPLD 124 and the chain of the other CPLDs. The isolation of CPLD component 124 when residing in board 200 enables CPLD 124 to be limited to singular programming, thus prevents any further programming that may negatively affect safety conditions of the device.

The CPLD components (124, 128, 132) are not programmed at its original state. At the first power up the IO pins are in a logical tri state. FIG. 2 shows a pull down resistor R1 which sets IO pin into logical state "0" prior programming 224. At this state analog switch 204 connects input pin TDI to

OUT1 via switch 208, whereas analog switch 212 connects output pin TDO to IN1 via switch 216. Resistor R2 and capacitor C1 act as delay circuit. This setup isolates CPLD 124 for programming since TDI and TDO are connected only to CPLD 124 via analog switches 204 and 212. Program mode (program done) is
5 represented by line 220.

The next step is to program the safety CPLD 124. Controller 104 programs CPLD 124 via JTAG interface 108. FIG. 3 shows board 300 after programming of CPLD 124 is completed, IO pin of CPLD 124 is set to logical “1” state 312. At this stage analog switch 204 will set switch to state 304 thus
10 connecting TDI line to OUT2, whereas switch 212 will set to state 308 to connect TDO to IN2. This state will be kept forever; CPLD 124 is programmed and is disconnected from the chain of all other CPLDs (128, 132).

At this stage, any subsequent power up of the board at stage 300 will enable programming of any one of the CPLDs (128, 132) which are
15 connected in the chain, thus enabling programming of those CPLDs for maintenance reasons in the field. CPLD 124 will not be accessible for programming at stage 300 in the field, thus ensuring that the safety CPLD is not mutative any more.

PARTS LIST

100	electronic board
104	controller
108	JTAG interface
112	interface lines
124	first CPLD
128	second CPLD
132	last CPLD in chain
200	board before programming of CPLD 124
204	IN lines analog switch
208	switch 204 at OUT1 state: CPLD 124 before programming
212	OUT lines analog switch
216	switch 212 at IN1 state: CPLD 124 before programming
220	program mode line (program done)
224	IO pin at CPLD 124 before programming state
300	board after programming of CPLD 124
304	switch 204 at OUT2 state: CPLD 124 after programming
308	switch 212 at IN2 state: CPLD 124 after programming
312	IO pin at CPLD 124 after programming state
TDI	input pin
TDO	output pin
TMS	timing pin
TCK	clock pin

CLAIMS:

1. An electronic circuit comprising:
a plurality of programmable components connected in an electronic chain;
5 an interface adapted to connect said programmable components to an external controller wherein said controller is adapted to program said programmable components; and
a component isolation element connected to said interface at an input end and to said electronic chain of said programmable components at
10 an output end wherein said isolation element is adapted to isolate one component of said programmable components from said electronic chain and wherein said one component is a safety component.
2. The electronic circuit according to claim 1 wherein said
15 interface is a joint test action group (JTAG) interface.
3. The electronic circuit according to claim 1 wherein said component isolation element comprises:
a pull down resistor adapted to force an output pin from
20 said safety component to logical state zero at first power up of said electronic circuit;
a first analog switch adapted to link an input data line from said JTAG interface to said safety component before programming and to the chain of all the other programmable components after programming of said safety
25 component; and
a second analog switch adapted to link an output data line from said safety component to said interface before programming and to the chain of all the other programmable components after programming of said safety
30 component.
4. The electronic circuit according to claim 1 wherein said programmable component is a CPLD component.

5. A method for a singular programming a programmable component in an electronic circuit comprising:
- providing a plurality of programmable components
- 5 connected between each other in an electronic chain arrangement;
- providing an interface adapted to connect said programmable components to an external controller wherein said controller is adapted to program said programmable components;
- isolating a safety component by setting an output pin in said
- 10 safety component to logical state zero at first power up of said electronic circuit and wherein said logical state zero causes input data line and output data line from said interface to be connected just to said safety component;
- programming said safety component; and
- setting said output pin in said safety component to logical
- 15 state one wherein said logical state one causes input data line and output data line from said interface to disconnect from said safety component and connect to said electronic chain of said plurality of programmable components excluding said safety component.
- 20 6. The method according to claim 5 wherein said interface is a joint test action group (JTAG) interface.
7. The method according to claim 5 wherein said programmable component is a complex programmable logic device (CPLD)
- 25 component.

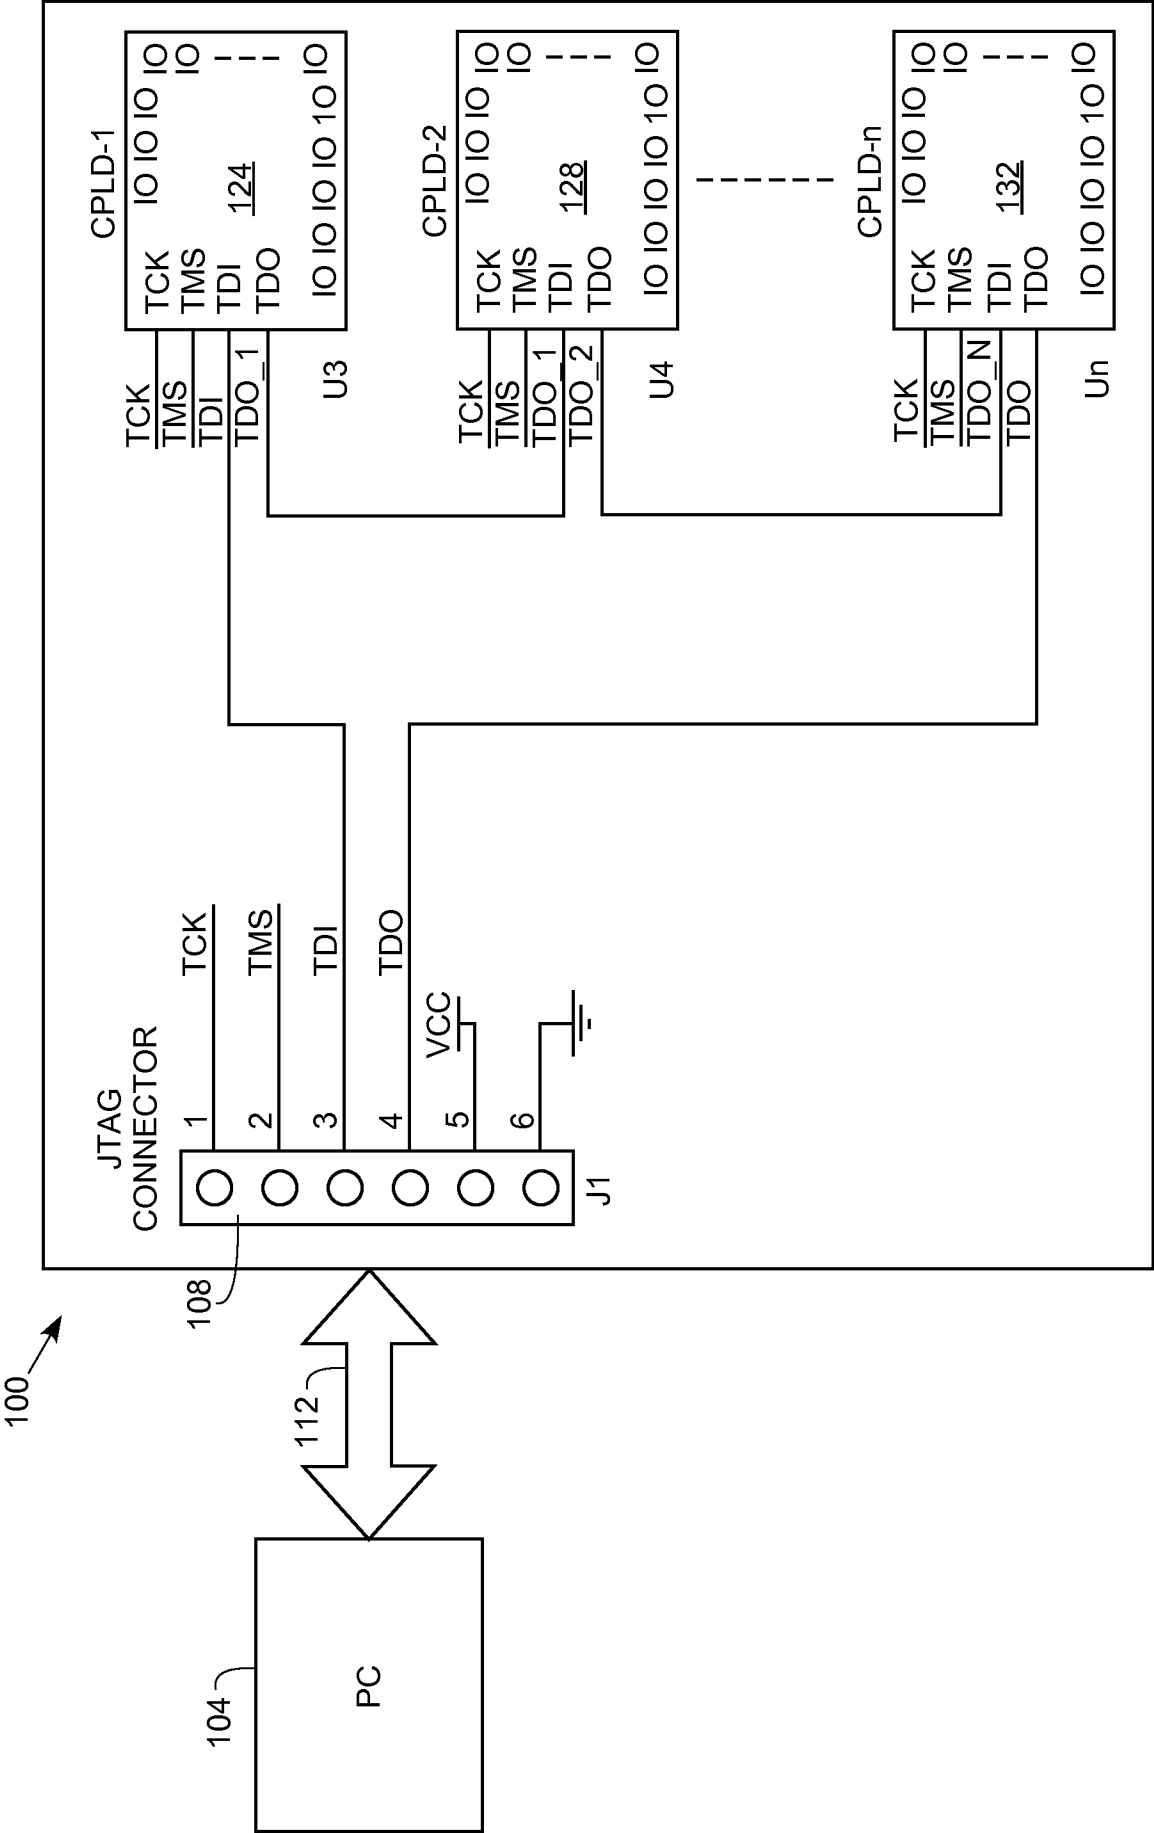
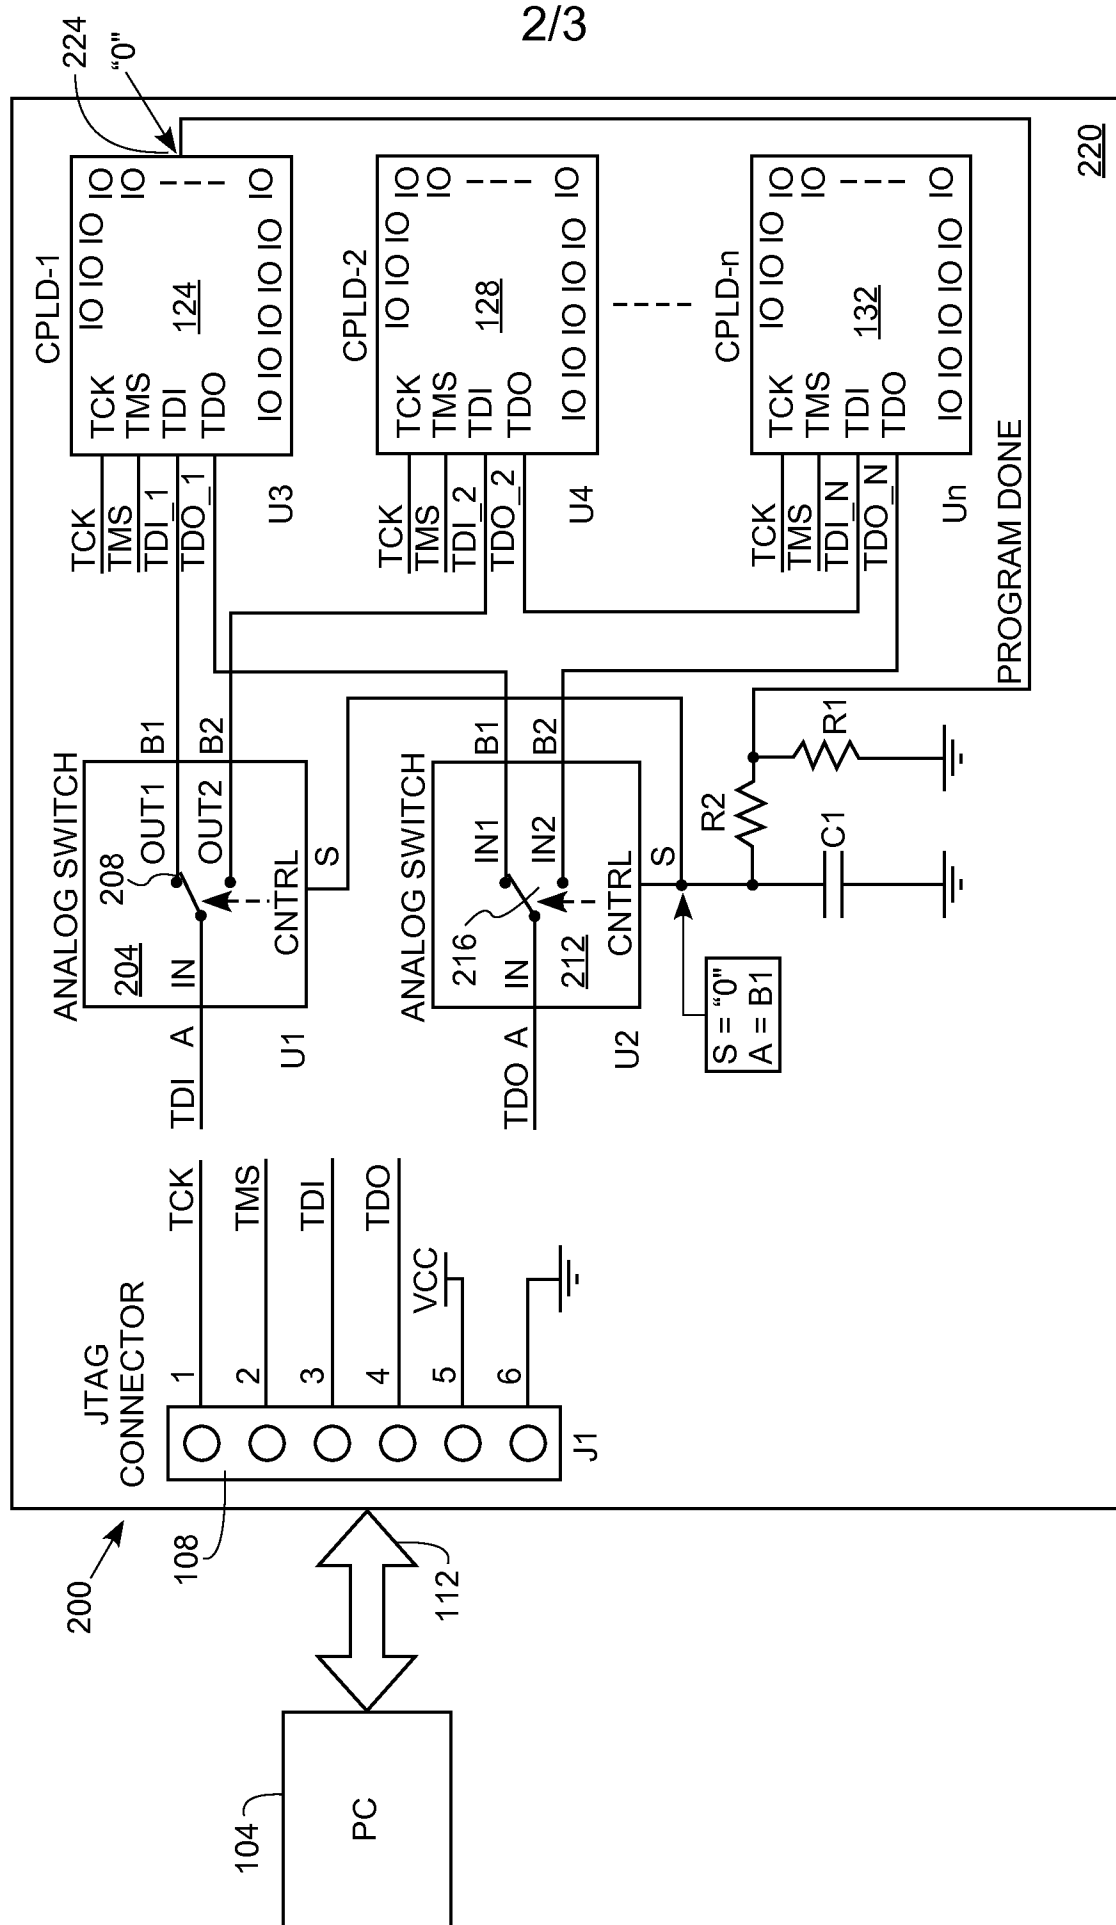


FIG. 1
(PRIOR ART)



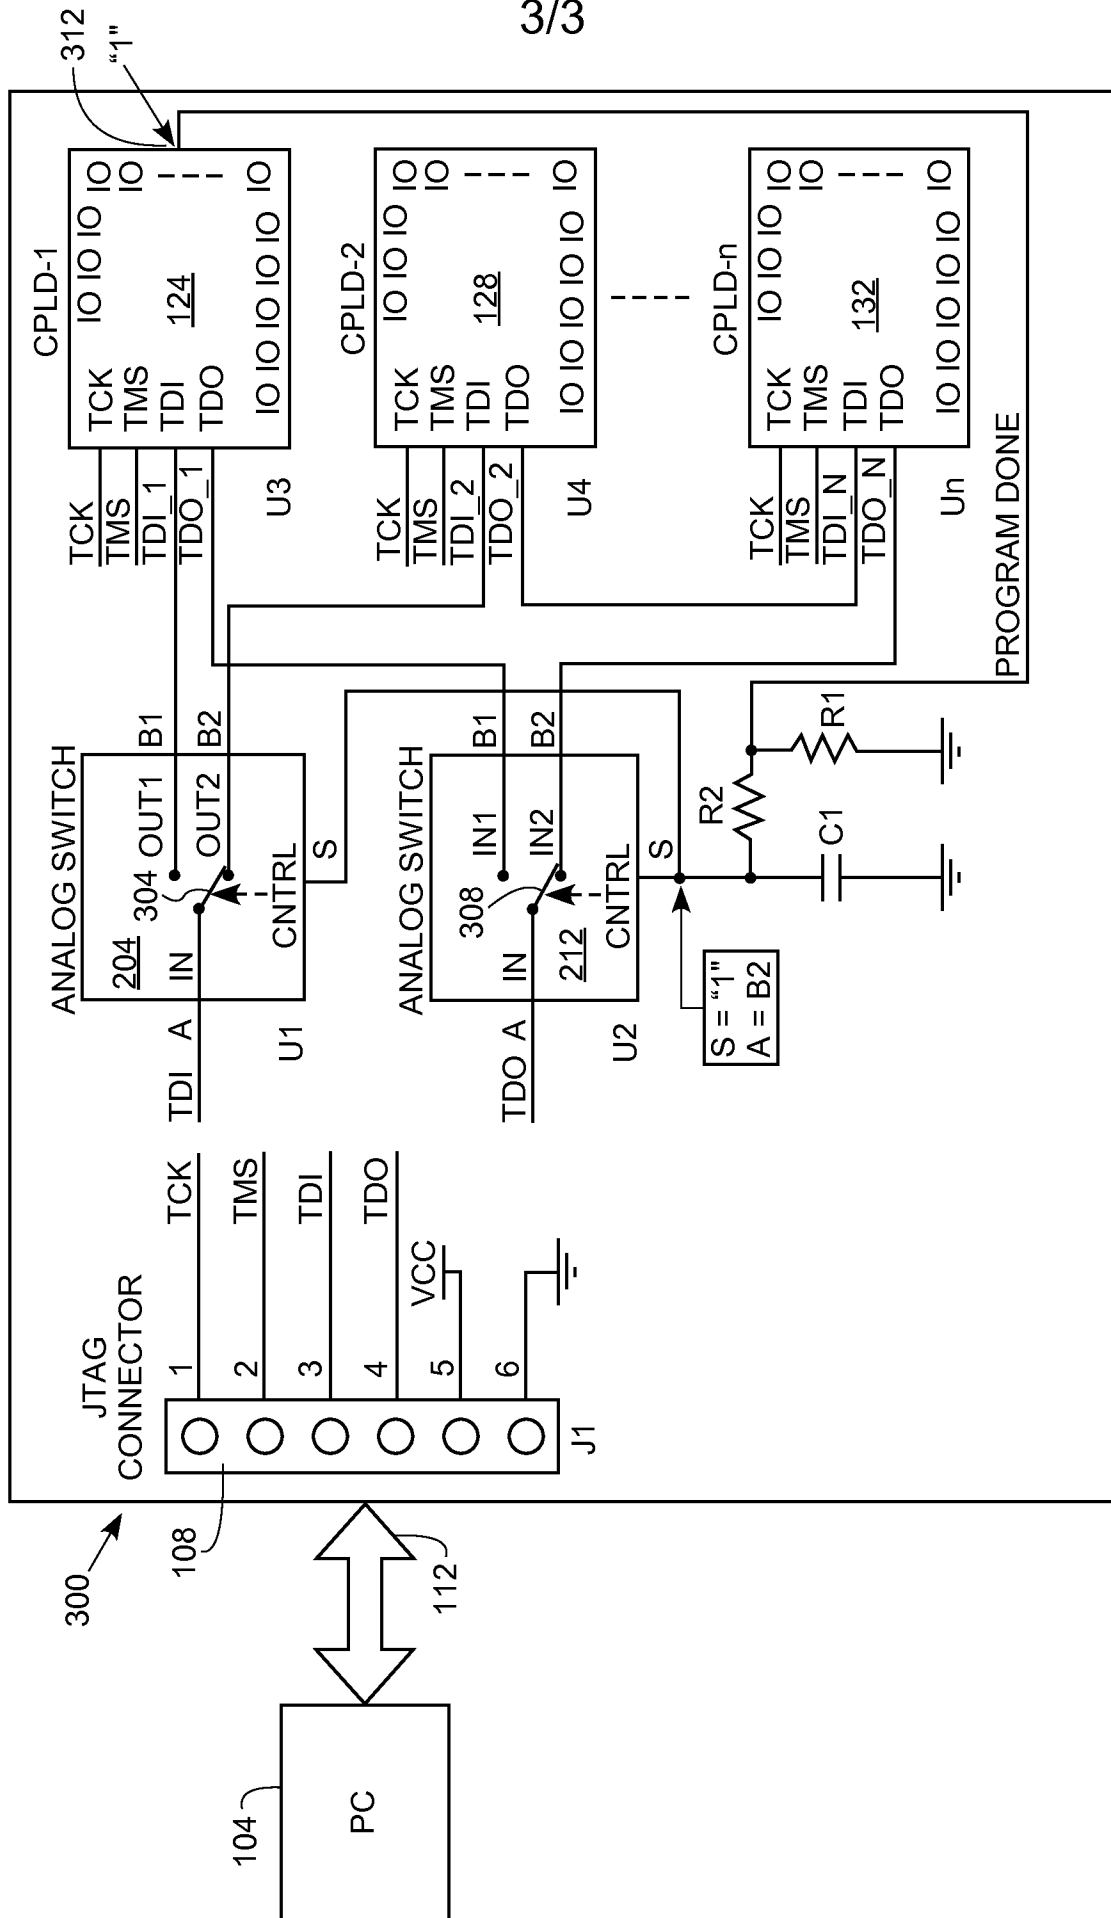


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2012/060750

A. CLASSIFICATION OF SUBJECT MATTER

INV. H03K19/177

ADD. G06F21/76

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H03K G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 7 345 502 B1 (LAKKAPRAGADA SHANKAR [US] ET AL) 18 March 2008 (2008-03-18) column 4, line 64 - column 5, line 29; figure 3 column 7, lines 2-44; figure 5A -----	1-7
X	US 2010/082928 A1 (BORCHERT JOERG [US] ET AL) 1 April 2010 (2010-04-01)	1,4
A	paragraphs [0015] - [0017]; figure 1 -----	2,3,5-7
A	US 2003/212897 A1 (DICKERSON RUSSELL [US] ET AL) 13 November 2003 (2003-11-13) paragraphs [0034] - [0038]; figures 4, 5A, 5B -----	1-7



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 January 2013

Date of mailing of the international search report

25/01/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Martínez Martínez, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/060750

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 7345502	B1	18-03-2008	NONE

US 2010082928	A1	01-04-2010	US 2010082928 A1 01-04-2010
			US 2010083367 A1 01-04-2010
			US 2010083384 A1 01-04-2010

US 2003212897	A1	13-11-2003	NONE
