

(19)



(11) Publication number:

SG 181545 A1

(43) Publication date:

30.07.2012

(51) Int. Cl:

B32B 21/08, B27N 7/00, C09D

101/00, E04F 15/10, B27N 3/04;

(12)

Patent Application

(21) Application number: **2012041695**

(71) Applicant:

**CERALOC INNOVATION BELGIUM
BVBA IT TOWER AVENUE LOUISE 480
B-1050 BRUSSELS BE**

(22) Date of filing: **22.12.2010**

(30) Priority: **SE 1050037-9 15.01.2010**

(72) Inventor:

**ZIEGLER, GÖRAN HÄSTHOVSVÄGEN
11 S-260 40 VIKEN SE
LINDGREN, KENT ALVÄGEN 41 S-284
32 PERSTORP SE**

(54) **Title:**

BRIGHT COLORED SURFACE LAYER

(57) **Abstract:**

A method to produce a pale and / or a plain coloured wear resistant surface layer by using a dry powder layer comprising a mix of refined fibres binder, pigment and wear resistant particles.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 July 2011 (21.07.2011)

(10) International Publication Number
WO 2011/087422 A1

(51) International Patent Classification:

B32B 21/08 (2006.01) *E04F 15/10* (2006.01)
B27N 7/00 (2006.01) *B27N 3/04* (2006.01)
C09D 101/00 (2006.01)

(21) International Application Number:

PCT/SE2010/051472

(22) International Filing Date:

22 December 2010 (22.12.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1050037-9 15 January 2010 (15.01.2010) SE

(71) Applicant (for all designated States except US): **CER-ALOC INNOVATION BELGIUM BVBA** [BE/BE]; IT Tower, Avenue Louise 480, B-1050 Brussels (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZIEGLER, Göran** [SE/SE]; Hästhovsvägen 11, S-260 40 Viken (SE). **LINDGREN, Kent** [SE/SE]; Alvägen 41, S-284 32 Perstorp (SE).

(74) Agent: **ENGSTRAND, Ola**; Prästavägen 513, S-263 65 Viken (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: BRIGHT COLORED SURFACE LAYER

Fig. 1

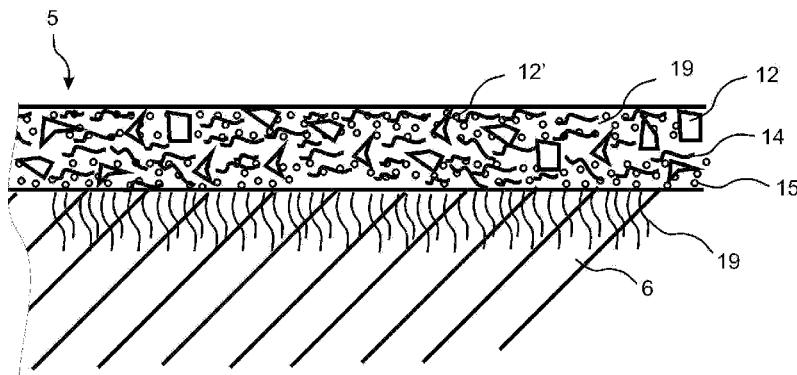

(57) Abstract: A method to produce a pale and / or a plain coloured wear resistant surface layer by using a dry powder layer comprising a mix of refined fibres binder, pigment and wear resistant particles.

BRIGHT COLORED SURFACE LAYER

Technical field

The disclosure generally relates to the field of fibre-based panels with wear resistant surface layers for building panels, preferably floor panels. The

5 disclosure relates to building panels with such wear resistance surface and to production methods to produce such panels.

Field of Application

The present disclosure is particularly suitable for use in floating floors, which are formed of floor panels with a wood fibre core and a decorative wear resistant

10 surface. The following description of technique, problems of known systems and objects and features of the invention will therefore, as a non-restrictive example, be aimed above all at this field of application and in particular at floorings which are similar to traditional floating wood fibre based laminate floorings. The disclosure does not exclude floors that are glued down to a sub floor.

15 It should be emphasized that embodiments of the disclosure can be used as a panel or as a surface layer, which is for example glued to a core. Embodiments of the disclosure can also be used in applications as for example wall panels, ceilings, and furniture components and similar. Embodiments could also be used in floorings with optional surface materials such as cork or wood, in order to

20 improve wear and design properties

Background

It is well known to produce laminated building panels with a surface comprising laminated paper sheets.

A new type of panel called Wood Fibre Floor (WFF) is disclosed in WO

25 2009/065769 which shows both products and methods to produce such a product. Direct pressed laminated building panels usually comprises a core of a 6-12 mm fibre board, a 0.2 mm thick upper decorative surface layer of laminate and a 0.1-0.2 mm thick lower balancing layer of laminate, plastic, paper or like material.

30 A laminated surface generally comprise two paper sheets, a 0.1 mm thick printed decorative paper and a transparent 0.05-0.1 mm thick overlay paper applied

over the decorative paper and intended to protect the decorative paper from abrasion. The print on the decorative non-transparent paper is only some 0.01 mm thick. The transparent overlay, which is made of refined α -cellulose fibres, comprises small hard and transparent aluminium oxide particles. The refined fibres are rather long, about 2-5 mm and this gives the overlay paper the required strength. In order to obtain the transparency, all natural resins that are present in the virgin wood fibres, have been removed and the aluminium oxide particles are applied as a very thin layer over the decorative paper. The surface layer of a laminate floor is characterized in that the decorative and wear resistance properties are generally obtained with two separate layers one over the other.

10 The printed decorative paper and the overlay are impregnated with melamine resin and laminated to a wood fibre based core under heat and pressure.

15 The small aluminium oxide particles could have a size in the range of 20 – 100 microns. The particles could be incorporated in the surface layer in several ways. For example they could be incorporated in the pulp during the manufacturing of the overlay paper. They could also be sprinkled on the wet lacquer during impregnation procedure of the overlay or incorporated in the lacquer used for impregnation of the overlay.

20 The wear layer could also be produced without a cellulose overlay. In such a case melamine resin and aluminium oxide particles are applied as a lacquered layer directly on the decorative paper with similar methods as described above. Such a wear layer is generally referred to as liquid overlay.

25 With this production method a very wear resistance surface could be obtained and this type of surface is mainly used in laminate floorings but it could also be used in furniture components and similar applications. High quality laminate floorings have a wear resistance of 4000-6000 revolutions, which corresponds to the abrasion classes AC4 and AC5 measured with a Taber Abraser according to ISO-standard.

30 It is also known that the wear resistance of a lacquered wood surface could be improved considerably by incorporating aluminium oxide particles in the transparent lacquer covering the wood surface.

The most common core material used in laminate floorings is fibreboard with high density and good stability usually called HDF – High Density Fibreboard. Sometimes also MDF – Medium Density Fibreboard – is used as core. Other core materials such as particleboard are also used.

5 The WFF floor panels are “paper free” with a surface layer comprising a substantially homogenous mix of wood fibres, binders and wear resistant particles. The wear resistant particles are preferably aluminium oxide particles and the binders are preferably thermosetting resins such as melamine. The wear resistant particles are provided throughout the thickness of the surface layer

10 from the top to the bottom and in contact with the core of the panel. Other suitable materials are for example silica or silicon carbide. In general all these materials are preferably applied in dry form as a mixed powder on a HDF core and cured under heat and pressure to a 0.2 – 1.0 mm surface layer.

Definition of Some Terms

15 In the following text, the visible surface of the installed floor panel is called "front side", while the opposite side of the floor panel, facing the sub floor, is called "rear side". The sheet-shaped material that comprises the major part of a panel and provides the panel with the required stability is called "core". When the core is coated with a surface layer closest to the front side and preferably also a

20 balancing layer closest to the rear side, it forms a semi-manufacture, which is called "floor board" or "floor element" in the case where the semi-manufacture, in a subsequent operation, is divided into a plurality of floor elements. When the floor elements are machined along their edges so as to obtain their final shape with the joint system, they are called "floor panels". By "surface layer" is meant all layers which give the panel its decorative properties and its wear resistance and which are applied to the core closest to the front side covering preferably the entire front side of the floorboard. By "decorative surface layer" is meant a layer, which is mainly intended to give the floor its decorative appearance. "Wear layer" relates to a layer, which is mainly adapted to improve the durability of the front side.

30 By "horizontal plane" is meant a plane, which extends parallel to the outer part of the surface layer. By “horizontally” is meant parallel to the horizontal plane and

by "vertically" is meant perpendicularly to the horizontal plane. By "up" is meant towards the front side and by "down" towards the rear side.

Summary of the Invention

An overall objective of embodiments of the disclosure is to provide a building panel, preferably a floor panel with a pale and/or plain colour, e.g. bright white, wear resistant layer that could be produced in a more cost effective way than with the present known technology.

The methods described in WO 2009/065769 include the use of virgin or recycled wood fibres that have the limitation that while using pigments intended to give pale colours, e.g. bright white colour, or very intense colours, the natural colour of the virgin or recycled wood fibre give a less pale or less colourful result due to the natural resins of the fibres. The natural resin makes it difficult to achieve the desired colour and might cause areas that are discoloured. The problems of limited colourfulness could be solved by increasing the amount of the pigments, but this is a rather expensive solution and high pigment loadings could cause other problems such as a pigment bleed.

Conventional laminated floors panels have a limitation in making pale coloured or intensively colored surfaces, due to the limited transparency of the highly wear resistant overlays.

A solution to the problems is to use a dry powder layer comprising a mix of refined fibres binder, pigment and wear resistant particles.

An aspect of the invention is a production method to produce a pale coloured wear resistant surface layer comprising the steps of:

- Applying a dry powder layer comprising a mix of refined fibres, binder, pigment and wear resistant particles on a carrier; and
- Curing the mix to a colourful or bright white wear resistant layer by applying heat and pressure on the mix.

The binder is preferably a melamine resin and the wear resistant particles aluminium oxide. The pigments for making bright white products are preferably titanium dioxide, lead oxide or other commonly used pigments. The pigments for making very colourful products are a broad variety of both inorganic and organic

origin.

The carrier on which the mix is applied is preferably an HDF panel and the resulting panel thereby has wear resistant particles throughout the thickness of the surface layer from the top to the bottom and in contact with the core of the panel.

The refined fibres are fibres that are predominantly free from the natural resins typically found in wood fibres or other natural fibres. Such fibres can be achieved through washing, extraction, bleaching or combinations thereof. An example of such a fibre is Technocel® 150 TAB which can be provided by the company CFF (Germany).

In a preferred embodiment, the amount of resin compared to the amount of refined fibres, e.g., white fibres, in the dry powder layer is higher than about 100%, preferably above about 120% and most preferably in the range of about 120% to 180%. Such ratios have the effect that the processability is increased and that the stain resistance is improved.

A sublayer, a layer scattered on the core, in combination with the dry powder layer above the sublayer, gives even better processability such as embossing depth and higher gloss. In embodiments, the sublayer comprises wood fibres, preferably natural wood fibres or HDF fibres, though refined fibres may be used, and a resin. In a preferred embodiment, the amount of resin compared to the amount of wood fibres is less than about 100%, preferably below about 200%, more preferably below about 300%, and possibly even below about 400%.

A top layer of refined fibres, without any aluminium oxide, placed above the dry powder layer further improves the stain resistance. It also increases the lifetime of the press plates.

Embodiments of the disclosure include the following combination of layers: (1) a sublayer and a dry power layer; (2) a dry powder layer and a top layer; and (3) a sublayer a dry powder layer and a top layer.

It is also possible to use a mix of refined fibres and HDF fibres or any natural wood fibres, i.e., wood fibres that are not refined, in order to decrease the cost and or create other colours.

Many combinations of the ingredients can be made into fully functional products. Two examples are given as to show two functional prototypes of the innovation.

Brief Description of the Drawings

The disclosure will in the following be described in connection to preferred

5 embodiments and in greater detail with reference to the appended exemplary drawing, wherein

Fig 1 Illustrates a floor panel according to an embodiment of the disclosure.

Detailed Description of Embodiments

10 A panel 1 is provided with a wood fibre based core 6, a homogenous non-transparent decorative surface layer 5 and preferably a balancing layer. The panel 1 is in one embodiment integrally formed in a production process where the surface layer, the core and the balancing layer are formed in the same pressing operation.

15 Figure 1 shows the surface layer 5. It comprises a mixture of refined fibres 14, small hard wear resistant particles 12, 12' and a binder 19. The wear resistant particles (12,12') are preferably aluminium oxide particles.

The surface layer comprises also colour pigments 15 and/or, optionally, other decorative materials or chemicals. Decorative materials include, for example, 20 materials that may affect design aspect(s) the surface layer. Exemplary design materials include materials effecting texture, reflectivity, shine, luminescence, transparency, etc.

Embodiments of the disclosure offer the advantage that the wear resistant surface layer 5 could be made much thicker than in the known laminated floor 25 panels.

A preferable binder is melamine or urea formaldehyde resin. Any other binder, preferably synthetic thermosetting resins, could be used.

In the method according to embodiments of the invention preferably the same scattering and pressing units as disclosed in WO 2009/065769 are used,

30 preferably together with a structured press plate in the method.

Example W1: Bright white formulation

On a HDF board with a thickness of 9.8 mm, two backing papers NKR 140 where fixed on backside for balancing, a WFF powder formulation was added, consisting of 40 Wt% refined fibre, 10 Wt% aluminium oxide, 10 Wt% titanium dioxide as pigment and 40 Wt% melamine resin. The WFF powder mix was applied by a so-called scattering machine, which distributed the WFF powder material evenly over the HDF surface. The total amount of WFF powder was 625 g/m². The WFF powder was fixed on the HDF board by spraying a water solution consisting of 97 Wt% de-ionized water, 1 Wt% BYK-345 (wetting agent added to reduce surface tension) and 2 Wt% of Pat 622/E (release agent) on the WFF powder.

The above material was placed into a so-called DPL press. The surface texture consists of a special press plate with hills and valleys with about 300 microns in difference in highest and lowest part. This deep press plate cannot be used when pressing DPL and HPL, the melamine impregnated papers cracks during the pressing. The resulting product is a bright white building panel.

Further examples of powder mixtures are listed below.

| Type | W1 | W2 | W3 | W4 | Sublayer | W5 |
|------------------------------------|------------|------------|------------|------------|------------|------------|
| HDF Fibre Wt% | 0 | 0 | 0 | 0 | 75 | 0 |
| White Fibre Wt% | 40 | 40 | 35 | 30 | 0 | 39 |
| Prefere 4865 Wt% | 0 | 40 | 45 | 52 | 25 | 0 |
| Kauramine 773 Wt% | 40 | 0 | 0 | 0 | 0 | 50 |
| TiO ₂ Wt% | 10 | 10 | 10 | 9 | 0 | 11 |
| Al ₂ O ₃ Wt% | 10 | 10 | 10 | 9 | 0 | 0 |
| Total Wt% | 100 | 100 | 100 | 100 | 100 | 100 |

In the mixtures above Prefere 4865 and Kauramine 773 are used, which are examples of melamine formaldehyde resins

For W3 and W4 the ratio of resin compared to the White Fibres (refined fibres) is increased. The increased ratio has the effect that the processability is increased and that the stain resistance is improved. In a preferred embodiment the ratio of resin compared to the White Fibres is higher than about 100%, preferably above about 120 % and most preferably in the range of about 120% to 180%.

A sublayer, a layer scattered on the core, in combination with any one of the layers W1 – W4 above the sublayer gives even better processability such as embossing depth and higher gloss.

A top layer, such as W5, without any aluminium oxide above any one of the

5 layers W1 – W4 further improves the stain resistance. It also increases the life time of the press plates.

Example R2: Colorful red formulation

On a HDF board with a thickness of 9.8 mm, two backing papers NKR 140 where fixed on backside for balancing, a WFF powder formulation was added, 10 consisting of 42.5 Wt% refined fibre, 10 Wt% aluminium oxide, 5 Wt% Heucosin Spez. Tomatenrot G 10138 as red pigment and 42.5 Wt% melamine resin. The WFF powder mix was applied by a so-called scattering machine, which distributed the WFF powder material evenly over the HDF surface. The totally amount of WFF powder was 625 g/m². The WFF powder was fixed on the HDF 15 board by spraying a water solution consisting of 97 Wt% de-ionized water, 1 Wt% BYK-345 (wetting agent added to reduce surface tension) and 2 Wt% of Pat 622/E (release agent) on the WFF powder.

The above material was placed into a so-called DPL press. The surface texture consists of a special press plate with hills and valleys with about 300 microns in 20 difference in highest and lowest part. This deep press plate can not be used when pressing DPL and HPL, the melamine impregnated papers cracks during the pressing. The resulting product is a colourful plain red building panel not easily obtained without the refined fibre.

The water solution sprayed on the WFF powder may include, for example, 80-25 100 Wt% water, preferably de-ionized water, 0-10 Wt% of a wetting agent, and 0-10 % of a release agent. More preferably, the water solution may include, for example, 95-98.5 Wt% water, preferably about 97 Wt%, 0.5-2 Wt% wetting agent, preferably about 1 Wt%, and 1-3 Wt% release agent, preferably about 2 Wt%.

CLAIMS

1. A method of manufacturing a wear resistant surface layer comprising the steps of:

- 5 • applying a dry powder layer comprising a mix of refined fibres, binder, pigments and wear resistant particles on a carrier; and
- curing the mix to a pale colored wear resistant layer by applying heat and pressure on the mix.

2. The method as claimed in claim 1 or 2, wherein the decorative layer is attached to a wood fibre based core to obtain a panel.

10 3. The method as claimed in any one of the preceding claims, wherein the panel is a floor panel.

4. The method as claimed in any one of the preceding claims, wherein the wear resistant particles are aluminium oxide.

15 5. The method as claimed in any one of the preceding claims, wherein the thickness of the cured layer is less than about 1 mm.

6. The method as claimed in any one of the preceding claims, wherein the pale colour wear resistant surface layer is bright white or red.

7. The method as claimed in any one of the preceding claims, wherein the decorative layer is attached to an HDF panel.

20 8. The method as claimed in any one of the preceding claims, wherein the thickness of the cured layer is less than about 0.3 mm.

9. The method as claimed in any one of the preceding claims, wherein the ratio of resin compared to refined fibres is higher than about 100%,

25 10. The method as claimed in any one of the preceding claims, wherein the ratio of resin compared to refined fibres is higher than about 120%

11. The method as claimed in any one of the preceding claims, wherein the ratio of resin compared to refined fibres is in the range of about 120% to about 180%.

12. The method as claimed in any one of the preceding claims, comprising the step of scattering a sublayer on the core.

13. The method as claimed in any one of the preceding claims, comprising the step of scattering a top layer above the dry powder layer.

5 14. The method as claimed in claim 1, wherein the surface layer is pale and/or plain coloured.

15. A floor panel produced according to the method in any one of the preceding claims.

16. The floor panel as claimed in claim 15, wherein the surface layer of the

10 floor panel is of pale and/or plain colour.