

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 November 2004 (25.11.2004)

PCT

(10) International Publication Number
WO 2004/101440 A1

(51) International Patent Classification⁷: **C02F 1/04**,
B01D 1/22, 1/26

(74) Agent: **OY JALO ANT-WUORINEN AB**; Iso
Roobertinkatu 4-6 A, FI-00120 Helsinki (FI).

(21) International Application Number:
PCT/FI2004/000292

(22) International Filing Date: 14 May 2004 (14.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20030735 16 May 2003 (16.05.2003) FI

(71) Applicant (for all designated States except US): **STERIS
EUROPE INC. SUOMEN SIVULIIKE** [FI/FI]; Teollisu-
ustie 2, FI-04300 Tuusula (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NURMINEN,
Teppo** [FI/FI]; Uurrekuja 35, FI-01650 Vantaa (FI).
SALMISUO, Mauri [FI/FI]; Marsuntie 12-14 C 11,
FI-04320 Tuusula (FI).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR TREATING WATER

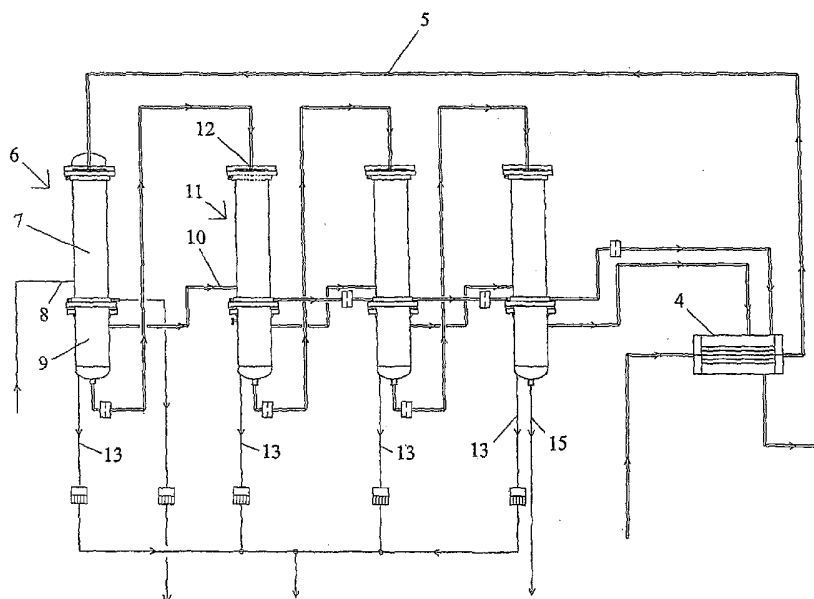

(57) Abstract: In a multi-effect falling-film evaporator, purified water for special purposes is produced. In each effect, a steam phase and a water phase is produced from the feed water. The steam phase is used for heating in the subsequent effect, whereby it condenses to product water, and the water phase becomes the feed stream for the subsequent effect. A reject stream is removed from the process to carry off impurities separated from the water. According to the invention, a reject stream is removed from each effect. Preferably, each reject stream is a condensed fraction of the steam generated in the respective effect.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

METHOD AND DEVICE FOR TREATING WATER

Field of the invention

The invention relates to the production of highly purified water for special purposes. Particularly, the invention relates to the production of purified water using falling-film evaporators with subsequent condensation.

Background of the invention

For the purpose of this text, "purified water" means generally water of greater purity than ordinary potable water available from e.g. a municipal water distribution system. Highly purified water is required e.g. for various medical purposes, such as production of pharmaceuticals, and in the production of "water for injection", the quality of which is defined in official pharmacopoeias. Plants for producing such purified water may be designed as so-called multi-effect stills, employing a series of falling film evaporators. A falling film evaporator comprises a vertical bundle of evaporation tubes enclosed into a heating jacket. Water fed into the evaporating tubes at their upper end flows down the inner surface of the tubes, thereby evaporating and forming steam, which emerges at the lower ends of the tube bundle together with any un-vaporized water. In many devices for producing highly purified steam or water, the flow of steam makes a 180° turn and flows upwards in a rising space provided therefore, while the remaining water collects at the bottom of the device.

The upward-flowing steam may, depending on the type of device, undergo various kinds of demisting and/or purification operations, whereby the separated droplets and impurities finally join the water phase at the bottom of the effect while the steam enters the heating jacket of the subsequent effect. The water phase becomes the feed water of the subsequent effect and the steam condenses, giving off its heat to cause more steam to evaporate from the feed water, and the cascade continues until the last effect is reached. The combined condensates from the heating jackets, together with the steam from the last effect, are cooled and condensed, respectively, in a final heat exchanger to form the purified product water.

30

In prior art multi-effect falling-film plants for producing purified water, the feed to each effect generates a steam phase and a residual leaving water phase. The residual water phase then, in its entirety, generates the feed for the next effect and so on, until the last effect is reached. The residual water in the last effect represents the reject fraction containing the impurities.

35

In this context, a reject stream is a stream of water, which is permanently removed from the process. Generally, the reject stream is liquid water, but may be a steam-liquid mixture. A continuous process for producing pure water by evaporation must include the removal of a sufficient amount of reject water to carry away the separated impurities. The ratio of re-

5 reject water to product water is an important aspect of the efficiency of the process. It follows from the material balance, that if the reject stream is insufficient, the impurities either accumulate in the device or leave with the product, which both alternatives are highly undesirable.

10 In Finnish patent application 20021538, a unit for producing pure steam is disclosed. This device includes a particular purification section for the steam, having a rising spiral path following the evaporation section, which is a falling-film unit as described above. In the outer wall of the spiral path, apertures are provided, and outside said apertures a cool surface. This arrangement creates a pressure gradient across the apertures due to condensation

15 of steam on the cool surface, causing impurity-containing droplets to migrate through the apertures and collect on the cool surface. The least pure component of the rising stream in the spiral path thus travels to the periphery and leaves through the apertures, condenses on the cool surface and forms a water phase rich in impurities, which flows down the cool surface. This water phase rich in impurities may be isolated and not returned to the process,

20 but separated as a reject stream.

In Japanese patent 10328501, a two-effect falling film evaporator is disclosed having a centrifugal demister adapted to the second effect. The steam phase from the first effect enters the demister, droplets are separated and form a stream, which can be discharged or

25 conducted to the pipe transferring the liquid phase from the first to the second effect. The demisted steam phase enters the heating side of the second effect.

Summary of the invention

The present invention relates to the production of purified water in a multi-effect still or

30 evaporation plant utilizing the type of devices described above for purified steam production. A falling-film evaporation plant for the production of purified water may comprise a plurality of evaporation stages or effects. Water is fed to each effect, and water and steam leaves each effect. According to the present invention, a reject stream is withdrawn from each effect. Thus, each effect in a multi-effect falling-film evaporation plant for producing

purified water comprises means for the withdrawal of a reject stream. In one embodiment of the present invention, the reject stream may be withdrawn as liquid water from the fraction of water that is not vaporized in an evaporation section, i.e. the residual water. A fraction of the residual water phase may thus be split off before it is conducted to the subsequent effect.

According to a preferable embodiment, each effect as a physical unit comprises a rising channel for the steam phase generated in the effect, and means for separating an impurity-containing fraction from the rising steam. The "steam phase" in this context is a water vapor phase in the vicinity of its saturation point, and thus generally contains minute water droplets. The impurity-containing fraction, which may thus comprise steam and water droplets, is permanently separated from the process and not passed on to the next effect. Preferably, the fraction is essentially allowed to condense to be withdrawn in the form of liquid water.

Thus, the effect units all comprise the same components, i.e. falling-film heat transfer channels, water phase collection compartment, steam phase rising channel with droplet separator, and collection compartment for the separated droplets.

The present invention provides several advantages, particularly in the embodiment described above. The total amount of reject water is decreased, as a smaller proportion is required to carry impurities. A greater proportion of water can be evaporated in each effect, compared to the prior art. The impurities separated from the feed in each effect are not carried over to the next effect, and do not come into contact with heat exchange surfaces further downstream. Scaling is thus avoided. The recycling of the residual water from the last effect is also made feasible, as this fraction does not contain such an increased level of impurities as in the prior art.

Brief description of the drawing

The invention is more thoroughly disclosed in the following, with reference to the appended figure, which schematically shows the main components of a plant according to the invention.

Disclosure of the invention

Figure 1 shows an embodiment of a four-effect production plant for pure water according to the invention. Feed water, preferably purified by means of filtering and ion exchange or
5 other appropriate methods, enters at inlet 1. After passing heat recovery exchanger 4, the feed stream enters, through transfer line 5, the first falling-film evaporation unit 6. Transfer line 5 may be provided with additional heat exchange devices to improve the overall heat recovery, as the person skilled in the art may contemplate.

10 Plant steam or another primary heat transfer medium entering at inlet 8 heats the shell side of the falling film evaporation section 7. As the feed water flows down as a film on the inner walls of the evaporating tubes (not shown), the water partly evaporates into steam, which emerges from the lower end of the tubes together with the remaining water. Within separation section 9, the steam makes a 180° turn and enters a rising channel. After passing
15 the rising channel, the steam is led through transfer line 10 to the shell side of the falling film evaporation unit of the subsequent effect 11. The water phase collects on the bottom of the effect, leaves the effect at outlet 2 and is conducted to the feed inlet 12 of the subsequent effect. A reject stream is withdrawn via conduit 13.

20 In each evaporation effect, the same sequence occurs. Feed water is partially evaporated to steam in the falling film section. The steam generated in each effect is carried over to heat the feed water in the subsequent effect, and the residual water that has not been converted into steam becomes the feed water of the next effect. The residual water from the last effect may be discarded or recycled.

25

In an embodiment of separation section 9, disclosed in greater detail in Finnish patent application 20021538 referred to above, the rising channel for steam generated in each effect has the form of a spiral pathway, causing the impurity-containing droplets entrained in the steam to travel to the periphery of the spiral, where they migrate through apertures in the
30 outer wall of the rising channel. Outside the apertures, the droplets, along with steam, condense on a surface having a temperature sufficiently low for this to occur. The water film forming on this surface, containing the separated impurities, flows down by gravity and the water is collected in a separate, isolated shell space, from where a reject stream is withdrawn.

Thus, in an embodiment of this type having means for separating a fraction of the generated steam, the steam in each effect is depleted of a contaminant-enriched fraction in the corresponding separation section; these fractions are isolated in separate compartments and
5 form reject streams, exiting via conduits 13 in Fig.1. Preferably, the reject lines are provided with steam traps 16. As impurities are removed from all effects from the first onwards, they are not accumulated in the final residual water as in the prior art.

The stream leaving the shell side of the falling film section of the first effect is commonly
10 factory steam condensate, and is removed at outlet 3. The primary heat source can also be another heat transfer medium, whereby appropriate re-circulation is provided, or electrical heating elements.

Beginning from the second effect, the condensate from the shell side of the falling film
15 section, which condensate stems from the evaporated part of the initial feed water, is collected and fed to the shell side of the falling film section of the next effect. Thus, the evaporated fractions are finally combined in the shell of the final effect, from which they are taken out and cooled in a heat exchanger 4 together with the steam phase of the final effect. Preferably, this heat exchanger delivers heat to the initial feed water stream.

20 The temperature and pressure conditions in the individual effects are adjusted as required. In the first effect, the temperature corresponds to that of the primary heating medium, resulting in a corresponding steam pressure. Throttle devices may be provided between effects, and the pressure decreases sequentially until preferably being near atmospheric in the
25 final effect.

From the last effect, a residual water phase is withdrawn at outlet 15 and may be discarded as an additional reject stream, recycled, or split between these.

30

Claims

1. A method for producing purified water using a multi-effect falling-film evaporation process, whereby in each effect steam and water are produced from feed water, and residual water from each evaporation effect is supplied as feed water to the subsequent effect,
5 **characterized** in that from each evaporation effect, a fraction is removed as a reject stream.
2. The method according to claim 1, **characterized** in that the reject stream is a fraction
10 separated from the steam phase produced in the respective effect.
3. The method according to claim 2, **characterized** in that the fraction of the steam phase is essentially condensed to liquid water.
- 15 4. A device for the production of purified water comprising a plurality of effects, each effect having a falling film evaporation section and a separation section, the separation section having a channel for conducting steam from the unit and a channel for conducting liquid water to a subsequent unit, **characterized** in each unit having a conduit for conducting a reject stream out of the unit.
20
5. The device according to claim 4, **characterized** in that the separation section comprises in the channel for conducting steam, means for separating a fraction of the steam.
6. The device according to claim 5, **characterized** in that the means for separating part of
25 the steam comprises a spiral channel.
7. The device according to claim 5 or 6, **characterized** in that the separation section comprises an isolated compartment for collecting the separated steam, and that the conduit for conducting a reject stream out of the effect is connected to said compartment.

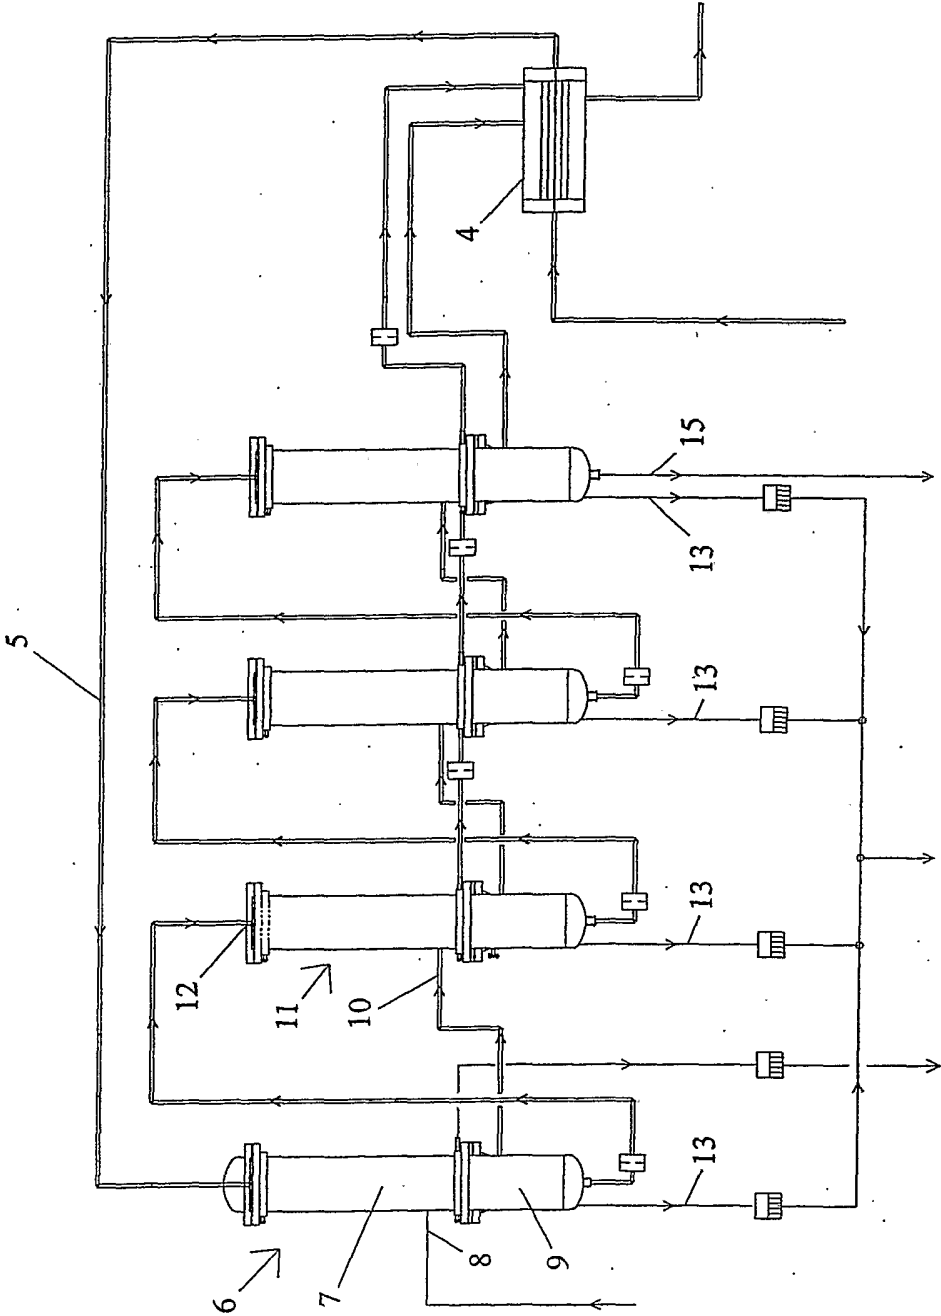


Fig. 1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 2004/000292

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: C02F 1/04, B01D 1/22, B01D 1/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B01D, C02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL WPI DATA

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4981555 A (KLAUS HOHMANN ET AL), 1 January 1991 (01.01.1991), column 2, line 28 - line 30; column 3, line 4 - line 6; column 3, line 6 - line 9, column 3, line 13 - line 15; column 3, line 33 - line 34; figure 1	1-4
Y	--	5-7
Y	WO 0224299 A1 (STERIS EUROPE INC. SUOMEN SIVULIIKE), 28 March 2002 (28.03.2002), page 3, line 11 - page 4, line 7, figure 2 -----	5-7

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 Sept 2004

Date of mailing of the international search report

15-09-2004

Name and mailing address of the ISA/

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Bengt Christensson/MP
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

31/07/2004

International application No.

PCT/FI 2004/000292

US	4981555	A	01/01/1991	AT	77966	T	15/07/1992
				BR	8901953	A	21/08/1990
				CA	1325967	A,C	11/01/1994
				DE	3834716	A	19/04/1990
				DE	58901812	D	00/00/0000
				EP	0365060	A,B	25/04/1990
				SE	0365060	T3	
				ES	2033080	T	01/03/1993
				FI	92471	B,C	15/08/1994
				FI	894005	A	13/04/1990
				JP	2157001	A	15/06/1990
				JP	3040785	B	15/05/2000
				PT	91950	A,B	30/04/1990
WO	0224299	A1	28/03/2002	AU	8996501	A	02/04/2002
				CA	2422943	A	28/03/2002
				CN	1466479	T	07/01/2004
				EP	1324810	A	09/07/2003
				FI	112781	B	00/00/0000
				FI	20002104	A	26/03/2002
				JP	2004508922	T	25/03/2004
				US	6656327	B	02/12/2003
				US	2002038760	A	04/04/2002
