



- (51) International Patent Classification:
H01L 27/115 (2006.01) *H01L 21/8247* (2006.01)
- (21) International Application Number:
PCT/US2011/066770
- (22) International Filing Date:
22 December 2011 (22.12.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/010,048 20 January 2011 (20.01.2011) US
- (71) Applicant (for all designated States except US): **MICRON TECHNOLOGY, INC.** [US/US]; 8000 South Federal Way, Boise, ID 83716 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LIU, Zengtao, T.** [CN/US]; 13582 W. Annabrook Dr., Boise, ID 83713 (US). **WELLS, David, H.** [US/US]; 300 Fall Drive, Boise, ID 83706 (US).
- (74) Agents: **MATKIN, Mark** et al.; **WELLS ST. JOHN P.S.**, 601 West Avenue, Suite 1300, Spokane, WA 99201 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: ARRAYS OF NONVOLATILE MEMORY CELLS AND METHODS OF FORMING ARRAYS OF NONVOLATILE MEMORY CELLS

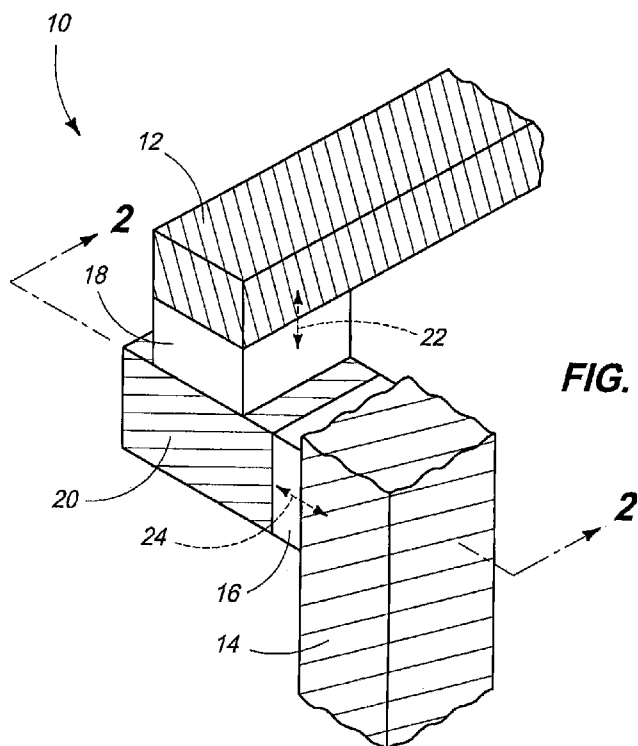


FIG. 1

(57) Abstract: A nonvolatile memory cell includes first and second electrodes. Programmable material and a select device are received in series between and with the first and second electrodes. Current conductive material is in series between and with the programmable material and the select device. An array of vertically stacked tiers of such nonvolatile memory cells is disclosed. Methods of forming arrays of nonvolatile memory cells are disclosed.

ARRAYS OF NONVOLATILE MEMORY CELLS AND METHODS OF FORMING ARRAYS OF NONVOLATILE MEMORY CELLS

TECHNICAL FIELD

5 [0001] Embodiments disclosed herein pertain to nonvolatile memory cells, to arrays of nonvolatile memory cells, and to methods of forming arrays of nonvolatile memory cells.

BACKGROUND

10 [0002] Memory is one type of integrated circuitry, and is used in computer systems for storing data. Such is usually fabricated in one or more arrays of individual memory cells. The memory cells might be volatile, semi-volatile, or nonvolatile. Nonvolatile memory cells can store data for extended periods of time, in many instances including when the computer is turned off. Volatile memory
15 dissipates and therefore requires being refreshed/rewritten, in many instances multiple times per second. Regardless, the smallest unit in each array is termed as a memory cell and is configured to retain or store memory in at least two different selectable states. In a binary system, the states are considered as either a "0" or a "1". In other systems, at least some individual memory cells may be configured to
20 store more than two levels or states of information.

[0003] Integrated circuitry fabrication continues to strive to produce smaller and denser integrated circuits. Accordingly, the fewer components an individual circuit device has, the smaller the construction of the finished device can be. Likely the smallest and simplest memory cell will be comprised of two current
25 conductive electrodes having a programmable material received there-between. The programmable material is selected or designed to be configured in a selected one of at least two different resistive states to enable storing of information by an individual memory cell. The reading of the cell comprises determination of which of the states the programmable material is in, and the writing of information to the
30 cell comprises placing the programmable material in a predetermined resistive

state. Some programmable materials retain a resistive state in the absence of refresh, and thus may be incorporated into nonvolatile memory cells.

[0004] Some programmable materials may contain mobile charge carriers larger than electrons and holes, for example ions in some example applications.

5 Regardless, the programmable materials may be converted from one memory state to another by moving the mobile charge carriers therein to alter a distribution of charge density within the programmable materials. Some example memory devices that utilize ions as mobile charge carriers are resistive RAM (RRAM) cells, which can include classes of memory cells containing multivalent oxides, and which can
10 include memristors in some specific applications. Other example memory devices that utilize ions as charge carriers are programmable metallization cells (PMCs); which may be alternatively referred to as a conductive bridging RAM (CBRAM), nanobridge memory, or electrolyte memory.

[0005] The RRAM cells may contain programmable material sandwiched
15 between a pair of electrodes. The programming of the RRAM cells may comprise transitioning the programmable material between first a memory state in which charge density is relatively uniformly dispersed throughout the material and a second memory state in which the charge density is concentrated in a specific region of the material (for instance, a region closer to one electrode than the other).

20 [0006] A PMC may similarly have programmable material sandwiched between a pair of current conductive electrodes. The PMC programmable material comprises ion conductive material, for example a suitable chalcogenide or any of various suitable oxides. A suitable voltage applied across the electrodes generates current conductive super-ionic clusters or filaments. Such result from ion transport
25 through the ion conductive material which grows the clusters/filaments from one of the electrodes (the cathode), through the ion conductive material, and toward the other electrode (the anode). The clusters or filaments create current conductive paths between the electrodes. An opposite voltage applied across the electrodes essentially reverses the process and thus removes the current conductive paths. A
30 PMC thus comprises a high resistance state (corresponding to the state lacking a current conductive filament or clusters between the electrodes) and a low resistance

state (corresponding to the state having a current conductive filament or clusters between the electrodes), with such states being reversibly interchangeable with one another.

5 BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Fig. 1 is a diagrammatic isometric view of a nonvolatile memory cell in accordance with an embodiment of the invention.

[0008] Fig. 2 is a sectional view of Fig. 1 taken through line 2-2 in Fig. 1.

10 [0009] Fig. 3 is a diagrammatic sectional view of a nonvolatile memory cell in accordance with an embodiment of the invention.

[0010] Fig. 4 is a diagrammatic isometric view of an array of vertically stacked tiers of nonvolatile memory cells in accordance with an embodiment of the invention.

15 [0011] Fig. 5 is a sectional view of an array of vertically stacked tiers of nonvolatile memory cells in accordance with an embodiment of the invention.

[0012] Figs. 6-31 are diagrammatic isometric views, sectional views, or top views of a substrate fragment in process in ultimately producing an array of vertically stacked tiers of nonvolatile memory cells in accordance with an embodiment of the invention.

20

DETAILED DESCRIPTION OF EXAMPLE EMBODIMENTS

[0013] Example embodiments of a nonvolatile memory cell are initially described with reference to Figs. 1 and 2 with respect to a memory cell 10 which has a first electrode 12 and a second electrode 14. Reference to “first” and “second” with respect to electrodes 12 and 14 is for convenience in description, and either may be considered as a “first” or a “second” electrode in a memory cell which comprises two electrodes. Electrodes 12 and 14 may be in the form of continuous lines respectively shared by multiple memory cells, or one or both may be configured as a respective isolated construction of a single memory cell.

Electrodes 12 and 14 comprise current conductive material, and may be homogenous or non-homogenous. In the context of this document, “current conductive material” is a composition where electric current flow would inherently occur therein predominantly by movement of subatomic positive and/or negative charges when such are generated as opposed to predominantly by movement of ions. Example current conductive materials are elemental metals, alloys of elemental metals, current conductive metal compounds, and conductively doped semiconductive material, including any combinations thereof.

[0014] Programmable material 16 and a select device 18 are received in electrical series connection between and with first electrode 12 and second electrode 14. (In other words, material 16 and device 18 are both between electrodes 12 and 14 in electrical series connection with electrodes 12 and 14.) Current conductive material 20 is received in electrical series connection between and with programmable material 16 and select device 18. (In other words, material 20 is both between material 16 and device 18 and in electrical series connection with material 16 and device 18.) Current conductive material 20 may or may not form a part of the select device. Regardless, the depicted positions of programmable material 16 and select device 18 may be reversed. Any existing or yet-to-be-developed select device may be used, with transistors and diodes being but two examples. Regardless, each of components 16 and 18 may be homogenous or non-homogenous, and may be of the same or different shape, thickness, other dimensions, etc. Current conductive material 20 also may be homogenous or non-

homogenous. Example materials include any of those described above with respect to first electrode 12 and second electrode 14. Any two or three of conductive material of components 12, 14 and 20 may be of the same composition or of different compositions. Memory cell 10 would likely be surrounded by dielectric material which is not shown for clarity in the figures with respect to the example operative components of memory cell 10 just-described.

[0015] Programmable material 16 may be solid, gel, amorphous, crystalline, or any other suitable phase. Any existing or yet-to-be developed programmable material may be used, with only some examples being provided below.

[0016] One example programmable material is ion conductive material. Example suitable such materials comprise chalcogenide-type (for instance, materials comprising one or more of germanium, selenium, antimony, tellurium, sulfur, copper, etc.; with example chalcogenide-type materials being $\text{Ge}_2\text{Sb}_2\text{Te}_5$, GeS_2 , GeSe_2 , CuS_2 , and CuTe) and/or oxides such as zirconium oxide, hafnium oxide, tungsten oxide, copper oxide, niobium oxide, iron oxide, silicon oxide (specifically, silicon dioxide), gadolinium oxide, etc. capable of inherently (or with additive) supporting electrolyte behavior. Such may have silver, copper, cobalt, and/or nickel ions, and/or other suitable ions, diffused therein for ionic conduction, analogously to structures disclosed in U.S. Patent No. 7,405,967 and U.S. Patent Publication Number 2010/0193758.

[0017] Additional example programmable materials include multi-resistive state metal oxide-comprising material. Such may comprise, for example, at least two different layers or regions generally regarded as or understood to be active or passive regions, although not necessarily. Alternately, such may only comprise active material. Example active cell region compositions which comprise metal oxide and can be configured in multi-resistive states include one or a combination of $\text{Sr}_x\text{Ru}_y\text{O}_z$, Ru_xO_y , and $\text{In}_x\text{Sn}_y\text{O}_z$. Other examples include MgO , Ta_2O_5 , SrTiO_3 , SrZrO_3 , BaTiO_3 , $\text{Ba}_{(1-x)}\text{Sr}_x\text{TiO}_3$, ZrO_x (perhaps doped with La), and CaMnO_3 (doped with one or more of Pr, La, Sr, or Sm). Example passive cell region compositions include one or a combination of Al_2O_3 , TiO_2 , and HfO_2 . Regardless, a programmable material composite might comprise additional metal oxide or other

materials not comprising metal oxide. Example materials and constructions for a multi-resistive state region comprising one or more layers including a programmable metal oxide-comprising material are described and disclosed in U.S. Patent Nos. 6,753,561; 7,149,108; 7,067,862; and 7,187,201, as well as in U.S.

5 Patent Application Publication Nos. 2006/0171200 and 2007/0173019. Further as is conventional, multi-resistive state metal oxide-comprising materials encompass filament-type metal oxides, ferroelectric metal oxides and others, and whether existing or yet-to-be developed, as long as resistance of the metal oxide-comprising material can be selectively changed.

10 **[0018]** The programmable material may comprise memristive material. As an example, such material may be statically programmable semiconductive material which comprises mobile dopants that are received within a dielectric such that the material is statically programmable between at least two different resistance states. At least one of the states includes localization or gathering of the mobile dopants
15 such that a dielectric region is formed and thereby provides a higher resistance state. Further, more than two programmable resistance states may be used. In the context of this document, a “mobile dopant” is a component (other than a free electron) of the semiconductive material that is movable to different locations within said dielectric during normal device operation of repeatedly programming
20 the device between at least two different static states by application of voltage differential to the pair of electrodes. Examples include atom vacancies in an otherwise stoichiometric material, and atom interstitials. Specific example mobile dopants include oxygen atom vacancies in amorphous or crystalline oxides or other oxygen-containing material, nitrogen atom vacancies in amorphous or crystalline
25 nitrides or other nitrogen-containing material, fluorine atom vacancies in amorphous or crystalline fluorides or other fluorine-containing material, and interstitial metal atoms in amorphous or crystalline oxides. More than one type of mobile dopant may be used. Example dielectrics in which the mobile dopants are received include suitable oxides, nitrides, and/or fluorides that are capable of
30 localized electrical conductivity based upon sufficiently high quantity and concentration of the mobile dopants. The dielectric within which the mobile

dopants are received may or may not be homogenous independent of consideration of the mobile dopants. Specific example dielectrics include TiO_2 , AlN , and/or MgF_2 . Example programmable materials that comprise oxygen vacancies as mobile dopants may comprise a combination of TiO_2 and TiO_{2-x} in at least one

5 programmed resistance state depending on location of the oxygen vacancies and the quantity of the oxygen vacancies in the locations where such are received. An example programmable material that comprises nitrogen vacancies as mobile dopants is a combination of AlN and AlN_{1-x} in at least one programmed state depending on location of the nitrogen vacancies and the quantity of the nitrogen
10 vacancies in the locations where such are received. An example programmable material that comprises fluorine vacancies as mobile dopants may be a combination of MgF_2 and MgF_{2-x} in at least one programmed resistance state depending on location of the fluorine vacancies and the quantity of the fluorine vacancies in the locations where such are received. As another example, the mobile dopants may
15 comprise aluminum atom interstitials in a nitrogen-containing material.

[0019] Still other example programmable materials include polymer materials such as Bengala Rose, AlQ_3Ag , Cu-TCNQ , DDQ , TAPA , and fluoresceine-based polymers.

[0020] Figs. 1 and 2 depict an example embodiment wherein immediately
20 adjacent of components 12, 18, 20, 16, and 14 are directly against one another. In this document, a material or structure is “directly against” another when there is at least some physical touching contact of the stated materials or structures relative one another. In contrast, “over” encompasses “directly against” as well as constructions where intervening material(s) or structure(s) result(s) in no physical
25 touching contact of the stated materials or structures relative one another. Other structures than those depicted in Figs. 1 and 2 are contemplated with respect to whether materials or structures are directly against one another. For example, material in a memory cell may be provided between any pair of components 12 and 18, components 18 and 20, components 20 and 16, and components 16 and 14.

30 [0021] Further and regardless, alternate orientations and constructions to that shown by Figs. 1 and 2 may be employed. Figs. 1 and 2 do disclose one ideal

embodiment wherein first electrode 12, second electrode 14, programmable material 16 or 18, and select device 16 or 18 are oriented relative one another for predominant current flow relative first electrode 12 and programmable material or select device 18 in a first direction 22. Such components are oriented for
5 predominant current flow relative to second electrode 14 and the other of select device or programmable material 16 in a second direction 24 which is orthogonal to first direction 22. Figs. 1 and 2 also depict an example embodiment wherein electrodes 12 and 14 have respective first and second planar surfaces 26 or 28 directly against which component/material 18 and 16, respectively, is received.
10 Further in such example, such planar surfaces constitute all surface area against which material/components 18 and 16 are received against their respective electrode. Alternately as an example, interface between the electrodes and material/components 16 and/or 18 may be with respect to entirely non-planar surfaces, a combination of planar and non-planar surfaces, or a combination of
15 multiple stepped planar surfaces.

[0022] In one embodiment, a nonvolatile memory cell has a select device which comprises a first diode configured to conduct current from the second electrode to the first electrode via the programmable material and the current conductive material. Such a memory cell further comprises a third electrode and a
20 second diode, with the second diode being configured to conduct current from the third electrode to the second electrode via the current conductive material and the programmable material. In one embodiment, the first diode may be configured to conduct current from the second electrode through the programmable material, then through the current conductive material, and then through the first diode to the first
25 electrode. In one embodiment, the second diode may be configured to conduct current from the third electrode through the second diode, then through the current conductive material, and then through the programmable material to the second electrode. One such example embodiment memory cell 10a is shown in Fig. 3. Like numerals from the first-described embodiments have been used where
30 appropriate, with some construction differences being indicated with the suffix "a" or with different numerals.

[0023] For example, memory cell 10a in one embodiment comprises programmable material 16, with select device 18 comprising a first diode configured for current flow into first electrode 12 from current conductive material 20 as opposed to operative conductive current flow in the opposite
5 direction. A third electrode 30 is provided in series electrical connection with current conductive material 20 through a second diode 32 sandwiched there-between. Second diode 32 is configured to conduct current from third electrode 30 to second electrode 14 via programmable material 16 and current conductive material 20 as opposed to the opposite direction. Alternately by way of example
10 only, the above-described bias current flow directions for a diode 18 and a diode 32 may be reversed.

[0024] In one embodiment, first diode 18 is directly against an elevationally outermost surface 34 of current conductive material 20, and in one embodiment is directly against an elevationally innermost surface 26 of first electrode 12. In one
15 embodiment, second diode 32 is directly against an elevationally innermost surface 36 of current conductive material 20, and in one embodiment is directly against an elevationally outermost surface 38 of third electrode 30.

[0025] Embodiments of the invention encompass an array of vertically stacked tiers of nonvolatile memory cells, for example an array 50 as shown in
20 Fig. 4. Array 50 would be fabricated relative to a suitable base substrate (not shown) which may be homogenous or non-homogenous, for example, comprising multiple different composition materials and/or layers. As an example, such may comprise bulk monocrystalline silicon and/or a semiconductor-on-insulator substrate. As an additional example, such may comprise dielectric material having
25 conductive contacts or vias formed therein which extend vertically or otherwise into current conductive electrical connection with electronic device components, regions, or material received elevationally inward of the dielectric material. In this document, vertical is a direction generally orthogonal to a primary surface relative to which the substrate is processed during fabrication and which may be considered
30 to define a generally horizontal direction. Further, “vertical” and “horizontal” as used herein are generally perpendicular directions relative one another independent

of orientation of the substrate in three dimensional space. Further in this document, "elevational" and "elevationally" are with reference to the vertical direction from a base substrate (not shown) upon which the circuitry is fabricated. The base substrate may or may not be a semiconductor substrate. In the context of this document, the term "semiconductor substrate" or "semiconductive substrate" is defined to mean any construction comprising semiconductive material, including, but not limited to, bulk semiconductive materials such as a semiconductive wafer (either alone or in assemblies comprising other materials thereon), and semiconductive material layers (either alone or in assemblies comprising other materials). The term "substrate" refers to any supporting structure, including, but not limited to, the semiconductive substrates described above.

[0026] Array 50 incorporates a plurality of the memory cell 10 of Figs. 1 and 2. Accordingly, like numerals from Figs. 1 and 2 have been used in Fig. 4 where appropriate, with some construction differences being indicated with different numerals. Referring to Figs. 1, 2 and 4, array 50 comprises a plurality of horizontally oriented first electrode lines 12 within individual tiers 52 and 53 of memory cells 10. A plurality of horizontally oriented global second electrode lines 13 have local vertical second electrode line extensions 14 extending through multiple of the tiers of memory cells 10, for example through each of tiers 52 and 53 as shown. Global second electrode lines 13 may alternately, by way of example only, be formed elevationally/vertically outward of tier 52. Such may comprise current conductive material.

[0027] Individual memory cells 10 of array 50 may have any of the constructions, materials, attributes, etc. as described above in connection with Figs. 1 and 2. Individual memory cells 10 comprise a crossing one of horizontal first electrode lines 12 and one of local vertical second electrode line extensions 14 having material/components 18, 20, 16 there-between. Accordingly, an individual memory cell 10 of array 50 comprises programmable material 16 or 18, a select device of the other of structures 16 and 18 in electrical series connection through current conductive material 20. The programmable material and the select device are in electrical series connection with the crossing ones of horizontal first

electrode lines 12 and local vertical second electrode line extensions 14.

Immediately adjacent components of the individual memory cells may be directly against one another or have other material(s)/components there-between, as described above.

5 [0028] The programmable material and the select device of individual memory cells 10 within array 50 are oriented for predominant current flow into or out of the crossing one local vertical second electrode line extension out of or into, respectively, one of the programmable material or select device in a horizontal direction 24 (Fig. 1). Such are also oriented for predominant current flow into or
10 out of the crossing one horizontal electrode line out of or into, respectively, the other of the programmable material and select device in a vertical direction 22 (Fig. 1). Further in Figs 1, 2, and 4, the depicted programmable material may be isolated relative to each memory cell as shown, or alternately might be continuous along some plurality of memory cells. For example a programmable material 16
15 may extend continuously (not shown) along the local vertical second electrode extensions 14.

[0029] An alternate embodiment array 50a of vertically stacked tiers of nonvolatile memory cells is shown in Fig. 5. Like numerals from the above-described embodiments have been used where appropriate, with some construction
20 differences being indicated with the suffix "a" or with different numerals. Fig. 5 depicts an array comprising memory cells 10a of Fig. 3, and is analogous to the schematic circuit and operation as described in U.S. Patent Application Serial No. 12/141,388 and which is now U.S. Patent Publication No. 2009-0316467. Individual tiers 52a and 53a respectively comprise an elevationally outer tier 60
25 and an elevationally inner tier 62 of respective pluralities of horizontally oriented data/sense lines 12 or 30. Fig. 5 is a vertical section view as would be taken through and along the longitudinal centers of local vertical second electrode line extensions 14. Accordingly, electrode lines 12 and 30 would run into and out of the plane of the page upon which Fig. 5 lies. The other components as depicted in
30 Fig. 5 would repeat throughout the array analogous to the Fig. 4 depiction, but for different respective individual memory cell constructions 10a.

[0030] In the embodiment of Fig. 5, second electrode lines 14 comprise access lines. Further, the respective select devices 18 of an individual memory cell comprises a first diode which is directly against an elevationally outermost surface 34 of current conductive material 20, and which is in series current
5 conductive connection with a conductive data/sense line 12 of a respective elevationally outer tier 60. Individual memory cells 10a further comprise a second diode 32 directly against an elevationally innermost surface 36 of current conductive material 20 and which is in series current conductive connection with a horizontally oriented data/sense line 30 of a respective elevationally inner tier 62.
10 Any other attribute as described above with respect to the Fig. 3 embodiment may be employed. In Fig. 5, alternating local vertical second electrode line extensions electrically connect with horizontally oriented global second electrode lines 13 or 13a. Also, current conductive material 20 is shared by immediately laterally adjacent memory cells 10a between laterally adjacent second electrode line
15 extensions 14. Further in Figs 3 and 5, the depicted programmable material may be isolated relative to each memory cell as shown, or alternately might be continuous along some plurality of memory cells. For example material 16 may extend continuously along the local vertical second electrode extensions 14.

[0031] Any of the above constructions may be fabricated in accordance with
20 any existing or yet-to-be-developed technique(s). An example manner of fabricating array 50 of Fig. 4 is next described with reference to Figs. 6-31. Referring to Figs. 6 and 7, a substrate fragment in process is indicated generally with reference numeral 70. Like numerals from Figs. 1, 2, and 4 are used where appropriate, with some construction differences being indicated with the suffix "b"
25 or with different numerals. Further, in Figs. 6-30, numerals 12, 18, 20, 16 and 14 are used to designate the materials from which such components are fabricated prior to being of the final example shapes for clarity in the drawings and ease of understanding in the description. Blanketing layers of current conductive material 12, programmable or select device material 18, and current conductive
30 material 20 have been provided relative to intervening dielectric material 72. Example such dielectrics include doped or undoped silicon dioxide, and silicon

nitride. An example outer dielectric layer is shown as comprising a composite of dielectric material 72 over a different composition dielectric material 73.

Accordingly, by way of example only, material 73 might be an other of doped or undoped silicon dioxide or silicon nitride in comparison to the composition of

5 dielectric 72. Each of dielectric materials 72 and 73 may be homogenous or non-homogenous. A suitable base substrate (not shown) as described above would be received inwardly of innermost layer 72. Tiers 52 and 53 of Fig. 4 are designated in Figs. 6 and 7, as is an additional inner tier 54 within which a plurality of memory cells will be fabricated.

10 **[0032]** Referring to Figs. 8 and 9, trenches 74 have been formed through the illustrated materials.

[0033] Referring to Figs. 10 and 11, dielectric material has been formed within trenches 74 and planarized back. In one embodiment, such may be of the same composition as dielectric 73 referred to above and is therefore so designated
15 in the figures.

[0034] Referring to Figs. 12 and 13, openings 76 have been formed through the illustrated materials. While Fig. 13 is a section view drawn through line 13-13 in Fig. 12, such is also depicting materials 12, 18 and 20 as would be viewed looking laterally through openings 76 beyond section line 13-13 in Fig. 12.

20 **[0035]** Referring to Figs. 14-16, a selective isotropic etch has been conducted of materials 18 and 20 relative to materials 72, 73 and 12. Materials 18 and 20 may be so etched in the same etching step, or in separate etching steps. In the context of this document, a selective etch requires removal of one material relative to a stated or shown other material at a ratio of at least 1.5:1.

25 **[0036]** Referring to Figs. 17-19, dielectric material has been deposited to fill openings 76 and then planarized back. In one embodiment, such may be of the same composition as dielectric 72 referred to above and is therefore so designated in the figures.

[0037] Referring to Figs. 20 and 21, openings 77 have been formed through
30 the illustrated materials.

[0038] Referring to Figs. 22 and 23, current conductive material 12 and select device or programmable material 18 have been isotropically etched selectively relative to materials 20, 72, and 73. Such may form components/material 12 and 18 into their finished final construction shapes, with conductive material 20 also being of its final construction shape.

[0039] Referring to Figs. 24 and 25, dielectric material has again been deposited, thus filling openings 77. In one embodiment, such may be of the same composition as dielectric 72 referred to above and is therefore so designated in the figures. Such may be planarized back as shown.

[0040] Referring to Figs. 26 and 27, openings 78 have been formed through material 72. Such will comprise vertical columns within which the other of programmable material or select device material 16 and current conductive electrode material 14 will be formed.

[0041] Referring to Figs. 28 and 29, material 16 has been deposited to form a ring lining within openings 78 of Figs. 26 and 27.

[0042] Referring to Figs. 30 and 31, current conductive material 14 has been deposited within the remaining volume of openings 78 radially within the material 16 lining and subsequently planarized back, thus substantially completing the construction of array 70. Global second electrode lines (not shown) might have previously been formed elevationally inward of innermost layer 72. Alternately by way of example, such may be formed elevationally outward of the construction of Figs. 30 and 31, and correspondingly patterned into global second electrode lines (not shown) in connection with individual of local vertical second electrode line extensions 14.

[0043] Corresponding or other processing methods to that of Figs. 6-31 may be used for fabricating array 50a of Fig. 5.

[0044] Embodiments of the invention also encompass methods of forming an array of vertically stacked tiers of non-volatile memory cells. In one such embodiment, horizontally oriented and laterally overlapping first, second, and third lines are formed within individual tiers of a plurality of vertically stacked tiers. The first and third lines are current conductive and of different composition so that

at least one of such may be selectively etched relative to the other. The second lines are respectively received between a respective first line and third line, and may comprise one of programmable material or select device material. By way of example only and with respect to Figs. 10 and 11, example individual tiers 52, 53, 54 have respective first lines 12, second lines 18, and third lines 20 so formed. In one embodiment, the first line is received elevationally outward of the third line. In one embodiment, the first, second, and third lines are laterally coincident within the individual tiers.

[0045] Pairs of vertically extending and longitudinally aligned first openings are formed through a plurality of the tiers on laterally opposing sides of the first, second, and third lines within the individual tiers. By way of example only and with respect to Figs. 12 and 13, individual such vertically extending and longitudinally aligned first openings of an example such pair are designated as 76b.

[0046] The second and third lines are laterally etched through selectively relative to the first lines between the respective pairs of first openings to form longitudinally spaced masses which extend vertically relative to the first lines. The masses respectively comprise material of the former second and third lines. By way of example only and with respect to Figs. 14-16, such depicts example such lateral etching of the construction of Figs. 12 and 13 to form longitudinally spaced masses 80 which extend vertically, in one embodiment and as shown vertically inward, relative to first lines 12. In one embodiment and as shown, the lateral etching may also longitudinally recess masses 80 relative to the respective pairs of first openings 76b.

[0047] Opposing sides of the first lines and the second line material of the masses are laterally recessed selectively relative to the third line material of the masses. Such is shown by way of example only in the processing of the substrate of the Figs. 20 and 21 construction to produce that of Figs. 22 and 23. Such may be conducted in one or more steps using any suitable wet or dry etching chemistry or chemistries. Dielectric material is subsequently formed laterally over the laterally recessed opposing sides of the first lines and the second line material of the masses, for example as shown in Figs. 24 and 25 by deposition of material 72.

[0048] Vertically extending second openings are formed through the plurality of tiers. Individual of the second openings are laterally adjacent the dielectric material received over the laterally recessed first lines and second line material, and laterally adjacent third line material of individual of the masses within the individual tiers. By way of example only and with respect to Figs. 26 and 27, openings 78 constitutes such example second openings.

[0049] A ring lining of the other of programmable material or select device material is formed within the second openings in current conductive connection with the third line material of individual of the masses within individual of the tiers. By way of example only and with respect to Figs. 28 and 29, ring lining 16 is an example. Current conductive material is ultimately formed within the second openings radially within the ring lining, with Figs. 30 and 31 being such an example with respect to material 14.

[0050] In one embodiment, a method of forming an array of vertically stacked tiers of non-volatile memory cells comprises forming horizontally oriented and laterally overlapping first, second, and third lines within individual tiers of a plurality of vertically stacked tiers. The first and third lines are current conductive and of different composition. The second line is received between the first and third lines, and is of a material different in composition from that of the first and third lines. Pairs of vertically extending and longitudinally aligned first openings are formed through the plurality of tiers on laterally opposing sides of the first, second, and third lines within the individual tiers.

[0051] Lateral etching is conducted through the second and third lines selectively relative to the first lines between the respective pairs of first openings to form longitudinally spaced masses which extend vertically relative to the first lines. The masses respectively comprise material of the former second and third lines.

[0052] Vertically extending second openings are formed through the plurality of tiers. Individual of the second openings are laterally spaced from opposing sides of the first lines and the second line of material of the masses. Individual of the second openings also laterally expose the third line material of individual of the

masses within the individual tiers. Current conductive material is formed within the second openings ultimately, and regardless of whether programmable material and/or select device material are received laterally between the current conductive material and third line material of the individual masses. Other attributes as
5 described above, or otherwise, may be employed.

[0053] An embodiment of a method of forming an array of vertically stacked tiers of non-volatile memory cells includes forming horizontally oriented current conductive lines having longitudinally spaced masses extending vertically therefrom. The masses respectively comprise current conductive material and other
10 material received between the current conductive material and the current conductive line. The other material is of different composition from that of the current conductive material and the current conductive line. The processing as described above at least through Figs. 13 and 14 is but one example, and regardless of composition of example other material 20.

[0054] Opposing sides of the horizontally oriented current conductive lines and the other material of the masses are laterally recessed selectively relative to the current conductive material of the masses. Figs. 22 and 23 depict one such
15 example.

[0055] Dielectric material is formed laterally over the laterally recessed
20 opposing sides of the horizontally oriented current conductive lines and the other material of the masses. Vertically extending openings are formed through the plurality of tiers. Individual of the openings are laterally adjacent the dielectric material received over the laterally recessed opposing sides of the current conductive lines and other material of the masses. Individual of the openings also
25 laterally expose the current conductive material of individual of the masses within the individual tiers. Ultimately, current conductive material is formed within the openings. Attributes of any of the methods described above, or otherwise, may be employed.

[0056] In one embodiment, a method of forming an array of vertically stacked
30 tiers of non-volatile memory cells includes forming horizontally oriented current conductive lines having longitudinally spaced masses extending vertically

therefrom. The masses respectively comprise current conductive material and other material received between the current conductive material and the current conductive line. The other material is of different composition from that of the current conductive material and the current conductive line.

- 5 [0057] Vertically extending openings are formed through the plurality of tiers. Individual of such openings are laterally spaced from opposing sides of the horizontally oriented current conductive lines and the other material of the masses. Individual of the second openings laterally expose the current conductive material of individual of the masses within the individual tiers.
- 10 [0058] A ring lining is formed of programmable material or select device material within the openings in current conductive connection with the current conductive material of individual of the masses within individual of the tiers. Ultimately, current conductive material is formed within the openings radially within the ring lining. Other attributes as described above, or otherwise, may be
- 15 employed.

CLAIMS:

1. An array of vertically stacked tiers of nonvolatile memory cells, comprising:

5 a plurality of horizontally oriented first electrode lines within individual tiers of memory cells;

a plurality of horizontally oriented global second electrode lines having local vertical second electrode line extensions extending through multiple of the tiers of memory cells; and

individual of the memory cells comprising:

10 a crossing one of the horizontal first electrode lines and one of the local vertical second electrode line extensions;

programmable material, a select device in series with the programmable material, and current conductive material in series between and with the programmable material and the select device; the programmable material and the select device being in series with such crossing ones of the horizontal first electrode lines and local vertical second electrode line extensions; and

20 the programmable material and the select device are oriented for predominant current flow into or out of the crossing one local vertical second electrode line extension out of or into, respectively, one of the programmable material or select device in a horizontal direction, and for predominant current flow into or out of the crossing one horizontal electrode line out of or into, respectively, the other of the programmable material and select device in a vertical direction.

2. The array of claim 1 wherein the first electrode lines are data/sense lines and the second electrode lines are access lines, and the programmable material and the select device are oriented for predominant current flow out of the one data/sense line and into the other of the programmable material or select device
5 in an elevationally inward vertical direction.

3. The array of claim 1 wherein the first electrode lines are data/sense lines and the second electrode lines are access lines, and the programmable material and the select device are oriented for predominant current flow out of the one data/sense line and into the other of the programmable material or select device
10 in an elevationally outward vertical direction.

4. The array of claim 1 wherein the select device is directly against the respective local vertical second electrode line extensions.

5. The array of claim 1 wherein the select device is directly against the respective first electrode lines.

15 6. The array of claim 5 wherein the first electrode lines have respective elevationally outermost surfaces, the respective select devices being directly against said respective elevationally outermost surfaces.

7. The array of claim 5 wherein the first electrode lines have respective elevationally innermost surfaces, the respective select devices being directly
20 against said respective elevationally innermost surfaces.

8. The array of claim 1 wherein the programmable material is directly against the respective local vertical second electrode line extensions.

9. The array of claim 1 wherein the programmable material is directly against the respective first electrode lines.

25 10. The array of claim 9 wherein the first electrode lines have respective elevationally outermost surfaces, the programmable material being directly against said respective elevationally outermost surfaces.

11. The array of claim 9 wherein the first electrode lines have respective elevationally innermost surfaces, the programmable material being directly against said respective elevationally innermost surfaces.

12. The array of claim 1 wherein the programmable material and the select
5 device are directly against the current conductive material.

13. The array of claim 12 wherein the respective select devices are directly against respective ones of the horizontal first electrode lines or local vertical second electrode line extensions, and the programmable material is directly against respective others of the horizontal first electrode lines and local vertical
10 second electrode line extensions.

14. The array of claim 1 wherein,
the first electrode lines are data/sense lines and the second electrode lines are access lines;
the individual vertical tiers of memory cells respectively comprise an
15 elevationally outer tier and an elevationally inner tier of respective pluralities of horizontally oriented data/sense lines; and
the respective select devices comprise a first diode directly against an elevationally outermost surface of said current conductive material and which is in series current conductive connection with one of the horizontally oriented
20 data/sense lines of the respective elevationally outer tiers; and

further comprising:

a second diode directly against an elevationally innermost surface of said current conductive material and which is in series current conductive connection with one of the horizontally oriented data/sense lines of the
25 respective elevationally inner tier.

15. The array of claim 14 wherein the respective first diodes are directly against an elevationally innermost surface of the respective ones of the horizontally oriented data/sense lines of the respective elevationally outer tiers.

16. The array of claim 14 wherein the respective second diodes are directly against an elevationally outermost surface of the respective ones of the horizontally oriented data/sense lines of the respective elevationally inner tiers.

17. The array of claim 14 wherein,

5 the respective first diodes are directly against an elevationally innermost surface of the respective ones of the horizontally oriented data/sense lines of the respective elevationally outer tiers; and

10 the respective second diodes are directly against an elevationally outermost surface of the respective ones of the horizontally oriented data/sense lines of the respective elevationally inner tiers.

18. The array of claim 17 wherein the programmable material is directly against both the respective local vertical access line extensions and current conductive material.

19. A method of forming an array of vertically stacked tiers of nonvolatile memory cells, comprising:

forming horizontally oriented and laterally overlapping first, second, and third lines within individual tiers of a plurality of vertically stacked tiers; the first and third lines being current conductive and of different composition, the second lines being received between the first and third lines and being of material different in composition from that of the first and third lines;

forming pairs of vertically extending and longitudinally aligned first openings through the plurality of tiers on laterally opposing sides of the first, second, and third lines within the individual tiers;

laterally etching through the second and third lines selectively relative to the first lines between the respective pairs of first openings to form longitudinally spaced masses which extend vertically relative to the first lines, the masses respectively comprising material of the former second and third lines;

forming vertically extending second openings through the plurality of tiers, individual of the second openings being laterally spaced from opposing sides of the first lines and the second line material of the masses, individual of the second openings laterally exposing the third line material of individual of the masses within the individual tiers; and

forming current conductive material within the second openings.

20. The method of claim 19 wherein the first line is received elevationally outward of the third line.

21. The method of claim 19 wherein the first, second, and third lines are laterally coincident within the individual tiers.

22. The method of claim 19 wherein the laterally etching longitudinally recesses the masses relative to the pairs of first openings.

23. A method of forming an array of vertically stacked tiers of nonvolatile memory cells, comprising:

forming horizontally oriented current conductive lines having longitudinally spaced masses extending vertically therefrom, the masses respectively comprising
5 current conductive material and other material received between the current conductive material and the current conductive lines, the other material being of different composition from that of the current conductive material and the current conductive lines;

10 laterally recessing opposing sides of the horizontally oriented current conductive lines and the other material of the masses selectively relative to the current conductive material of the masses;

forming dielectric material laterally over the laterally recessed opposing sides of the horizontally oriented current conductive lines and the other material of the masses;

15 forming vertically extending openings through the plurality of tiers, individual of the openings being laterally adjacent said dielectric material within the individual tiers, individual of the openings laterally exposing the current conductive material of individual of the masses within the individual tiers; and forming current conductive material within the openings.

20 24. The method of claim 23 wherein the masses extend vertically inward from respective of the horizontally current conductive lines.

25. A method of forming an array of vertically stacked tiers of nonvolatile memory cells, comprising:

forming horizontally oriented current conductive lines having longitudinally spaced masses extending vertically therefrom, the masses respectively comprising
5 current conductive material and other material received between the current conductive material and the current conductive lines, the other material being of different composition from that of the current conductive material and the current conductive lines;

forming vertically extending openings through the plurality of tiers,
10 individual of the openings being laterally spaced from opposing sides of the horizontally oriented current conductive lines and the other material of the masses, individual of the second openings laterally exposing the current conductive material of individual of the masses within the individual tiers;

forming a ring lining of programmable material or select device material
15 within the openings in current conductive connection with the current conductive material of individual of the masses within individual of the tiers; and

forming current conductive material within the openings radially within the ring lining.

26. A method of forming an array of vertically stacked tiers of nonvolatile memory cells; individual of the memory cells comprising first and second electrodes, programmable material and a select device in series between and with the first and second electrodes, and current conductive material in series between
5 and with the programmable material and the select device; the method comprising:

forming horizontally oriented and laterally overlapping first, second, and third lines within individual tiers of a plurality of vertically stacked tiers; the first and third lines being current conductive and of different composition, the second line being received between the first and third lines and comprising one of
10 programmable material or select device material;

forming pairs of vertically extending and longitudinally aligned first openings through the plurality of tiers on laterally opposing sides of the first, second, and third lines within the individual tiers;

laterally etching through the second and third lines selectively relative to the
15 first lines between the respective pairs of first openings to form longitudinally spaced masses which extend vertically relative to the first lines, the masses respectively comprising material of the former second and third lines;

laterally recessing opposing sides of the first lines and the second line material of the masses selectively relative to the third line material of the masses;

20 forming dielectric material laterally over the laterally recessed opposing sides of the first lines and the second line material of the masses;

forming vertically extending second openings through the plurality of tiers, individual of the second openings being laterally adjacent said dielectric material and third line material of individual of the masses within the individual tiers;

25 forming a ring lining of the other of programmable material or select device material within the second openings in current conductive connection with the third line material of individual of the masses within individual of the tiers; and

forming current conductive material within the second openings radially within the ring lining.

1/29

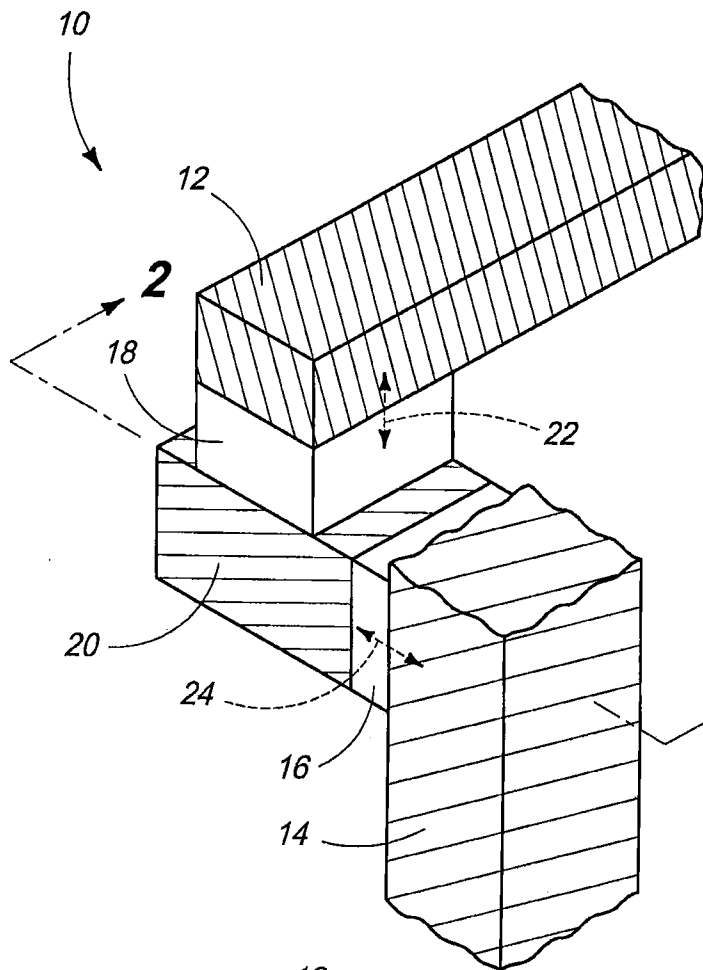


FIG. 1

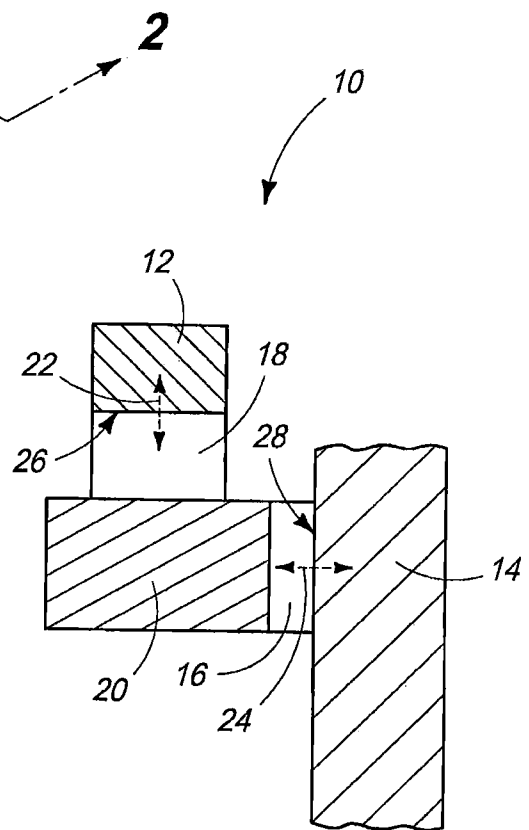


FIG. 2

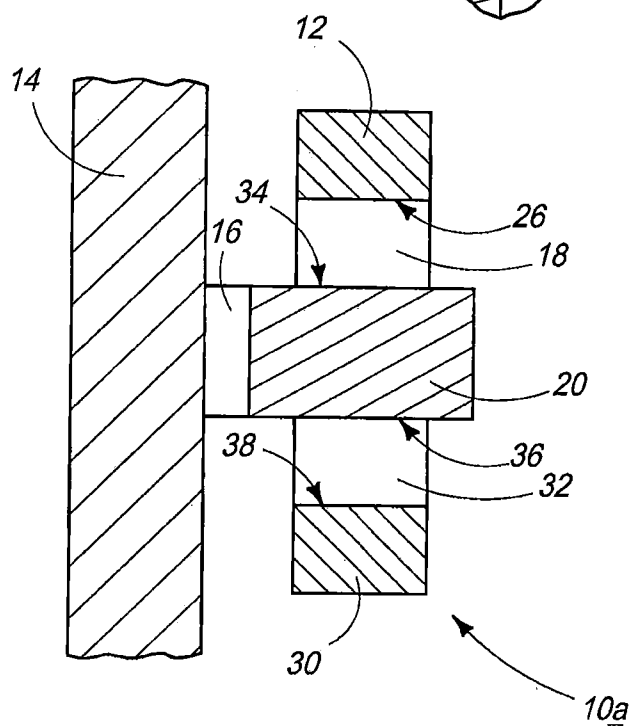


FIG. 3


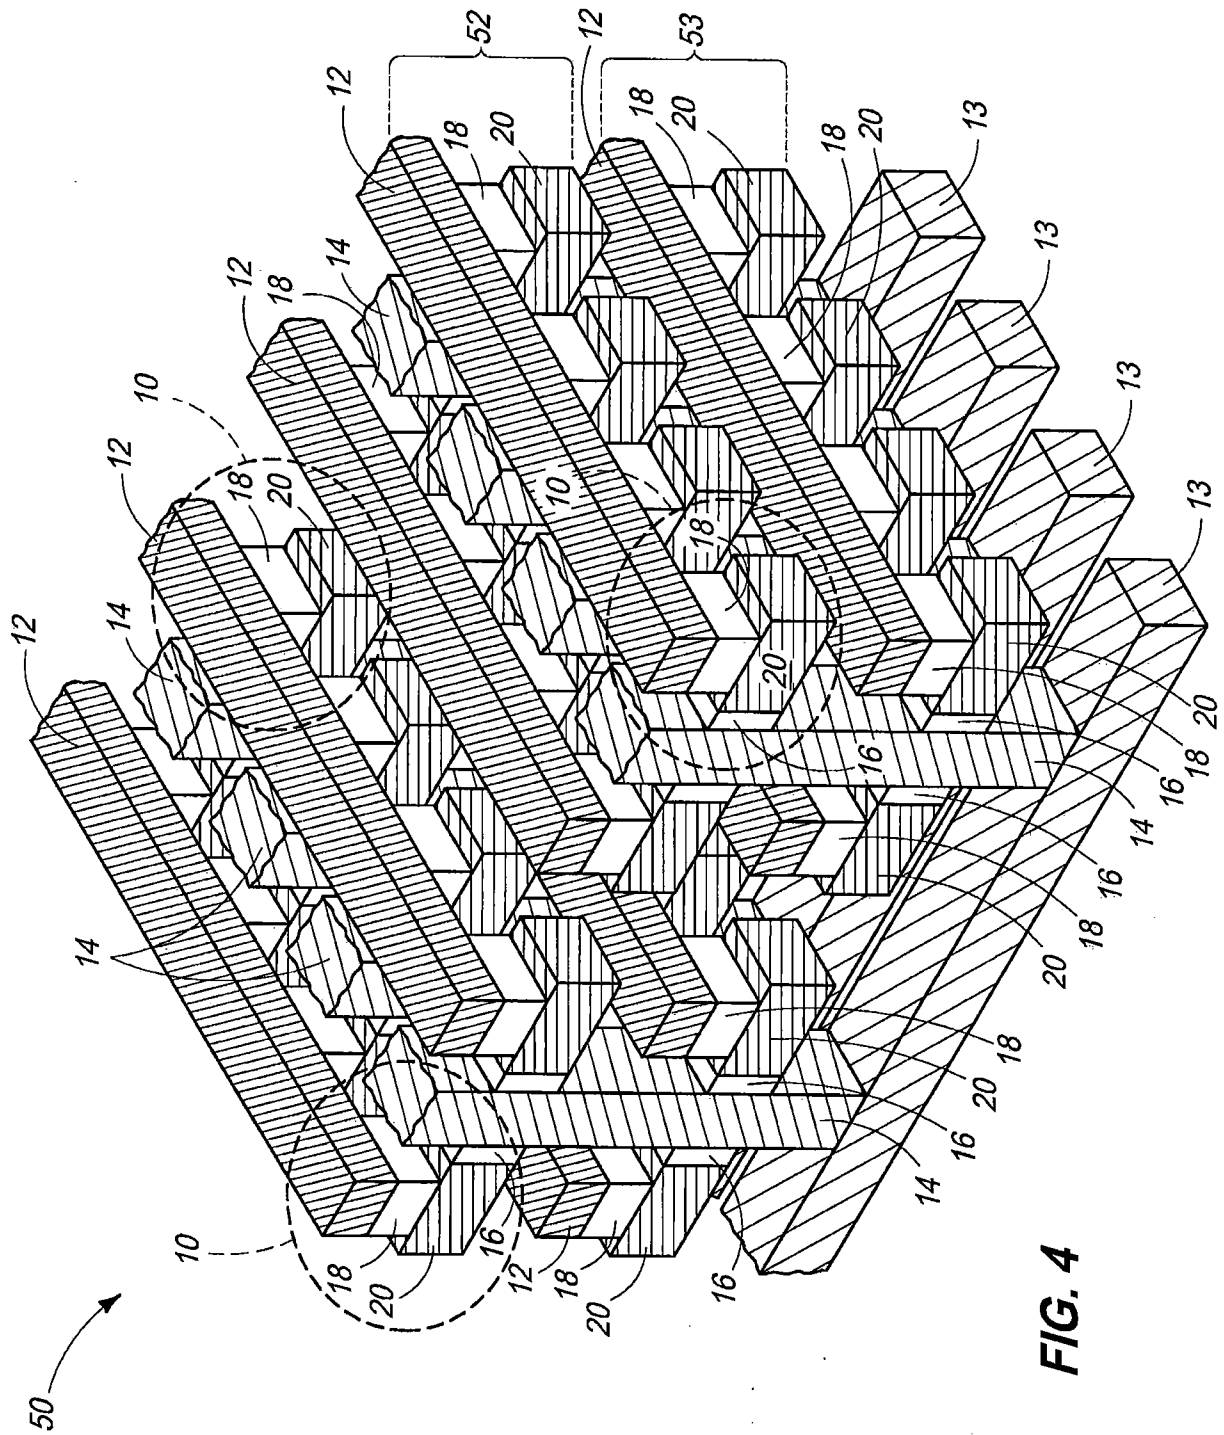


FIG. 5

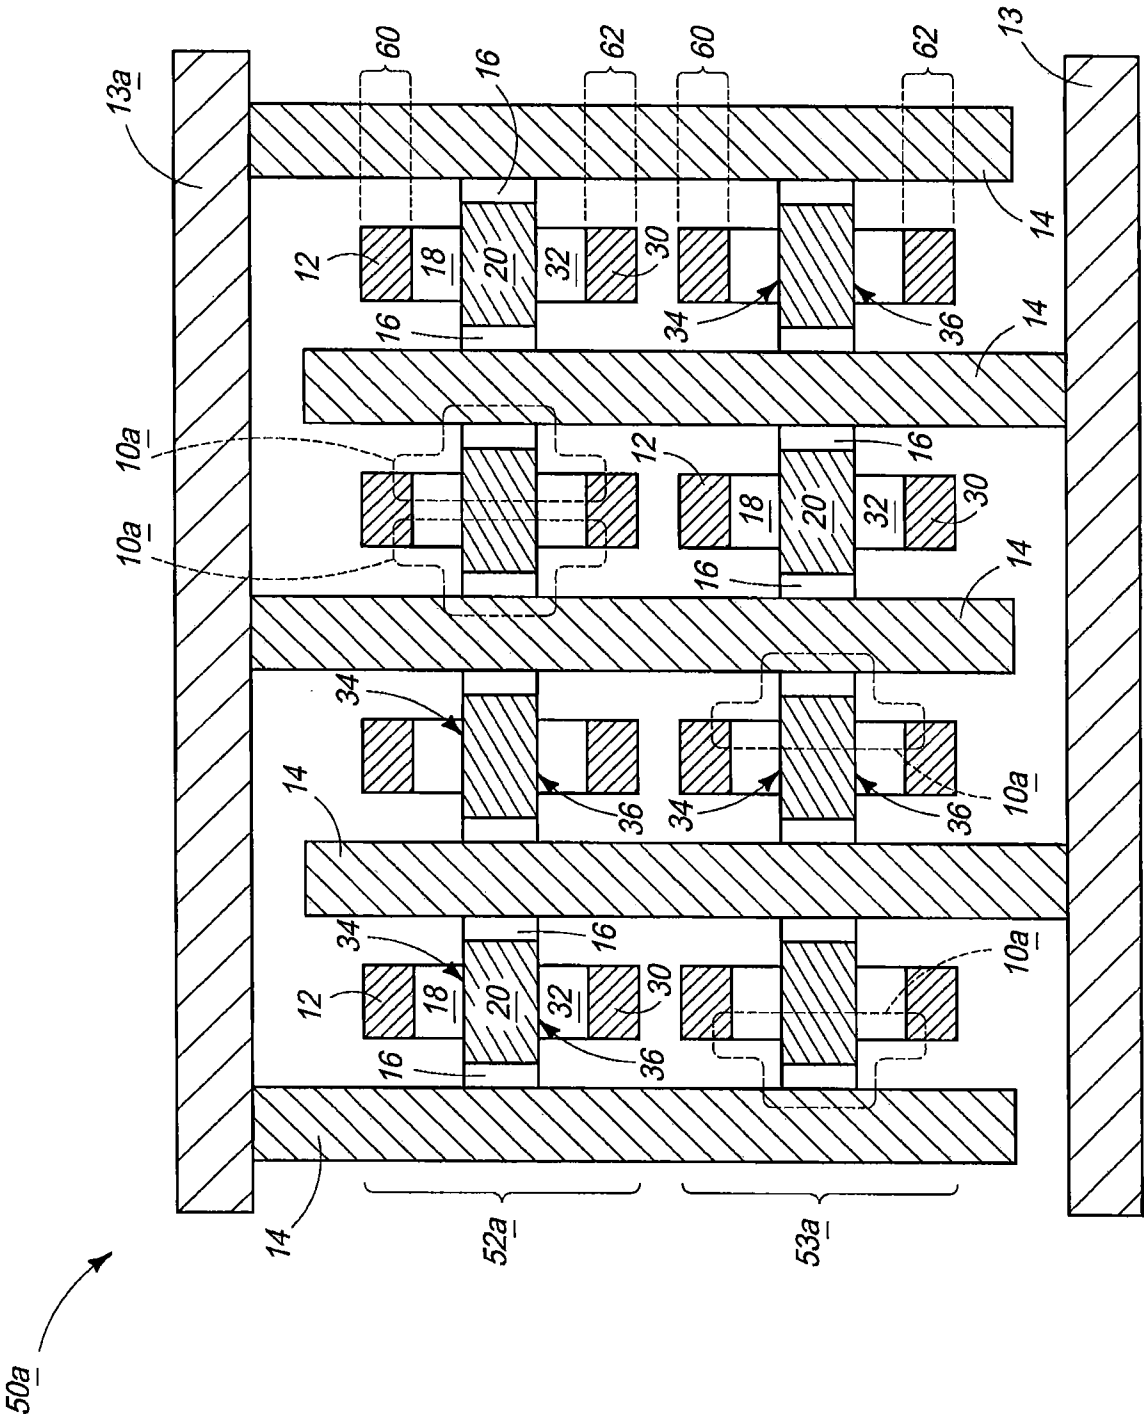

4/29

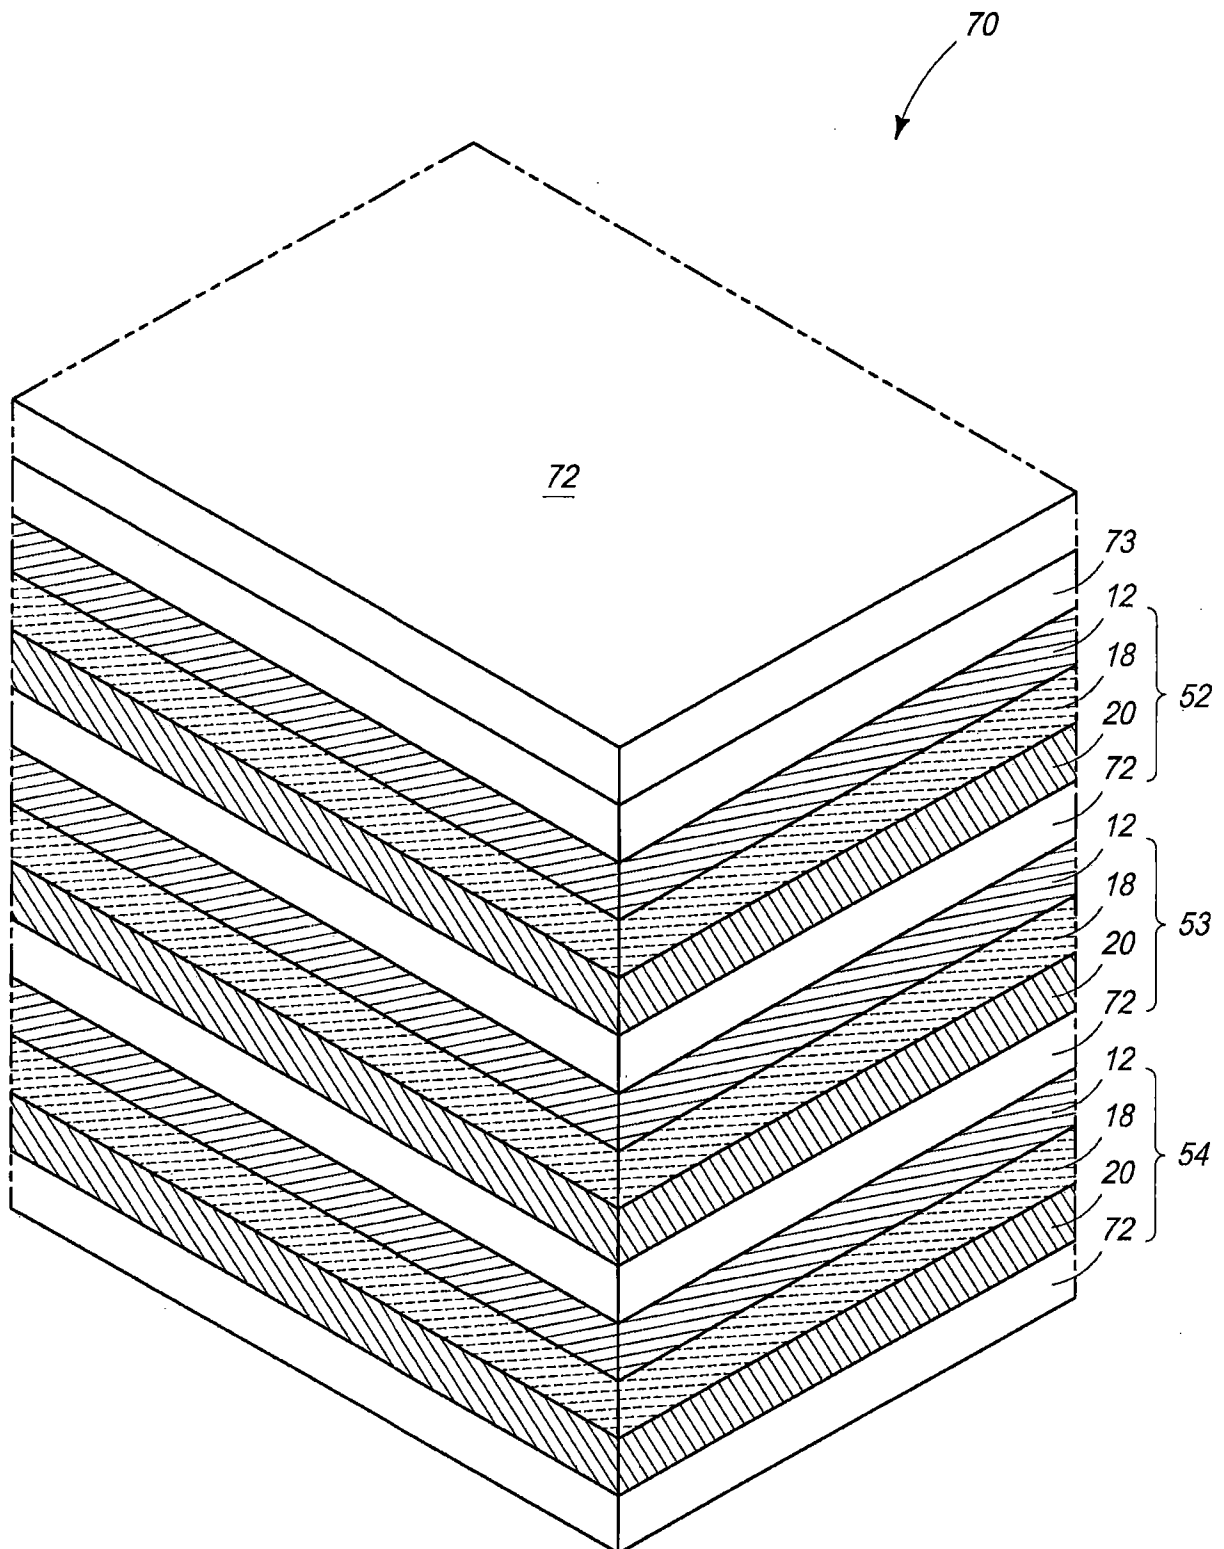


FIG. 6

5/29

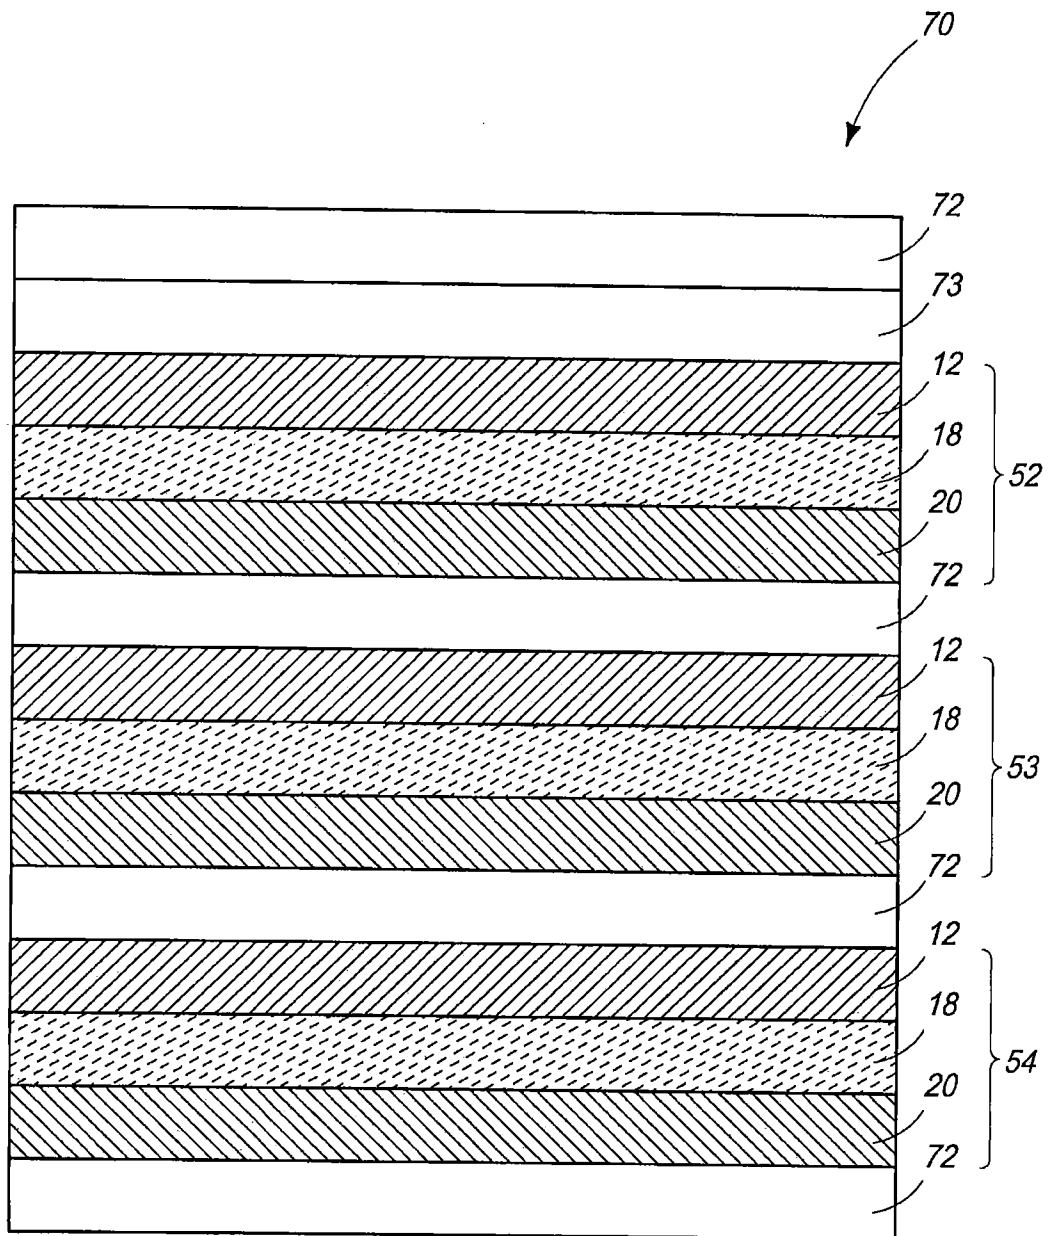


FIG. 7

6/29

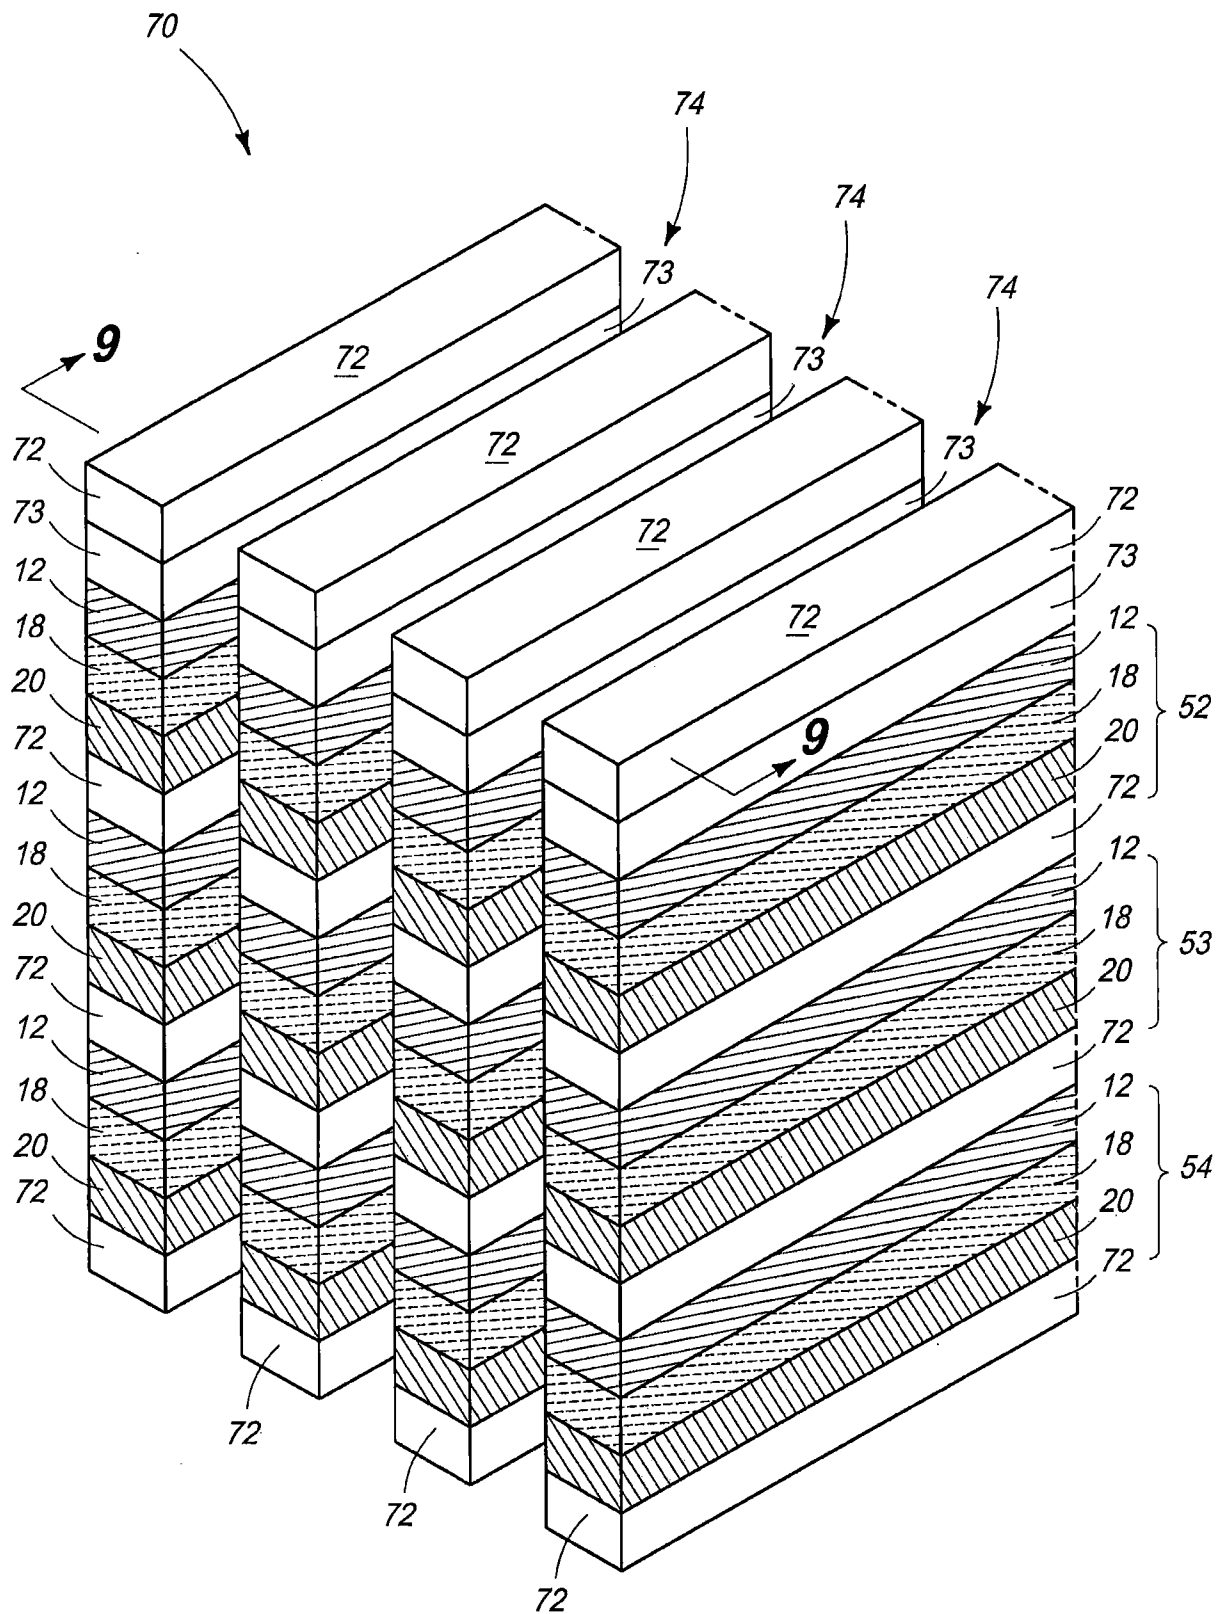
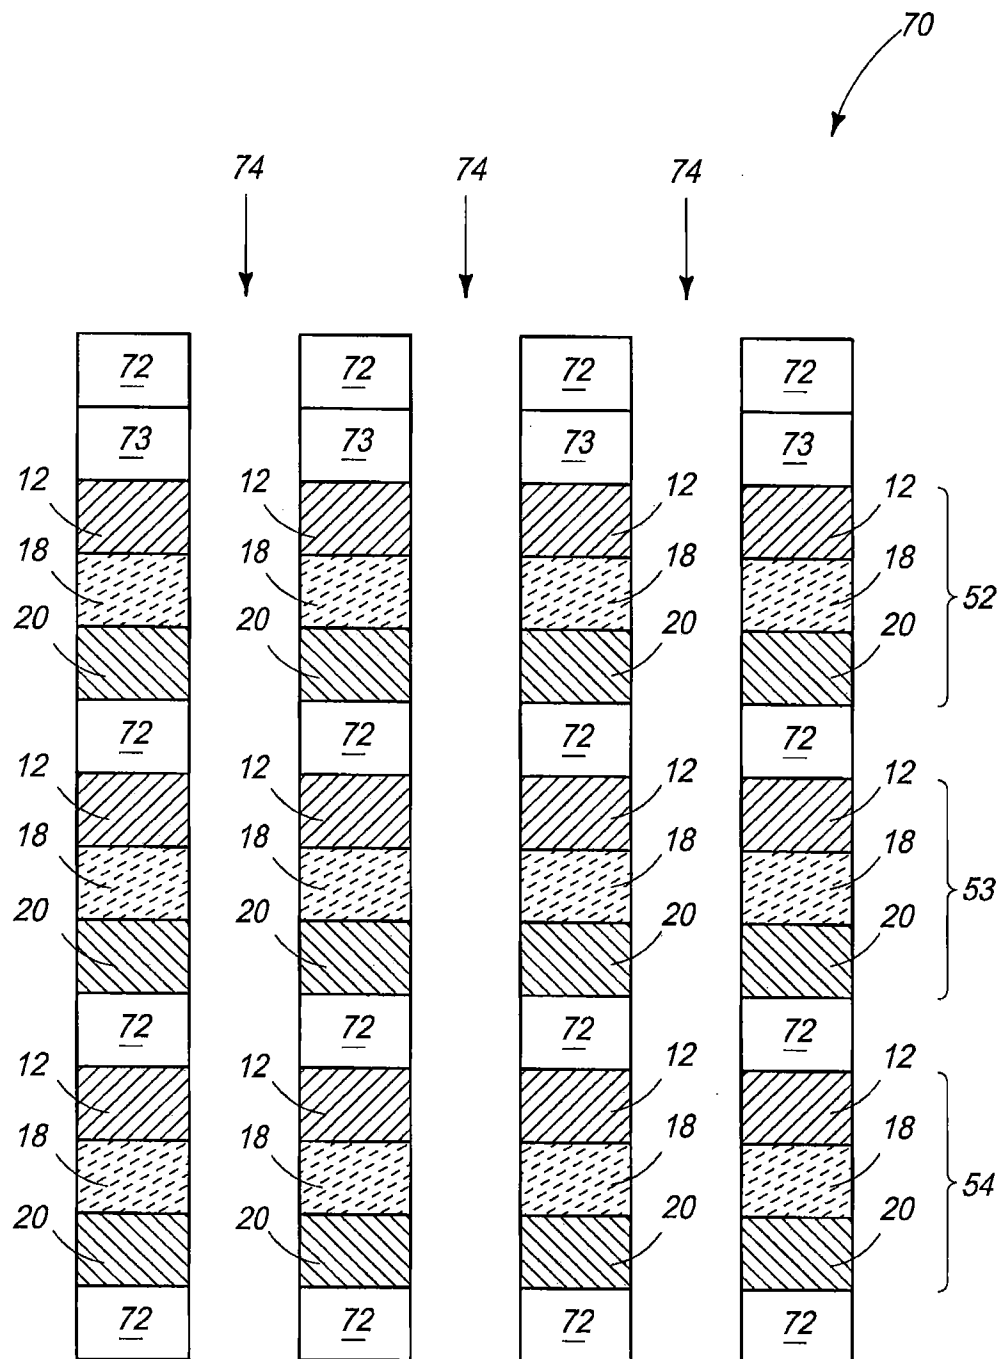


FIG. 8

7/29

**FIG. 9**

8/29

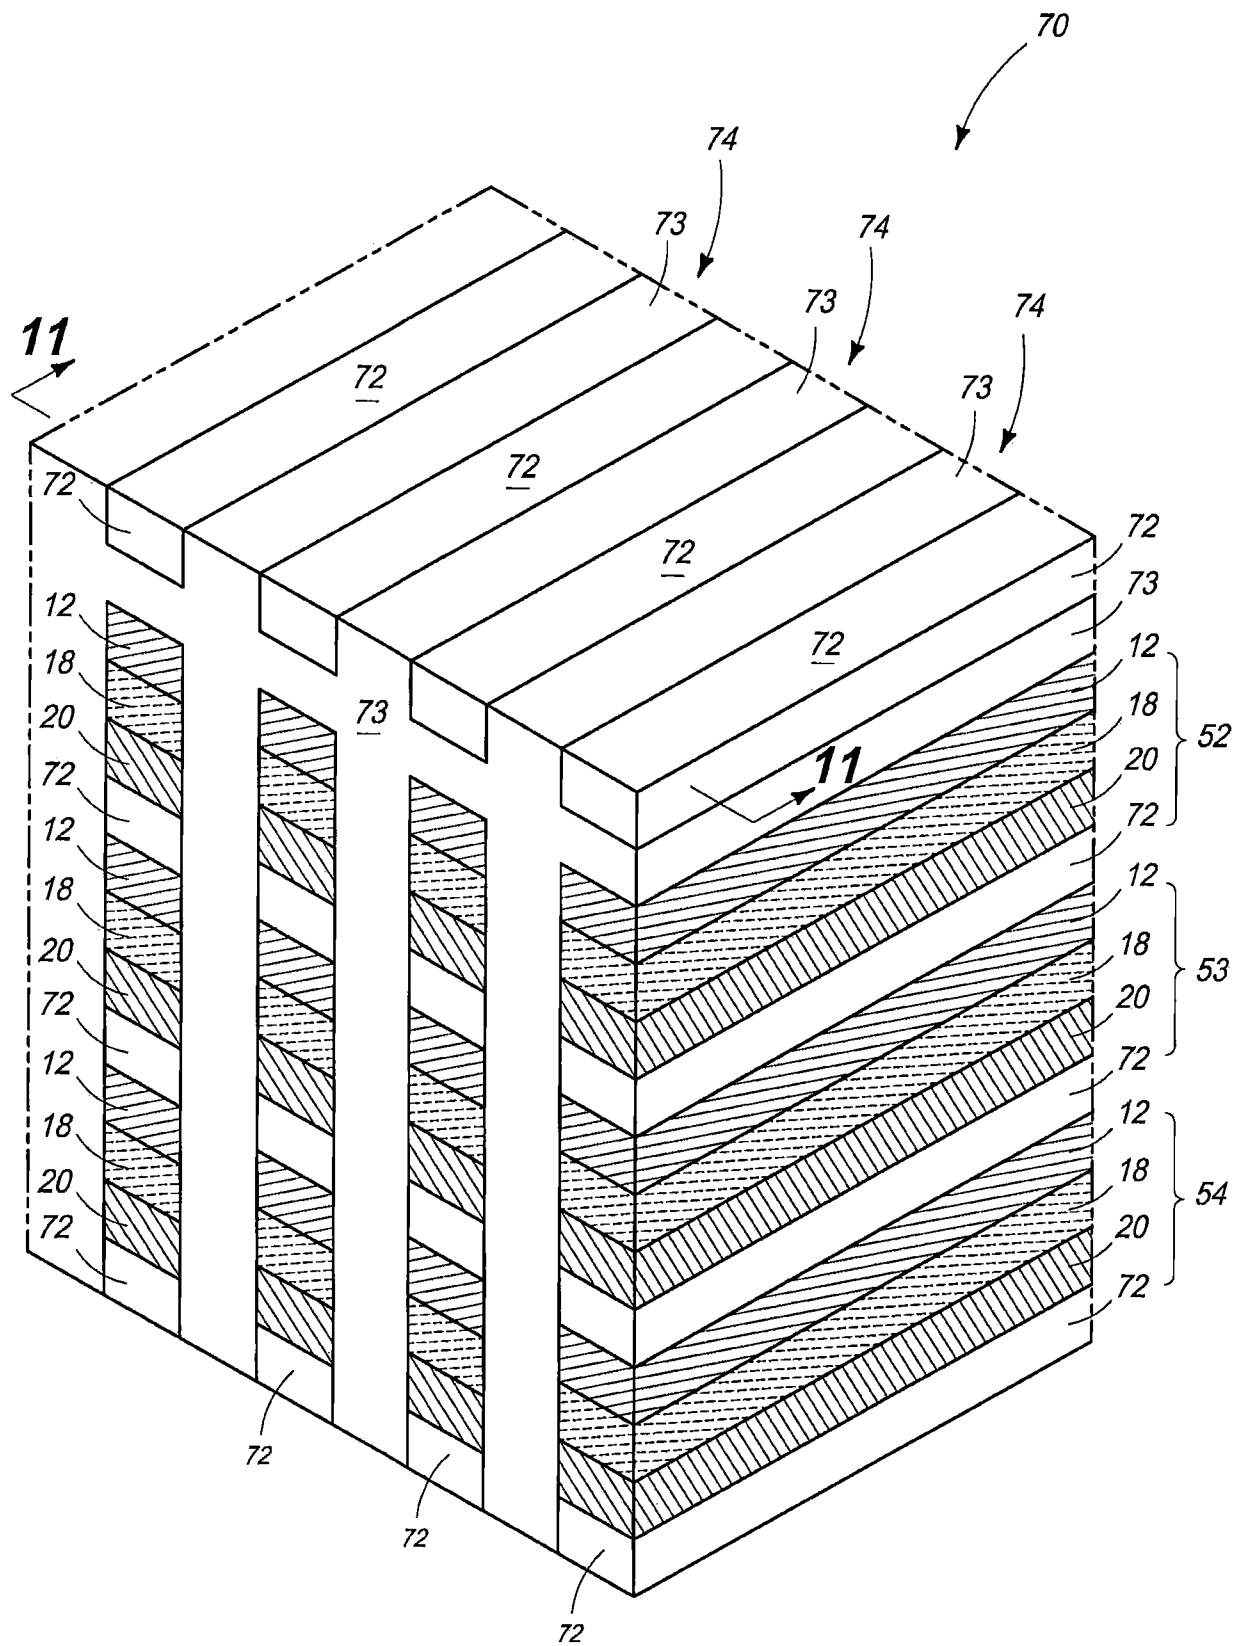


FIG. 10

9/29

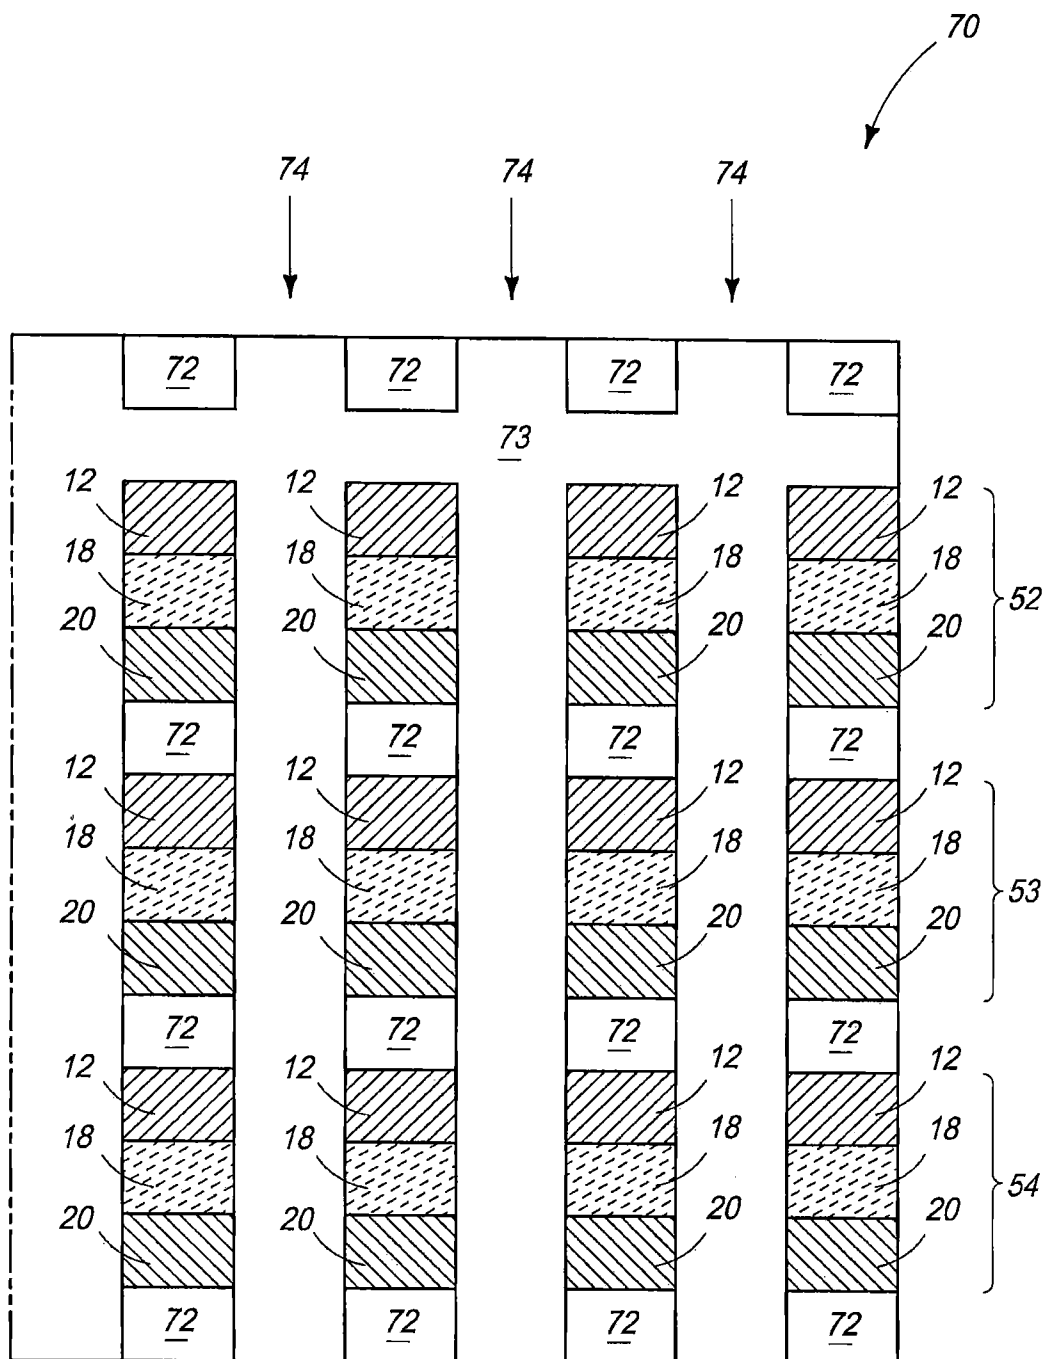


FIG. 11

10/29

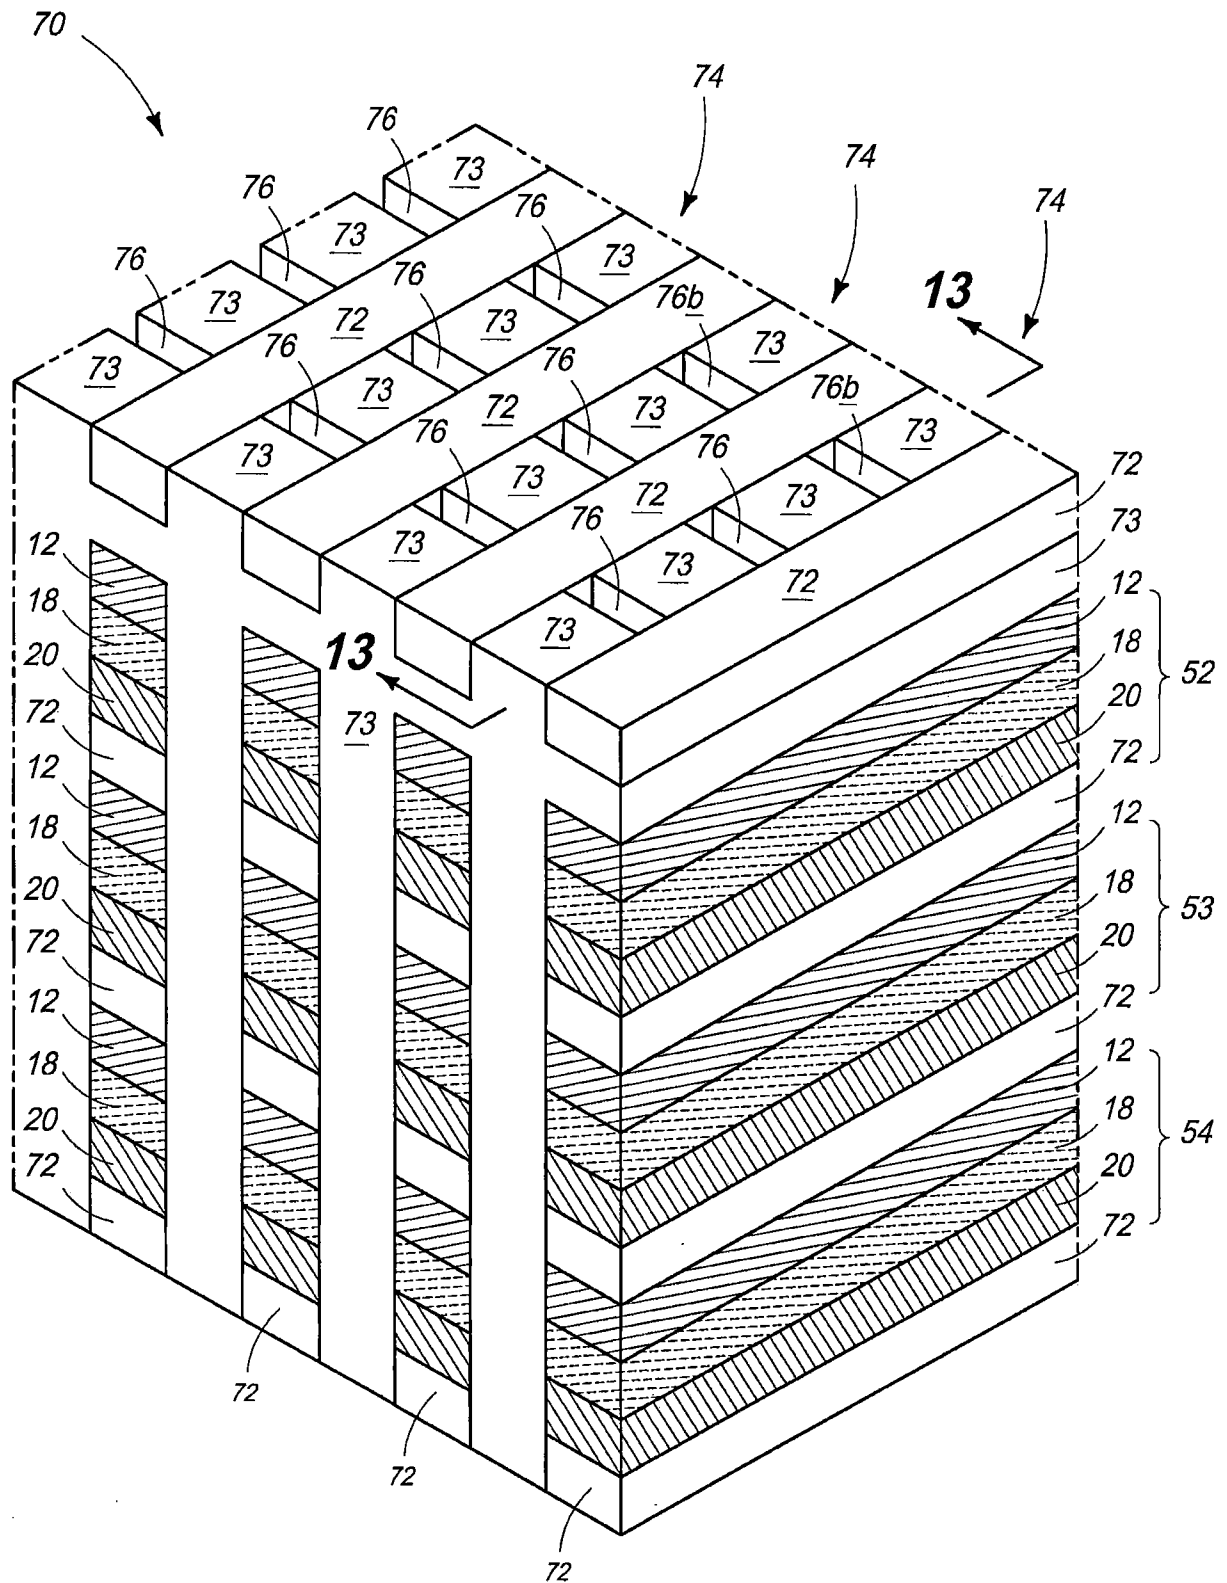


FIG. 12

11/29

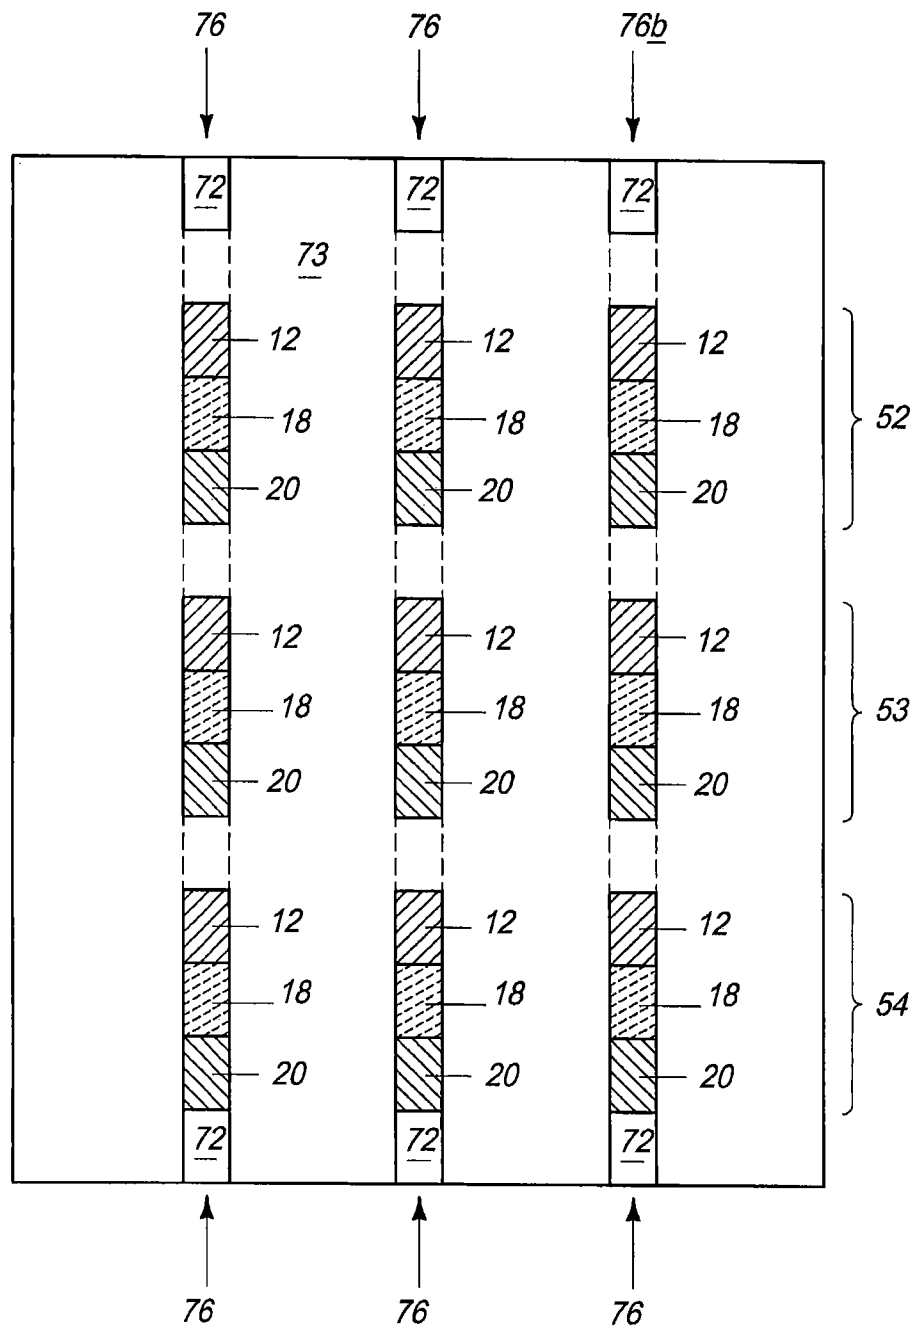


FIG. 13

12/29

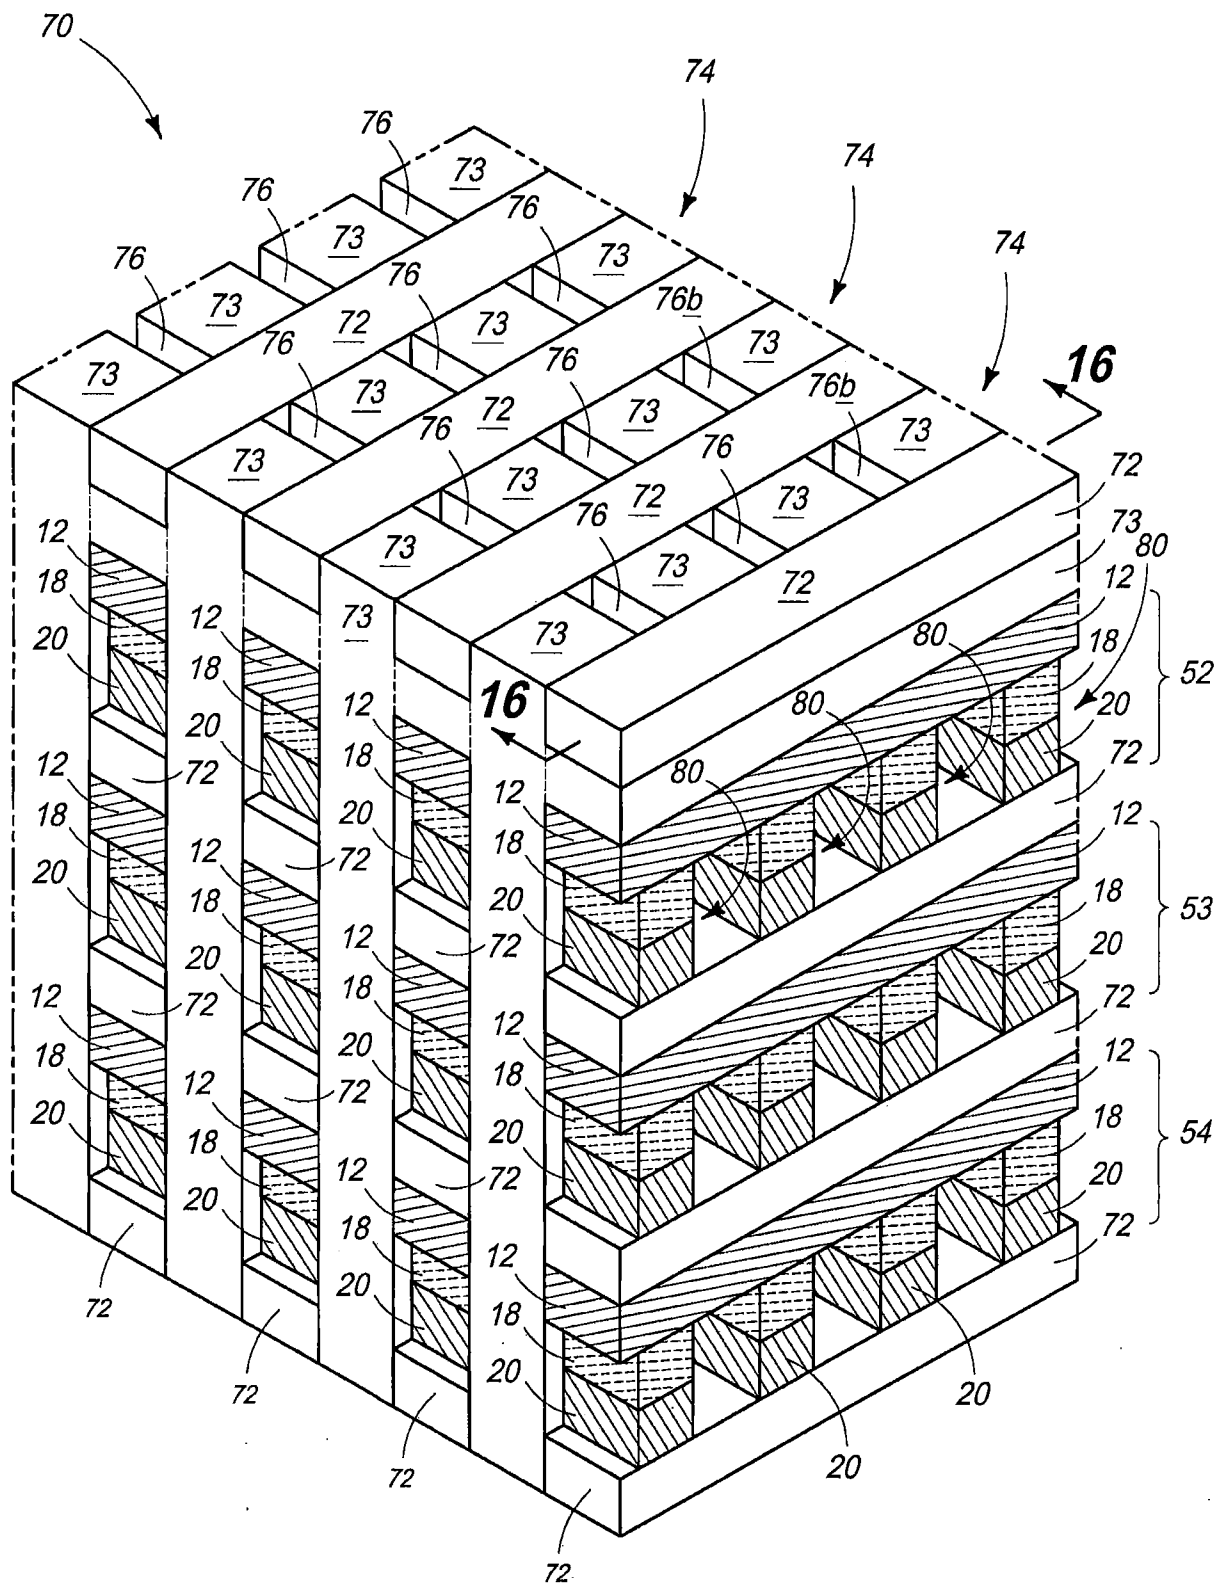


FIG. 14

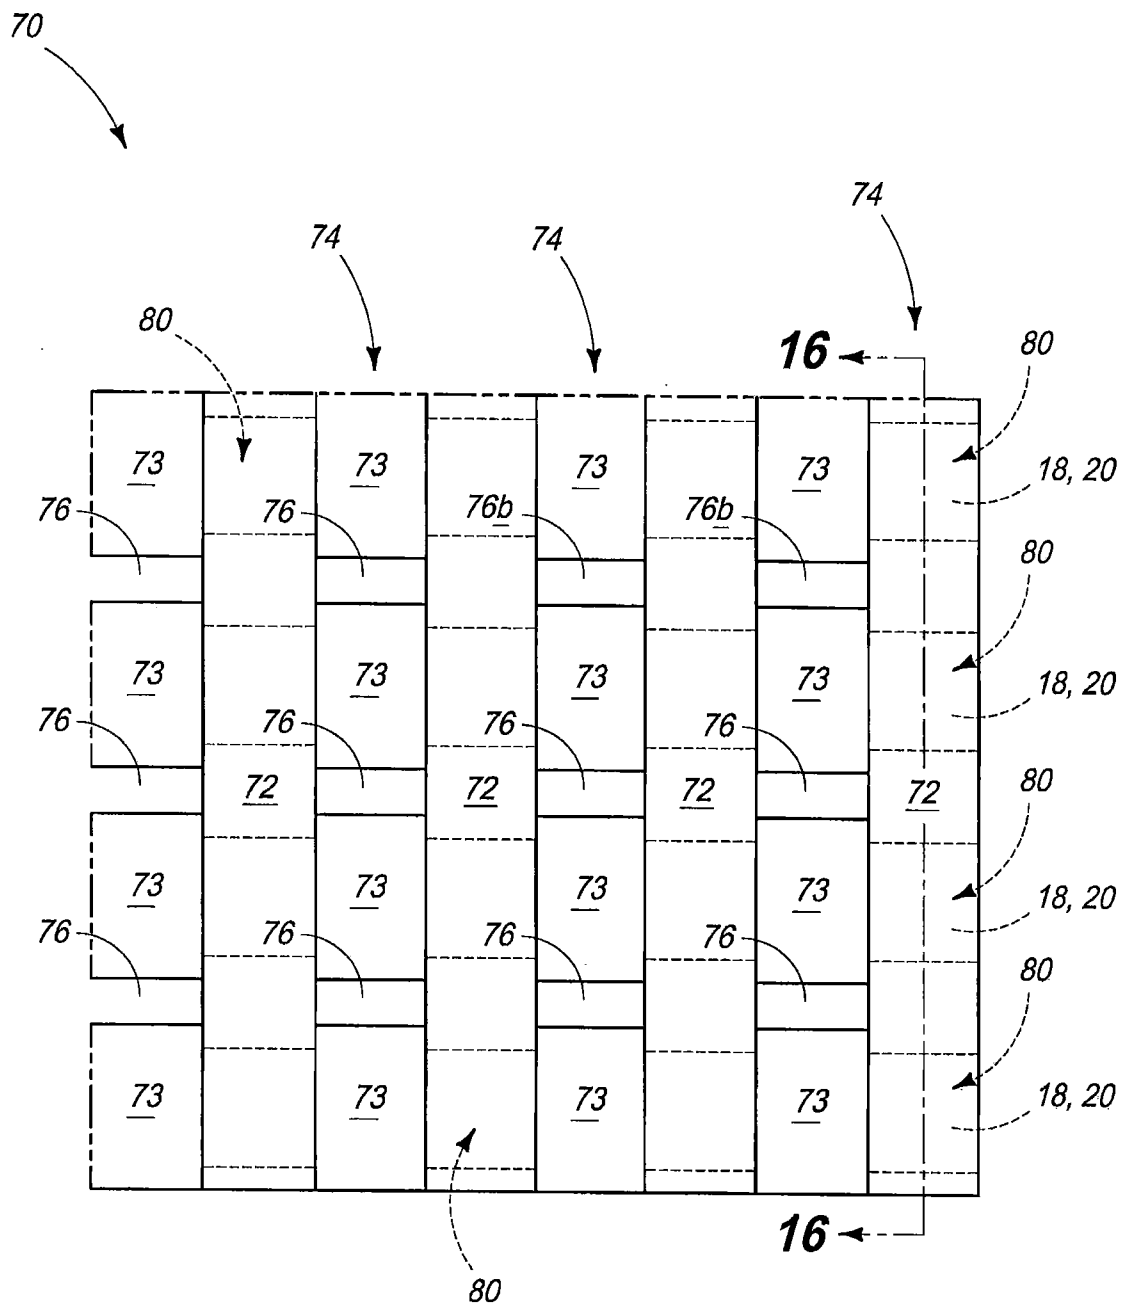


FIG. 15

14/29

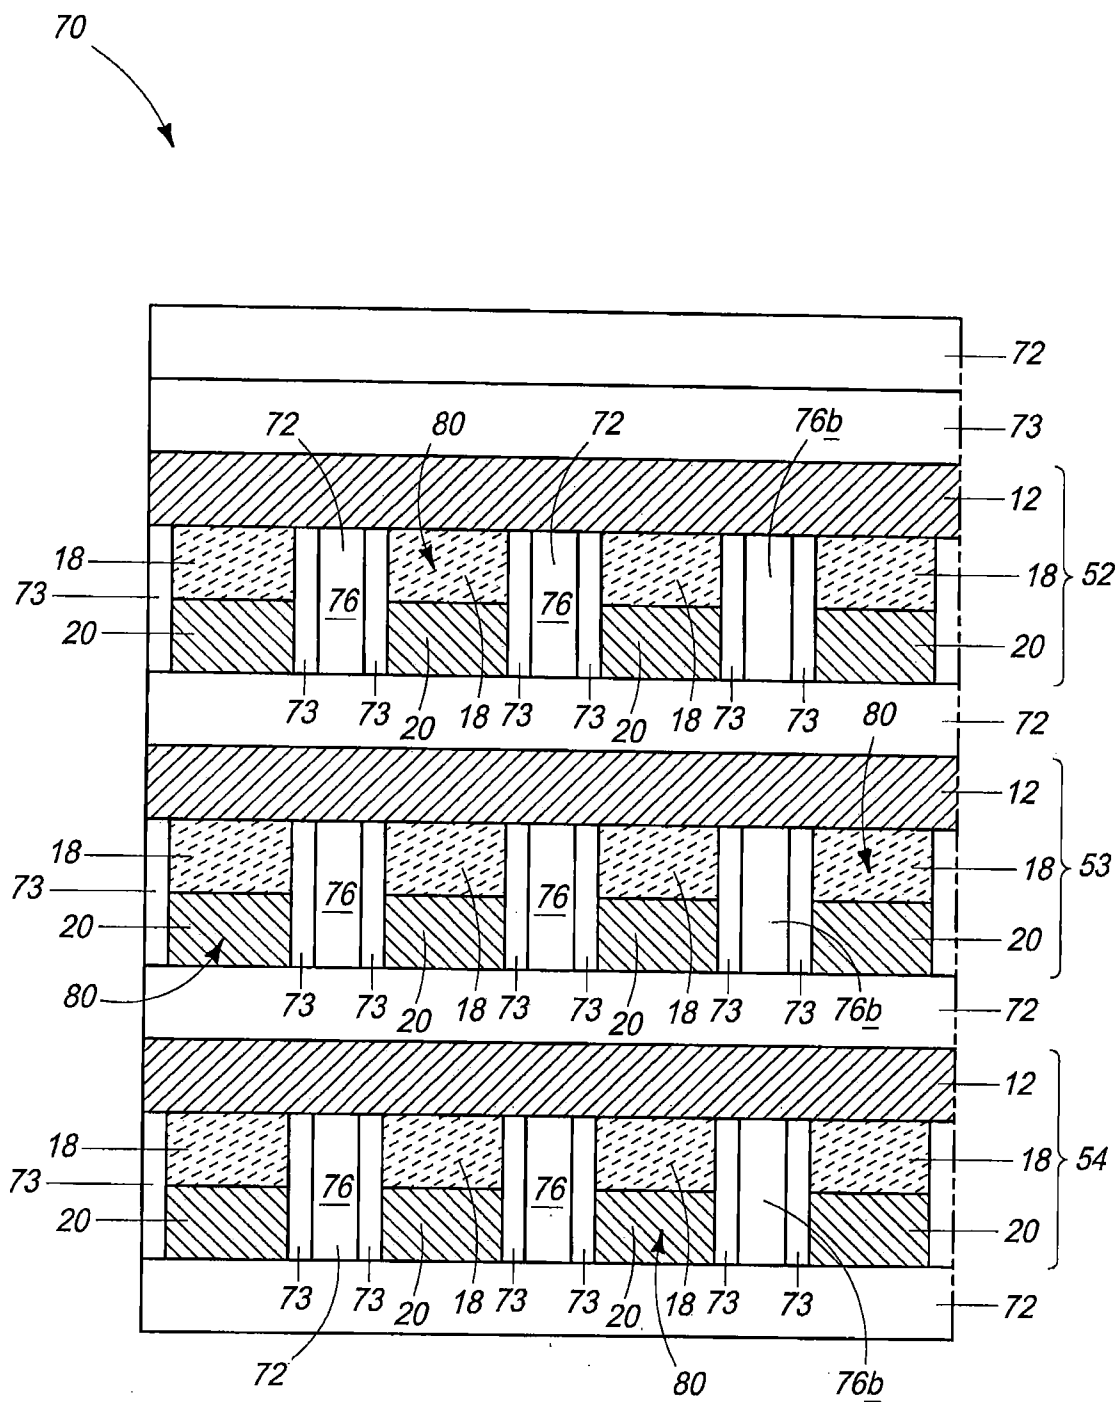


FIG. 16

15/29

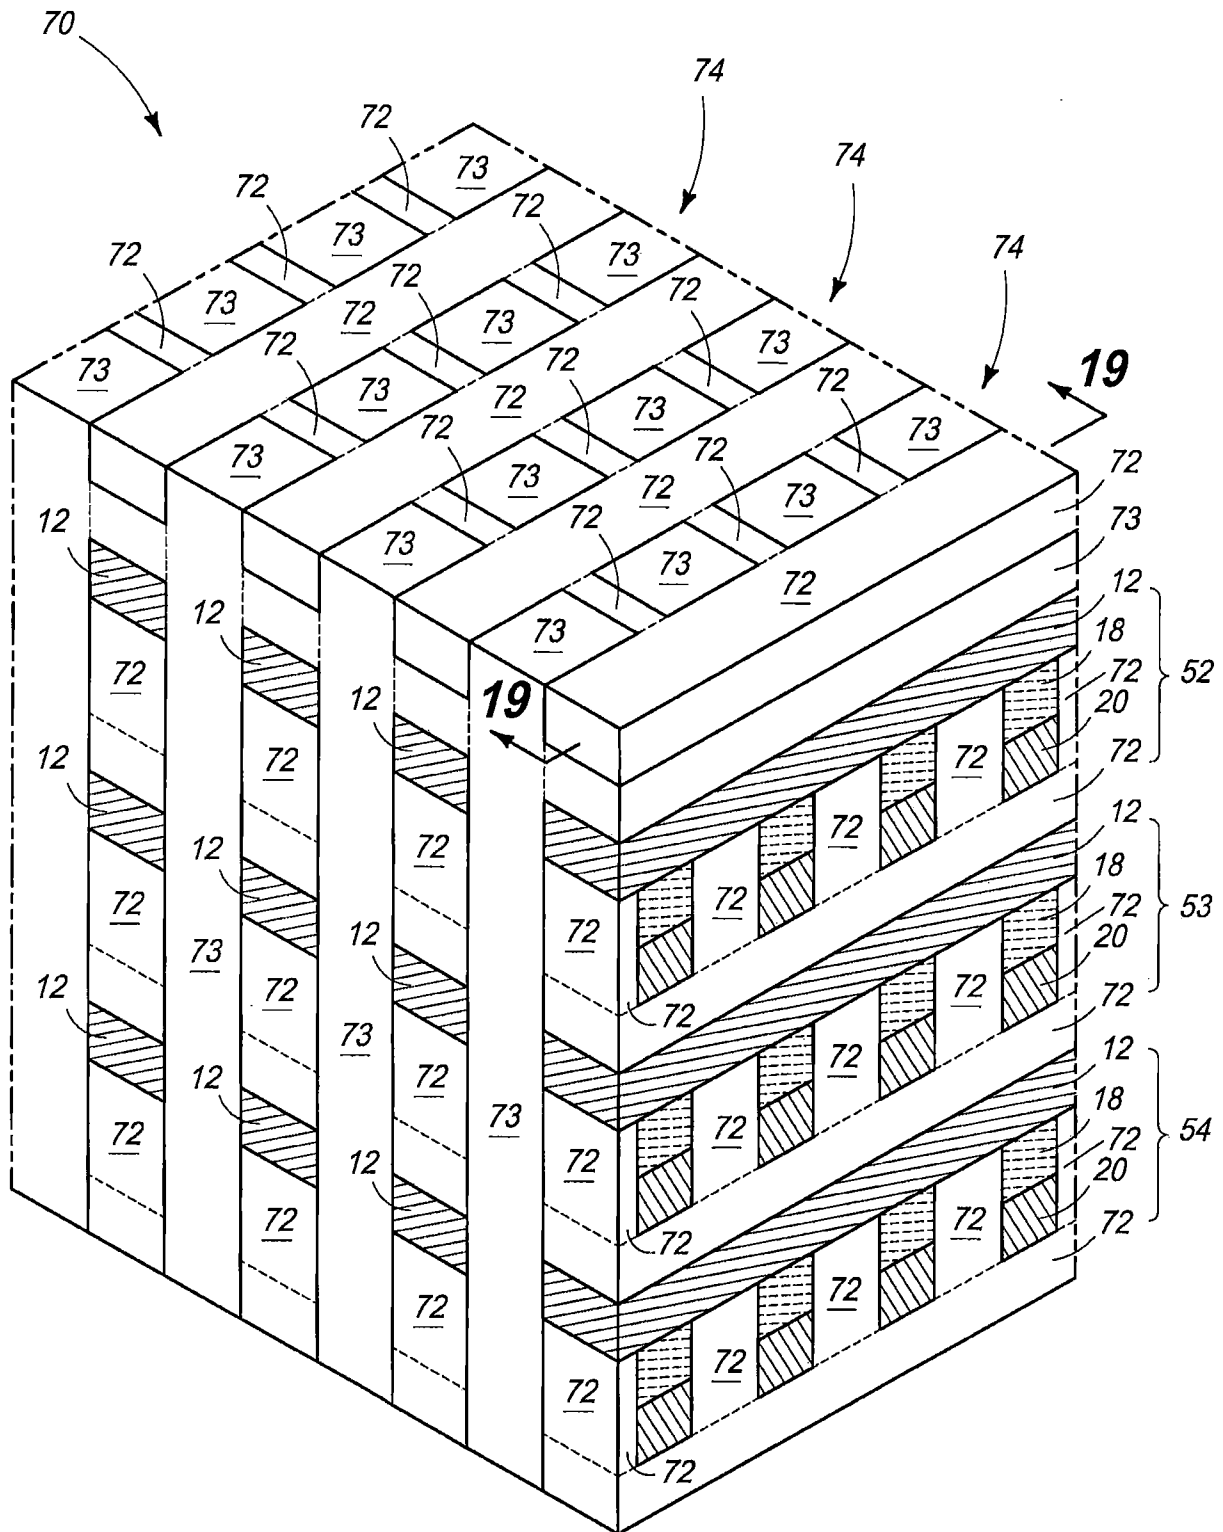


FIG. 17

16/29

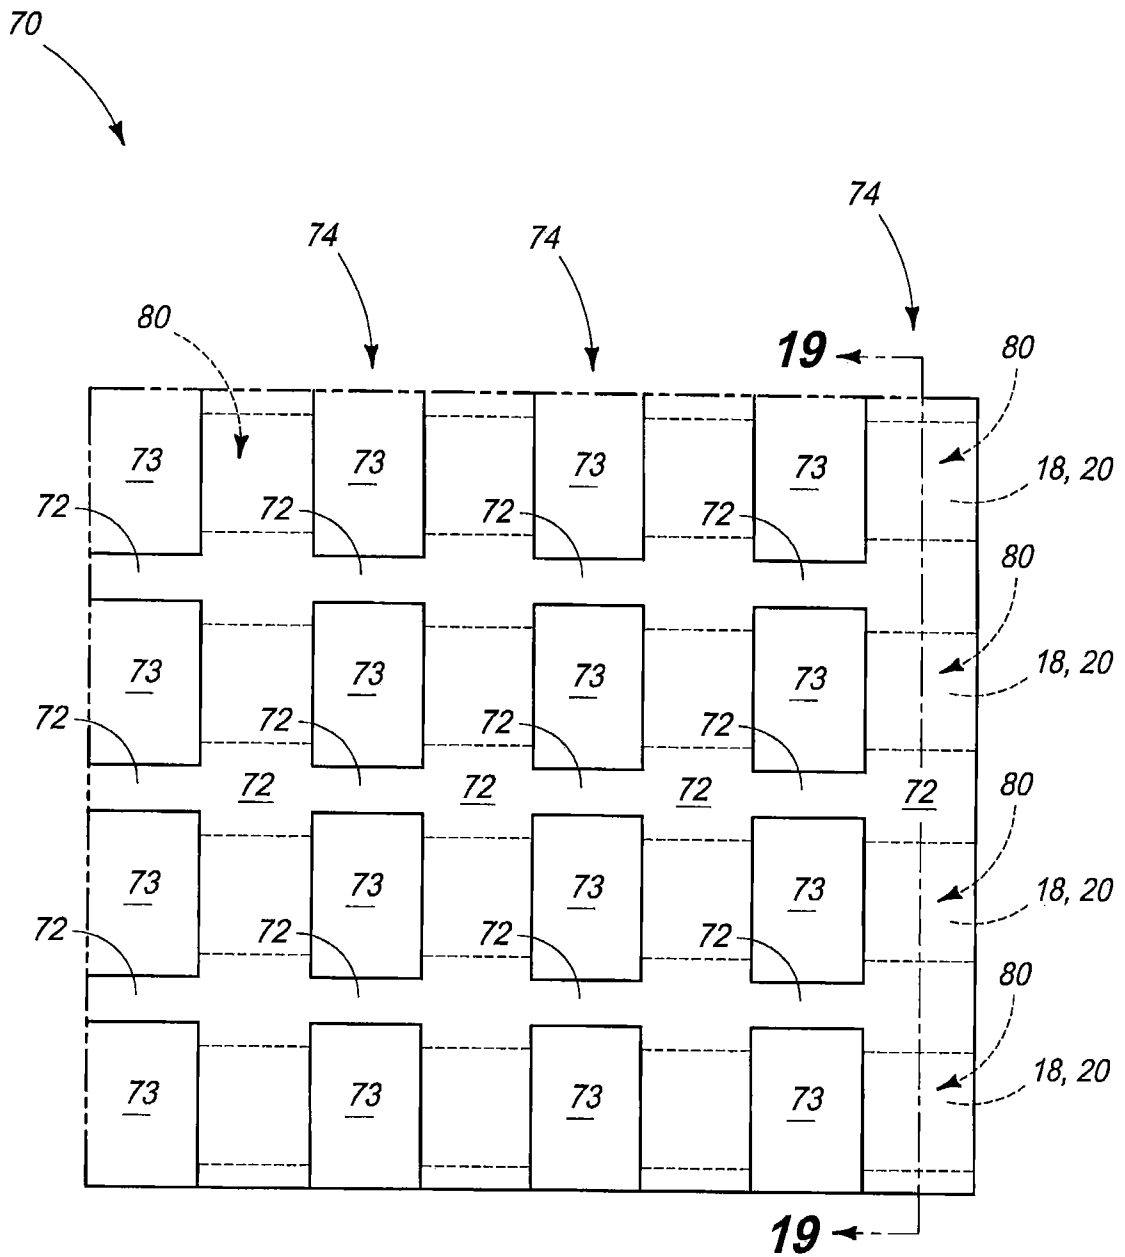


FIG. 18

17/29

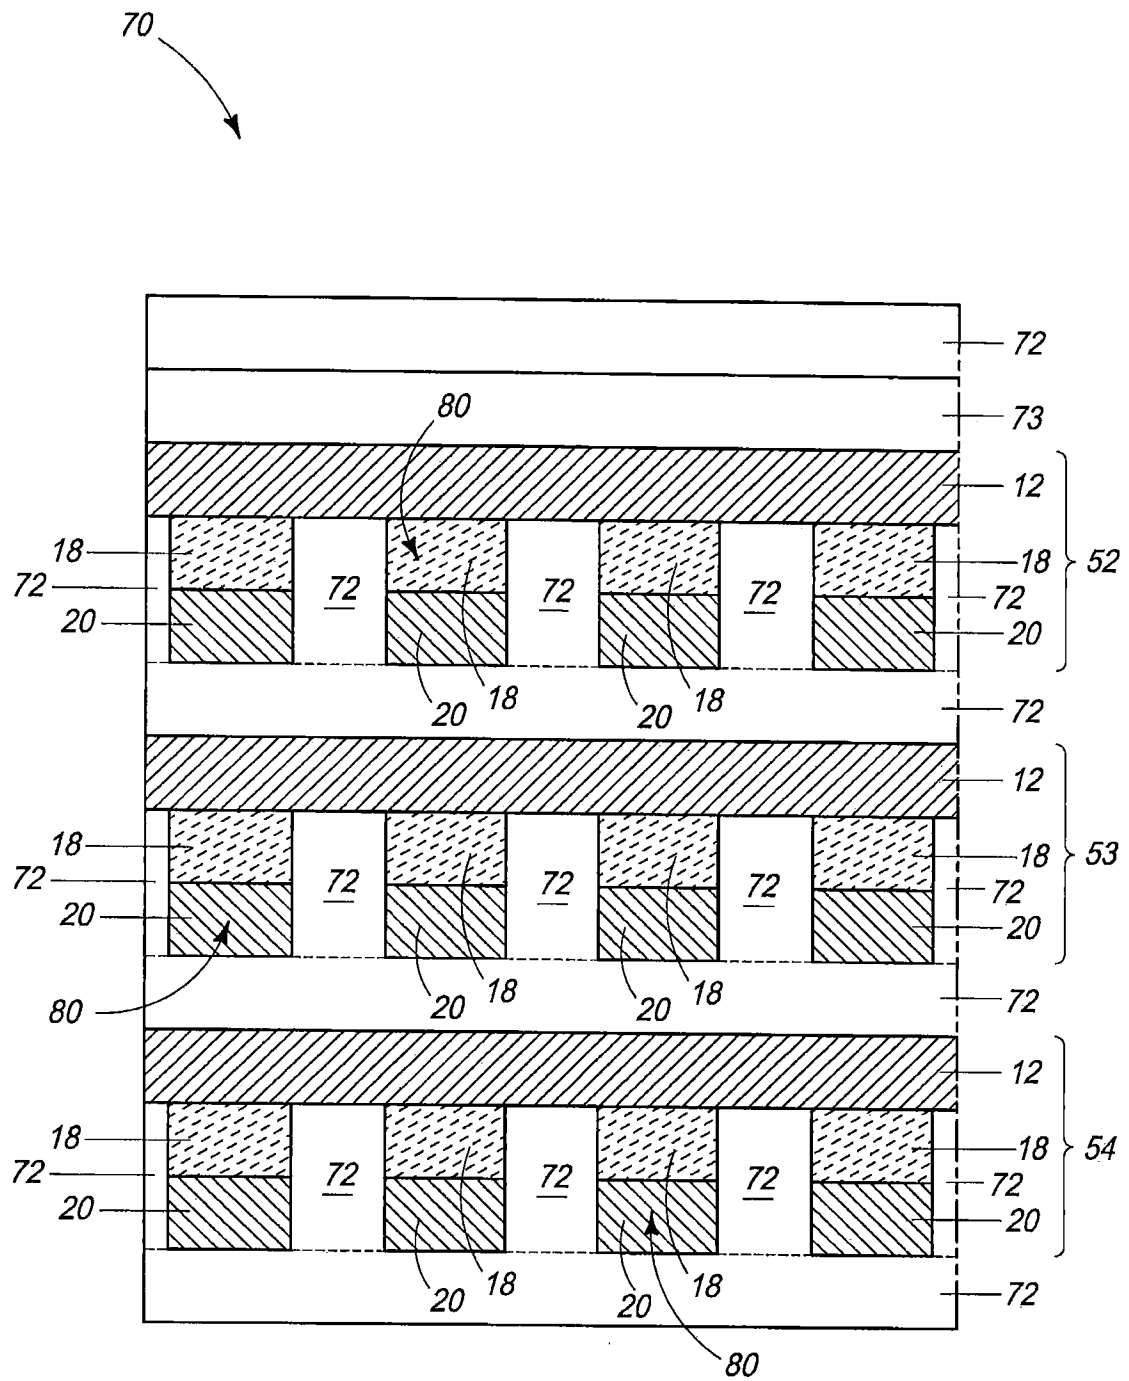


FIG. 19

18/29

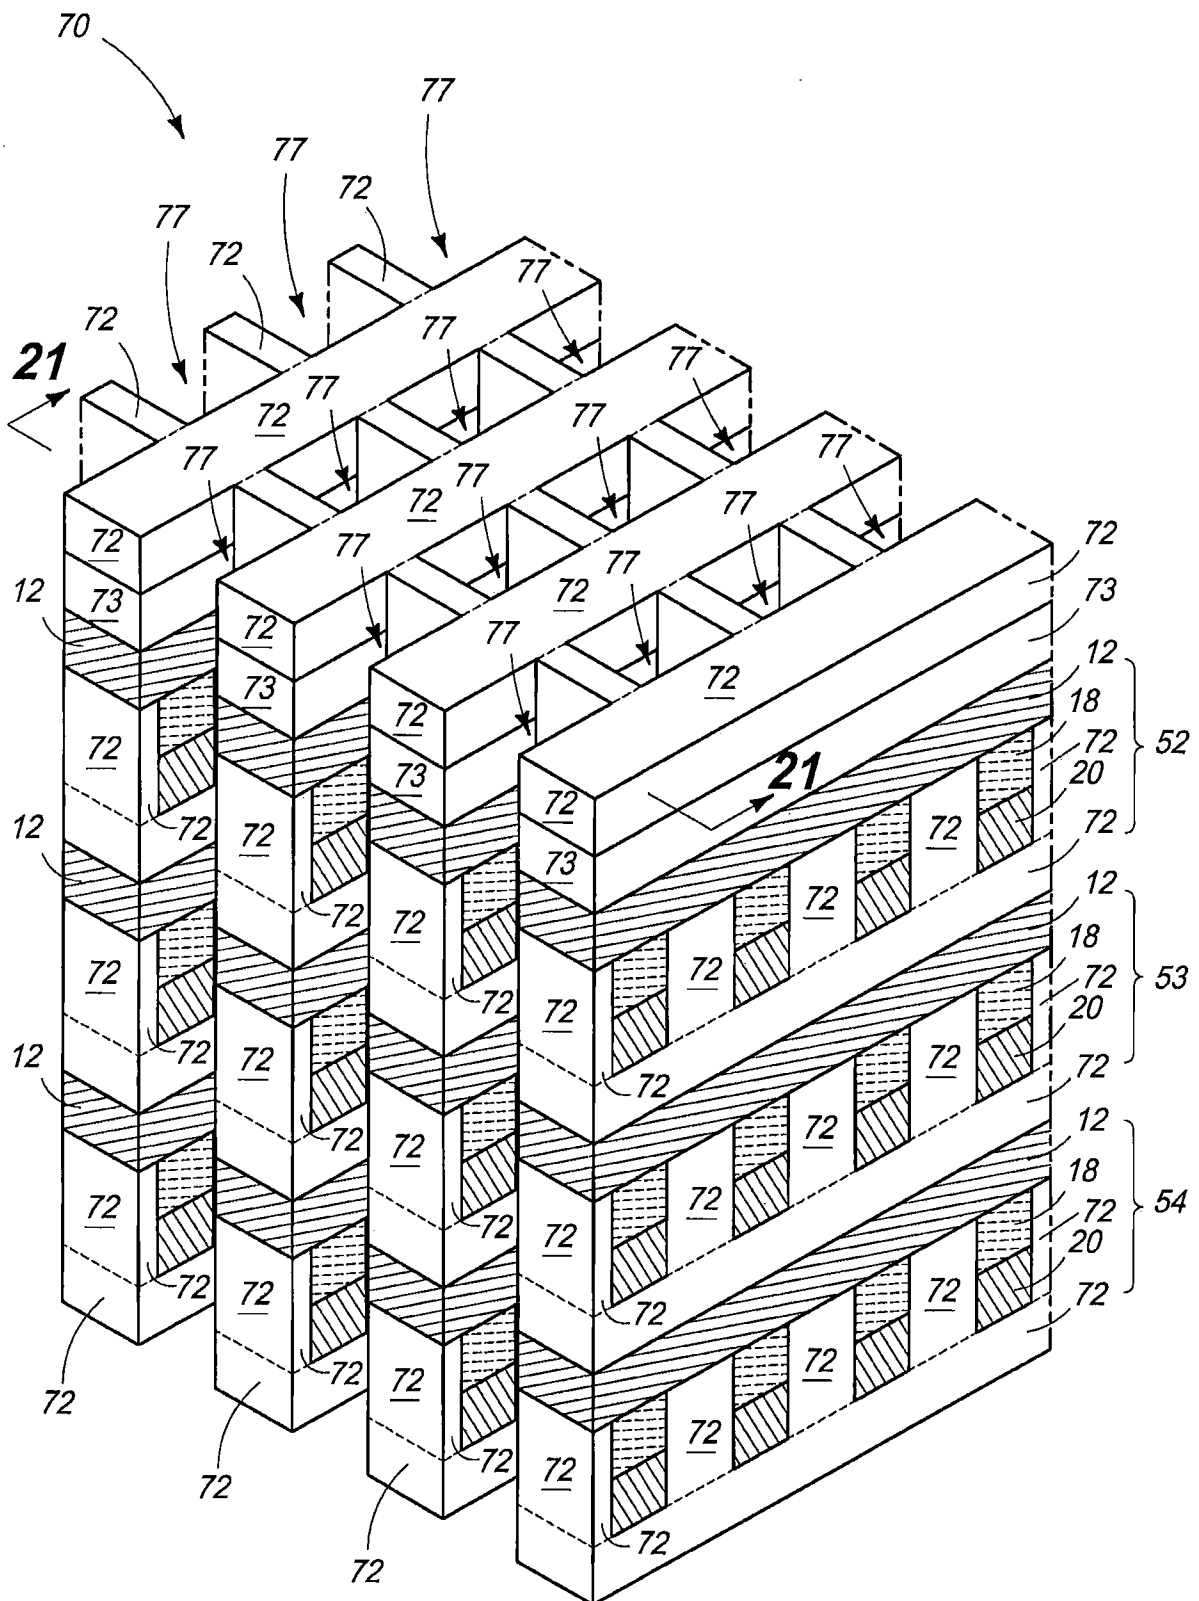


FIG. 20

19/29

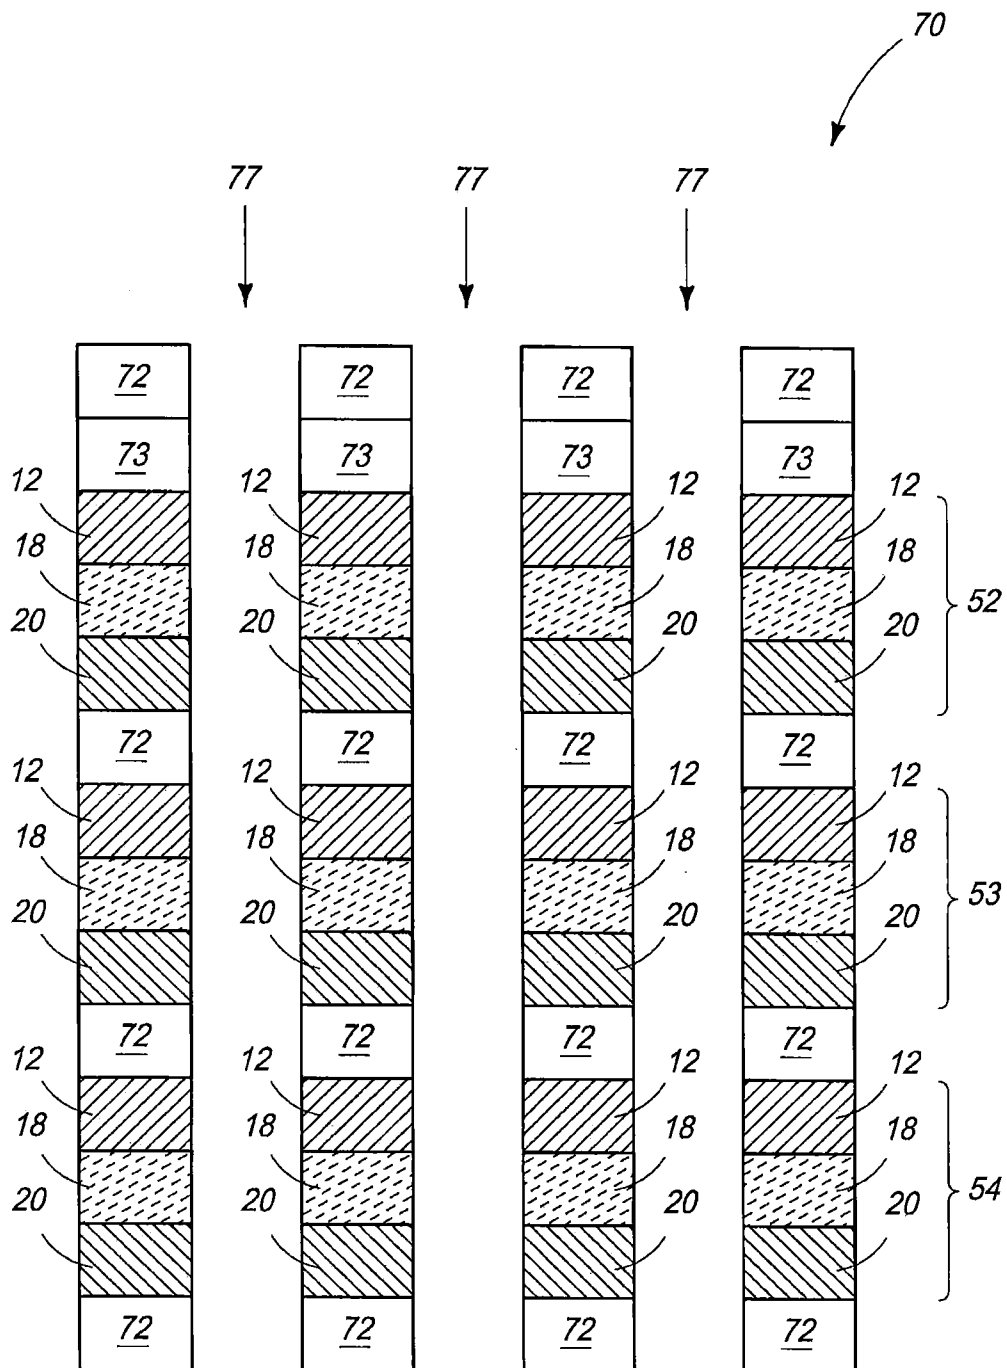


FIG. 21

20/29

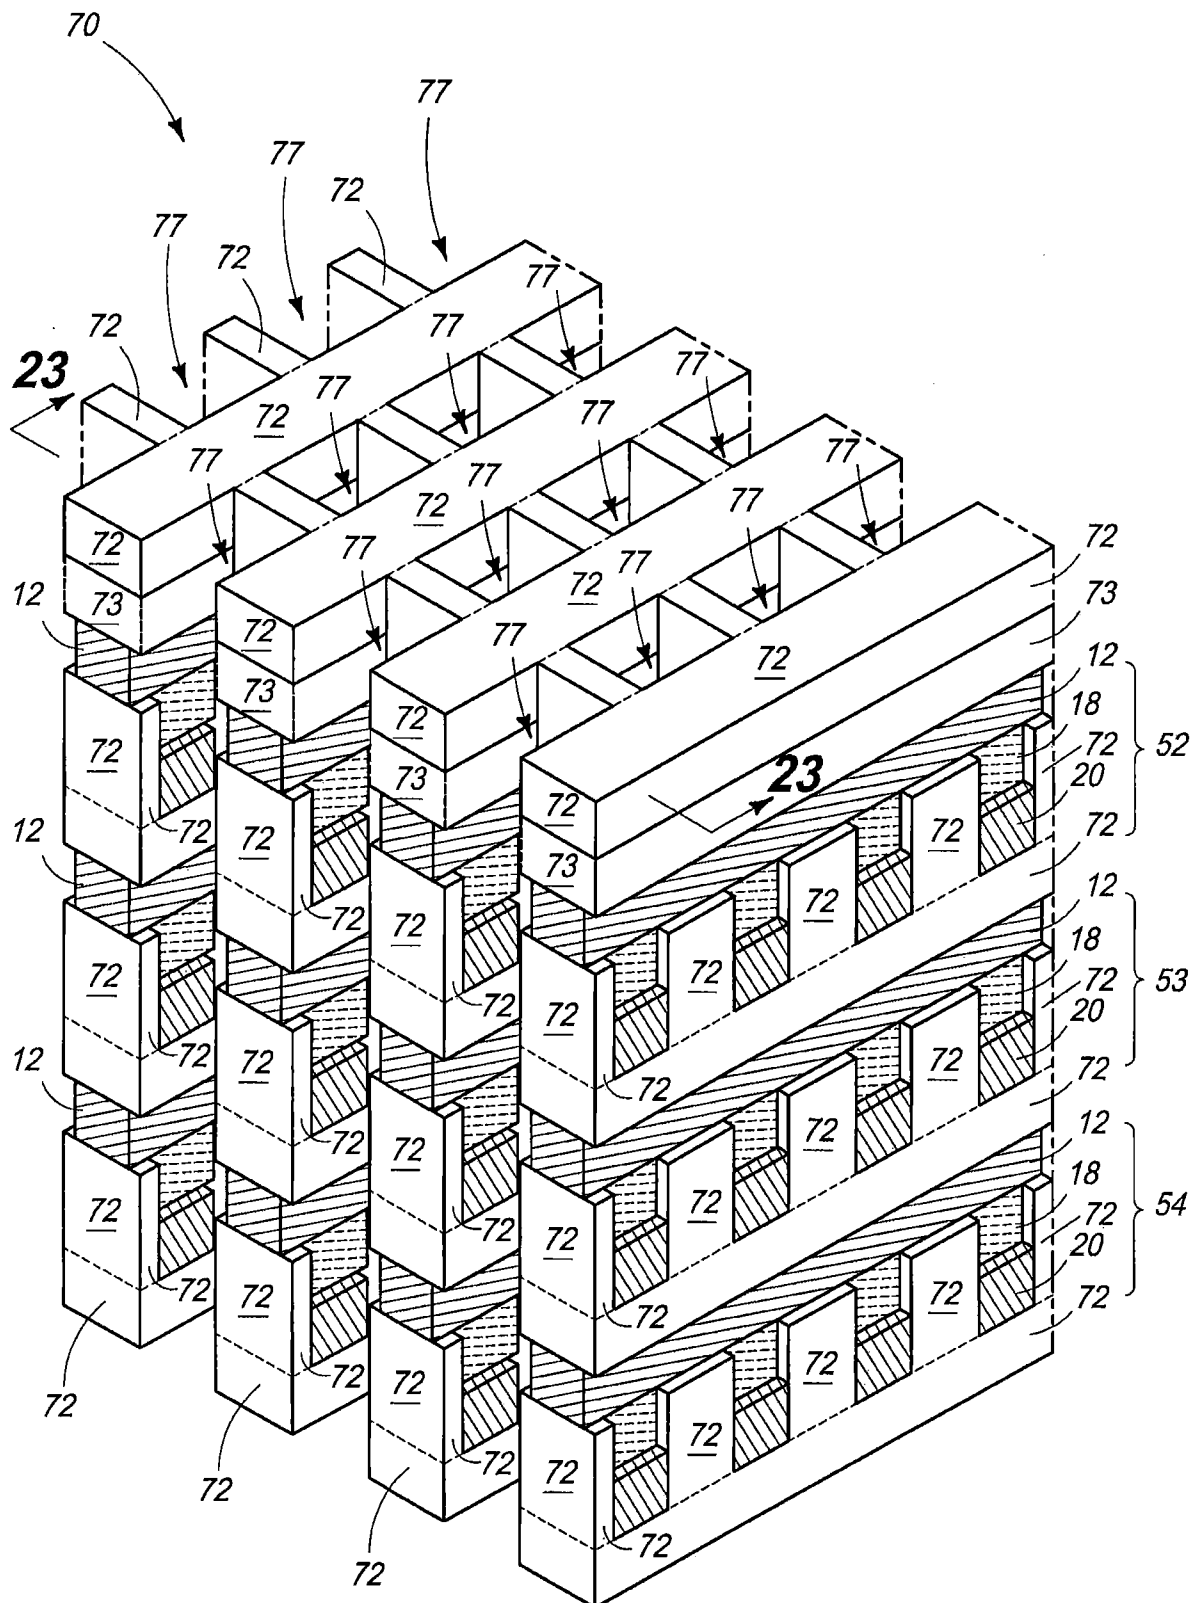


FIG. 22

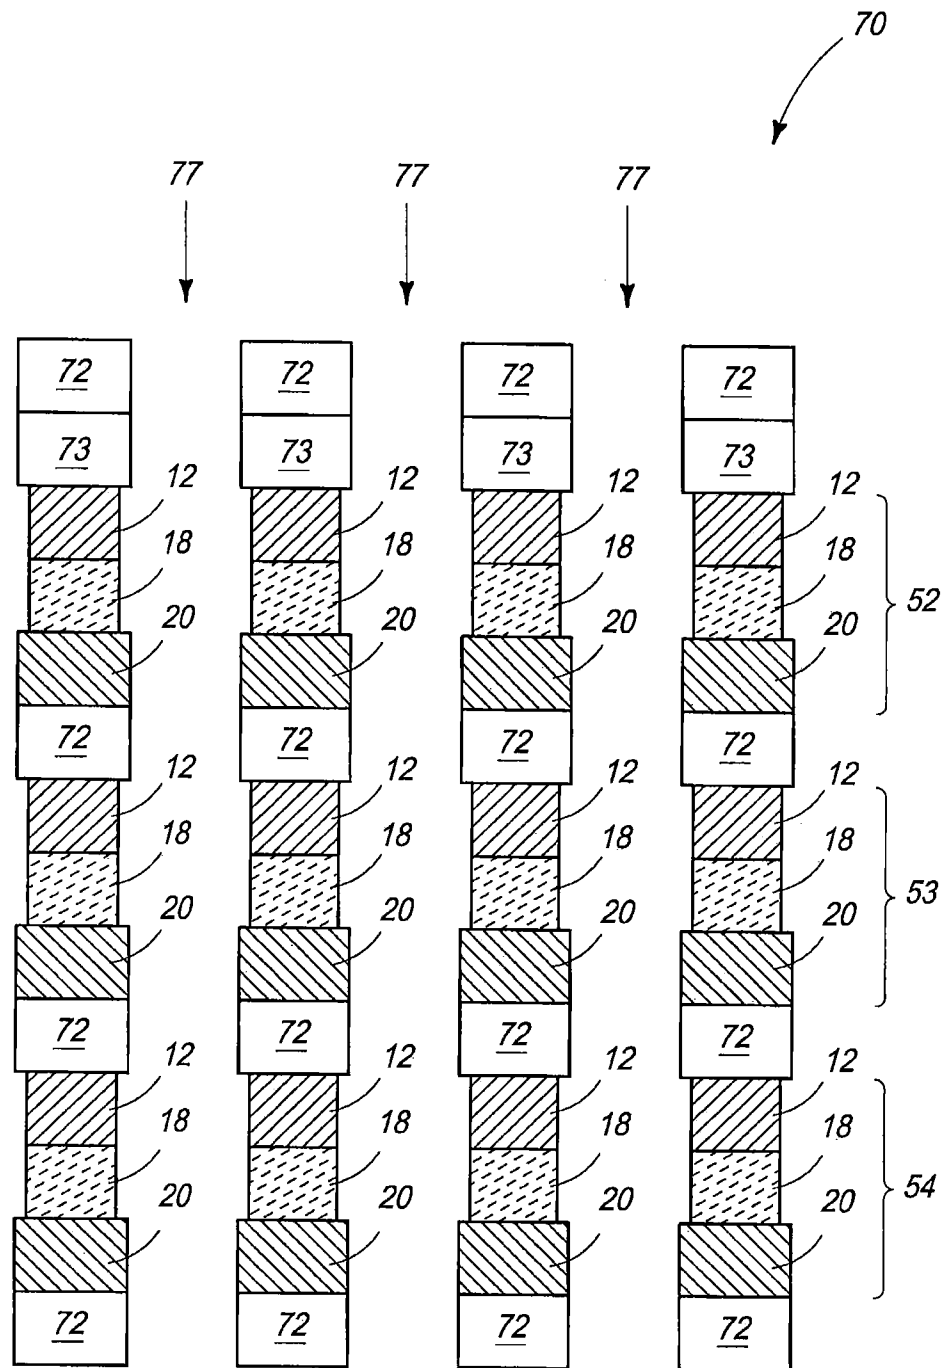


FIG. 23

22/29

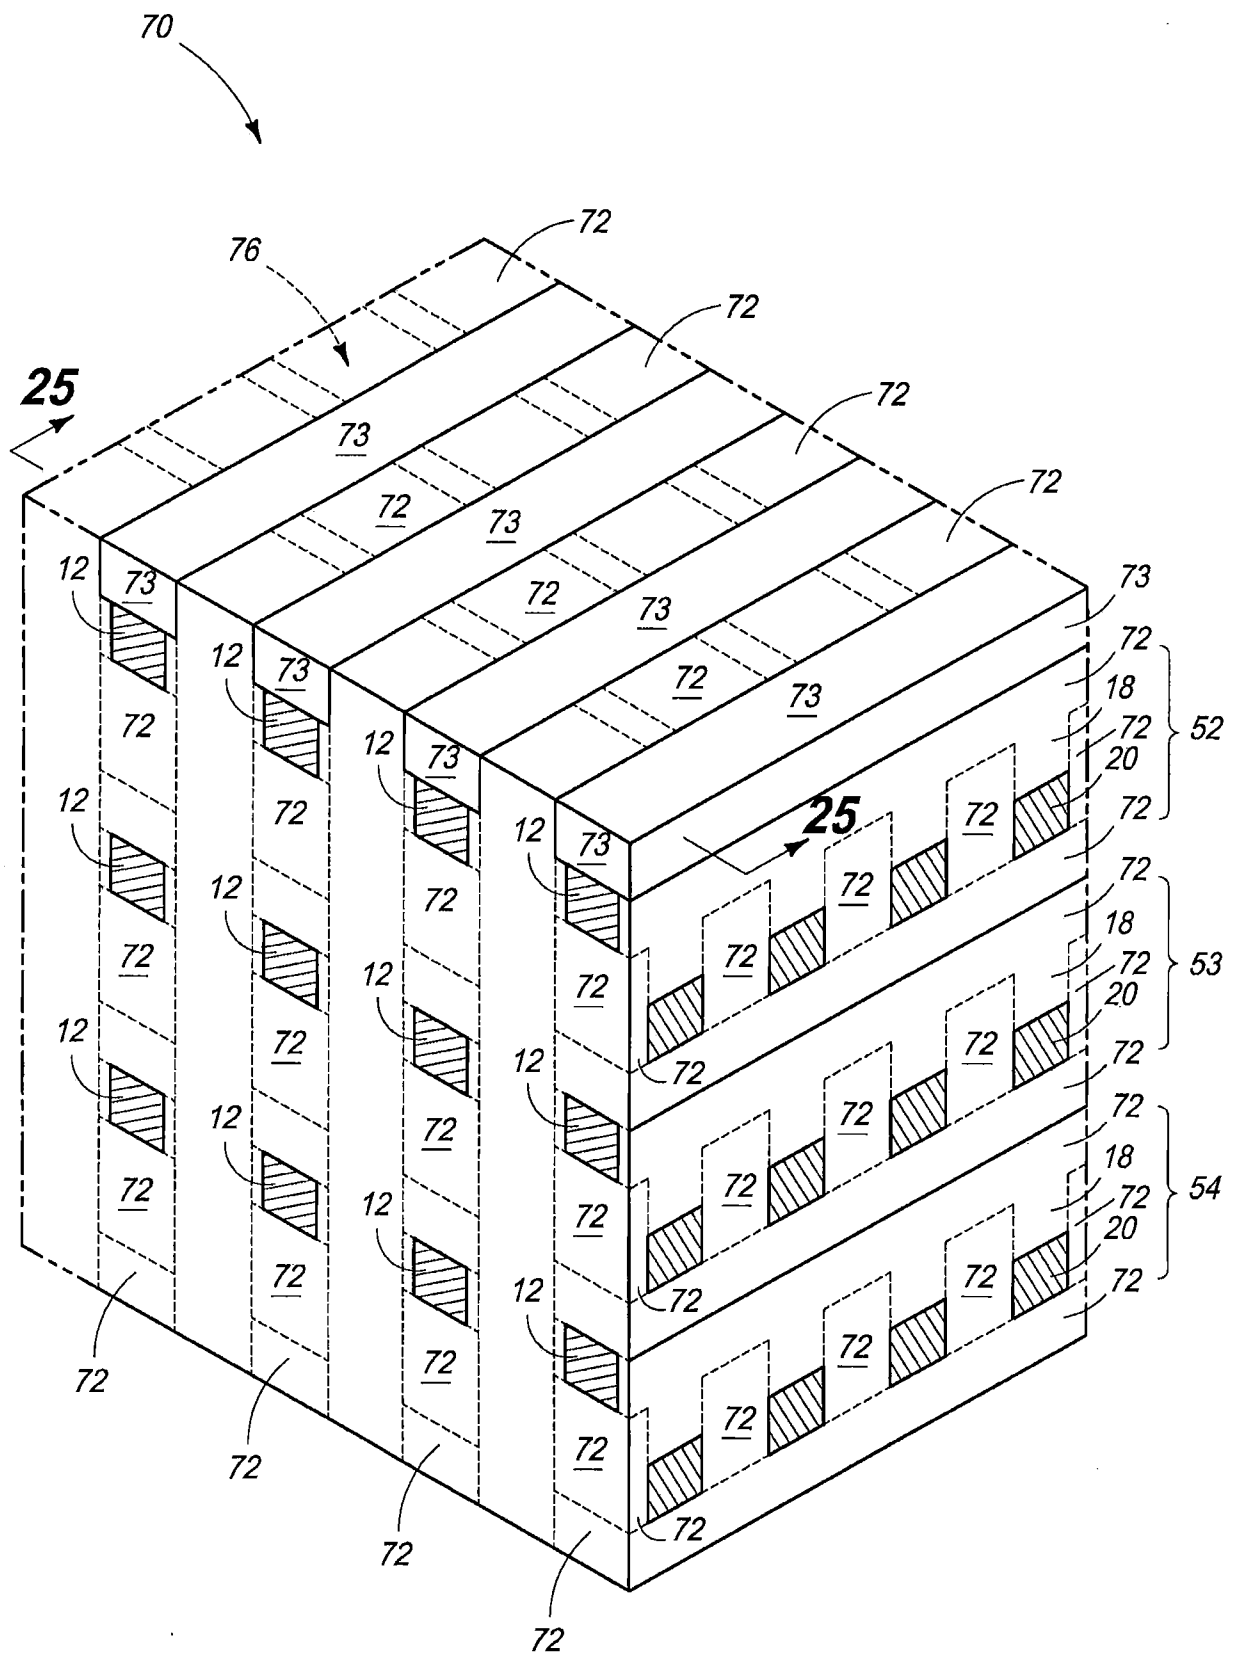
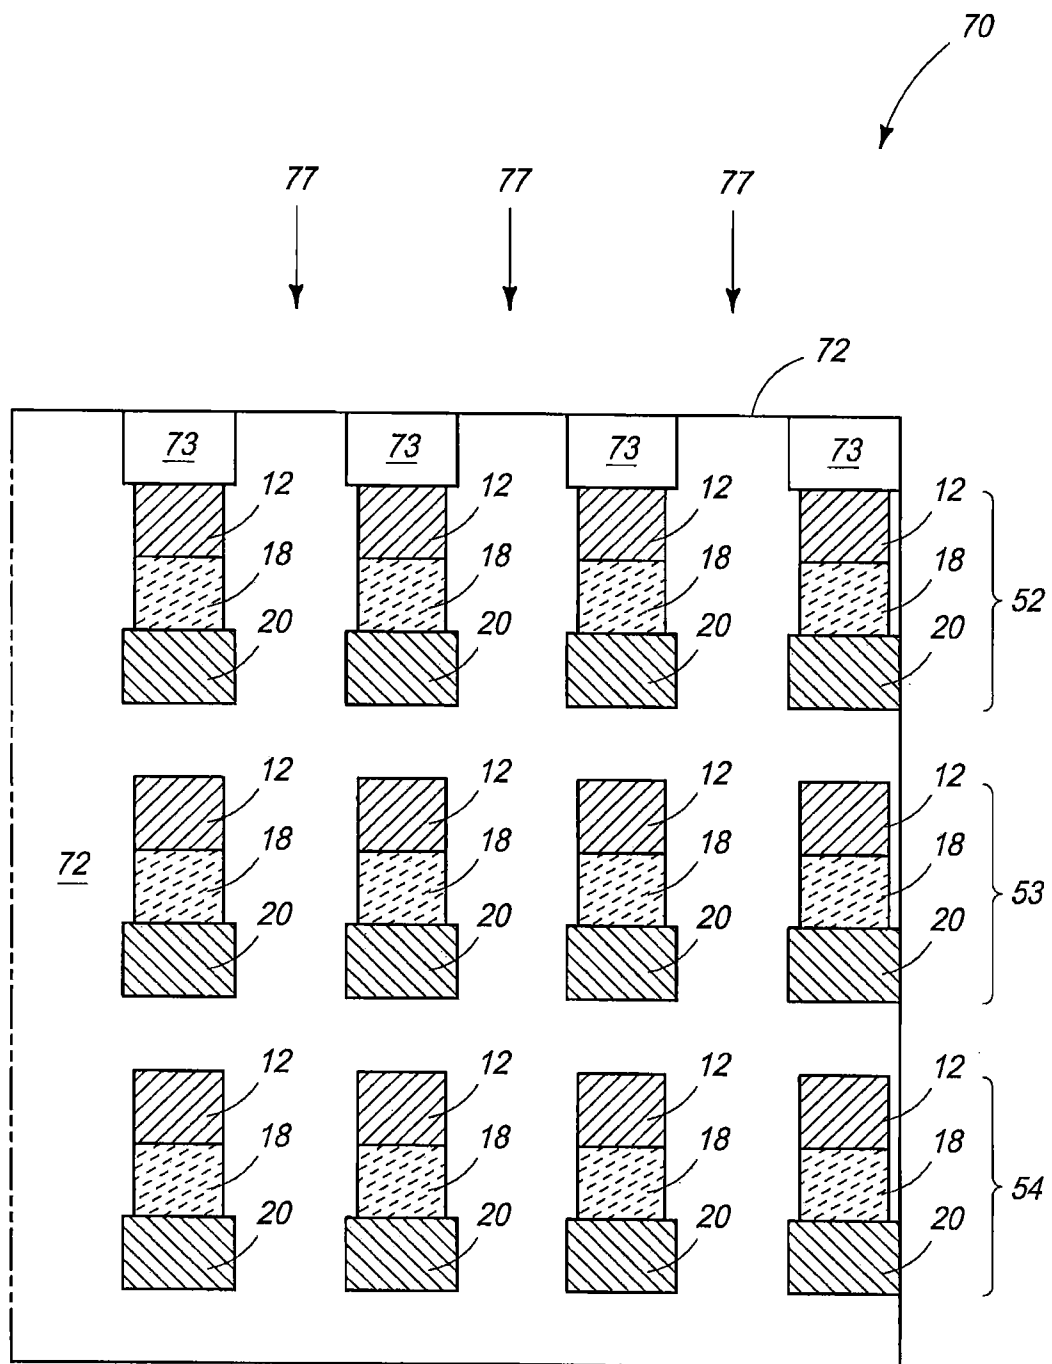


FIG. 24

23/29

**FIG. 25**

24/29

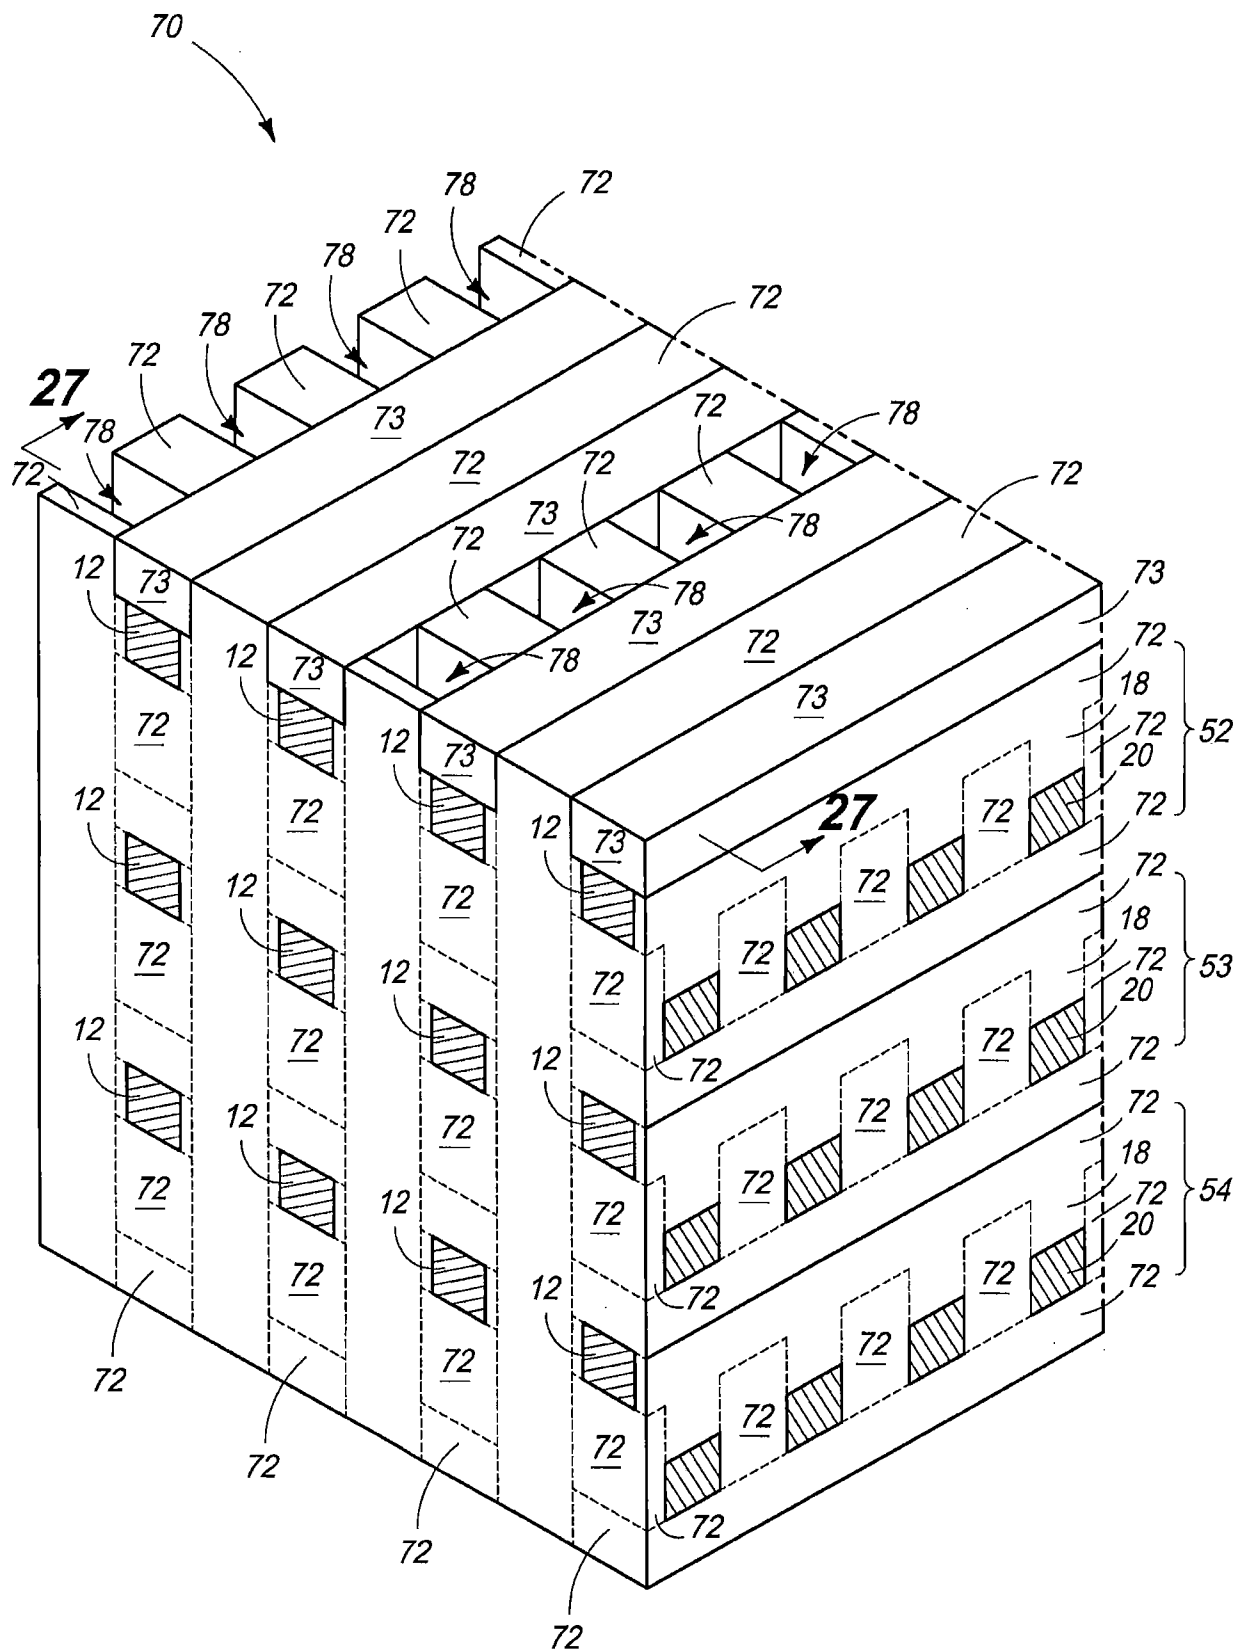


FIG. 26

25/29

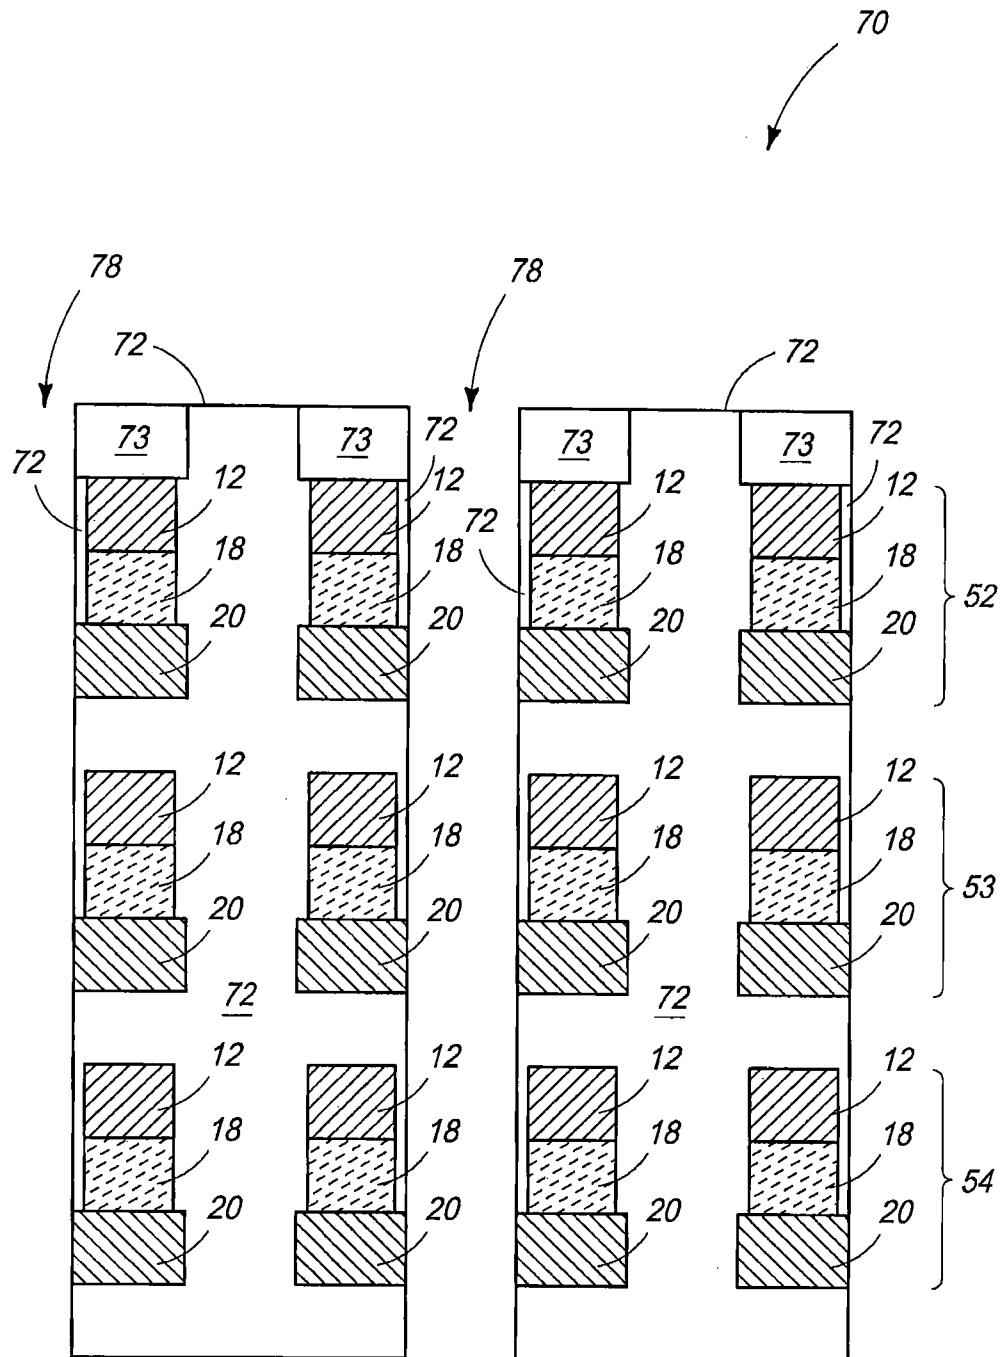


FIG. 27

26/29

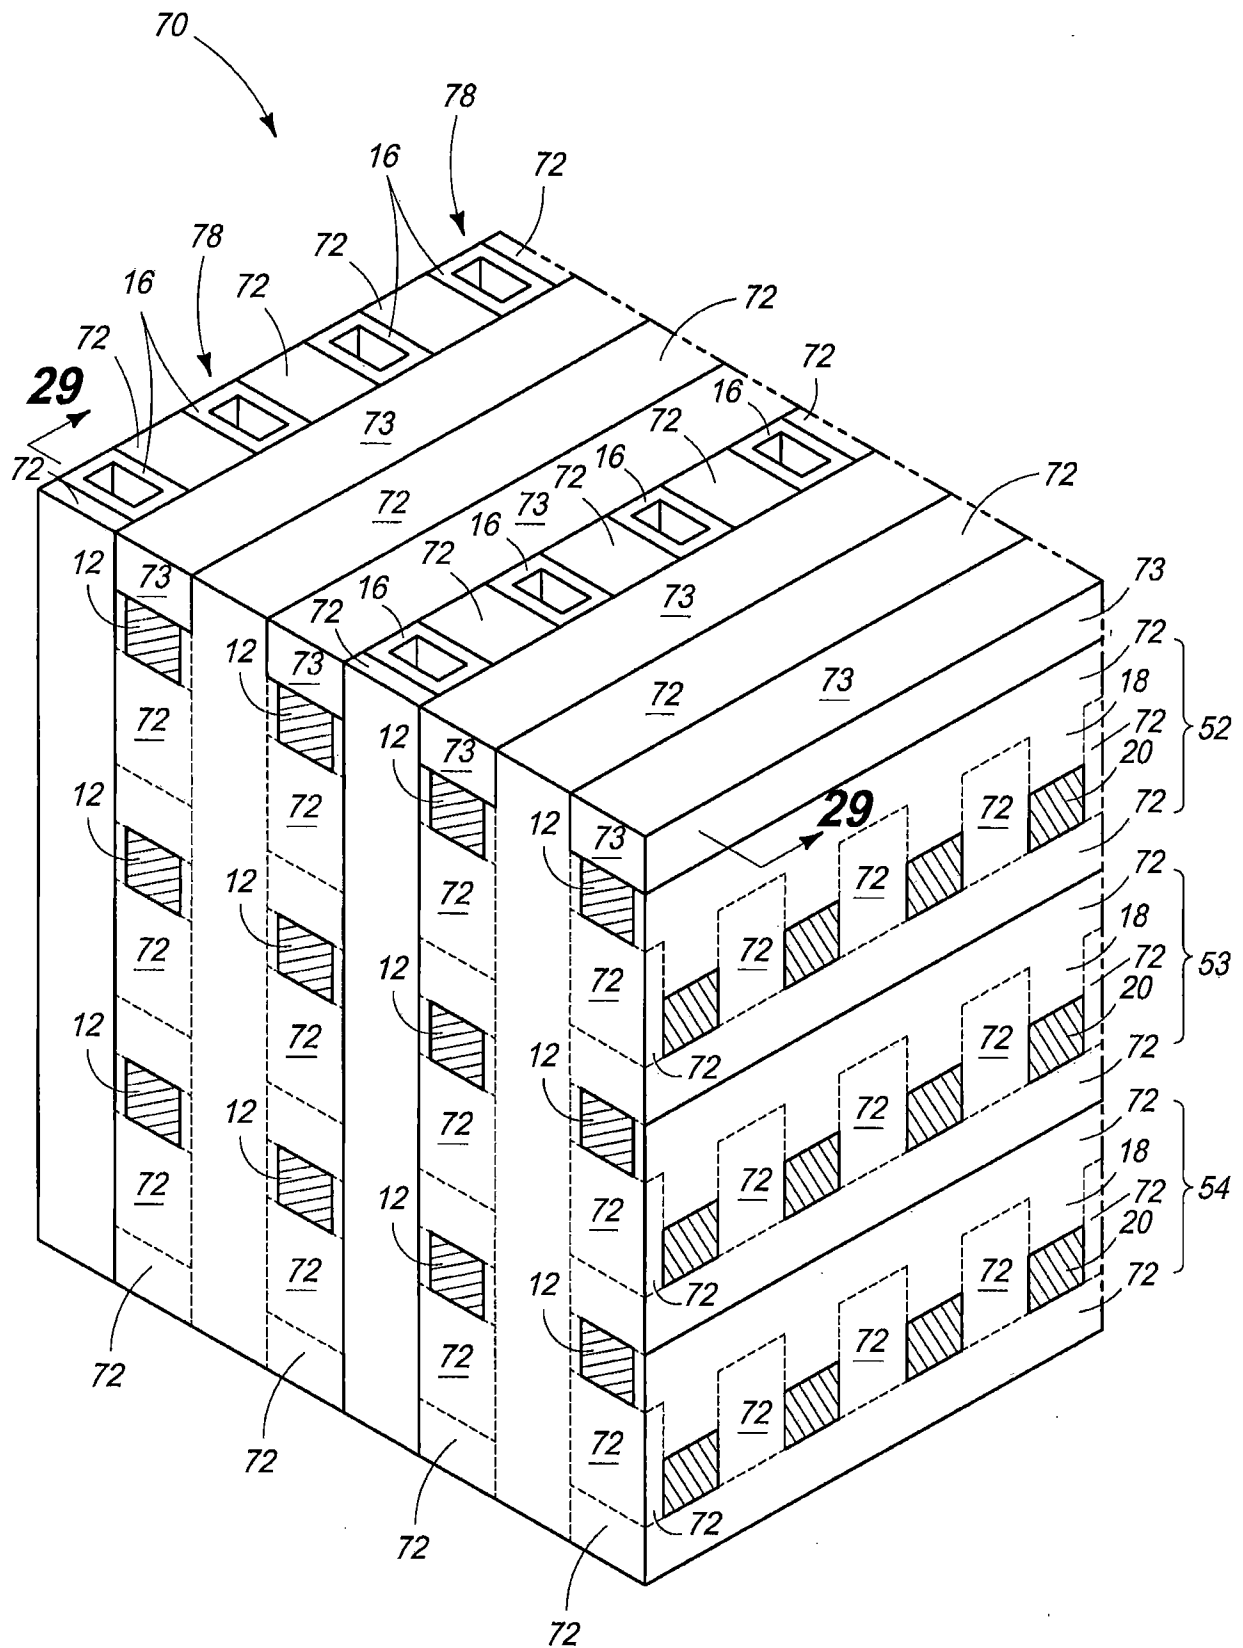
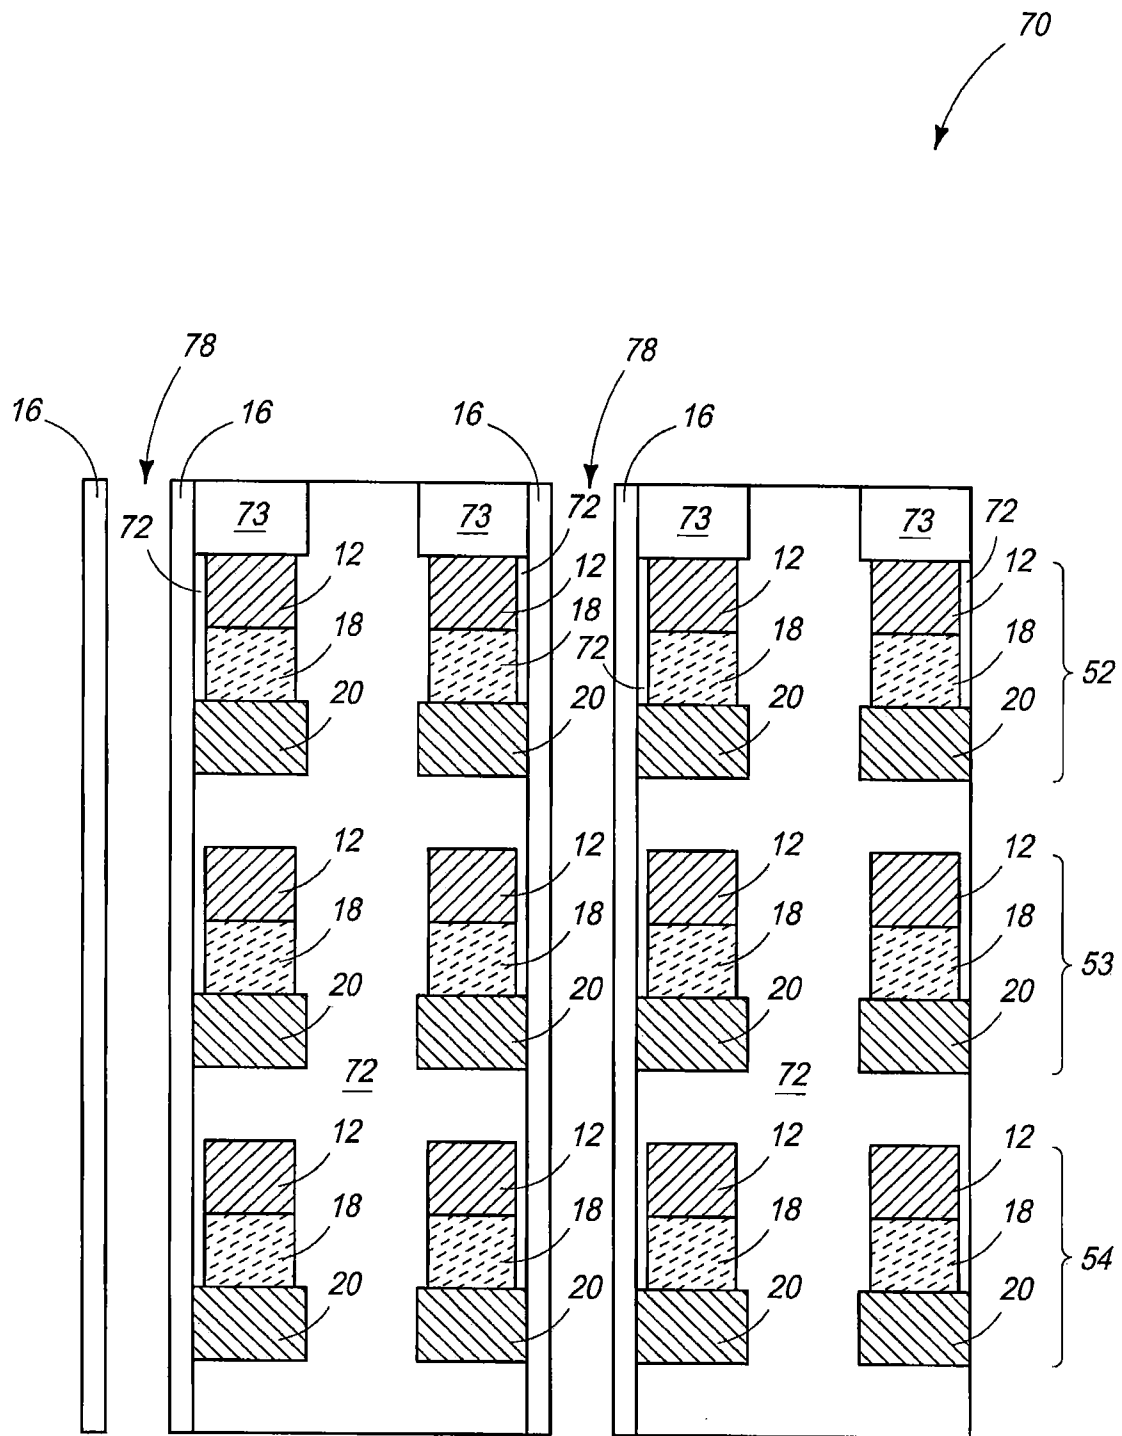


FIG. 28

27/29

**FIG. 29**

28/29

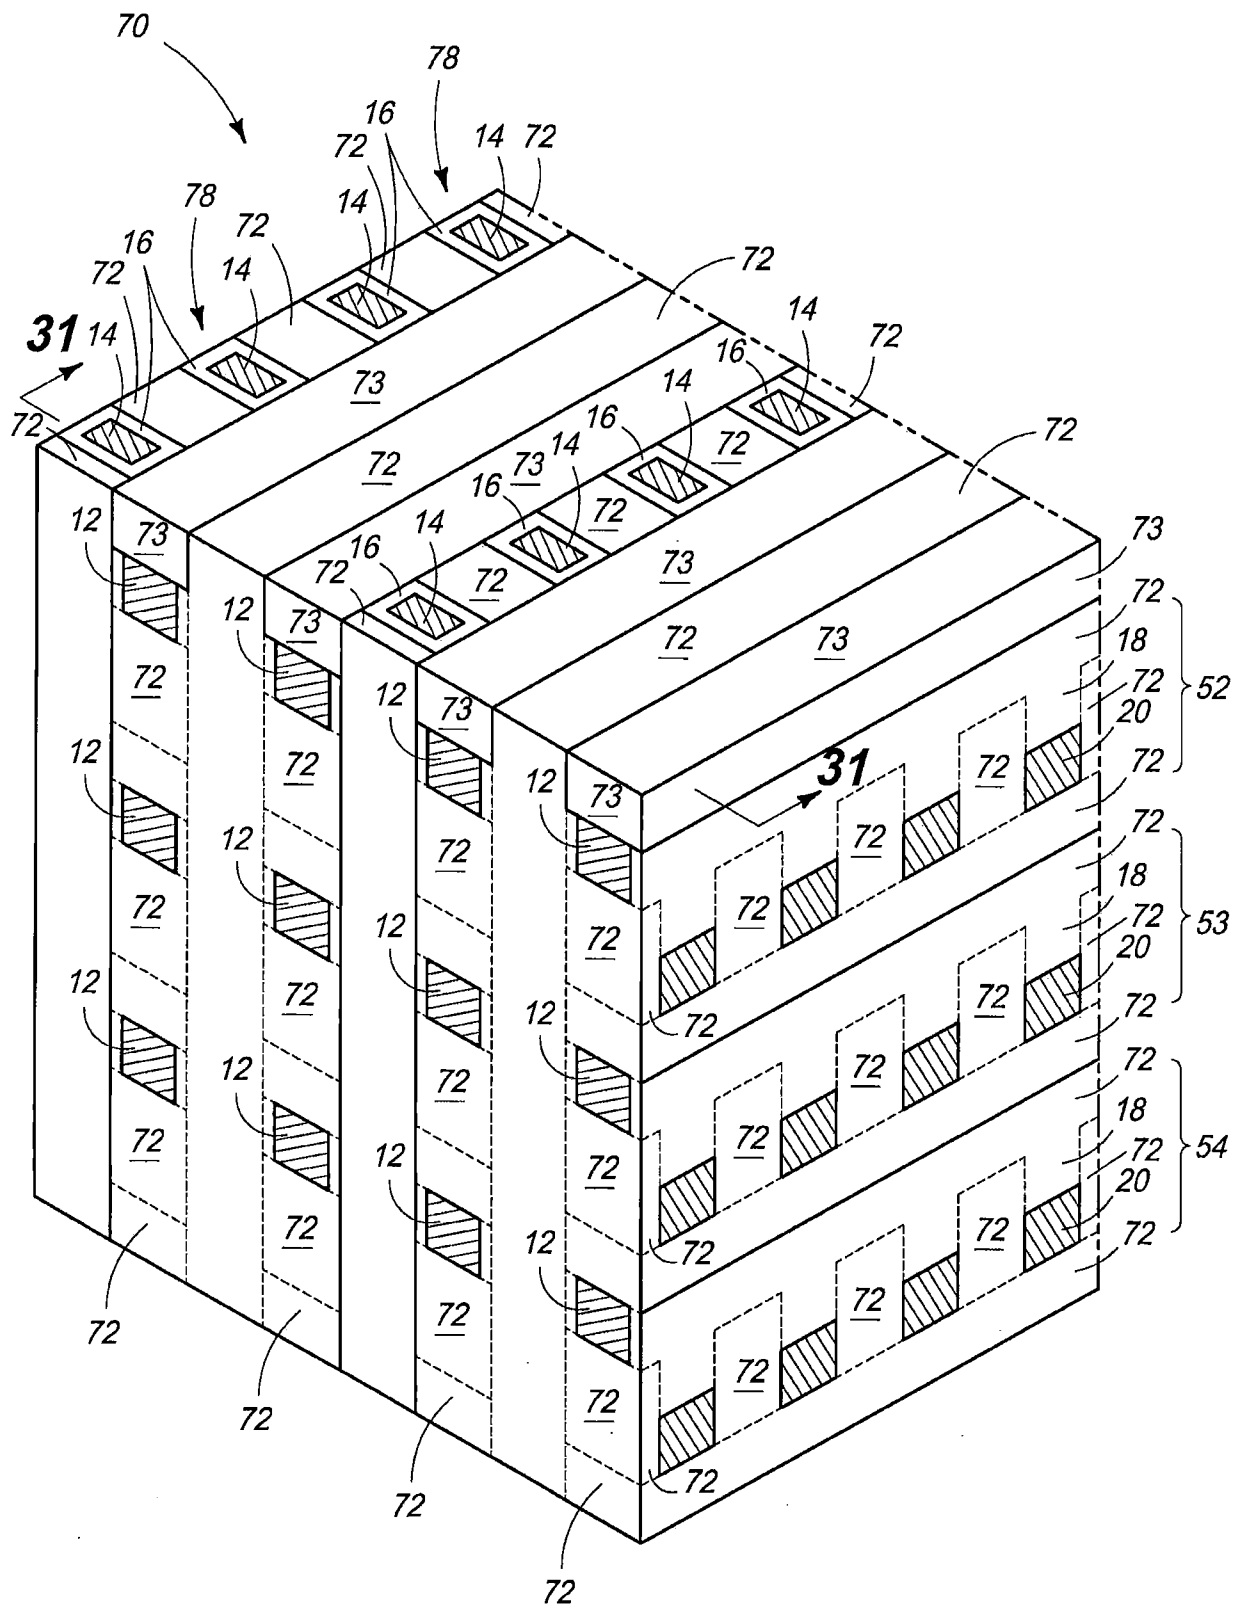


FIG. 30

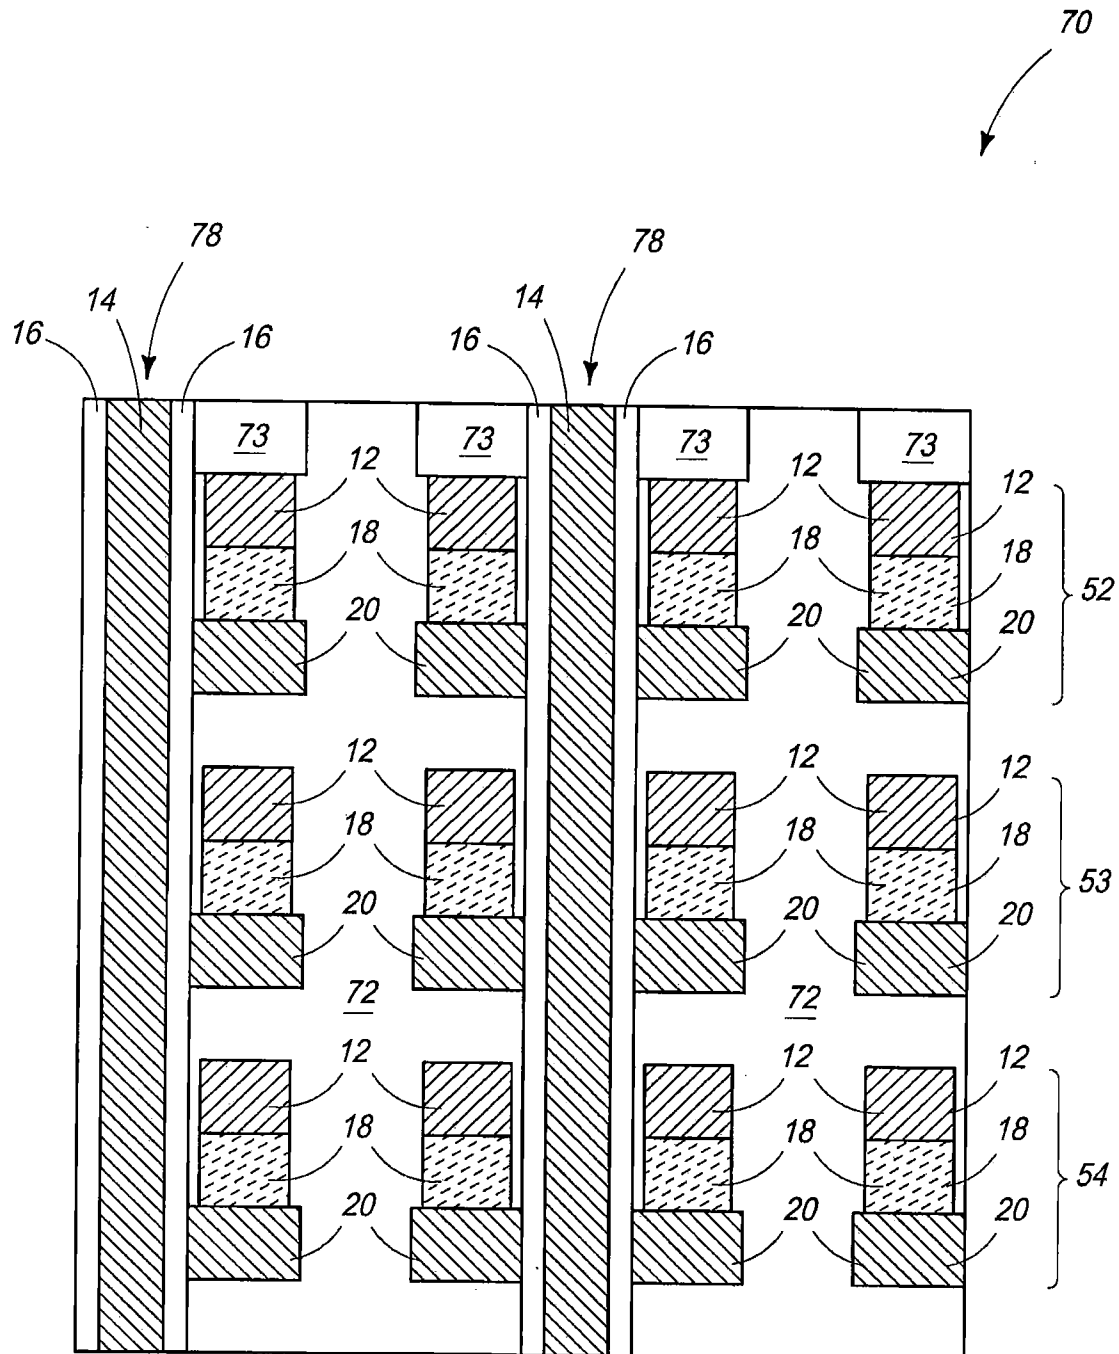


FIG. 31