

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 February 2006 (09.02.2006)

PCT

(10) International Publication Number
WO 2006/014272 A1

(51) International Patent Classification⁷: **G01V 1/52**

(21) International Application Number:
PCT/US2005/022972

(22) International Filing Date: 27 June 2005 (27.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/884,850 2 July 2004 (02.07.2004) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; 3900 Essex Lane, Suite 1200, Houston, TX 77027 (US).

(72) Inventors: **EGEREV, Sergey**; 5 Vorontsovskle Prudy Street, #246, Moscow, 117630 (RU). **TIUTEKIN, Victor**; 3 Fersmana Street, Apt 9, Moscow, 117312 (RU). **YUSHIN, Victor**; 33/2 Azovskaya Street, Apt 155, Moscow, 113457 (RU). **DUBINSKY, Vladimir**; 9103 Corral Corner Court, Houston, TX 77064 (US).

BOLSHAKOV, Alexei; 9221 Sunbonnet Drive, Houston, TX 77584 (US). **BELOV, Vladimir**; Apt. 118, 77 Koptevskaya Street, Moscow, 125239 (RU).


(74) Agents: **RIDDLE, Albert, J.** et al.; Baker Hughes Incorporated, 3900 Essex Lane, Suite 1200, Houston, TX 77027 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: ACOUSTIC ISOLATOR FOR DOWNHOLE APPLICATIONS

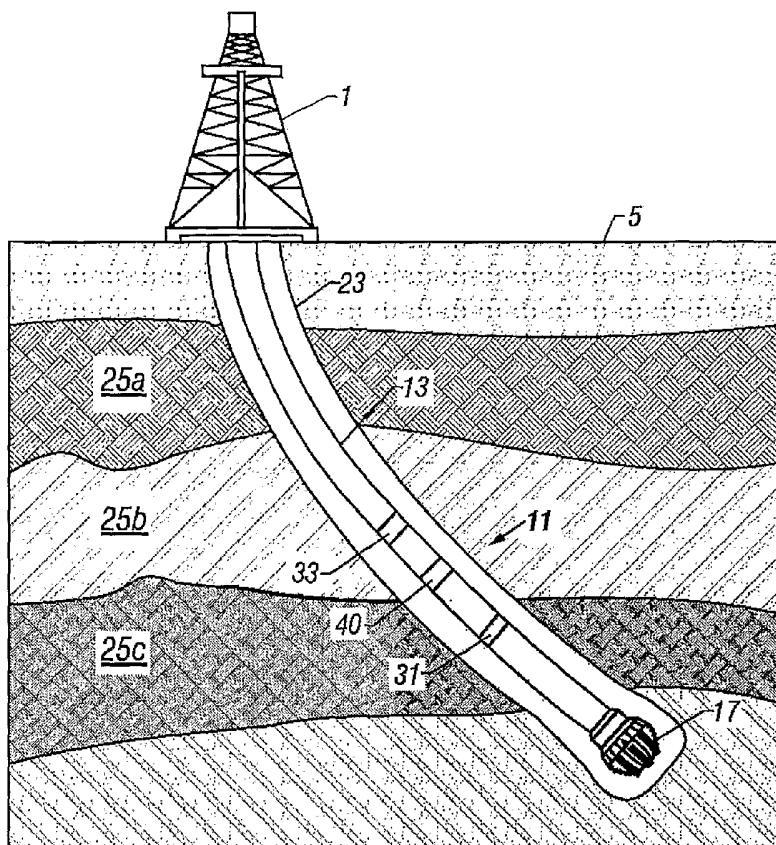

(57) Abstract: An apparatus for performing acoustic investigations while drilling a borehole in a subsurface geological formation comprises a longitudinally extending assembly conveyed in the borehole on a drilling tubular (13). The assembly and the drilling tubular (13) have a drilling fluid flowing through a longitudinally extending passage in the assembly and the drilling tubular. An acoustic transmitter (31) is supported by the assembly. The transmitter (31) generates acoustic signals in the assembly, the borehole and the subsurface formation. An acoustic receiver (33) is spaced apart from the transmitter (31) and receive the acoustic signals. An attenuator (40) is located in the assembly between the acoustic transmitter (31) and the acoustic receiver (33) for attenuating the acoustic signals in the assembly within a predetermined frequency range. The attenuator (40) comprises a tubular element of a composite material having a substantially cylindrical outer surface. The outer surface has a plurality of spaced-apart masses having a predetermined spacing, mass and length firmly attached thereto.

WO 2006/014272 A1



FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

ACOUSTIC ISOLATOR FOR DOWNHOLE APPLICATIONS**Vladimir Dubinsky, Alexei Bolshakov**

5

BACKGROUND OF THE INVENTION**Field of the Invention**

The present invention pertains to logging while drilling apparatus and more particularly to acoustic logging while drilling apparatus and attenuation of acoustic pulses that travel parallel to the direction of drilling.

Related Prior Art

To obtain hydrocarbons such as oil and gas, wells or wellbores are drilled into the ground through hydrocarbon-bearing subsurface formations. Currently, much current drilling activity involves not only vertical wells but also drilling horizontal wells. In drilling, information from the well itself must be obtained. While seismic data has provided information as to the area to drill and approximate depth of a pay zone, the seismic information can be not totally reliable at great depths. To support the data, information is obtained while drilling through logging while drilling or measuring while drilling (MWD) devices. Logging or measuring while drilling has been a procedure in use for many years. This procedure is preferred by drillers because it can be accomplished without having to stop drilling to log a hole. This is primarily due to the fact that logging an unfinished hole, prior to setting casing if necessary, can lead to washouts, damaging the drilling work that has already been done. This can stall the completion of the well and delay production. Further, this information can be useful

while the well is being drilled to make direction changes immediately.

Advances in the MWD measurements and drill bit steering systems placed in the drill string enable drilling of the horizontal boreholes with enhanced efficiency and greater success. Recently, horizontal boreholes, extending several thousand meters ("extended reach" boreholes), have been drilled to access hydrocarbon reserves at reservoir flanks and to develop satellite fields from existing offshore platforms. Even more recently, attempts have been made to drill boreholes corresponding to three-dimensional borehole profiles. Such borehole profiles often include several builds and turns along the drill path. Such three dimensional borehole profiles allow hydrocarbon recovery from multiple formations and allow optimal placement of wellbores in geologically intricate formations.

Hydrocarbon recovery can be maximized by drilling the horizontal and complex wells along optimal locations within the hydrocarbon-producing formations. Crucial to the success of these wells is establishing reliable stratigraphic position control while landing the well into the target formation and properly navigating the drill bit through the formation during drilling. In order to achieve such well profiles, it is important to determine the true location of the drill bit relative to the formation bed boundaries and boundaries between the various fluids, such as the oil, gas and water. Lack of such information can lead to severe "dogleg" paths along the borehole resulting from hole or drill path corrections to find or to reenter the pay zones. Such well profiles usually limit the horizontal reach and the final well length exposed to the reservoir. Optimization of the borehole location within the formation also can have a substantial impact on

maximizing production rates and minimizing gas and water coning problems. Steering efficiency and geological positioning are considered in the industry among the greatest limitations of the current drilling systems for drilling horizontal and complex wells.

Availability of relatively precise three-dimensional subsurface seismic maps, location of the drilling assembly relative to the bed boundaries of the formation around the drilling assembly can greatly enhance the chances of drilling boreholes for maximum recovery. Prior art down hole devices lack in providing such information during drilling of the boreholes.

Modern directional drilling systems usually employ a drill string having a drill bit at the bottom that is rotated by a drill motor (commonly referred to as the "mud motor"). A plurality of sensors and MWD devices are placed in close proximity to the drill bit to measure certain drilling, borehole and formation evaluation parameters. Such parameters are then utilized to navigate the drill bit along a desired drill path. Typically, sensors for measuring downhole temperature and pressure, azimuth and inclination measuring devices and a formation resistivity measuring device are employed to determine the drill string and borehole-related parameters. The resistivity measurements are used to determine the presence of hydrocarbons against water around and/or a short distance in front of the drill bit. Resistivity measurements are most commonly utilized to navigate the drill bit. However, the depth of investigation of the resistivity devices usually extends only two to three meters and resistivity measurements do not provide bed boundary information relative to the downhole subassembly. Furthermore, the location of the resistivity device is determined by some depth measuring apparatus deployed on the surface which has a margin of error frequently greater than the depth of investigation of

the resistivity devices. Thus, it is desirable to have a downhole system which can accurately map the bed boundaries around the downhole subassembly so that the drill string may be steered to obtain optimal borehole trajectories.

5 The relative position uncertainty of the wellbore being drilled and the critical near-wellbore bed boundary or contact is defined by the accuracy of the MWD directional survey tools and the formation dip uncertainty. MWD tools may be deployed to measure the earth's gravity and magnetic field to determine the inclination and azimuth. Knowledge of the course and position of the wellbore depends entirely on these two
10 angles. Under normal conditions, the inclination measurement accuracy is approximately plus or minus two tenths of a degree. Such an error translates into a target location uncertainty of about three meters per one thousand meters along the borehole. Additionally, dip rate variations of several degrees are common. The optimal placement of the borehole is thus very difficult to obtain based on the currently available MWD
15 measurements, particularly in thin pay zones, dipping formations and complex wellbore designs.

 Until recently, logging while drilling has been limited to resistivity logs, gamma logs, neutron logs and other non-acoustic logs since acoustic noise caused by drilling and
20 acoustic pulses traveling upstring from the transmitter has presented problems in accurate detection and delineation. These problems cannot be easily isolated by arrival time since the acoustic pulses are generated and detected continuously. Recently, the use of acoustic sensors having a relatively short spacing between the receivers and the transmitter to determine the formation bed boundaries around the downhole subassembly has been used.

An essential element in determining the bed boundaries is the determination of the travel time of the reflection acoustic signals from the bed boundaries or other interface anomalies. A prior art proposal has been to utilize estimates of the acoustic velocities obtained from prior seismic data or offset wells. Such acoustic velocities are not very precise because they are estimates of actual formation acoustic velocities. Also, since the depth measurements can be off by several meters from the true depth of the downhole subassembly, it is highly desirable to utilize actual acoustic formation velocities determined downhole during the drilling operations to locate bed boundaries relative to the drill bit location in the wellbore.

Additionally, for acoustic or sonic sensor measurements, the most significant noise source is acoustic signals traveling from the source to the receivers via the metallic tool housing and those traveling through the mud column surrounding the downhole subassembly (tube waves and body waves). In some applications acoustic sensor designs are used to achieve a certain amount of directivity of signals. A transmitter coupling scheme with signal processing method may be used for reducing the effects of the tube wave and the body waves. Such methods, however, alone do not provide sufficient reduction of the tube and body wave effects, especially due to strong direct coupling of the acoustic signals between the transmitters and their associated receivers.

Some United States patents representative of the current art in determining subsurface formations are as follows.

United States patent number 4,020,452, titled "Apparatus For Use in Investigating

Earth Formations", issued to Jean-Claude Trouiller, et al., relates to an apparatus for mechanically filtering acoustic pulses in a well logging tool. This apparatus includes of a substantially rigid member having interruptions in the longitudinal continuity of the member. These interruptions provide tortuous paths for the passage of acoustic energy
5 along the member. A plurality of masses are periodically spaced along the interior of the member and are each mechanically integral with opposite sides of the member at locations chosen to enable the member and masses to cooperate as a mechanical filter. By so doing, the structure made of the member and masses will have good acoustic delay and attenuation characteristics as well as good mechanical characteristics.

10

United States patent number 5,043,952, titled "Monopole Transmitter For a Sonic Well Tool", issued to David C. Hoyle, et al., relates to a monopole transmitter for a sonic tool which includes an axial tube, a piezoceramic cylinder surrounding the axial tube, an endcap disposed at each end of and firmly contacting the cylinder, and an apparatus for
15 holding the endcaps firmly against the axial tube. The endcaps firmly contact the axial tube without simultaneously contacting an upper bulkhead. The apparatus may include spring washers disposed between the bulkhead and at least one endcap, or it may include a spring disposed between a nodal mount and each endcap. A nodal mounting tube may be disposed around the axial tube, a ring being disposed at each end of the nodal
20 mounting tube, each ring being disposed outside of the cylinder for biasing the endcaps in tension against a ring thereby holding each endcap firmly in contact against the axial tube.

United States patent number 5,510,582, titled "Acoustic Attenuator, Well Logging

Apparatus and Method of Well Logging", issued to James R. Birchak, et al., relates to a sonic well tool for performing acoustic investigations of subsurface geological formations penetrated by a borehole. The well tool generally includes a longitudinally extending body for positioning in the borehole. The tool also includes a transmitter supported by the body for transmitting acoustic energy and a receiver supported by the body for receiving acoustic energy. The tool includes an acoustic attenuation section positioned on the body between the transmitter and the receiver. This section includes one or more cavities defined by the body, inertial mass members positioned inside the cavities in a suitable manner to form a gap between the wall of the cavity and the inertial mass members, and an acoustical attenuation fluid in the gap. The method for attenuating sonic waves generally includes transmitting a sonic wave from the transmitter to the tool, passing the sonic wave through the acoustic attenuation section, and receiving attenuated wave at the receivers.

United States patent number 5,036,945, titled "Sonic Well Tool Transmitter Receiver Array Including an Attenuation and Delay Apparatus", issued to David C. Hoyle, et al., relates to a sonic well tool that includes a transmitter array having at least one monopole transmitter and at least one dipole transmitter and a receiver array for receiving sonic pressure wave signals from a surrounding borehole formation. A first attenuation and delay apparatus is positioned above the receiver array and a second attenuation and delay apparatus is positioned below the receiver array in the sonic well tool. The first attenuation and delay apparatus includes an attenuation member comprising a plurality of interleaved rubber and metal like washers for attenuating compressional and flexural waves propagating along a metal center support rod to the

receiver array and an inner housing comprising a bellows section having a corrugated shape and a thin transverse dimension for delaying the propagation of compressional and flexural waves along the inner housing to the receiver array. The second attenuation and delay apparatus includes a plurality of mass loading rings surrounding the outer housing
5 of the sonic well tool for attenuating the flexural waves propagating up the outer housing from a sonic transmitter and a further inner housing including a further bellows section having a corrugated shape and a thin transverse dimension for delaying the propagation of compressional and flexural waves up the tool, along the inner housing, to the receiver array. The sonic well tool also includes a differential volume compensator for changing
10 the quantity of oil encapsulated in the sonic well tool in accordance with changes in oil volume and changes in borehole temperature and pressure. The receiver array includes a plurality of hydrophone sets, each hydrophone set including at least one pair and preferably two pair of hydrophones disposed in a cross section of the tool, one hydrophone of a pair being disposed opposite the other hydrophone of the pair in the
15 cross section.

United States Patent Application Ser. No. 09/201,988, now United States Patent 6,082,484 to *Molz & Dubinsky*, having the same assignee as the present invention discloses the use of a section of a drill collar that has a plurality of shaped cavities filled
20 with oil. The passage of an acoustic wave sets up a resonance of the fluid in the shaped cavity. The frequency of resonance depends upon the shape and size of the cavity and the properties of the fluid in the cavity. In one embodiment of the invention, the cavities are spherical. Another embodiment of the invention uses cylindrical cavities with a piston restrained by a spring within the cavity. Changing the spring constant provides additional

control over the frequencies that are attenuated. The '988 application also discloses the use of segmented isolators in which the drill collar section is filled with layers of a composite material in which the layers have a different density. The thicknesses of the individual layers is selected to attenuate certain frequencies.

5 United States Patent Application Ser. No. 09/583,258 to *Egerev et al*, having the same assignee as the present application and the contents of which are incorporated herein by reference, discloses a system and method for attenuation of acoustic waves that travel through a drill collar in a logging while drilling operation. The system includes a plurality of heavy masses attached to an inner wall of the drill collar. The heavy masses
10 constitute mass discontinuities that attenuate waves traveling through the drill collar. In one embodiment of the invention, the mass discontinuities are rings and attachment is done by neck pieces. These neck pieces extend out from the outer circumference of the rings and may be an original outer circumference of the ring that has been milled down by cutting out portions of the ring. This allows significantly less than the entire outer
15 circumference of the hanging rings to be in contact with the inner surface of the drill collar. Thus, the rings will more efficiently attenuate the vibrational force of the acoustic pulses coming in contact with the hanging ring. The plurality of heavy hanging rings are spaced and sized for the maximum attenuation of acoustic pulses in a predetermined range, preferably in the range of 10 khz to 20 khz. The system may include steel rings as
20 the plurality of heavy hanging rings. In an alternate embodiment, the plurality of heavy hanging rings may be a heavier, more dense material such as tungsten. The plurality may have as many as ten rings or as few as six, with eight being another possibility. The spacing of the rings may vary between twelve and fourteen centimeters, depending on the material used. In a still further embodiment, a pipe may be placed within the inner

circumference of the rings to isolate the attenuation rings from the flow of drilling mud. The isolation pipe may be of any material, however, a material that is non-rigid that is less likely to conduct vibrational forces is preferred. In another embodiment of the invention, the mass discontinuities are attached to the drill collar over a substantial
5 portion of their individual axial lengths. Such an arrangement acts as a low pass filter. When this mechanical arrangement is used with an electrical bandpass filter in the tool, high frequencies are efficiently attenuated. In yet another embodiment of the invention, the attenuator section comprises a cylindrical body with sections of different inside and/or outside diameters to produce a ringed pipe: the sections of different diameter each have a
10 characteristic pass band and a reject band for attenuation of signals.

The attenuator system of Egerev is expensive to fabricate and difficult to maintain due to the multiple mass discontinuities incorporated on the inner wall of a drill collar. The erosive flow of drilling fluid in the inside of the collar can cause severe damage to the isolators absent an internal sleeve. It would be desirable to have an attenuator system
15 that is less expensive to fabricate and easier to maintain.

Summary of the Invention

In one aspect, an apparatus for performing acoustic investigations while drilling a
20 borehole in a subsurface geological formation comprises a longitudinally extending assembly conveyed in the borehole on a drilling tubular. The assembly and the drilling tubular have a drilling fluid flowing through a longitudinally extending passage in the assembly and the drilling tubular. An acoustic transmitter is supported by the assembly. The transmitter generates acoustic signals in the assembly, the borehole and the

subsurface formation. An acoustic receiver is spaced apart from the transmitter and is supported by the assembly for receiving the acoustic signals. An attenuator is located in the assembly between the acoustic transmitter and the acoustic receiver for attenuating the acoustic signals in the assembly within a predetermined frequency range. The
5 attenuator comprises a tubular element of a composite material having a substantially cylindrical outer surface. The outer surface has a plurality of spaced-apart masses having a predetermined spacing, mass and length firmly attached thereto.

In another aspect, a method of performing acoustic investigations while drilling a borehole in a subsurface geological formation comprises conveying a logging assembly
10 into the borehole on a drilling tubular. The assembly and the drilling tubular having a drilling fluid flowing through a longitudinally extending passage in the assembly and the drilling tubular. A transmitter is activated in the assembly for generating acoustic signals in the formation, the borehole, and the assembly. Signals passing through the assembly are attenuated using an attenuator comprising a composite tubular element having a
15 plurality of spaced-apart masses firmly attached on an outer diameter surface of the tubular element. The masses are spaced apart a preselected distance to attenuate signals within a specified frequency range. A receiver on a side of the attenuator opposite the transmitter receives signals through the formation and the attenuated signals through the assembly.

20

Brief Description of The Drawings

For detailed understanding of the present invention, references should be made to the following detailed description of the preferred embodiment, taken in conjunction with

the accompanying drawings, in which like elements have been given like numerals and wherein:

Figure 1 is an illustration of a drill system having a measuring while drilling
5 device mounted in the drilling apparatus;

Figure 2 illustrates raypaths of acoustic signals between the transmitter and the receiver;

Figure 3 is an illustration of an attenuation system for use on a well drilling
10 collar;

Figure 4 is a graphical representation illustrating the effects of an increased number of attenuation elements of a system as that illustrated in **Figure 1**;

Figure 5 is a graphical representation illustrating the effects of increasing the weight of attenuation elements of a system as that illustrated in **Figure 1**;

Figure 6 is a graphical representation illustrating the attenuation effect of the
15 system of **Figure 1**;

Figures 7a and 7b show a comparison of the invention of **Fig. 2** with one in which the mass discontinuities are attached to the drill collar over a substantial length;

Figures 8a - 8c show alternate embodiments of the invention in which attenuation
20 is accomplished by means of recesses that produce mass discontinuities in a body of the attenuator;

Figure 9 shows a comparison of frequency spectra of attenuators having different types of recesses having a fixed length;

Fig. 10 shows alternate embodiments of the invention in which the diameter of the

attenuation sections is varied;

Figs. 11 shows an alternate preferred embodiment using an arrangement of mass bodies attached to an external wall of a drill collar;

5 **Fig. 12** shows an asymmetrical arrangement for a mass ring attached to an external wall of a drill collar.

Figs. 13 shows an embodiment using an arrangement of mass bodies attached to an external wall of a composite tubular element; and

Fig. 14 shows an asymmetrical arrangement for a mass ring attached to an external wall of a composite tubular element.

10

Description of the Preferred Embodiment

The present invention provides a system and method for attenuating acoustic waves in a down hole tool that is being used to obtain information about subsurface formations, some of which are believed to be holding hydrocarbon deposits. **FIG. 1** is a schematic illustration of the use of a Measurement-While-Drilling (MWD) apparatus while drilling a well. At the surface of the earth **5** a drilling rig **1** is used to drill a borehole **23** through subterranean formations **25a, 25b, 25c** etc. Those versed in the art would know that a drillship or a platform could be used to drill a borehole into subterranean formations covered by a body of water. A drilling tubular **13**, that could be made of drill pipes or coiled tubing is used to rotate a drillbit **17** at the bottom, the rotating action of the drillbit and axial pressure carving out the borehole. When coiled tubing is used for the drilling tubular, a drilling motor (not shown) is used to impart the necessary rotary motion to the drillbit.

15

20

A variety of transducers are used downhole in a sensor assembly **11**. This sensor

assembly makes measurements of properties of the formations through which the borehole is being drilled. These could include electromagnetic, gamma ray, density, nuclear-magnetic resonance, and acoustic sensors. For illustrative purposes only, an acoustic transmitter array **31** and an acoustic receiver array **33** are indicated. Those
5 versed in the art would recognize that other configurations of the acoustic transmitters and receivers could be used.

Turning now to **FIG. 2**, the transmitter **31** and the receiver **33** are shown inside the borehole **23**. The annulus between the drilling tubular **13** and the borehole **23** is filled
10 with a drilling fluid. The fluid is conveyed down the borehole inside the drilling tubular to the drillbit and returns up the hole via the annulus. Excitation of the transmitter produces acoustic signals. A portion of the signal, denoted by the raypath **43**, is referred to as the direct arrival and travels through the tool to the receiver. The transmitter also produces an acoustic signal in the borehole fluid that enters into the formation. One
15 portion of it, illustrated by the raypath **41** travels as a body wave through the formation and carries information about the formation that it traverses. The receiver also detects other signals, such as tube waves that involve a coupled wave between the fluid and the formation, Stoneley waves that are surface waves in the fluid, and signals reflected from acoustic reflectors within the formation.

20 In an MWD tool, as in wireline tools, the body wave **41** through the formation usually arrives before the tube wave and the Stoneley wave. However, in an MWD tool, the direct arrival **43** through the tool commonly arrives before the desired signal component **41** that carries information about the acoustic properties of the formation. In

addition, the drillbit 17 itself is continuously generating acoustic signals traveling through the drilling tubular 13. Consequently, it becomes very difficult to determine a travel time for the formation body wave 41.

5 In order to attenuate the direct arrival 43, the tool a pulse attenuator 40 is located in tool 11 between transmitter 31 and an receiver 33. Only one transmitter and receiver are illustrated for demonstration. In practice, there may be several receivers and transmitters and the present invention operates with any arrangement, the only requirement is that attenuator 40 be located between the transmitter and the receiver.

10

 In one embodiment of the invention, the acoustic isolator is based upon an array of mass rings attached to the inner wall of the drilling collar. Such an array presents an interference filter providing a stop band at a predetermined frequency for longitudinal sound waves propagating along the walls of a collar. The device exhibits sufficient
15 damping within the predetermined frequency range as well as good mechanical strength. The efficiency of an isolator of this type increases proportionally to the number of the rings N as well as to the ratio M / μ , where M is the mass of a single ring, μ is a mass per unit length of the collar. Hence, the efficiency of the isolator is very sensitive to even minor changes in outer dimensions of the pipe as well as to the changes in demands to its
20 wall thickness.

 The attenuation provided by the isolator section is designed to be minus forty decibels within the frequency range of twelve through eighteen kilohertz. The isolator design satisfy the mechanical requirements specified concerning the limitations on inner

diameter, outer diameter, minimal cross section area and others.

Figure 3 is a partial illustration of an attenuation system **50** for a sound tool (not shown) in a drill collar **52** using an array of hanging mass irregularities **54, 56, 58 ...** (may include up to ten elements) mounted on inner wall **60** of drill collar **52**. Mass irregularities **54, 56, 58, ...** are secured to inner wall **60** by neck pieces **62** which extend out from outer circumference **64, 66, 68, ...** of mass irregularities **54, 56, 58, ...** respectively. Neck pieces **62** are smaller both in depth and width than outer circumferences **64, 66, 68, ...** of mass irregularities **54, 56, 58, ...** so that mass irregularities **54, 56, 58, ...** are held firmly against inner wall **60**, but not so firmly that acoustic pulses traveling through drill collar **52** are transferred without attenuation. In this manner, mass irregularities **54, 56, 58, ...** are held firmly but not tightly.

In an alternate embodiment, an inner pipe **64** may be provided to protect array of mass irregularities **54, 56, 58, ...** from mud flow. Inner pipe may be of any material to isolate mass irregularities **54, 56, 58 ...** from the mud flow, however, a material that is non-rigid and has a degree of flexibility is preferred. A material that is less likely to transfer acoustic pulses toward the receivers is desired.

The operation of the attenuation filter may be understood by the following discussion. The attenuator section has N mass irregularities or elements, each element having the shape of rings or donuts attached to the inner surface of a pipe at the points $x = x_j$, (where $j = 1, \dots, n$). The origin of coordinates coincides with the first irregularity, i.e. $x_0 = 0$. The mass of a ring j is m_j . The distance between two neighboring elements is:

$$l_j = x_{j+1} - x_j.$$

At $x > x_n$, an incident longitudinal sound wave of a unit amplitude traveling towards the origin of coordinates may be denoted by

5

$$pe^{-i[k(x-x_n)-\omega t]}$$

where

$k = \omega/c$ is a wavelength constant,

10

$\omega = 2\pi f$ is an angular frequency,

c = the velocity of sound.

Due to the presence of an array there exists (at $x > x_n$) a reflected wave $p_r = V_n(\omega)e^{ik(x-x_n)-i\omega t}$, where $V_n(\omega)$ is a reflection coefficient for an array of n irregularities. In the present invention, the dimensions of irregularities are small as compared with the wave length at a given frequency $\omega = 2\pi/k$. The density, ρ , as well as linear mass of a pipe μ are also of great importance in the attenuation. In the present invention, the mass m_j is much greater than μh_j , where h_j is the length of attachment zone for the mass m_j . Such an array presents an interference filter providing a stop band at a predetermined frequency range for longitudinal sound waves propagating in the walls of a pipe.

20

In the solution of a wave equation, the length of a contact zone, Δl , between a ring and an inner wall of a pipe is small as compared to the wavelength of interest λ . Under these circumstances the propagation of the longitudinal wave can be described by the

following differential equation:

$$YS \frac{\partial^2 u}{\partial x^2} - \mu \frac{\partial^2 u}{\partial t^2} - M_j \frac{\partial u^2}{\partial t^2} \delta(x - x_j) = 0 \quad (1)$$

5 Where:

Y is the Young's modulus of the pipe material,

S is the cross section area of the pipe wall,

u is the displacement,

μ is the linear mass of the pipe, and

10 x is the longitudinal coordinate.

When considering propagation of a sinusoidal wave, the displacement u may be represented by a function of the form $u(x)\exp(-i\omega t)$, where, ω is the angular frequency,

15 The differential wave equation then takes the form:

$$YS \frac{\partial^2 u}{\partial x^2} + \mu \omega^2 u + M_j \omega^2 u \delta(x - x_j) = 0 \quad (2)$$

For an array of N mass irregularities, the solution takes the form

20

$$u(x) = Ae^{ikx} - \sum_{j=1}^N b_j G(x - x_j) u(x_j) \quad (3)$$

where,

A is an initial wave amplitude,

$G(x - x_j) = \exp(i\alpha(x - x_j)) / (2\gamma s k)$ is Green function, and

$b_j = M_j \omega$ is the magnitude of an irregularity.

Hence the transmission coefficient at a position x that is greater than x_n can be found as:

5 $T = u(x) / A$, which may be expressed in decibels using the usual conversion factor.

The transmission coefficient of the array may also be obtained by other methods.

One such method is an impedance approach, the relative input impedance is given by the formula:

10
$$Z_{in} = (p/v\rho c)$$

where:

p = pressure,

c = velocity of sound in the medium,

v = vibrational velocity, and

15 ρ = density.

For an array of N elements, the impedance is calculated with the help of the following recurrence procedure:

20
$$Z_{in}^{j+1} = \frac{Z_{in}^j - i \tan(kl_j)}{1 - iZ_{in}^j \tan(kl_j)} - i \frac{km_j}{\mu}, \quad j = 1, 2, \dots, N$$

Figures 4 and 5 illustrate plots of transmission vs. frequency. The influence of

the number of elements is illustrated in **Figure 4**. Transmission curves are shown for six elements, eight elements and ten elements. The increase in the number of elements only slightly changes the transmission curve at the borders of the predetermined frequency band. However, the attenuation values of the transmission curves in the middle of the frequency band are greatly affected. The period of an array l is important to place the transmission curves at the proper frequency. In the preferred embodiment an optimal value for the spacing between elements is 5.12 inches or approximately thirteen centimeters for the inner and outer diameter used. However, other spacings such as fourteen or twelve centimeters may also be used and provide acceptable results. The influence of the mass of a single element is illustrated in **Figure 5**.

Figure 4 illustrates attenuation curves for arrays of ten elements. Each curve is for elements of different weights. A first curve is for ten elements, each weighing eight kilograms, the second for elements weighing eleven kilograms and a third for elements weighing fourteen kilograms. An increase in the mass M results in changing the low frequency border. The high frequency border remains essentially unchanged. All the transmission curves show that transmission loss exceeds forty decibels within the predetermined frequency band between twelve and eighteen kilohertz.

The calculations were performed for an array of N identical equally spaced irregularities. Transmission coefficient was calculated vs. frequency within the frequency range from five to twenty kilohertz.

Figure 6 is a graphical representation of the attenuation of a preferred

embodiment of the present invention. In the preferred embodiment, ten elements were used with a spacing of thirteen centimeters between elements. Rings of stainless steel were used as mass irregularities **54**, **56**, **58** It can be seen that the arrangement of the preferred embodiment provides attenuation of waves in the range of eight to eighteen kilohertz. By using his system, interference of waves traveling through the collar of a drilling tool can be greatly reduced and acoustic logging is possible during a drilling operation.

Figs 7a and **7b** show a comparison between the embodiment discussed above with respect to **Fig. 2** and an alternate embodiment of the invention using a different arrangement of attaching the mass discontinuities to the drill collar. Shown in the upper portion of **Fig. 7a** is a drill collar **152a** to which a mass **154a** is attached by means of a neck **158a**. This corresponds to the arrangement discussed above with reference to **Fig. 2**. Shown in the upper portion of **Fig. 7b** is an alternate arrangement in which a mass **154b** is attached to the drill collar **152b** over substantially the full length of the mass. Shown in the lower portion of **Fig. 7a** is a schematic representation of the effective mass discontinuity **170a** as seen by a propagating wave: typically, such a mass discontinuity provides approximately 6 to 8 dB of attenuation of the wave. The lower portion of **Fig. 7b** shows the effective mass discontinuity **170b** as seen by a propagating wave: effectively, an attenuation of 2 - 3 dB of attenuation is provided at each boundary. By an analysis such as discussed above with respect to equations 1 - 4, the arrangement of **Fig. 7b** is shown to act as a low pass filter. By suitable choice of the spacing and size of the weights, the effective cutoff frequency can be made to be around 10 kHz. When used in combination with an electrical bandpass filter (not shown) on the tool, body waves

through the drill collar may be effectively attenuated.

Figs. 8a - 8c show alternate embodiments of the invention in which the isolator comprises a machined cylindrical member. In **Fig. 8a**, the cylindrical member has an outer diameter of **OD** and an inner diameter of **ID**. The inner diameter allows passage of drilling mud. The inside wall of the cylindrical member has a recess of length **L** therein. A body wave encounters regions of different cross sectional areas and mass densities, similar to the embodiments discussed above, resulting in attenuation of body waves.

Fig. 8b shows an arrangement in which the recess are on the outside of the isolator while **Fig. 8c** shows an arrangement in which there are recess on both the outside and the inside of the isolator.

Fig. 9 shows the results of a finite element ("FE") simulation of the various embodiments shown in **Figs. 8a - 8c**. The abscissa is the frequency and the ordinate is the normalized amplitude of waves passed by the attenuator. Note that the amplitude scale is linear, rather than being in decibels. The curve **301** shows the spectrum for a cylindrical pipe. The curve **303** shows the spectrum for cuts on the inside of the pipe, **305** is for recesses on the inside and outside of the pipe while **307** is for recesses on the outside of the pipe. Similar FE simulations have been carried out for various lengths **L** of the recesses. Based upon these simulations, for an OD of 7.09", in a preferred embodiment of the invention, a value of **L** of 3.15" (8.5cm) with recesses on both the inside and the outside of the isolator is used.

The results in **Fig. 9** are for a plurality of equally spaced recesses having the same length and the same depth of the recesses. Other embodiments of the invention use a combinations of sections having different lengths and different depths of inner and outer recesses. Examples are shown in **Fig. 10**. Each section **400** may be considered to be a waveguide with an associated pass-band and a reject band determined by the inner diameter **403** and the outer diameter **401**. As may be seen in **Fig. 10**, each section has an axis parallel to the longitudinal axis **405** of the body of the attenuator. By using such a combination of different inner and outer diameters, a broad range of frequencies may be attenuated. This attenuation is in addition to the attenuation produced by reflections between adjacent sections **400**. In the presence of borehole fluid on the inside and outside of the sections, the waveguides are "leaky" waveguides that allow energy to propagate into the fluid. In a preferred embodiment of the invention, the inner diameters range from 2" to 6" and the outer diameter ranges from 4" to 10".

Figs. 11 and 12 show an alternate preferred embodiment using an arrangement of mass bodies attached to an external wall of a drill collar. The effects are similar to those discussed above in reference to **Figs. 7a and 7b**, however the external arrangement offers advantages of easier and less expensive fabrication and easier maintenance than masses connected to the internal wall of the drill collar as described previously. The mass discontinuities shown in **Figs. 11 and 12** are essentially cylindrical rings. The rings may be made of steel or, alternatively, may be made of a more dense material such as tungsten. In **Fig. 11**, the mass rings **505a** and **505b** have an internal diameter **501** which is greater than the external diameter **503** of the drill collar **504** and are attached to the drill collar **504** by necks **506a** and **506b**, respectively. As with the mass discontinuity

described previously in **Fig. 7a**, such a mass discontinuity as shown in **Fig. 11** provides approximately 6-8 dB of attenuation of a direct acoustic wave traveling in the drill collar **504**. Note that for simplicity, only two rings are shown in each of **Fig. 11** and **Fig. 12**, however the number of rings will typically be between 6 and 10 with a spacing between approximately 12 and 14 cm. for a frequency range of interest of 10 khz to 20 khz. Note that this is an exemplary range and that other frequency ranges may be filtered by the appropriate selection of mass size, number and spacing as previously described. An advantage of the external arrangement can be realized because attenuation is related to the mass of each ring **506a**, **506b**, divided by the mass per unit length of the drill collar, as previously discussed. For example, for similar spacing and length of the rings as described in **Fig. 7a**, the external rings **506a**, **506b** can have a smaller thickness t due to the d^2 effect on ring volume. Because the rings **506a**, **506b** are at a larger diameter than the internal ring described in **Fig. 7a**, if the length of the rings is the same, rings **506a**, **506b** will be thinner to have the same mass for the same material. Alternatively, if the ring thickness t and the length are held the same as before, then the mass of rings **506a**, **506b** would be greater than the mass of the ring of **Fig. 7a**. The increased mass will result in increased attenuation for the configuration of **Fig. 11** as compared to the configuration of **Fig. 7a**.

Fig. 12 shows an asymmetrical arrangement for a mass ring attached to a collar. Exemplary mass rings **605a**, **605b** are coupled to collar **604** at shoulder **607** having a raised diameter **606**. The masses **605a**, **605b** contact the collar over a portion K of the length L of the masses **605a**, **605b** such that the masses are supported over a portion of their length and cantilevered for a portion of their length. The masses may be attached by welding, brazing, press fitting, shrink fitting or any other suitable technique. For

exemplary purposes, the number of masses and the spacing of the masses are essentially the same as for those described for **Fig. 11**. The acoustic source is located in the direction of the supported portion of the masses **605a**, **605b**, typically an uphole direction, as shown in **Fig. 12**. As acoustic waves from the source travel toward the receiver, or
5 downhole, they encounter a geometry which allows the acoustic wave to enter the masses **605a**, **605b** and be essentially trapped in the cantilevered section. Waves traveling in the opposite direction do not encounter the same geometry but essentially see only the supported section of masses **605a**, **605b** and are not attenuated as much as downward travelling waves. The arrangement shown in **Fig. 12** is preferred for a drilling operation
10 because it provides increased support area for the masses as compared to that of **Fig. 11**, thereby providing increased stability of the masses as they encounter the significant wall forces involved in downhole drilling. The external arrangement of the masses of **Fig. 11** and **Fig. 12** provide improved cleaning, inspection, and maintenance compared to the internal mass arrangements described previously. While the masses shown in **Fig. 11** and
15 **Fig. 12** have sharp corners, radiused corners may be provided for stress relief and/or to facilitate ease of manufacturing. Such techniques are known in the art and are not described further.

In another embodiment, referring to Figures **13** and **14**, show configurations substantially similar in configuration to those of Figures **11** and **12**. Here, however, the
20 tubular element **704** and **804**, is a composite material having mass rings **705** and **805** attached thereto. As one skilled in the art will appreciate from the previous analysis, the attenuation is related to the ratio of the density of the mass ring to the density of the tubular member. Therefore, by using a light material, relative to the commonly used steel in downhole tubulars, a greater density ratio between the attenuator rings and the tubular

may be realized, resulting in enhanced attenuation. Drilling fluid **710** and **810** flows through the inner passage **711,811** of tubular elements **704** and **804**, respectively. The composite material utilized may include graphite fibers, aramid fibers, fiberglass, or any other suitable material. Such materials are known and are commercially available from a variety of sources. Multiple layers may be used. A number of methods, known in the art, have been proposed for orientation and thickness of different types of composite materials for use in downhole tubulars. Suitable resins may be used within and between the layers. For the purpose of this invention, any composite tubular may be utilized, whether or not layered. Mass **705**, associated with tubular element **704**, and mass **805**, associated with tubular element **804**, may be of a like composite material to that of the tubular elements. Alternatively, masses **705** and **805** may be of a density greater than that of tubular elements **704** and **804**, such as, for example, steel and/or tungsten. The number of elements and their spacing are similar to that described previously.

While there has been illustrated and described a particular embodiment of the present invention, it will be appreciated that numerous changes and modifications will occur to those skilled in the art, and it is intended in the appended claims to cover all those changes and modifications of the present invention.

What is claimed is:

1. An apparatus for performing acoustic investigations while drilling a borehole in a subsurface geological formation, comprising:
 - a. a longitudinally extending assembly conveyed in said borehole on a drilling tubular, said assembly and said drilling tubular having a drilling fluid flowing through a longitudinally extending passage in said assembly and said drilling tubular ;
 - b. an acoustic transmitter supported by the assembly, said transmitter generating acoustic signals in the assembly, the borehole and the subsurface formation;
 - 10 c. an acoustic receiver spaced apart from the transmitter and supported by the assembly for receiving said acoustic signals; and
 - d. an attenuator located in the assembly between said acoustic transmitter and said acoustic receiver for attenuating said acoustic signals in the assembly within a predetermined frequency range, wherein said attenuator comprises a tubular element of a composite material having a substantially cylindrical outer surface, said outer surface having a plurality of spaced-apart masses having a predetermined spacing, mass and length firmly attached thereto.
- 15 2. The apparatus of claim 1, wherein the drilling tubular has a drill bit attached thereto for drilling the borehole, said drilling tubular selected from the group consisting of (i) a drill string, and, (ii) coiled tubing.
- 20 3. The apparatus of claim 1, wherein the plurality of spaced apart masses attenuates a predetermined frequency range comprising 10 khz to 20 khz.
4. The apparatus of claim 1, wherein the plurality of spaced apart masses comprise a material selected from the group consisting of (i) steel rings, and, (ii) tungsten

rings.

5. The apparatus of claim 1, wherein the plurality of spaced apart masses comprises not less than six and not more than ten masses.
6. The apparatus of claim 1, wherein the spacing of the masses is within the range of
5 twelve to fourteen centimeters.
7. The apparatus of claim 1, wherein each of the plurality of masses comprises a ring having an inner diameter greater than an outer diameter of the tubular element by a predetermined amount, and further comprising a neck element associated with each of said rings and firmly attaching each of said rings to the outer surface of
10 said tubular element.
8. The apparatus of claim 1 wherein the plurality of spaced apart masses comprises a material having a density no less than a density of the tubular element.
9. A method of performing acoustic investigations while drilling a borehole in a subsurface geological formation, comprising:
15
 - a. conveying a logging assembly into the borehole on a drilling tubular, said assembly and said drilling tubular having a drilling fluid flowing through a longitudinally extending passage in said assembly and said drilling tubular;
 - b. activating a transmitter in the assembly for generating acoustic signals in the formation, the borehole, and the assembly;
 - 20 c. attenuating signals passing through the assembly using an attenuator comprising a composite tubular element having a plurality of spaced-apart masses firmly attached on an outer diameter surface of the tubular element, said masses being spaced apart a preselected distance to attenuate signals within a specified frequency range;

- d. using a receiver on a side of the attenuator opposite the transmitter for receiving signals through the formation and the attenuated signals through the assembly.
10. The method of claim 9 wherein said specified frequency range comprises 10 khz
5 to 20 khz.
11. The method of claim 9 wherein said plurality of masses comprises a material selected from (i) steel rings, and, (ii) tungsten rings.
12. The method of claim 9 wherein the drilling tubular has a drill bit attached thereto for drilling the borehole, said drilling tubular selected from the group consisting of
10 (i) a drill string, and, (ii) coiled tubing.
13. The method of claim 9 wherein the material of said masses comprises a material having a density no less than a density of the tubular element.
14. The method of claim 9 wherein the plurality of masses is between six and ten.
15. The method of claim 9 wherein said spacing of the masses is within the range of
15 twelve to fourteen centimeters.
16. The method of claim 9, wherein each of the plurality of masses comprises a ring having an inner diameter greater than an outer diameter of the tubular element by a predetermined amount, and further comprising a neck element associated with each of said rings and firmly attaching each of said rings to the outer surface of
20 said tubular element

1/10

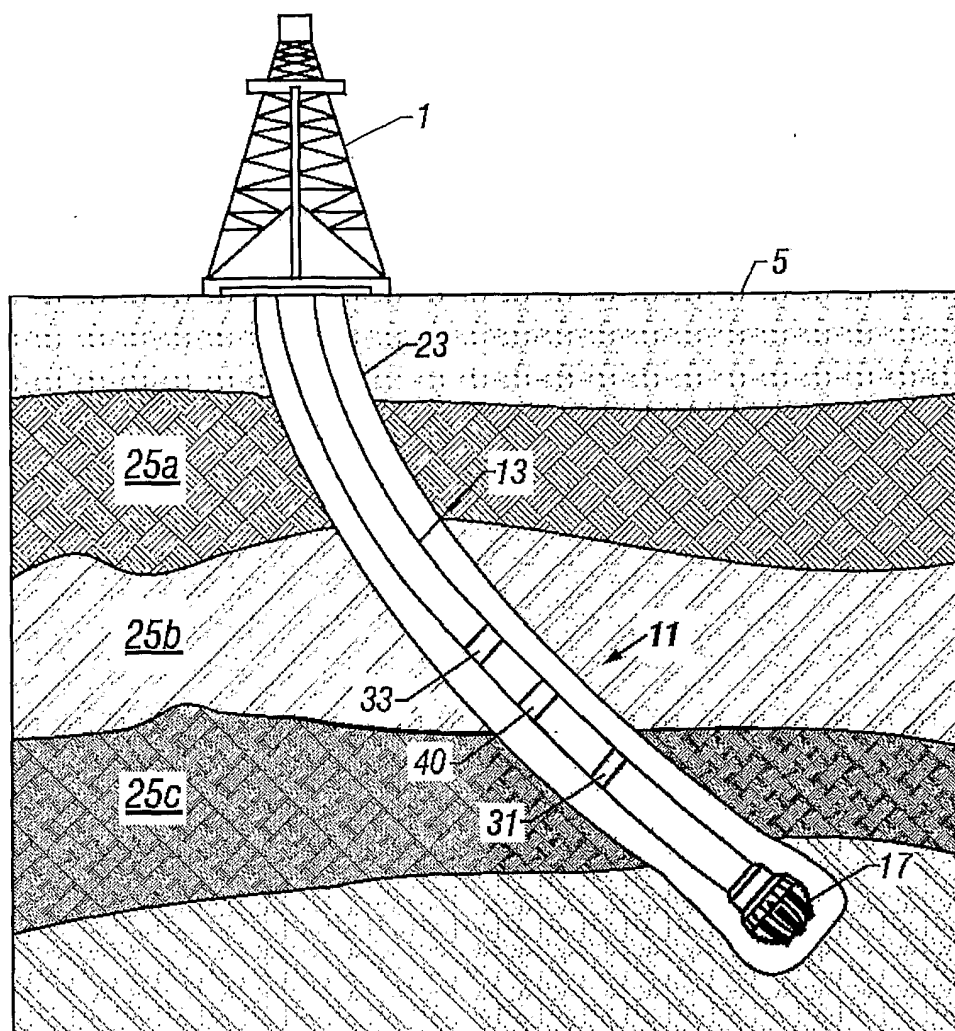


FIG. 1

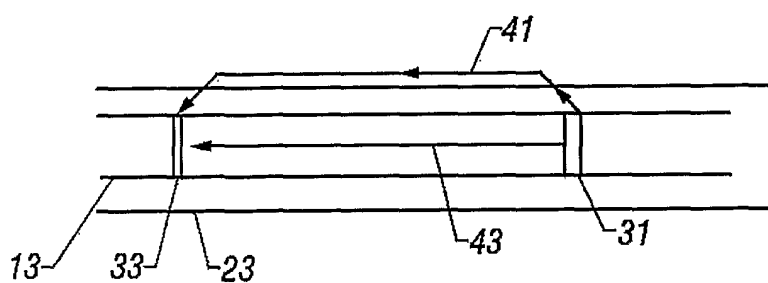


FIG. 2

2/10

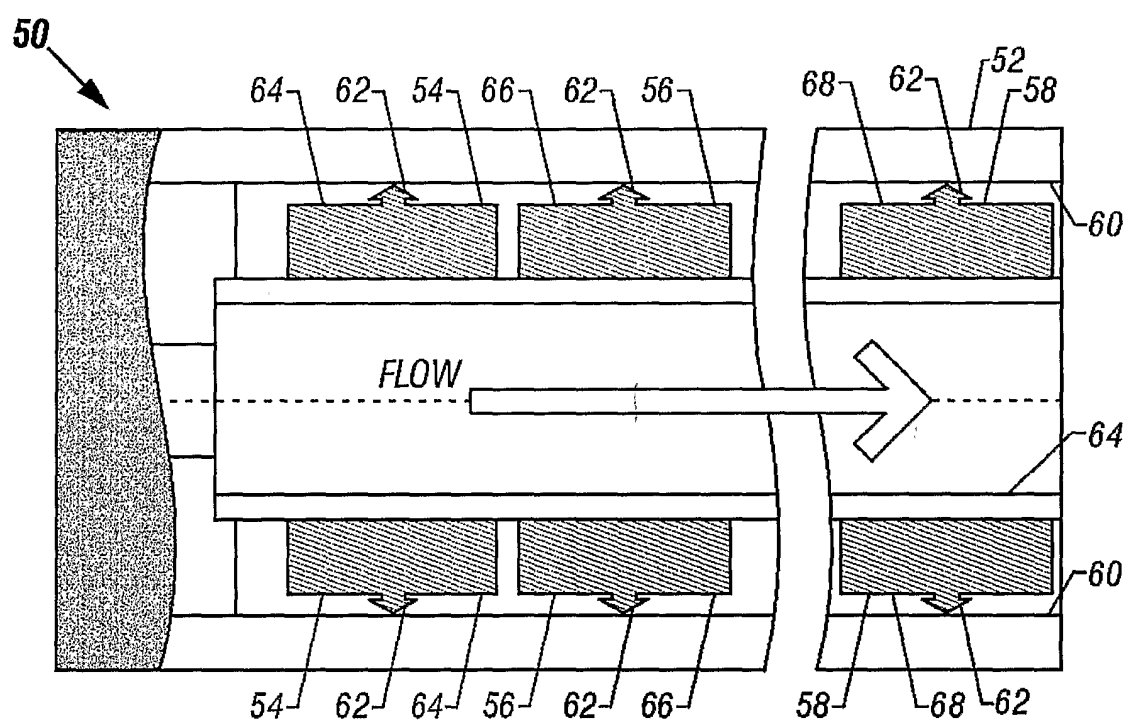


FIG. 3

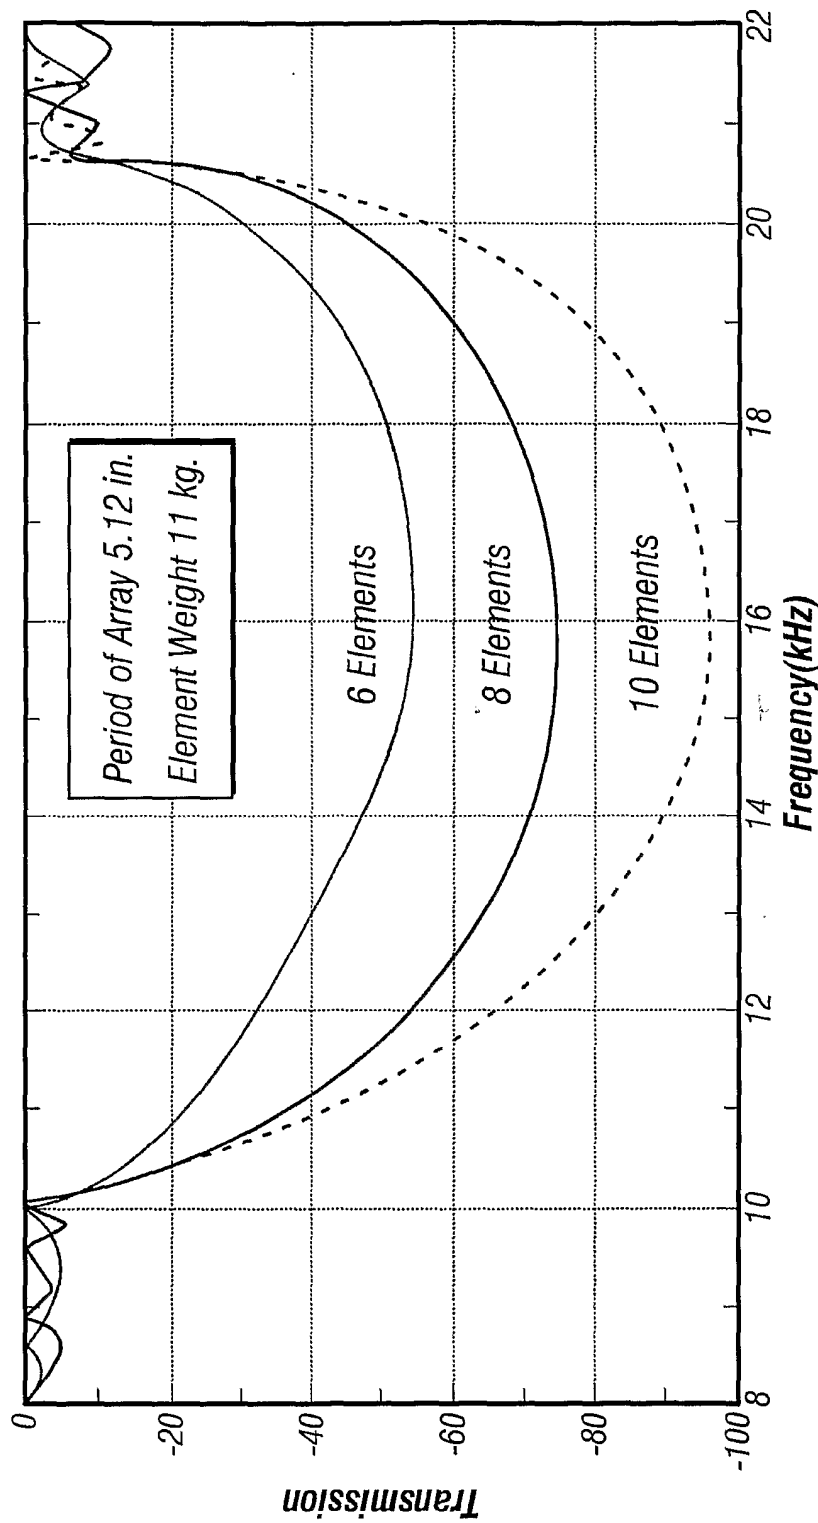
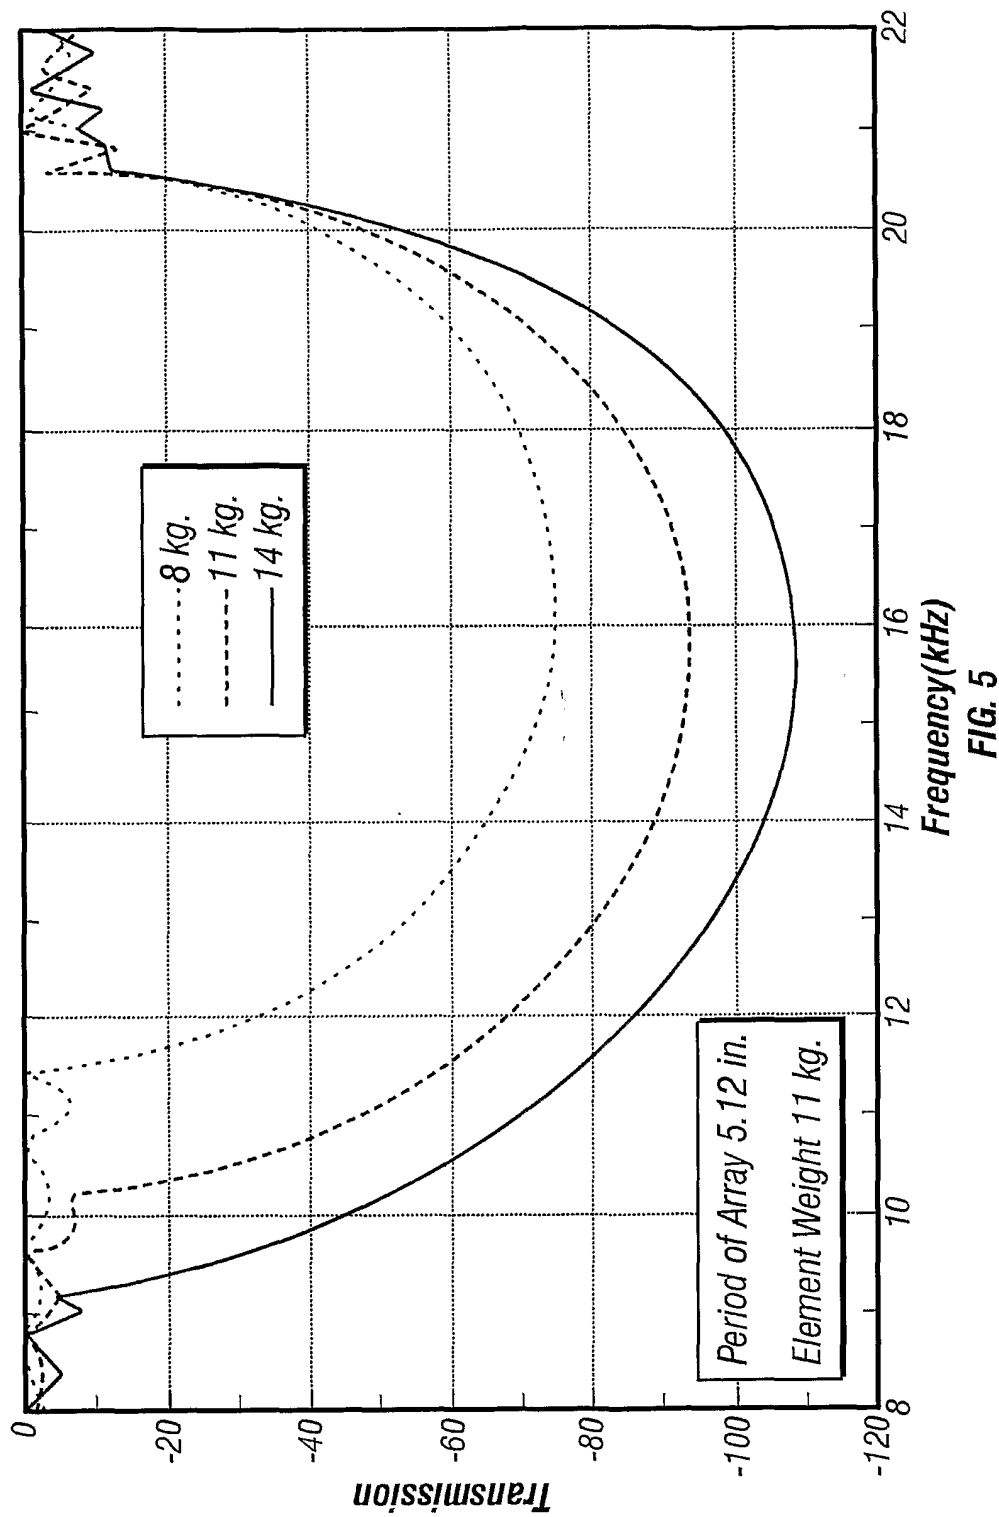


FIG. 4



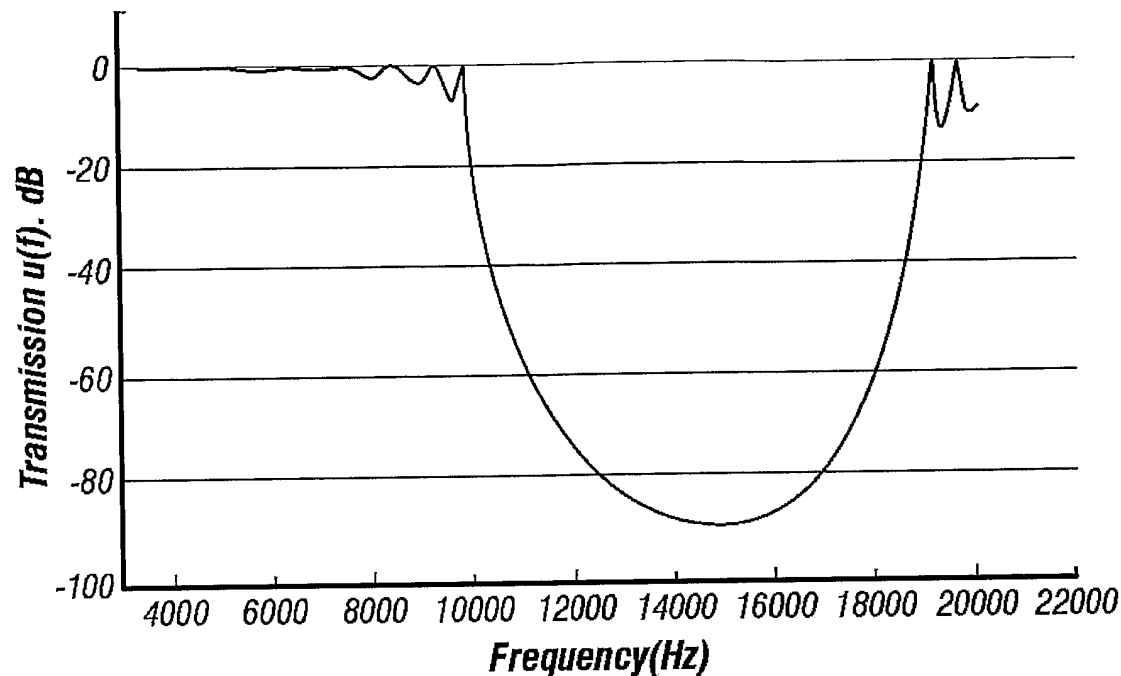


FIG. 6

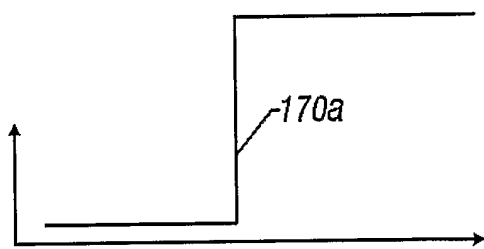
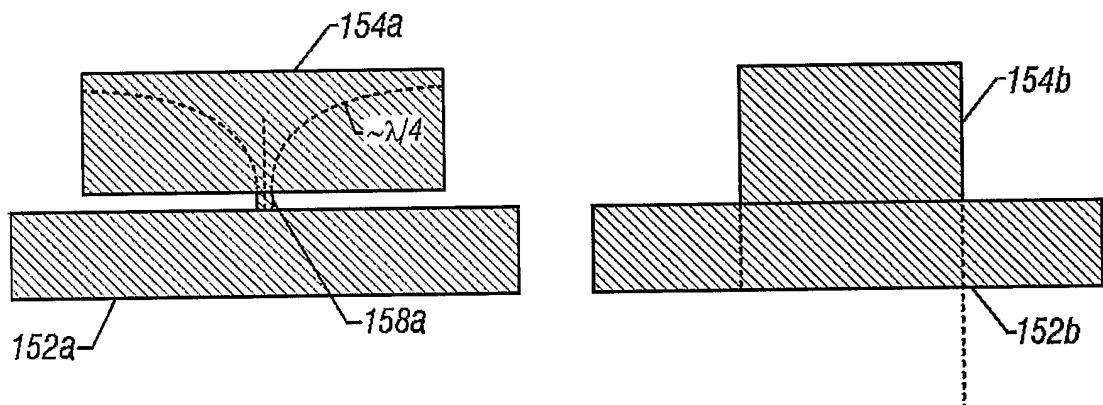


FIG. 7A

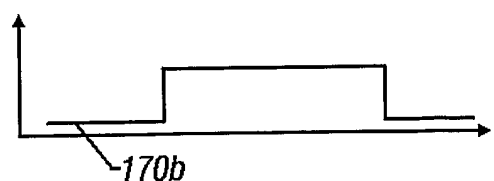


FIG. 7B

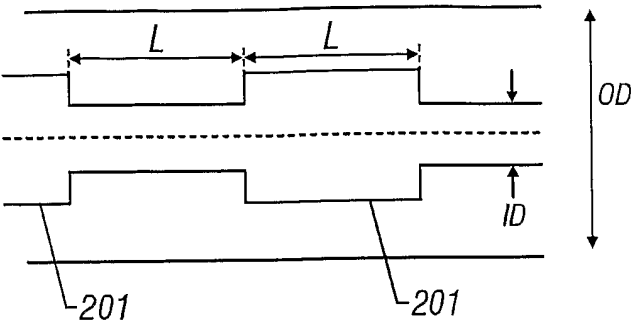


FIG. 8A

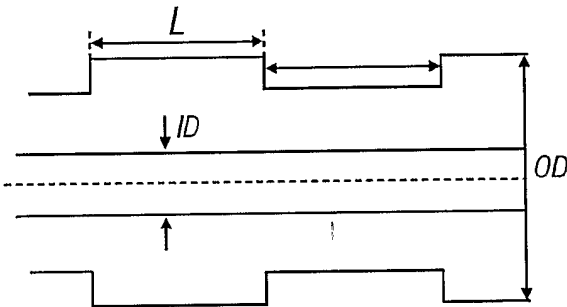


FIG. 8B

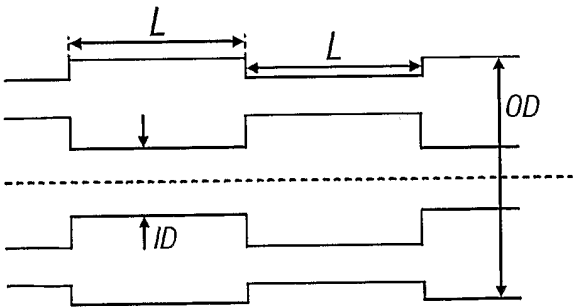


FIG. 8C

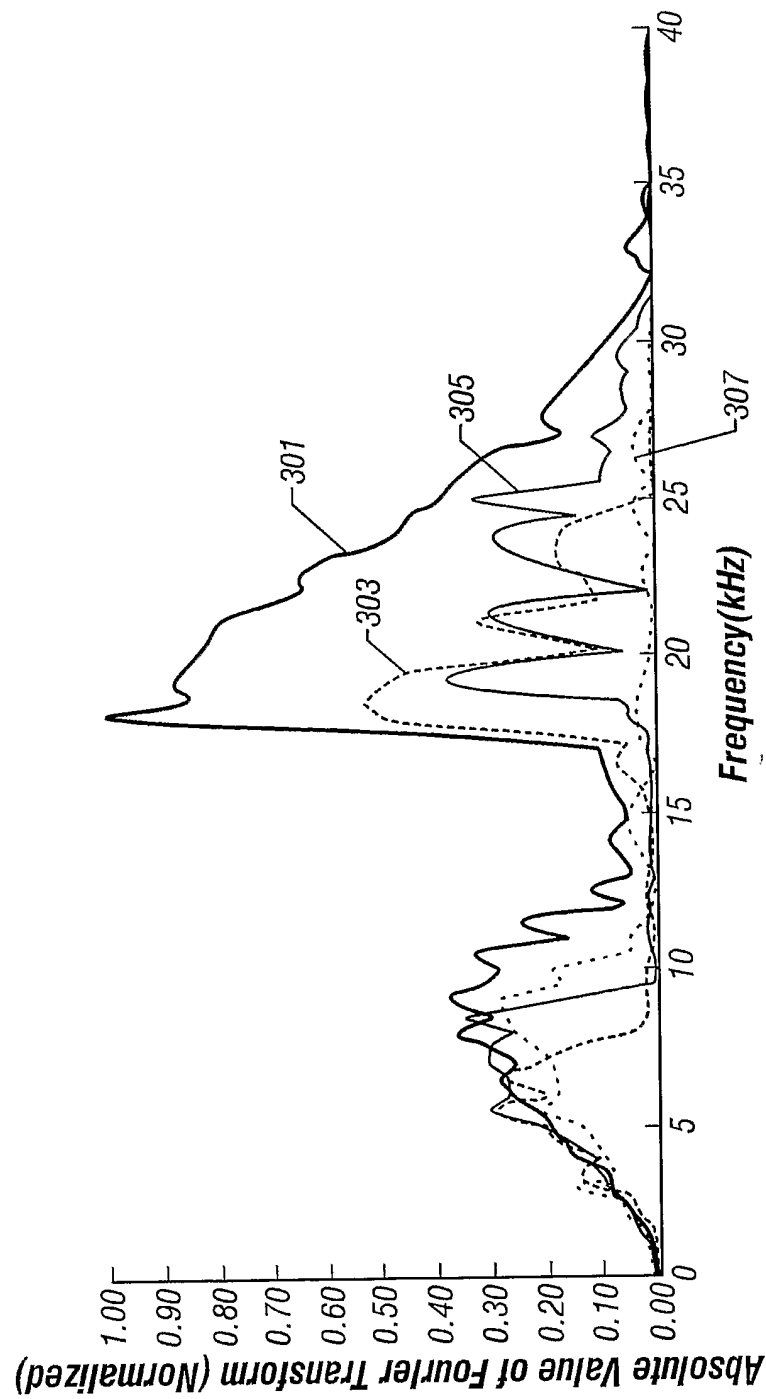


FIG. 9

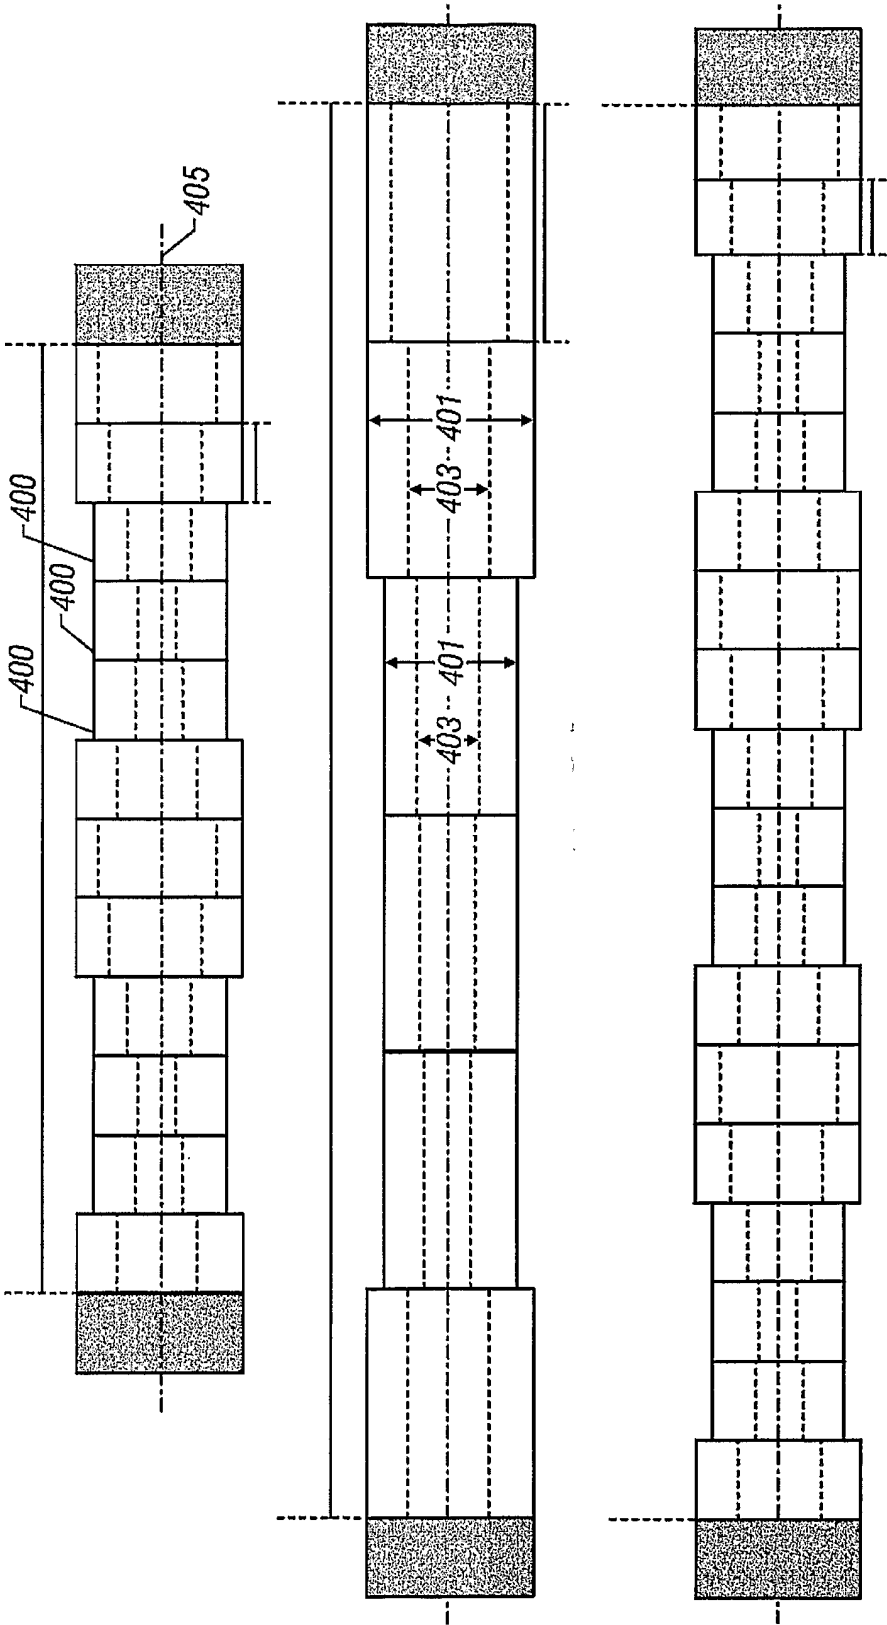


FIG. 10

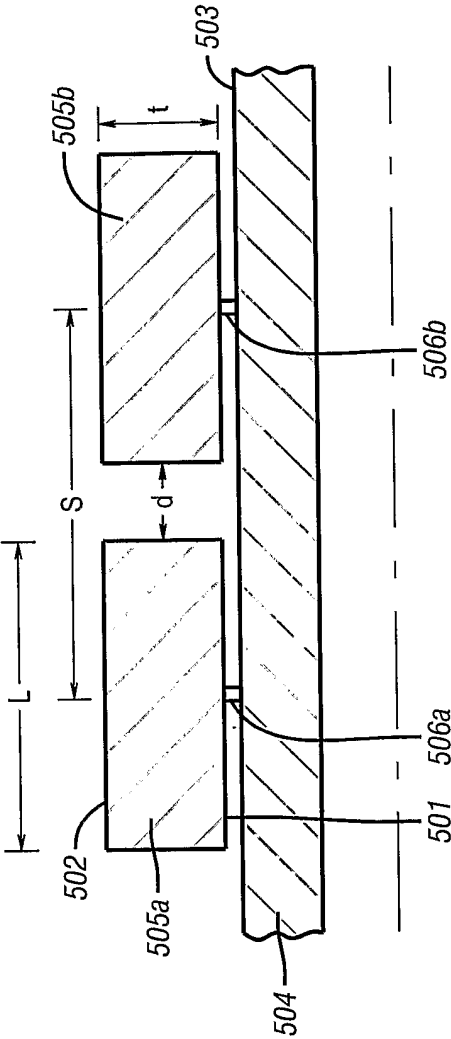


FIG. 11

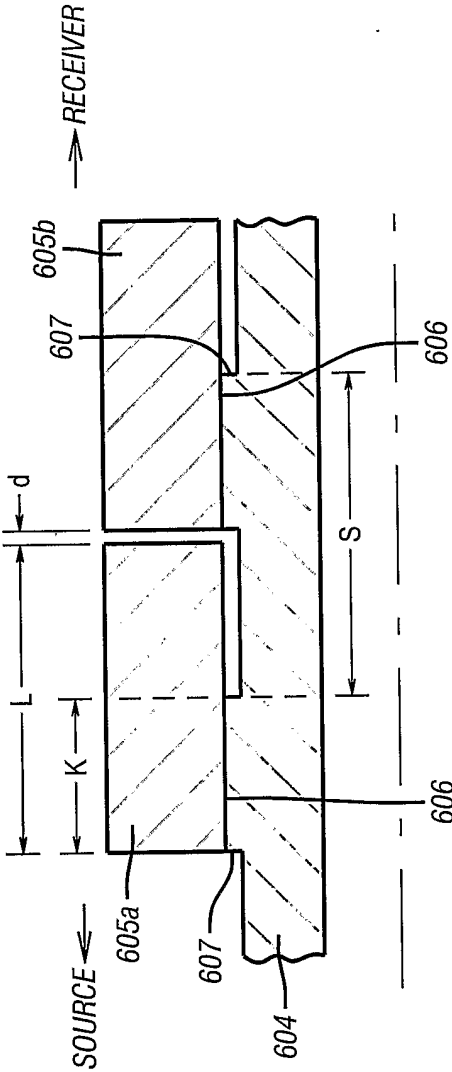


FIG. 12

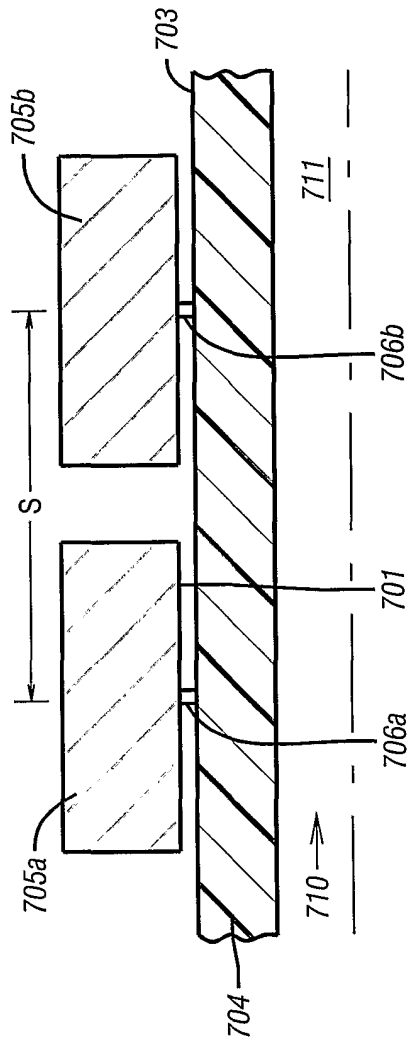


FIG. 13

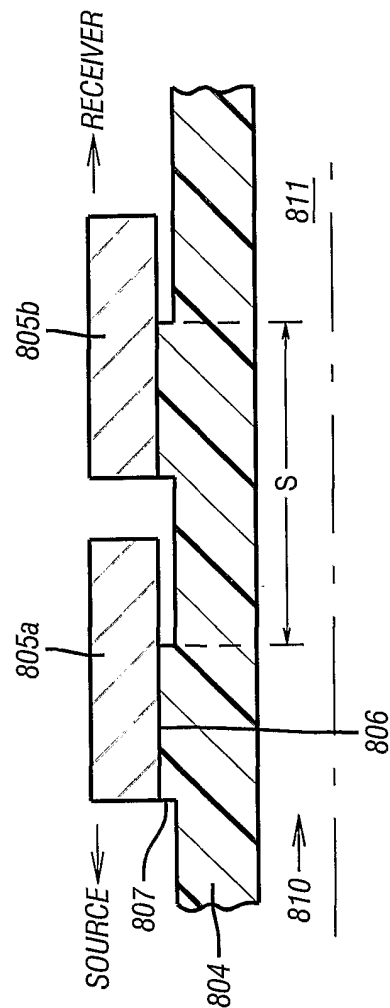


FIG. 14

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US2005/022972

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01V1/52

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01V G10K G01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00/75694 A (BAKER HUGHES INCORPORATED) 14 December 2000 (2000-12-14) page 9, line 21 - page 10, line 4 page 13, line 10 - page 14, line 15 page 14, lines 22,23 page 18, line 15 - page 19, line 14 page 21, line 1 - line 4 claims 1-4,10-16,19,25,26	1-16
X	US 2002/157895 A1 (DUBINSKY VLADIMIR ET AL) 31 October 2002 (2002-10-31) claims 1-30	1-16



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 September 2005

Date of mailing of the international search report

21/09/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Schneiderbauer, K

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US2005/022972

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 852 587 A (KOSTEK ET AL) 22 December 1998 (1998-12-22) column 3, line 62 - column 4, line 3 column 4, line 12 - line 16 column 7, line 5 - line 19 column 8, line 1 - column 9, line 21 figures 2,3,3a,3b	1,4,8,9, 11-13
X	EP 0 900 918 A (ANADRILL INTERNATIONAL SA; SERVICES PETROLIERS SCHLUMBERGER) 10 March 1999 (1999-03-10) page 3, paragraph 20-25 page 4, paragraph 34 page 5, paragraphs 35,41-43 figures 3a,3b	1,9
A	GB 2 311 427 A (* GEC-MARCONI LIMITED; * THOMSON MARCONI SONAR LIMITED) 24 September 1997 (1997-09-24) page 7, line 21 - page 8, line 20; figure 2 page 9, line 21 - page 10, line 2	1-16
A	US 2003/106739 A1 (ARIAN ABBAS ET AL) 12 June 2003 (2003-06-12) page 2, paragraphs 24,25 page 3, paragraph 31 figures 2,3	1-16
A	US 5 229 553 A (LESTER ET AL) 20 July 1993 (1993-07-20) column 4, line 40 - line 52 column 7, line 33 - column 8, line 21 figures 7,8a,8b	1-16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US2005/022972

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0075694	A	14-12-2000	AU 776561 B2	16-09-2004
			AU 5178300 A	28-12-2000
			AU 2004208724 A1	04-11-2004
			CA 2371464 A1	14-12-2000
			GB 2366351 A	06-03-2002
			NO 20015852 A	01-02-2002
US 2002157895	A1	31-10-2002	US 6615949 B1	09-09-2003
			US 2004104068 A1	03-06-2004
US 5852587	A	22-12-1998	US 5309404 A	03-05-1994
EP 0900918	A	10-03-1999	CA 2244558 A1	09-02-1999
			DK 900918 T3	15-03-2004
			GB 2327957 A	10-02-1999
			NO 983628 A	10-02-1999
			US 2002080682 A1	27-06-2002
GB 2311427	A	24-09-1997	DE 69714229 D1	29-08-2002
			DE 69714229 T2	27-03-2003
			EP 0888563 A1	07-01-1999
			WO 9736191 A1	02-10-1997
			NO 984404 A	23-11-1998
			US 6145615 A	14-11-2000
US 2003106739	A1	12-06-2003	BR 0204988 A	29-06-2004
			CA 2413520 A1	07-06-2003
			FR 2833297 A1	13-06-2003
			GB 2382857 A	11-06-2003
			NO 20025832 A	10-06-2003
US 5229553	A	20-07-1993	NONE	