


(12) UK Patent Application (19) GB (11) 2 125 107 A

- (21) Application No **8319394**
- (22) Date of filing **18 Jul 1983**
- (30) Priority data
- (31) **22420**
- (32) **16 Jul 1982**
- (33) **Italy (IT)**
- (43) Application published
29 Feb 1984
- (51) **INT CL³**
F02B 67/04
- (52) Domestic classification
F1B 6F
- (56) Documents cited
GB 1365805
- (58) Field of search
F1B
- (71) Applicant
Same SpA,
(Italy),
Viale F Cassani 14,
Treviglio (Bergamo)
- (72) Inventor
Luigi Pitozzi
- (74) Agent and/or address for
service
Reddie & Grose,
16 Theobalds Road,
London,
WC1X 8PL

(54) **Power drive for the lubricating oil circulation pump and for the fuel injection system regulator of diesel engines**

(57) The lubricating oil circulation pump 13 and the fuel injection system regulator 12 are driven by a common shaft 15 extending through the

cylinder block 10 from the oil sump 14 to said regulator, which is mounted externally. The shaft 15 is operationally connected at an intermediate point thereof to the engine cam shaft 11, and at its opposing ends to the drives of the circulating pump 13 and regulator 12 respectively.

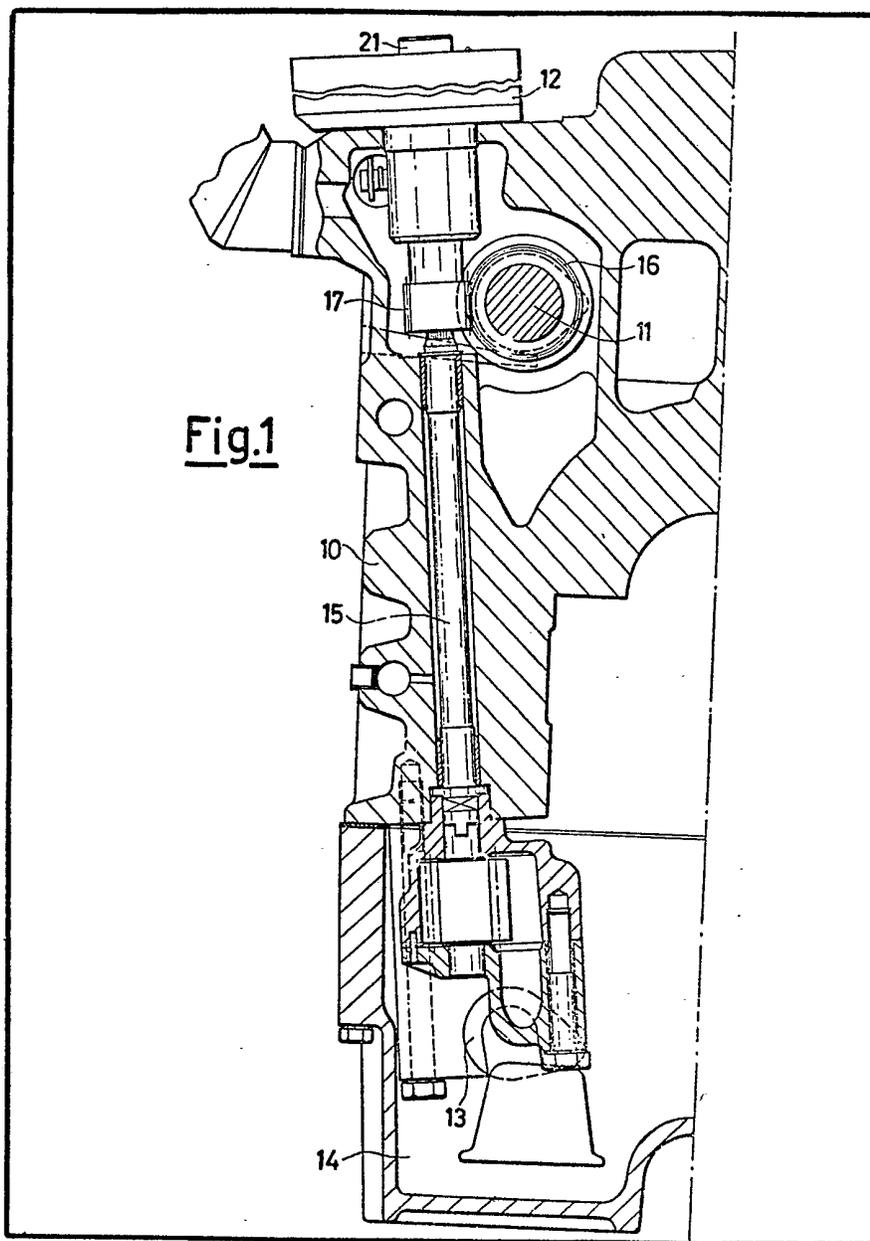

GB 2 125 107 A

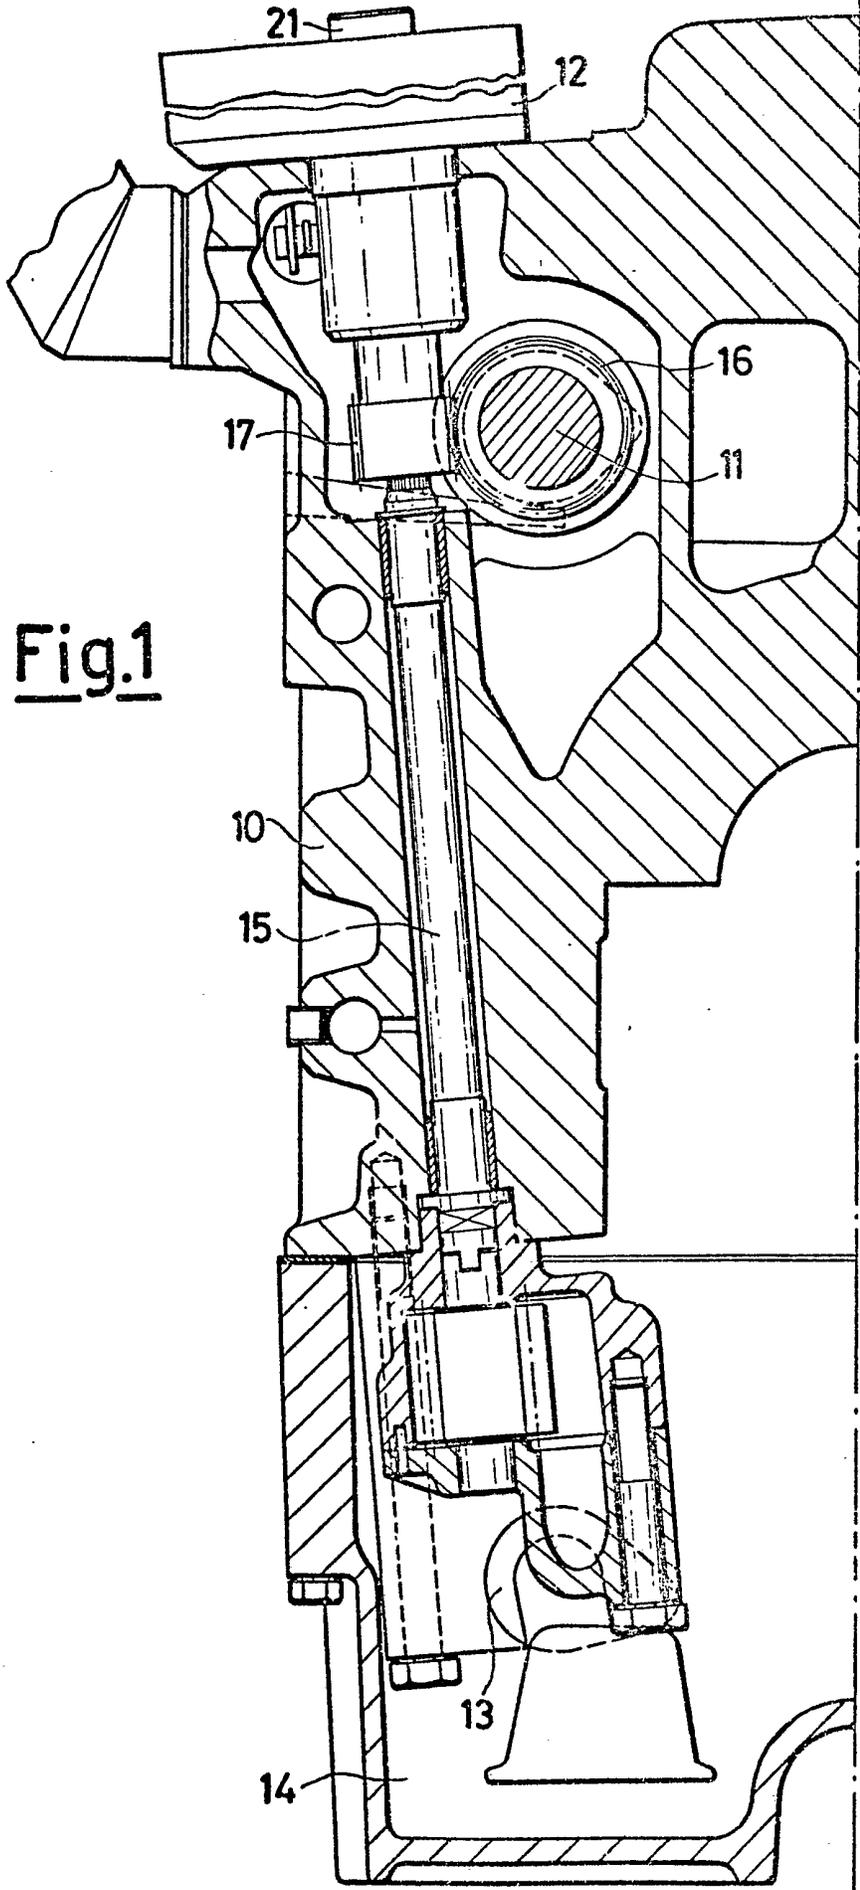


Fig.1

21

12

16

11

17


10

15

13

14

Fig.2

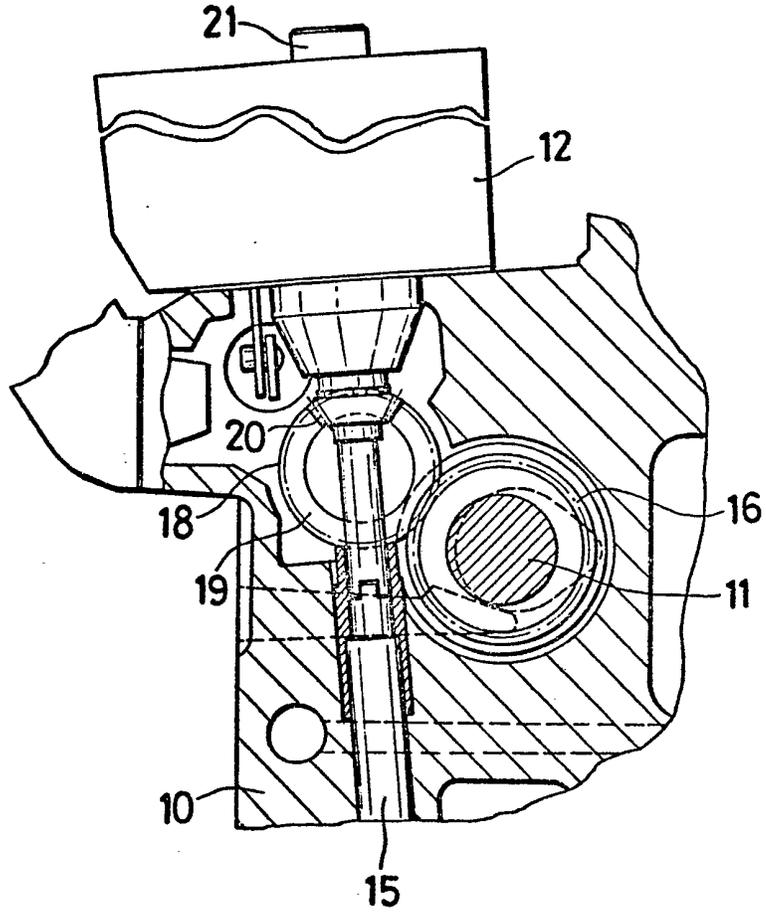

SPECIFICATION

Control unit for the lubricating oil circulation pump and for the fuel injection system regulator of diesel engines

5 Diesel engines are known comprising separate controls for the lubricating oil circulation pump and for the fuel injection system regulator.

The object of the present invention is to provide a control unit which is able to simultaneously operate both the lubricating oil circulation pump and the diesel injection system regulator, said regulator being a self-contained device mounted externally to the engine and easily interchangeable.

15 The said control unit can also comprise a power take-off for mechanical tachometers.

This object is attained according to the invention by providing, in a diesel engine, a control unit comprising a shaft extending through the cylinder block from the oil sump to the fuel injection system regulator, said shaft being operationally connected at an intermediate point thereof to the engine cam shaft, and connected at its opposing ends to the power take-off of the lubricating oil circulation pump and of said regulator respectively.

The opposite end of the regulator shaft can drive a mechanical tachometer.

30 In this manner, a diesel engine is obtained which is of more economical construction, structurally compact, operationally reliable and of simple maintenance.

The structural and operational characteristics of the invention and its advantages will be more apparent from the description given hereinafter by way of example with reference to the accompanying drawings, on which:

35 Figure 1 is a section showing part of the cylinder block of a diesel engine incorporating a

40 control unit constructed in accordance with the present invention, and

Figure 2 is a detail.

On the drawings, the reference numeral 10 indicates a diesel engine cylinder block, 11 the cam shaft, 12 the fuel injection pump regulator, and 13 the circulation pump for the lubricating oil collected in the sump 14.

The possible power take-off for a mechanical tachometer is indicated at the point 21.

50 According to the present invention, the regulator 12 and pump 13 are controlled by a single shaft 15 which passes through the cylinder block 10 and is driven by the said cam shaft 11 by means of a pair of gears 16, 17 (Figure 1), or by a gear train composed of two cylindrical gears (16, 18, Figure 2) and two bevel-gears (19, 20, Figure 2).

At its opposing ends, the shaft 15 is operationally connected to the regulator 12 and pump 13 in any suitable manner.

60 The object stated in the introduction to the description is thus attained.

Claims

1. A control unit for the lubricating oil circulation pump and for the fuel injection system regulator of diesel engines, characterised by comprising a shaft extending through the cylinder block from the oil sump to said regulator, which is mounted externally, said shaft being operationally connected at an intermediate point thereof to the engine cam shaft, and at its opposing ends to the power take-offs of said circulating pump and regulator respectively.

75 2. A unit as claimed in claim 1, characterised in that said shaft also transmits motion to a mechanical tachometer by creating a power take-off at the regulator end.