




(86) **Date de dépôt PCT/PCT Filing Date:** 2007/11/20
 (87) **Date publication PCT/PCT Publication Date:** 2008/05/29
 (45) **Date de délivrance/Issue Date:** 2018/08/21
 (85) **Entrée phase nationale/National Entry:** 2009/05/19
 (86) **N° demande PCT/PCT Application No.:** AU 2007/001782
 (87) **N° publication PCT/PCT Publication No.:** 2008/061298
 (30) **Priorité/Priority:** 2006/11/20 (AU2006906433)

(51) **Cl.Int./Int.Cl. H04N 7/18** (2006.01)
 (72) **Inventeurs/Inventors:**
 VAN DEN HENGEL, ANTON JOHN, AU;
 DICK, ANTHONY ROBERT, AU;
 BROOKS, MICHAEL JOHN, AU
 (73) **Propriétaire/Owner:**
 SNAP NETWORK SURVEILLANCE PTY LIMITED, AU
 (74) **Agent:** MOFFAT & CO.

(54) **Titre : SYSTEME DE SURVEILLANCE DE RESEAU**
 (54) **Title: NETWORK SURVEILLANCE SYSTEM**

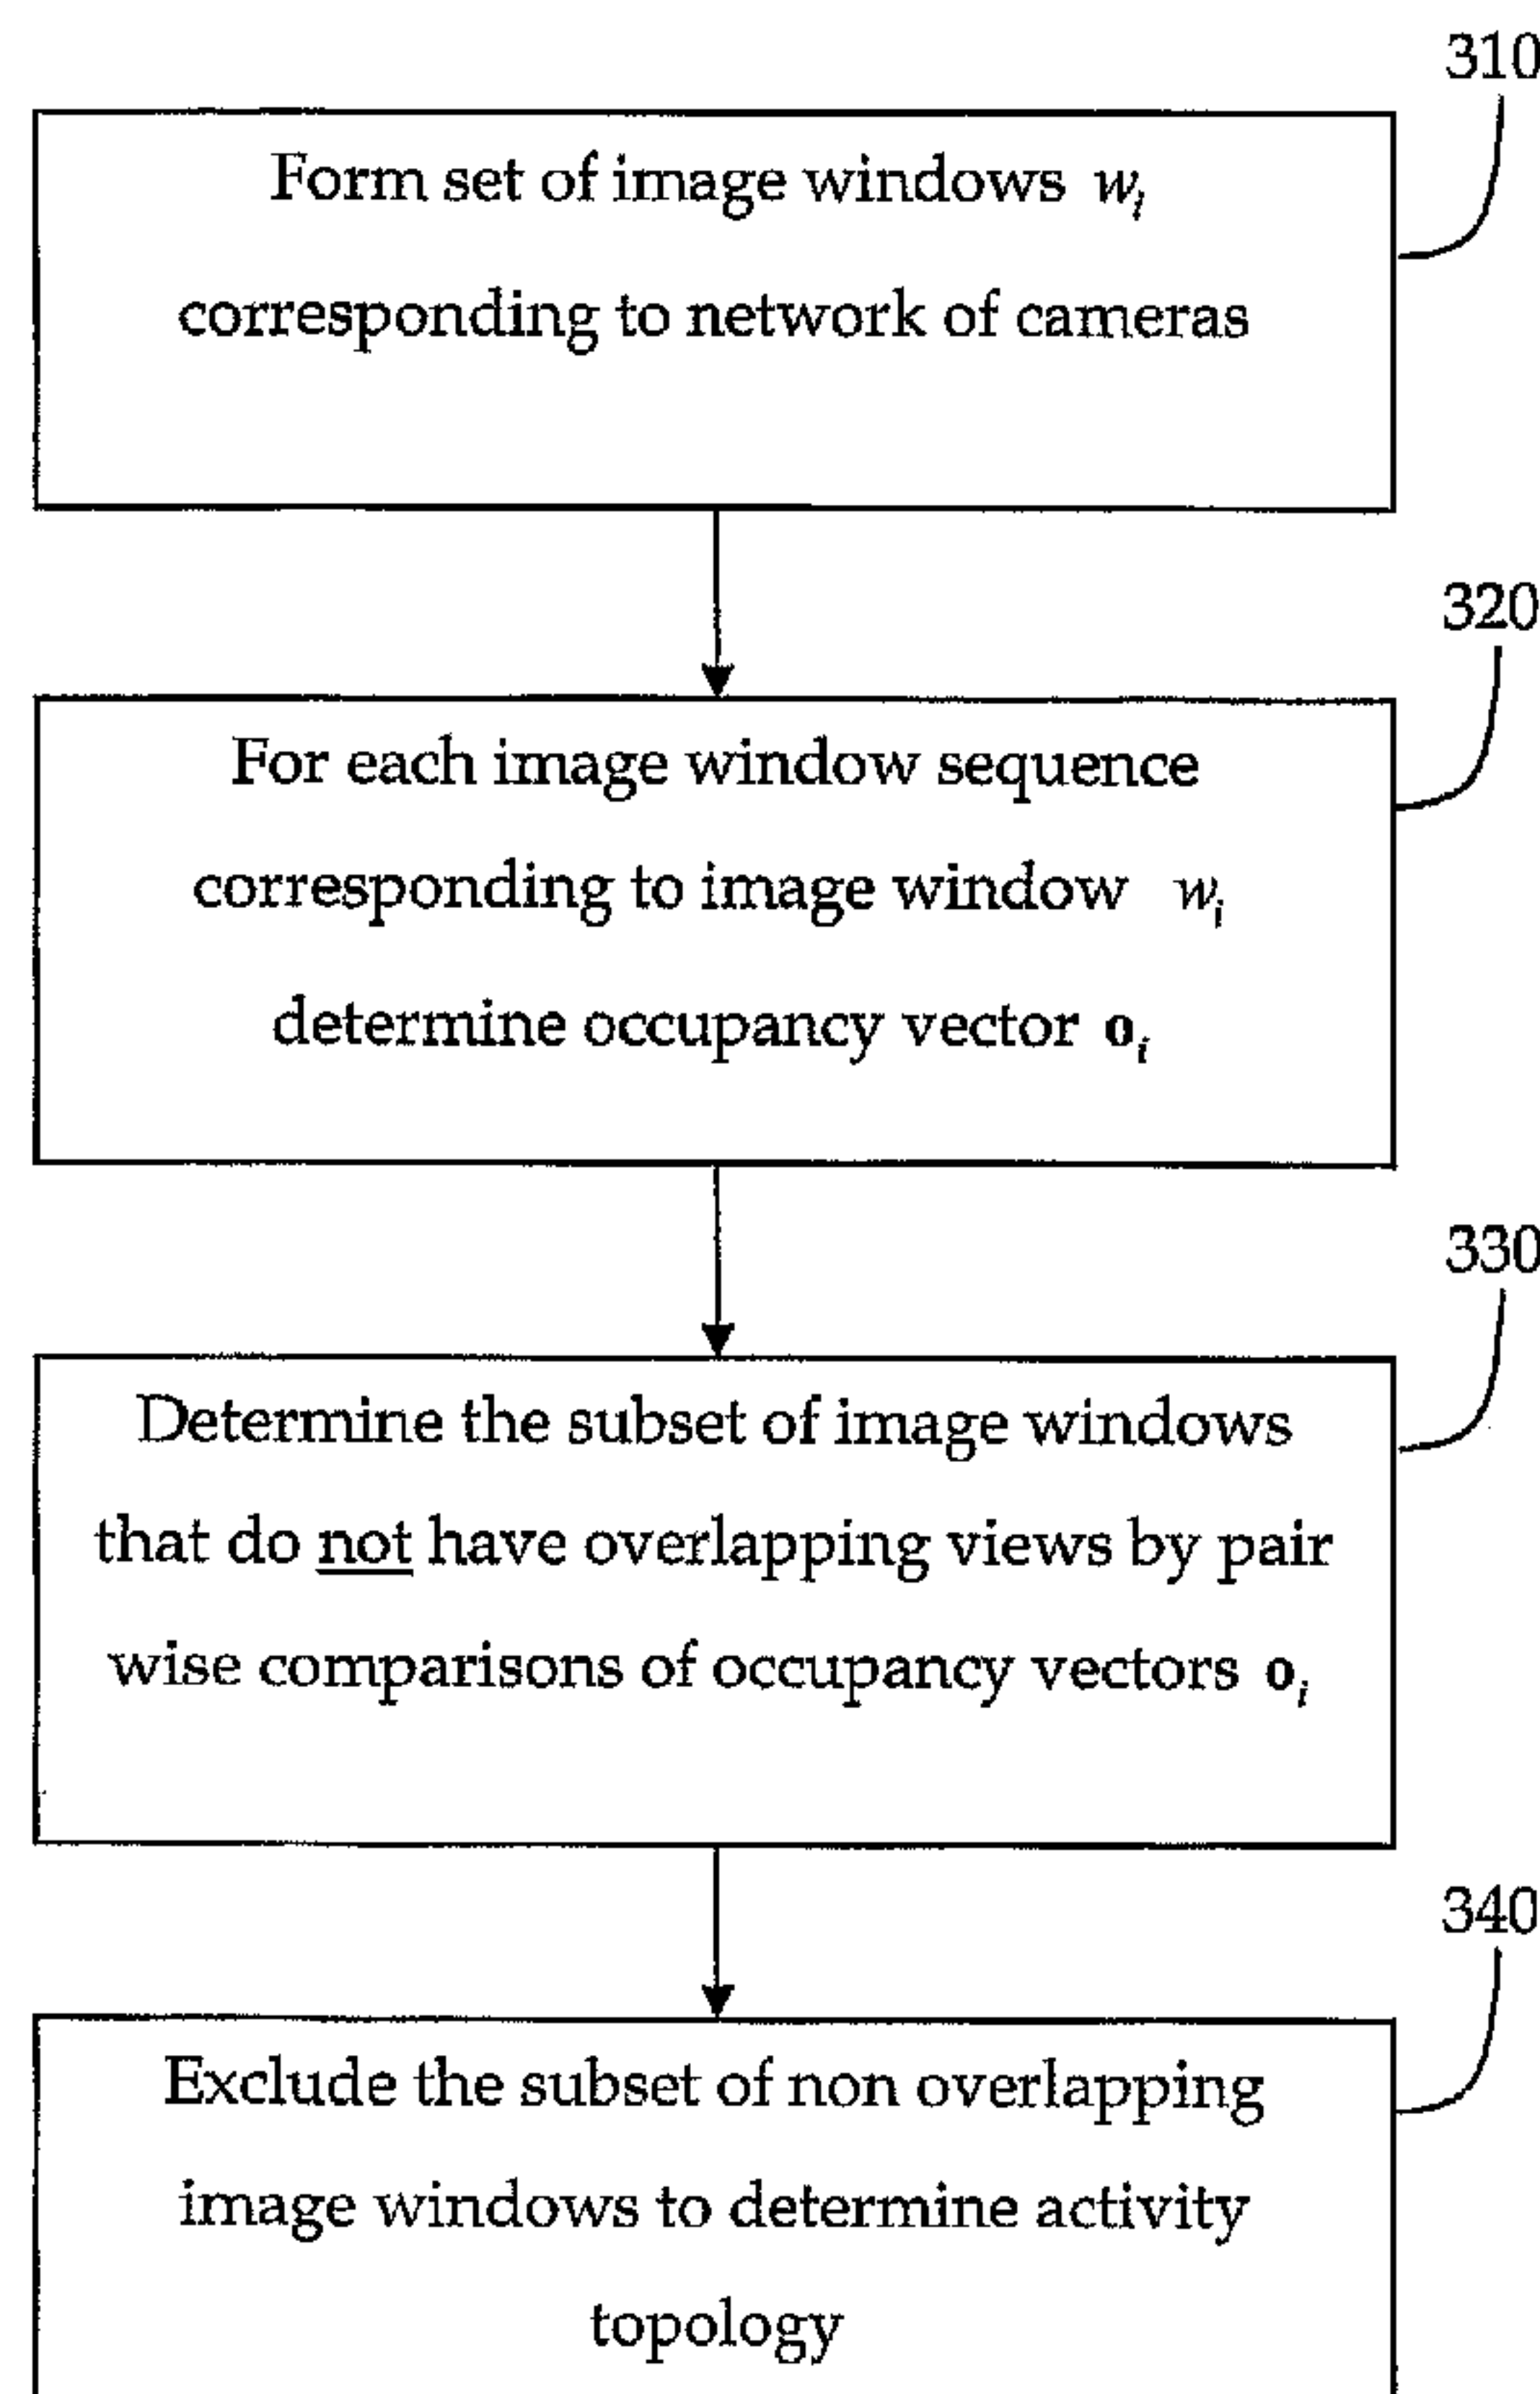

(57) **Abrégé/Abstract:**

A method for estimating the activity topology of a set of sensed data windows is described. Each of the sensed data windows is related to a corresponding sensed region. The method includes the steps of determining a subset of sensed data windows that are not connected; and excluding the subset of sensed data windows from the set of sensed data windows. In one embodiment, the sensed data windows correspond to image windows such as would be provided by a visual surveillance system.

ABSTRACT

A method for estimating the activity topology of a set of sensed data windows is described. Each of the sensed data windows is related to a corresponding sensed region. The method includes the steps of determining a subset of sensed data windows that are not connected; and excluding the subset of sensed data windows from the set of sensed data windows. In one embodiment, the sensed data windows correspond to image windows such as would be provided by a visual surveillance system.

NETWORK SURVEILLANCE SYSTEM**CLAIM OF PRIORITY**

The present application for patent claims priority from Australian Provisional Patent Application No. 2006906433 entitled "Network Surveillance System", filed 20
5 November 2006.

TECHNICAL FIELD

The present invention relates to surveillance systems. In a particular form, the
10 present invention relates to surveillance systems that involve networks of multiple sensors distributed over an extended area.

BACKGROUND

With the increased focus on the surveillance of both private and public areas, there
15 has been a substantial increase in the numbers and sophistication of cameras and sensors that are utilized to monitor these extended areas. An example of such a surveillance task is the monitoring of an airport or train station which may involve many hundreds of cameras each potentially providing a live feed to a centralized monitoring station where they are viewed by human operators. The operators may
20 have a number of possible goals, such as observing customer behaviour, or identifying threats to the public or infrastructure.

This ability to employ multiple cameras has been facilitated by the use of real time digital video cameras which transfer their live image information via standard
25 network protocols such as Internet Protocol (IP), thereby making the addition of further cameras to a pre-existing network as easy as connecting an IP camera to a central hub whether by wireless means or directly by cable. The IP camera is then provided either with a dynamic or static allocated IP address and can commence streaming of live video data in an extremely short time.

However, whilst this ease of being able to increase the number of cameras in a network surveillance system implies that more extended areas may be monitored at increased resolution, the large amount of incoming video information that is streamed to a centralized monitoring station quickly results in information overload
5 when this information is being viewed by human operators. Accordingly, security personnel that are tasked to monitor this information are not able to effectively monitor these extended areas.

To address these shortcomings of large scale network surveillance systems, data
10 analysis methods have been developed which attempt to analyse the incoming video information to determine if the behaviour of objects or people being viewed varies from "normal." This is with a view to presenting monitoring personnel with video information of those behaviours which have been initially classified as abnormal. To this end, these systems, which may be a combination of hardware and software,
15 attempt to generate an understanding of the paths or tracks which "targets" may take between the fields of views of each of the cameras.

This "activity topology" information is accordingly the foundation for many fundamental tasks in networked surveillance, such as tracking an object across the
20 network. In order to derive the activity topology of a network of cameras, the aim is not only to estimate relative positions of surveillance cameras with overlapping fields of view, but also to characterise the motion of targets between non-overlapping pairs of cameras. Although in principle the activity topology could be derived manually for small sets of cameras, this approach clearly does not scale to large
25 network surveillance systems, where individual cameras may frequently be added, malfunction or moved.

There have been a number of approaches in the prior art that attempt to estimate the activity topology of a network of cameras. Typically, these approaches either require
30 training data, such as the correspondence between paths or tracks in different images

or camera views, to be supplied *a priori* or rely on observing the motion of targets for extended periods of time as they move through the area viewed by the network of cameras. This is in order to accumulate appearance and disappearance correlation information in an attempt to estimate the path that a target will take.

5

These methods all rely on either human intervention or observing and analysing large amounts of video data in order to determine the activity topology. This problem is complicated by the fact that comparisons must be made between every pair of cameras in a network. As the number of pairs of cameras grows with square
10 of the number of cameras in the network, these techniques that are based on exhaustive pair wise comparisons of large volumes of data soon become infeasible.

Another class of methods estimate the calibration and orientation information relating each of the cameras in the network to a common frame of reference on the
15 basis of commonly viewed features. These methods do not characterise the activity topology, are susceptible to failing to find the required number of common image features, and rely on large overlaps and complete connectivity between fields of view.

20 SUMMARY

In a first aspect the present invention accordingly provides a method for estimating the activity topology of a set of sensed data windows, each of the sensed data windows related to a corresponding sensed region, the method including the steps:
25 determining a subset of sensed data windows that are not connected; and
excluding the subset of sensed data windows from the set of sensed data windows.

Preferably, the step of determining the subset of sensed data windows includes comparing sensed data windows pair wise from the set of sensed data windows.

Preferably, the step of comparing sensed data windows pair wise includes determining whether a pair of sensed data windows does not have overlapping sensed regions.

- 5 Preferably, the step of determining whether the pair of sensed data windows does not have overlapping sensed regions includes determining a first occupancy measure for a first sensed data window and a second occupancy measure for a second sensed data window, the first and second sensed data windows comprising the pair of sensed data windows, and comparing the first and second occupancy measures.

10

Preferably, the step of comparing the first and second occupancy measures includes forming an occupancy vector corresponding to a first sensed data window sequence associated with the first sensed data window and a second occupancy vector corresponding to a second sensed data window sequence associated with the second sensed data window and comparing corresponding elements of the first and second occupancy vectors.

15

Preferably, the step of comparing corresponding elements of the first and second occupancy vectors includes performing a vector exclusive-or operation on the first and second occupancy vectors to determine that the associated first and second sensed data windows do not overlap.

20

Preferably, the second occupancy vector that corresponds to the second sensed data window sequence is based on the second sensed data window and its nearest neighbouring sensed data windows thereby forming a padded occupancy vector.

25

Preferably, the step of comparing corresponding elements of the first and second occupancy vectors includes performing a vector exclusive-or operation on the first occupancy vector and the padded occupancy vector to determine that the associated first and second sensed data windows do not overlap.

30

Optionally, the step of comparing corresponding elements of the first and second occupancy vectors includes performing a vector uni-directional exclusive-or operation on the first occupancy vector and the padded occupancy vector to determine that the associated first and second sensed data windows do not overlap.

5

Preferably, the step of comparing corresponding elements of the first and second occupancy vectors includes comparing over neighbouring elements of one or both of the first and second occupancy vectors.

10 Preferably, the step of determining whether a pair of sensed data windows does not have overlapping sensed regions includes taking into account the likelihood of a false indication that a pair of sensed data windows do overlap.

15 Preferably, the step of taking into account the likelihood of a false indication that a pair of sensed data windows do overlap is based on previous data associated with the pair of sensed data windows.

20 Preferably, the step of taking into account the likelihood of a false indication that a pair of sensed data windows do overlap includes taking into account an error rate of a sensor or sensors associated with the pair of sensed data windows.

25 Preferably, the sensed data window is an image window and the first and second sensed data window sequences correspond to first and second image window sequences.

25

Preferably, the first and second image window sequences correspond to respective time series of images.

30 Preferably, the time series of images is provided by cameras in a network surveillance system.

Preferably, the method further includes the step of determining a further subset of sensor data windows that are connected.

In a second aspect the present invention accordingly provides a network surveillance
5 system including:

a network of sensors, each sensor providing one or more sensed data windows each corresponding to a sensed region and forming in total a set of sensed data windows; and

10 data processing means to determine a subset of sensed data windows that are not connected and excluding the subset of sensed data windows from the set of sensed data windows.

In a third aspect the present invention accordingly provides a program storage device readable by machine, tangibly embodying a program of instructions to
15 perform method steps for estimating the activity topology of a set of sensed data windows, each of the sensed data windows related to a corresponding sensed region, the method steps including:

determining a subset of sensed data windows that are not connected; and
excluding the subset of sensed data windows from the set of sensed data
20 windows.

In a fourth aspect the present invention accordingly provides a method for estimating the location of a sensor in a network of sensors monitoring an area, the method including the steps of:

25 dividing subsets of sensors into respective zones each viewing a corresponding region; and

determining those zones where the sensor does not have an overlapping view of the corresponding region viewed by the zone.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the present invention will be discussed with reference to the accompanying drawings wherein:

5 FIGURE 1 is a schematic view of a network surveillance system including a network of cameras distributed about a building;

FIGURE 2 is a schematic view of camera images corresponding to the network of cameras illustrated in Figure 1 depicting how the camera images are divided into a set of image windows;

10 FIGURE 3 is a flowchart of a method for determining the activity topology according to a first illustrative embodiment of the present invention;

FIGURE 4 is a figurative view showing the overlap of two camera images corresponding to cameras having different orientations when viewing a common region of interest; and

15 FIGURE 5 is a plot of the number of exclusions versus the number of occupied image windows for a simulated network of cameras.

In the following description, like reference characters designate like or corresponding parts throughout the several views of the drawings.

20 TECHNICAL DESCRIPTION

Referring now to Figure 1, there is shown a schematic diagram of a network surveillance system 100 being distributed about a building 200 for the monitoring of an extended area both inside and outside of the building. In this illustrative embodiment, network surveillance system 100 includes a network of cameras
25 comprising sixteen (16) individual IP cameras 1, 2 16 that convey their images in real time to a centralised monitoring site. Each camera has a corresponding field of view which is shown figuratively as a shaded area extending from the camera location.

30 Whilst the network surveillance system 100 depicted here includes cameras having substantially similar characteristics, clearly the invention may also equally be applied

to camera or sensor networks that include many different types of cameras or sensors having a wide range of resolutions and other imaging characteristics. As depicted in Figure 1, many of the fields of view of the individual cameras will overlap due to their positioning. This variation in positioning not only includes physical location about building 200 but also their height and orientation. As would be apparent to those skilled in the art, the indicative shaded area does not show the true extent of the field of view which will depend on the optical setup of the individual camera.

Whilst in this illustrative embodiment, the IP cameras have been optimised for detecting information in the visible range of wavelengths, it would be apparent to those skilled in the art that the present invention is also applicable to any electromagnetic imaging device, image capture means or sensor device which produces a sensed data window that relates to a corresponding sensed region. This includes, but is not limited to thermal imaging cameras, X-ray cameras and other systems such as audio or sonar mapping systems. In addition, each individual camera may include a standard analogue camera in combination with a frame grabber device to provide digital image data. Furthermore, the camera may comprise a sensor that is only capable of detecting the presence of a target within an area thereby producing only a single "pixel" of information such as an audio, chemical, thermal or motion sensor or the like.

Referring now to Figure 2, there is shown a schematic view of the camera images 110, 120, 130, ..., 140 that correspond to the 16 cameras illustrated in Figure 1. Each camera image is then further divided into K image windows w_i , comprising M rows of N image windows in each row. In this illustrative embodiment, each of the cameras includes an equal number of image windows however; equally different cameras may have different sized image windows or only one image window where the entire camera image is taken to be a window. Furthermore, each image may be divided into image windows of varying size which do not necessarily have to be of

rectangular shape but may have a curved boundary such as would be readily described by a spline function or the like.

In this manner, network surveillance system 100 may be treated as an equivalent set
5 of image or sensed data windows $\mathcal{W} = \{w_1 \dots w_{16K}\}$ where each of the image windows relate to a corresponding view of an area or sensed region. Clearly, a number of image windows will have overlapping views of the area as can readily be seen by inspection of Figure 1. As network surveillance system 100 is providing images in real time, there will be an image window sequence for each image window
10 corresponding to the time series of images provided by the camera. Whilst in this illustrative embodiment, the image window sequence is provided in real time, equally the image window sequence can be based on stored camera or sensor image information which may be recalled and analysed.

15 Referring now to Figure 3, there is shown a flowchart depicting a method for determining the activity topology of network surveillance system 100 or equivalently the set of image windows \mathcal{W} in accordance with a first illustrative embodiment of the present invention. At step 310, from the images of cameras 1 to 16, the set of image windows are formed as depicted in Figure 2. As stated previously, each image
20 window will have an associated image window sequence formed by the time series of the individual images provided by the cameras.

At step 320, for each window w_i over the set of image windows \mathcal{W} , the occupancy of each image window is determined as a function of time t . In this example, assume t
25 runs from 0 to some maximum time T . In this first illustrative embodiment, an occupancy vector $\mathbf{o}_i = (o_{i1}, \dots, o_{iT})$ is formed corresponding to the image sequence of each image window w_i with o_{it} set to 1 if window w_i is occupied at time t , and 0 if not. As would be apparent to those of ordinary skill in the art, if two image windows view exactly the same scene then their corresponding occupancy vectors over time T
30 will be substantially identical.

In this first illustrative embodiment, image window w_i is defined to be occupied when a person's lowest visible extent falls within the boundaries of that window. A person's lowest visible extent may be their point of contact with the ground, or the point at which the lower portion of their body becomes occluded. As a person moves around building 200, as monitored by cameras 1 to 16, their lowest visible extent will move from one camera to another and hence from image window to image window.

As would be apparent to those skilled in the art, an occupancy measure can be defined in a number of different ways depending on the object being tracked through the network and the particular nature of the cameras and sensors that are deployed. Some other examples of determining when an image window is occupied include identifying when the image of a boat or vehicle enters the specified image window, the detection of a sonar or radar response which indicates the presence of an object in a particular location, or the activation of a passive infra-red, light beam, weight, chemical, audio or capacitance sensor.

At step 330, the subset of image windows $\hat{\mathcal{W}}$ that do not have overlapping views is determined based on the process of carrying out pair wise comparisons between occupancy vectors \mathbf{o}_i to determine which windows are excluded or do not overlap. The *exclusive-or* operation $a \oplus b$ of two binary numbers a and b is defined to be 1 if and only if either a or b is 1 and the other is 0. This can be generalised to vector pairs $\mathbf{a} = (a_1, \dots, a_k)'$ and $\mathbf{b} = (b_1, \dots, b_k)'$ by defining the vector exclusive-or operator

$$\mathbf{a} \oplus \mathbf{b} = \max_{i=1}^k a_i \oplus b_i$$

such that the exclusive-or of two vectors \mathbf{a} and \mathbf{b} is equal to 1 if a single pair wise comparison $a_i \oplus b_i$ is 1.

In accordance with the present invention, two windows w_i and w_j will be determined not to overlap or be connected if the exclusive-or $\mathbf{o}_i \oplus \mathbf{o}_j$ of the corresponding occupancy vectors \mathbf{o}_i and \mathbf{o}_j is 1. Thus the subset of non overlapping image windows $\hat{\mathcal{W}}$ can be determined by carrying out pair wise comparisons via the exclusive-or operation. At step 340, the subset of image windows $\hat{\mathcal{W}}$ is then excluded from the set of image windows \mathcal{W} , thereby determining the activity topology.

In this embodiment, new occupancy information is generated with every new frame retrieved from cameras 1 to 16, which may occur as often as 30 times a second. Thus significant batches of occupancy information can be acquired in very short periods of time resulting in information about the activity topology being generated only after a short amount of time. This is in comparison to many prior art methods, especially those based on establishing correlations, which require the processing of large amounts of video in order to determine the activity topology. Accordingly, this method may also be applied in situations where only short segments of video are available. This may be the case, for instance, when a camera is moving from one location to another such as in the case of a pan-tilt-zoom camera.

As would be appreciated by those skilled in the art, the vector exclusive-or comparison requires very little time to calculate even for long vectors. Furthermore, as stated above the occupancy vectors on which it is based do not need to be collected over long periods, but rather only as long as is necessary to eliminate obviously non-overlapping windows. This is thus an extremely efficient means of eliminating image windows which are not connected or do not overlap and hence determining the activity topology of a network of cameras.

Whilst this illustrative embodiment has been directed to image windows, equally the present invention may be directed to any sensed data window which corresponds to a sensed region. In one embodiment, the set of sensed data windows may relate to a set of audio detectors distributed throughout building 200 in a similar manner to the

cameras already depicted (see Figure 1). These audio sensors may produce a sound mapping of a corresponding sensed region comprising one or more sensed data windows or a single sensed data window that effectively also functions as an occupancy measure.

5

In another illustrative embodiment of the present invention, the robustness of the determination of overlap may be improved by introducing a padded occupancy vector \mathbf{p}_i which is designed to take into account the situation depicted in Figure 4, where it is possible due to the orientation of the cameras that overlapping windows from each camera view 410, 420 may simultaneously be occupied and vacant such as w_1 and w_2 . In this example, camera image 410 is assumed to be a front on view to the region of interest whereas the camera image 420 corresponds to a skewed downwards view which introduces a relative distortion in window w_2 when compared to w_1 . Of course a similar effect will occur if two cameras are offset from one another. In this camera setup, the exclusive-or of the corresponding occupancy vectors could indicate that windows w_1 and w_2 do not overlap when in fact they partially overlap.

To address this potential issue, a padded occupancy vector \mathbf{p}_i is defined that includes the immediately surrounding neighbours of a given window w_i . In this manner, \mathbf{p}_i is defined to have element p_{it} set to 1 when window w_i or any of its immediately surrounding neighbours is occupied at time t . In this embodiment, a uni-directional version of the exclusive-or is defined such that $a \ominus b$ is 1 only if a is 1 and b is 0. Similarly, the corresponding vector uni-directional exclusive-or operator for two vectors \mathbf{a} and \mathbf{b} is defined as:

$$\mathbf{a} \ominus \mathbf{b} = \max_{i=1}^k a_i \ominus b_i.$$

Accordingly, in this embodiment the method for determining whether two image windows w_i and w_j overlap is based on calculating $\mathbf{o}_i \ominus \mathbf{p}_j$, i.e. on the basis of the

occupancy vector \mathbf{o}_i and the padded occupancy vector \mathbf{p}_j . As would be apparent to those skilled in the art, use of the padded occupancy vector will accommodate occupancy misalignments in the spatial domain.

- 5 Similarly, to accommodate for potential errors in time synchronisation between two cameras a similar technique can be carried out in the time domain, whereby an element of either an occupancy vector or a padded occupancy vector is set to 1 at a time when the image window or its immediately surrounding neighbours is occupied for a window of time surrounding t . The size of this time window can then
10 be varied according to expected time or synchronisation mismatch between cameras.

The process of padding the occupancy vector through time also allows the activity topology of image windows which do not have views of the same area to be determined. Two image windows which do have views of the same region will
15 observe occupancy at the same times and thus not generate an exclusion. These windows, having observed traffic and not having been excluded, may be said to overlap or be connected. This overlap is measured for a time offset of zero, meaning that the images in which occupancy is measured in both windows were taken at approximately the same time.

20 The process of measuring overlap may be repeated, however, for various time offsets between cameras. This requires that the occupancy statistics for one image window of a pair are delayed by a certain time period. Windows which overlap given a particular time offset indicate the paths that targets take through the fields of view of
25 the cameras. A target moving from a first image window at time $t = 0$ to a second image window at time $t = 1$ will generate corresponding occupancy statistics. These statistics will align, and therefore not generate an exclusion, if the elements of the occupancy vector corresponding to the second image window are moved one time step into the past.

Offsetting the occupancy vector corresponding to second image window in time thus allows the exclusion process to be used to identify the motion of targets from one window to another. Overlap thus indicates a connection between windows which is broader than a physical correspondence between parts of the scene viewed.

5

In this manner, overlap when time offsets are considered will also indicate the paths taken and provide further information for estimating the activity topology of the network of cameras. The connections between windows become less direct as the time offset increases, and this must be taken into account in the estimation process.

10 The process of determining overlap is otherwise unaffected.

The measure $\mathbf{o}_i \ominus \mathbf{p}_j$ is not symmetric so it is possible that $\mathbf{o}_i \ominus \mathbf{p}_j$ does not equal $\mathbf{o}_j \ominus \mathbf{p}_i$, reflecting the conservative nature of this padding process. A response to the asymmetry of the measure might be to require that both $\mathbf{o}_i \ominus \mathbf{p}_j$ and $\mathbf{o}_j \ominus \mathbf{p}_i$ in order

15 to identify the image windows as excluded before a conclusion is drawn. This approach is, however, only suitable for situations in which it is expected that every window over the entire camera network will exhibit the occupancy necessary to calculate exclusion. In most practical camera networks, it is likely that some windows will be in a position whereby they will never be occupied.

20

If it is accepted that a window pair do not overlap if either $\mathbf{o}_i \ominus \mathbf{p}_j$ or $\mathbf{o}_j \ominus \mathbf{p}_i$ identify an exclusion or instance of non-overlap, then every window in the network may be processed. It is still not possible to process every possible pair of image windows, but the overlap of every image window which may be occupied with every other

25 image window in the network may be calculated.

In another illustrative embodiment of the present invention, a probabilistic approach is employed to determine whether a pair of image windows indeed overlap or are connected that is based on a number of measurements or previous data as opposed

30 to a single contradiction. This approach takes into account that there may be an

inherent error rate associated with the occupancy measure or detection process employed in the surveillance system that could potentially result in image window pairs being classified incorrectly as overlapping or unconnected.

- 5 As has been described previously, the observation data will consist of the set of measured occupancies and corresponding exclusion events. For an image window pair that has seen a number of occupancies but few exclusions then it is likely that they do in fact overlap. Similarly, for a pair of image windows where the majority of occupancies have resulted in associated exclusions then it is unlikely that the image
- 10 windows do overlap. In this further embodiment, a hypothesis of image window overlap is tested based on calculating the likelihood ratio.

In accordance with this probabilistic approach, the following events are defined at time t :

- 15
- $A: p_{jt} = 0$
 - $B: o_{it} = 1$
 - V : image windows w_i and w_j overlap
 - \bar{V} : image windows w_i and w_j do not overlap

- 20 As such, events A and B together define a contradiction as stated previously. Initially, the likelihood of a single contradiction is computed, given the binary hypotheses V and \bar{V} , in order to determine the likelihood ratio

$$\frac{\Pr(AB|V)}{\Pr(AB|\bar{V})}$$

First compute the likelihood of a contradiction occurring if the windows overlap.

- 25 This can be written as:

$$\Pr(AB|V) = \Pr(A|BV)\Pr(B|V).$$

Assuming that both camera fields of view are of approximately the same scale, then the image window w_i is completely covered by the neighbourhood of w_j if image windows w_i and w_j overlap. Therefore the probability $\Pr(A|BV)$ will be governed by a tracking error rate (the rate of missed detections of occupancy) which is defined as C . When an occupancy event is missed by the detection process it is still possible that $p_{jt} = 1$ because other detections may have filled the gap.

This eventuality is compensated for by multiplying the tracking error rate C by an estimate of the probability that p_{jt} would be 0 if the detection failed. Therefore the probability is given by

$$\Pr(A|BV) = C \times \frac{\text{count}(\mathbf{p}_j = 0)}{T}$$

where T is the total number of observations (which is the length of \mathbf{p}_j). The other term in the likelihood is then computed as

$$\Pr(B|V) = \frac{\text{count}(\mathbf{o}_i = 1)}{T}$$

To compute $\Pr(AB|\bar{V}) = \Pr(A|B\bar{V})\Pr(B|\bar{V})$ it is first noted that if image windows do not overlap, A and B are independent. Therefore

$$\Pr(A|B\bar{V}) = \Pr(A) = \frac{\text{count}(\mathbf{p}_j = 0)}{T}$$

and, as $\Pr(B|V) = \Pr(B|\bar{V})$, the likelihood ratio will be given by

$$\frac{\Pr(AB|V)}{\Pr(AB|\bar{V})} = \frac{\Pr(A|BV)}{\Pr(A|B\bar{V})} = C$$

Thus, the plausibility of the hypothesis that the image windows in fact overlap is multiplied by C , the tracking error rate (which is expected to be very low), for each contradiction that occurs. This implies that the overall probability of a pair of windows overlapping will be given by C^K , where K is the number of contradictory

observations. This can be calculated by defining operator \odot such that, for two vectors \mathbf{a} and \mathbf{b} of length k , the operator returns K , i.e.

$$\mathbf{a} \odot \mathbf{b} = \sum_{i=1}^k a_i \ominus b_i.$$

- 5 In most general applications, error rates up to 5% can be expected and in these cases, employment of the probabilistic exclusion measure will improve the determination of the activity topology. In cases where the error rate is higher, it may become necessary to observe more traffic before drawing conclusions regarding overlap between pairs of image windows.

10

In a further embodiment, this probabilistic approach to determining the activity topology is extended to deal with data generated over longer periods of time. A modification in notation is employed in order to describe this further embodiment.

- 15 For each image window w_i there is defined to be an associated random variable O_i^t which represents its (a-priori unknown) occupancy at time t . If it is determined that window w_i is occupied at time t then define $O_i^t = 1$, which is represented by the proposition o_i^t . For w_i unoccupied at time t , then $O_i^t = 0$ and this is represented by the proposition \bar{o}_i^t .

20

- A padded version of O_i^t , labelled P_i^t is defined similarly, and the proposition that $P_i^t = 1$ represented as p_i^t . As has been described previously, the measured occupancy of an image window w_i , provides an indication as to the presence or absence of a target within the corresponding sensed region. Typically, this does not relate to a specific target as such but rather a determination that the image window is occupied. In this notation, the presence of a target or the fact that a window is occupied is indicated by the proposition that the random variable $F_i^t = 1$, which is represented as f_i^t .

For each pair of windows w_i and w_j , a random variable V_{ij} is associated, with the proposition that the windows do in fact overlap or are connected represented by setting $V_{ij} = 1$, this in turn being represented by the notation v_{ij} and the alternative
 5 that the windows do not overlap by \bar{v}_{ij} .

Once again to assess the evidence for and against the proposition that a pair of windows overlap a likelihood ratio approach is employed. As described previously, the likelihood ratio has the advantage that it provides a measure of the certainty
 10 which may be ascribed to a pair of contradicting hypotheses such as in this case the propositions that the windows w_i and w_j do, or do not, overlap given the observed data.

In this illustrative embodiment, the likelihood ratio L for the propositions that
 15 windows w_i and w_j do overlap (v_{ij}), and that they don't (\bar{v}_{ij}), is given by

$$L = \frac{\mathcal{P}(x_{ij}^{N/T} | v_{ij})}{\mathcal{P}(x_{ij}^{N/T} | \bar{v}_{ij})}. \quad (1)$$

where N represents the number of exclusions and T represents the number of opportunities and $x_{ij}^{N/T}$ represents the number of exclusions measured and the number of times that an exclusion could have been measured between windows w_i
 20 and w_j , but wasn't.

Both the numerator and denominator in equation (1) may be represented as binomial distributions as they result from the repeated selection between two possibilities (x_{ij} and \bar{x}_{ij}) implying that

$$\begin{aligned} \mathcal{P}(x_{ij}^{N/T} | V_{ij}) &= \binom{N}{T} \mathcal{P}(x_{ij} | V_{ij})^N \mathcal{P}(\bar{x}_{ij} | V_{ij})^{T-N} \\ &= \binom{N}{T} \mathcal{P}(x_{ij} | V_{ij})^N (1 - \mathcal{P}(x_{ij} | V_{ij}))^{T-N}. \end{aligned} \quad (2) \ \& \ (3)$$

Accordingly, determining the probabilities $\mathcal{P}(x_{ij} | v_{ij})$ and $\mathcal{P}(x_{ij} | \bar{v}_{ij})$ are important in interpreting the exclusion results. An exclusion is recorded between windows w_i and w_j when both o_i and \bar{p}_j hold simultaneously. The probability of an exclusion is therefore defined as

$$5 \quad \mathcal{P}(x_{ij}) = \mathcal{P}(o_i \bar{p}_j). \quad (4)$$

If it is assumed that there is no overlap between windows w_i and w_j , then O_i and P_j are independent events and accordingly

$$\mathcal{P}(x_{ij} | \bar{v}_{ij}) = \mathcal{P}(o_i) \mathcal{P}(\bar{p}_j) \quad (5)$$

where $\mathcal{P}(O_i)$ and $\mathcal{P}(P_j)$ are calculated by counting occupancies.

10

If windows w_i and w_j overlap, the random variables O_i and P_j will not be independent but they are conditionally independent given F_i as the only interaction between the two random variables will be through the presence or absence of a target in the sensed region corresponding to image window w_i .

15

If the two windows are within the sensed region of the same camera or detector, it could be possible that the occupancy determination process used to measure O_i and P_j could interact, but this is unlikely and in any case image windows within the same camera would not be compared in practice due to there being more effective
20 methods to determine the relationship between these image window pairs.

The following considers the case in which windows w_i and w_j overlap. The fact that O_i and P_j are conditionally independent given F_i implies that

$$25 \quad \mathcal{P}(x_{ij} | v_{ij}) = \mathcal{P}(o_i | F_i) \mathcal{P}(\bar{p}_j | F_i) \quad (6)$$

25

As there are only two possible values for F_i , these can be dealt with explicitly resulting in the following expression

$$\begin{aligned} \mathcal{P}(x_{ij} | v_{ij}) = & \mathcal{P}(o_i | f_i) \mathcal{P}(\bar{p}_j | f_i) \mathcal{P}(f_i) + \\ & \mathcal{P}(o_i | \bar{f}_i) \mathcal{P}(\bar{p}_j | \bar{f}_i) \mathcal{P}(\bar{f}_i) \end{aligned} \quad (7)$$

The term $\mathcal{P}(o_i | f_i)$ represents the probability with which the occupancy determination process can be expected to correctly identify the presence of a target in the image window w_i (i.e. that the sensed region is actually occupied). This is the true positive rate for the occupancy determination process.

The term $\mathcal{P}(o_i | \bar{f}_i)$ represents the probability with which occupancy will be detected in window w_i when the corresponding sensed region does not contain a target (i.e. the sensed region is not actually occupied). This is the false positive rate for the occupancy determination process.

The probabilities relating the padded occupancy of window w_j to F_i , the presence or absence of a target in the scene volume corresponding to w_i , are somewhat more complex in form. This is due to the fact that although the two windows overlap they do not correspond to the same sensed regions. The fact that windows w_i and w_j overlap, however, implies that if there is a target within the sensed region corresponding to w_i then it must necessarily fall within the domain of p_j . As has been described earlier, ensuring that this is the case is the purpose of the padding process. The overlap of windows w_i and w_j thereby guarantees that

$$\mathcal{P}(p_j | f_i) \geq \mathcal{P}(o_i | f_i) \quad (8)$$

as it is known that there is at least one target present within the domain of p_j .

Equation (8), and the relationship that $\mathcal{P}(p_j) = 1 - \mathcal{P}(\bar{p}_j)$, implies that

$$\mathcal{P}(\bar{p}_j | f_i) \leq \mathcal{P}(\bar{o}_i | f_i). \quad (9)$$

In practice the following expression is used for computation purposes

$$\mathcal{P}(\bar{p}_j | f_i) = \mathcal{P}(\bar{o}_i | f_i) \quad (10)$$

this being the false negative rate. It would also be possible to collect occupancy frequencies by which to more accurately estimate this probability. The false negative rate should, however, be quite small, so any increase in accuracy would be marginal.

5

The set of windows which must be empty in order for \bar{p}_j to hold includes the image window w_j and its neighbours. If this set of n neighbours, defined as \mathcal{N}_j , includes w_j itself then

$$\mathcal{P}(\bar{p}_j | \bar{f}_i) = \prod_{k \in \mathcal{N}_j} [\mathcal{P}(\bar{o}_k | \bar{f}_k) \mathcal{P}(\bar{f}_k | \bar{f}_i) + \mathcal{P}(\bar{o}_k | f_k) \mathcal{P}(f_k | \bar{f}_i)]. \quad (11)$$

10 The condition \bar{f}_i guarantees that there are no targets in an overlapping region and furthermore that $\mathcal{P}(\bar{f}_k | \bar{f}_i) \geq \mathcal{P}(\bar{f}_k)$. So in practice the following relationship is assumed

$$\mathcal{P}(\bar{p}_j | \bar{f}_i) = \mathcal{P}(\bar{o}_k | \bar{f}_k)^n \mathcal{P}(\bar{f}_k)^n \quad (12)$$

where $\mathcal{P}(\bar{o}_k | \bar{f}_k)$ is the true negative rate for the occupancy determination process
15 and n is the size of \mathcal{N}_j , the neighbourhood of w_j , over which p_j is calculated. The factors which make up the second term in the sum in equation 11 are both small in practice as they relate to the product of two small probabilities and hence are significantly smaller than the first term. The second term can thus be ignored for computational purposes.

20

The remaining terms $\mathcal{P}(f_i)$ and $\mathcal{P}(\bar{f}_i)$ from equation (7) then require evaluation.

As

$$\mathcal{P}(o_i) = \mathcal{P}(o_i | f_i) \mathcal{P}(f_i) + \mathcal{P}(o_i | \bar{f}_i) \mathcal{P}(\bar{f}_i) \quad (13)$$

where $\mathcal{P}(o_i | f_i)$ and $\mathcal{P}(o_i | \bar{f}_i)$ are the (known) true and false positive rates of the
25 occupancy determination process and $\mathcal{P}(o_i)$ can be measured by counting. Given that $\mathcal{P}(\bar{f}_i) = 1 - \mathcal{P}(f_i)$ this relationship can then be substituted into equation (13) in order to determine $\mathcal{P}(f_i)$ and then $\mathcal{P}(\bar{f}_i)$.

Accordingly, in this illustrative embodiment a further refined estimate for the likelihood ratio L may be determined which provides a more accurate measure of how likely it is that two image windows overlap based on the following measured data:

- a count of the number of times each image window has been occupied;
- a count of the number of times each image window pair has been excluded;
- a count of the number of times each image window pair could possibly have been excluded;
- the true and false positive rate for occupancy detection; and
- the true and false negative rate for occupancy detection.

The approach exploits all the available occupancy information in identifying or eliminating the possibility of overlap or connectivity between image windows. This is accomplished by accurately modelling the factors involved in order to reach a conclusion that is well supported by the available evidence.

The calculation and incorporation of the likelihood ratio based on historical data takes into account detection errors in determining either occupancy or non-occupancy of an image window at a given time by expressing a confidence level in the proposition that each pair of image windows do (or don't) indeed overlap. This confidence level may then be compared to a threshold value when determining whether to accept or reject a determined exclusion or overlap.

As would be appreciated by those skilled in the art, this approach can further improve the efficacy of estimating the activity topology of a set of image windows, especially in those systems where there is expected to be a significant error rate in the occupancy determination process.

Referring once again to Figure 1, it can be seen that often cameras in a surveillance network such as network surveillance system 100 form natural clusters or zones. For example, in network surveillance system 100 building 200 can be seen to contain one or more cameras in each office, cameras monitoring corridors and public spaces, and cameras monitoring the building exterior. This grouping suggests a decomposition of the topology acquisition and tracking problem into a number of surveillance zones for this site. As an illustrative example, each room may be determined to be a zone with a number of overlapping cameras, as may a corridor, the set of cameras monitoring the lobby, and so on.

10

A zone will typically be defined by the feature that cameras within a zone have high transition frequency, and that transitions can take place in many ways, whereas transitions between zones are more tightly constrained. For example, as illustrated in Figure 1, the only transition between an outdoor zone (e.g. cameras 1, 2 and 14) and a lobby zone (e.g. cameras 15, 13, 12, 11 and 16) may be through the front door of the building. Thus determining whether a given camera or image window is within a zone will greatly simplify the subsequent network tracking problem based on the activity topology for the network of cameras. This can be especially important where a malfunctioning camera is replaced or a new camera is added to the network.

20

In another illustrative embodiment of the present invention, this grouping of cameras or corresponding image windows into zones and performing pair wise comparisons with respect to the zones is provided. Advantageously, the form of the occupancy vectors allows them to be merged using a logical *or* operator allowing in one application a combined occupancy vector to be formed for a subset of image windows corresponding to a zone. The merged occupancy vector \mathbf{m} is defined for a set of vectors $\{\mathbf{a}_1 \dots \mathbf{a}_n\}$ as

25

$$\mathbf{m}(\{\mathbf{a}_1 \dots \mathbf{a}_n\}) = \left[\bigcup_{i=1}^n \mathbf{a}_i \right]_{t=1..T}$$

Merging a set of occupancy vectors in this manner, results in a new vector that represents the total occupancy of all the image windows that correspond to the individual occupancy vectors. It is important to note that a merged occupancy vector of this type cannot be used for the same purposes as an occupancy vector

5 representing a single image window. This is because a 1 in a merged occupancy vector does not imply occupancy of the entirety of the corresponding combined image window area. As an example of this, it is expected that the result of $\mathbf{m}(\{\mathbf{a}_1 \dots \mathbf{a}_n\}) \ominus \mathbf{a}_1$ can be 1. However, the result of $\mathbf{a}_1 \ominus \mathbf{m}(\{\mathbf{a}_1 \dots \mathbf{a}_n\})$ will always be 0.

10 Thus the merged occupancy vectors may be used as the second operand to the \ominus operator when performing a pair wise comparison. The merged occupancy vectors may be based on the standard occupancy vector \mathbf{o}_i or preferably on the padded occupancy vector \mathbf{p}_i corresponding to w_i where appropriate, such as where the situation illustrated in Figure 4 arises. Accordingly, the overlap of a window w_i with

15 the subset of image windows $\{w_1 \dots w_n\}$ which may form a zone, can then be determined by calculating $\mathbf{o}_i \ominus \mathbf{m}(\{\mathbf{p}_1 \dots \mathbf{p}_n\})$.

This process may readily be expressed as pseudo-code in the following manner:

```

20 OverlappingWindowSet = function HierarchicalOverlap(  $w$  ,  $S$  )
    %  $w$  is a window within the added camera
    %  $S = \{w_1, \dots, w_n\}$  is a set of windows (e.g zone) already existing within the system
    set  $\mathbf{o}$  to be the occupancy vector for the window  $w$ 

25 % first the case in which there is a single window  $w_1$  in  $S$ 
    if  $n = 1$  then
        set  $\mathbf{p}$  to be the padded occupancy vector for the window  $w_1$ 
        if not excluded( $\mathbf{o}$  ,  $\mathbf{p}$ ) then
            OverlappingWindowSet =  $\{w_1\}$ 

```

```

    endif
endif

% and recurse in the case where S contains more than one window
5  OverlappingWindowSet = { }
   set  $m = n/3$ 
   while S not empty
       set  $S_m$  to be the first  $m$  elements of S
       set  $\mathbf{m}$  to be the union of the padded occupancy vectors for  $S_m$ 
10  if not excluded( $\mathbf{o}$ ,  $\mathbf{m}$ ) then
       OverlappingWindowSet = OverlappingWindowSet + HierarchicalOverlap( $w$ ,  $S_m$ )
   endif
       set  $S = S - S_m$ 
   endwhile
15  return

```

By merging padded occupancy vectors within zones, this allows a hierarchical approach to be taken when adding new cameras or sensors to the activity topology. Existing cameras can be grouped arbitrarily, or by some criterion such as

20 connectivity, and the corresponding occupancy vectors combined using the *or* process as described above. Each new camera can then be tested for exclusion against these groups by comparing its occupancy vector with that of the group. This allows the activity topology relating the camera to each one of the groups to be established. In the case where an activity topology relationship is detected, it may be further

25 specified by hierarchically dividing the group into sub-groups and testing for exclusion with each. This process can be continued until a set of individual cameras is identified as overlapping with the newly added camera.

The present method has been tested on both simulated data and applied to actual

30 camera data. In one application, synthetic data was generated so as to simulate a network of 50 cameras whose positions and orientations were randomly generated.

Additionally, the path of pedestrians or "targets" were randomly generated by an auto-regression process, thereby providing occupancy data. The important measure of the pedestrian activity in the network is the number of frames exhibiting occupancy.

5

In the testing that was carried out, 1,000 frames were generated for each camera with 1,255 window occupancies identified across the network over this period. The camera image corresponding to the field of view of each camera was divided into 100 image windows, giving a total of 5,000 image windows for the synthetic camera network. The testing carried out consisted of calculating the value of $\mathbf{o}_i \ominus \mathbf{p}_j$ for every pair of image windows w_i and w_j . These calculations were carried out progressively at every 100 frames. This corresponded to less than 4 seconds of video at 30 frames per second, or 20 seconds of video at 5 frames per second. Over each interval the number of occupied windows was calculated, along with the number of

10
15
exclusions.

Referring now to Figure 5, there is shown a graph of the number of exclusions determined versus the number of occupied windows for calculations made every 100 frames. The total number of exclusions for the simulated network is approximately

20
 2.5×10^7 . It can be seen that information about the activity topology of the network is gained very quickly with the rate of information gain slowing somewhat over time. These results were also checked by an algebraic analysis of overlap and it was found that each of the measured exclusions was in agreement with its analytic equivalent and none were found to be in error.

25

The method in accordance with the present invention was also applied to a network surveillance system including 4 partially overlapping cameras with 84 seconds of video recorded from each of the cameras. In this embodiment, each camera image was divided into 255 image windows, and 1,471 window occupancies were

measured. The total number of windows for the network was 1,125, but only 156 of these were ever occupied over the course of the 84 seconds.

Once again the value of $\mathbf{o}_i \ominus \mathbf{p}_j$ for every pair of image windows w_i and w_j was
5 calculated yielding a total of 252,105 exclusions that were calculated. The total
number of pairs of windows was 1,265,625, but as the majority of the windows did
not see traffic in this embodiment the number of exclusions would not be expected to
approach this number. A sample of 20 randomly selected image windows was also
manually checked to determine excluded areas and did not uncover any errors when
10 compared to the calculated exclusions.

A brief consideration of the above described embodiments will indicate that the
present invention provides an extremely effective approach to determining the
activity topology for a set of sensed data windows which begins by assuming that all
15 sensed data windows are potentially linked and then successively seeks to eliminate
impossible connections rather than the slower process of building up positive
evidence of activity. This is an easier decision to make, especially when a limited
amount of data is available.

20 The present invention is also based on the realisation that it is impossible to prove a
positive connection between cameras or sensors, as any correlation of events could be
due to coincidence, whereas it is possible to prove a negative connection or non
overlap by observing an object in one camera while not observing it at all in another.
Over time, the true patterns of motion emerge as those which are not contradicted by
25 the evidence. These patterns may then be used to initialise a finer level search using
other approaches if required. Furthermore, the method does not rely on the accurate
tracking of objects within each camera or sensor view. As such, this approach is
readily scalable and furthermore is not reliant on accurate information related to the
positioning, orientation and setup of individual cameras and/or sensors in the
30 network.

It will be understood that the term "comprise" and any of its derivatives (eg. comprises, comprising) as used in this specification is to be taken to be inclusive of features to which it refers, and is not meant to exclude the presence of any additional
5 features unless otherwise stated or implied.

Those of skill in the art would appreciate that the various illustrative logical blocks, modules, circuits, and algorithm steps described in connection with the embodiments disclosed herein may be implemented as electronic hardware,
10 computer software, or combinations of both. To clearly illustrate this interchangeability of hardware and software, various illustrative components, blocks, modules, circuits, and steps have been described above generally in terms of their functionality. Whether such functionality is implemented as hardware or software depends upon the particular application and design constraints imposed on
15 the overall system. Skilled artisans may implement the described functionality in varying ways for each particular application, but such implementation decisions should not be interpreted as causing a departure from the scope of the present invention.

20 Furthermore, those of skill in the art would understand that information and signals may be represented using any of a variety of different technologies and techniques. For example, data, instructions, commands, information, signals, bits, symbols, and chips that may be referenced throughout the above description may be represented by voltages, currents, electromagnetic waves, magnetic fields or particles, optical
25 fields or particles, or any combination thereof.

Although a number of embodiments of the method and system of the present invention have been described in the foregoing detailed description, it will be understood that the invention is not limited to the embodiment disclosed, but is
30 capable of numerous rearrangements, modifications and substitutions without

departing from the scope of the invention as set forth and defined by the following claims.

CLAIMS

1. An automated method for estimating an activity topology of a set of sensed data windows in a networked system of sensors, each of the sensed data windows related to a corresponding sensed region associated with a given sensor, the method including the steps:
 - 5 determining a subset of sensed data windows having corresponding sensed regions that are not connected by comparing sensed data windows pair wise from the set of sensed data windows; and
excluding the subset of sensed data windows that are not connected from the set of sensed data windows, thereby eliminating these pairs of sensed data windows from the networked system of sensors and determining the activity topology.
- 10 2. The method of claim 1, wherein the step of comparing sensed data windows pair wise includes determining whether a pair of sensed data windows does not have overlapping sensed regions.
3. The method of claim 2, wherein the step of determining whether the pair of sensed data windows does not have overlapping sensed regions includes determining a first occupancy measure for a first sensed data window and a second occupancy measure for a second sensed data window, the first
15 and second sensed data windows comprising the pair of sensed data windows, and comparing the first and second occupancy measures.
4. The method of claim 3, wherein the step of comparing the first and second occupancy measures includes forming an occupancy vector corresponding to a first sensed data window sequence associated with the first sensed data window and a second occupancy vector corresponding to a second sensed data
20 window sequence associated with the second sensed data window and comparing corresponding elements of the first and second occupancy vectors.
5. The method of claim 4, wherein the step of comparing corresponding elements of the first and second occupancy vectors includes performing a vector exclusive-or operation on the first and second occupancy vectors to determine that the associated first and second sensed data windows do not overlap.
- 25 6. The method of claim 4, wherein the second occupancy vector that corresponds to the second sensed data window sequence is based on the second sensed data window and its nearest neighbouring sensed data windows thereby forming a padded occupancy vector.
7. The method of claim 6, wherein the step of comparing corresponding elements of the first and second occupancy vectors includes performing a vector exclusive-or operation on the first occupancy

vector and the padded occupancy vector to determine that the associated first and second sensed data windows do not overlap.

8. The method of claim 6, wherein the step of comparing corresponding elements of the first and second occupancy vectors includes performing a vector uni-directional exclusive-or operation on the first occupancy vector and the padded occupancy vector to determine that the associated first and second sensed data windows do not overlap.

9. The method of any one of claims 4 to 8, wherein the step of comparing corresponding elements of the first and second occupancy vectors includes comparing over neighbouring elements of one or both of the first and second occupancy vectors.

10. The method of any one of claims 2 to 9, wherein the step of determining whether the pair of sensed data windows does not have overlapping sensed regions includes taking into account a likelihood of a false indication that a pair of sensed data windows do overlap.

11. The method of claim 10, wherein the step of taking into account the likelihood of a false indication that the pair of sensed data windows do overlap is based on previous data associated with the pair of sensed data windows.

12. The method of claim 10 or 11, wherein the step of taking into account the likelihood of a false indication that the pair of sensed data windows do overlap includes taking into account an error rate of a sensor or sensors associated with the pair of sensed data windows.

13. The method of any one of claims 4 to 12, wherein the sensed data window is an image window.

14. The method of claim 13, wherein the image window is provided by a camera in a network surveillance system.

15. The method of any one of claims 1 to 14, further including the step of determining a further subset of sensor data windows that are connected.

16. A network surveillance system including:
a network of sensors, each sensor providing one or more sensed data windows each corresponding to a sensed region and forming in total a set of sensed data windows; and

data processing means to determine a subset of sensed data windows having corresponding sensed regions that are not connected by comparing sensed data windows pair wise from the set of sensed data windows and exclude the subset of sensed data windows from the set of sensed data windows, thereby eliminating these pairs of sensed data windows from the network surveillance system and determining an activity topology of a set of sensed data windows.

17. The network surveillance system of claim 16, wherein determining the subset of sensed data windows that are not connected includes comparing sensed data windows pair wise from the set of sensed data windows.

18. The network surveillance system of claim 17, wherein comparing sensed data windows pair wise includes determining whether a pair of sensed data windows does not have overlapping sensed regions.

19. The network surveillance system of claim 18, wherein determining whether the pair of sensed data windows does not have overlapping sensed regions includes determining a first occupancy measure for a first sensed data window and a second occupancy measure for a second sensed data window, the first and second sensed data windows comprising the pair of sensed data windows, and comparing the first and second occupancy measures.

20. The network surveillance system of claim 18, wherein determining whether a pair of sensed data windows does not have overlapping sensed regions includes taking into account the likelihood of a false indication that a pair of sensed data windows do overlap.

21. The network surveillance system of claim 20, wherein taking into account the likelihood of a false indication that a pair of sensed data windows do overlap is based on previous data associated with the pair of sensed data windows.

22. The network surveillance system of claim 20, wherein the step of taking into account the likelihood of a false indication that a pair of sensed data windows do overlap includes taking into account an error rate of a sensor or sensors associated with the pair of sensed data windows.

23. The network surveillance system of claim 21, wherein the step of taking into account the likelihood of a false indication that a pair of sensed data windows do overlap includes taking into account an error rate of a sensor or sensors associated with the pair of sensed data windows.

24. The network surveillance system of any one of claims 16 to 23, wherein the network of sensors includes cameras, and wherein the sensed data window is an image window.
25. The network surveillance system of any one of claims 16 to 24, wherein the data processor is operable to determine a further subset of sensor data windows that are connected.
- 5 26. A computer readable memory having recorded thereon statements and instructions for execution by a computer, said statements and instructions for estimating an activity topology of a set of sensed data windows in a networked system of sensors, each of the sensed data windows related to a corresponding sensed region associated with a given sensor, the statements and instructions comprising:
- 10 code means for determining a subset of sensed data windows having corresponding sensed regions that are not connected by comparing sensed data windows pair wise from the set of sensed data windows; and
- code means for excluding the subset of sensed data windows from the set of sensed data windows thereby eliminating these pairs of sensed data windows from the networked system of sensors and determining the activity topology.

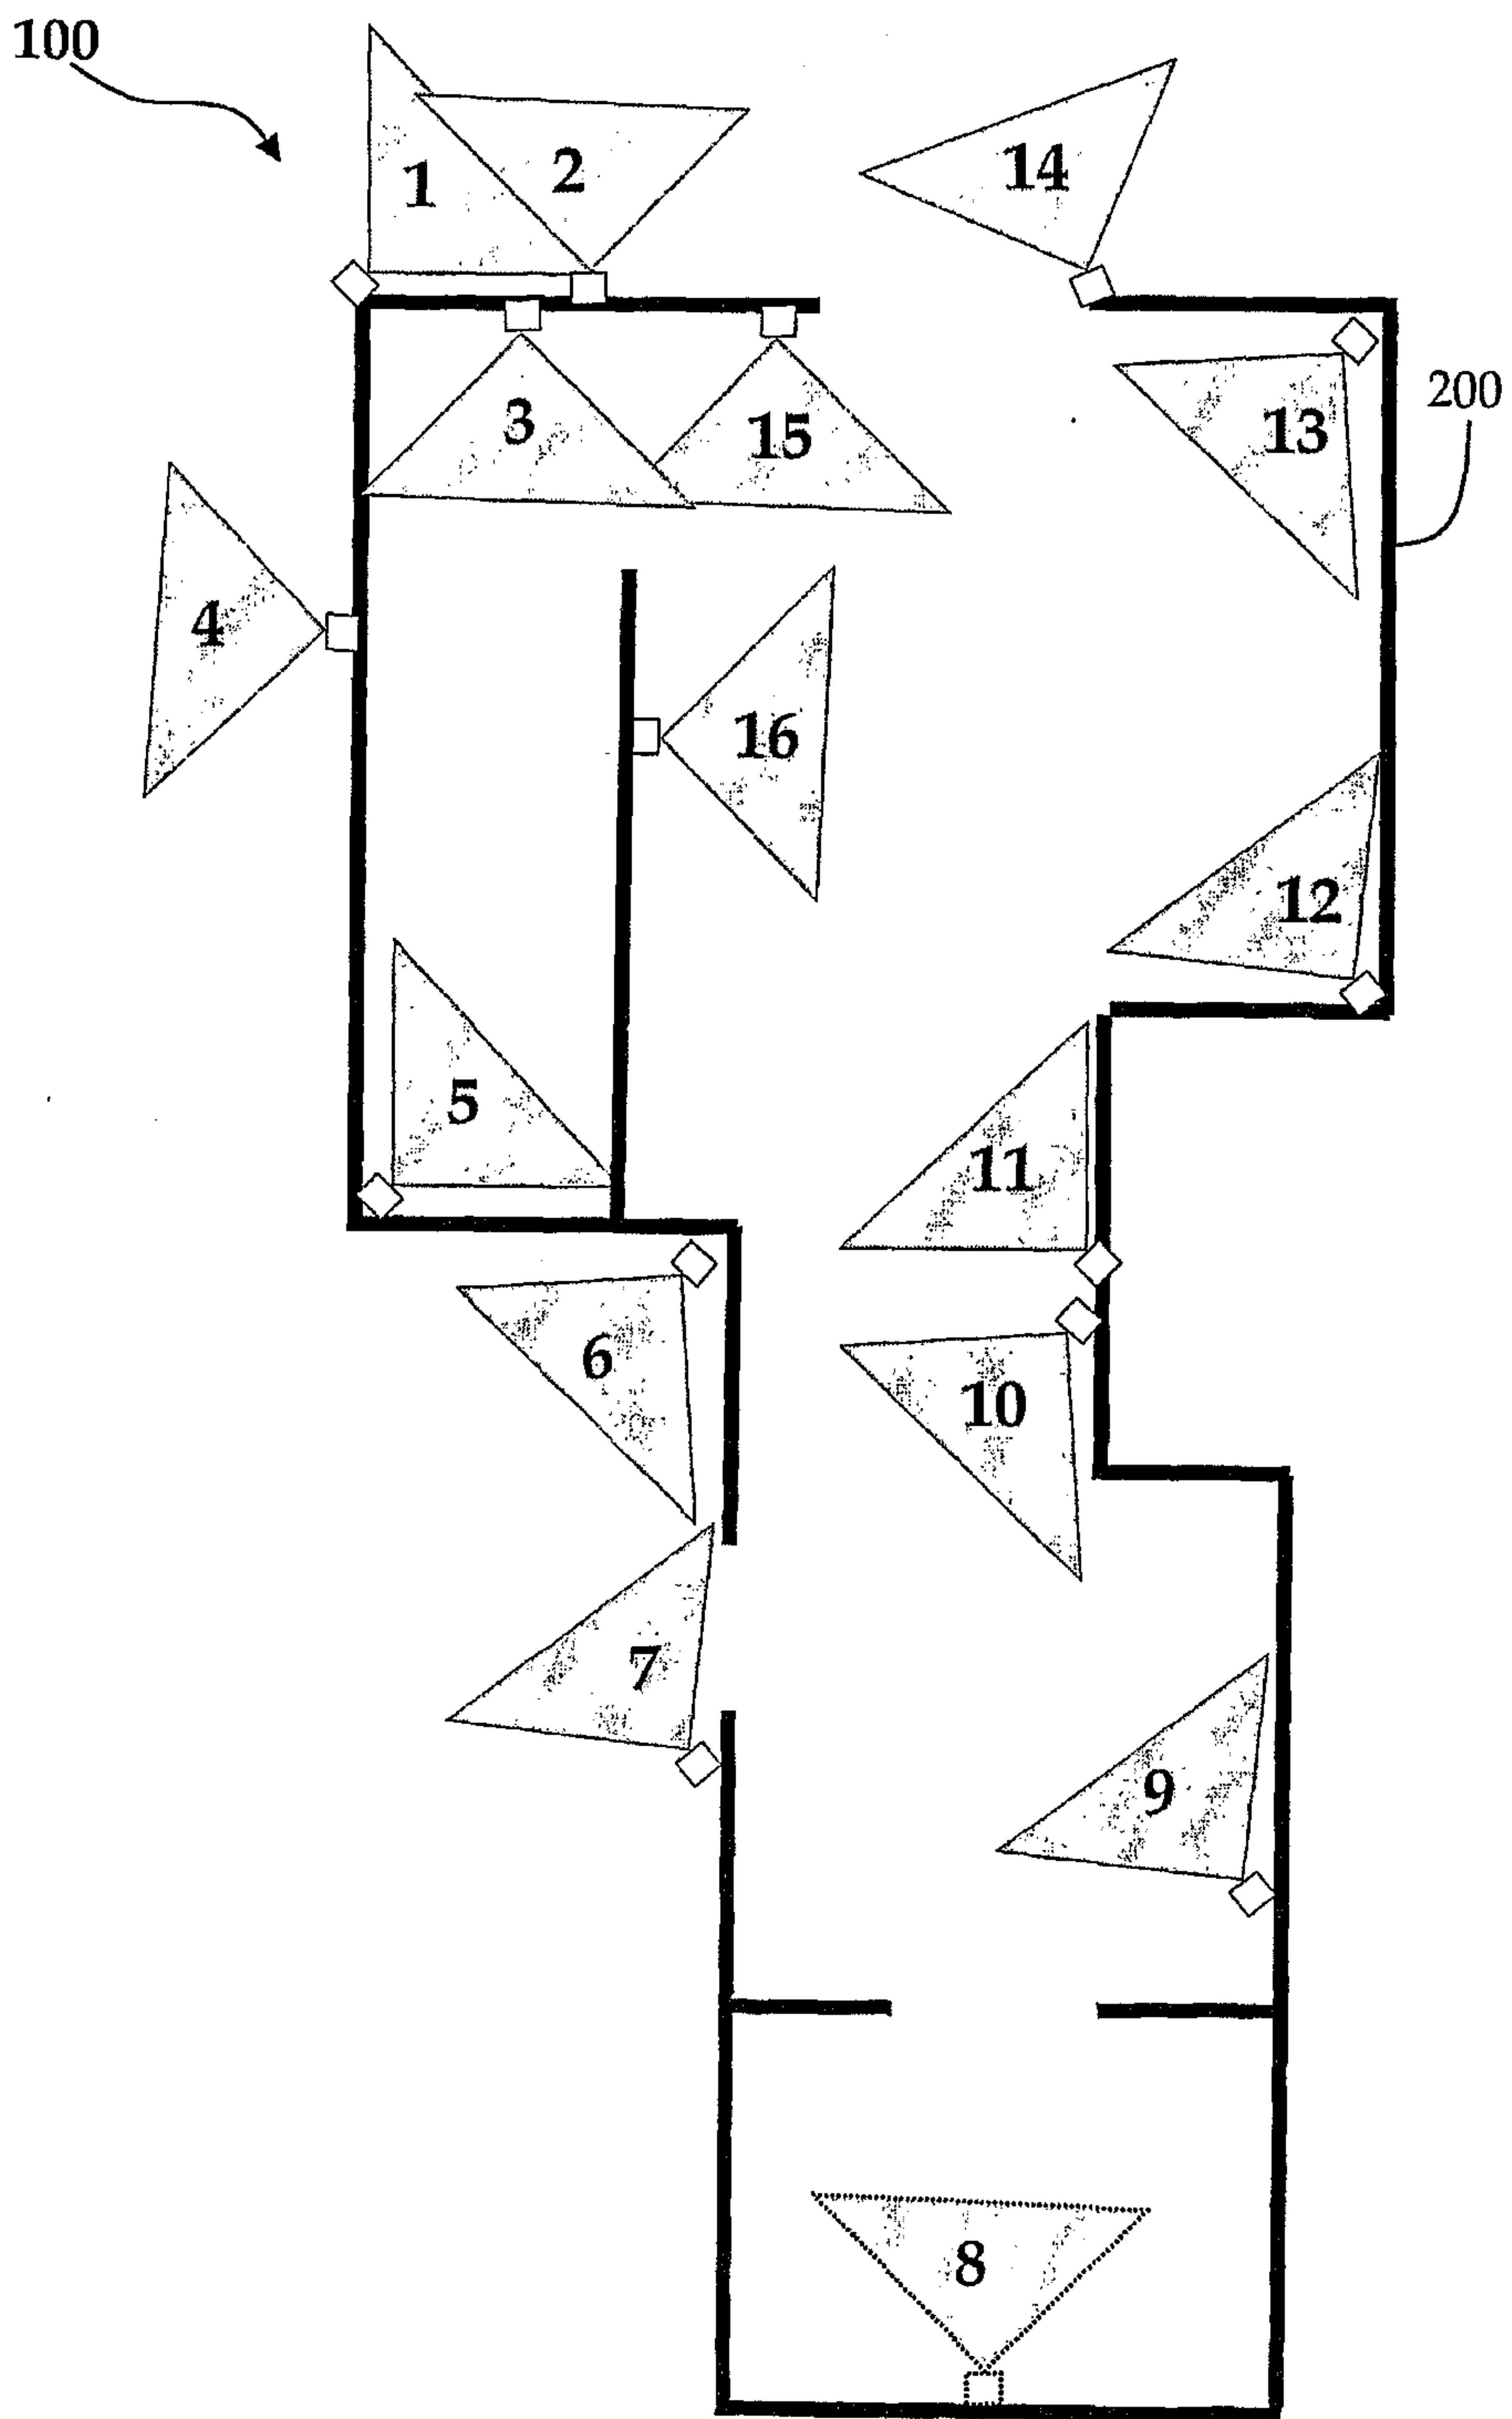


Figure 1

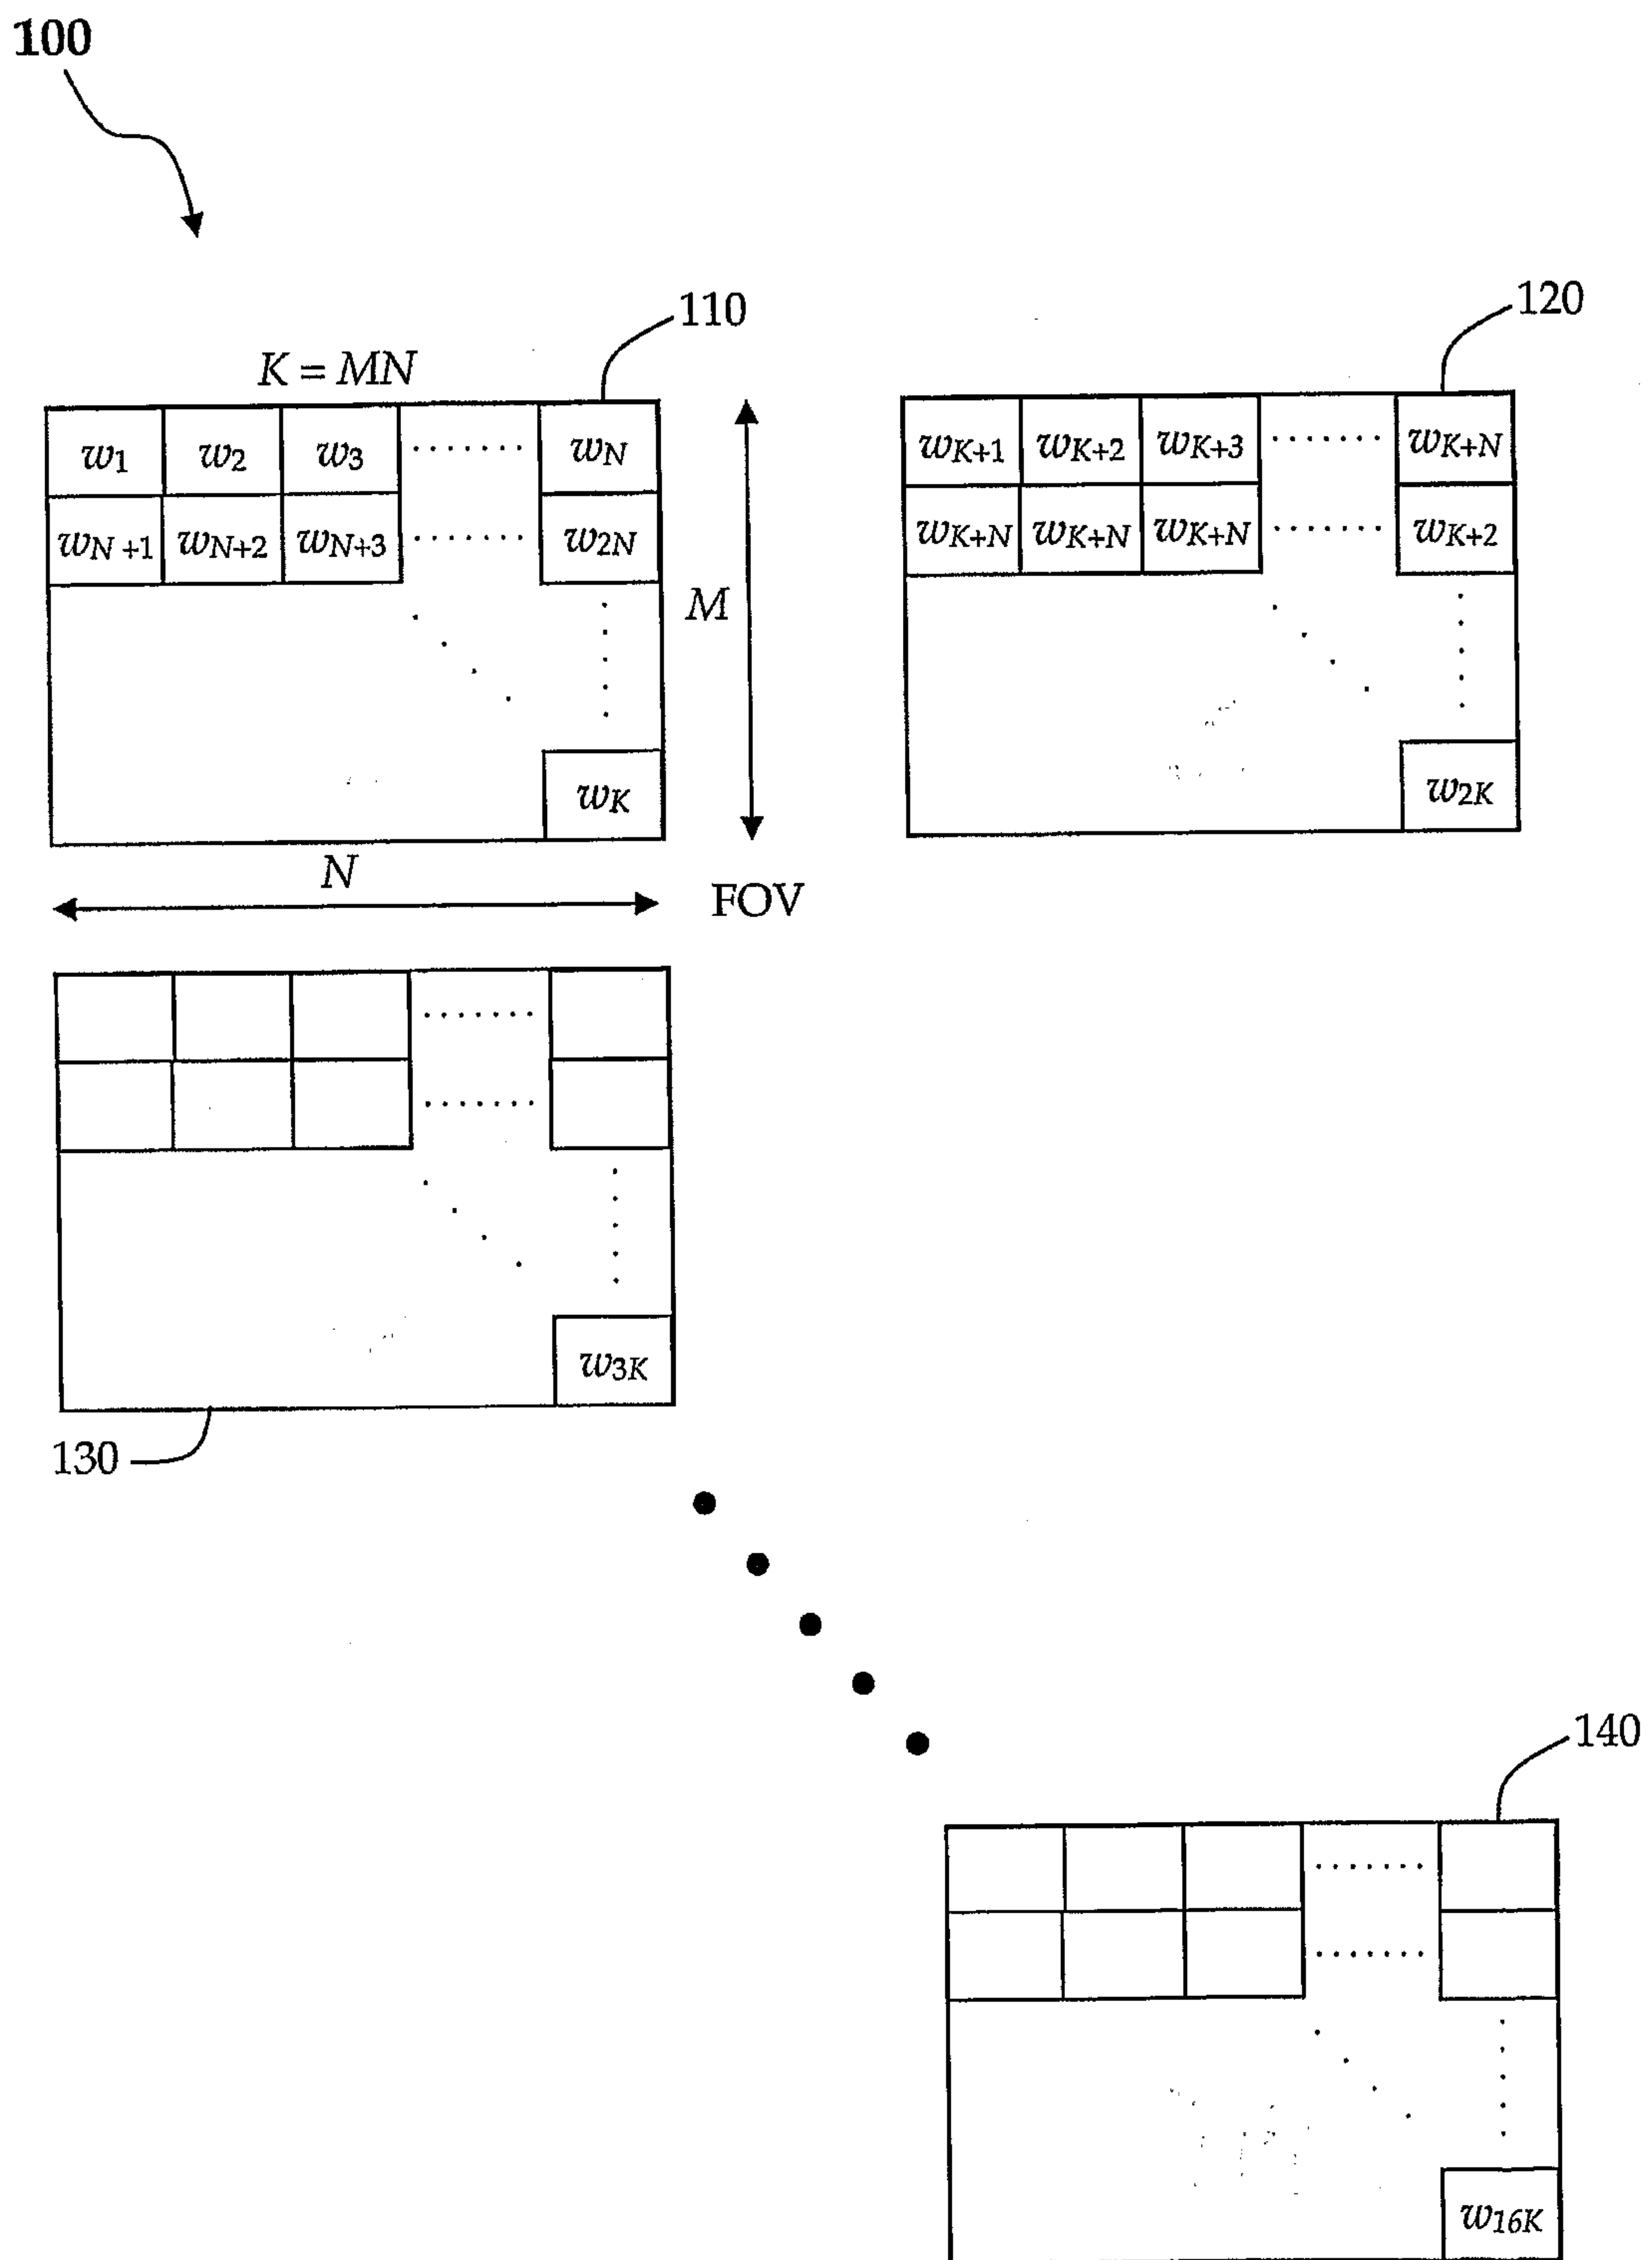
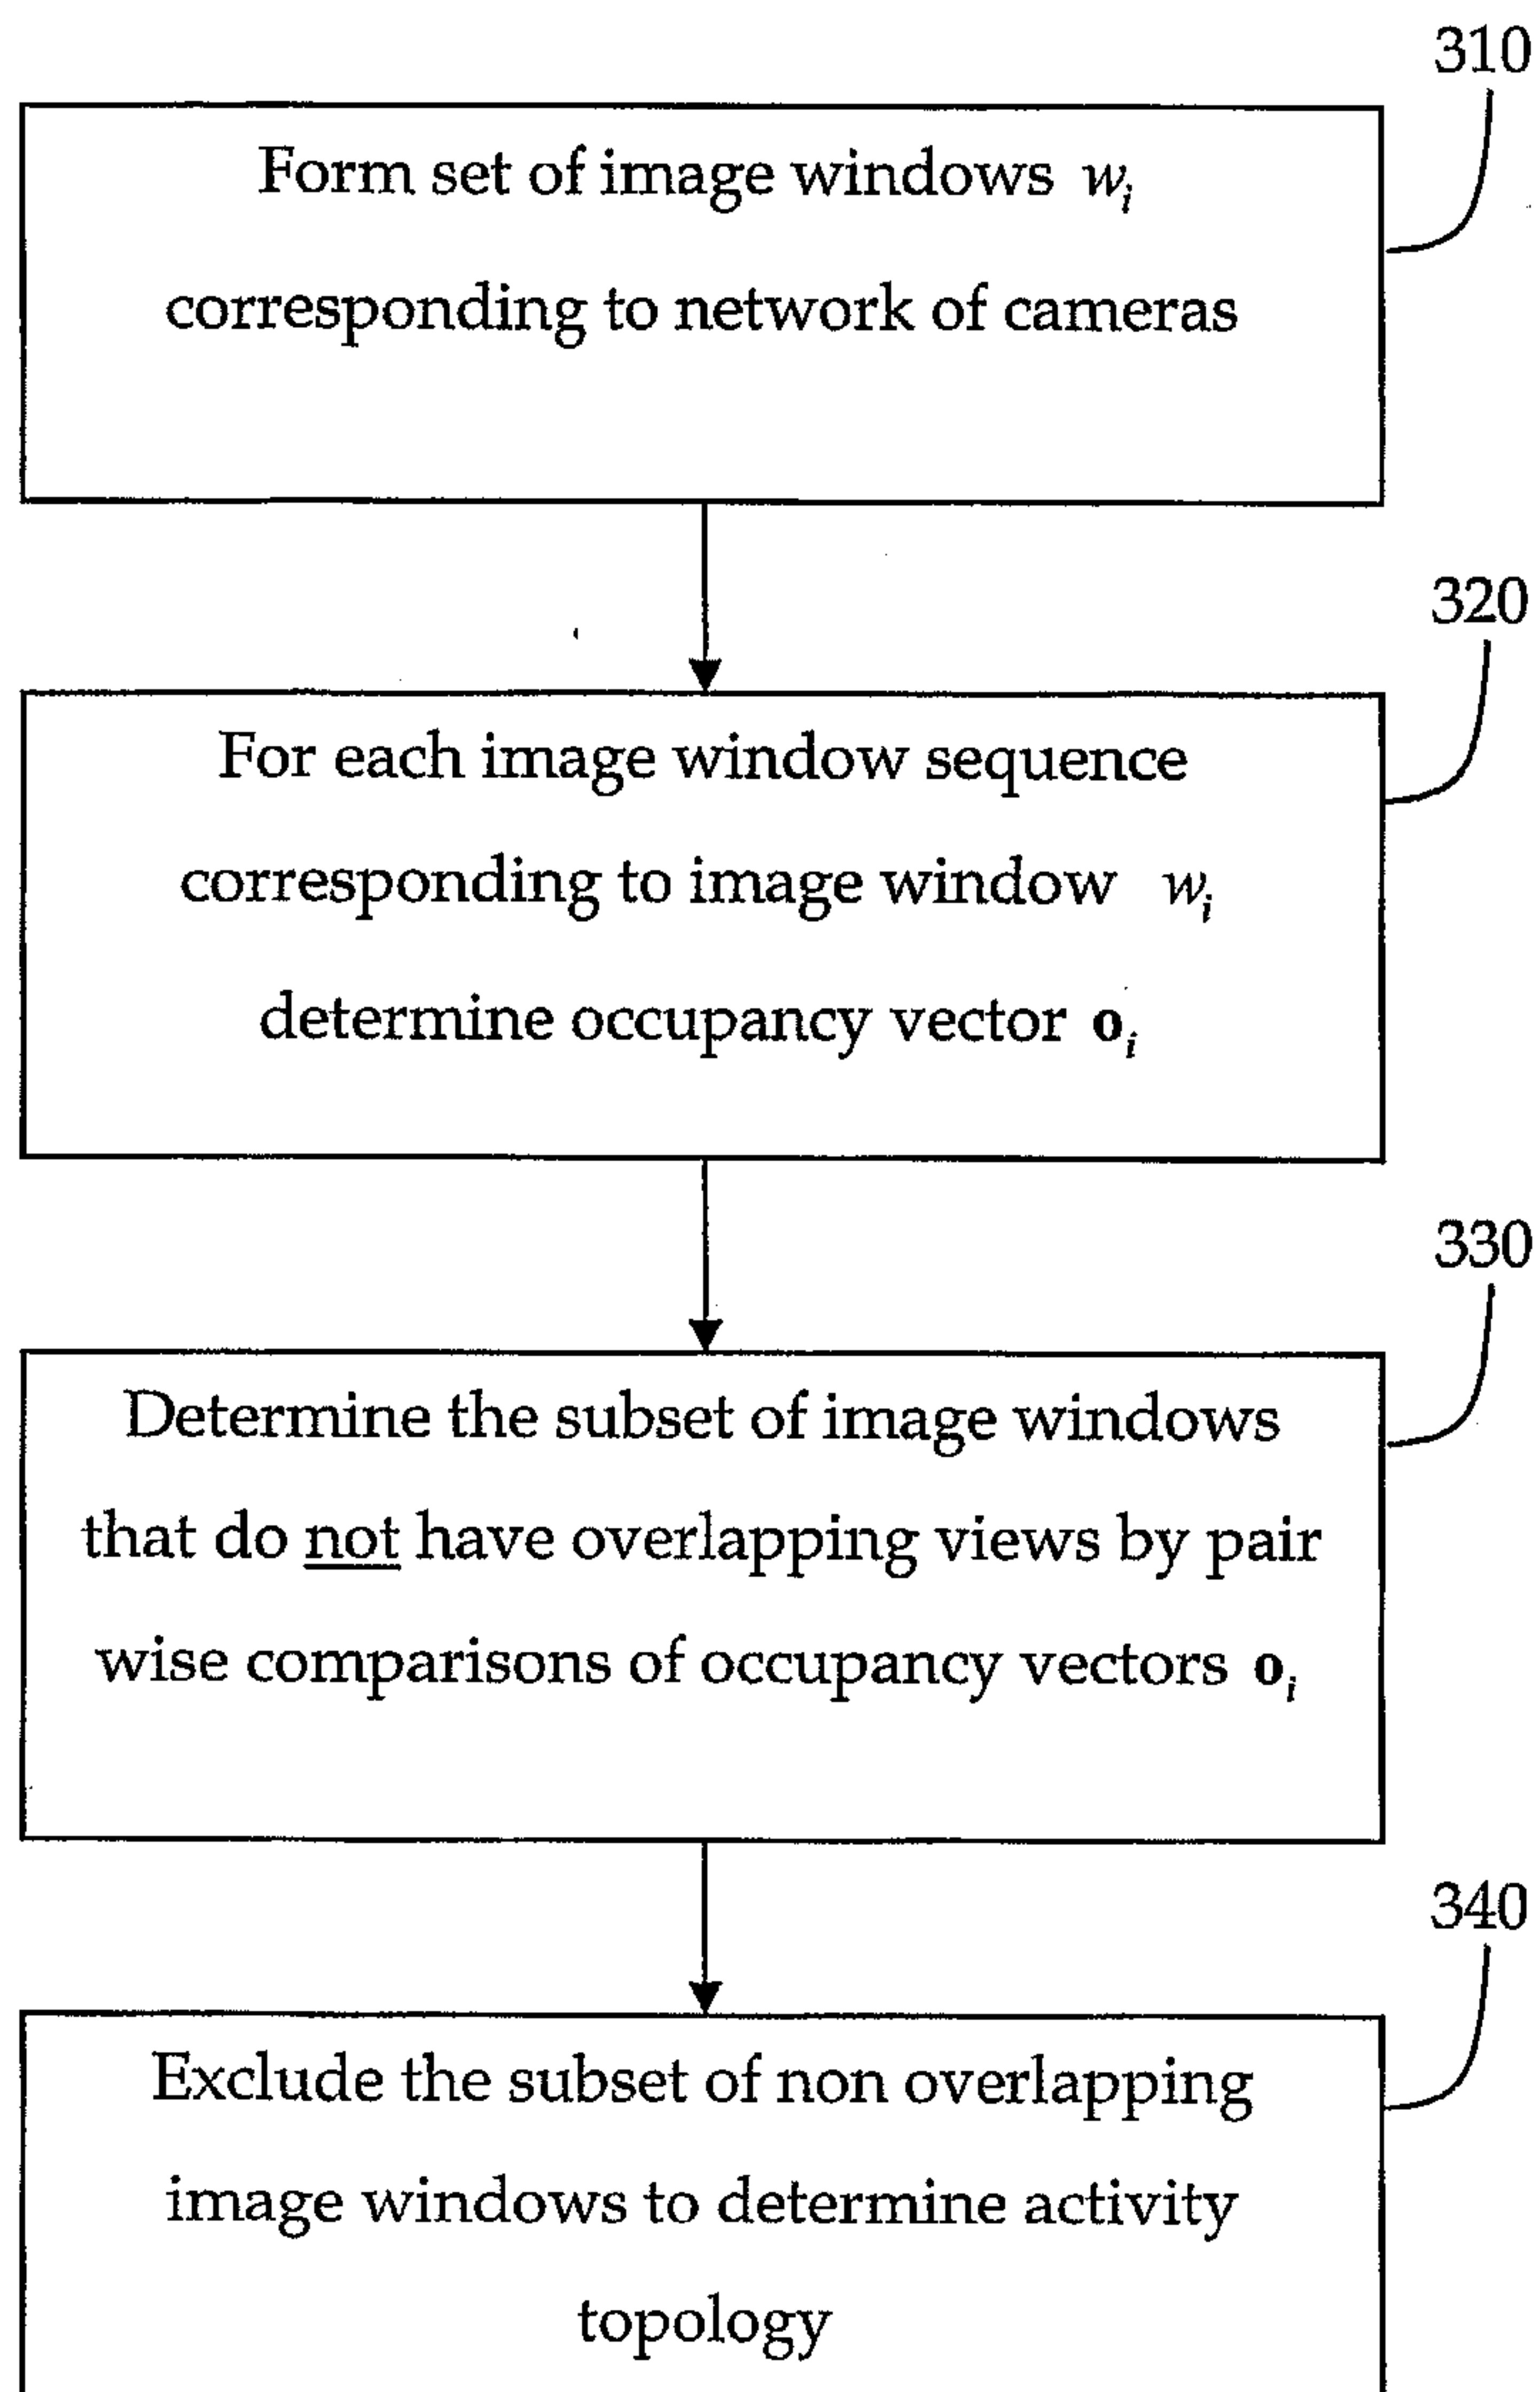


Figure 2

**Figure 3**

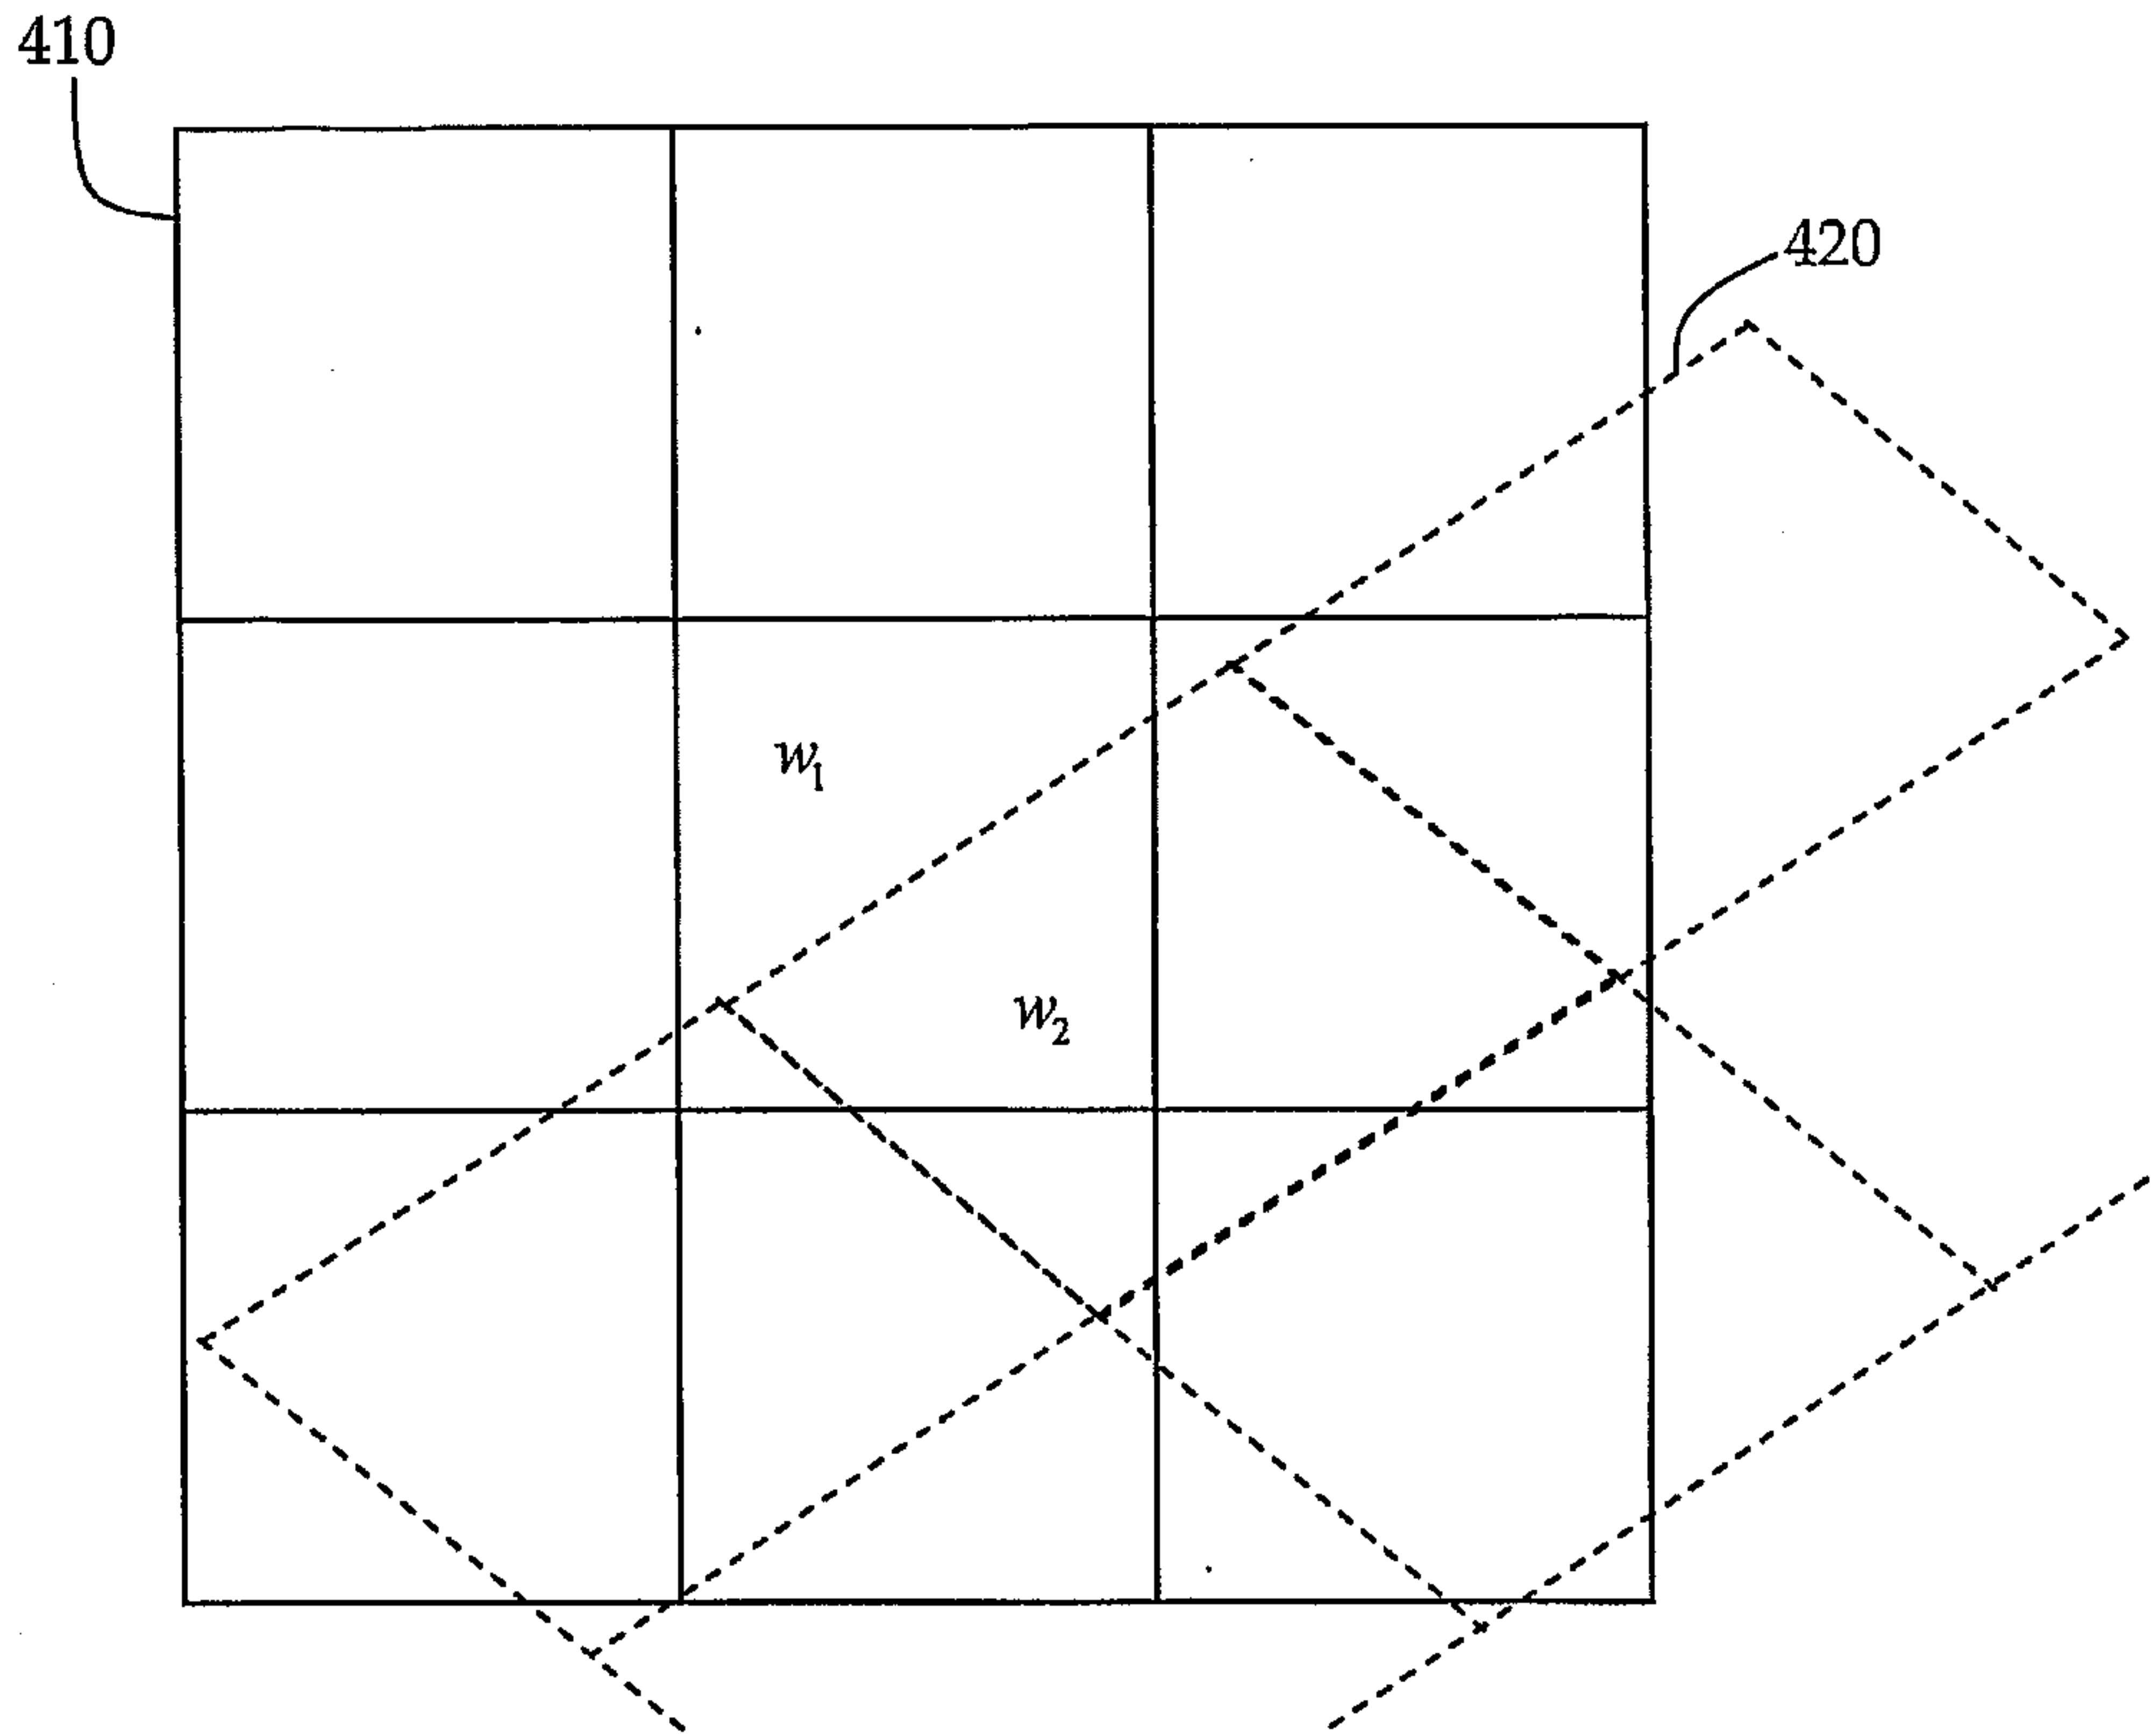


Figure 4

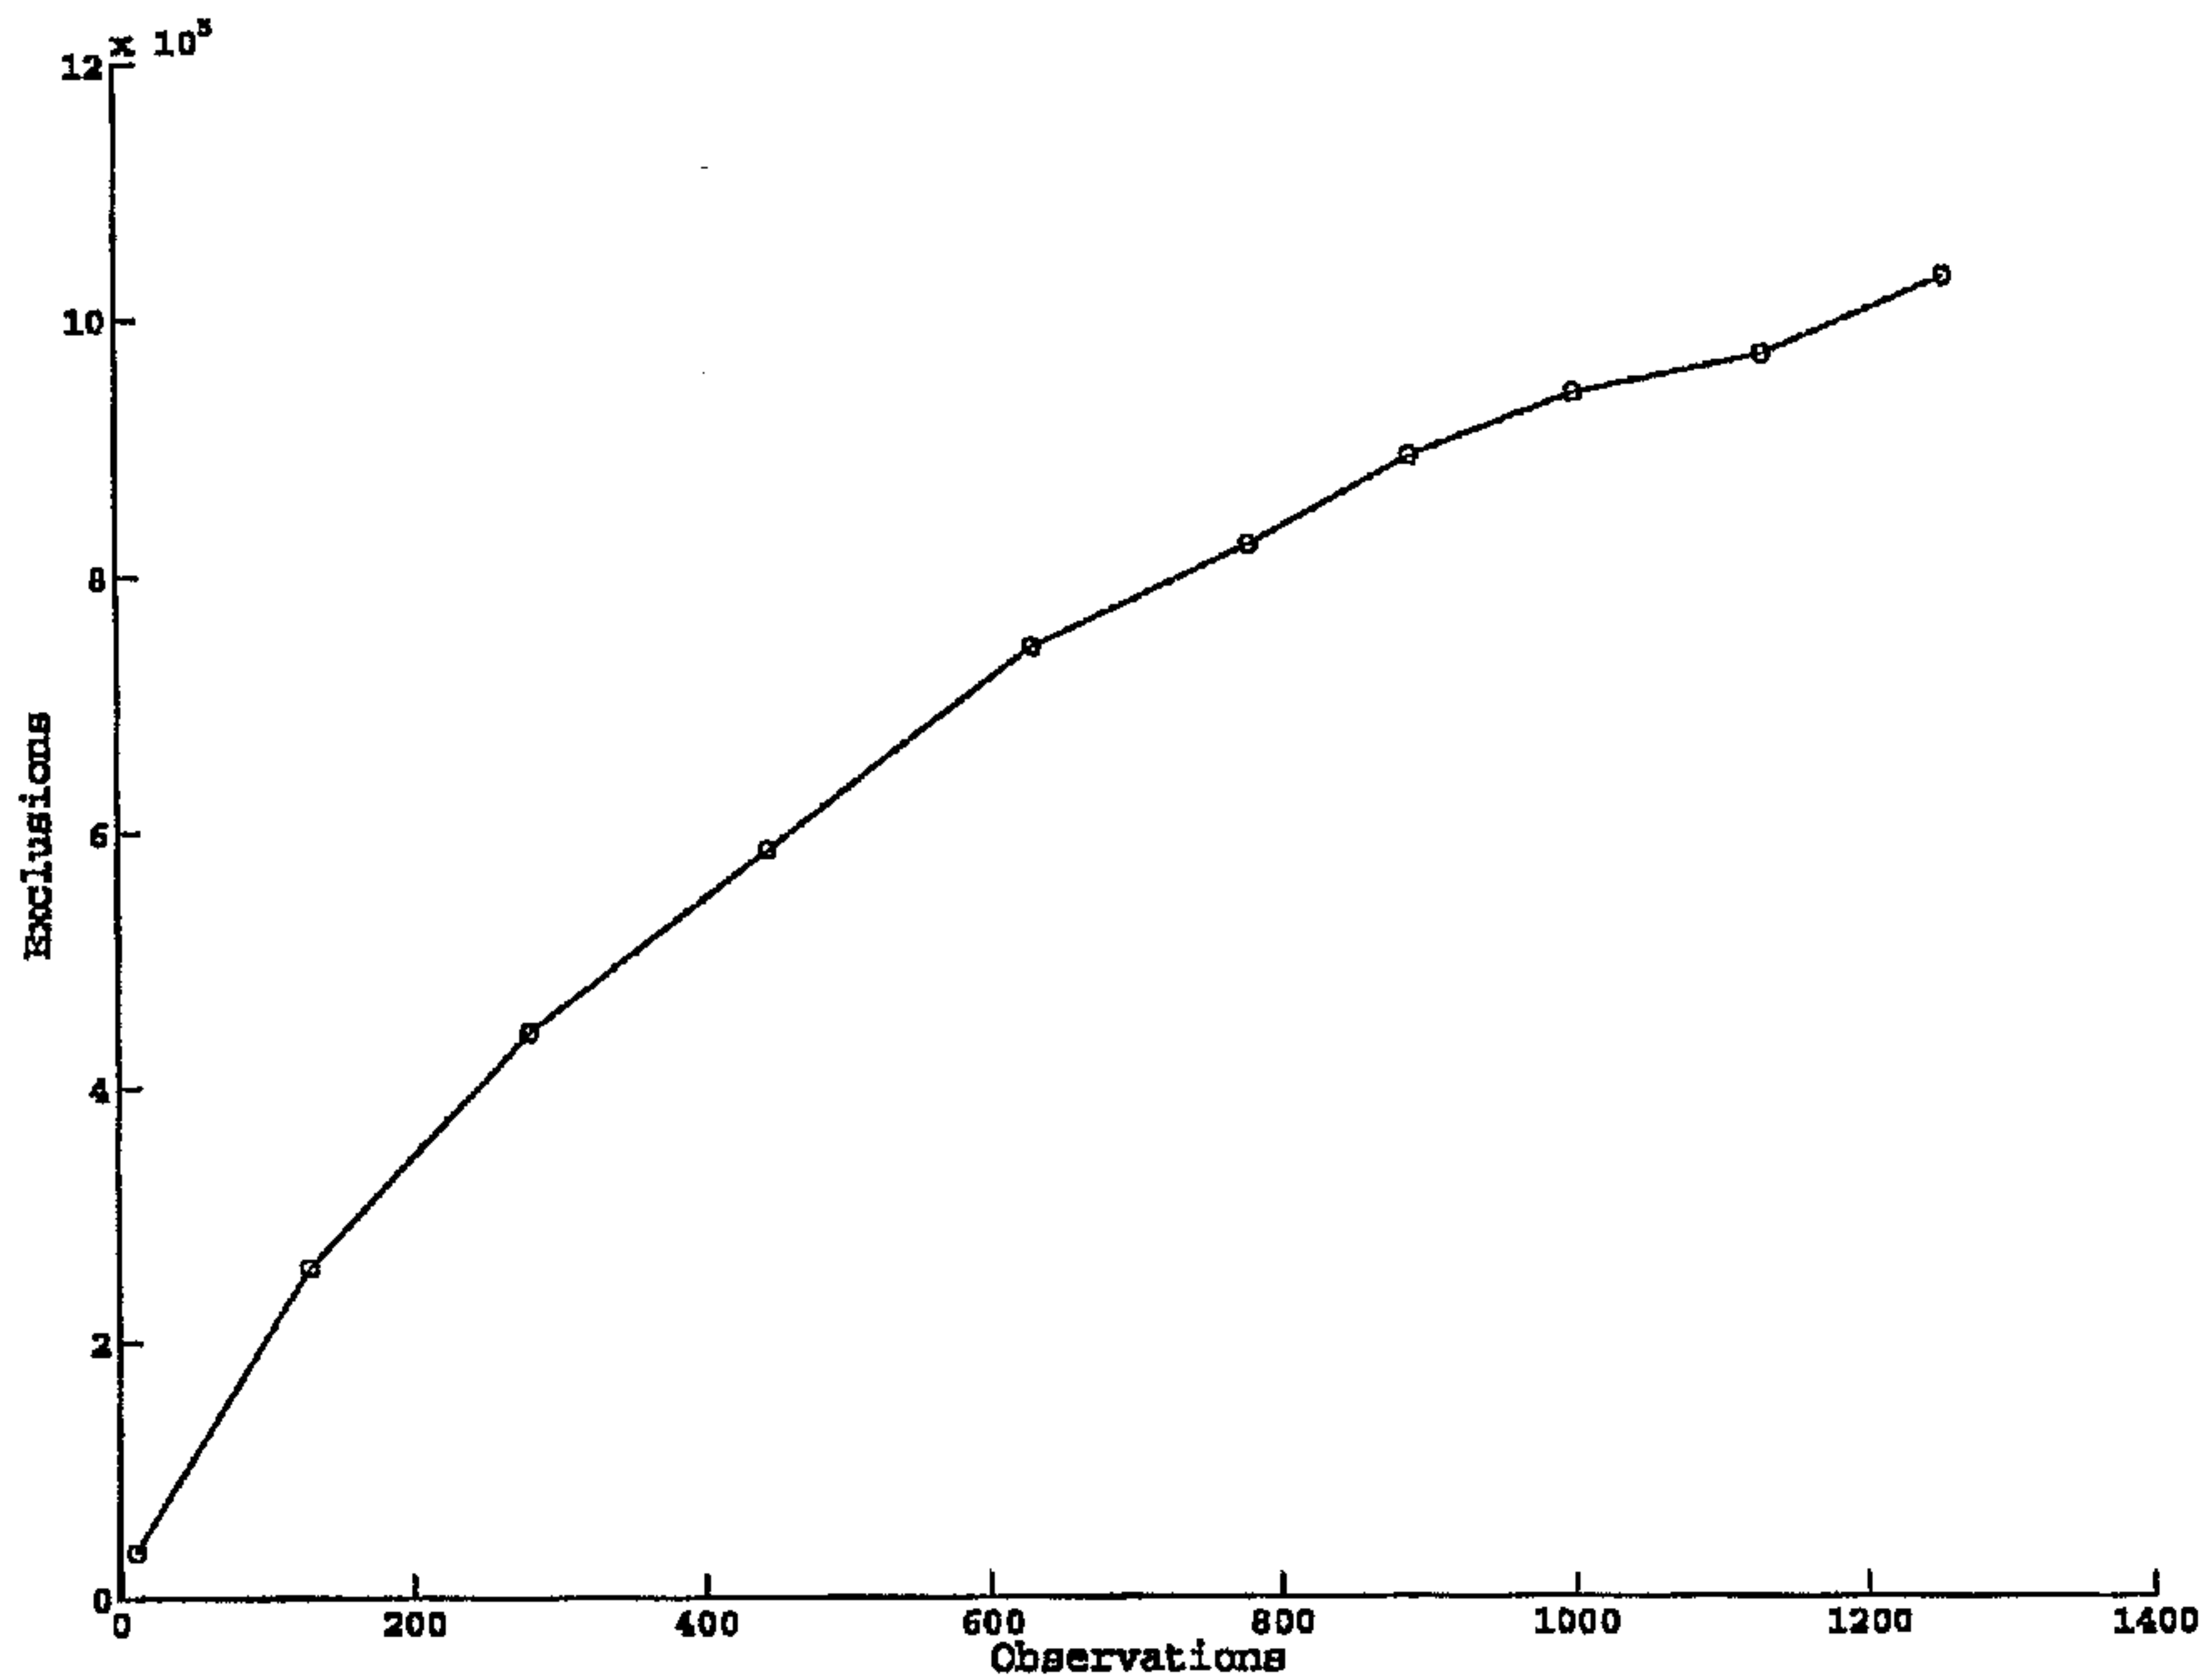


Figure 5

310

Form set of image windows w_i
corresponding to network of cameras

```
graph TD; 310[Form set of image windows w_i corresponding to network of cameras] --> 320[For each image window sequence corresponding to image window w_i determine occupancy vector o_i]; 320 --> 330[Determine the subset of image windows that do not have overlapping views by pairwise comparisons of occupancy vectors o_i]; 330 --> 340[Exclude the subset of non overlapping image windows to determine activity topology];
```

320

For each image window sequence
corresponding to image window w_i
determine occupancy vector o_i

330

Determine the subset of image windows
that do not have overlapping views by pair
wise comparisons of occupancy vectors o_i

340

Exclude the subset of non overlapping
image windows to determine activity
topology