




(86) Date de dépôt PCT/PCT Filing Date: 2018/02/27
 (87) Date publication PCT/PCT Publication Date: 2019/09/06
 (45) Date de délivrance/Issue Date: 2022/10/04
 (85) Entrée phase nationale/National Entry: 2020/07/21
 (86) N° demande PCT/PCT Application No.: US 2018/019986
 (87) N° publication PCT/PCT Publication No.: 2019/168502

(51) Cl.Int./Int.Cl. *E21B 33/12* (2006.01),
E21B 33/127 (2006.01)
 (72) Inventeurs/Inventors:
MERRON, MATTHEW JAMES, US;
NICHOLS, MATTHEW TAYLOR, US
 (73) Propriétaire/Owner:
HALLIBURTON ENERGY SERVICES, INC., US
 (74) Agent: NORTON ROSE FULBRIGHT CANADA
LLP/S.E.N.C.R.L., S.R.L.

(54) Titre : DISPOSITIF D'ISOLATION ZONALE AVEC ANNEAU D'EXPANSION
 (54) Title: ZONAL ISOLATION DEVICE WITH EXPANSION RING

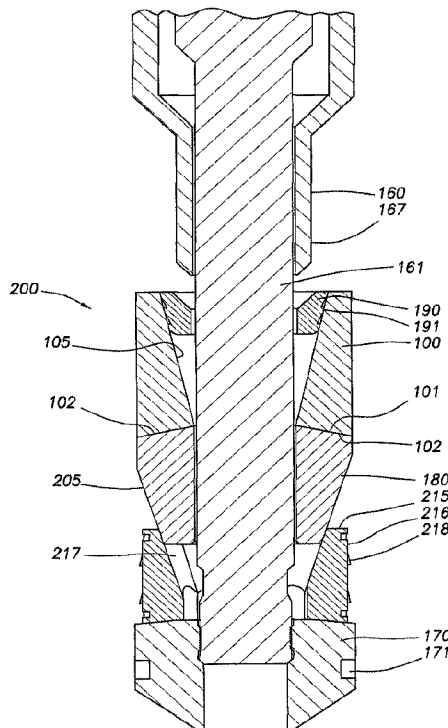

(57) **Abrégé/Abstract:**

Zonal isolation devices, systems, and methods for use are provided. In some embodiments, the zonal isolation device comprises a tubular body having a fluid communication pathway formed along a longitudinal axis comprising: a sealing element comprising a deformable material and an inner bore forming at least a portion of the fluid communication pathway; an expansion ring disposed within the bore of the sealing element; a wedge engaged with a downhole end of the sealing element; and an anchoring assembly engaged with the wedge. In certain embodiments, the tubular body further comprises an end element adjacent the anchoring assembly.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2019/168502 A1(43) International Publication Date
06 September 2019 (06.09.2019)

(51) International Patent Classification:

E21B 33/12 (2006.01) *E21B 33/127* (2006.01)

(21) International Application Number:

PCT/US2018/019986

(22) International Filing Date:

27 February 2018 (27.02.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 N. Sam Houston Parkway E., Houston, TX 77032-3219 (US).(72) Inventors: **MERRON, Matthew, James**; 2705 Carmel Drive, Carrollton, TX 75006 (US). **NICHOLS, Matthew, Taylor**; 3221 Keller Spring, Carrollton, TX 75006 (US).(74) Agent: **SILLIMAN, Michael, A.** et al.; Baker Botts LLP, 910 Louisiana Street, Houston, TX 77002 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: ZONAL ISOLATION DEVICE WITH EXPANSION RING

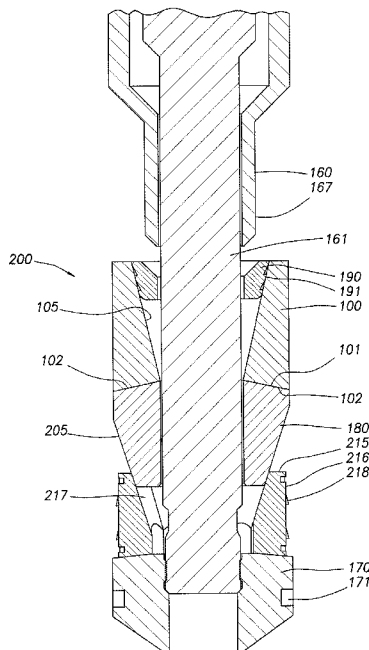


FIG. 9

(57) Abstract: Zonal isolation devices, systems, and methods for use are provided. In some embodiments, the zonal isolation device comprises a tubular body having a fluid communication pathway formed along a longitudinal axis comprising: a sealing element comprising a deformable material and an inner bore forming at least a portion of the fluid communication pathway; an expansion ring disposed within the bore of the sealing element; a wedge engaged with a downhole end of the sealing element; and an anchoring assembly engaged with the wedge. In certain embodiments, the tubular body further comprises an end element adjacent the anchoring assembly.



WO 2019/168502 A1

ZONAL ISOLATION DEVICE WITH EXPANSION RING

BACKGROUND

Wellbores are drilled into the earth for a variety of purposes including accessing hydrocarbon bearing formations. A variety of downhole tools may be used within a wellbore in connection with accessing and extracting such hydrocarbons. Throughout the process, it may become necessary to isolate sections of the wellbore in order to create pressure zones. Zonal isolation devices, such as frac plugs, bridge plugs, packers, and other suitable tools, may be used to isolate wellbore sections.

10 Frac plugs and other zonal isolation devices are commonly run into the wellbore on a conveyance such as a wireline, work string or production tubing. Such tools typically have either an internal or external setting tool, which is used to set the downhole tool within the wellbore and hold the tool in place. Upon reaching a desired location within the wellbore, the downhole tool is actuated by hydraulic, mechanical, electrical, or electromechanical means to seal off the
15 flow of liquid around the downhole tool. After a treatment operation, zonal isolation devices may be removed from the wellbore by various methods, including dissolution and/or drilling. Certain zonal isolation devices may have numerous constituent parts, complicating removal. Some zonal isolation devices may include a ratchet or similar mechanism to retain the device in a set configuration. Ratchets may allow shifting or “free play” within each ratchet increment.

BRIEF DESCRIPTION OF THE DRAWINGS

These drawings illustrate certain aspects of some of the embodiments of the present disclosure, and should not be used to limit or define the claims.

5 Figure 1 is a diagram illustrating an environment for a zonal isolation device according to certain embodiments of the present disclosure.

Figure 2 is a diagram illustrating an environment for a set zonal isolation device according to certain embodiments of the present disclosure.

Figure 3 is a side view of a zonal isolation device according to certain embodiments of the present disclosure.

10 Figure 4 is cross-sectional view of a zonal isolation device according to certain embodiments of the present disclosure.

Figure 5 is cross-sectional view of a zonal isolation device with an expanded sealing element according to certain embodiments of the present disclosure.

15 Figure 6 is a side view of a zonal isolation device with linked slip segments according to certain embodiments of the present disclosure.

Figure 7 is a cross-sectional view of a set zonal isolation device and a seated ball in a wellbore environment according to certain embodiments of the present disclosure.

Figure 8 is a perspective view of an unset zonal isolation device according to certain embodiments of the present disclosure.

20 Figure 9 is a cross-sectional view of a zonal isolation device engaged with a setting tool according to certain embodiments of the present disclosure.

Figure 10 is a cross-sectional view of a zonal isolation device having a floating expansion ring engaged with a setting tool according to certain embodiments of the present disclosure.

25 Figure 11 is a cross-sectional view of a zonal isolation device having a pump-down ring engaged with a setting tool according to certain embodiments of the present disclosure.

Figure 12 is a cross-sectional view of a zonal isolation device engaged with a setting tool having an upper and lower mandrel according to certain embodiments of the present disclosure.

Figure 13 is a cross-sectional view of a set zonal isolation device including a lower mandrel according to certain embodiments of the present disclosure.

30 Figure 14 is a perspective view of a zonal isolation device including an expandable collar according to certain embodiments of the present disclosure.

Figure 15 is a cross-sectional view of a zonal isolation device including an expandable collar according to certain embodiments of the present disclosure.

While embodiments of this disclosure have been depicted, such embodiments do not imply a limitation on the disclosure, and no such limitation should be inferred. The subject matter disclosed is capable of considerable modification, alteration, and equivalents in form and function, as will occur to those skilled in the pertinent art and having the benefit of this disclosure. The depicted and described embodiments of this disclosure are examples only, and not exhaustive of the scope of the disclosure.

DESCRIPTION OF CERTAIN EMBODIMENTS

Illustrative embodiments of the present disclosure are described in detail herein. In the interest of clarity, not all features of an actual implementation may be described in this specification. It will of course be appreciated that in the development of any such actual
5 embodiment, numerous implementation-specific decisions may be made to achieve the specific implementation goals, which may vary from one implementation to another. Moreover, it will be appreciated that such a development effort might be complex and time-consuming, but would nevertheless be a routine undertaking for those of ordinary skill in the art having the benefit of the present disclosure.

10 As used herein, the terms “casing,” “casing string,” “casing joint,” and similar terms refer to a substantially tubular protective lining for a wellbore. Casing can be made of any material, and can include tubulars known to those skilled in the art as casing, liner, and tubing. In certain embodiments, casing may be constructed out of steel. Casing can be expanded downhole, interconnected downhole and/or formed downhole in some cases.

15 As used herein, the term “downhole surface” and similar terms refer to any surface in the wellbore or subterranean formation. For example, downhole surfaces may include, but are not limited to a wellbore wall, an inner tubing string wall such as a casing wall, a wall of an open-hole wellbore, and the like.

As used herein, the term “degradable” and all of its grammatical variants (e.g., “degrade,”
20 “degradation,” “degrading,” “dissolve,” “dissolving,” and the like), refers to the dissolution or chemical conversion of solid materials such that reduced-mass solid end products are formed by at least one of solubilization, hydrolytic degradation, biologically formed entities (e.g., bacteria or enzymes), chemical reactions (including electrochemical and galvanic reactions), thermal reactions, reactions induced by radiation, or combinations thereof. In complete degradation, no
25 solid end products result. In some instances, the degradation of the material may be sufficient for the mechanical properties of the material to be reduced to a point that the material no longer maintains its integrity and, in essence, falls apart or sloughs off into its surroundings. The conditions for degradation are generally wellbore conditions where an external stimulus may be used to initiate or effect the rate of degradation, where the external stimulus is naturally
30 occurring in the wellbore (e.g., pressure, temperature) or introduced into the wellbore (e.g., fluids, chemicals). For example, the pH of the fluid that interacts with the material may be changed by introduction of an acid or a base. The term “wellbore environment” includes both naturally occurring wellbore environments and materials or fluids introduced into the wellbore.

Directional terms, such as “above”, “below”, “upper”, “lower”, etc., are used for convenience in the present disclosure in referring to the accompanying figures. In general, “above”, “upper”, “upward” and similar terms refer to a direction toward the earth's surface along a wellbore, and “below”, “lower”, “downward” and similar terms refer to a direction away
5 from the earth's surface along the wellbore.

As used herein, the term “coupled” and its grammatical variants refer to two or more components, pieces, or portions that may be used operatively together, that are joined together, that are linked together. For example, coupled components may include, but are not limited to components that are detachably coupled, shearably coupled, coupled by compression fit, coupled
10 by interference fit, joined, linked, connected, coupled by a bonding agent. or the like.

The present disclosure relates to downhole tools used in the oil and gas industry. Particularly, the present disclosure relates to an apparatus for isolating zones in a wellbore and methods of use.

More specifically, the present disclosure relates to a zonal isolation device, comprising: a
15 tubular body having a fluid communication pathway formed along a longitudinal axis comprising: a sealing element comprising a deformable material and an inner bore forming at least a portion of the fluid communication pathway; an expansion ring disposed within the bore of the sealing element; a wedge engaged with a downhole end of the sealing element; and an anchoring assembly engaged with the wedge. In certain embodiments, the tubular body further
20 comprises an end element adjacent the anchoring assembly.

In some embodiments, the present disclosure relates to a method comprising: inserting into a wellbore a zonal isolation device disposed on a setting tool adapter kit comprising a mandrel, wherein the zonal isolation device comprises: a sealing element comprising a deformable material and an inner bore; an expansion ring movably disposed within the inner bore of the
25 sealing element; a wedge engaged with a downhole end of the sealing element; an anchoring assembly engaged with the wedge; and an end element adjacent the anchoring assembly and detachably coupled to the mandrel; and actuating to pull upwardly on the mandrel, wherein the upward movement of the mandrel longitudinally compresses the zonal isolation device, causing the expansion ring to axially move relative to the sealing element and radially expand the sealing
30 element into a sealing engagement with a downhole surface.

In some embodiments, the present disclosure relates to a zonal isolation system, comprising: a setting tool adapter kit comprising a mandrel; a sealing element disposed on the mandrel for sealing engagement with a downhole surface; an expansion ring movably disposed on the mandrel and engaged with the sealing element; a wedge disposed on the mandrel; and an

anchoring assembly disposed around the mandrel for locking engagement with a downhole surface.

Among the many potential advantages of the apparatus and methods of the present disclosure, only some of which are alluded to herein, the zonal isolation device of the present disclosure may be provided with fewer component parts. Further, a zonal isolation device according to certain embodiments of the present disclosure may include a large inner diameter than other devices, which may prove advantageous for increasing flow rates during production operations. Further, a zonal isolation device according to certain embodiments of the present disclosure may be provided with more controlled dissolution characteristics due to, for example, fewer components parts. In some embodiments, the zonal isolation device of the present disclosure may retain a set configuration without a ratchet or similar mechanism, which may result in a lower cost tool with better dissolution characteristics and/or may eliminate the shifting that may occur in devices with a ratchet. In some embodiments, the zonal isolation device of the present disclosure may provide a more stable set frac plug, as the sealing element may provide additional stability.

The zonal isolation device is generally depicted and described herein as a hydraulic fracturing plug or “frac” plug. It will be appreciated by those skilled in the art, however, that the principles of this disclosure may equally apply to any of the other aforementioned types of casing or borehole isolation devices, without departing from the scope of the disclosure. Indeed, the zonal isolation device may be any of a frac plug, a wellbore packer, a deployable baffle, a bridge plug, or any combination thereof in keeping with the principles of the present disclosure.

Embodiments of the present disclosure and their advantages are best understood by references to FIGS. 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, and 15, where like numbers are used to indicate like and corresponding features.

Representatively illustrated in FIG. 1 is a zonal isolation device employed in a wellbore system 300 according to certain embodiments of the present disclosure. A system 300 for sealing a zonal isolation device in a wellbore includes a service rig 110 extending over and around a wellbore 120. The service rig 110 may comprise a drilling rig, a completion rig, a workover rig, or the like. In some embodiments, the service rig 110 may be omitted and replaced with a standard surface wellhead completion or installation, without departing from the scope of the disclosure. The wellbore 120 is within a subterranean formation 150 and has a casing 130 lining the wellbore 120, the casing 130 held into place by cement 122. In some embodiments, the wellbore casing 130 may be omitted from all or a portion of the wellbore 120 and the principles of the present disclosure may alternatively apply to an “open-hole” environment. Although

shown as vertical, the wellbore 120 may include horizontal, vertical, slant, curved, and other types of wellbore 120 geometries and orientations. As depicted, the zonal isolation device 200 may include a tubular body 205 comprising a sealing element 100, a wedge 180, an anchoring assembly 215, and an end element 170. The zonal isolation device 200 may be coupled to a setting tool adapter kit 160 for conveyance into the wellbore and setting. The setting tool adapter kit 160 may comprise a mandrel that may engage with the zonal isolation device 200. The zonal isolation device 200 and the setting tool adapter kit 160 may be moved down the wellbore 120 via a conveyance 140 that extends from the service rig 110 to a target location. The conveyance 140 can be, for example, tubing-conveyed, wireline, slickline, work string, or any other suitable means for conveying zonal isolation devices into a wellbore. In certain embodiments, the conveyance 140 may comprise a setting tool be coupled to setting tool adapter kit 160. As depicted in FIG. 1, the setting tool is an internal setting tool, but a person of skill would understand that an external setting tool could be used in one or more embodiments of the present disclosure. Examples of suitable setting tools for certain embodiments of the present disclosure include, but are not limited to Baker 10™, Baker 20™, 3 ½ HES GO™, and the like, or any other suitable setting tool. In some embodiments, the zonal isolation device 200 may be pumped to the target location using hydraulic pressure applied from the service rig 110. In such embodiments, the conveyance 140 serves to maintain control of the zonal isolation device 200 as it traverses the wellbore 120 and provides the necessary power to actuate and set the zonal isolation device 200 upon reaching the target location. In other embodiments, the zonal isolation device 200 freely falls to the target location under the force of gravity. Upon reaching the target location, the zonal isolation device 200 may be actuated or “set” and thereby provide a point of fluid isolation within the wellbore 120. Setting may occur by longitudinal compression of the tubular body 205, which may move the sealing element 100 into sealing engagement with one or more downhole surfaces, and may also move the anchoring assembly 215 into locking engagement with one or more downhole surfaces. After setting, the setting tool adapter kit 160 may disengage from the zonal isolation device 200 and be withdrawn from the wellbore 120.

The zonal isolation device 200 of FIG. 1 is depicted in an unset configuration. In the unset configuration, the anchoring assembly 215 is configured such that the zonal isolation device can be moved uphole or downhole without catching on the casing 130 of the wellbore 120. Once the zonal isolation device 200 reaches the desired location, the setting tool adapter kit 160 may be actuated (e.g, by the setting tool) to set the zonal isolation device 200, anchoring it into place and moving it into a sealing engagement. It should be noted that while FIG. 1 generally depicts a land-based operation, those skilled in the art would readily recognize that the principles

described herein are equally applicable to operations that employ floating or sea-based platforms and rigs, without departing from the scope of the disclosure. It should also be noted that a plurality of zonal isolation devices 200 may be placed in the wellbore 120. In some embodiments, for example, two or more zonal isolation devices 200 may be arranged in the wellbore 120 to divide the wellbore 120 into smaller intervals or “zones” for a particular operation (e.g., hydraulic stimulation).

FIG. 2 depicts a zonal isolation device 200 in a set and anchored configuration disposed within a wellbore 120. In the anchored configuration, the anchoring assembly 215 is radially expanded outwards and engages and grips the casing 130 lining the wellbore 120. In the set configuration, the sealing element 100 is radially expanded outwards into sealing engagement with the casing 130 or other downhole surface. Sealing engagement of the sealing element 100 may effectively prevent fluid flow around the zonal isolation device 200. Although fluid may still flow through the internal bore of the zonal isolation device 200, a sealing device may be used to seal the internal flow of the zonal isolation device 200, as discussed further below. In such a manner, the zonal isolation device 200 may seal the wellbore 120 at a target location, preventing fluid flow past the zonal isolation device 200.

In some embodiments, the anchoring assembly 215 and sealing element 100 are sufficient to hold the zonal isolation device 200 in a set configuration, when in locking engagement and sealing engagement with a downhole surface, respectively. In certain embodiments, the zonal isolation device 200 may retain a set configuration without a ratchet or similar component.

FIGS. 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, and 15 depict a zonal isolation device 200 according to certain embodiments of the present disclosure. The zonal isolation device 200 may include a tubular body 205 comprising a sealing element 100, wedge 180, anchoring assembly 215, end element 170, and expansion ring 190. The zonal isolation device 200 may include a fluid communication pathway 206 formed along a longitudinal axis. In some embodiments, one or more components of the zonal isolation device 200 may form at least a portion of the fluid communication pathway 206.

The sealing element 100 may comprise an inner bore 105 that forms at least a part of the fluid communication pathway 206. In certain embodiments, a wedge 180 may be adjacent to the downhole end 101 of the sealing element 100. The wedge 180 and the sealing element 100 may be coupled or uncoupled. In some embodiments, wedge 180 and sealing element 100 may engage each other with interlocking tapered surfaces at an interface 102. In certain embodiments, wedge 180 and sealing element 100 may be coupled together by a compression fit or an

interference fit. For example, wedge 180 and sealing element 100 may be longitudinally compressed together after the zonal isolation device 200 is set.

The sealing element 100 may be elastically or plastically deformable, and may be composed of any suitable elastically or plastically deformable material including, but not limited to, elastomers (including but not limited to rubber), polymers (including but limited to plastics), or metal. One of ordinary skill in the art will understand that the material selected and the deformable nature (elastic or plastic) is an understood design choice generally dictated by the application of the system and method described herein. Furthermore, one of ordinary skill in the art will understand that the material may be further selected to ease the removal of zonal isolation device 200 by, for example, choosing a material that easily broken up if drilled out or a material that is dissolvable.

With reference to FIG. 4, the zonal isolation device may comprise an expansion ring 190. The expansion ring 190 may be disposed within the sealing element 100. In some embodiments, the expansion ring 190 may be movably disposed within an inner bore 105 of the sealing element 100. In an unset configuration of the zonal isolation device 200, the expansion ring 190 may be disposed adjacent to the sealing element 100, within the inner bore 105 of the sealing element 100, or partially disposed inside the sealing element 100. As shown in FIG. 5, the expansion ring 190 may cause the sealing element 100 to radially expand by moving towards the downhole end 101 of the sealing element 100. In certain embodiments, the expansion ring 190 may cause the sealing element 100 to radially expand into sealing engagement with a downhole surface. For example, setting the zonal isolation device 200 may cause the expansion ring 190 to axially move towards a downhole end 101 of the sealing element 100. The expansion ring 190 may be shaped such that engaging with a tapered surface 102 of the inner bore 105 of the sealing element 100 radially expands the sealing element 100. The expansion ring 190 may comprise cuts or teeth 191 angled in an upwards orientation. The teeth 191 may engage with the inner bore 105 of the sealing element 100 and prevent upward movement of the expansion ring 190 relative to the sealing element 100. In some embodiments, the teeth 191 may allow the expansion ring 190 to maintain a position within the sealing element 100 in response to forces acting to remove it from the sealing element 100. Such forces may include, for example, a force caused during ejection of a ball or flow forces acting on the expansion ring 190 during flowback of fluids.

In some embodiments, the expansion ring 190 may also act be configured to receive a sealing device (e.g., a frac ball, frac dart, or the like). As shown in FIG. 7, a sealing ball or “frac ball” 300 may be dropped and land on the expansion ring 190. As depicted, the sealing element 100 is in sealing engagement with the wellbore casing 130 and the slip segments 216 are in

locking engagement with the casing 130. When the sealing ball 300 is seated on the expansion ring 190 and the zonal isolation tool 200 is set, fluid flow past or through the zonal isolation device 200 in the downhole direction is effectively prevented. For example, the sealing ball 300 may seal off the fluid communication pathway 206 formed along a longitudinal axis of the zonal isolation device 200. At that point, wellbore operations such as completion or stimulation operations may be undertaken by injecting a treatment or completion fluid into the wellbore 120 and forcing the treatment/completion fluid out of the wellbore 120 and into a subterranean formation above the wellbore isolation device 200. For example, after the sealing ball 300 is seated, fluid may be introduced into the wellbore 120 at a pressure sufficient to create or enhance one or more fractures within the subterranean formation. In some embodiments, a different sealing device such as a frac dart may be used in place of the frac ball 300.

The wedge 180 may have a frustoconical shape and be disposed between the sealing element 100 and the anchoring assembly 215. In certain embodiments, the anchoring assembly 215 is engaged with the wedge 180. In some embodiments, the wedge may be engaged with a downhole end 101 of the sealing element 100. In some embodiments, the wedge 180 may comprise a single frustoconical surface 182 (e.g., as depicted in FIG. 8). In other embodiments, the wedge 180 may include a plurality of planar tapered outer surfaces 181. In some embodiments, the tapered outer surfaces 181 may be finned and comprise fins 183 (e.g., as depicted in FIG. 3). The planar tapered outer surfaces 181 may correspond to at least a portion of the anchoring assembly 215. For example, each planar tapered surface 181 may correspond to and slidably engage with the inner surfaces 217 of a plurality of slip segments 216 of the anchoring assembly 215. In some embodiments, the planar tapered outer surfaces 181 and inner surfaces 217 of the anchoring assembly 215 may be complimentary, tapered, angled, or otherwise configured to engage one another upon setting of the zonal isolation device 200 in a wellbore (e.g., the wellbore 120 of FIG. 1). The planar tapered outer surface 181 and slip segments 216 may be shaped such that, upon sufficient movement of the wedge 180 relative to the slip segments 216, the slip segments 216 will be forced up the planar tapered outer surfaces 181 and radially expanded away from the wedge 180 towards a downhole surface.

In certain embodiments, the anchoring assembly 215 allows the zonal isolation device to hold its position within the wellbore. As depicted in FIG. 3, the anchoring assembly 215 may comprise a plurality of slip segments 216. Although depicted as arcuate-shaped slip segments 216, the slip segments 216 may be any suitable shape. The slip segments 216 may be deformed radially from the longitudinal axis of the zonal isolation device 200, thereby engaging a downhole surface such as a casing 130. The anchoring assembly 215 may be engaged by

movement of the end element 170 upward, forcing a portion of the anchoring assembly 215 onto a portion of the wedge 180 and expanding the slip segments 216 outwardly toward the downhole surface. Expanding the slip segments 216 outwardly may move the anchoring assembly 215 into locking engagement with the downhole surface. The locking engagement of the anchoring
5 assembly 215 may hold the zonal isolation device 200 in position after setting, preventing upward or downward movement in the wellbore 120.

The plurality of slip segments 216 may be fully interconnected (e.g., as depicted in FIGS. 6 and 8), partially interconnected (e.g., as depicted in FIG. 3), or not connected. In some embodiments, at least two of the plurality of slip segments 216 may be interconnected by a
10 shearable link 219 that may shear upon axial expansion of the slip segments 216. In certain embodiments, the shearable links 219 may be configured such that, upon sufficient movement of the wedge 180 relative to the slip segments 216, one or more fins 183 may shear one or more shearable links 219.

The slip segments 216 may comprise slip inserts 218 embedded therein. Slip inserts 218
15 may be wear buttons, wickers, wedges, or any other element for reducing wear of the slip segments 216. Slip inserts 218 may protrude from the slip segments 216 to penetrate or bite a downhole surface. Although each slip segment 216 is shown having four slip inserts 218 respectively, it will be appreciated that any number of slip inserts, including one or a plurality (three, four, five, ten, twenty, and the like) of slip inserts may be embedded in each slip, without
20 departing from the scope of the present disclosure. The slip segments 216 may have the same or a different number of slip inserts 218, without departing from the scope of the present disclosure. The slip inserts 218 in FIGS. 3, 6, and 8 are depicted as cylindrical. However, the slip inserts 218 may be squared shaped, frustum shaped, conical shaped, spheroid shaped, pyramid shaped, polyhedron shaped, octahedron shaped, cube shaped, prism shaped, hemispheroid shaped, cone
25 shaped, tetrahedron shaped, cuboid shaped, and the like, and any combination thereof, without departing from the scope of the present disclosure. The slip inserts 218 may be partially one shape and partially one or more other shapes. In some embodiments, the slip inserts 218 may be hardened or coated to penetrate a downhole surface. For example, the slip inserts 218 may comprise a surface treatment including, but not limited to rough surfaces and edges, hardened
30 coatings (both metallurgical and non-metallurgical bonded), ratchet teeth, etc.

In some embodiments, the slip inserts 218 may include hardened metals, ceramics, and any combination thereof. The material forming the slip inserts 218 may be an oxide or a non-oxide material. In certain embodiments, the thickness of a material may be increased in order to achieve the desired compressive strength. For example, in some embodiments the material

forming the slip insert 218 may include, but is not limited to, iron (e.g., cast iron), steel, titanium, zircon, a carbide (e.g., tungsten carbide, a tungsten carbide alloy (e.g., alloyed with cobalt), silicon carbide, titanium carbide, boron carbide, tantalum carbide), a boride (e.g., osmium diboride, rhenium boride, tungsten boride, zirconium boride, iron tetraboride), a nitride (e.g.,
5 silicon nitride, titanium nitride, boron nitride, cubic boron nitride, boron carbon nitride, beta carbon nitride), diamond, synthetic diamond, silica (e.g., amorphous silica), an oxide (e.g., aluminum oxide, fused aluminum oxide, zirconium oxide, beryllium oxide, alumina-chrome oxide), corundite, topaz, synthetic topaz, garnet, synthetic garnet, lonsdaleite, and any combination thereof.

10 An end element 170 may be positioned at or secured at the downhole end of the zonal isolation device 200. As will be appreciated, the end element 170 of the wellbore isolation device 200 could be a mule shoe, or any other type of section that serves to terminate the structure of the wellbore isolation device 200, or otherwise serves as a connector for connecting the wellbore
15 isolation device 200 to other tools, such as a valve, tubing, or other downhole equipment. The end element 170 may comprise end element inserts 171 embedded therein. End element inserts 171 may be wear buttons, wickers, wedges, or any other element for reducing wear of the end element 170. End element inserts 171 may be any shape or material discussed above with respect to slip inserts 218. In certain embodiments, the end element 170 may be adjacent, engaged with, and/or coupled to the anchoring assembly 215. For example, as shown in FIG. 8, the end element
20 170 may be coupled to the anchoring assembly 215 by a dovetail coupling 173. In some embodiments, as shown in FIG. 8, the end element 170 may include flow back channels 172 that allow flow back of fluids (e.g., production fluids).

With reference to FIG. 9, a setting tool adapter kit 160 may be coupled to the zonal isolation device 200. In some embodiments, the setting tool adapter kit 160 comprises a mandrel
25 161 that may engage with the zonal isolation device 200. In some embodiments, the setting tool adapter kit 160 comprises a mandrel setting sleeve 167 disposed around the mandrel 161. In certain embodiments, the mandrel 161 may be slidably engaged with the setting sleeve 167. In some embodiments, the mandrel 161 may be able to move relative to the setting sleeve 167. The setting tool adapter kit 160 may include parts that allow a conventional setting tool to be used
30 with zonal isolation device 200. In certain embodiments, the mandrel 161 may be disposed within the zonal isolation device 200 along a longitudinal axis. In some embodiments, the mandrel 161 may be disposed in a fluid communication pathway 206 of the zonal isolation device 200. As depicted in FIG. 9, the mandrel 161 may be coupled to the end element 170. In some embodiments, the mandrel 161 may be detachably or shearably coupled to the end element

170. In certain embodiments, the mandrel 161 may be coupled to the end element 170 by shearable threads. As discussed above, the setting tool adapter kit 160 including mandrel 161 may be actuated upward to longitudinally compress the zonal isolation device 200. The setting tool or setting tool adapter kit 160 may operate via various mechanisms including, but not limited to, hydraulic setting, mechanical setting, setting by swelling, setting by inflation, and the like.

As depicted in FIGS. 9, 10, 11, 12, and 13, the components of the zonal isolation device 200 may be disposed on the mandrel 161. For example, the anchoring assembly 215, the wedge 180, the sealing element 100, and the expansion ring 190 may be disposed on or around the mandrel 161. In some embodiments, one or more of the anchoring assembly 215, the wedge 180, the sealing element 100, and the expansion ring 190 may be coupled (e.g., shearably coupled) to the mandrel 161. The expansion ring 190 may be coupled to the sealing element 100, as shown in FIG. 9, or uncoupled from the sealing element 100 or “floating,” as shown in FIG. 10. In certain embodiments, the mandrel 161 may be coupled (e.g., by threads) to one or more components of the zonal isolation device 200 with a given level of tightness. In certain embodiments, the tightness of a coupling between the mandrel 161 and one or more components of the zonal isolation device 200 may be from about 0.5 ft·lb to about 50 ft·lb.

In some embodiments, one or more components of the setting tool adapter kit 160 or a setting tool coupled to the adapter kit 160 may be actuated to force the end element 170 upward by drawing the mandrel 161 upward. Drawing the end element 170 upward may force the anchoring assembly 215 upward such that the slip segments 216 engage with the wedge 180. For example, drawing the end element 170 upward may force the slip segments 216 up a surface of the wedge 180, causing the slip segments 216 to radially expand into locking engagement with a downhole surface.

In some embodiments, one or more portions of the setting tool adapter kit 160 may hold the expansion ring 190 stationary relative to the sealing element 100 and/or other elements of the zonal isolation device 200. In certain embodiments, the setting sleeve 167 may restrict upward movement of the expansion ring 190 during upward movement of the mandrel 161. For example, the setting tool 160 may comprise one or more retention elements shaped to restrict the upward movement of the expansion ring 190 during upward movement of the mandrel 161 and other components of the zonal isolation device 200. In certain embodiments, the retention element may include a ridge, flange, tab, pin, sleeve, or other element suitable to restrict upward movement of the expansion ring 190 during upward movement of the mandrel 161. Actuating the setting tool 160 may cause the sealing element 100 to move upward relative to the expansion ring 190,

forcing the expansion ring 190 towards the downhole end 101 of the sealing element 100. Shifting of the expansion ring 190 towards the downhole end 101 of the sealing element 100 may radially expand the sealing element 100 into sealing engagement with a downhole surface. For example, a tapered surface of the expansion ring 190 may engage with a tapered inner bore
5 105 of the sealing element 100.

In certain embodiments, the zonal isolation device 200 may be made up in the form depicted in FIG. 9, where the expansion ring 190 is disposed within the sealing element 100 but the sealing element 100 is not significantly expanded. In some embodiments, the zonal isolation device 200 may be run in the wellbore 120 in this configuration. As depicted in FIG. 11, the
10 zonal isolation device 200 may be run in the wellbore 120 in a configuration where the expansion ring 190 is disposed within the sealing element 100 such that at least a portion of the sealing element 100 is at least partially expanded. In some embodiments, a partially expanded sealing element 100 may improve pump down efficiency.

In certain embodiments, the mandrel 161 may be shearably coupled to one or more
15 components of the zonal isolation device 200 by one or more shear devices, including, but not limited to shear threads, shear pins, a shear ring, shear screws, shearable ridges, and the like, or any other shearable device. In embodiments where the mandrel 161 is shearably coupled to one or more components of the zonal isolation device 200, the mandrel 161 may overcome a shear force provided by the shear device. For example, during or after setting, enough upward force
20 may be applied to the mandrel 161 to shear one or more shear devices and decouple the mandrel from one or more components of the zonal isolation device 200. In some embodiments, the mandrel 161 may be shearably coupled to the end element 170 by a shear device. In some embodiments, the shear force necessary to overcome one or more shear devices of the zonal isolation device 200 is from about 10,000 lb_f to 50,000 lb_f.

As discussed above, the end element 170 may be coupled or uncoupled to the anchoring
25 assembly 215. As depicted in FIG. 7, in embodiments where the end element 170 is not coupled to the anchoring assembly 215, the end element 170 may fall downhole and away from the zonal isolation device 200 after the mandrel 161 is actuated and decouples from the end element 170. In other embodiments where the end element 170 is coupled to the anchoring assembly 215, the
30 end element 170 may be retained as part of the zonal isolation device after the setting tool 160 and mandrel 161 are removed. After setting the zonal isolation device 200, the setting tool 160 and mandrel 161 may be removed from the zonal isolation device 200 and the wellbore 120.

In some embodiments, the zonal isolation device 200 may be run into a wellbore 120 via conveyance 140 in a sealed configuration. For example, as depicted in FIG. 13, the zonal

isolation device may be run into the wellbore 120 with a lower mandrel 163 in the fluid communication pathway 206 of the zonal isolation device 200. The lower mandrel 163 may be disposed within the zonal isolation device 200 along a longitudinal axis. In certain embodiments, the lower mandrel 163 may be coupled to at least one of the end element 170, the anchoring assembly 215, the wedge 180 or the sealing element 100. The lower mandrel 163 may seal off the fluid communication pathway 206 formed along a longitudinal axis of the zonal isolation device 200, allowing completion or stimulation operations to take place without the use of a frac ball or other additional sealing device. The lower mandrel 163 may be coupled to a setting tool 160 while the zonal isolation device 200 is run into the wellbore 120. After setting, the setting tool 160, another mandrel (not shown), or the adapter kit may be decoupled from the lower mandrel 163, leaving the lower mandrel 163 in place such that the zonal isolation device 200 is in a sealed configuration.

FIG. 13 depicts a zonal isolation device 200 in a set configuration. Before setting, the lower mandrel 163 may extend from the end element 170 to the anchoring assembly 215. During setting of the zonal isolation device 200, the lower mandrel 163 may move upwards into the wedge 180 before decoupling from the setting tool 160 or other component. In some embodiments, the lower mandrel 163 may include a sealing surface 162 that seals the fluid communication pathway 206 of the zonal isolation device 200. The sealing surface 162 may include a larger diameter than at least one other portion of the lower mandrel 163 and may effectively prevent fluid flow around the lower mandrel 163. The lower mandrel 163 may comprise a dissolvable or degradable material. In some embodiments, as depicted in FIGS. 12 and 13, the lower mandrel 163 may comprise a set screw 168 that may couple the lower mandrel 163 to the end element 170. In some embodiments, the set screw 168 retains the lower mandrel 163 in the end element 170 and prevents it from decoupling from the end element 170.

As shown in FIG. 12, a lower mandrel 163 may be coupled to a setting tool 160 including an upper mandrel 164. The lower mandrel 163 may be detachably or shearably coupled to the upper mandrel 164, for example, by one or more shearable devices. Also depicted in FIG. 12 is a setting tool 160 comprising a protective sleeve 165. The protective sleeve 165 may include a flange or extended rim of the setting tool 160. The protective sleeve 165 may engage with an uphole end of a sealing element 100. For example, as depicted in FIG. 12, the sealing element 100 may engage an inner surface 166 of the protective sleeve 165. In certain embodiments, at least a portion of the sealing element 100 may have a diameter smaller than the diameter of the inner surface 166 of the protective sleeve 165. This configuration may improve pumping efficiency as the zonal isolation device 200 is pumped or run into the wellbore 120. In certain

embodiments, this configuration may reduce the chance of a “preset,” where the zonal isolation device 200 sets prior to reaching the target location.

For example, in certain embodiments, one or more components of the zonal isolation device 200 may include a pump-down ring. A pump-down ring may, in certain embodiments, be a portion of a component of the zonal isolation device 200 or the setting tool adapter kit 160 with an increased outer diameter relative to at least one other portion of the component. For example, as depicted in FIG. 11, the sealing element 100 may include a pump-down ring portion 103 having an increased outer diameter relative to the rest of the sealing element 100. In certain embodiments, pump-down rings may increase pump down efficiency for the zonal isolation device 200.

With reference to FIGS. 14 and 15 the anchoring assembly 215 may include a one-piece expandable collar 220 with one or more scarf cuts 233 that allow the expandable collar 220 to radially expand as it moves with respect to the wedge 180, the end element 170, or both. In such embodiments the expandable collar 220 may include a generally annular body 230, an upper tapered surface 231 and a lower tapered surface 232. The upper tapered surface 231 may be configured to engage with and receive the wedge 180, depicted with a single frustoconical surface 182. The lower tapered surface 232 may, in certain embodiments, be configured to engage with and receive the end element 170. One or more scarf cuts 233 may be defined in the body 230 and extend at least partially between a first end 234 and a second end 235 of the expandable collar 220. A scarf cut 233 is generally a spiral or helically extending cut slot in the body 230. In certain embodiments, a scarf cut 233 may extend at least partially around the body 230 or around the circumference of body 230 more than once. A scarf cut 233 may be created by a variety of methods, including electrical discharge machining (EDM), sawing, milling, turning, or by any other machining techniques that result in the formation of a slit through the annular body 230. Although depicted in FIGS. 14 and 15 as having one scarf cut 233, the zonal isolation device may comprise two or more scarf cuts 233.

One or more scarf cuts 233 may extend between the first end 234 and second end 235 at an angle 236 relative to one of the first end 234 and the second end 235 or any other suitable plane extending normal to a longitudinal axis of the expandable collar 220. In the illustrated embodiment in FIGS. 14 and 15, the angle 236 of the one or more scarf cuts 233 is defined in the annular body 230 relative to the first end 234. In some embodiments, the angle 236 of the one or more scarf cuts 233 may be about 10°, about 15°, about 20°, about 40°, about 45°, or about 50°. In some embodiments, the angle 236 of the one or more scarf cuts 233 may range from about 0° to about 45°. In some embodiments, the angle 236 of the one or more scarf cuts 233 may range

from about 5° to about 30°. As the angle 236 of the one or more scarf cuts 233 decreases, a circumferential length of the one or more scarf cuts 233 correspondingly increases. A greater circumferential length of the one or more scarf cuts 233 may, in certain embodiments, provide a larger expansion potential of the expandable collar 220 without the expandable collar 220 completely separating when viewed from an axial perspective.

The one or more scarf cuts 233 may permit diametrical expansion of the expandable collar 220 to an expanded state and into locking engagement with a downhole surface. In certain embodiments, due to the construction of the expandable collar 220, a large flow area can be provided through an inner diameter 237 of the body 230. During expansion of the expandable collar 220, the expandable collar 220 may radially expand into locking engagement with a downhole surface (e.g., with a casing). In the expanded state, a gap 238 may be formed between opposing angled surfaces 239a,b of the scarf cut 233. The angle 236 of the scarf cut 233 may be calculated such that when the expandable collar 220 moves to the expanded state, the opposing angled surfaces 239a,b of the scarf cut 233 axially overlap to at least a small degree such that no axial gaps are created in the body 230. Accordingly, the one or more scarf cuts 233 may enable the expandable collar 220 to separate at the opposing angled surfaces 239a,b and thereby enable a degree of freedom that permits expansion and contraction of the expandable collar 220 during operation. In certain embodiments, the first end 234 is movable relative to the second end 235 as the expandable collar 220 expands. In certain embodiments, the first end portion 234 rotates or otherwise moves circumferentially relative to the second end 235 during expansion. In certain embodiments, the first end 234 converges and/or diverges circumferentially relative to the second end 235 during expansion.

One or more components of the zonal isolation device 200 such as the wedge 180, expansion ring 190, anchoring assembly 215, end element 170, and/or lower mandrel 163 may comprise a variety of materials including, but not limited to, a metal, a polymer, a composite material, and any combination thereof. Suitable metals that may be used include, but are not limited to, steel, brass, aluminum, magnesium, iron, cast iron, tungsten, tin, and any alloys thereof. Suitable composite materials that may be used include, but are not limited to, materials including fibers (chopped, woven, etc.) dispersed in a phenolic resin, such as fiberglass and carbon fiber materials.

In some embodiments, one or more components of the zonal isolation device 200 such as the sealing element 100, wedge 180, expansion ring 190, anchoring assembly 215, end element 170, or lower mandrel 163 may be made of a degradable or dissolvable material. The degradable materials described herein may allow for time between setting a downhole tool (e.g., a zonal

isolation device) and when a particular downhole operation is undertaken, such as a hydraulic fracturing treatment operation. In certain embodiments, degradable metal materials may allow for acid treatments and acidified stimulation of a wellbore. In some embodiments, the degradable metal materials may require a large flow area or flow capacity to enable production operations
5 without unreasonably impeding or obstructing fluid flow while the zonal isolation device 200 degrades. As a result, production operations may be efficiently undertaken while the zonal isolation device 200 degrades and without creating significant pressure restrictions.

Degradable materials suitable for certain embodiments of the present disclosure include, but are not limited to borate glass, polyglycolic acid (PGA), polylactic acid (PLA), a degradable
10 rubber, a degradable polymer, a galvanically-corrodible metal, a dissolvable metal, a dehydrated salt, and any combination thereof. The degradable materials may be configured to degrade by a number of mechanisms including, but not limited to, swelling, dissolving, undergoing a chemical change, electrochemical reactions, undergoing thermal degradation, or any combination of the foregoing.

15 Degradation by swelling may involve the absorption by the degradable material of aqueous fluids or hydrocarbon fluids present within the wellbore environment such that the mechanical properties of the degradable material degrade or fail. Hydrocarbon fluids that may swell and degrade the degradable material include, but are not limited to, crude oil, a fractional distillate of crude oil, a saturated hydrocarbon, an unsaturated hydrocarbon, a branched hydrocarbon, a
20 cyclic hydrocarbon, and any combination thereof. Exemplary aqueous fluids that may swell to degrade the degradable material include, but are not limited to, fresh water, saltwater (e.g., water containing one or more salts dissolved therein), brine (e.g., saturated salt water), seawater, acid, bases, or combinations thereof. In degradation by swelling, the degradable material may continue to absorb the aqueous and/or hydrocarbon fluid until its mechanical properties are no longer
25 capable of maintaining the integrity of the degradable material and it at least partially falls apart. In some embodiments, the degradable material may be designed to only partially degrade by swelling in order to ensure that the mechanical properties of a component of the zonal isolation device 200 formed from the degradable material is sufficiently capable of lasting for the duration of the specific operation in which it is utilized.

30 Degradation by dissolving may involve a degradable material that is soluble or otherwise susceptible to an aqueous fluid or a hydrocarbon fluid, such that the aqueous or hydrocarbon fluid is not necessarily incorporated into the degradable material (as is the case with degradation by swelling), but becomes soluble upon contact with the aqueous or hydrocarbon fluid. Degradation by undergoing a chemical change may involve breaking the bonds of the backbone

of the degradable material (e.g., a polymer backbone) or causing the bonds of the degradable material to crosslink, such that the degradable material becomes brittle and breaks into small pieces upon contact with even small forces expected in the wellbore environment. Thermal degradation of the degradable material may involve a chemical decomposition due to heat, such as the heat present in a wellbore environment. Thermal degradation of some degradable materials mentioned or contemplated herein may occur at wellbore environment temperatures that exceed about 93°C (or about 200°F).

With respect to degradable polymers used as a degradable material, a polymer may be considered “degradable” if the degradation is due to, in situ, a chemical and/or radical process such as hydrolysis, oxidation, or UV radiation. Degradable polymers, which may be either natural or synthetic polymers, include, but are not limited to, polyacrylics, polyamides, and polyolefins such as polyethylene, polypropylene, polyisobutylene, and polystyrene. Suitable examples of degradable polymers that may be used in accordance with the embodiments include polysaccharides such as dextran or cellulose, chitins, chitosans, proteins, aliphatic polyesters, poly(lactides), poly(glycolides), poly(ϵ -caprolactones), poly(hydroxybutyrates), poly(anhydrides), aliphatic or aromatic polycarbonates, poly(orthoesters), poly(amino acids), poly(ethylene oxides), polyphosphazenes, poly(phenyllactides), polyepichlorohydrins, copolymers of ethylene oxide/polyepichlorohydrin, terpolymers of epichlorohydrin/ethylene oxide/allyl glycidyl ether, and any combination thereof. In certain embodiments, the degradable material is polyglycolic acid or polylactic acid. In some embodiments, the degradable material is a polyanhydride. Polyanhydride hydrolysis may proceed, in situ, via free carboxylic acid chain-ends to yield carboxylic acids as final degradation products. The erosion time may be varied over a broad range of changes in the polymer backbone. Examples of polyanhydrides suitable for certain embodiments of the present disclosure include, but are not limited to poly(adipic anhydride), poly(suberic anhydride), poly(sebacic anhydride), and poly(dodecanedioic anhydride). Other examples suitable for certain embodiments of the present disclosure include, but are not limited to poly(maleic anhydride) and poly(benzoic anhydride).

Degradable rubbers suitable for certain embodiments of the present disclosure include, but are not limited to degradable natural rubbers (i.e., cis-1,4- polyisoprene) and degradable synthetic rubbers, which may include, but are not limited to, ethylene propylene diene M-class rubber, isoprene rubber, isobutylene rubber, polyisobutene rubber, styrene-butadiene rubber, silicone rubber, ethylene propylene rubber, butyl rubber, norbornene rubber, polynorbornene rubber, a block polymer of styrene, a block polymer of styrene and butadiene, a block polymer of styrene and isoprene, and any combination thereof. Other degradable polymers suitable for

certain embodiments of the present disclosure include those that have a melting point that is such that it will dissolve at the temperature of the subterranean formation in which it is placed.

In some embodiments, the degradable material may have a thermoplastic polymer embedded therein. The thermoplastic polymer may modify the strength, resiliency, or modulus of a portion of the zonal isolation device 200 and may also control the degradation rate. Thermoplastic polymers suitable for certain embodiments of the present disclosure include, but are not limited to an acrylate (e.g., polymethylmethacrylate, polyoxymethylene, a polyamide, a polyolefin, an aliphatic polyamide, polybutylene terephthalate, polyethylene terephthalate, polycarbonate, polyester, polyethylene, polyetheretherketone, polypropylene, polystyrene, polyvinylidene chloride, styrene-acrylonitrile), polyurethane prepolymer, polystyrene, poly(o-methylstyrene), poly(m-methylstyrene), poly(p-methylstyrene), poly(2,4-dimethylstyrene), poly(2,5-dimethylstyrene), poly(p-tert-butylstyrene), poly(p-chlorostyrene), poly(α -methylstyrene), co- and ter-polymers of polystyrene, acrylic resin, cellulosic resin, polyvinyl toluene, and any combination thereof. Each of the foregoing may further comprise acrylonitrile, vinyl toluene, or methyl methacrylate. The amount of thermoplastic polymer that may be embedded in a degradable material may be any amount that confers a desirable elasticity without affecting the desired amount of degradation. In some embodiments, the thermoplastic polymer may be included in an amount in the range of a lower limit of about 1%, 5%, 10%, 15%, 20%, 25%, 30%, 35%, 40%, and 45% to an upper limit of about 91%, 85%, 80%, 75%, 70%, 65%, 60%, 55%, 50%, and 45% by weight of the degradable material, encompassing any value or subset therebetween.

In certain embodiments, galvanically-corrodible metals may be used as a degradable material and may be configured to degrade via an electrochemical process in which the galvanically-corrodible metal corrodes in the presence of an electrolyte (e.g., brine or other salt-containing fluids present within the wellbore). Galvanically-corrodible metals suitable for certain embodiments of the present disclosure include, but are not limited to gold, gold-platinum alloys, silver, nickel, nickel-copper alloys, nickel-chromium alloys, copper, copper alloys (e.g., brass, bronze, etc.), chromium, tin, aluminum, iron, zinc, magnesium, and beryllium. Galvanically-corrodible metals may include a nano-structured matrix. One example of a nano-structured matrix micro-galvanic material is a magnesium alloy with iron-coated inclusions. Galvanically-corrodible metals suitable for certain embodiments of the present disclosure include micro-galvanic metals or materials, such as a solution-structured galvanic material. An example of a solution-structured galvanic material is zirconium (Zr) containing a magnesium (Mg) alloy, where different domains within the alloy contain different percentages of Zr. This may lead to a

galvanic coupling between these different domains, which causes micro-galvanic corrosion and degradation. Micro-galvanically corrodible magnesium alloys could also be solution-structured with other elements such as zinc, aluminum, nickel, iron, carbon, tin, silver, copper, titanium, rare earth elements, et cetera. Micro-galvanically corrodible aluminum alloys could be in solution with elements such as nickel, iron, carbon, tin, silver, copper, titanium, gallium, et cetera.

In some embodiments, blends of certain degradable materials may also be suitable as the degradable material for at least a portion of the zonal isolation device 200. One example of a suitable blend of degradable materials is a mixture of PLA and sodium borate. Another example may include a blend of PLA and boric oxide. The choice of blended degradable materials may depend, at least in part, on the conditions of the well (e.g., wellbore temperature). For instance, lactides have been found to be suitable for lower temperature wells, including those within the range of 60 °F to 150 °F, and PLAs have been found to be suitable for wellbore temperatures above this range. In addition, PLA may be suitable for higher temperature wells. Some stereoisomers of poly(lactide) or mixtures of such stereoisomers may be suitable for even higher temperature applications. Dehydrated salts may also be suitable for higher temperature wells. Other blends of degradable materials may include materials that include different alloys including using the same elements but in different ratios or with a different arrangement of the same elements.

In some embodiments, a degradable material may include a material that has undergone different heat treatments and exhibits varying grain structures or precipitation structures. As an example, in some magnesium alloys, the beta phase can cause accelerated corrosion if it occurs in isolated particles. Homogenization annealing for various times and temperatures causes the beta phase to occur in isolated particles or in a continuous network. In this way, the corrosion behavior may be different for the same alloy with different heat treatments.

In some embodiments, all or a portion of the outer surface of at least a portion of the zonal isolation device 200 may be treated to impede degradation. For example, a surface of the zonal isolation device 200 may undergo a treatment that aids in preventing the degradable material (e.g., a galvanically-corrodible metal) from galvanically-corroding. Treatments suitable for certain embodiments of the present disclosure include, but are not limited to, an anodizing treatment, an oxidation treatment, a chromate conversion treatment, a dichromate treatment, a fluoride anodizing treatment, a hard anodizing treatment, and any combination thereof. Some anodizing treatments may result in an anodized layer of material being deposited on the surface. The anodized layer may comprise materials such as, but not limited to, ceramics, metals,

polymers, epoxies, elastomers, or any combination thereof and may be applied using any suitable processes known to those of skill in the art. Examples of suitable processes that result in an anodized layer include, but are not limited to, soft anodize coating, anodized coating, electroless nickel plating, hard anodized coating, ceramic coatings, carbide beads coating, plastic coating, thermal spray coating, high velocity oxygen fuel (HVOF) coating, a nano HVOF coating, a metallic coating, and any combination thereof.

In some embodiments, all or a portion of an outer surface of the zonal isolation device 200 may be treated or coated with a substance configured to enhance degradation of the degradable material. For example, such a treatment or coating may be configured to remove a protective coating or treatment or otherwise accelerate the degradation of the degradable material of the zonal isolation device 200. In some embodiments, a galvanically-corroding metal material is coated with a layer of PGA. In this example, the PGA may undergo hydrolysis and cause the surrounding fluid to become more acidic, which may accelerate the degradation of the underlying metal.

In some embodiments, the degradable material may be made of dissimilar metals that generate a galvanic coupling that either accelerates or decelerates the degradation rate of the zonal isolation device 200. As will be appreciated, such embodiments may depend on where the dissimilar metals lie on the galvanic potential. In at least one embodiment, a galvanic coupling may be generated by embedding a cathodic substance or piece of material into an anodic structural element. For instance, the galvanic coupling may be generated by dissolving aluminum in gallium. A galvanic coupling may also be generated by using a sacrificial anode coupled to the degradable material. In such embodiments, the degradation rate of the degradable material may be decelerated until the sacrificial anode is dissolved or otherwise corroded away.

An embodiment of the present disclosure is a zonal isolation device, comprising: a tubular body having a fluid communication pathway formed along a longitudinal axis comprising: a sealing element comprising a deformable material and an inner bore forming at least a portion of the fluid communication pathway; an expansion ring disposed within the bore of the sealing element; a wedge engaged with a downhole end of the sealing element; and an anchoring assembly engaged with the wedge.

In one or more embodiments described in the preceding paragraph, the tubular body further comprises an end element adjacent the anchoring assembly. In one or more embodiments described above, the sealing element is radially expandable into sealing engagement with a downhole surface. In one or more embodiments described above, the anchoring assembly comprises a plurality of arcuate-shaped slip segments for locking engagement with a downhole

surface. In one or more embodiments described above, at least two of the plurality of arcuate-shaped slip segments are interconnected by a shearable link. In one or more embodiments described above, the shearable link shears upon axial expansion. In one or more embodiments described above, longitudinal compression of the tubular body radially expands the sealing
5 element and radially expands the anchoring assembly. In one or more embodiments described above, the sealing element is coupled to the wedge and the wedge is coupled to the anchoring assembly. In one or more embodiments described above, the wedge is coupled to the sealing element by a compression fit, an interference fit, or a bonding agent.

Another embodiment of the present disclosure is a method comprising: inserting into a
10 wellbore a zonal isolation device disposed on a setting tool adapter kit comprising a mandrel, wherein the zonal isolation device comprises: a sealing element comprising a deformable material and an inner bore; an expansion ring movably disposed within the inner bore of the sealing element; a wedge engaged with a downhole end of the sealing element; an anchoring
15 assembly engaged with the wedge; and an end element adjacent the anchoring assembly and detachably coupled to the mandrel; and actuating to pull upwardly on the mandrel, wherein the upward movement of the mandrel longitudinally compresses the zonal isolation device, causing the expansion ring to axially move relative to the sealing element and radially expand the sealing element into a sealing engagement with a downhole surface.

In one or more embodiments described in the preceding paragraph, the upward movement
20 of the mandrel engages the anchoring assembly with the wedge, radially expanding the anchoring assembly into a locking engagement with the downhole surface. In one or more embodiments described above, the method further comprises shearing a shear device coupling the mandrel to the end element. In one or more embodiments described above, the method further comprises removing the setting tool adapter kit and the mandrel from the wellbore. In one
25 or more embodiments described above, one or more components of the zonal isolation device comprises a pump-down ring. In one or more embodiments described above, the method further comprises seating a sealing ball on the expansion ring. In one or more embodiments described above, the anchoring assembly comprises a plurality of arcuate-shaped slip segments for locking engagement with the downhole surface. In one or more embodiments described above, upon
30 sufficient movement of the wedge relative to the plurality of arcuate-shaped slip segments, at least two of the plurality of arcuate-shaped slip segments slip segments are separated from each other by shearing a shearable link joining the at least two slip segments.

Another embodiment of the present disclosure is a zonal isolation system, comprising: a setting tool adapter kit comprising a mandrel; a sealing element disposed on the mandrel for

sealing engagement with a downhole surface; an expansion ring movably disposed on the mandrel and engaged with the sealing element; a wedge disposed on the mandrel; and an anchoring assembly disposed around the mandrel for locking engagement with a downhole surface.

5 In one or more embodiments described in the preceding paragraph, the system further comprises an end element coupled to the mandrel. In one or more embodiments described in the preceding sentence, the end element is detachably coupled to the mandrel by a shearing element.

 Therefore, the present disclosure is well adapted to attain the ends and advantages mentioned as well as those that are inherent therein. The particular embodiments disclosed
10 above are illustrative only, as the present disclosure may be modified and practiced in different but equivalent manners apparent to those skilled in the art having the benefit of the teachings herein. It is therefore evident that the particular illustrative embodiments disclosed above may be altered or modified and all such variations are considered within the scope and spirit of the present disclosure. In particular, every range of values (*e.g.*, “from about a to about b,” or,
15 equivalently, “from approximately a to b,” or, equivalently, “from approximately a-b”) disclosed herein is to be understood as referring to the power set (the set of all subsets) of the respective range of values. The terms in the claims have their plain, ordinary meaning unless otherwise explicitly and clearly defined by the patentee.

What is claimed is:

1. A zonal isolation device, comprising:

a tubular body having a fluid communication pathway formed along a longitudinal axis comprising:

5 a sealing element comprising a deformable material and an inner bore forming at least a portion of the fluid communication pathway;
an expansion ring disposed within the bore of the sealing element;
a wedge engaged with a downhole end of the sealing element; and
an anchoring assembly engaged with the wedge.

10

2. The zonal isolation device of claim 1, wherein the tubular body further comprises an end element adjacent the anchoring assembly.

3. The zonal isolation device of claim 1, wherein the sealing element is radially expandable into sealing engagement with a downhole surface.

15

4. The zonal isolation device of claim 1, wherein the anchoring assembly comprises a plurality of slip segments for locking engagement with a downhole surface.

5. The zonal isolation device of claim 1, wherein at least two of the plurality of slip segments are interconnected by a shearable link.

20

6. The zonal isolation device of claim 5, wherein the shearable link shears upon axial expansion.

7. The zonal isolation device of claim 1, wherein longitudinal compression of the tubular body radially expands the sealing element and radially expands the anchoring assembly.

8. The zonal isolation device of claim 1, wherein the sealing element is coupled to the wedge and the wedge is coupled to the anchoring assembly.

25

9. The zonal isolation device of claim 1, wherein the wedge is coupled to the sealing element by a compression fit, an interference fit, or a bonding agent.

10. A method comprising:
- inserting into a wellbore a zonal isolation device disposed on a setting tool adapter kit comprising a mandrel, wherein the zonal isolation device comprises:
- a sealing element comprising a deformable material and an inner bore;
 - 5 an expansion ring movably disposed within the inner bore of the sealing element;
 - a wedge engaged with a downhole end of the sealing element;
 - an anchoring assembly engaged with the wedge; and
 - an end element adjacent the anchoring assembly and detachably coupled
- 10 to the mandrel; and
- actuating to pull upwardly on the mandrel, wherein the upward movement of the mandrel longitudinally compresses the zonal isolation device, causing the expansion ring to axially move relative to the sealing element and radially expand the sealing element into a sealing engagement with a downhole surface.
- 15 11. The method of claim 10, wherein the upward movement of the mandrel engages the anchoring assembly with the wedge, radially expanding the anchoring assembly into a locking engagement with the downhole surface.
12. The method of claim 10, further comprising shearing a shear device coupling the mandrel to the end element.
- 20 13. The method of claim 10, further comprising removing the setting tool adapter kit and the mandrel from the wellbore.
14. The method of claim 10, wherein one or more components of the zonal isolation device comprises a pump-down ring.
15. The method of claim 10, further comprising seating a sealing ball on the expansion ring.
- 25 16. The method of claim 10, wherein the anchoring assembly comprises a plurality of slip segments for locking engagement with the downhole surface.
17. The method of claim 16, wherein upon sufficient movement of the wedge relative to the plurality of slip segments, at least two of the plurality of slip segments are separated from each other by shearing a shearable link joining the at least two slip segments.

30

18. A zonal isolation system, comprising:
a setting tool adapter kit comprising a mandrel;
a sealing element disposed on the mandrel for sealing engagement with a downhole surface, the sealing element comprising a deformable material and an inner bore;
5 an expansion ring movably disposed on the mandrel within the inner bore of the sealing element;
a wedge disposed on the mandrel and engaged with a downhole end of the sealing element; and
an anchoring assembly disposed around the mandrel for locking engagement with a
10 downhole surface, the anchoring assembly engaged with the wedge.

19. The system of claim 18, further comprising an end element coupled to the mandrel.

20. The system of claim 19, wherein the end element is detachably coupled to the mandrel by a shearing element.

21. The zonal isolation device of any one of claims 1 to 9, wherein the anchoring assembly
15 comprises an expandable collar with one or more scarf cuts, wherein the one or more scarf cuts extend between a first end and a second end of the expandable collar with an angle relative to the first end, wherein each of the one or more scarf cuts is a spiral or helically extending cut slot through a body of the anchoring assembly.

22. The method of any one of claims 10 to 17, wherein the anchoring assembly comprises an
20 expandable collar with one or more scarf cuts, wherein the one or more scarf cuts extend between a first end and a second end of the expandable collar with an angle relative to the first end, wherein each of the one or more scarf cuts is a spiral or helically extending cut slot through a body of the anchoring assembly.

23. The system of any one of claims 18 to 20, wherein the anchoring assembly comprises an
25 expandable collar with one or more scarf cuts, wherein the one or more scarf cuts extend between a first end and a second end of the expandable collar with an angle relative to the first end, wherein each of the one or more scarf cuts is a spiral or helically extending cut slot through a body of the anchoring assembly.

1/12

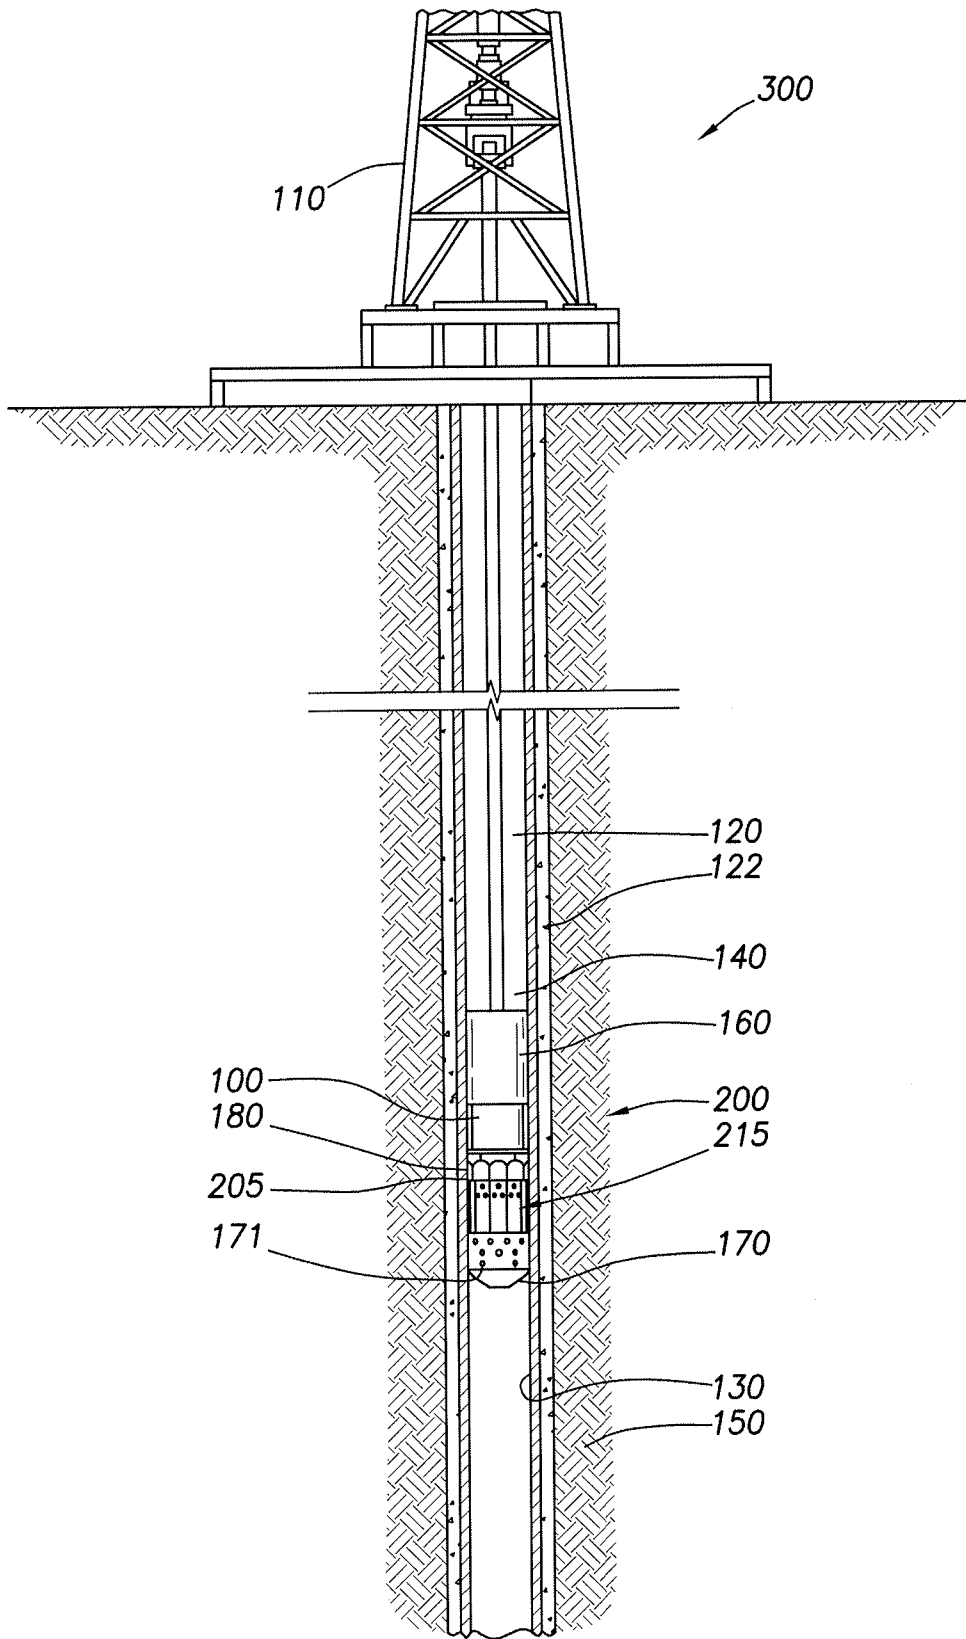


FIG. 1

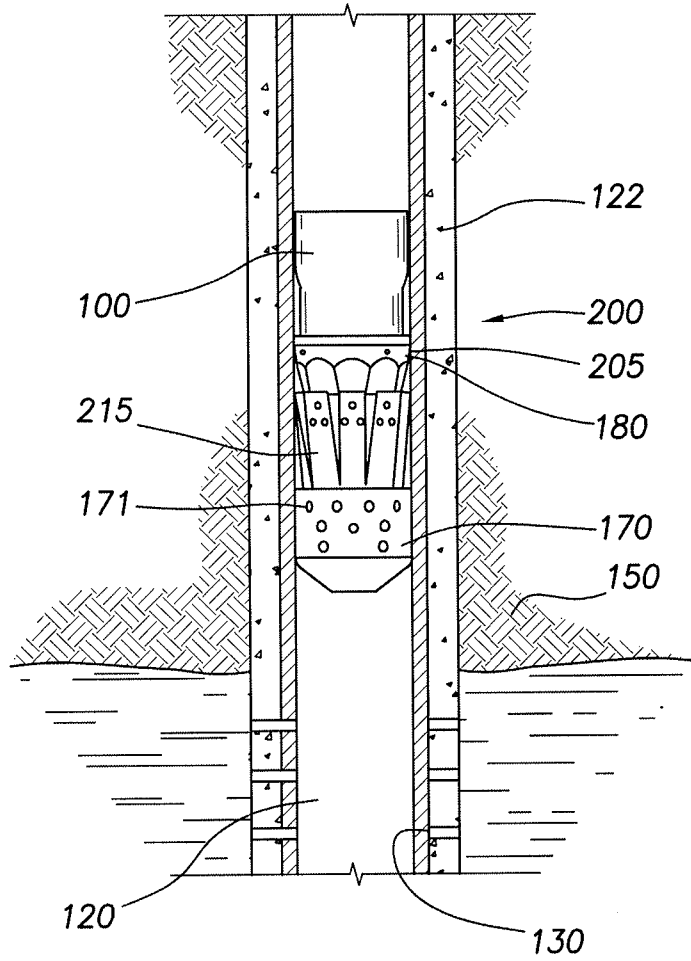


FIG.2

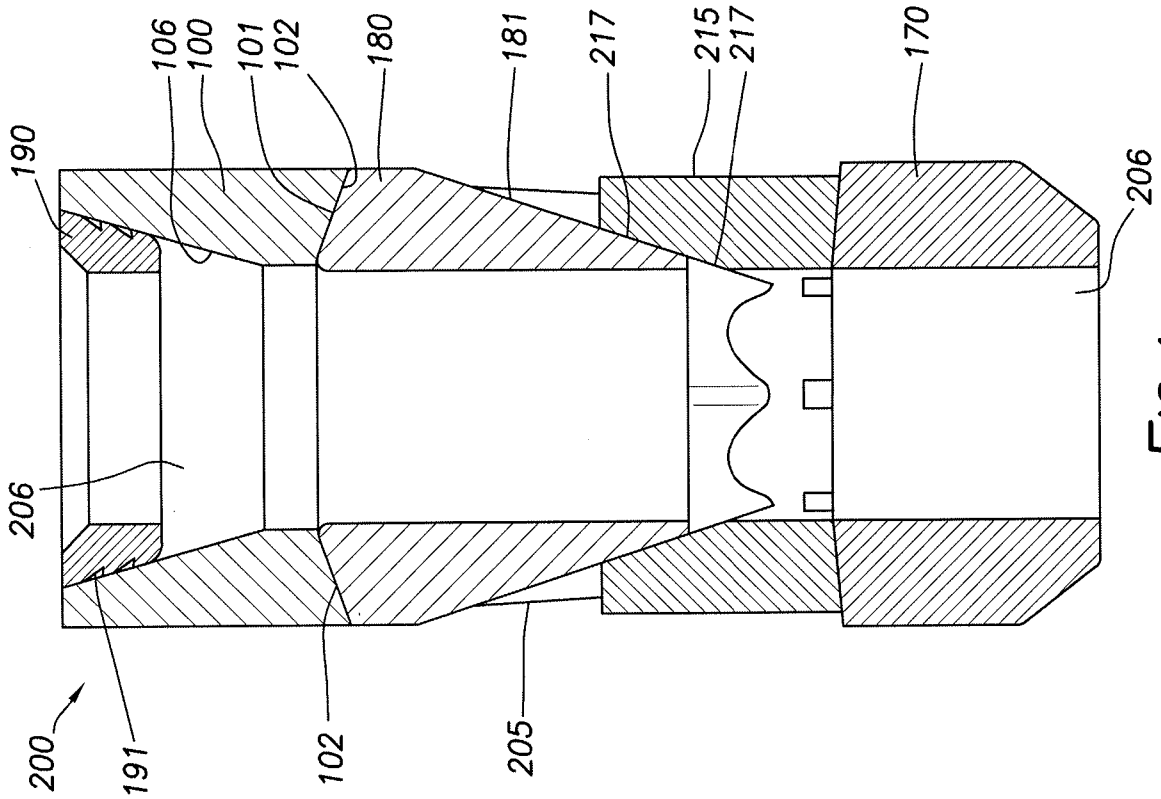


FIG. 4

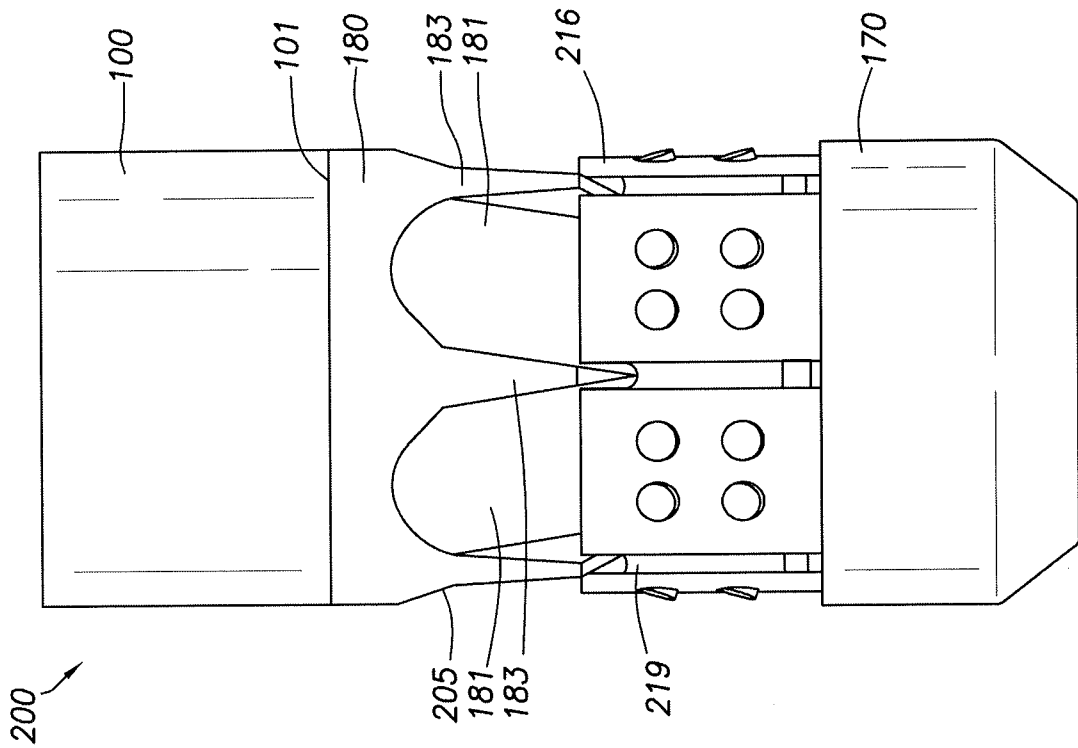


FIG. 3

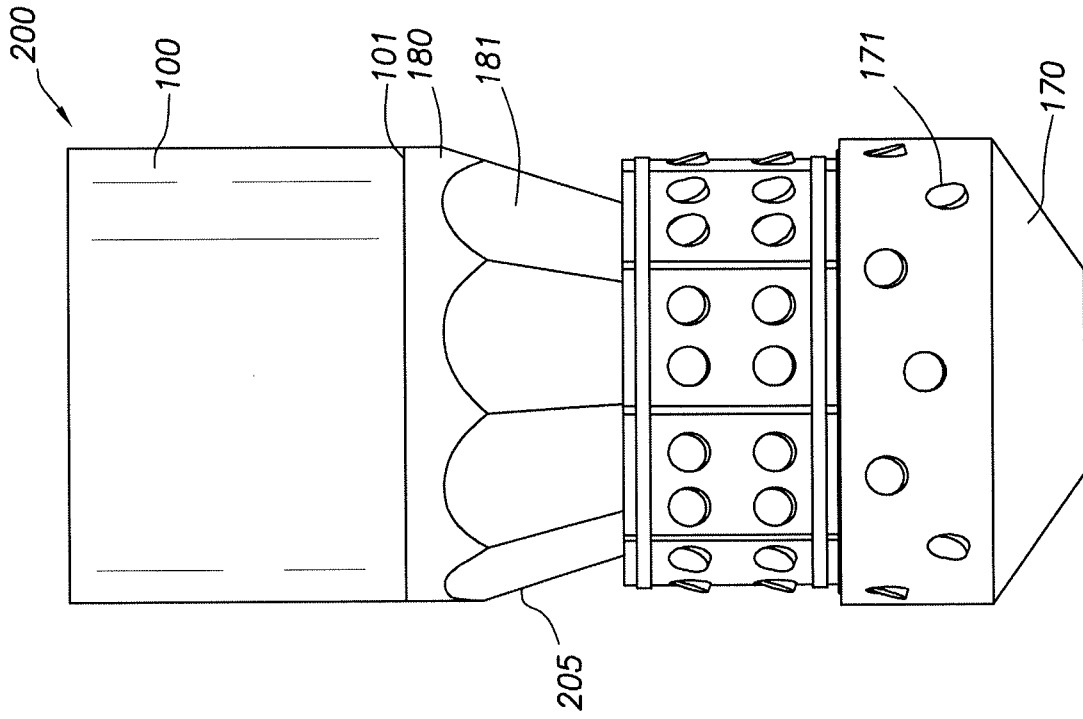


FIG. 6

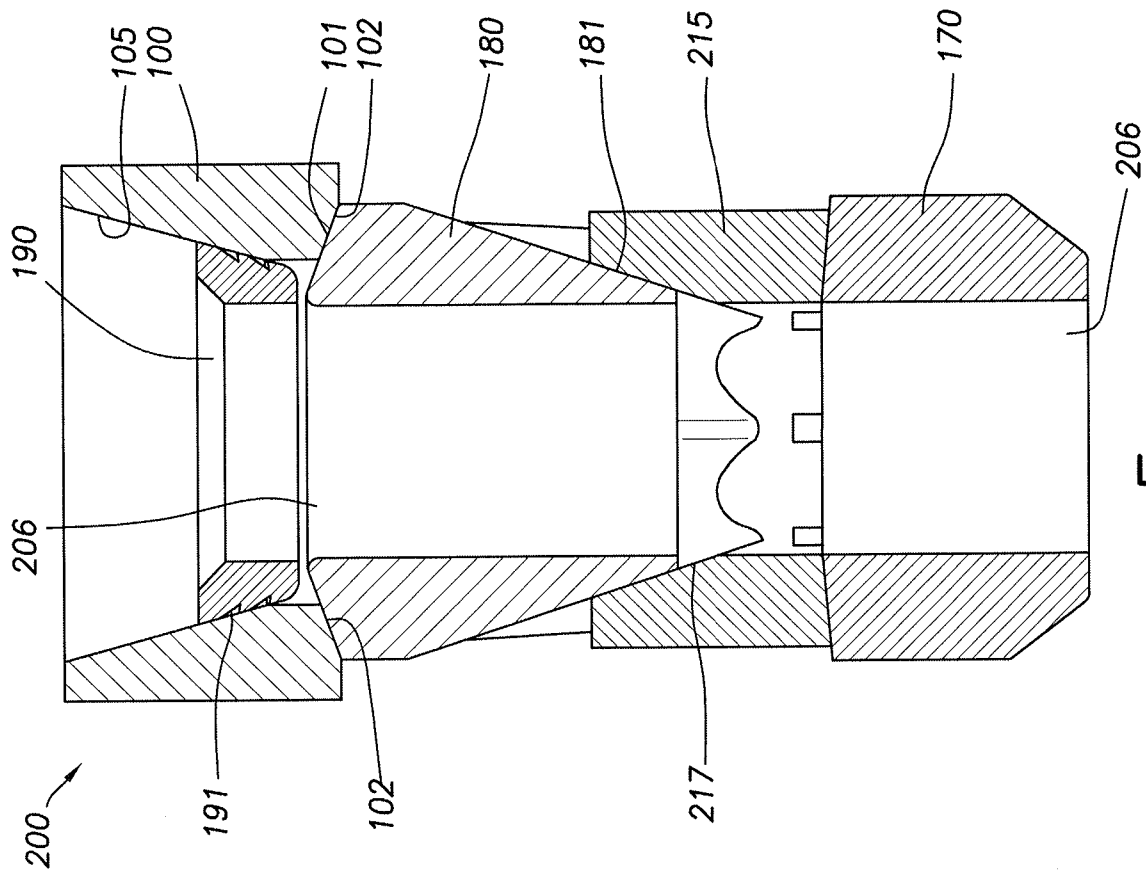


FIG. 5

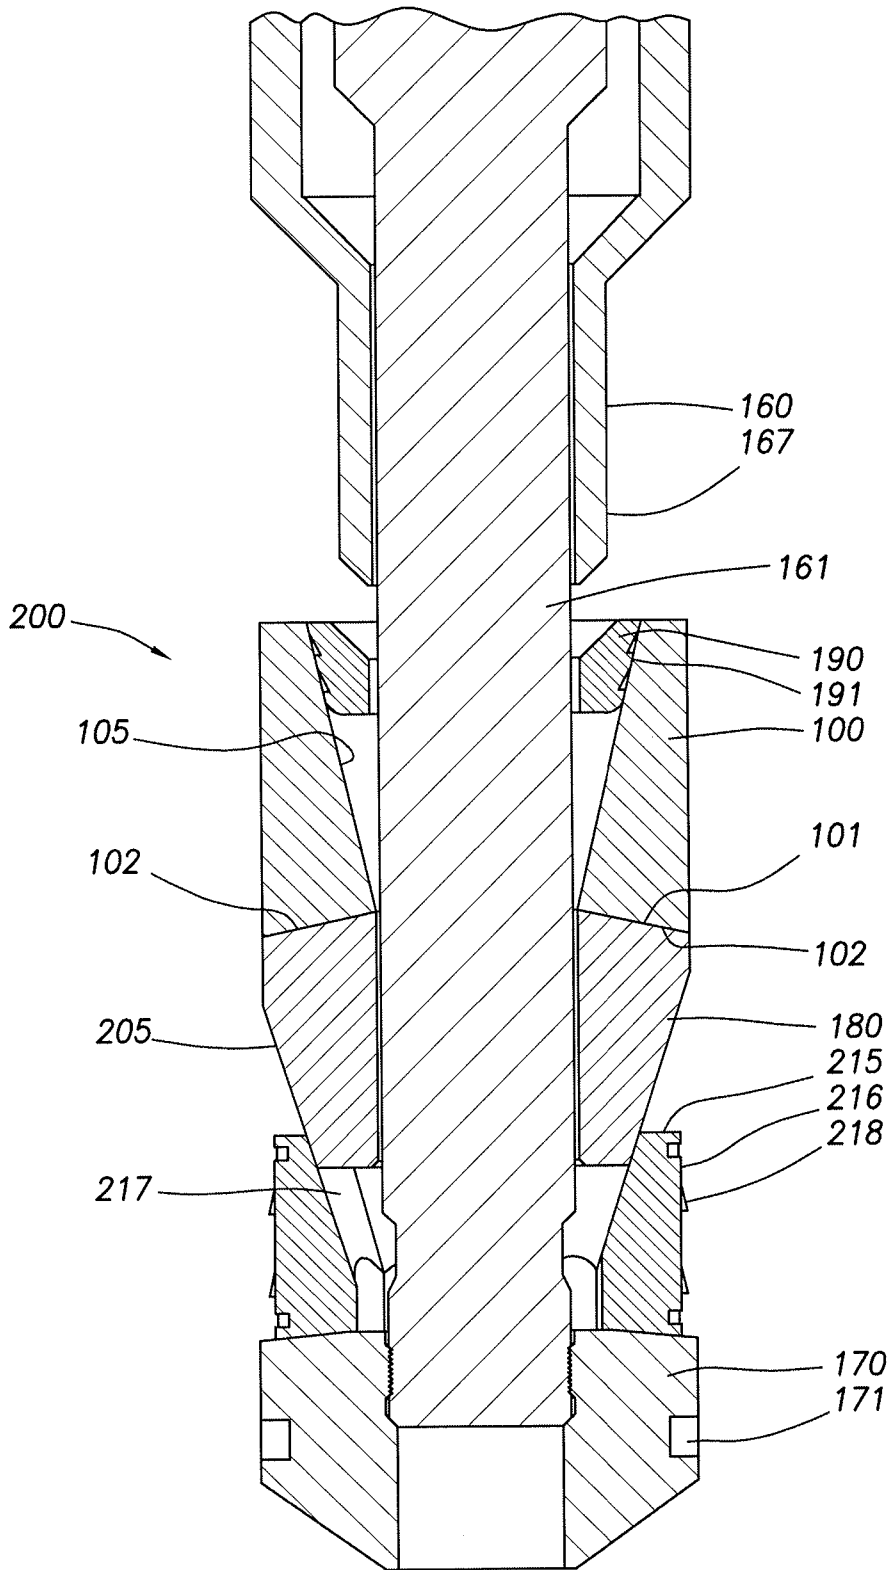


FIG. 9

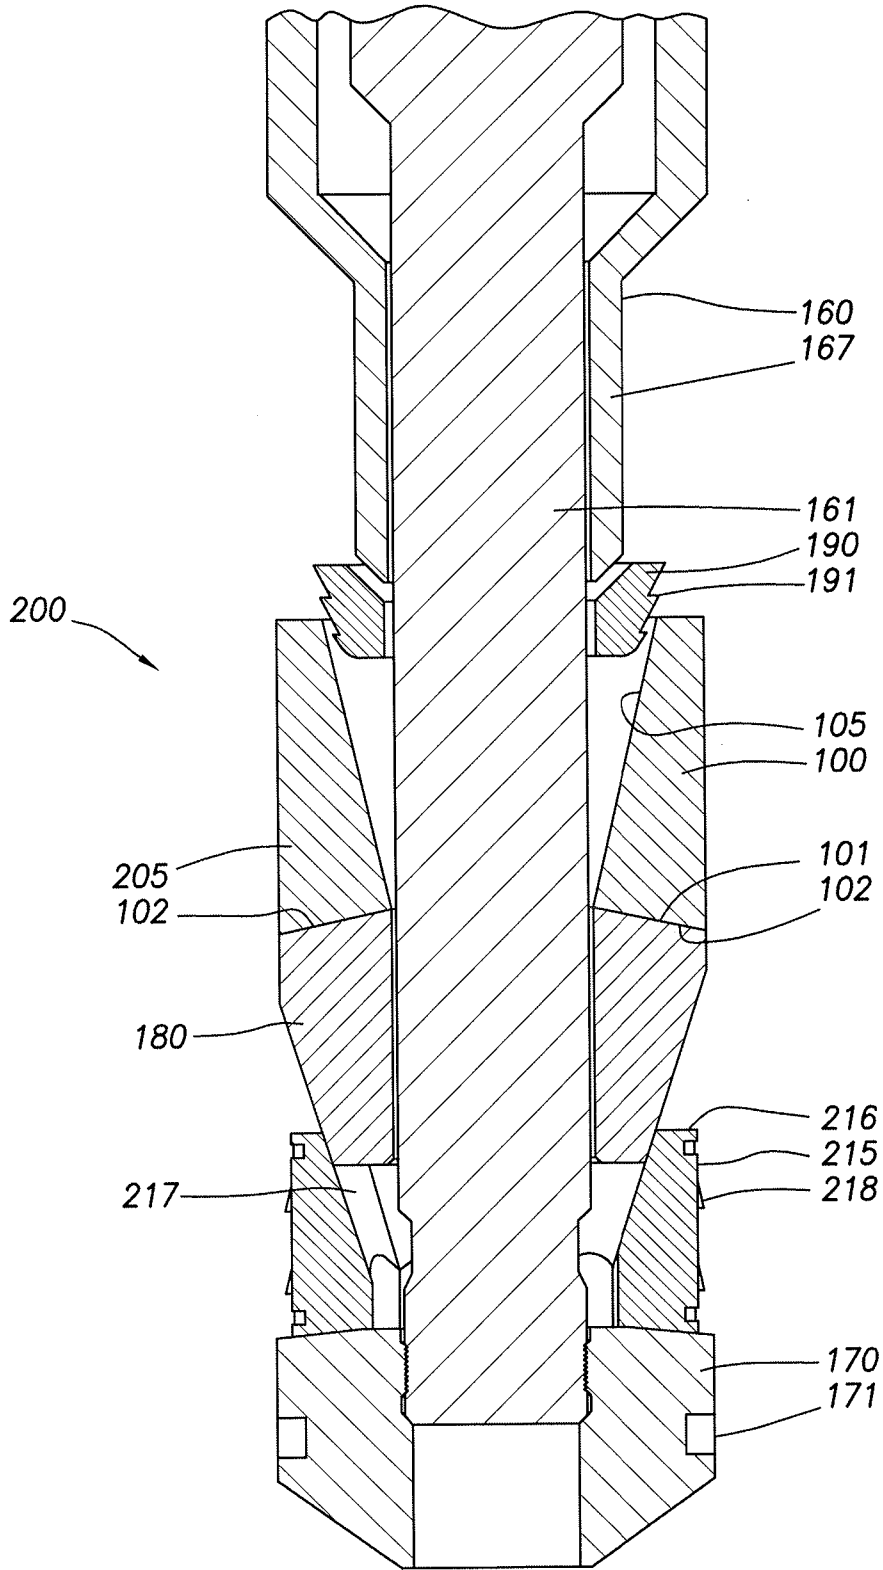


FIG. 10

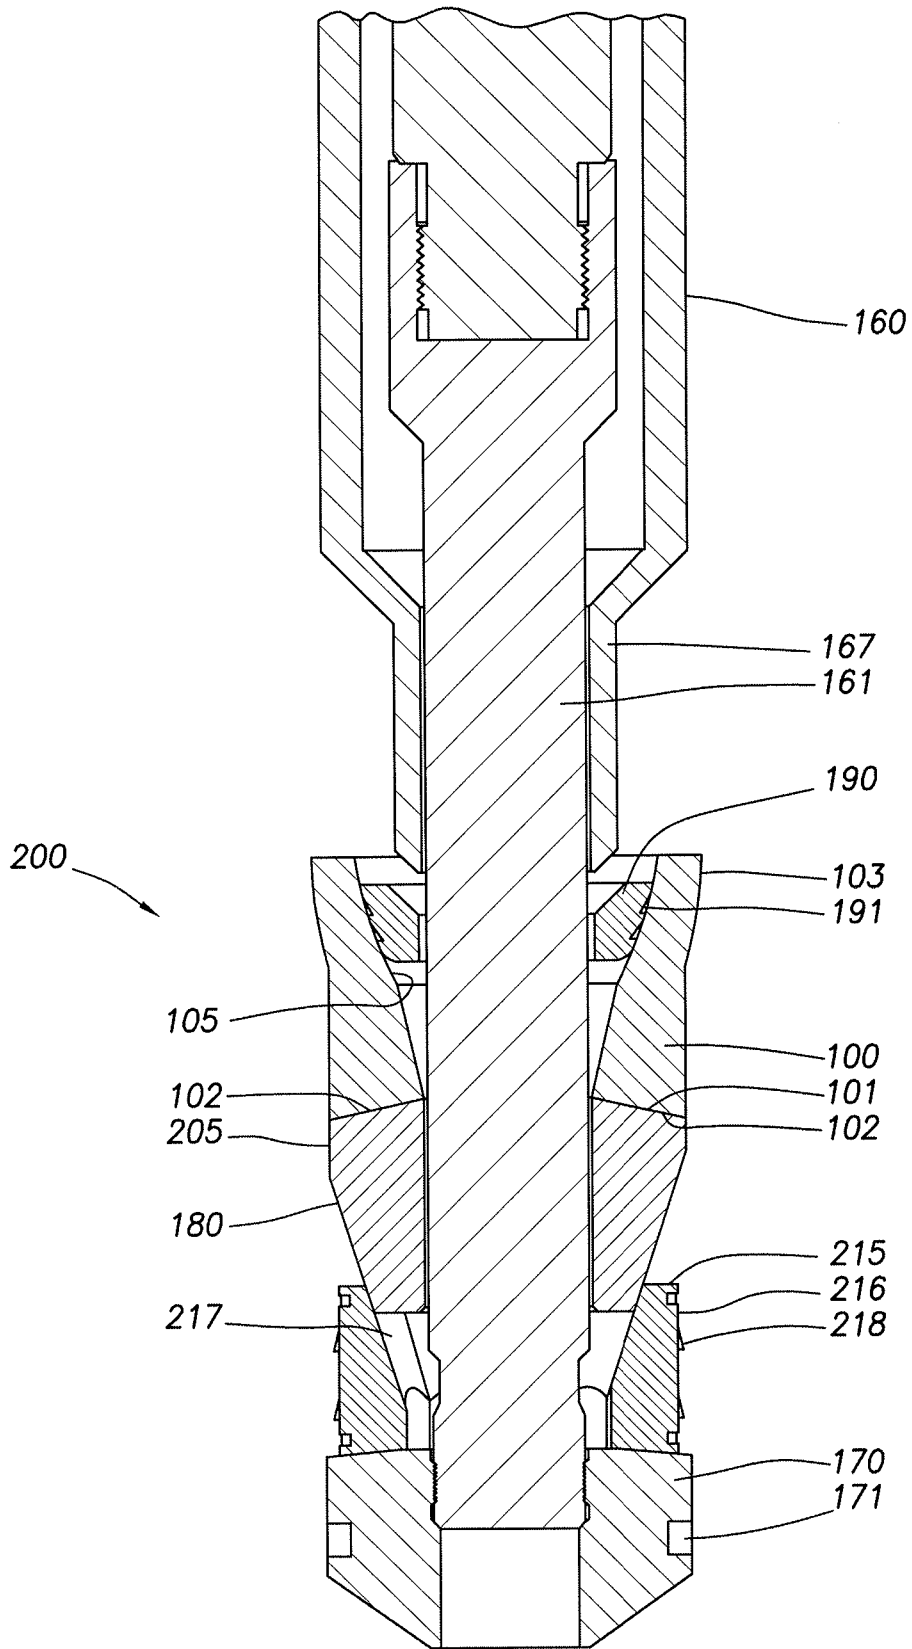


FIG. 11

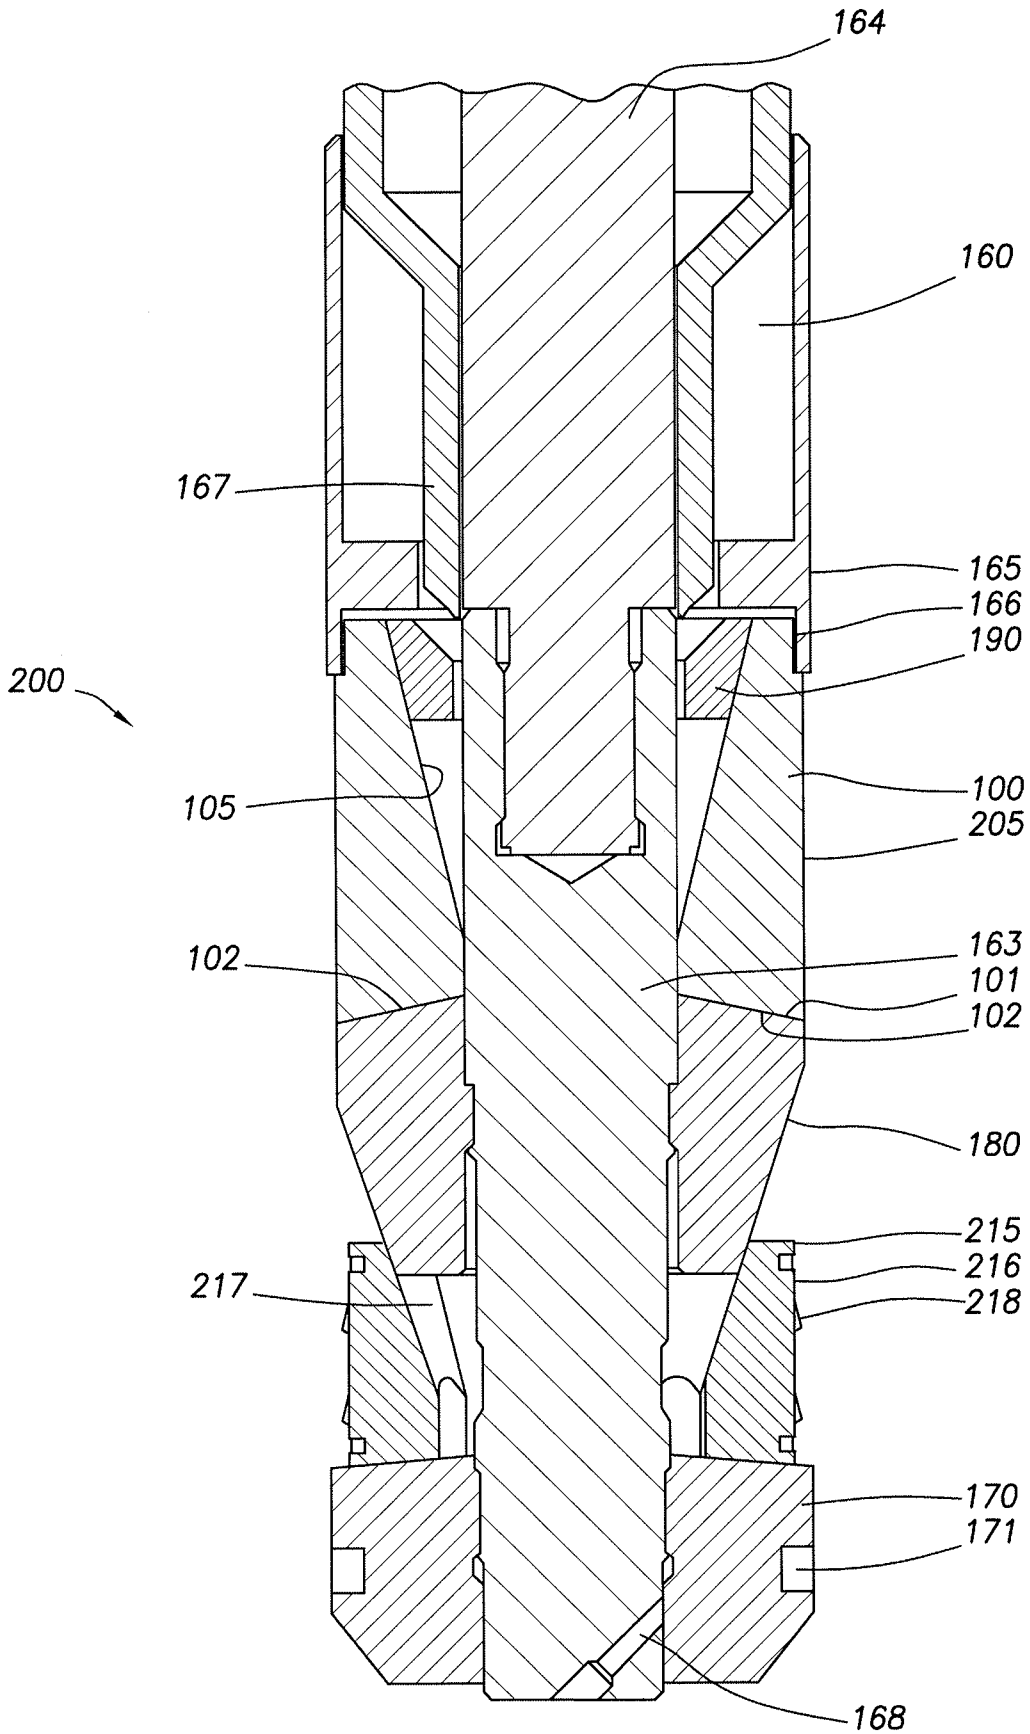


FIG. 12

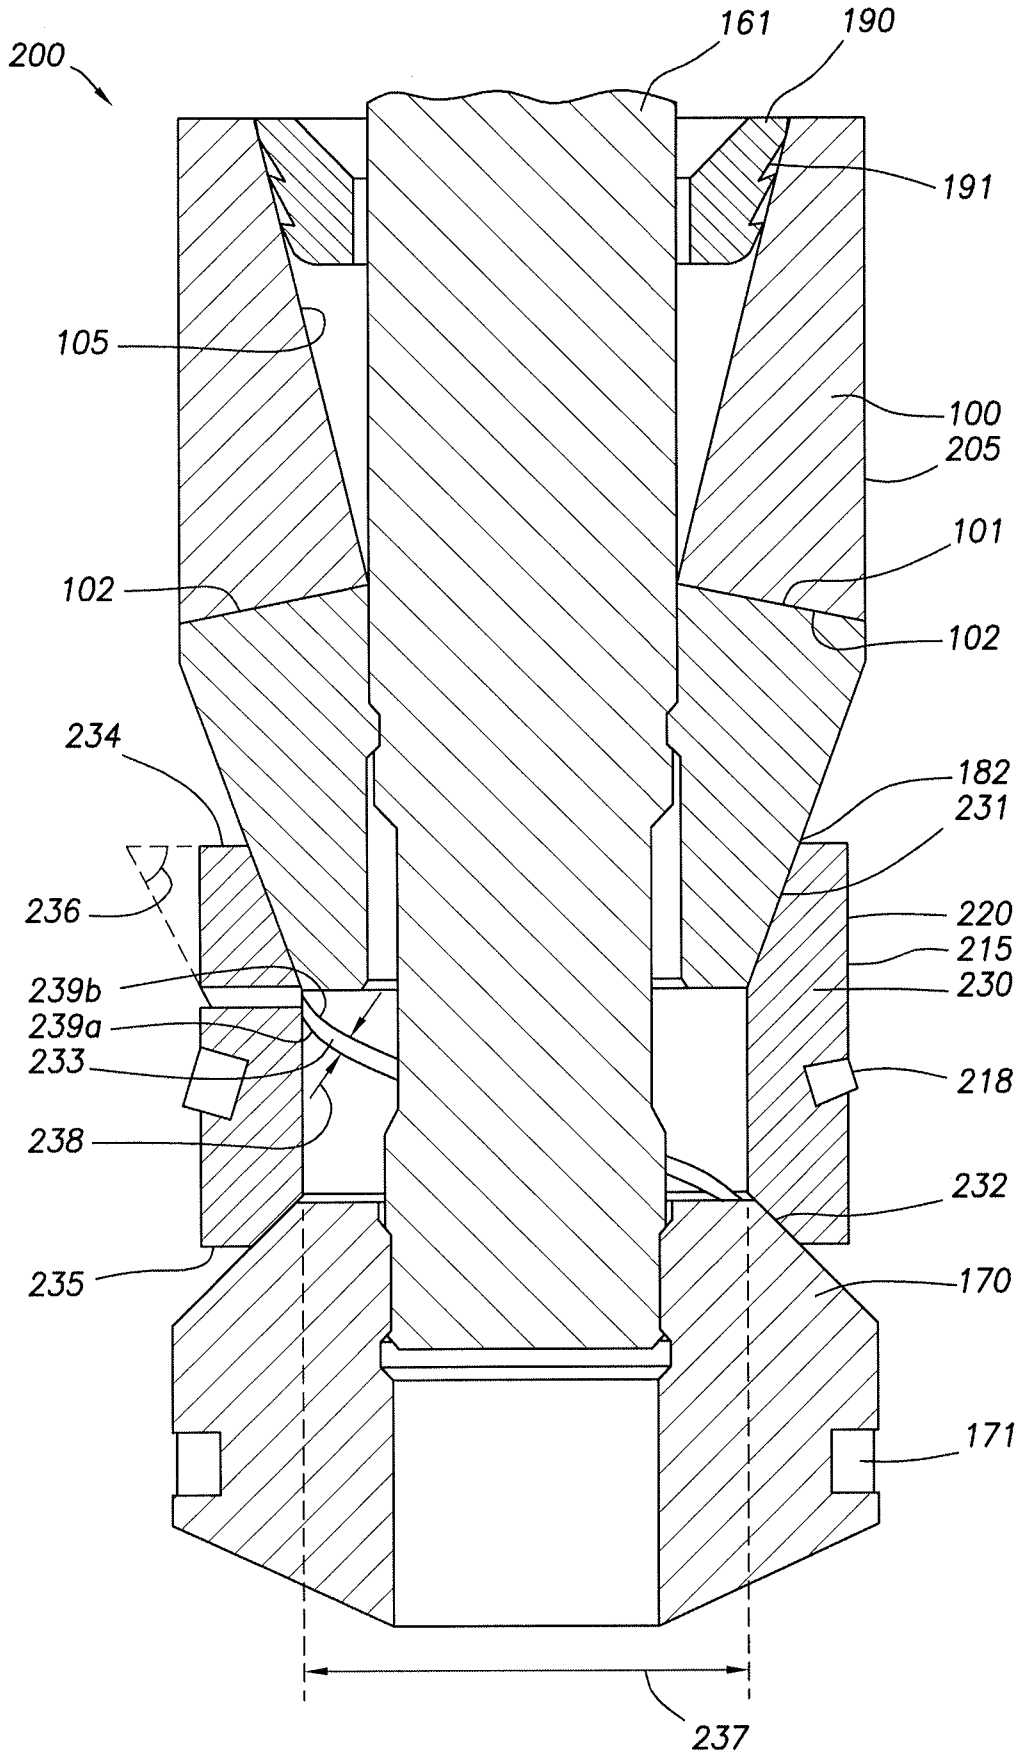


FIG. 15

