

**(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE**

(11) Application No. AU 2003281339 B2

(54) Title
Muntin bar elements for insulating glazing units

(51) International Patent Classification(s)
E06B 3/64 (2006.01) **E06B 3/663** (2006.01)
E06B 3/66 (2006.01)

(21) Application No: **2003281339** (22) Date of Filing: **2003.07.03**

(87) WIPO No: **WO04/005783**

(30) Priority Data

(31) Number
60/393,593 (32) Date
2002.07.03 (33) Country
US

(43) Publication Date: **2004.01.23**
(43) Publication Journal Date: **2004.03.11**
(44) Accepted Journal Date: **2009.10.29**

(71) Applicant(s)
Edgetech I.G., Inc

(72) Inventor(s)
Reichert, Gerhard

(74) Agent / Attorney
Phillips Ormonde Fitzpatrick, 367 Collins Street, Melbourne, VIC, 3000

(56) Related Art
US 5732517
US 5345743
US 6351923

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/005783 A3

(51) International Patent Classification⁷: E06B 3/66

(21) International Application Number: PCT/US2003/020965

(22) International Filing Date: 3 July 2003 (03.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 60/393,593 3 July 2002 (03.07.2002) US

(71) Applicant: EDGEYTECH I.G., INC [US/US]; 800 Cochran Avenue, Cambridge, OH 43725 (US).

(72) Inventor: REICHERT, Gerhard; 1230 Fillup Drive, SE, New Philadelphia, OH 44663 (US).

(74) Agents: ZOLLINGER, III, Fred, H. et al.; Sand & Sebolt, Suite 1100, Aegis Tower, 4940 Munson Street, NW, Canton, OH 44718-3615 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SI, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).



Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report: 2 September 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SPACER AND MUNTIN ELEMENTS FOR INSULATING GLAZING UNITS

WO 2004/005783 A3

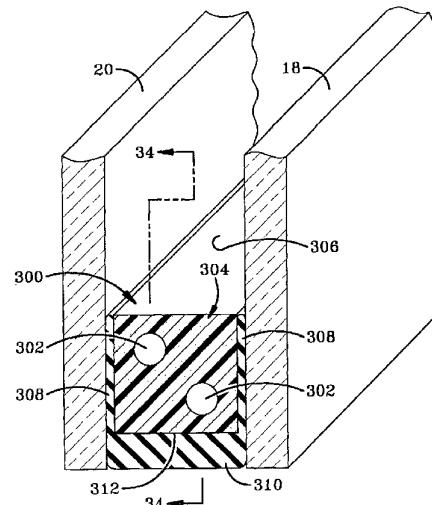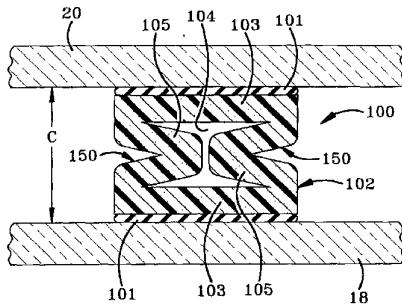

(57) Abstract: A muntin bar element (100) that is adapted to be connected to at least one muntin bar element (100) has a body (102) configuration that prevents the muntin bar element (100) from collapsing when rolled for storage. The muntin bar element (100) may also be attached to both panes (18 and 20) of glass and include an accommodation element (150) that allows the height of the muntin bar to adjust as the opposed panes (18 and 20) of glass move toward and away from each other. The application also discloses a spacer (300) having insulating cavities (302) wherein the spacer is fabricated from a foam material having a desicant.

MUNTIN BAR ELEMENTS FOR INSULATING GLAZING UNITS

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims priority from United States Provisional Application Number 60/393,593 filed July 3, 2002; the disclosures of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

1. Technical Field

This invention generally relates to insulating glazing units that may be used in windows and doors. More particularly, the present invention relates to the muntin elements of insulating glazing units. Specifically, the present invention relates to the structure of the muntin elements and the use of these elements within insulated glazing units.

2. Background Information

Traditional windows have individual panes of glass separated by wooden muntins. While these windows are attractive and have functioned for many years, they are relatively expensive to fabricate. The expense is particularly high when a consumer desires an insulating window having spaced panes of glass sealed together by a perimeter spacer. A single window having twelve panes of glass requires twelve spacers, twenty-four panes of glass, and a precisely formed muntin grid. In addition to the cost of materials, the assembly process is also relatively expensive. Thus, although consumers desire the aesthetic properties of traditional divided lite windows, most are unwilling to pay for a true divided lite window.

Insulating windows include at least two panes of glass separated by a spacer to form a sealed chamber that provides insulating properties. These

insulating windows are most efficiently manufactured with two large panes of glass separated by a single spacer disposed at the perimeter of the panes. Various solutions have been implemented to provide the divided lite appearance in insulating windows. One solution to the problem has been to place a muntin bar grid between the panes of glass. Another solution has been to place the muntin bar grid on the outer surface of one, or both, panes of glass.

A further solution is disclosed in US Patent 5,345,743 wherein three muntin elements are used to create a divide lite appearance. This structure uses an interior muntin bar element connected to one pane of glass and a pair of exterior muntin bar elements disposed on the outside of the glass. The exterior muntin bar elements are aligned with the interior muntin bar element to create the appearance of a traditional muntin bar.

A hollow prior art muntin bar element is disclosed in attached Figs. 1 and 2. This prior art muntin bar element had thin exterior walls that defined a large D-shaped cavity. This large D-shaped cavity is undesirable because it causes the muntin element to collapse upon itself and slides sideways when rolled for storage. This structure thus could not be rolled in a convenient form for storage and shipping. The structure also collapsed or slid at an angle when pressed onto the interior surface of the glass sheet detracting from the aesthetics of the muntin bar.

The discussion of documents, acts, materials, devices, articles and the like is included in this specification solely for the purpose of providing a context for the present invention. It is not suggested or represented that any or all of these matters formed part of the prior art base or were common general knowledge in the field relevant to the present invention as it existed before the priority date of each claim of this application.

Throughout the description and claims of this specification, the word "comprise" and variations of the word, such as "comprising" and "comprises", is not intended to exclude other additives, components, integers or steps.

SUMMARY OF THE INVENTION

According to the present invention there is provided a muntin bar element adapted to be disposed between opposed panes of glass in a glazing unit so as to divide an insulating chamber formed between the opposed panels into separate visual portions to provide a divided lite appearance to the glazing unit; the muntin bar element comprising: a body having a longitudinal direction; the body having opposed base walls separated by the height of the body; each base wall adapted to be disposed adjacent an interior surface of the glass panes; the body being fabricated from a foamed body material carrying a desiccant adapted to add a drying capacity to the muntin bar; the body defining at least one open insulating cavity surrounded by the body material when viewed in a cross section taken through the cavity perpendicular to the longitudinal direction of the body; the insulating cavity having a cross sectional area measured along a cross section taken through the cavity perpendicular to the longitudinal direction of the body; an adhesive disposed on at least one of the base walls; the adhesive adapted to connect the body to one of the opposed panes of glass; the base wall having the adhesive defining a body width; and the body material having a cross sectional area measured along a cross section taken through the cavity perpendicular to the longitudinal direction of the body; the cross sectional area of the body material being larger than the cross sectional area of the insulating cavity wherein the body is capable of being rolled into a roll for storage and shipping without the body being collapsed and then unrolled for application to the glass.

The invention further provides a muntin bar element adapted to be disposed between opposed panes of glass in a glazing unit so as to divide an insulating chamber formed between the opposed panels into separate visual portions to provide a divided lite appearance to the glazing unit; the muntin bar element comprising: a body having opposed base walls separated by the height of the body; each base wall adapted to be disposed adjacent an interior surface of the glass panes; the body including an accommodating element that permits that height of the body to adjust with the distance between the opposed panes of glass in the glazing unit.

BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1 and 2 show a prior art D-shaped muntin bar element.

Fig. 3 is a front elevation view of a prior art simulated divided lite window having an upper and lower muntin bar grid formed with two vertical and two 5 horizontal muntin bars.

Fig. 4 is a view similar to Fig. 3 showing a prior art window having an upper and lower muntin bar grid with each muntin bar grid being formed with two vertical and one horizontal muntin bar.

Fig. 5 is a sectional view taken along line 5-5 of Fig. 3 or Fig. 4.

10 Fig. 6 shows one embodiment of the invention wherein a muntin bar element 100 includes longitudinal openings.

Figs. 7A-7E show other embodiments of the muntin bar element of the invention.

Fig. 8 is a front view of an extrusion die used to form muntin bar element 15 100.

Fig. 9 is a side view of Fig. 8.

Fig. 10 shows another muntin bar element having a single opening; the bar element and opening having a different cross sectional shapes than the embodiments depicted in Figs. 7A-7E.

20 Fig. 11 shows another muntin bar element having a single opening; the bar element and opening having a different cross sectional shapes than the embodiment depicted in Fig. 7A-7E.

Fig. 12 shows a cross sectional view of another muntin bar element having opposed accommodating elements before adhesive is applied to the base 25 surfaces - the muntin bar element being formed with a height A; the body of the element being fabricated from a foam and may carry a desiccant.

Fig. 13 is a cross sectional view of the muntin bar element of Fig. 12 after adhesive is applied to the base surfaces.

Fig. 14 shows the muntin bar element applied to a first interior glass 30 surface.

Fig. 15 shows the second glass surface being installed and pressed down against the muntin bar element to securely attach the adhesive to the glass

surfaces - the muntin bar element being compressed to a thickness of B that is less than thickness A and A1; the structure of the muntin bar element preventing collapse and allowing for easy installation.

Fig. 16 shows the relaxed - or neutral pressure - position of the glazing unit 5 wherein the muntin bar element is compressed to have a height of C that is greater than B but less than A and A1 - the accommodating elements being slots that may expand when the glass sheets move apart from each other.

Fig. 17 shows an alternative embodiment of the muntin bar element having different accommodating elements - the element being slightly compressed in Fig. 10 17 with the glass at a neutral pressure condition; the structure of the muntin bar element preventing collapse and allowing for easy installation.

Fig. 18 shows the expanded condition of the muntin bar element of Fig. 14 such that B is greater than A.

Fig. 19 shows a cross sectional view of another muntin bar element having 15 opposed accommodating elements before adhesive is applied to the base surfaces - the muntin bar element being formed with a height A; the body of the element being fabricated from a foam and may carry a desiccant.

Fig. 20 is a cross sectional view of the muntin bar element of Fig. 19 after adhesive is applied to the base surfaces.

20 Fig. 21 shows the glass sheets being installed and pressed down against the muntin bar element to securely attach the adhesive to the glass surfaces - the muntin bar element being compressed to a thickness of B that is less than thickness A and A1; the structure of the muntin bar element preventing collapse and allowing for easy installation.

25 Fig. 22 shows the relaxed - or neutral pressure - position of the glazing unit wherein the muntin bar element is compressed to have a height of C that is greater than B but less than A and A1 - the accommodating elements being slots that may expand when the glass sheets move apart from each other.

Fig. 23 shows an alternative embodiment of the muntin bar element having 30 different accommodating elements - the element being slightly compressed in Fig. 23 with the glass at a neutral pressure condition; the structure of the muntin bar element preventing collapse and allowing for easy installation.

Fig. 24 shows the expanded condition of the muntin bar element of Fig. 23 such that B is greater than A.

Fig. 25 shows an alternative embodiment of the muntin bar element having different accommodating elements - the element being slightly compressed in Fig. 5 25 with the glass at a neutral pressure condition; the structure of the muntin bar element preventing collapse and allowing for easy installation.

Fig. 26 shows the expanded condition of the muntin bar element of Fig. 26 such that B is greater than A.

Fig. 27 shows an alternative embodiment of the muntin bar element having 10 different accommodating elements - the element being slightly compressed in Fig. 27 with the glass at a neutral pressure condition; the structure of the muntin bar element preventing collapse and allowing for easy installation.

Fig. 28 shows the expanded condition of the muntin bar element of Fig. 27 such that B is greater than A.

15 Fig. 29 shows an alternative embodiment of the muntin bar element having different accommodating elements - the element being slightly compressed in Fig. 29 with the glass at a neutral pressure condition; the structure of the muntin bar element preventing collapse and allowing for easy installation.

Fig. 30 shows the expanded condition of the muntin bar element of Fig. 29 20 such that B is greater than A.

Fig. 31 shows a spacer having an insulating cavity disposed longitudinally within the body of the spacer; the body of the spacer being fabricated from a foam material that carries a desiccant material.

Fig. 32 shows a spacer having a pair of insulating cavities disposed 25 longitudinally within the body of the spacer; the body of the spacer being fabricated from a foam material that carries a desiccant material.

Fig. 33 shows a spacer having a pair of insulating cavities disposed longitudinally within the body of the spacer; the body of the spacer being fabricated from a foam material that carries a desiccant material.

30 Fig. 34 is a section view taken along line 34-34 of Fig. 30.

Fig. 35 shows a spacer having six insulating cavities disposed longitudinally within the body of the spacer; the body of the spacer being fabricated from a foam

material that carries a desiccant material.

Fig. 36 is a section view taken along line 36-36 of Fig. 35.

Fig. 37 shows a spacer having spaced insulating cavities disposed longitudinally within the body of the spacer; the body of the spacer being fabricated 5 from a foam material that carries a desiccant material.

Fig. 38 is a section view taken along line 38-38 of Fig. 37.

Similar numbers refer to similar parts throughout the specification.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Prior art windows having simulated divided lite muntin bar grids are indicated generally by the numerals 10 and 12 in Figs. 3 and 4, respectively. Window 10 provides an example of where insulating glazing units 14 and 16 may 5 be used. Insulating glazing units may also be built into doors for building or appliances. Each insulating glazing unit 14 and 16 includes a pair of glass panes or sheets 18 and 20 that are spaced apart by a perimeter spacer having a desiccant matrix.

The prior art simulated divided lite muntin grid of Fig. 5 depicts an example 10 where the internal muntin bar elements 30,32 are not attached to the interior surfaces of panes 18 or 20.

All of the different embodiments of the muntin bar elements of the invention are indicated generally by the numeral 100. Each embodiment has different characteristics that are separately described while many embodiments share 15 features. The same numerals have been used to described common features in different embodiments where practical.

A first embodiment of an internal muntin bar element is indicated generally by the numeral 100 in Fig 6. Muntin bar element 100 is intended to be directly attached to one of glass sheets 18 or 20 by an appropriate adhesive 101 in the 20 manner taught in US Patent 5,345,743, the disclosures of which are incorporated herein by reference. Adhesive 101 may be applied to body 102 when body 102 is fabricated. Adhesive 101 is then protected with a cover that is peeled away before body 102 is attached to glass sheet 18 or 20. The protective cover also allows body 102 to be rolled for storage and shipping. In each of the embodiments 25 described herein, body 102 is preferably fabricated from a flexible foam material such as any of those foams known to those skilled in the art of foam spacers. Body 102 may also carry a desiccant to add drying capacity to the muntin grid.

Body 102 includes a pair of spaced base walls 103 with at least one that is adapted to connect with the glass sheet 18 or 20. In some of the embodiments 30 disclosed below, body 102 is adapted to connect with both glass sheets 18 and 20 at both base walls 103. Body 102 includes sidewalls 105 that define the height of body 102 and connect base walls 103.

Muntin bar element 100 includes a body 102 that defines at least one

insulating cavity 104. When muntin bar elements 100 touch both sheets of glass 18 and 20, they act as a thermal bridge that transfers energy across the glazing unit. Insulating cavity 104 reduce the effectiveness of the thermal bridge. Insulating cavity 104 extends longitudinally and continuously through body 102.

5 In the embodiment depicted in Fig. 4, body 102 defines three insulating cavities 104. Each cavity 104 has a width or diameter that is equal to or less than the distance that separates one cavity 104 from another cavity 104. The intermediate body portions 106 disposed between cavities 104 provide structural support to body 102 and allow body 102 to be rolled onto itself for storage and shipping. A 10 variety of other configurations for muntin bar elements 100 are depicted in Figs. 7A-7E and 10-11 similar numbers are used to refer to similar parts in these drawings. In these embodiments, cavities 104 and intermediate body portions 106 are disposed in different arrangements with intermediate body portions 106 preferably being larger than the widths or diameters of cavities 104. In other 15 embodiments, cavities 104 may be wider than portions 106. Figs. 8 and 9 depicted an exemplary extrusion die 109 that may be used to form body 102.

Body 102 is designed to be rolled for storage and shipping without causing body 102 to collapse. When the cross section of body 102 is rectangular, the longer side of the rectangle is parallel to the axis about which element 100 is 20 rolled. Square cross sections may be rolled in either direction although the feet 108 (described below) preferably extend out the side of the roll when the cross section is square. In order to prevent the collapse of body 102 when body 102 is rolled, the cross sectional area of body 102 is preferably larger than the cross sectional area of insulating cavity 104 or the combined cross sectional areas of 25 cavities 104. The cross sectional area of the body only includes the solid portions of body 102 and not the area occupied by the insulating cavities. This relationship between body 102 and cavity 104 allows body 102 to be rolled without significantly changing its exterior dimensions so that the roll of element 100 does not collapse sideways.

30 Body 102 may also include flexible feet 108 that engage the glass sheet opposite adhesive 101. Feet 108 are designed to collapse as shown in prior art US patent 5,345,743 such that body 102 has expanded and collapsed conditions.

Two additional embodiments of muntin element 100 are disclosed in Figs.

10 and 11 wherein the cross-sectional shape of the cavity is rectangular.

Another embodiment of internal muntin bar element 100 is depicted in Figs. 12-16. Muntin bar element 100 is movable between collapsed (Fig. 15) and expanded (Fig. 14) positions so that it may be connected to each glass sheet 18 5 and 20. Glass sheets 18 and 20 will "pump" in response to pressure and temperature changes. Glass sheets 18 and 20 will also "pump" in response to gusts of wind. Sheets 18 and 20 "pump" by moving back and forth with respect to each other. This "pumping" action causes prior art muntin bar elements that are attached to both sheets 18 and 20 to delaminate from one of glass sheets 18 or 10 20 which ruins the appearance of the insulating glazing unit.

Internal muntin bar element 100 includes a pair of accommodating elements 150 that allow body 102 to accommodate the different spaces between glass sheets 18 and 20 without delaminating base walls 103 from glass sheets 18 and 20. In the embodiment of muntin bar element 100 depicted in Figs. 12-16, 15 accommodating elements 150 are in the form of a single corrugation defined by each sidewall 105 of body 102 or a portion of one sidewall 105 and one base wall 103. In Figs. 12-16, the corrugation is V-shaped. In the context of this patent application, the term "corrugation" refers to a V or U shaped cross-sectional shape of sidewall 105. In the embodiment of the invention depicted in Fig. 16, 20 accommodating element 150 is a single corrugation extending between base walls 103 in each sidewall 105. In the embodiment of Fig. 17, the accommodating element 150 is a U-shaped corrugation that has a squared inner end. In the embodiment of Fig. 22, a pair of spaced single corrugations are disposed between portions of sidewalls 105 and each base wall 103. In the embodiment of Fig. 23, 25 each accommodating element 150 is a single rounded U-shaped corrugation. In the embodiment of Fig. 25, a plurality of corrugations define the accommodating element.

In each of the embodiments described above and shown in Figs. 12-26, accommodating elements 150 allow the height of body 102 to automatically adjust 30 as glass plates 18 and 20 move toward each other and apart from each other.

In the embodiment of the invention depicted in Figs. 12-16, body 102 is formed in the shape depicted in Fig. 12 having a height of A. Body 102 may be formed by extrusion. Adhesive 101 is then added to base walls 103. The total

height of body 102 with adhesive 101 is defined as A1. Adhesive 101 may also be co-extruded with body 102. Body 102 with adhesive layers 101 are then added to glass sheet 18 as depicted in Fig. 14. The user applies elements 100 in the desired muntin bar pattern. The user then applies glass sheet 20 as depicted in 5 Fig. 15 and presses downwardly as shown by the arrows to securely attach glass sheets 18 and 20 to adhesive 101. When this pressure is applied, body 102 collapses to have a height of B and is in its fully collapsed position. Fig. 16 shows the completed glazing unit assembly (in section) with body 102 in its resting position. The resting position of body 102 has a height that is between its fully 10 extended height and fully collapsed height so that body 102 may accommodate glass movement in either direction (toward or away from each other). The resting height of body 102 is indicated by the letter C. Dimension C is greater than dimension B but less than dimension A1.

In the embodiment of the invention depicted in Figs. 12-16, each 15 accommodating element 150 is designed so that the inner ends of the corrugations engage each other when body 102 is in the collapsed position as depicted in Fig. 15. This configuration also closes the outer slots of the corrugations so that body 102 may be rolled for storage in the collapsed configuration.

20 The embodiment of the invention depicted in Figs. 17 and 18 show an alternative embodiment of accommodating element 150 wherein the inner surface of each corrugation abuts the other inner surface of the corrugation when body 102 is in the collapsed position as depicted in Fig. 17. As such, the collapsed position of body 102 fully closes cavity 104 as shown in Fig. 17. Fig. 18 shows the 25 fully expanded position wherein sidewalls 105 are substantially straight and the cross section of body 102 is substantially rectangular. Each sidewall 105 is intentionally weakened at the hinges of walls 105 so that walls 105 will collapse inwardly when moved from the expanded position of Fig. 18 towards the collapsed position of Fig. 17. The weakened areas may be formed thinner than the 30 remaining portions of wall 105. The weaken areas may also be slit to create weakened hinges. In the embodiment of Fig. 17 and 18, dimension B is larger than dimension A.

The embodiment of muntin bar element 100 depicted in Figs. 19-22 is

similar to the embodiment depicted in Figs. 12-16 wherein the resting position of body 102 is depicted in Fig. 22 having a height of C. In this embodiment, the fully collapsed position is depicted in Fig. 21 wherein each corrugation 150 is collapsed so that body 102 has a height of B. The expanded position is not specifically shown but would have a height of at least A1. In this embodiment, each accommodating element 150 is defined by a portion of sidewall 105 and a portion of base wall 103. An intermediate portion of sidewall 105 is disposed between opposed pairs of accommodating elements 150. Body 102 has four accommodating elements 150. Body 102 is designed so that cavity 104 does not fully collapse and muntin bar element 100 retains its insulating cavity even when body 102 is in the fully collapsed position.

Another embodiment of muntin bar 100 is depicted in Figs. 23 and 24 wherein accommodating elements 150 are U-shaped. The collapsed position is depicted Fig. 23 with the expanded position depicted in Fig. 24. In the collapsed position, walls 105 collapse inwardly but do not engage each other so that insulating cavity 104 remains open and effective. In alternative embodiments, walls 105 may collapse inwardly until they engage each other. In this condition, cavity 104 will be divided into two cavities. In the expanded position depicted in Fig. 24, accommodating elements 150 are straight and body 102 is substantially rectangular in cross-section.

In the embodiment of muntin bar element 100 depicted in Figs. 25 and 26, accommodating elements 150 are a plurality of corrugations joined end to end. The corrugations may be U-shaped or V-shaped in this embodiment. Elements 150 are sized to retain insulating cavity 104 when in the collapsed position as depicted in Fig. 25. In this embodiment, as with the other embodiments described above, corrugations 150 may be alternatively sized to collapse against each other to form a solid section of material when body 102 is

fully collapsed. Fig. 26 depicts the expanded condition of body 102 wherein each corrugation 150 is spread apart.

An alternative embodiment of muntin bar 100 is depicted in Figs. 27 and 28. In this embodiment, body 102 defines slits 152 that function as the accommodating elements of body 102. Slits 152 extend inwardly from the outer surface of each sidewall 105 to allow body 102 to spread apart and accommodate distance changes between glass sheets 18 and 20 as depicted in Fig. 28. Slits 152 overlap as shown in Figs. 27-28 such that there is no straight path through body 102 from one glass sheet 18 to the other glass sheet 20 without passing through a slit 152. In the embodiment of the invention depicted in Figs. 27 and 28, two slits 152 extend inwardly from one sidewall 105 with a single slit 152 extending inwardly from the other sidewall 105. In the embodiment of the invention depicted in Figs. 29 and 30, a single slit 152 extends inwardly from each sidewall 105.

Different embodiments of the spacer of the present invention are indicated generally by the numeral 300 in Figs. 31-38. Spacers 300 each have at least one insulating cavity 302 that is defined by the body 304 of spacer 300. As shown in the drawings, each spacer 300 is designed to be disposed slightly inwardly of the outer edge of glass sheets 18 and 20 to define a sealant channel intermediate glass sheets 18 and 20 and the outwardly facing surface 312 of spacer 300. Spacers 300 maintain an insulating chamber 306 between glass sheets 18 and 20. Each spacer 300 is connected to glass sheets 18 and 20 with an appropriate adhesive 308 and a sealant 310 that is disposed in the sealant channel. Sealant 310 prevents air from passing into or escaping from insulating chamber 306. Sealant 310 in combination with spacer 300 thus seals chamber 306 and provides an insulating property to the insulating glazing unit.

One drawback with spacers in general is that they provide a thermal bridge directly between glass sheets 18 and 20 that allow thermal energy to pass from the outside of a building to the inside of a building. Various solutions exist in the art for minimizing the negative influence of this thermal bridge. In the

present invention, spacers 300 include insulating cavities 302 that are filled with air disposed at the same pressure and temperature as insulating chamber 306. Cavities 302 reduce the effectiveness of the thermal bridge and provide better insulating properties to spacer 300.

In Fig. 31, body 304 defines a single centralized insulating cavity 302 that extends continuously and longitudinally within body 304. In Fig. 32, body 304 defines a pair of spaced insulating cavities 302 that extend longitudinally and continuously within body 304. Cavities 302 are separated by an intermediate body portion 314 that has a width greater than the diameter of either cavity 302. In Fig. 33, body 304 defines a pair of insulating cavities 302 that extend continuously and longitudinally within body 304. In the embodiment of Fig. 33, cavities 302 are disposed at different heights within body 304. Fig. 35 shows an embodiment wherein body 304 defines $s \times$ cavities 302 arranged in a matrix of two wide by three deep.

Figs. 37 and 38 depict an embodiment of spacer 300 wherein insulating cavities 302 are noncontinuously disposed within body 304. Although this embodiment does not have the thermal insulating properties of the embodiments described above, it is more structurally sound because body 304 includes supports 320 that are spaced longitudinally throughout body 304.

In each of the embodiments described above, body 304 is preferably fabricated from a foam material that carries a desiccant. In each of the embodiments, a moisture/vapor barrier may be applied to the three outwardly facing sides of body 304 to help seal chamber 306.

In the foregoing description, certain terms have been used for brevity, clearness, and understanding. No unnecessary limitations are to be implied therefrom beyond the requirement of the prior art because such terms are used for descriptive purposes and are intended to be broadly construed.

Moreover, the description and illustration of the invention is an example and the invention is not limited to the exact details shown or described.

CLAIMS

1. A muntin bar element adapted to be disposed between opposed panes of glass in a glazing unit so as to divide an insulating chamber formed between the opposed panes into separate visual portions to provide a divided lite appearance to the glazing unit; the muntin bar element comprising:
 - a body having a longitudinal direction; the body having opposed base walls separated by the height of the body; each base wall adapted to be disposed adjacent an interior surface of the glass panes;
 - the body being fabricated from a foamed body material carrying a desiccant adapted to add a drying capacity to the muntin bar;
 - the body defining at least one open insulating cavity surrounded by the body material when viewed in a cross section taken through the cavity perpendicular to the longitudinal direction of the body; the insulating cavity having a cross sectional area measured along a cross section taken through the cavity perpendicular to the longitudinal direction of the body;
 - an adhesive disposed on at least one of the base walls; the adhesive adapted to connect the body to one of the opposed panes of glass;
 - the base wall having the adhesive defining a body width; and
 - the body material having a cross sectional area measured along a cross section taken through the cavity perpendicular to the longitudinal direction of the body; the cross sectional area of the body material being larger than the cross sectional area of the insulating cavity wherein the body is capable of being rolled into a roll for storage and shipping without the body being collapsed and then unrolled for application to the glass.
2. The muntin bar element of claim 1, wherein the insulating cavity is elongated in the longitudinal direction.
3. The muntin bar element of claim 2, wherein the insulating cavity is continuous in the longitudinal direction.

4. The muntin bar element of claim 2, wherein the body defines a plurality of insulating cavities; each of the insulating cavities being elongated in the longitudinal direction.
5. The muntin bar element of claim 4, wherein the insulating cavities are spaced from one another.
6. The muntin bar element of claim 5, wherein each insulating cavity has a width; the space between the insulating cavities being equal to or greater than the width of either insulating cavity.
7. The muntin bar element of claim 1, wherein the body includes accommodating elements.
8. The muntin bar element of claim 7, wherein the accommodating elements are slits defined by the body; the slits extending inwardly from opposite sides of the body.
9. The muntin bar element of claim 7, wherein the accommodating elements include at least one corrugation.
10. The muntin bar element of claim 9, wherein the accommodating elements include a plurality of corrugations.
11. The muntin bar element of claim 1, further comprising an adhesive disposed on the other of the base walls; the adhesive adapted to connect the body to the other of the opposed panes of glass.
12. A muntin bar element adapted to be disposed between opposed panes of glass in a glazing unit so as to divide an insulating chamber formed between the

opposed panes into separate visual portions to provide a divided lite appearance to the glazing unit; the muntin bar element comprising:

 a body having opposed base walls separated by the height of the body; each base wall adapted to be disposed adjacent an interior surface of the glass panes;

 the body including an accommodating element that permits that height of the body to adjust with the distance between the opposed panes of glass in the glazing unit; and

 an adhesive disposed on both base walls; the adhesive adapted to connect the base wall to the adjacent pane of glass.

13. The muntin bar element of claim 12, wherein the accommodating element is a slit defined by the body.

14. The muntin bar element of claim 12, wherein the accommodating element includes at least one corrugation.

15. The muntin bar element of claim 14, wherein the accommodating element includes a plurality of corrugations.

16. The muntin bar element of claim 15, wherein the body defines a longitudinal cavity.

17. The muntin bar element of claim 16, wherein the corrugations allows the body to move between expanded and collapsed positions; the collapsed position of the body closing the longitudinal cavity.

18. The muntin bar element of claim 12, wherein the body defines a longitudinal cavity.

19. The muntin bar element of claim 1, wherein the body width is greater than the body height.

20. A muntin bar element substantially as hereinbefore described with reference to Figures 6 to 38.

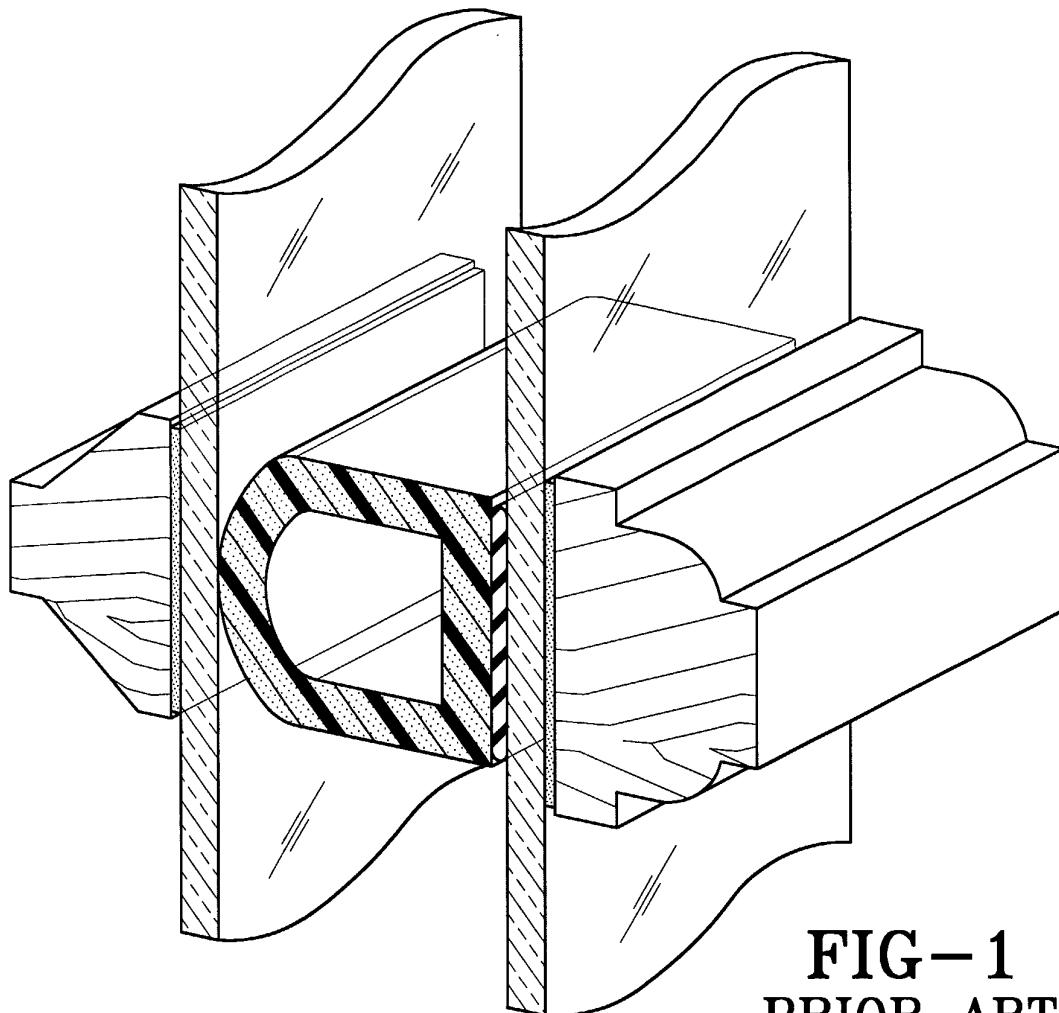


FIG-1
PRIOR ART




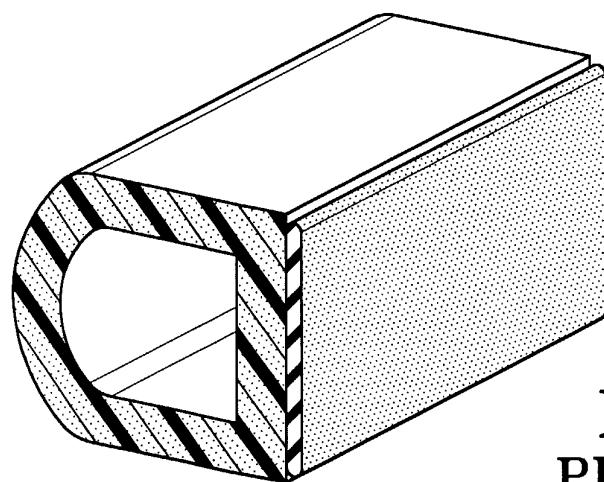


FIG-2
PRIOR ART

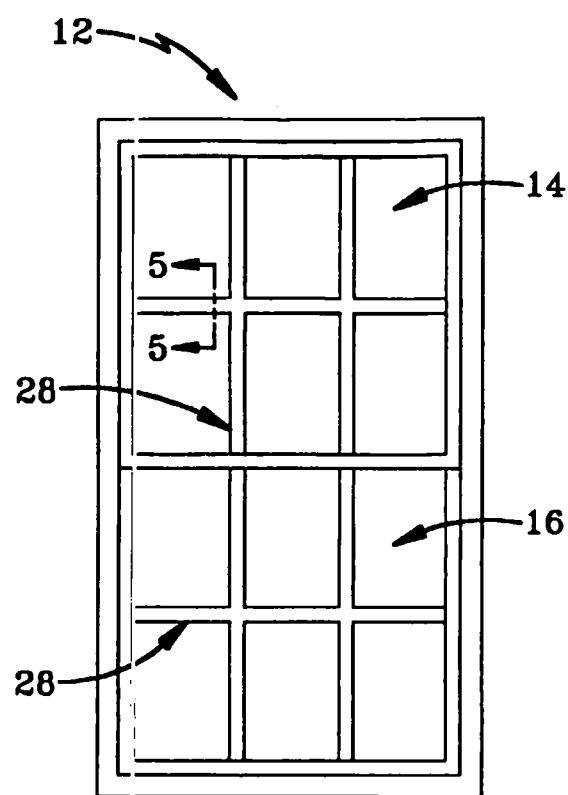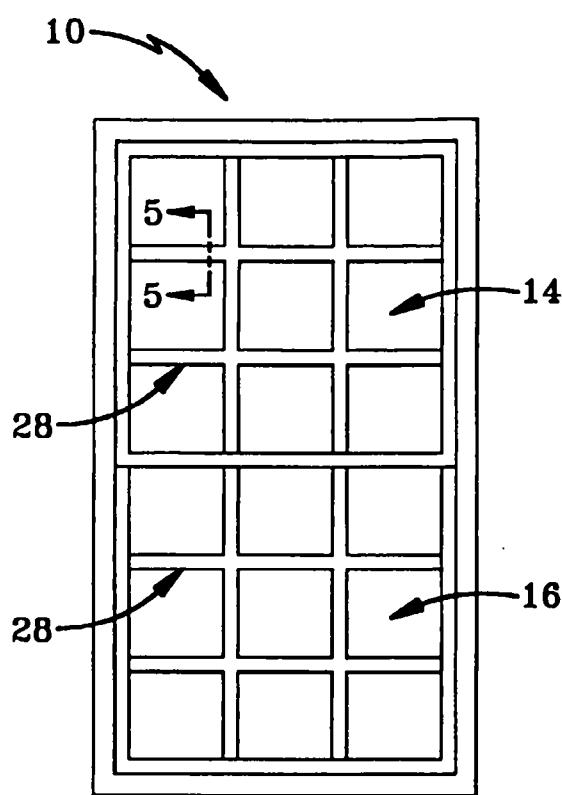

PRIOR ART

PRIOR ART

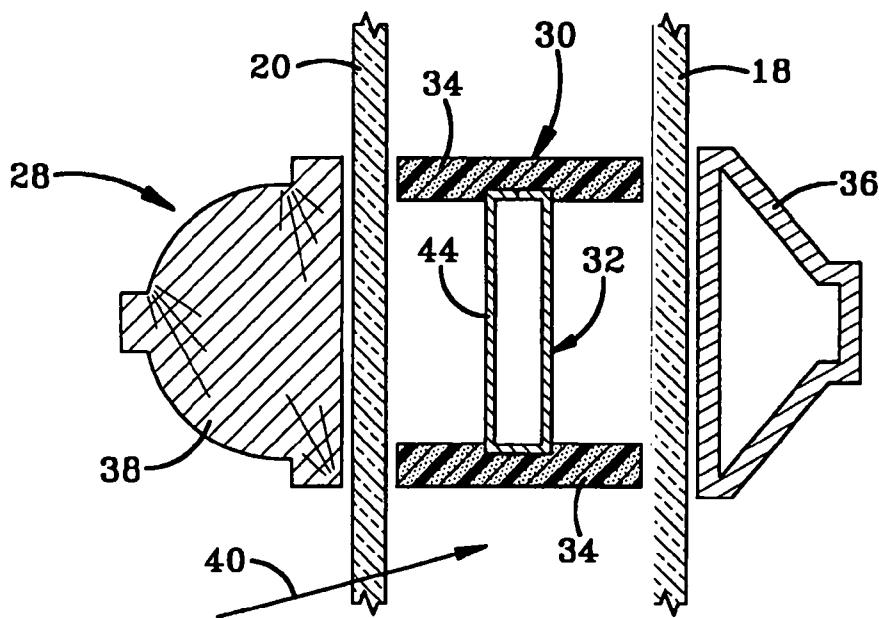

PRIOR ART

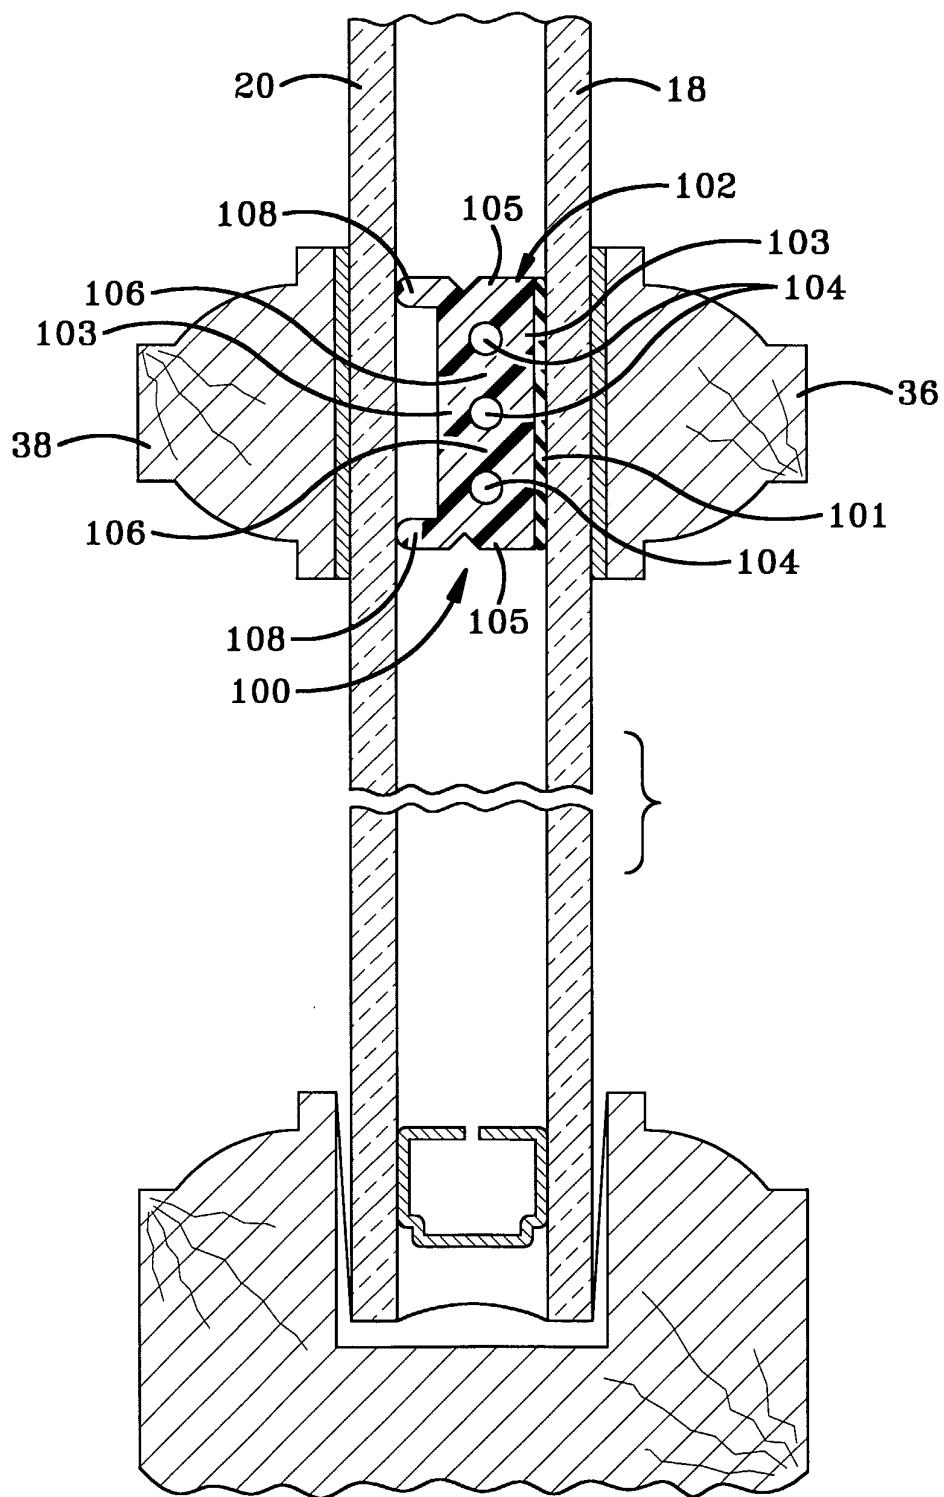


FIG-6

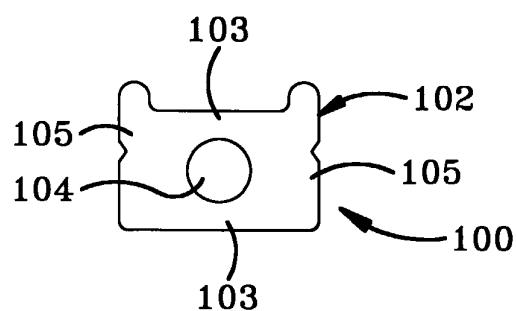


FIG-7A

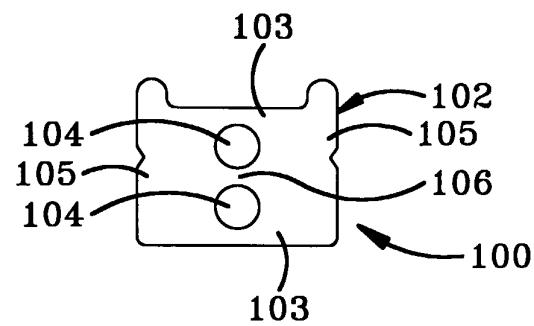


FIG-7B

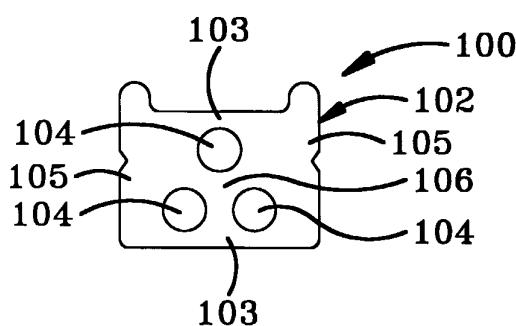


FIG-7C

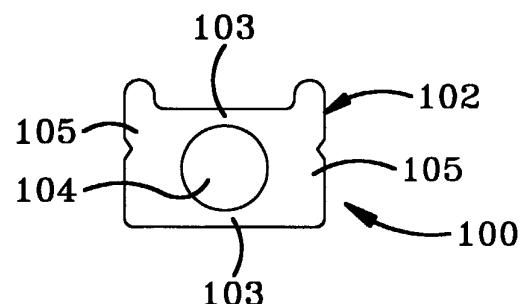


FIG-7D



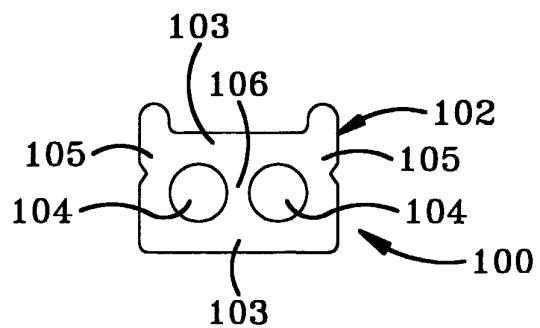


FIG-7E

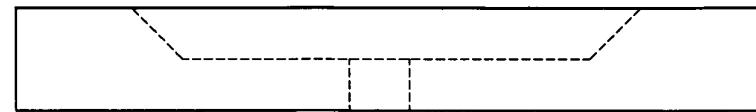

109

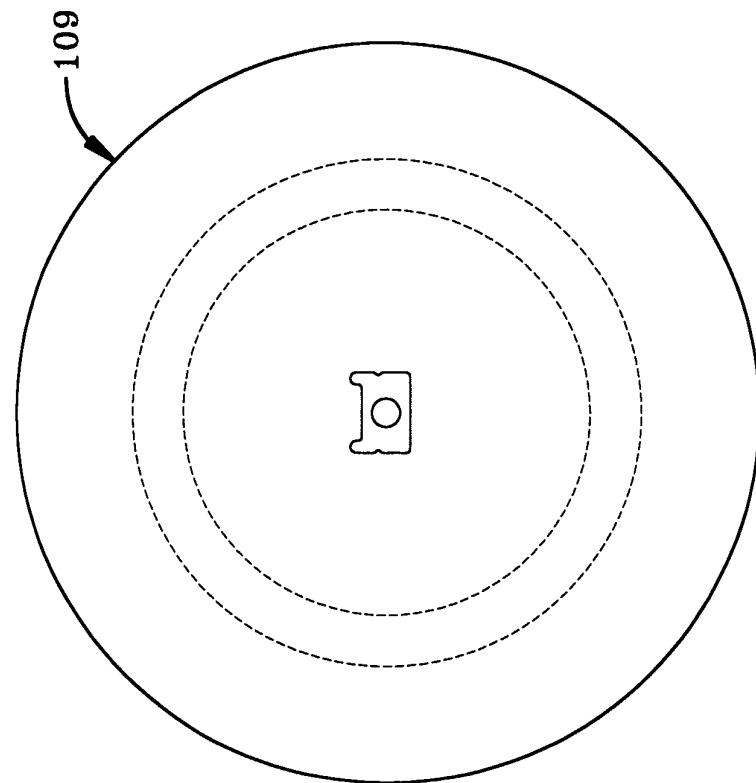

109

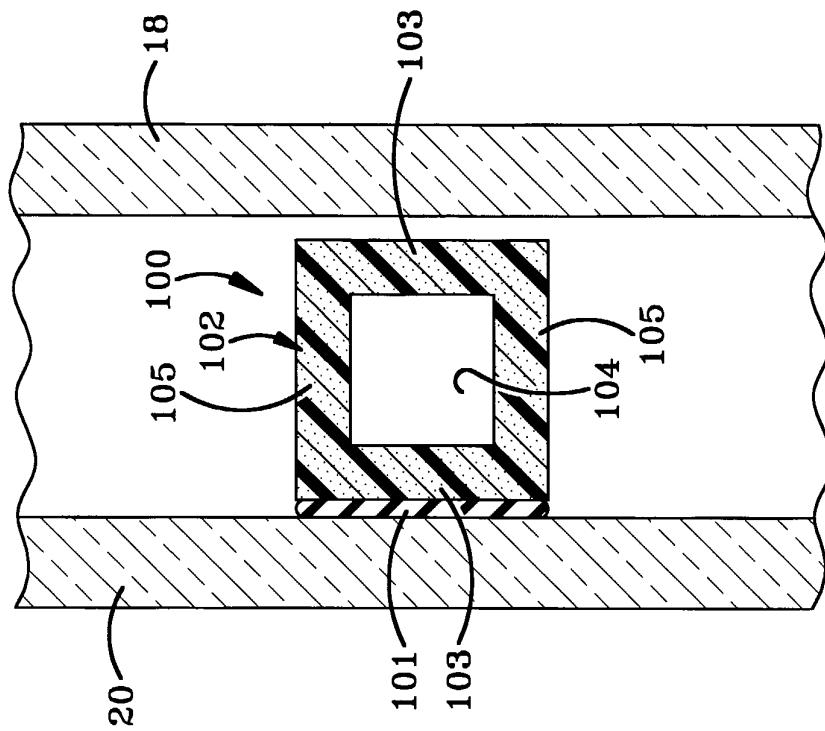


FIG-11

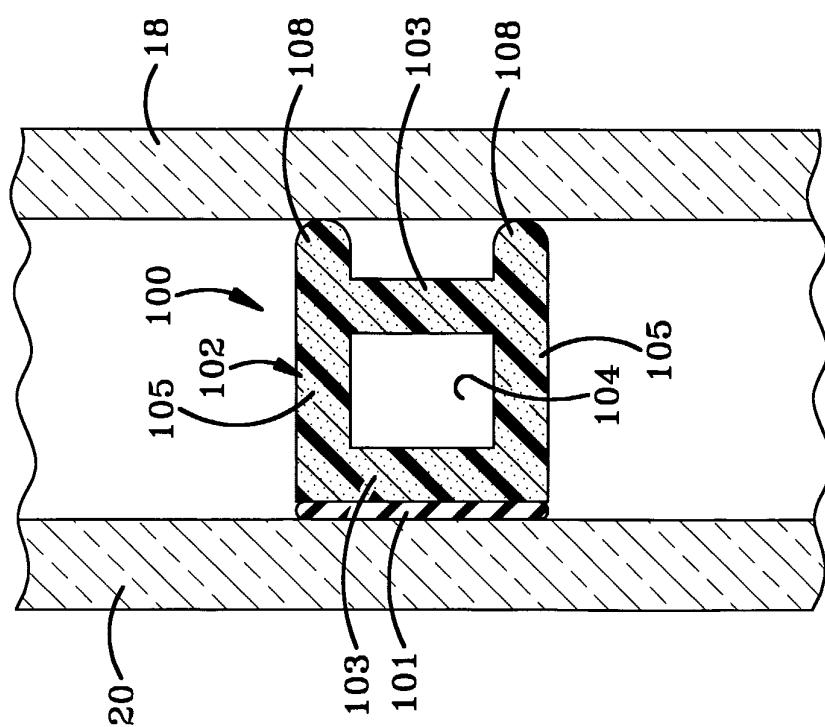


FIG-10

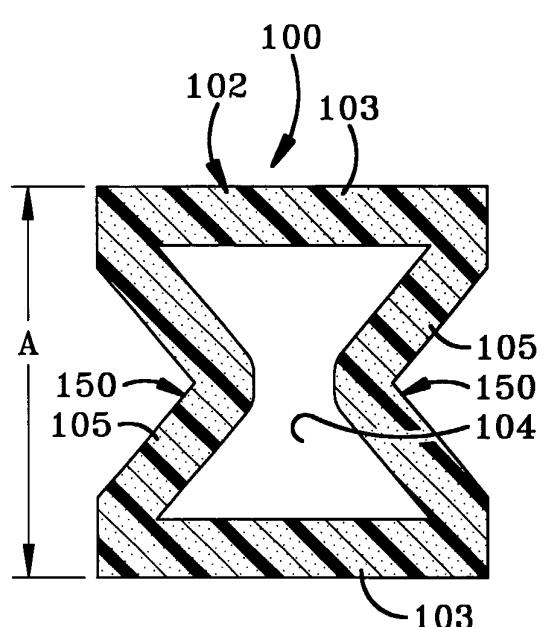


FIG-12

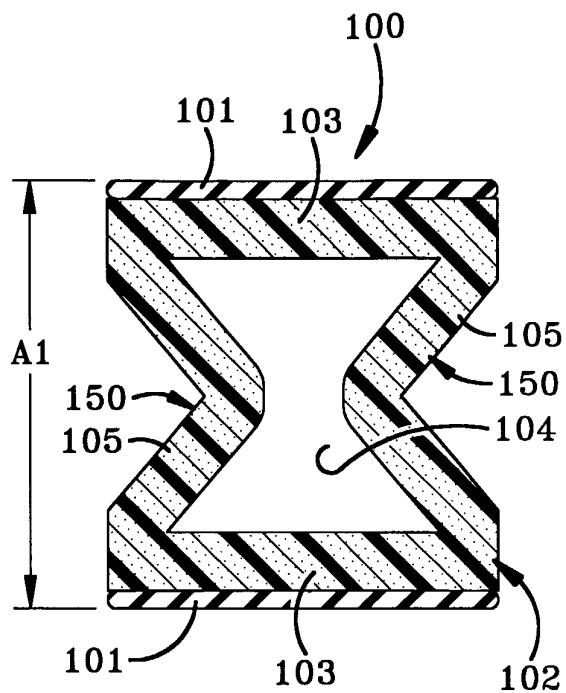


FIG-13

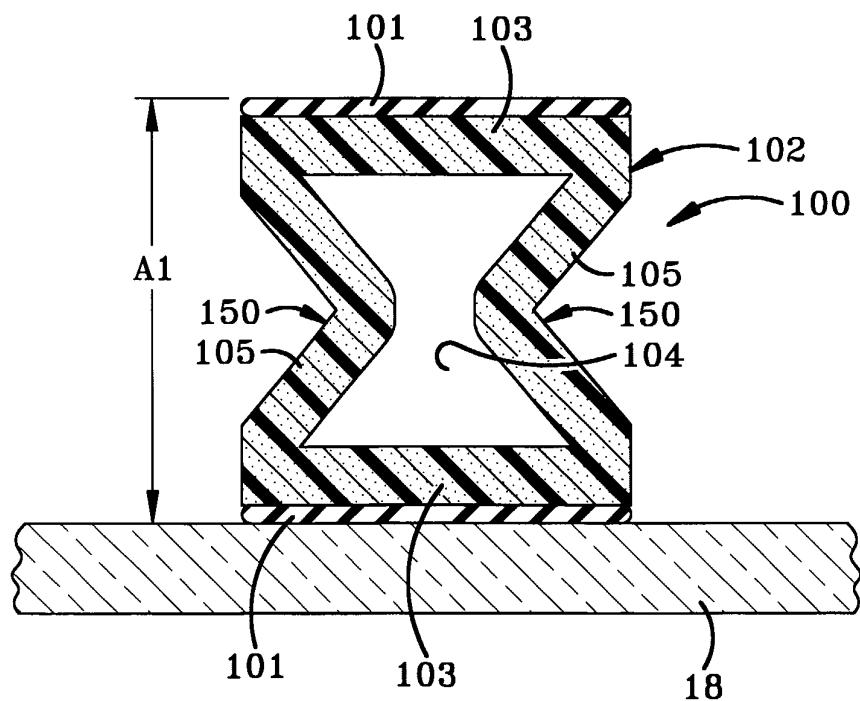


FIG-14

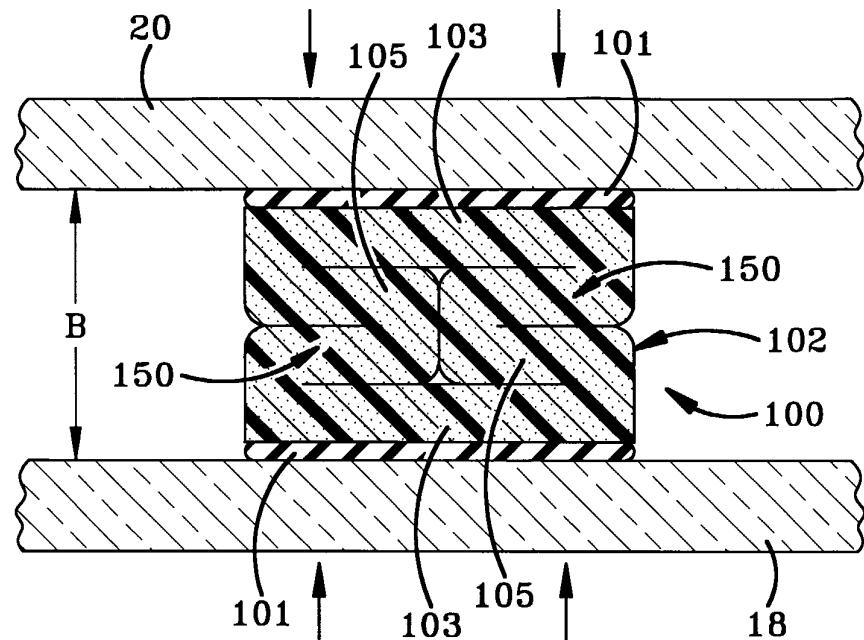


FIG-15

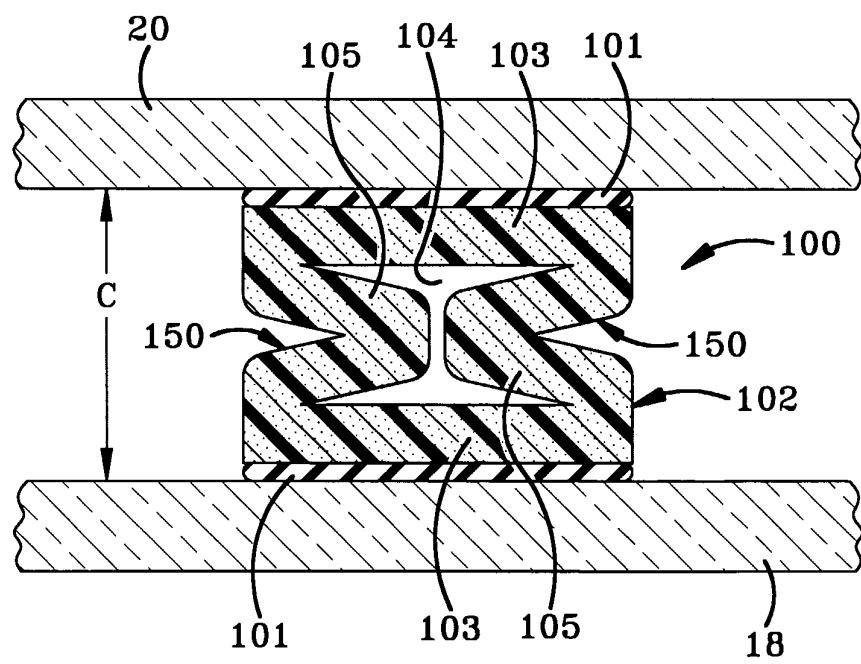
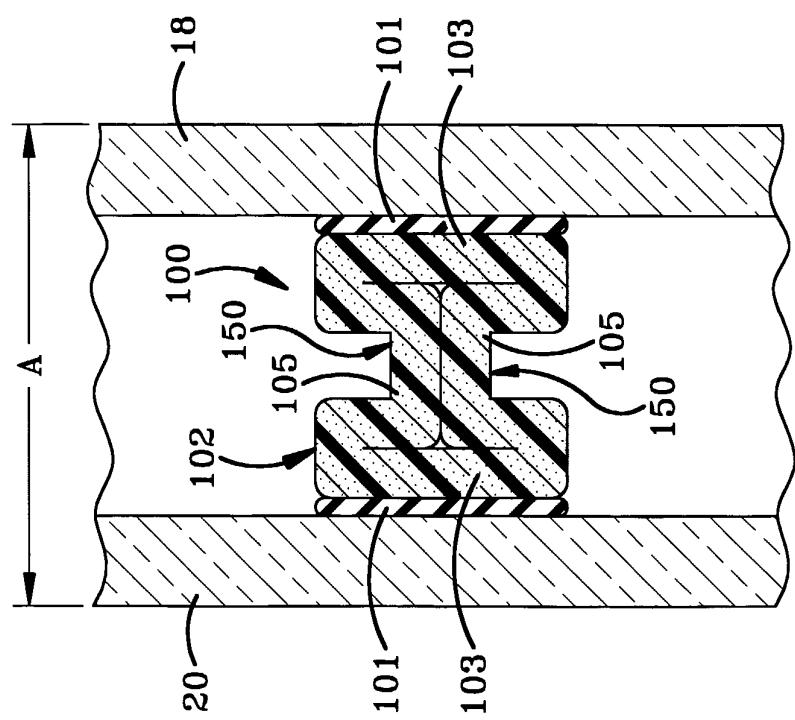
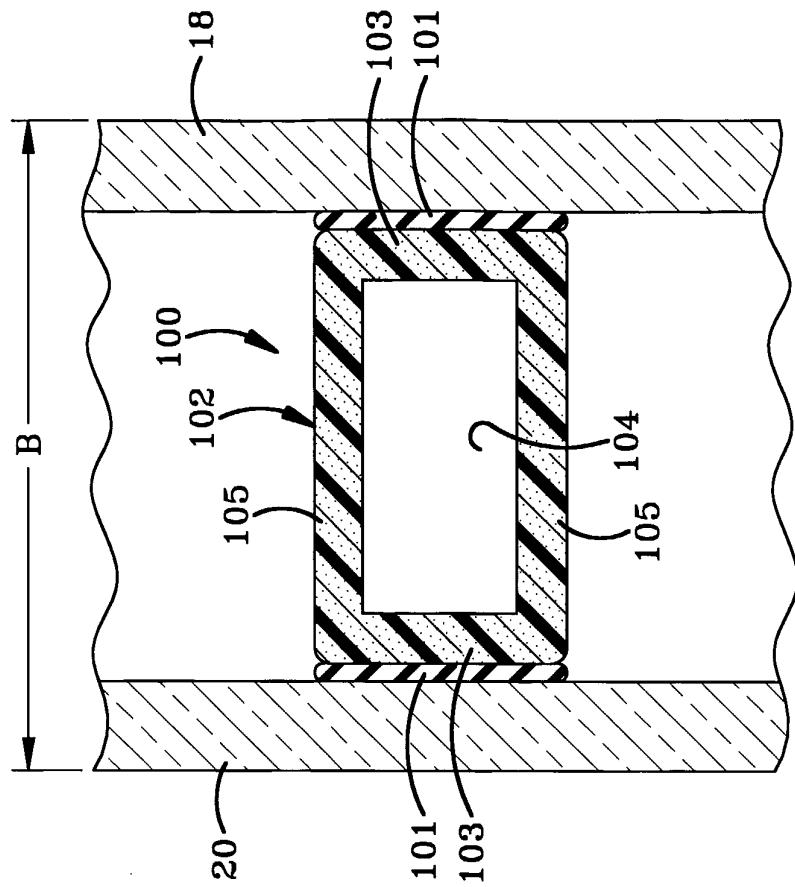


FIG-16



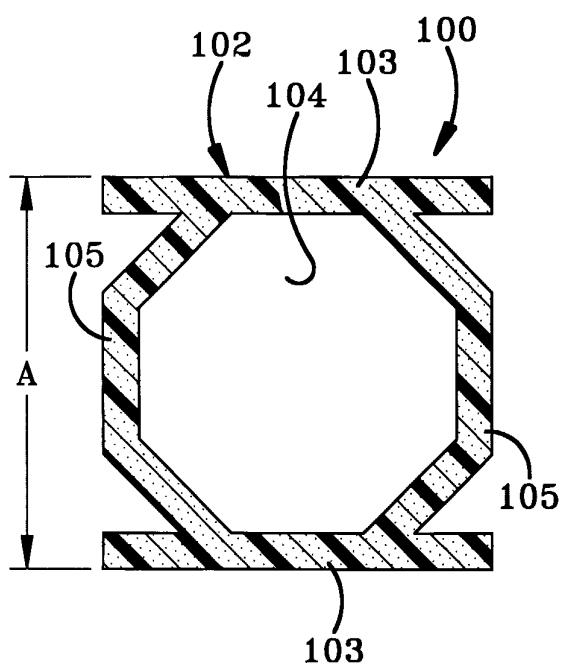


FIG-19

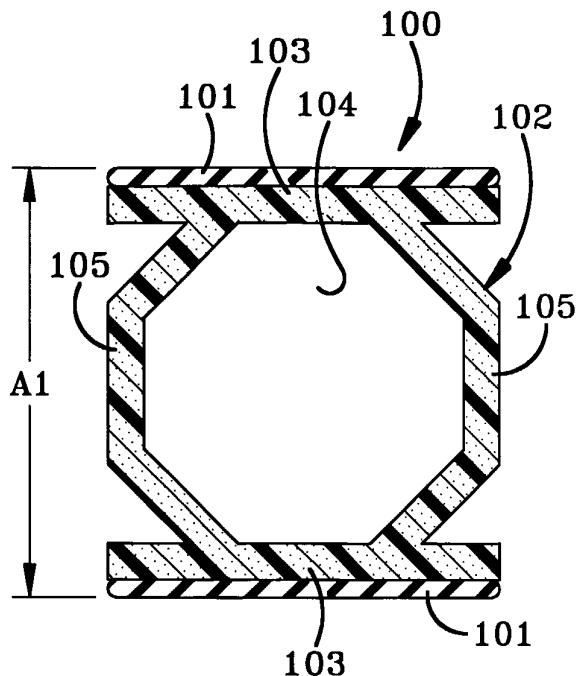


FIG-20

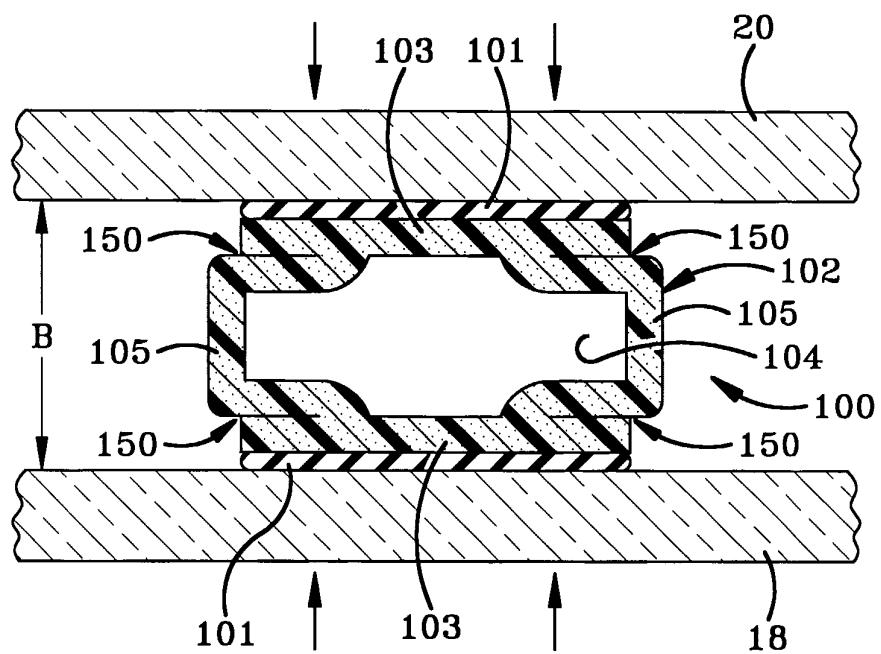


FIG-21

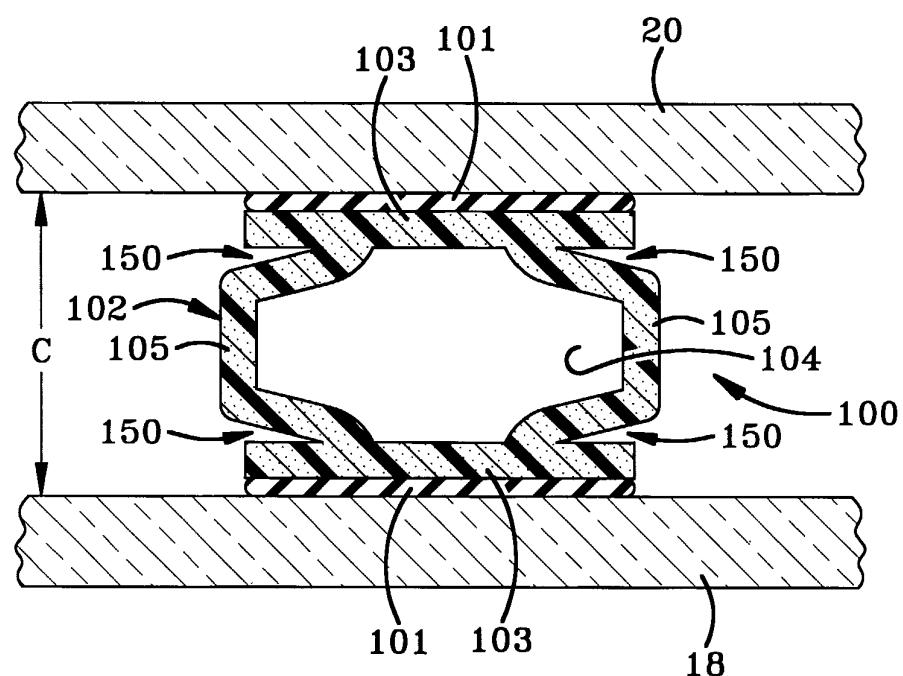
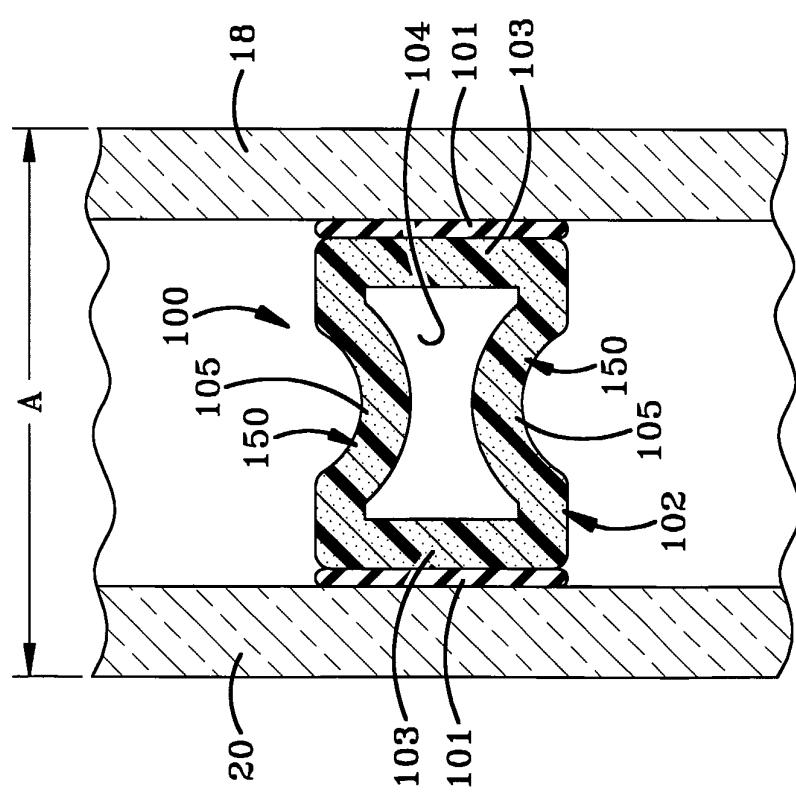
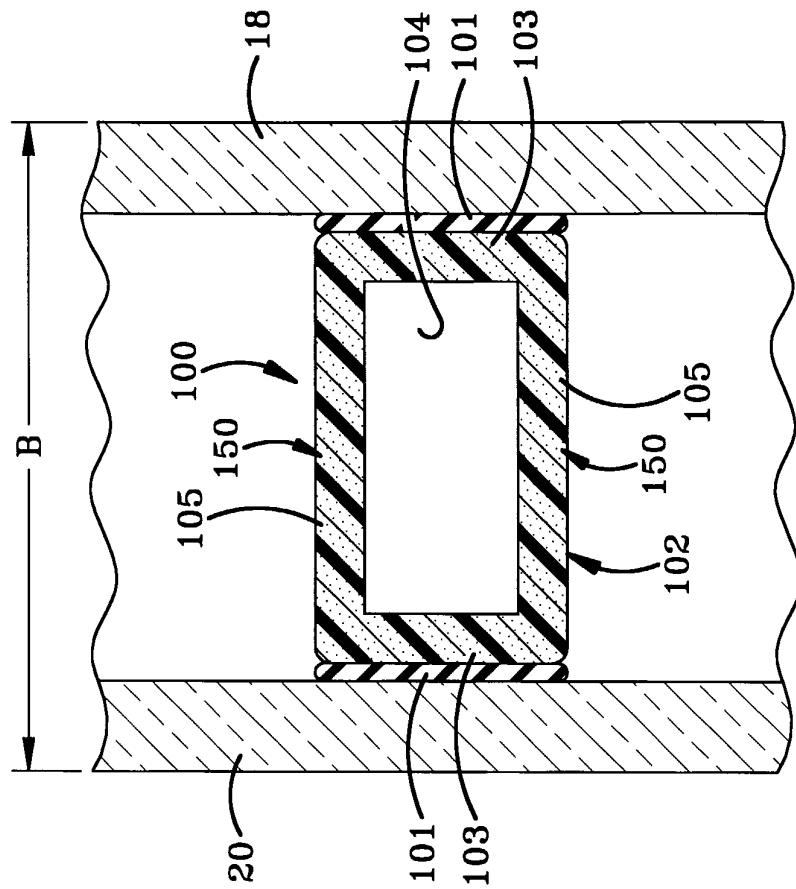


FIG-22



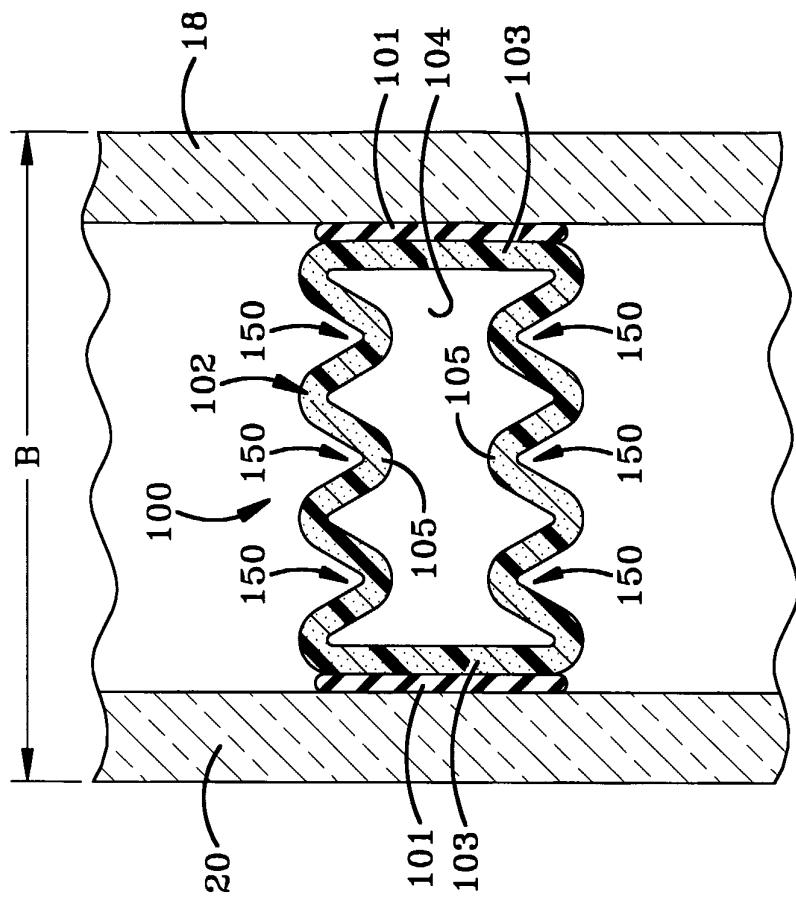


FIG-26

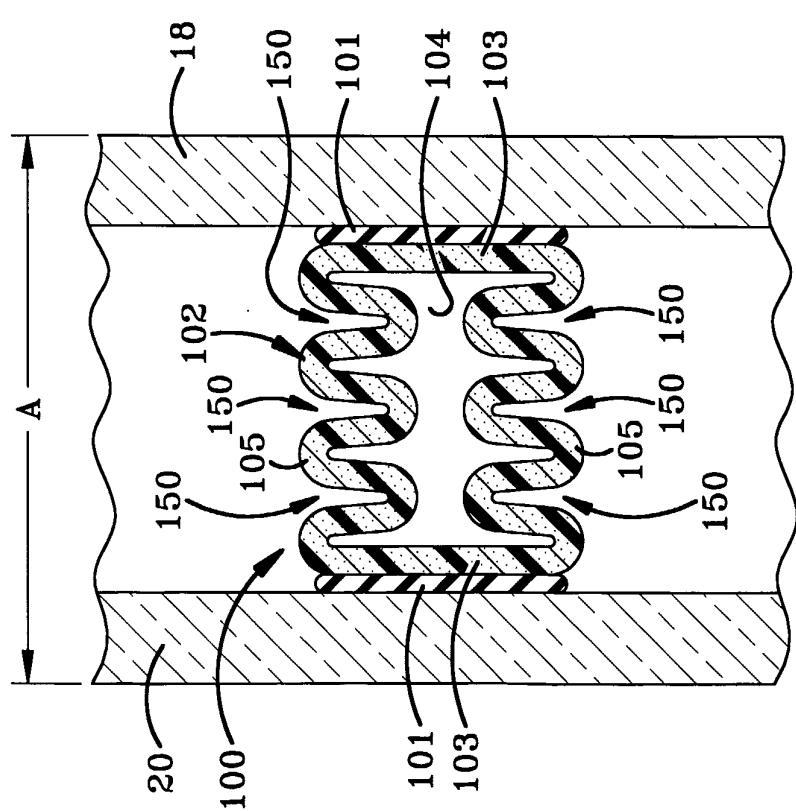
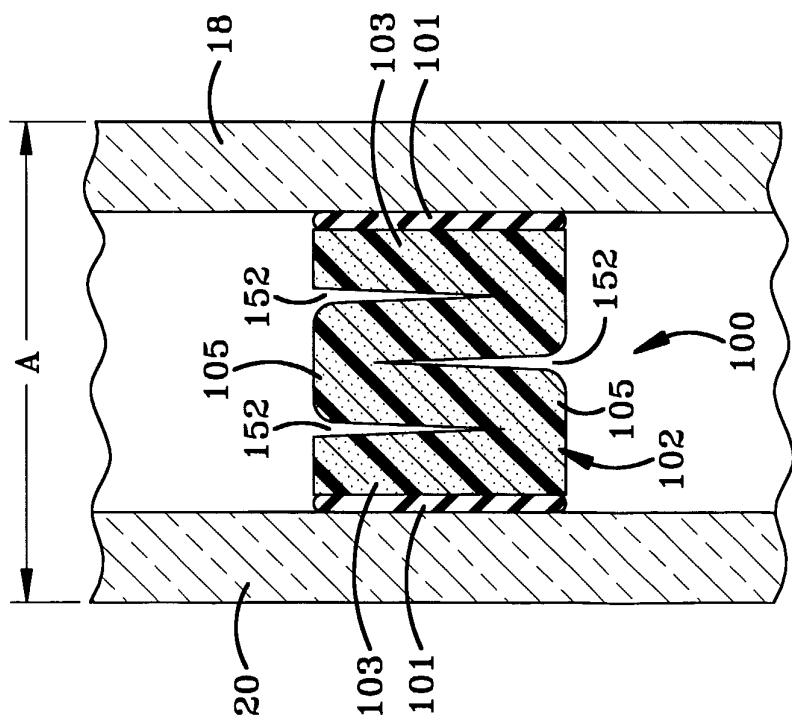
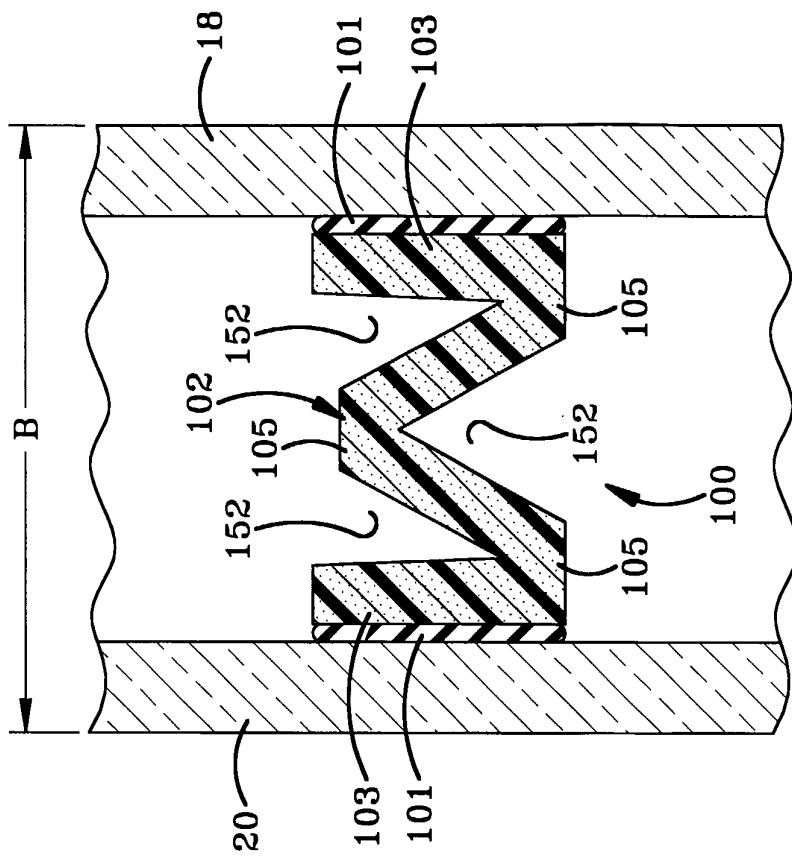
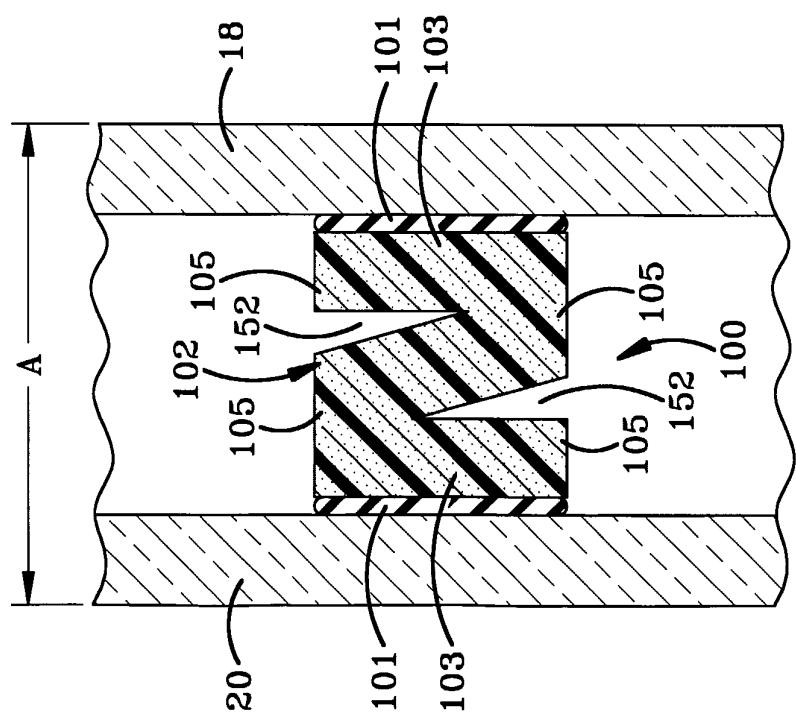
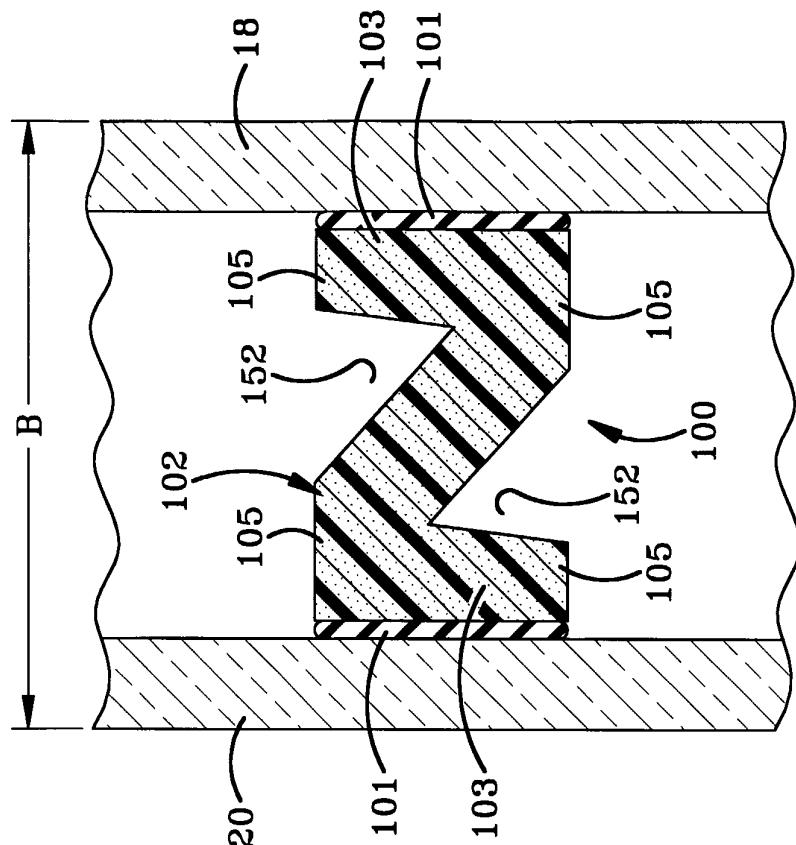
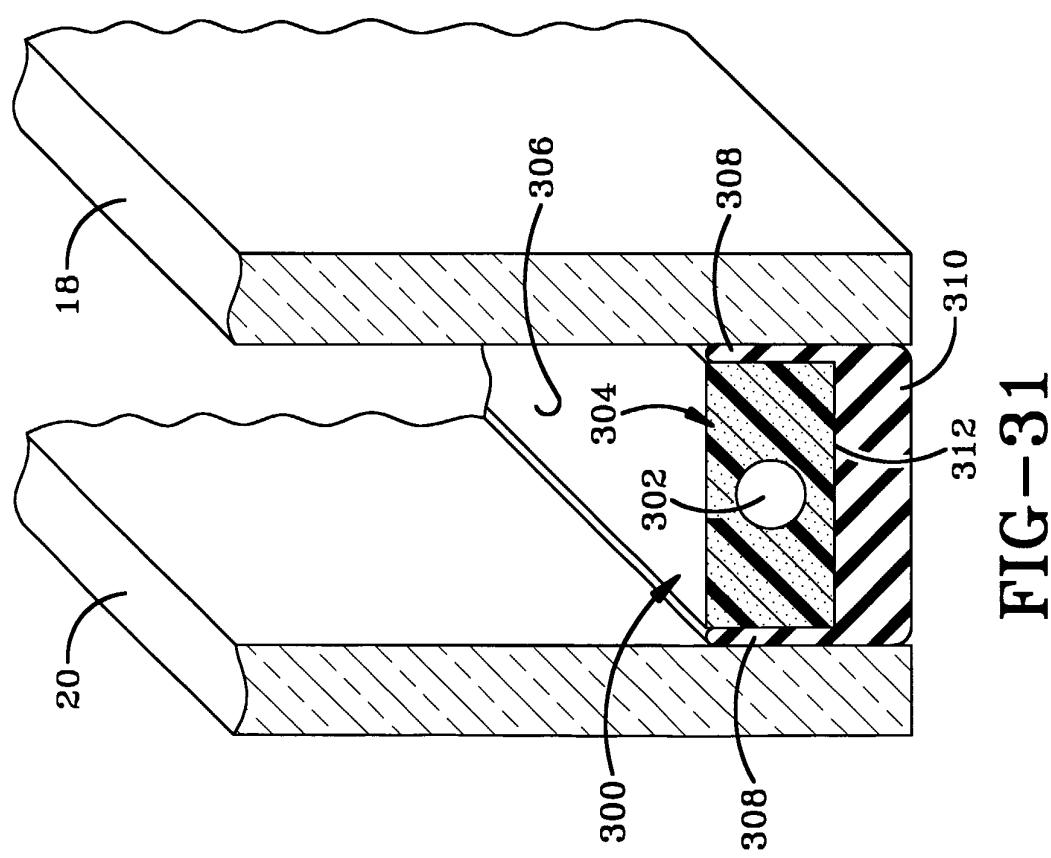
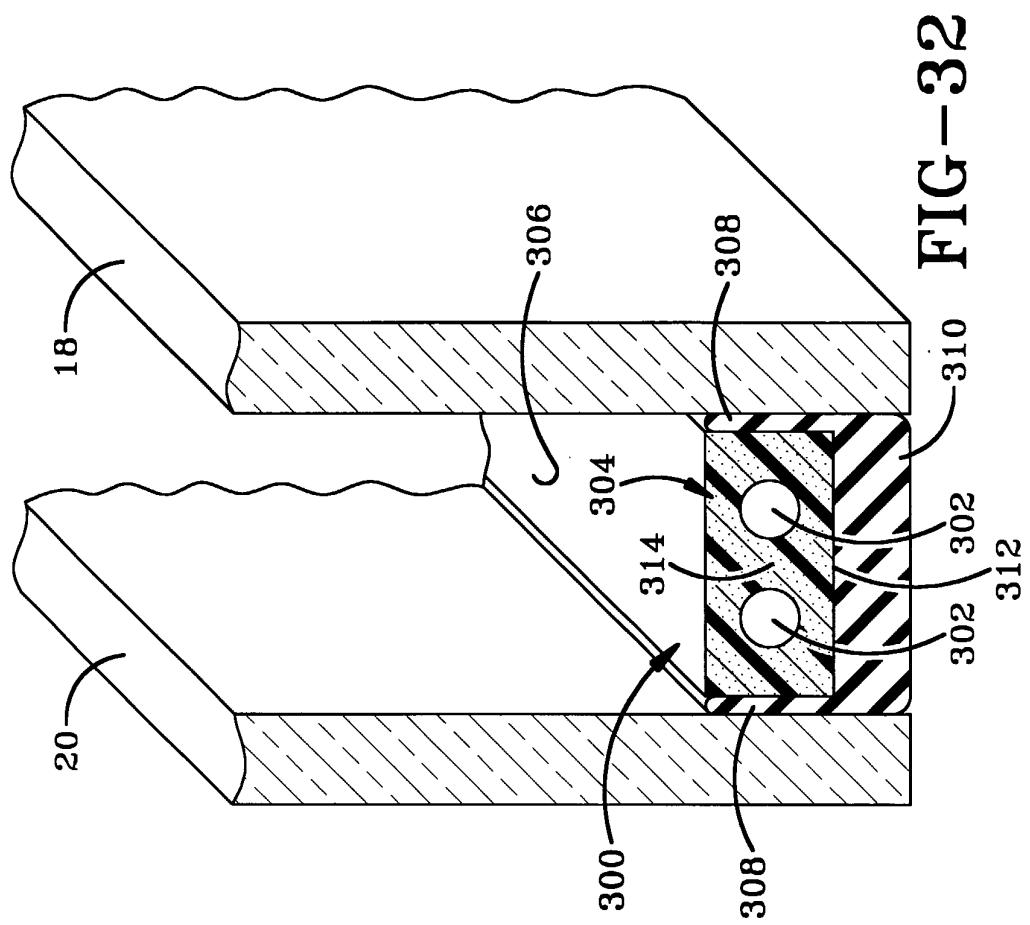
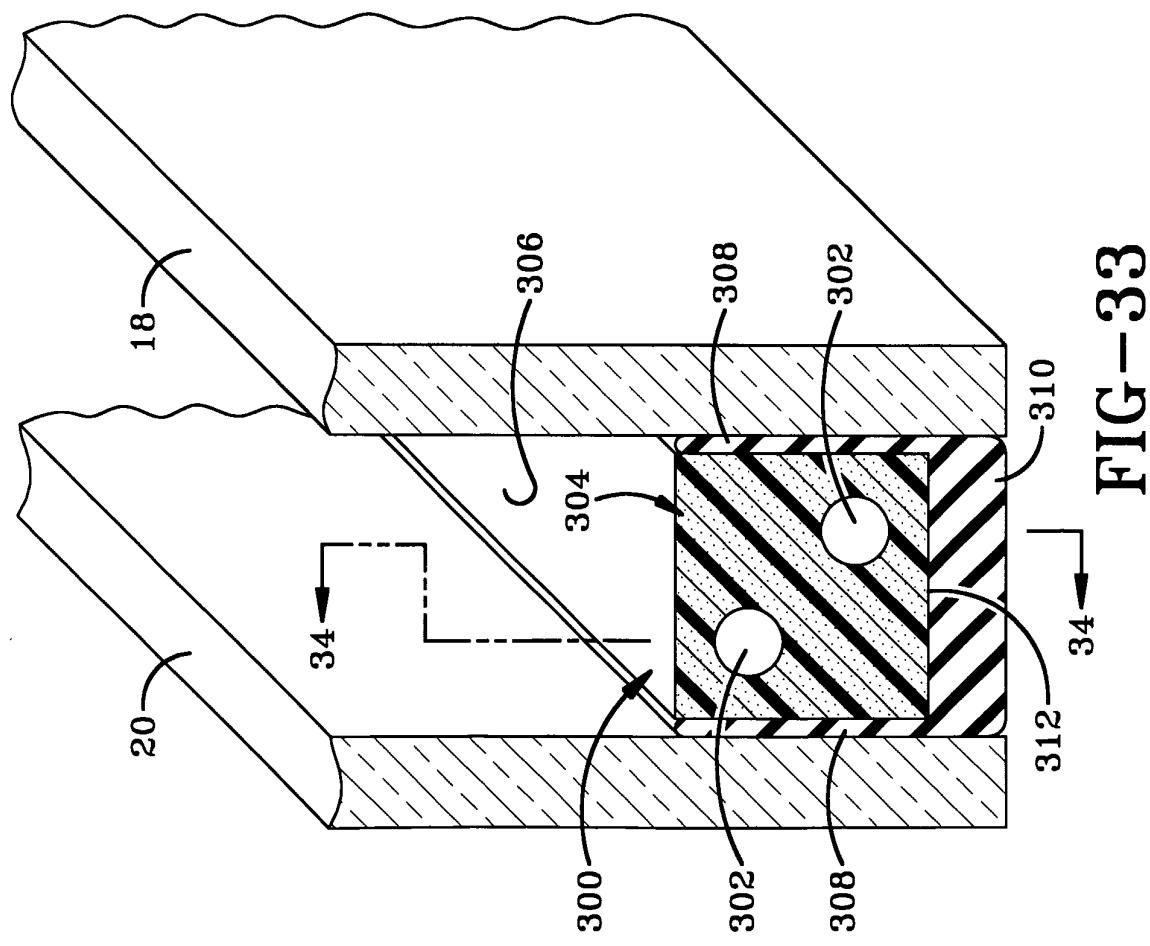
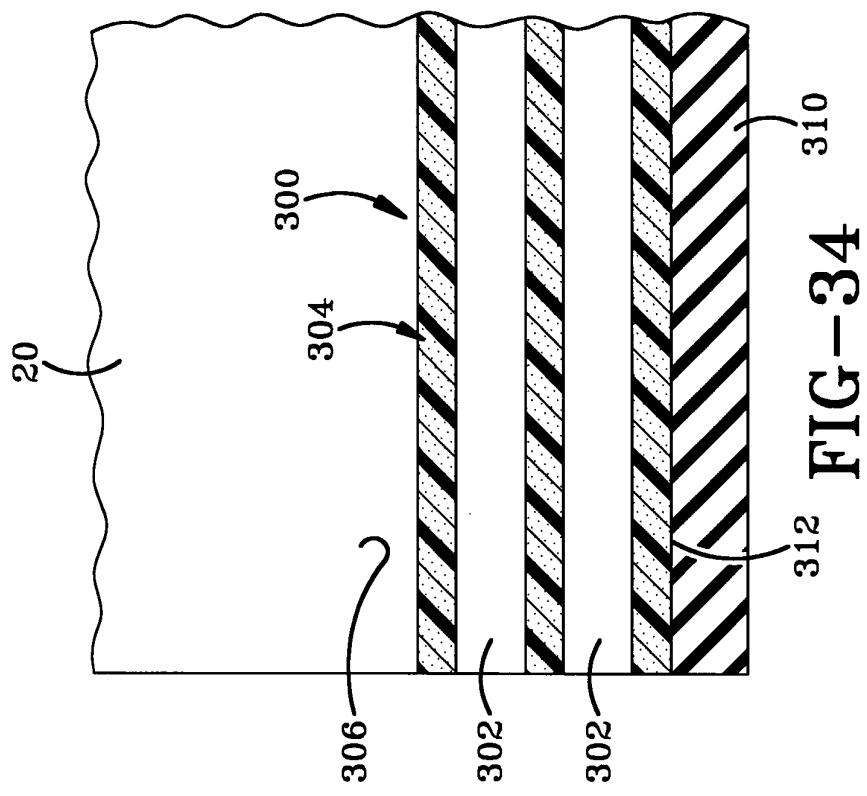




FIG-25









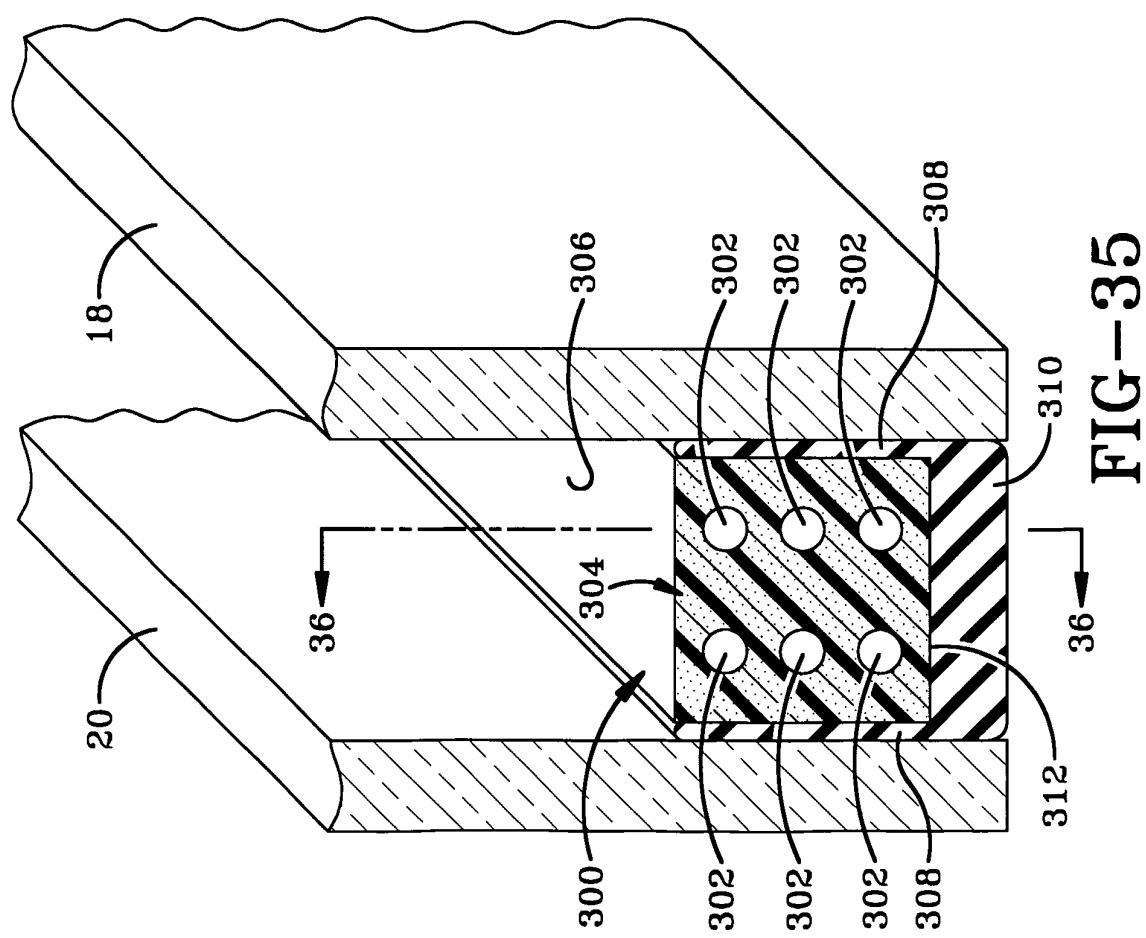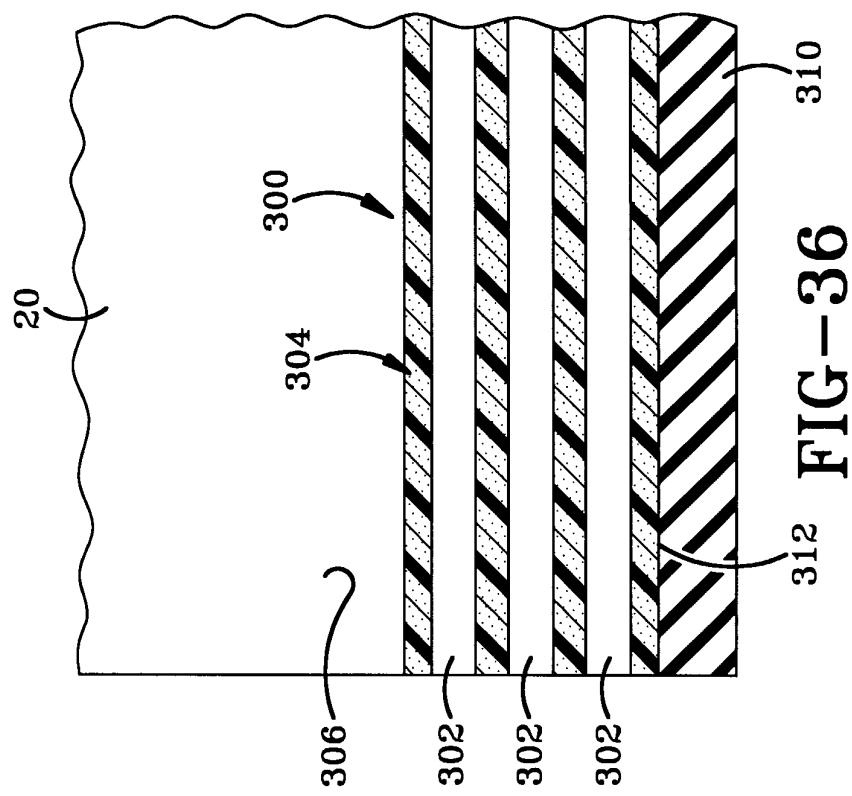

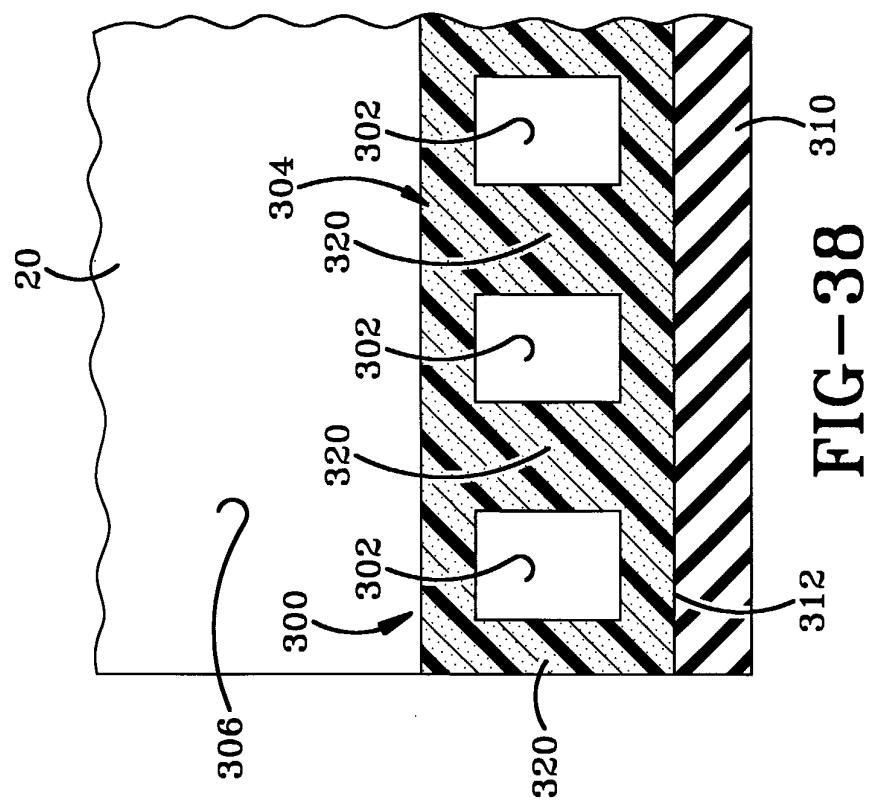


FIG-38

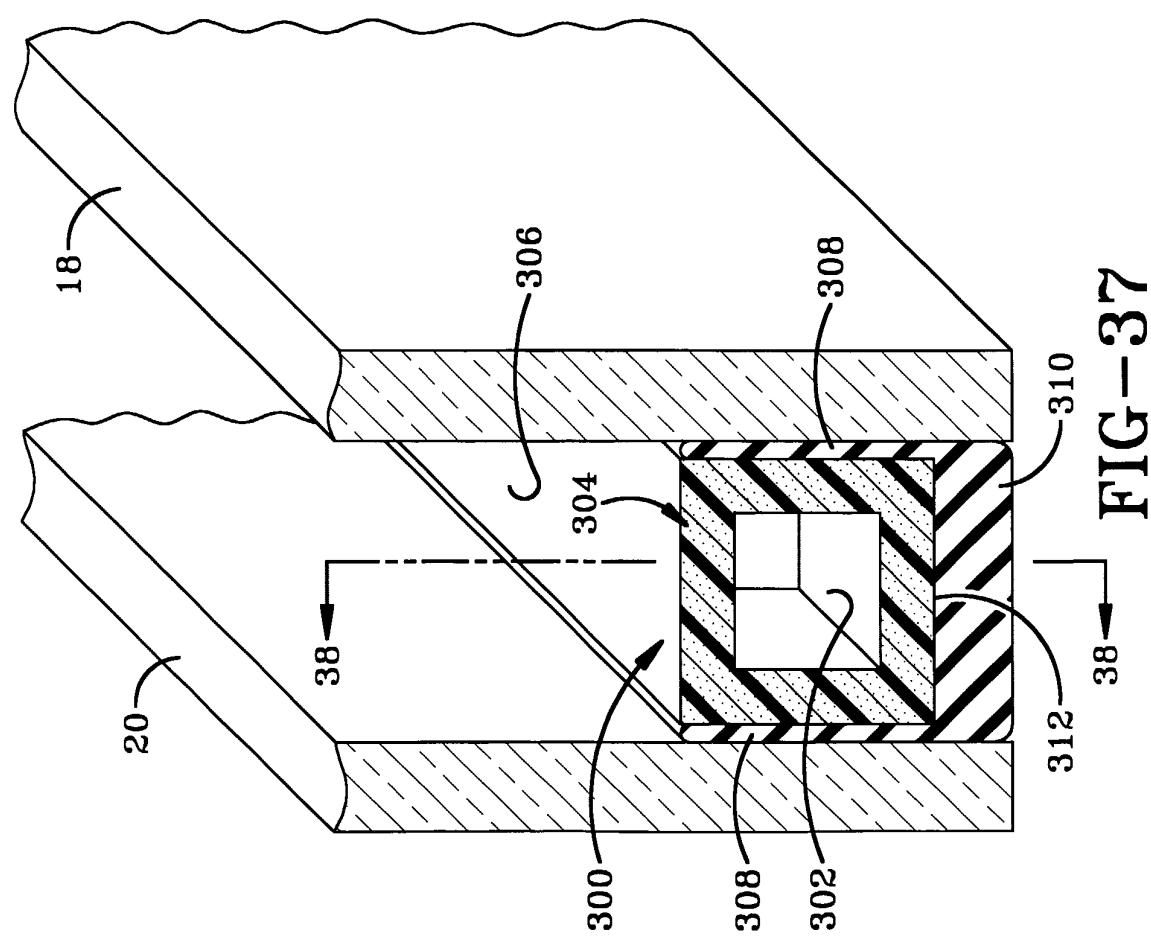


FIG-37