



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2059987 C 2002/08/06

(11)(21) **2 059 987**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(22) **Date de dépôt/Filing Date:** 1992/01/24
(41) **Mise à la disp. pub./Open to Public Insp.:** 1992/08/01
(45) **Date de délivrance/Issue Date:** 2002/08/06
(30) **Priorités/Priorities:** 1991/01/31 (07/648,002) US;
1991/09/10 (07/757,287) US

(51) **Cl.Int.⁵/Int.Cl.⁵** C07C 209/86, C07C 253/34,
C07C 255/24, C07C 211/09
(72) **Inventeur/Inventor:**
Sieja, James Bernard, US
(73) **Propriétaire/Owner:**
E.I. DU PONT DE NEMOURS AND COMPANY, US
(74) **Agent:** DIMOCK STRATTON CLARIZIO LLP

(54) **Titre :** PURIFICATION D'AMINONITRILES OU DE DIAMINES
(54) **Title:** PURIFICATION OF AMINONITRILES OR DIAMINES

(57) **Abrégé/Abstract:**

Separation of an aliphatic aminonitrile or an aliphatic diamine from a mixture containing the corresponding cyclic, aliphatic, mono-unsaturated amine by adding caustic compound to the mixture and then distilling the aminonitrile or the diamine at a temperature less than 170°C and at a pressure of less than 1 atmosphere.



TITLE

Purification of Aminonitriles or Diamines

FIELD OF THE INVENTION

5 Separation of an aliphatic aminonitrile or an
aliphatic diamine from a mixture containing the
corresponding cyclic, aliphatic, mono-unsaturated amine
by adding caustic compound to the mixture and then
distilling the aminonitrile or the diamine at a
10 temperature less than 170°C and at a pressure of less
than 1 atmosphere.

TITLE**Purification of Aminonitriles or Diamines**

5

FIELD OF THE INVENTION

This invention relates to the purification of an aliphatic aminonitrile or an aliphatic diamine by
 10 distilling it from a mixture containing a cyclic, aliphatic, mono-unsaturated amine. The aminonitrile or diamine is then sufficiently pure to be polymerized to form high molecular weight nylon having good color and a low gel content.

15


BACKGROUND OF THE INVENTION

The polymerization of 6-aminocapronitrile to form nylon polymer is disclosed in Greenwalt U.S. Patent 2,245,129, and Curatolo et al. U.S. Patent 4,568,736.

20

When 6-aminocapronitrile is produced by partial hydrogenation of adiponitrile, hexamethylene diamine and the cyclic, aliphatic, mono-unsaturated amine, tetrahydroazepine, i.e. the latter compound represented by the formula:

25

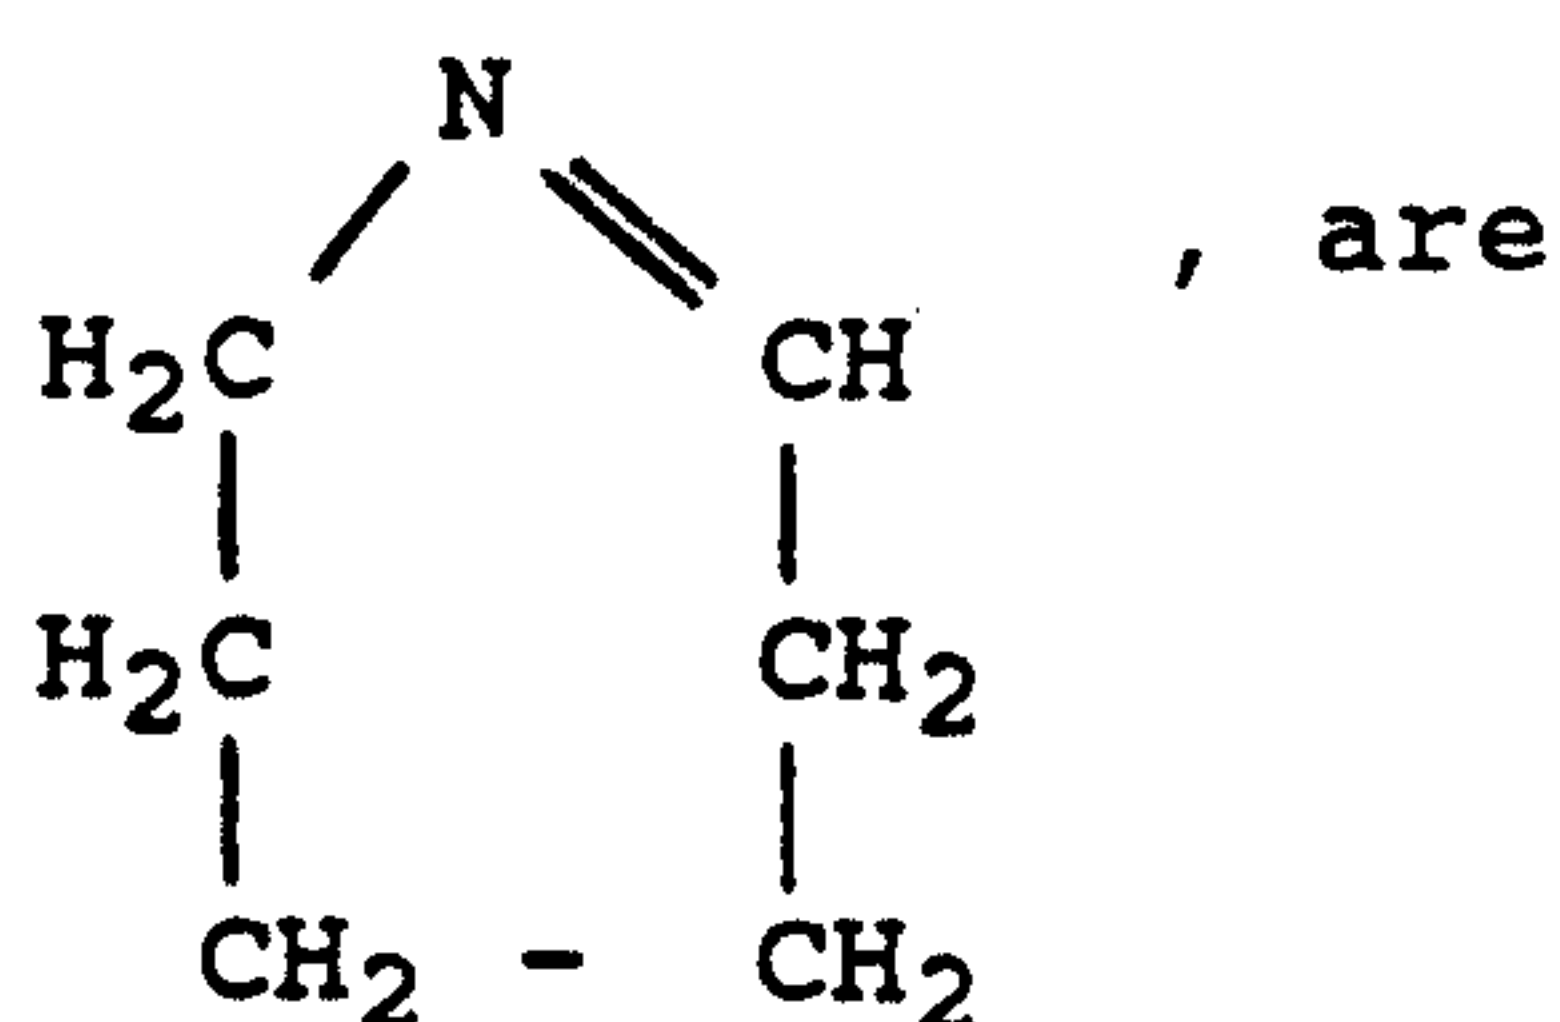

30

also coproduced. The tetrahydroazepine (hereinafter sometimes referred to as THA) is not easily separated.
 35 The presence of THA in the 6-aminocapronitrile (hereinafter sometimes referred to as 6-ACN) that is to be polymerized limits the molecular weight of the

polymer and causes color and branching in the polymer. It is, therefore important that THA be removed from the 6-ACN before polymerization.

5 A corresponding cyclic, aliphatic, mono-unsaturated amine is formed when the C_4 , C_5 , C_7 through C_{12} analogs of adiponitrile are partially hydrogenated to form the C_4 amino aliphatic nitrile, the C_5 amino aliphatic nitrile, and the C_7 through C_{12} amino aliphatic nitriles, and when the C_4 through C_{12} aliphatic dinitriles are fully hydrogenated to form the corresponding aliphatic diamines.

10 It is an object of the present invention to provide a simple and efficient method of obtaining C_4 to C_{12} aliphatic aminonitriles or C_4 to C_{12} aliphatic diamines that are free from the cyclic, aliphatic, mono-unsaturated amine having a corresponding number of carbon atoms.

SUMMARY OF THE INVENTION

20 This invention is a process for the separation of C_4 to C_{12} aliphatic aminonitriles or the corresponding diamines from a mixture which also contains the cyclic, aliphatic, mono-unsaturated amine having a corresponding number of carbon atoms by adding a caustic compound to the mixture and then 25 distilling the aminonitrile or the diamine from the mixture.

The addition of caustic to a mixture appears to shift the equilibria involving the mono-unsaturated amine and forms a mono-unsaturated amine reaction 30 product that has a considerably higher boiling point than aliphatic aminonitrile or the diamine, and accordingly the aliphatic aminonitrile or the diamine can now be separated by distillation.

DETAILED DESCRIPTION

35 The caustic compound used in the process may be one of a variety of bases such as alkali metal

hydroxides, some alkaline earth hydroxides, tetraalkylammonium hydroxide, alkali metal alkoxides and alkaline earth metal alkoxides. Specific bases that are useful include: sodium hydroxide, potassium hydroxide, lithium hydroxide, barium hydroxide, tetra butyl ammonium hydroxide, sodium methoxide, potassium ethoxide, and potassium tert-butoxide. The caustic compound may be added to the mixture containing the aliphatic aminonitrile or the diamine and aliphatic cyclic, mono-unsaturated amine as an anhydrous solid, or dispersed on an inert substrate such as silica, or as an aqueous solution. An aqueous solution is preferred when operating on a large scale.

The amount of caustic compound added can vary widely. The caustic compound apparently acts as a catalyst in reacting with the mono-unsaturated amine, so an amount less than a stoichiometric amount is effective. However, an amount somewhat in excess of caustic compound is not harmful; for example, an amount of about 5% in excess of the stoichiometric amount of the cyclic, aliphatic, mono-unsaturated amine. Large excess (four or more times the stoichiometric amount) of caustic compound tends to generate by-products such as 6-aminocaproamide. A preferred range of caustic compound for mixtures normally obtained by hydrogenation of a C_4 to C_{12} dinitrile is about 0.025 to 5% by weight, based on the aminonitrile or diamine.

The distillation of the aliphatic aminonitrile or diamine from the mixture containing the caustic compound should be carried out at temperatures of less than about 170°C. The pressure of the distillation must be regulated accordingly, i.e. reduced to less than atmospheric pressure. Pressures as high as 100 mm of mercury are operable, but it is preferable to operate at pressures of less than 80 mm of mercury. Good results are obtained at

pressures in the range of 10 to 60 mm of mercury, but pressures as low as 0.25 mm of mercury are satisfactory although not attractive for large scale operation.

5 The process of the present invention is particularly effective when the aliphatic aminonitrile or diamine having 4 to 12 carbon atoms is selected from the group consisting of 4-aminobutyronitrile, 5-aminovaleronitrile, 2-methyl-5-aminovaleronitrile, 10 6-aminocapronitrile, 12-aminododecanenitrile, 1,4-tetramethylenediamine, 1,5-pentamethylenediamine, 2-methyl-1,5-pentamethylenediamine, 1,6-hexamethylenediamine, 1,12-dodecanediamine, and the cyclic, aliphatic, mono-unsaturated amine having a 15 corresponding number of carbon atoms is selected from the group consisting of dihydropyrrole, tetrahydropyridine, 3-methyltetrahydropyridine, tetrahydroazepine, and mono-unsaturated cyclododecylamine.

20 EXAMPLES

Example 1

A mixture of 50 ml (about 43 g) of 6-ACN containing 0.23% THA and 1 ml of 50% aqueous sodium hydroxide was heated to 80 deg C for 1/2 hr. The 25 6-ACN was distilled at 0.25 mm Hg, pot temp about 75 deg C, head temp about 60 deg C. Two cuts were taken, with no substantial amount of heel remaining in the pot. The first cut weighed 27 g and contained 0% THA, and the second weighed 16 g and contained 0.039% THA.

30 Example 2

A mixture of 50 ml (about 43 g) of 6-ACN containing 0.017% THA and 1 ml of 50% aqueous sodium hydroxide was heated to 80 deg C for 1/2 hr. The 6-ACN was distilled at 0.25 mm Hg, and two cuts were 35 taken. The first cut weighed 21 g and contained 0%

THA, and the second cut weighed 23.6 g and contained 0% THA.

Example 3

5 A mixture of 150 g of 6-ACN containing 0.22% THA and 1 g of 50% sodium hydroxide was distilled at 40 mm Hg, pot temperature 144 deg C, head temperature 139 deg C. The first cut weighed 67 g and contained 0% THA, the second cut weighed 66 g and contained 0% THA, and the 3rd cut weighed 12 g and contained 0.065% THA.

Control for Example 3

15 A mixture of 150 g of 6-ACN containing 0.22% THA and 1 g of water (and no added caustic compound) was distilled at 40 mm Hg. The first cut weighed 72 g and contained 0.19% THA, the second cut weighed 66 g and contained 0.25% THA. The pot residue weighed 12.3 g and contained 0.62% THA.

Example 4

20 A mixture of 150 g 6-ACN containing 0.22% THA and 0.25 g of powdered sodium hydroxide was distilled at 20 mm Hg. Cut 1 weighed 44.8 g and contained 0% THA, cut 2 weighed 45.6 g and contained 0% THA, cut 3 weighed 46 g and contained <0.005% THA, cut 4 weighed 8.6 g and contained 0.063% THA.

Example 5

25 A 500 cc distillation pot was charged with 250 g of 6-ACN containing 0.22% THA and 0.5 g of 50% aqueous sodium hydroxide. A funnel attached to the distillation pot was charged with 1100 g of 6-ACN
30 containing 0.22% THA. The 6-ACN was distilled at 50 mm, feeding the 6-ACN at the same rate as it was distilling, maintaining the same level of 6-ACN in the pot as was originally present. The first cut weighed 430 g and contained 0% THA, the second weighed 416 g
35 and contained 0% THA, the third weighed 260 g and contained 0.01% THA. A total of 1106 g of 6-ACN were

distilled from the 0.5 g of caustic (0.022 wt% NaOH overall).

Example 6

5 A mixture of 150 g of 6-ACN containing 0.22%
THA and 0.5 g of 50% aqueous potassium hydroxide was
distilled at 50 mm Hg. The first cut weighed 45.5 g
and contained 0% THA, the second weighed 44.6 g and
contained 0.01% THA, the third weighed 44.7 g and
contained 0.05% THA.

10 Example 7

A mixture of 150 g of 6-ACN containing 0.22%
THA and 1.5 g of 50% aqueous sodium hydroxide was
distilled at 100 mm Hg. Pot temperature was 170 deg
C, head temperature was 160 deg C. The first cut
15 weighed 66.4 g and contained 0.018% THA, the second
weighed 49 g and contained 0.067% THA, the third
weighed 17.4 g and contained 0.64% THA.

Example 8

A mixture of 150 g of 6-ACN containing 0.22%
20 THA and 0.5 g of 50% aqueous sodium hydroxide was
distilled at 20 mm Hg. Pot temperature was 133 deg C,
head temperature 129 deg C. The first cut weighed
40.9 g and contained 0% THA, the second weighed 46.5 g
and contained 0% THA, the third weighed 37.2 g and
25 contained 0% THA, the fourth weighed 15.6 g and
contained 0.025% THA.

Control for Example 8

A mixture of 150 g of 6-ACN containing 0.22%
THA and 0.25 g water (and no added caustic compound)
30 was distilled at 20 mm Hg. The first cut weighed 43.5
g and analyzed for 0.15% THA, the second weighed 43.9
g and analyzed for 0.20% THA, the third weighed 42.3 g
and analyzed for 0.22% THA, the fourth weighed 13.67 g
and analyzed for 0.27% THA, the fifth weighed 4.0 g
35 and analyzed for 0.4% THA.

Example 9Removal of THA from Hexamethylenediamine (HMD)

Four distillations were run. All distillations were made batchwise with 100 grams of 90% HMD (10% water was added to the HMD for dissolution), which contained 530 ppm THA on a 100% HMD basis. Runs 1 and 2 were made with a simple poop-still head. Runs 3 and 4 used a 7 inch Vigreux column. All material was taken overhead, i.e. no reflux returned to the pot. Four cuts were taken in each case. Runs 1 and 3 contained no caustic. Runs 2 and 4 contained 0.1 grams of 50% NaOH (555 ppm NaOH based on 100% HMD).

RUN	PRESS (mm)	HEAD TEMP deg C	CUT #	WT (g)	THA (ppm)	CAUSTIC ADDED
1	20	99	1	20	trace	no
			2	19	trace	
			3	18	80	
			4	24	110	
			heel	6.6	2530	
2	20	99	1	23	nil	yes
			2	20	nil	
			3	16	nil	
			4	19	nil	
			heel	10	2140	
3	100	135	1	31	50	no
			2	21	50	
			3	19	90	
			4	15	200	
			heel	5	7360	
4	100	135	1	29	nil	yes
			2	31	nil	
			3	14	nil	
			4	17	nil	
			heel	3.7	not available	

nil = the detection limit is about 20 ppm THA, and the integrator starts to assign THA at about 50 ppm.


Example 10

Removal of Methyltetrahydropyridine (MTHP) from
2-methylpentamethylenediamine (MPMD)

Two runs were made using 70 grams of MPMD
5 containing 1900 ppm of MTHP. In one run, 0.1 grams of
50% sodium hydroxide (715 ppm NaOH based on MPMD) were
added, and the mixture was heated for 30 min at 90 deg
C. Distillation was then carried out as in the case
of the HMD run above. The control run (run 1)
10 contained no caustic.

RUN	PRESS (mm)	HEAD TEMP deg C	CUT #	WT (g)	MTHP (ppm)	CAUSTIC ADDED
15						
1	20	85	1	24	1880	no
			2	22	2080	
			3	21	1890	
			4	2	1290	
20			heel	1	1180	
2	20	85	1	14	50	yes
			2	16	30	
			3	17	nil	
25			4	13	90	
			heel	2	not available	

MTHP has the formula:

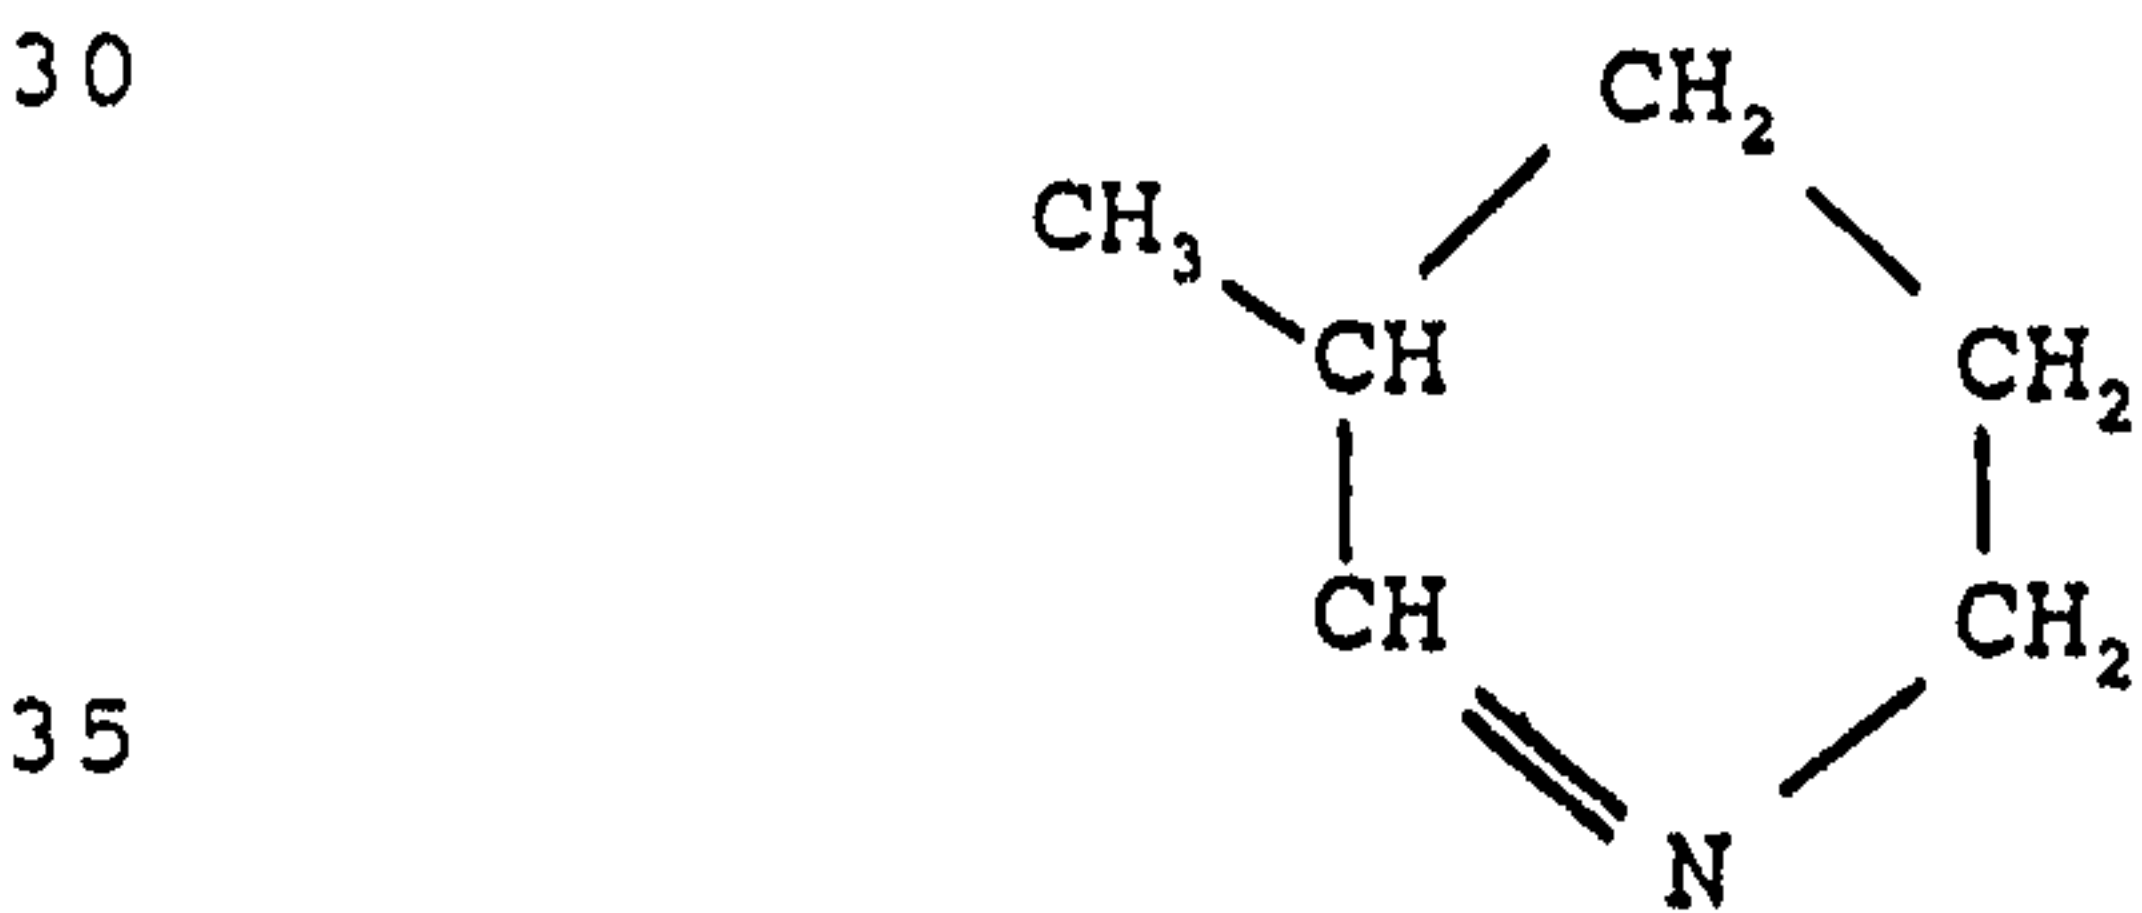


Example 11Removal of Mono-Unsaturated Cyclododecylamine (CDDI)
1,12-Dodecanediamine

5 The same procedure was used here as was used
for the MTHP/MPMD case. The starting dodecanediamine
contained 340 ppm CDDI.

	RUN	PRESS (mm)	HEAD TEMP deg C	CUT #	WT (g)	THA (ppm)	CAUSTIC ADDED
10	1	0.3	110	1	21	40	yes
				2	16	10	
				3	17	20	
				4	2	20	
15				heel	6	not available	
	2	0.3	110	1	17	50	no
				2	13	20	
				3	15	50	
20				4	12	100	
				heel	8	490	

25 CDDI has the formula:

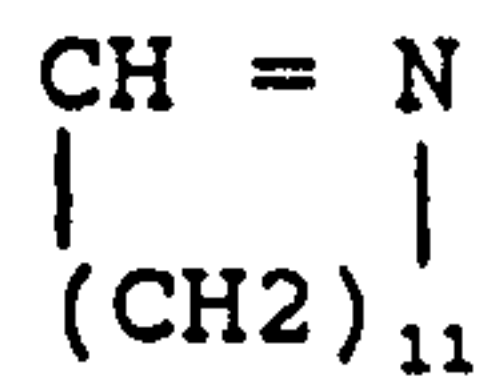

CLAIMS:

1. A process for the separation of an aliphatic aminonitrile or diamine having 4 to 12 carbon atoms from a mixture containing a cyclic,
5 aliphatic, mono-unsaturated amine having a corresponding number of carbon atoms, which comprises adding a caustic compound to the mixture in the amount in the range of about 0.025% by weight to an amount about 5% in excess of the stoichiometric amount of the
10 cyclic, aliphatic, mono-unsaturated amine in the mixture, and then distilling the aliphatic aminonitrile/diamine from the mixture at a temperature less than about 170 degrees C and at a pressure less than atmospheric.

15 2. The process of claim 1 in which the caustic compound is selected from the group consisting of alkali metal hydroxides, tetraalkylammonium hydroxides, alkaline earth hydroxides, alkali metal alkoxides and alkaline earth metal alkoxides.

20 3. The process of claim 1 in which the aliphatic aminonitrile or diamine having 4 to 12 carbon atoms is selected from the group consisting of 4-aminobutyronitrile, 5-aminovaleronitrile, 2-methyl-5-aminovaleronitrile, 6-aminocapronitrile, 12-aminodecane-
25 nitrile, 1,4-tetramethylenediamine, 1,5-pentamethylenediamine, 2-methyl-1,5-pentamethylenediamine, 1,6-hexamethylenediamine, 1,12-dodecanediamine, and the cyclic, aliphatic mono-unsaturated amine having a corresponding number of carbon atoms is selected from
30 the group consisting of dihydropyrrole, tetrahydropyridine, 3-methyltetrahydropyridine, tetrahydroazepine, and mono-unsaturated cyclododecylamine.

PI-0518-A

35 4. The process of claim 1 in which the pressure used in the distillation is less than about 100 mm of mercury.