



(22) Date de dépôt/Filing Date: 2009/07/24

(41) Mise à la disp. pub./Open to Public Insp.: 2011/01/24

(45) Date de délivrance/Issue Date: 2014/02/11

(51) Cl.Int./Int.Cl. *B07B 1/15* (2006.01),
E21C 41/30 (2006.01)


(72) Inventeurs/Inventors:
BRUGGENCATE, KYLE ALAN, CA;
MACDOUGALL, PAUL FREDERICK, CA

(73) Propriétaire/Owner:
SUNCOR ENERGY INC., CA

(74) Agent: SMART & BIGGAR

(54) Titre : DISQUE DE CRIBLAGE, ROULEAU ET CRIBLE-CLASSEUR A ROULEAUX PERMETTANT DE CRIBLER
L'ALIMENTATION DE MINERAL

(54) Title: SCREENING DISK, ROLLER, AND ROLLER SCREEN FOR SCREENING AN ORE FEED

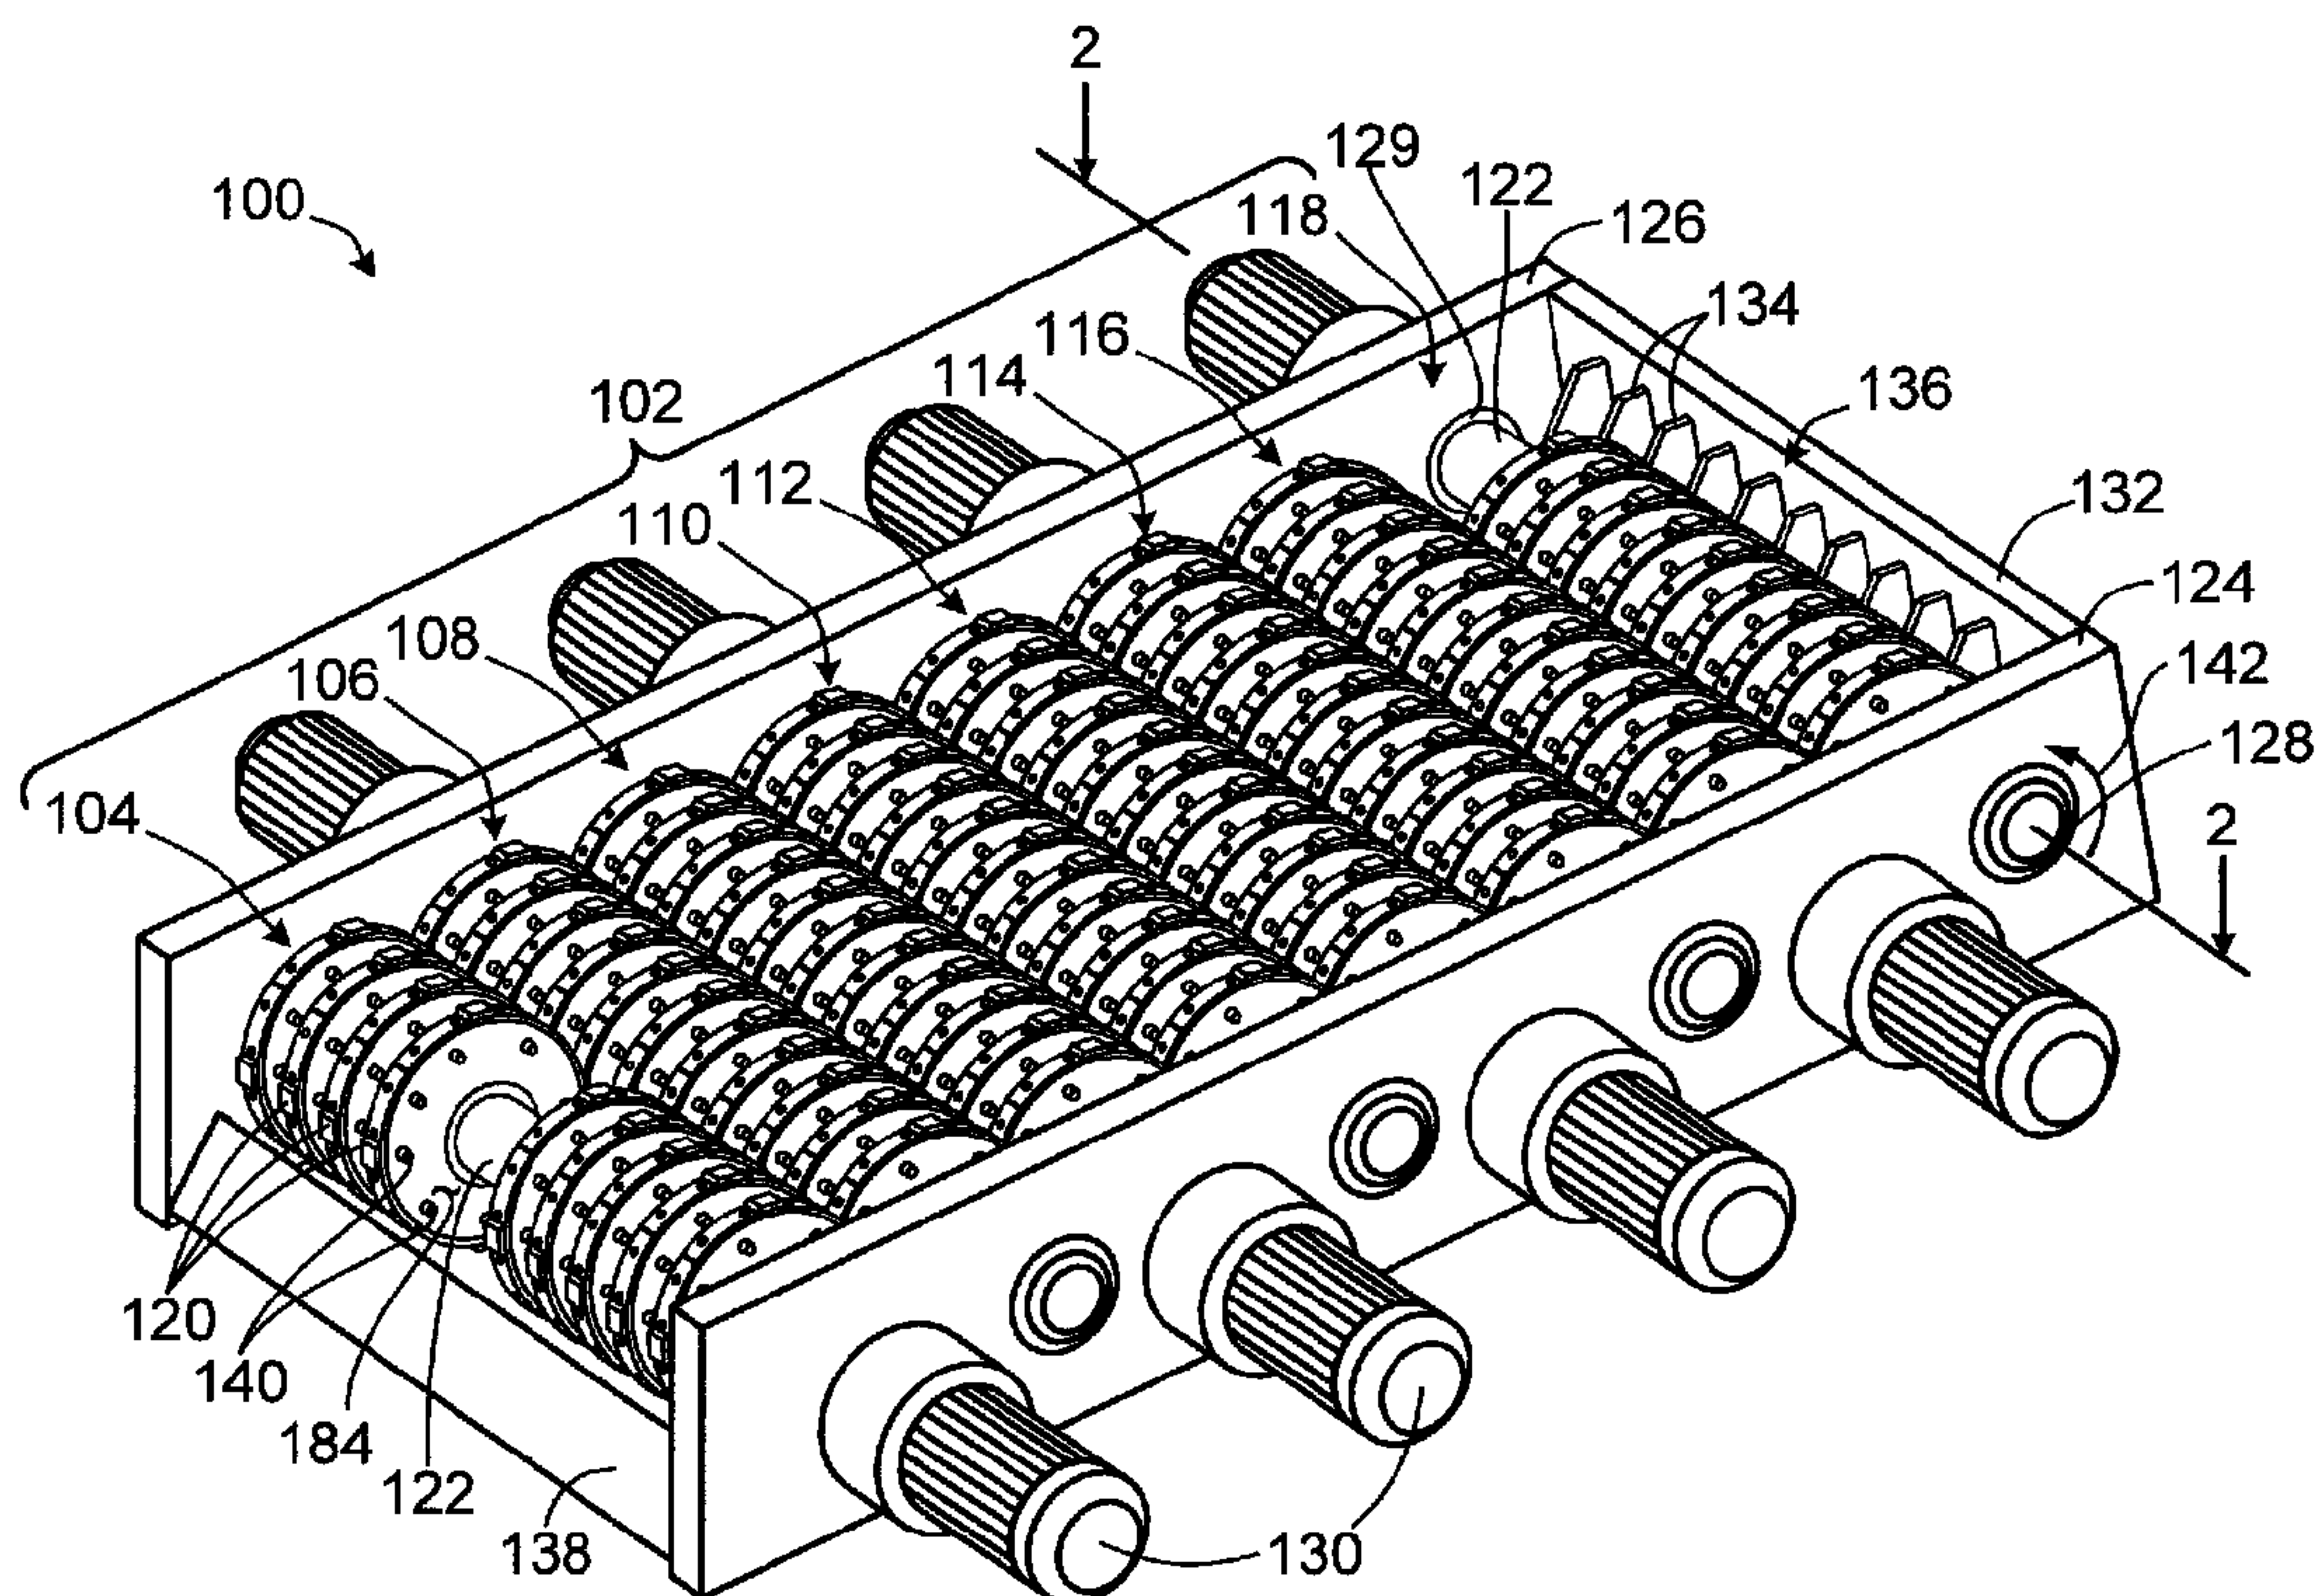

(57) Abrégé/Abstract:

A screening disk for use on a roller of a roller screen for screening an ore feed is disclosed, which includes first and second opposing side working surfaces, and provisions for mounting the screening disk on a shaft of the roller. At least one of the first and second side working surfaces has a plurality of protrusions operable to extend outwardly into an interstice between the applicable side working surface and a side working surface of an adjacent mounted screening disk. A spacer may be disposed in the one interstice for confining an extent of the one interstice to a region disposed generally between the third working surface and the shaft. A screening disk may have a keyway configured to receive a key for coupling the body of the screening disk to the shaft for rotation therewith.

ABSTRACT

A screening disk for use on a roller of a roller screen for screening an ore feed is disclosed, which includes first and second opposing side working surfaces, and provisions for mounting the screening disk on a shaft of the roller. At least one of the first and second side working surfaces has a plurality of protrusions operable to extend outwardly into an interstice between the applicable side working surface and a side working surface of an adjacent mounted screening disk. A spacer may be disposed in the one interstice for confining an extent of the one interstice to a region disposed generally between the third working surface and the shaft. A screening disk may have a keyway configured to receive a key for coupling the body of the screening disk to the shaft for rotation therewith.

5

10

15

SCREENING DISK, ROLLER, AND ROLLER SCREEN FOR SCREENING AN ORE FEED

5 FIELD OF THE INVENTION

This invention relates generally to screening of an ore feed using a roller screen and more particularly to a screening disk and roller for use in a roller screen for screening an ore feed.

10 BACKGROUND OF THE INVENTION

Surface mining operations are generally employed to excavate an ore deposit that is found near the surface of an ore body. Such ore deposits are usually covered by an overburden of rock, soil, and/or plant matter, which may be removed prior to commencing mining operations. The remaining ore deposit
15 may then be excavated and transported to a plant for processing to remove commercially useful products. The ore deposit may comprise an oil sand deposit from which hydrocarbon products may be extracted, for example.

In general, the excavated ore will include sized ore portions having a size
20 suitable for processing and oversize ore portions that are too large for processing. Separation of the oversize ore portions from sized ore portions may be performed by screening the excavated ore through a screen mesh having openings sized to permit passage of sized ore portions through the screen while preventing oversize ore portions from passing through the
25 screen. The oversize ore portions may be discarded and/or crushed to produce sized ore. One problem associated with such screening is that the screen mesh is prone to blockage.

Roller screens have also been used to screen ore. The roller screen has a
30 plurality of adjacently located rollers, each roller having a plurality of screening

-2-

disks mounted in spaced apart relation on a shaft. The screening disks intermesh with screening disks on an adjacent roller of the roller screen to define interstices for permitting passage of sized ore portions through the roller screen. The rollers are coupled to a rotational drive to cause the rollers to rotate, thereby clearing blockages that may occur while screening the ore.

In the example of an oil sand ore deposit, such as the Northern Alberta oil sands, the ore deposit comprises about 70 to about 90 percent by weight of mineral solids including sand and clay, about 1 to about 10 percent by weight of water, and a bitumen or oil film. The bitumen may be present in amounts ranging from a trace amount up to as much as 20 percent by weight. Due to the highly viscous nature of bitumen, when excavated some of the ore may remain as clumps of oversize ore that requires sizing to produce a sized ore feed suitable for processing. Due to the northerly geographic location of many oil sands deposits, the ore may also be frozen making sizing of the ore more difficult.

SUMMARY OF THE INVENTION

In accordance with one aspect of the invention there is provided a screening disk for use on a roller of a roller screen for screening an ore feed, the roller screen having a plurality of adjacently located rollers, each adjacently located roller having a plurality of screening disks mounted in spaced apart relation on a shaft, the mounted screening disks being operable to intermesh with mounted screening disks on an adjacent roller of the roller screen to define interstices between respective mounted screening disks for permitting passage of sized ore portions through the roller screen. The screening disk includes first and second opposing side working surfaces, and provisions for mounting the screening disk on a shaft of the roller for rotation therewith. At least one of the first and second side working surfaces has a plurality of protrusions operable to extend outwardly into an interstice between the at least one side working surface and a side working surface of an adjacent

mounted screening disk, the protrusions being operable to prevent oversize portions of ore passing through the interstice between the intermeshing screening disks. Each protrusion is removably secured to the screening disk to facilitate replacement of the protrusion.

5

The protrusions each have a generally cylindrical shape.

10

Each protrusion of the plurality of protrusions may be dimensioned to provide sufficient clearance distance between the protrusion and the side working surface of the adjacent mounted screening disk to prevent contact between the protrusion and the side working surface when operating the roller screen.

15

The interstice between the at least one side working surface and the side working surface of the adjacent mounted screening disk may have a dimension of about **60** millimeters and the clearance distance is in the range of about **10** millimeters.

20

Each protrusion may include a dowel pin operably configured to be received in respective openings in at least one of the first and second side working surfaces.

The protrusion and the dowel pin may be a unitary body.

25

The dowel pin may include a threaded portion operably configured to receive a fastener extending through a portion of the screening disk for removably securing the dowel pin in the opening.

30

The screening disk may include a third working surface extending between the first and second side working surfaces, the third working surface being operable to define an interstice between the third working surface and a shaft of an adjacent roller when mounted in the roller screen, and the third working

3A

5 surface may include at least one removable cap disposed circumferentially on the screening disk, and the fastener received in the threaded portion of the dowel pin extends through the removable cap and through the portion of the screening disk and may be operable to secure the removable cap on the screening disk.

The plurality of protrusions may be disposed in spaced apart relation on the at least one side working surface.

10 The plurality of protrusions may include a first plurality of protrusions disposed in spaced apart relation about a center of the at least one side working surface.

15 The first plurality of protrusions may be disposed at a first radial distance from the center of the at least one side working surface and may further include a second plurality of protrusions disposed in spaced apart relation about the center of the at least one side working surface, the second plurality of

-4-

protrusions being disposed at a second radial distance from the center of the at least one side working surface.

5 Each of the first and second opposing side working surfaces may include plurality of protrusions extending outwardly therefrom.

10 The screening disk may include a third working surface extending between the first and second side working surfaces, the third working surface being operable to define an interstice between the third working surface and a shaft of an adjacent roller when mounted in the roller screen.

The third working surface may include at least one removable cap disposed circumferentially on the screening disk.

15 The screening disk may include an opening bored through the screening disk between the first and second opposing side working surfaces, the opening being operable to receive a first fastener having a first threaded portion operable to receive a threaded portion of a second fastener for securing the at least one removable cap to the screening disk.

20 The provisions for mounting the screening disk on a shaft may include a centrally located opening extending between the first and second opposing side working surfaces of the screening disk, the opening being operably configured to permit the screening disk to be received on the shaft and to
25 engage the shaft for rotation therewith.

30 In accordance with another aspect of the invention there is provided a roller for use in a roller screen for screening an ore feed. The roller includes a shaft, and a plurality of screening disks mounted in spaced apart relation on the shaft. The screening disks are operable to intermesh with mounted screening disks on an adjacent roller of the roller screen to define interstices

- 5 -

between respective mounted screening disks for permitting passage of sized ore portions through the roller screen. At least one of the plurality of screening disks on the shaft includes a screening disk as claimed above.

In accordance with another aspect of the invention there is provided a roller screen for screening an ore feed. The roller screen includes a plurality of adjacently located rollers. Each roller includes a shaft having a plurality of screening disks mounted in spaced apart relation on the shaft the mounted screening disks being operable to intermesh with mounted screening disks on an adjacent roller of the roller screen to define interstices between respective mounted screening disks for permitting passage of sized ore portions through the roller screen. At least one of the screening disks on at least one of the rollers includes a screening disk as claimed above.

Each of the screening disks on the at least one roller may include a protrusion extending outwardly from each of the first and the second side working surfaces and an adjacent roller to the at least one of the adjacently located rollers may include a plurality of screening disks that do not include protrusions.

Each screening disk may include a third working surface extending between the first and second side working surfaces, one interstice of the plurality of interstices being defined extending outwardly from a shaft of an adjacently located roller toward the third working surface, and the roller screen may further include at least one spacer disposed in the one interstice for confining an extent of the one interstice to a region disposed generally between the third working surface and the shaft, the at least one spacer being operable to prevent oversize ore portions from passing through the one interstice.

- 7 -

The at least one spacer may include an annular spacer disposed in the one interstice.

The annular spacer may be supported on the shaft and disposed adjacent to one of the side working surfaces of the screening disk.

The annular spacer may be connected to one of the side working surfaces of the screening disk and extends outwardly therefrom into the one interstice.

The at least one annular spacer may include a first annular spacer disposed adjacent to the first side working surface of a first screening disk, and a second annular spacer disposed adjacent to the second side working surface of a second screening disk located on the shaft adjacent to the first screening disk.

Each screening disk may include a third working surface extending between the first and second side working surfaces, one interstice of the plurality of interstices being defined extending outwardly from a shaft of an adjacently located roller toward the third working surface, and may further include provisions for restricting an extent of the one interstice to a region disposed generally between the third working surface and the shaft, the provisions for restricting being operable to prevent oversize ore portions from passing through the one interstice.

The screening disk may include a generally cylindrical body portion having first and second opposing side working surfaces, provisions for engaging the shaft for rotation therewith, and a third working surface extending across the screening disk between the first and second side working surfaces, the third working surface having a plurality of teeth, each tooth having a tooth face and a tooth back, the tooth back extending between adjacent tooth faces of the plurality of teeth and the tooth face being operably configured to fragment the ore feed to produce ore portions that are sized for passage through the interstices, the tooth face having wear resistant working surface.

- 9 -

The wear resistant working surface on the tooth face may include a wear resistant overlay selectively applied to the tooth face.

5 The wear resistant overlay material may include one of tungsten carbide and chromium carbide.

10 Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

15 The roller screen may include a centrally located opening extending between the first and second opposing side working surfaces for engaging the shaft and at least one keyway formed in the opening, the keyway being operably configured to receive a key for coupling the body of the screening disk to the shaft for rotation therewith.

20 The opening may include a hub for engaging the shaft and the keyway may include a keyway recess formed in the hub.

The key and respective keyways may be toleranced to provide a loose sliding fit between the surfaces of the key and the keyway to prevent ingress of abrasive materials.

BRIEF DESCRIPTION OF THE DRAWINGS

In drawings which illustrate embodiments of the invention,

Figure 1 is a perspective view of a roller screen in accordance with a first embodiment of the invention;

Figure 2 is a cross sectional view of a portion of the roller screen shown in Figure 1 taken along the line 2-2;

Figure 3 is a perspective view of a screening disk used in the roller screen shown in Figure 1;

Figure 4 is a perspective view of a screening disk in accordance with an alternative embodiment of the invention;

Figure 5 is a cross sectional view of a portion of a roller screen incorporating the screening disk shown in Figure 4;

Figure 6 is a top view of a portion of a roller screen including a screening disk in accordance with another embodiment of the invention;

-12-

Figure 7 is a perspective view of a screening disk in accordance with yet another embodiment of the invention;

5 Figure 8 is a perspective exploded view of a screening disk in accordance with a further embodiment of the invention;

Figure 9 is a cross sectional view of a portion of the screening disk shown in Figure 8 taken along the line 9-9;

10 Figure 10 is a perspective view of a removable cap in accordance with another alternative embodiment of the invention;

Figure 11 is a perspective view of a removable cap in accordance with further alternative embodiment of the invention; and

15 Figure 12 is a perspective view of a removable cap in accordance with yet another embodiment of the invention.

DETAILED DESCRIPTION

20 Referring to Figure 1, a roller screen for screening an ore feed is shown generally at 100. The roller screen 100 includes first and second sidewalls 124 and 126 and an end wall 132, located at a first end of the roller screen 100. The end wall 132 extends between the sidewalls 124 and 126. The roller screen 100 also includes a discharge ramp 138 located at a second end
25 of the roller screen 100. The discharge ramp 138 also extends between the first and second sidewalls 124 and 126.

The roller screen 100 further includes a plurality of adjacently located rollers 102. In the embodiment shown the roller screen 100 includes eight rollers
30 104 to 118, but other embodiments may include additional rollers or fewer rollers than shown in Figure 1. Each roller includes a shaft 122 which is

-13-

mounted for rotation in bearings **128** and **129**, the bearings being located in the respective sidewalls **124** and **126**. In one embodiment the bearing may comprise a labyrinth seal to prevent ingress of contaminants, which may cause premature failure of the bearings. In Figure 1, two of the screening disks on the roller **118** have been omitted to reveal the shaft **122** and the bearing **129**. Similarly, two of the screening disks on the roller **104** have been omitted to reveal the shaft **122**.

The roller screen **100** further includes a drive motor **130** associated with each of the rollers **102** for supplying a rotational torque to the respective shafts **122** of the roller. In the embodiment shown in Figure 1, each roller **102** has an associated drive motor **130**, but in other embodiments a single drive motor may be coupled more than one roller for providing a drive torque to more than one roller.

Each roller **102** further includes a plurality of screening disks **120** mounted in spaced apart relation on the shaft **122**. The mounted screening disks **120** intermesh with mounted screening disks on an adjacent roller. For example, the mounted screening disks **120** on the roller **104** intermesh with mounted screening disks on the adjacent roller **106**. The end wall **132** also includes a plurality of static plates **134**, which extend outwardly from the end wall and intermesh with the screening disks **120**. The intermeshing screening disks **120** and static plates **134** define a plurality of interstices therebetween for permitting passage of sized ore portions through the roller screen **100**. In general, the spacing between screening disks **120** defines dimensions of the interstices, which in turn determines a passing size for the roller screen **100**. In one embodiment where an oil sand ore feed is to be processed, the desired passing size is about **60** mm by about **60** mm by about **100** mm. In other embodiments the passing size may be larger or smaller on one or more dimensions.

-14-

In the embodiment shown, each screening disk **120** includes plurality of protrusions **140** extending outwardly from a side working surface **184** of the screening disk. Portions of the rollers **116** and **118** of the roller screen **100** are shown in sectional view in Figure 2 at **160**. Referring to Figure 2, the intermeshing disks **120** define interstices **162** (shown in broken outline) including an interstice **164** between the screening disk **120** and the shaft **122**, and an interstice **166** between adjacent screening disks. The protrusion **140** effectively divides the interstice **166** into two smaller interstices, thereby preventing elongate oversize portions of ore from passing through the interstice. Similarly, the plurality of static plates **134** further define interstices **168** and **170** between the static plates **134** and the screening disks **120**, and a respective protrusion **140** divides the interstice **170** into two smaller interstices.

In operation, an ore feed including some sized ore portions and some oversize ore portions, is received at an input end **136** of the roller screen **100**. The sized ore portions have passing size dimensions that should permit passage through the interstices **160**, while the oversize ore portions have at least one dimension too large to permit passage through the interstices. In one operational embodiment, each of the rollers **102** are rotated in a direction shown by the arrow **142** to cause the ore feed to be transported along the roller screen from the input end **136** to the discharge ramp **138**. While the ore feed is being transported, sized ore portions are able to pass through the interstices **160** and fall through the roller screen **100**. In general the roller screen is disposed over a container (not shown) that receives the sized ore portions for further processing. Oversize ore portions are generally prevented from passing through the interstices **160**, unless in the process of being transported, the action of the screening disks **120** causes the oversize ore portions to be fragmented into sized ore portions. In general, the screening rollers **102** of the roller screen **100** provide some sizing action resulting in fragmentation of some oversize ore portions into ore portions of passing size.

Oversize ore portions that reach the discharge ramp **138** are discharged from the roller screen **100** and may be further sized in a separate process or may be discarded. Alternatively, as disclosed in Canadian Patent application
5 CA**2640514** filed on October 7, 2008 and entitled "Method and Apparatus for Processing an Ore Feed", additional opposing sizing rollers may be included to cause the oversize ore portions in the ore feed to be sized while being transported along the roller screen.

10 The screening disk **120** is shown in greater detail in Figure 3. Referring to Figure 3, the screening disk **120** includes a body portion **180** having a centrally located opening **182** for mounting the screening disk on the shaft **122** (shown in Figure 1). In the embodiment shown, the centrally located opening **182** is defined by a mounting hub **188**, which may be welded to the
15 body portion **180**. The body portion **180** defines a first side working surface **184**. A second side working surface (not shown in Figure 3) is defined on an opposite side of the body portion **180**. The screening disk **120** further includes a third working surface **186** extending between the first and second side working surfaces.

20 In the embodiment shown in Figure 3, the protrusions **140** have a truncated conical shape. In other embodiments the protrusions may have a cylindrical shaped or a generally cubic shape (as shown in Figure 7). The protrusions **140** are disposed in uniform spaced apart relation about a center of the first side working surface **194**, each protrusion being spaced a distance R from the
25 center of the first side working surface **184**. Referring back to Figure 2, the protrusions **140** are dimensioned to provide an operational clearance distance D between an extent **172** of the protrusion **140** and the adjacent screening disk. In general the clearance D is selected to provide sufficient clearance to
30 prevent contact between the extent **172** and a side working surface of the adjacent screening disk, during operation of the roller screen **100**. In one

-16-

embodiment a width W of the screening disk **120** may be about **75** mm, the distance between side working surfaces of adjacent screening disks may be about **50** mm or between about **50** mm and about **60** mm, and the clearance distance D may be about **10** mm or more. In other embodiments the distance between side working surfaces of adjacent screening disks may be larger. For example, in another embodiment, the distance between side working surfaces may be about **60** mm to about **100** mm to provide yet further spacing when working with suitable feed material or when the feed material will be further processed downstream with a further or secondary sizer. In yet another embodiment, the distance between side working surfaces may be greater than **100** mm to provide yet further spacing. For instance, in yet another embodiment, the distance between side working surfaces may be about **100** mm to about **150** mm.

Referring now to Figure 4, a screening disk in accordance with an alternative embodiment of the invention is shown generally at **200**. The screening disk **200** includes a body portion **202**, defining a first side working surface **204**. The screening disk **200** includes a first plurality of protrusions **206**, which are spaced apart about a center of the first side working surface **204**. Each of the first plurality of protrusions **206** are located a distance R_1 from the center of the side working surface **204**. The screening disk **200** further includes a second plurality of protrusions **208**, which are spaced apart about a center of the first side working surface **204**. Each of the second plurality of protrusions **206** are located a distance R_2 from the center of the side working surface **204**. In this embodiment the first plurality of protrusions **206** are also angularly offset from the second plurality of protrusions **208** by an angle Φ . However, in other embodiments members of each of the first and second plurality of protrusions may be radially aligned (i.e. $\Phi = 0$ degrees). The screening disk **200** further includes a third working surface **214** extending between the first and second side working surfaces.

-17-

Still referring to Figure 4, the screening disk **120** also includes a mounting hub **210**, which may be welded to the body portion **202** for example. The mounting hub **210** includes a spacer portion **212**, which extends outwardly from the first side working surface **204**. Accordingly, in this embodiment the spacer portion **212** has a generally annular shape.

A portion of a roller screen having screening disks in accordance with the embodiment shown in Figure 4 is shown generally in Figure 5 at **230**. Referring to Figure 5, the first and second plurality of protrusions **206** and **208** on the intermeshing screening disks **200**, and the spacer portions **212** define a plurality of interstices **232** between adjacent screening disks. The interstices **232** include a first interstice **234**, which is confined in extent by the spacers **212** to a region between the third working surface **214** and the shaft **122**. Advantageously, the spacers **212** prevent oversize ore portions from passing through the first interstice **234**. The interstices **232** further include, a second interstice **236** between the spacer **212** and the protrusion **206**, a third interstice **238** between the protrusions **206** and **208**, and a fourth interstice **240** between the protrusion **208** and the spacer **212** located on the shaft **122** of the adjacent roller **118**. Advantageously, the radii R_1 and R_2 are selected to cause the second, third, and fourth interstices **234**, **236**, and **238** to prevent oversize ore portions from passing through the respective interstices, while passing ore portions of passing size.

Various other configurations of protrusions and spacers are possible. For example, as shown in top view in Figure 6, a screening disk **250** has a first side working surface **252** and a second side working surface **254**. The screening disk **250** includes protrusions **256** located on the first side working surface **252** at a radius R_2 from the center and protrusions **258** located on the second side working surface **254** at a radius R_1 from the center. Referring back to Figure 1, in other embodiments screening disks on alternating rollers (for example the rollers **104**, **108**, **112**, and **106**) may include protrusions

-18-

located on each of the first and second side working surfaces while the remaining rollers (i.e. rollers **106**, **110**, **114**, and **118**) may not include protrusions.

5 An alternative embodiment of a spacer **260** is also shown in Figure 6. The spacer **260** has a generally cylindrical shape with an internal bore (not shown) sized to be received on a shaft **264** between the spaced apart screening disks **250**. The spacer **260** includes a centrally located recess **262**. When assembled on a roller, the spacer **26** is disposed in-between adjacent
10 screening disks **250** and is operable to confine an extent of an interstitial region between a third working surface **266** of the screening disk **250** and the shaft **264**, as described above in connection with Figure 5.

Referring back to Figure 4 in the embodiment shown, the hub **210** of the
15 screening disk **200** includes a keyway recess **216** for receiving a key for coupling the screening disk **200** to the shaft **122**. Referring to Figure 7, the screening disk **200** is shown mounted on a shaft **284**, which includes a keyway recess **282** corresponding to the keyway recess **216** on the hub **210**. When mounting the screening disk **200** on the shaft **122**, the corresponding
20 keyway recesses **216** and **282** are aligned and a key **280** is inserted into the keyway. Advantageously, the key **280** and keyway recesses **216** and **282** are toleranced to provide a loose sliding fit between the surfaces of the key and the keyway to prevent ingress of sand or other abrasive materials, which could cause failure of the coupling, between the disk **200** and the shaft **284**.
25 In the embodiment shown in Figure 7, the screening disk **200** has protrusions **286** having a generally cubic shape in place of the truncated conical shaped protrusions shown in other embodiments.

Referring now to Figure 8, an alternative embodiment of a screening disk for
30 use in the roller screen **100** is shown generally at **300**. The screening disk **300** includes first and second separable body portions **302** and **304**. The first

-19-

body portion **302** includes a first mounting hub portion **306** attached to the first body portion and the second body portion **304** includes a second mounting hub portion **308** attached to the second body portion and **304**. Together, the first and second mounting hub portions **306** and **308** define an opening **310** having at least one planar portion **312** for engaging a corresponding planar portion of a shaft (not shown). In the embodiment shown in Figure 8, the opening **310** has a generally square opening for mounting on a shaft having a corresponding square cross section.

The body portions **302** and **304** together form first and second opposing side working surfaces **316** and **318**. A third working surface **320** is provided by a removable cap **314** extending across the screening disk between the first and second side working surfaces **316** and **318**. In the embodiment shown, four such removable caps are provided to define a third working surface extending around a circumference of the screening disk **300**.

The removable cap **314** has a first end **322** and a second end **324**. The first end **322** includes a through opening **326** for receiving a first fastener **330**. The second body portion **304** also includes an opening **328**, which is aligned with the opening **326** for receiving the first fastener **330** for securing the first end of the removable cap **314** to the second body portion **304**. Similarly, the second end **324** includes a through opening for receiving a second fastener **332** for securing the second end of the removable cap **314** to the first body portion **302**. In the embodiment shown, further openings are provided in the removable cap **314** for receiving further fasteners **334** for securing the cap to the first and second body portions. The removable cap **314** further includes a protruding channel portion **338** for engaging corresponding channel portions **340** in the body portions **302** and **304**. In other embodiments, the protruding channel may be provided on the body portions **304** and **304**, and the removable cap **314** may include a corresponding channel for receiving the protruding channel portion.

-20-

When mounting the screening disk **300**, the first and second body portions **302** and **304** are separately mounted on the shaft and the respective first and second ends **322** and **324** of the removable cap **314** are secured to the
5 respective first and second body portions **302** and **304**. Similarly, the first and second ends of an oppositely located removable cap **336** are secured to the respective first and second body portions **302** and **304**, thereby securing the screening disk **300** on the shaft. The channel portion **338** acts to locate the cap **314** on the body portion and to prevent lateral movement of the cap
10 during operation of the roller screen.

Referring to Figure 9, the removable cap **314** and a portion of the second body portion **304** of the screening disk **300** is shown in cross section at **360**. The channel portion **338** of the removable cap **314** is shown located in the
15 corresponding channel portion **340** of the second body portion **304**. The second body portion **304** further includes a through opening **362**, extending through the body portion between the first and second working surfaces **316** and **318**. The opening **328** extends between the channel portion **340** and the through opening **362**. The through opening **362** is dimensioned to receive a
20 dowel pin **364**. The dowel pin **364** has a threaded portion **366** for receiving a threaded portion of the fastener **330** for securing the cap **314** to the second body portion. Advantageously, should the dowel pin **364** require replacement, it is a relatively simple matter to drive out a damaged dowel pin **364** and insert a replacement. Referring back to Figure 8, in the embodiment shown each
25 dowel pin **364** includes a protrusion **342**, the dowel pin and protrusion forming a unitary body. In other embodiments the protrusions may be welded or otherwise attached to the sides of the screening disk.

Advantageously, the screening disk **300** facilitates replacement of a damaged
30 or worn screening disk on a roller in-situ, since the damaged disk may be removed without removing the roller from the roller screen **100**. The rollers

are extremely heavy and require specialized rigging equipment for removal, to permit access to the shaft, and thus in-situ disk replacement represents a substantial serviceability improvement. The removable protrusions **342** further permit replacement of worm protrusions on a screening disk.

5

Referring now to Figure **10**, a removable cap in accordance with an alternative embodiment is shown generally at **400**. The removable cap **400** includes a transverse keyway **402** in channel portion **338** for receiving a key **404** for transmitting a torque from the body portion of the screening disk to the cap. In this embodiment, the screening disk has a corresponding transverse keyway (not shown). Advantageously, by transmitting a substantial portion of the torque through the key **404**, the fasteners **330**, **332**, and **334** shown in Figure **8** are subjected to reduced shearing stress thereby preventing potential failure of the fasteners. In other embodiments, the key **404** may be integrally formed in the replaceable cap **400**.

10

15

20

25

Referring to Figure **12**, a removable cap according to yet another embodiment is shown generally at **450**. The removable cap **450** in this embodiment includes three hook-shaped teeth **452** for gripping ore portions while screening the ore feed. The teeth **452** may be included to facilitate some sizing action for reducing the size of oversize ore portions in the ore feed. Advantageously, removable caps with a variety of different shaped teeth may be fabricated to permit configuration of the screening disks for screening of a particular ore feed. The removable cap **450** also differs from the removable cap **314** in that the protruding channel portion **338** has been omitted in favor of a circumferential key **454**, which is received in a channel **456** in the cap and engages the corresponding channel portion **340** (shown in Figure **8**).

The removable cap **400** may be fabricated by a casting process, and in one embodiment may be cast from white iron. Cast white iron is extremely hardwearing and is preferably cast into a final shape, since machining is

30

-22-

generally limited to grinding operations. In embodiments where the removable cap **400** is fabricated from cast white iron, tolerances of the screening disk receiving the cap should take into account the variability of the casting process. The inventors have further found that when the width W of the disk (as defined in Figure 2) is too small, the required size of the fasteners **330**, **332**, and **334** (shown in Figure 8) causes the cap **400** to be prone to cracking. Accordingly, Applicant has determined that white iron castings, the cap width W should preferably be greater than about **75** mm. Advantageously, when the cap **400** is cast from white iron, the entire cap is extremely wear resistant due to the distributed chromium carbides in the bulk material of the cap.

Referring to Figure 11, a removable cap in accordance with another embodiment of the invention is shown generally at **430**. In this embodiment, the removable cap **430** has a different working surface **432** to the cap **400** shown in Figure 10. Specifically the working surface **432** comprises a plurality of teeth (**434** to **438**), each tooth having a tooth face **440**, and a tooth back **442**. The tooth face **440** is defined by an intended direction of rotation of the cap **430** when in operation. In this embodiment, the cap **430** is fabricated from a material having ordinary wear characteristics, and the cap is post treated to provide a wear resistant working surface **432**. In one embodiment, a tungsten-carbide overlay is applied to the cap using a plasma transfer arc process. Advantageously, due to the high cost of providing a tungsten-carbide overlay, the overlay may be selectively applied to the tooth face **440** as shown by the shaded areas in Figure 11. In this case the tooth back **442** remains un-hardened. Generally during operation, a majority of the wear occurs on the tooth face **440** and wear of the tooth back **442** is not significant. In one embodiment the thickness of the selectively applied tungsten-carbide layer is about **5** mm. In other embodiments, the wear resistant overlay may comprise chromium carbide.

Although specific embodiments of the invention have been described and illustrated, such embodiments should be considered illustrative of the invention only and not as limiting the invention as construed in accordance with the accompanying claims. Various modifications of form, arrangement of components, steps, details and order of operations of the embodiments illustrated, as well as other embodiments of the invention, will be apparent to persons skilled in the art upon reference to this description. It is therefore contemplated that the appended claims will cover such modifications and embodiments as fall within the true scope of the invention. In the specification including the claims, numeric ranges are inclusive of the numbers defining the range. Citation of references herein shall not be construed as an admission that such references are prior art to the present invention.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. A screening disk for use on a roller of a roller screen for screening an ore feed, the roller screen having a plurality of adjacently located rollers, each adjacently located roller having a plurality of screening disks mounted in spaced apart relation on a shaft, the mounted screening disks being operable to intermesh with mounted screening disks on an adjacent roller of the roller screen to define interstices between respective mounted screening disks for permitting passage of sized ore portions through the roller screen, the screening disk comprising:
 - first and second opposing side working surfaces;
 - means for mounting the screening disk on a shaft of the roller for rotation therewith;
 - at least one of the first and second side working surfaces having a plurality of protrusions operable to extend outwardly into an interstice between the at least one side working surface and a side working surface of an adjacent mounted screening disk, the protrusions being operable to prevent oversize portions of ore passing through the interstice between the intermeshing screening disks; and
 - wherein each protrusion is removably secured to the screening disk to facilitate replacement of the protrusion.
2. The screening disk of claim 1 wherein the protrusions each have a generally cylindrical shape.

3. The screening disk of any one of claims 1 to 2 wherein each protrusion of the plurality of protrusions is dimensioned to provide sufficient clearance distance between the protrusion and the side working surface of the adjacent mounted screening disk to prevent contact between the protrusion and the side working surface when operating the roller screen.
4. The screening disk of any one of claims 1 to 3 wherein the interstice between the at least one side working surface and the side working surface of the adjacent mounted screening disk has a dimension of about 50 to 60 millimeters and the clearance distance is in the range of about 10 millimeters.
5. The screening disk any one of claims 1 to 4 wherein the plurality of protrusions is disposed in spaced apart relation on the at least one side working surface.
6. The screening disk of claim 5 wherein the plurality of protrusions comprise a first plurality of protrusions disposed in spaced apart relation about a center of the at least one side working surface.
7. The screening disk of claim 6 wherein the first plurality of protrusions are disposed at a first radial distance from the center of the at least one side working surface and further comprising a second plurality of protrusions disposed in spaced apart relation about the center of the at least one side working surface, the second plurality of protrusions being disposed at a second radial distance from the center of the at least one side working surface.
8. The screening disk of any one of claims 1 to 5 wherein each of the first and second opposing side working surfaces comprises a plurality of protrusions extending outwardly therefrom.

- 26 -

9. The screening disk of any one of claims 1 to 8 further comprising a third working surface extending between the first and second side working surfaces, the third working surface being operable to define an interstice between the third working surface and a shaft of an adjacent roller when mounted in the roller screen.
10. The screening disk of claim 9 wherein the third working surface comprises at least one removable cap disposed circumferentially on the screening disk.
11. The screening disk of claim 10 further comprising an opening bored through the screening disk between the first and second opposing side working surfaces, the opening being operable to receive a first fastener having a first threaded portion operable to receive a threaded portion of a second fastener for securing the at least one removable cap to the screening disk.
12. The screening disk of any one of claims 1 to 11 wherein the means for mounting the screening disk on a shaft comprises a centrally located opening extending between the first and second opposing side working surfaces of the screening disk, the opening being operably configured to permit the screening disk to be received on the shaft and to engage the shaft for rotation therewith.
13. A roller for use in a roller screen for screening an ore feed, the roller comprising:
 - a shaft;
 - a plurality of screening disks mounted in spaced apart relation on the shaft, the screening disks being operable to intermesh with mounted screening disks on an adjacent roller of the roller screen

- 27 -

to define interstices between respective mounted screening disks for permitting passage of sized ore portions through the roller screen; and

at least one of the plurality of screening disks on the shaft comprising a screening disk as claimed in any one of claims 1 to 12.

14. A roller screen for screening an ore feed, the roller screen comprising:

a plurality of adjacently located rollers, each roller comprising a shaft having a plurality of screening disks mounted in spaced apart relation on the shaft the mounted screening disks being operable to intermesh with mounted screening disks on an adjacent roller of the roller screen to define interstices between respective mounted screening disks for permitting passage of sized ore portions through the roller screen; and

at least one of the screening disks on at least one of the rollers comprising a screening disk as claimed in any one of claims 1 to 12.

15. The roller screen of claim 14 wherein each of the screening disks on the at least one roller comprises a protrusion extending outwardly from each of the first and the second side working surfaces and wherein an adjacent roller to the at least one of the adjacently located rollers comprises a plurality of screening disks that do not include protrusions.

16. The roller screen of claim 14 wherein each screening disk includes a third working surface extending between the first and second side working surfaces, one interstice of the plurality of interstices being defined extending outwardly from a shaft of an adjacently located roller toward the

third working surface, and further comprising at least one spacer disposed in the one interstice for confining an extent of the one interstice to a region disposed generally between the third working surface and the shaft, the at least one spacer being operable to prevent oversize ore portions from passing through the one interstice.

17. The roller screen of claim **16** wherein the at least one spacer comprises an annular spacer disposed in the one interstice.
18. The roller screen of claim **17** wherein the annular spacer is supported on the shaft and disposed adjacent to one of the side working surfaces of the screening disk.
19. The roller screen of claim **17** wherein the annular spacer is connected to one of the side working surfaces of the screening disk and extends outwardly therefrom into the one interstice.
20. The roller screen of any one of claims **17** to **19** wherein the at least one annular spacer comprises:
 - a first annular spacer disposed adjacent to the first side working surface of a first screening disk; and
 - a second annular spacer disposed adjacent to the second side working surface of a second screening disk located on the shaft adjacent to the first screening disk.
21. The roller screen of claim **14** wherein each screening disk includes a third working surface extending between the first and second side working surfaces, one interstice of the plurality of interstices being defined extending outwardly from a shaft of an adjacently located roller toward the third working surface, and further comprising means for restricting an extent of the one interstice to a region disposed generally between the

third working surface and the shaft, the means for restricting being operable to prevent oversize ore portions from passing through the one interstice.

- 22.** The screening disk of claim **1** further comprising:
- a generally cylindrical body portion having first and second opposing side working surfaces;
 - means for engaging the shaft for rotation therewith; and
 - a third working surface extending across the screening disk between the first and second side working surfaces, the third working surface having a plurality of teeth, each tooth having a tooth face and a tooth back, the tooth back extending between adjacent tooth faces of the plurality of teeth and the tooth face being operably configured to fragment the ore feed to produce ore portions that are sized for passage through the interstices, the tooth face having wear resistant working surface.
- 23.** The screening disk of claim **22** wherein the wear resistant working surface on the tooth face comprises a wear resistant overlay selectively applied to the tooth face.
- 24.** The screening disk of claim **23** wherein the wear resistant overlay material comprises one of tungsten carbide and chromium carbide.
- 25.** The screening disk of claim **1** wherein each protrusion comprises a dowel pin operably configured to be received in respective openings in at least one of the first and second side working surfaces.
- 26.** The screening disk of claim **25** wherein the protrusion and the dowel pin comprise a unitary body.

- 30 -

- 27.** The screening disk of claim **25** wherein the dowel pin comprises a threaded portion operably configured to receive a fastener extending through a portion of the screening disk for removably securing the dowel pin in the opening.
- 28.** The screening disk of claim **27** further comprising a third working surface extending between the first and second side working surfaces, the third working surface being operable to define an interstice between the third working surface and a shaft of an adjacent roller when mounted in the roller screen, and wherein:
- the third working surface comprises at least one removable cap disposed circumferentially on the screening disk; and
- the fastener received in the threaded portion of the dowel pin extends through the removable cap and through the portion of the screening disk and is operable to secure the removable cap on the screening disk.
- 29.** The screening disk of claim **1** further comprising a centrally located opening extending between the first and second opposing side working surfaces for engaging the shaft, and at least one keyway formed in the opening, the keyway being operably configured to receive a key for coupling the body of the screening disk to the shaft for rotation therewith.
- 30.** The screening disk of claim **29** wherein opening comprises a hub for engaging the shaft and wherein the keyway comprises a keyway recess formed in the hub.
- 31.** The screening disk of claim **29** wherein the key and respective keyways are toleranced to provide a loose sliding fit between the surfaces of the key and the keyway to prevent ingress of abrasive materials.

+

1/6

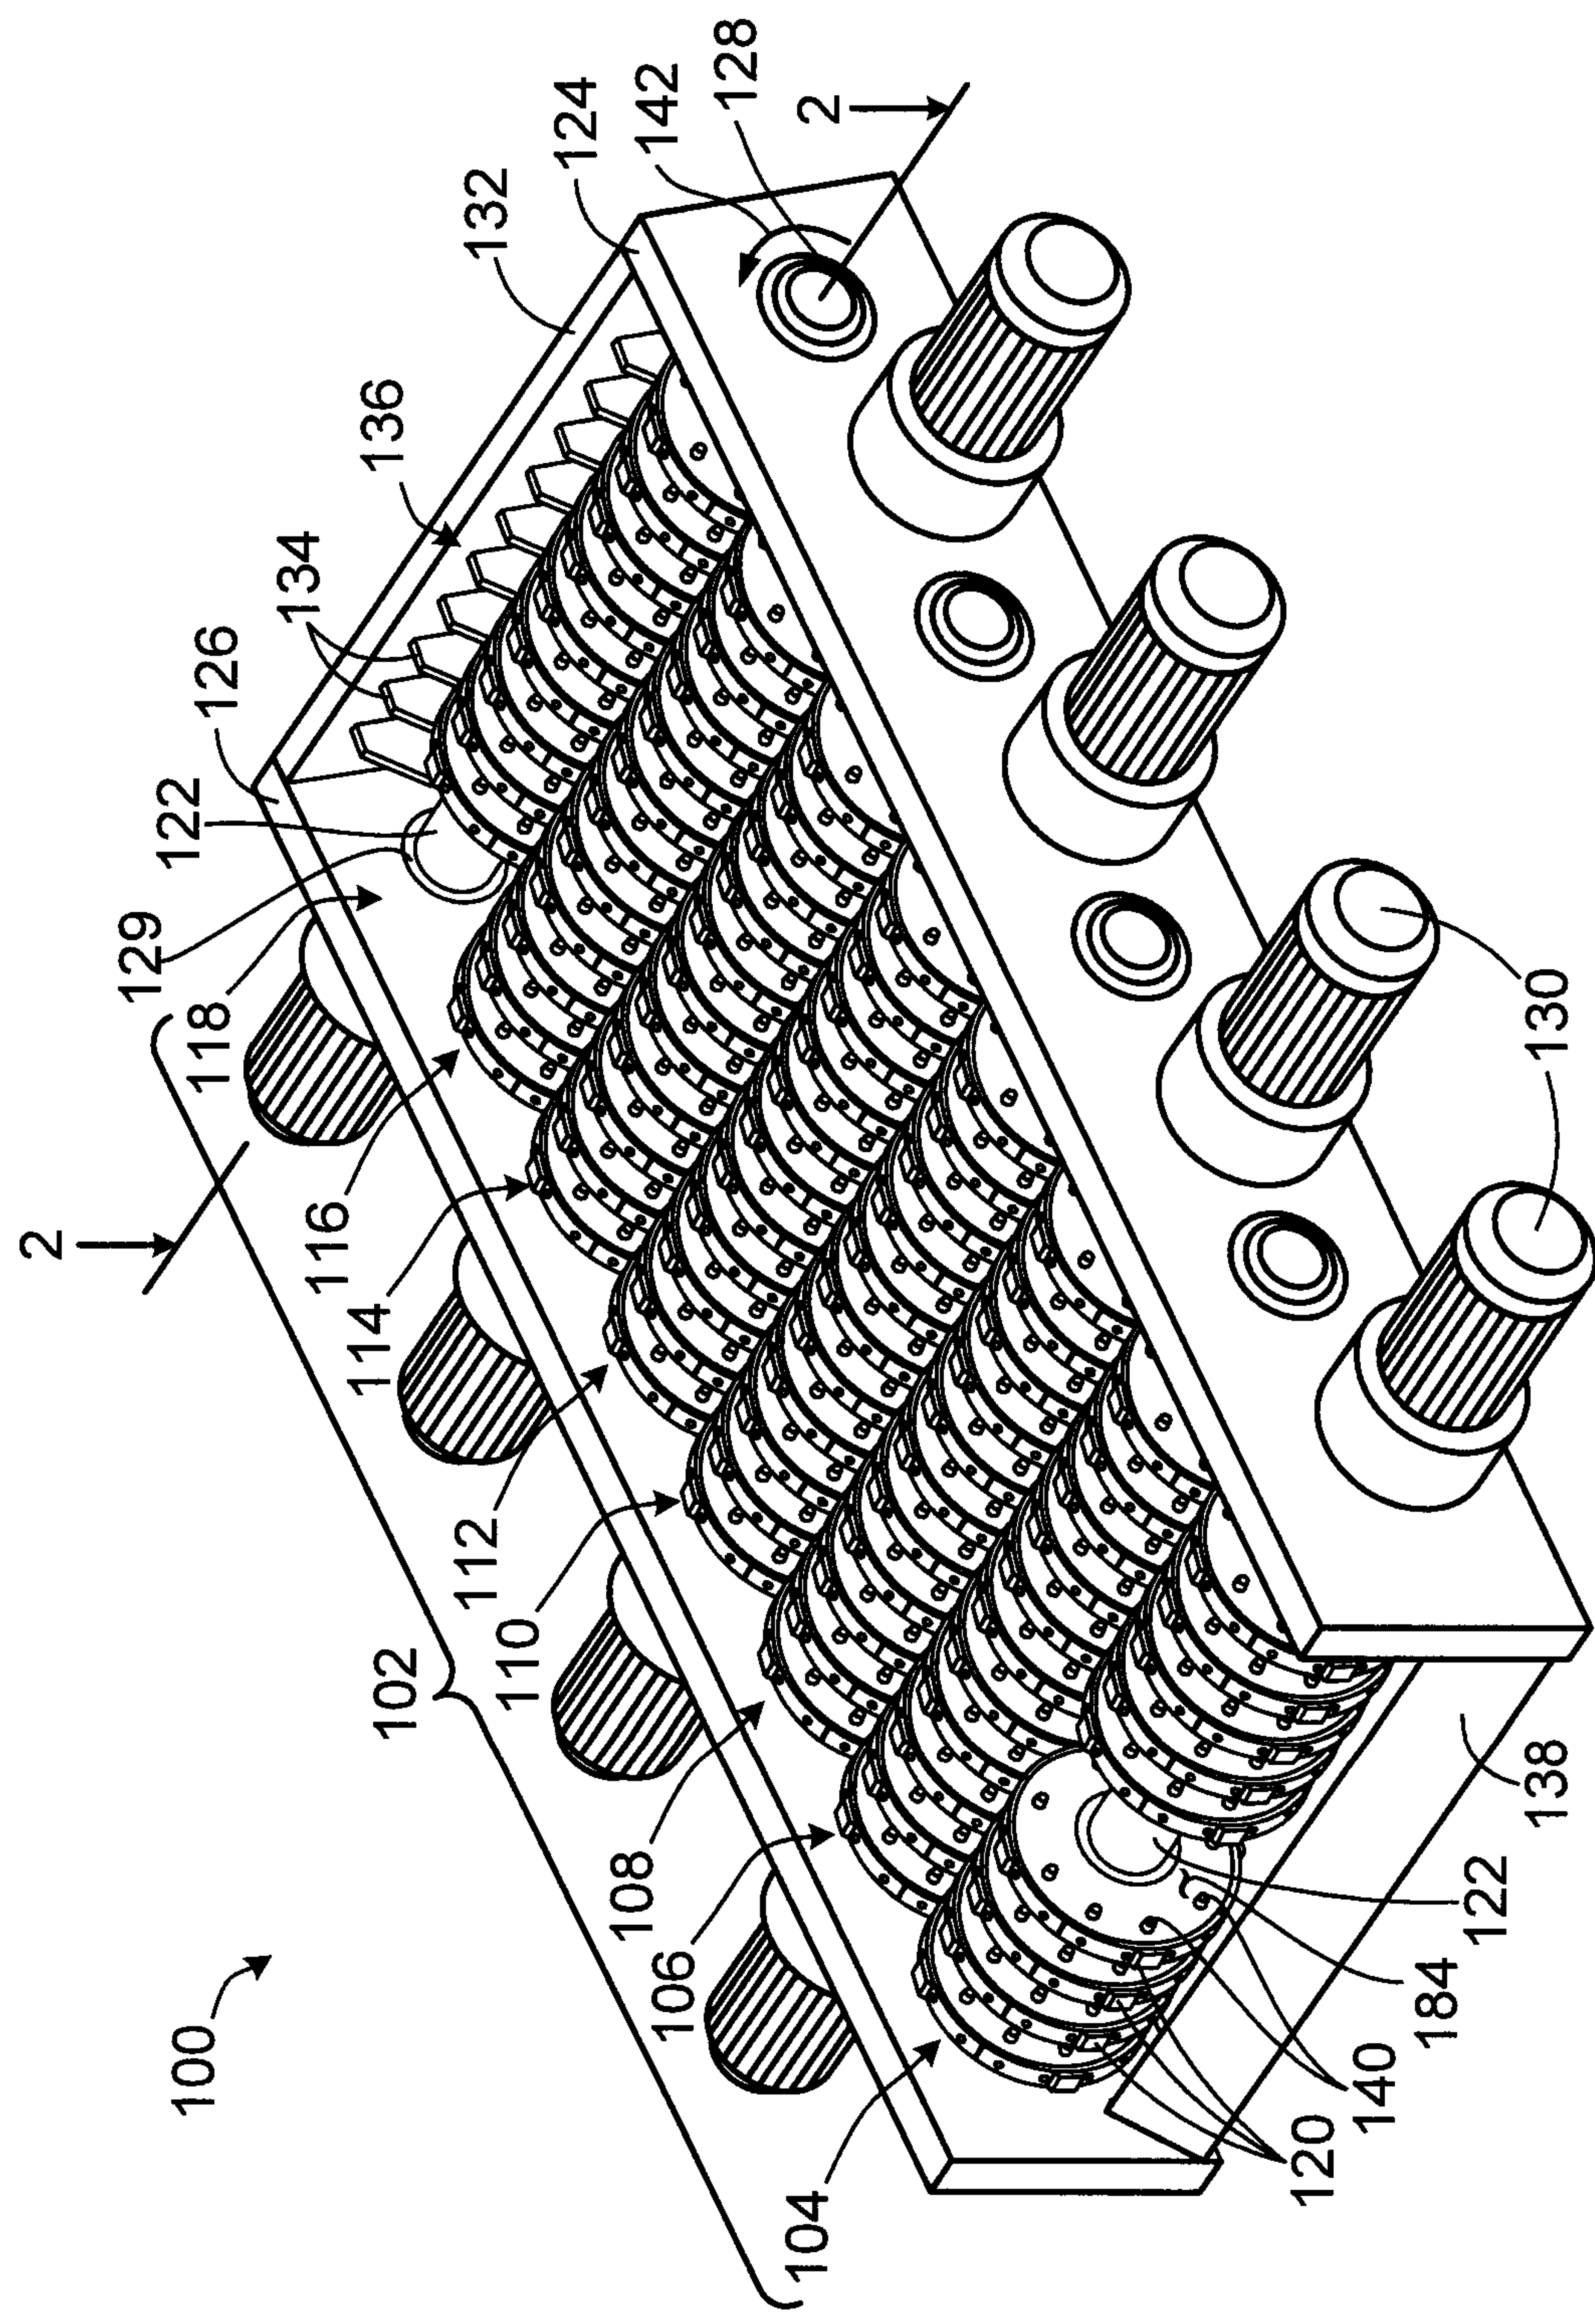


FIG. 1

+

+

2/6

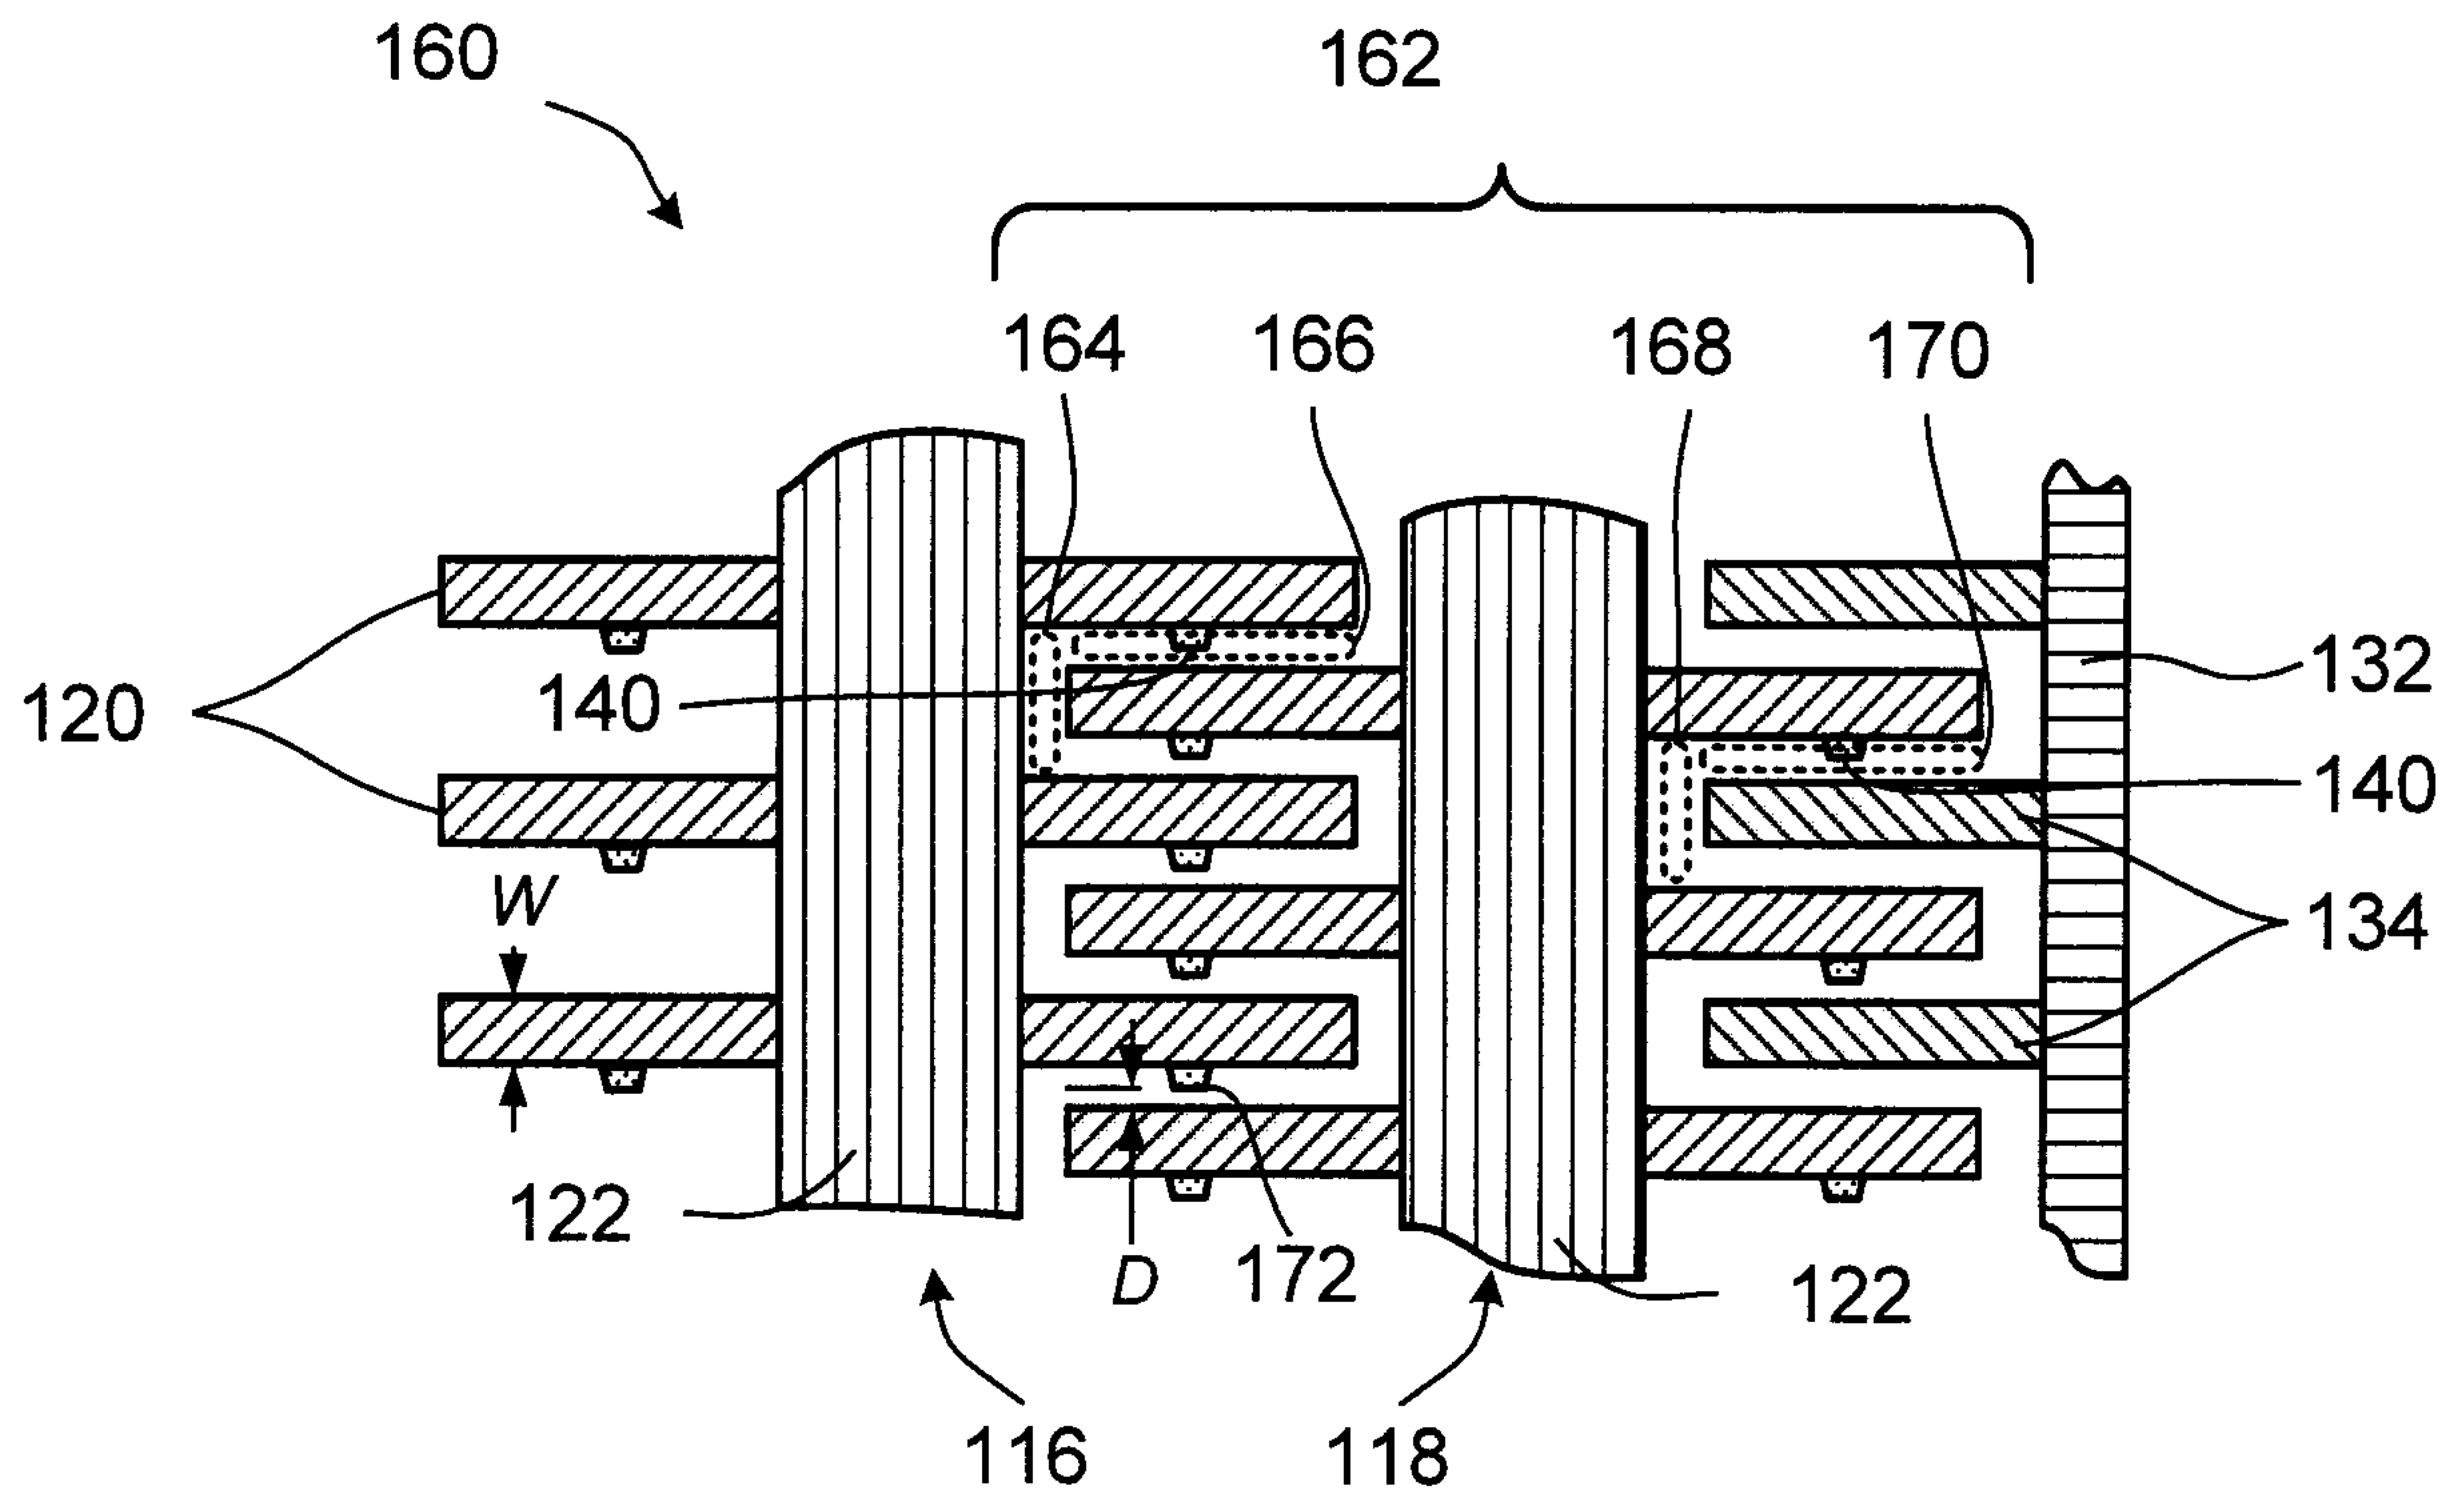


FIG. 2

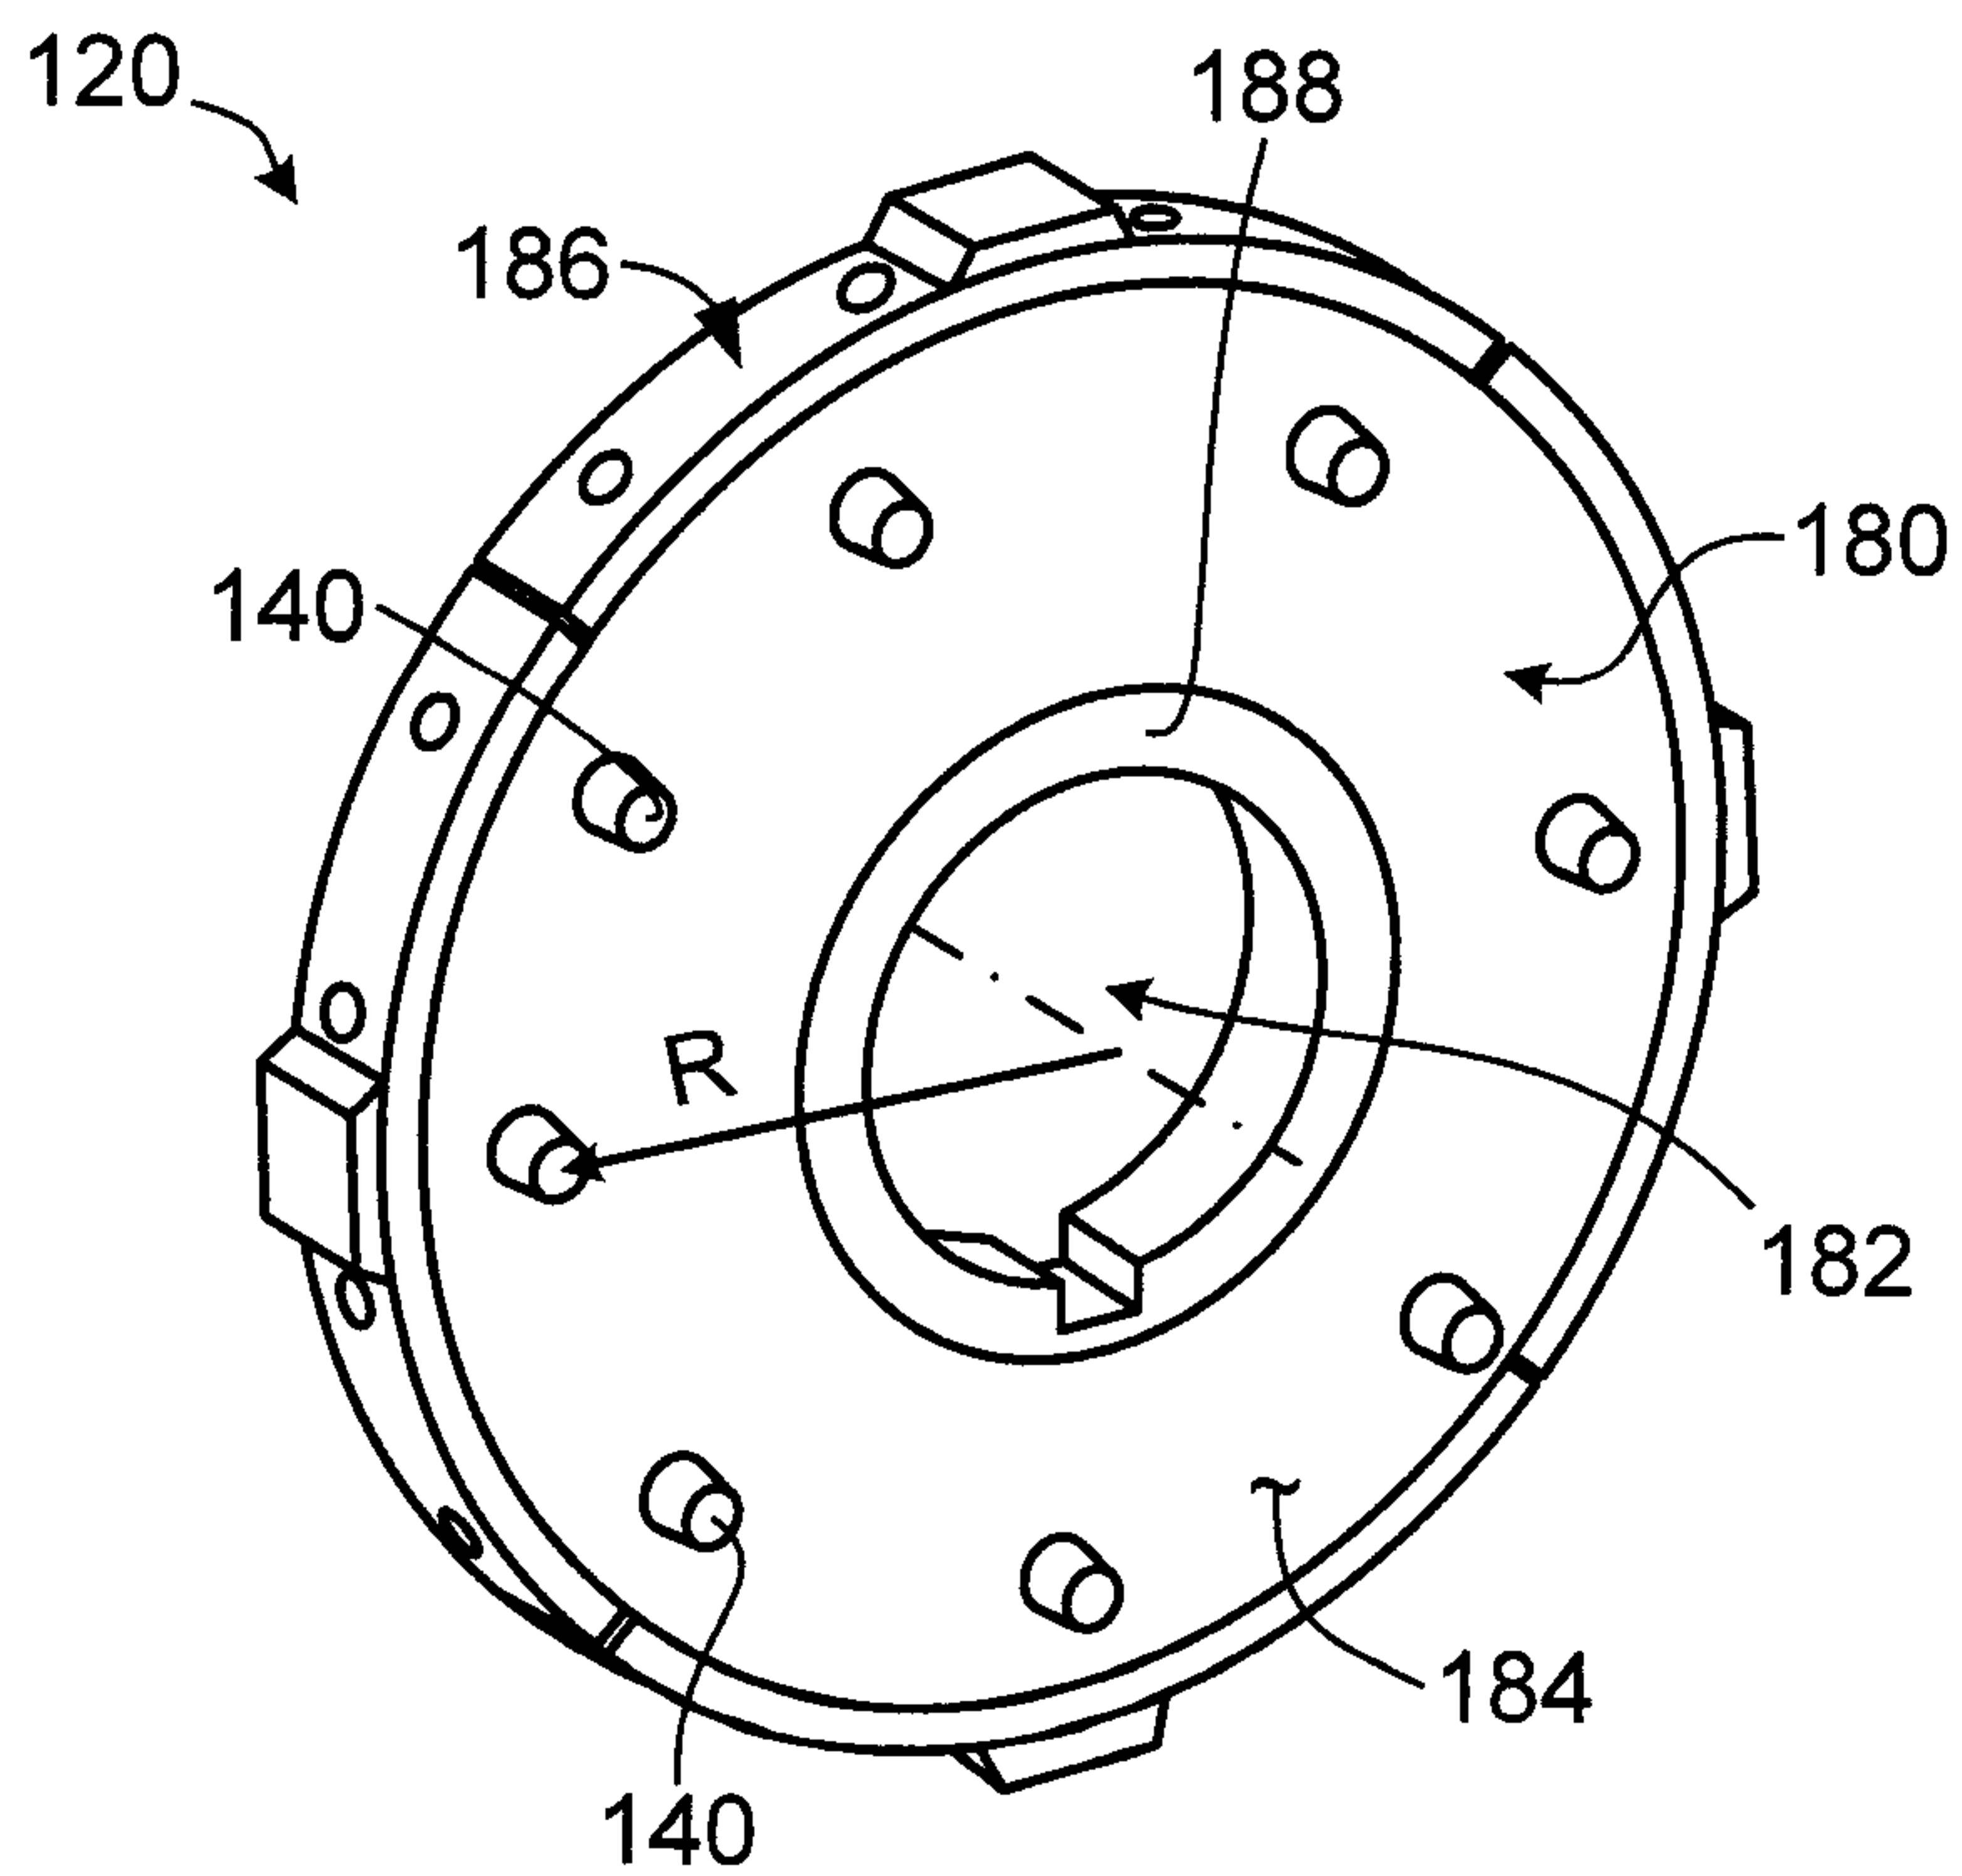


FIG. 3

+

+

3/6

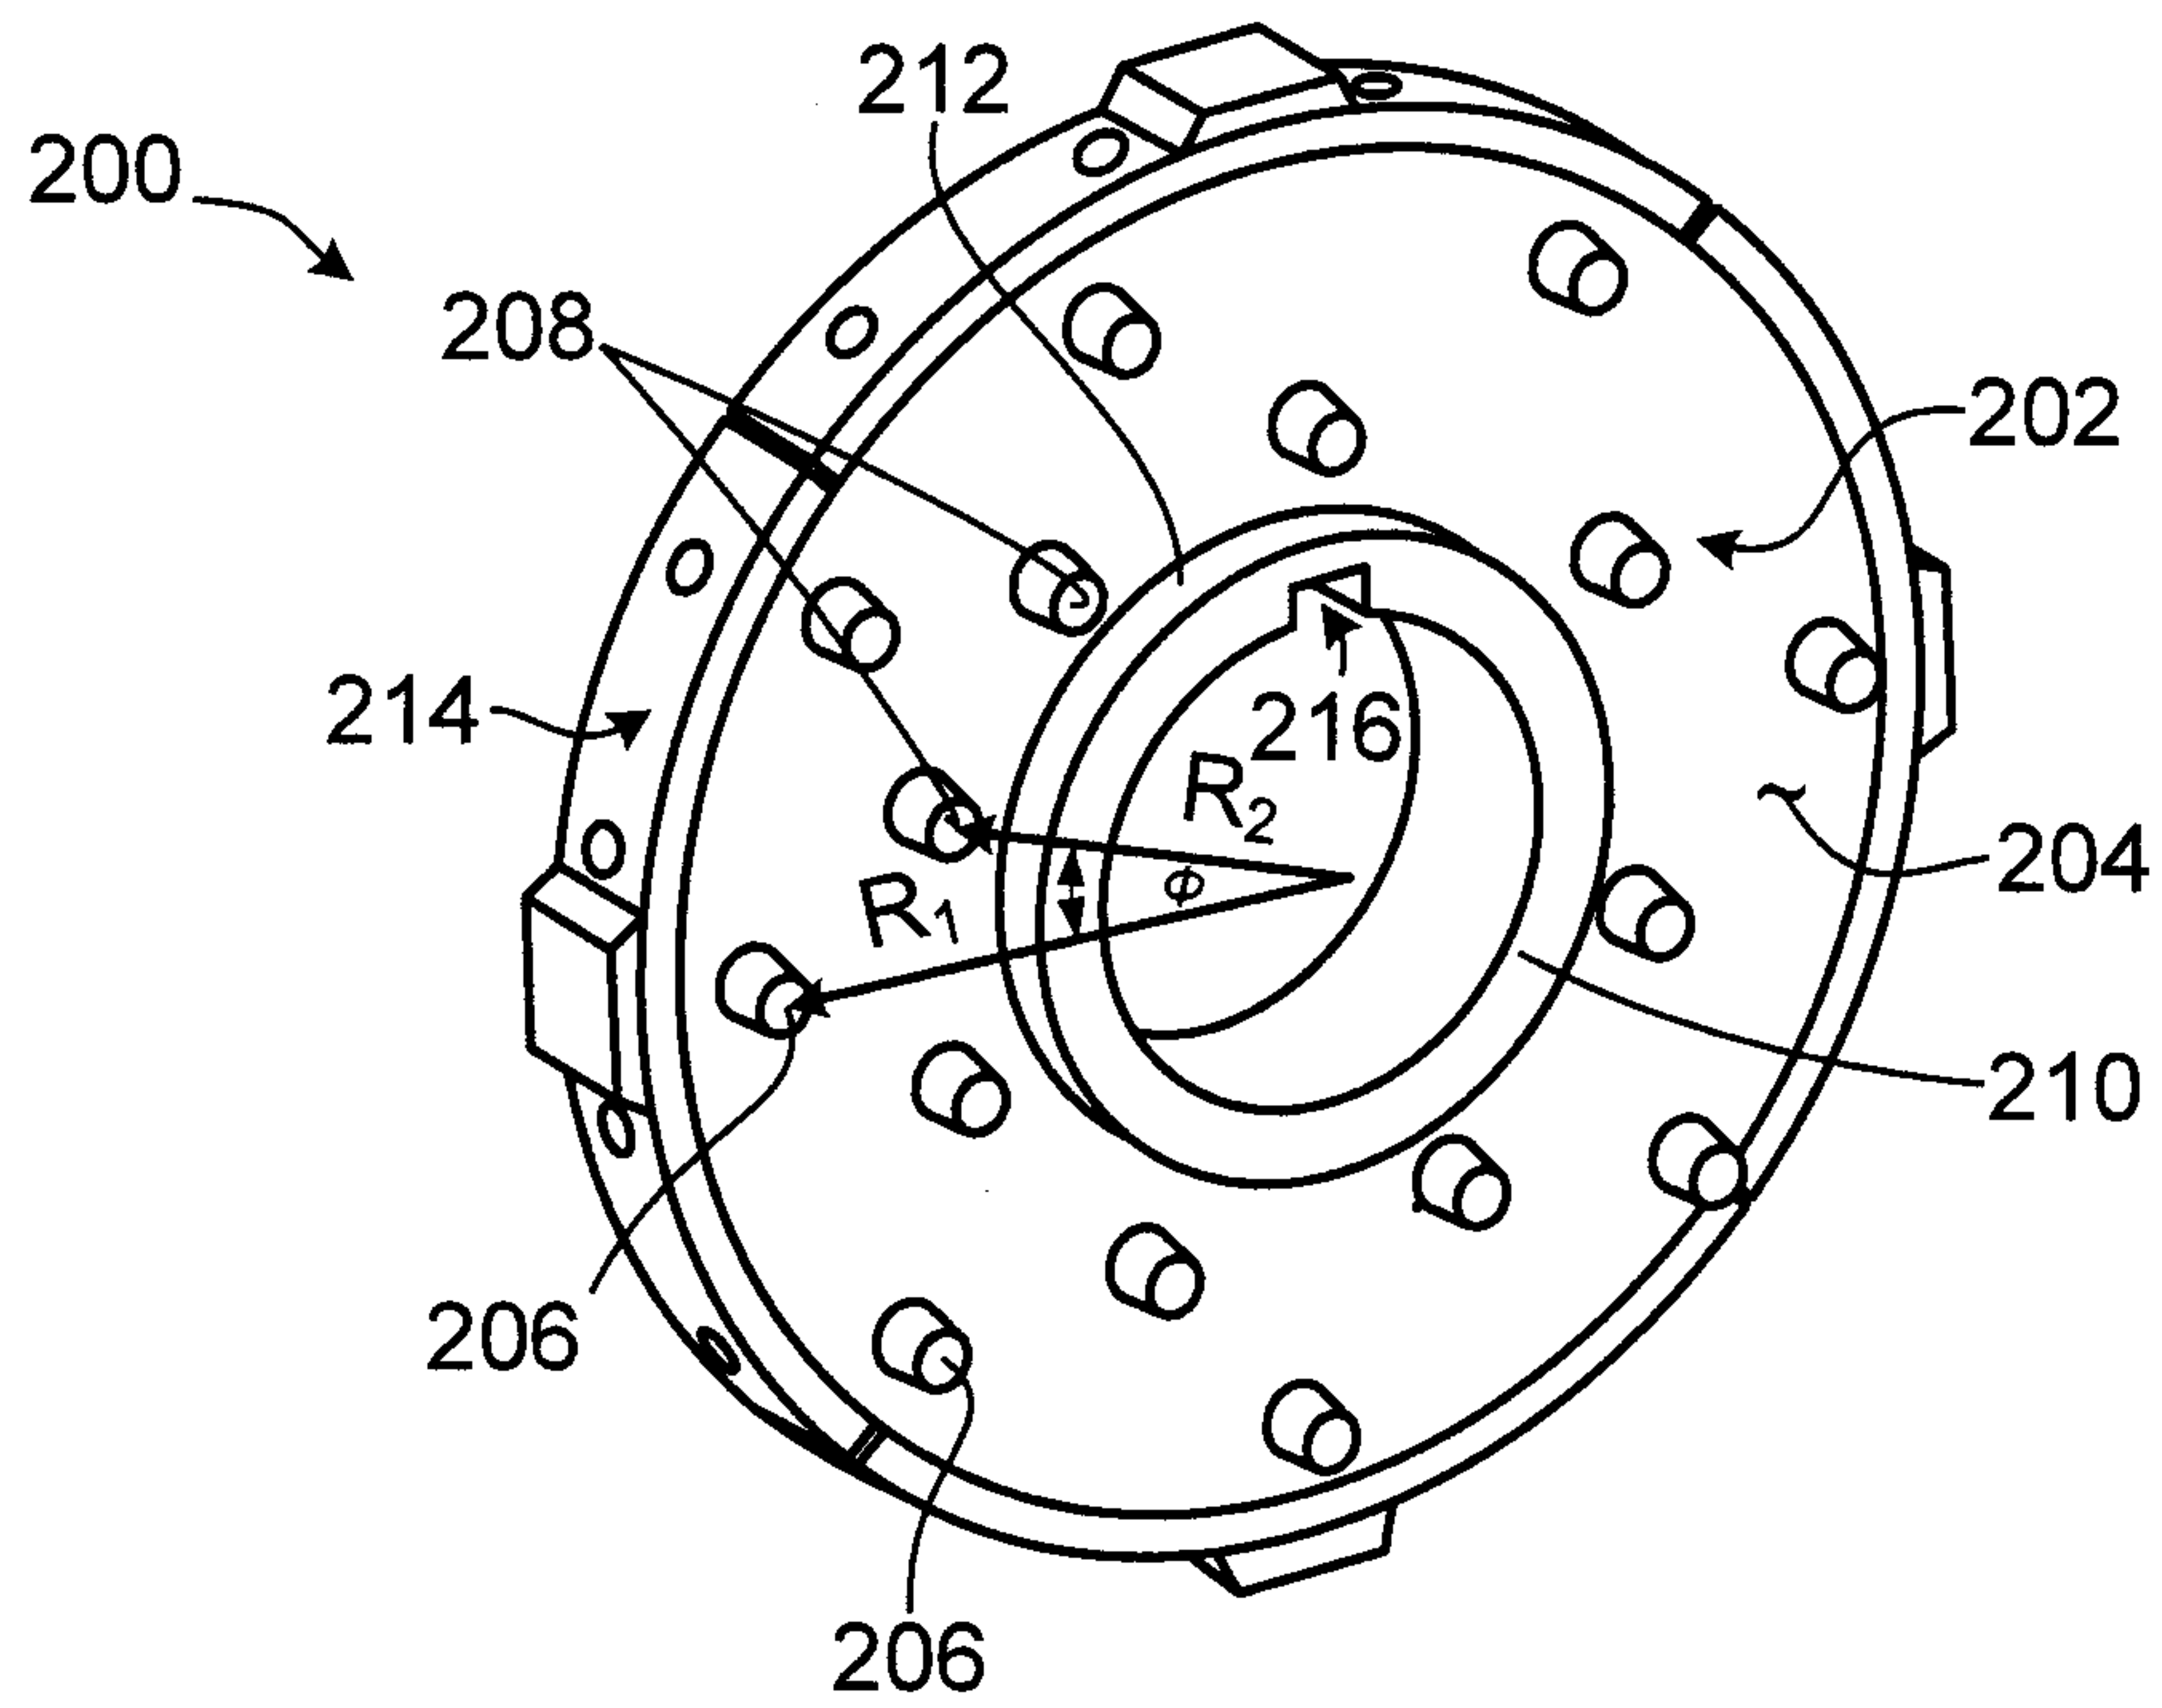


FIG. 4

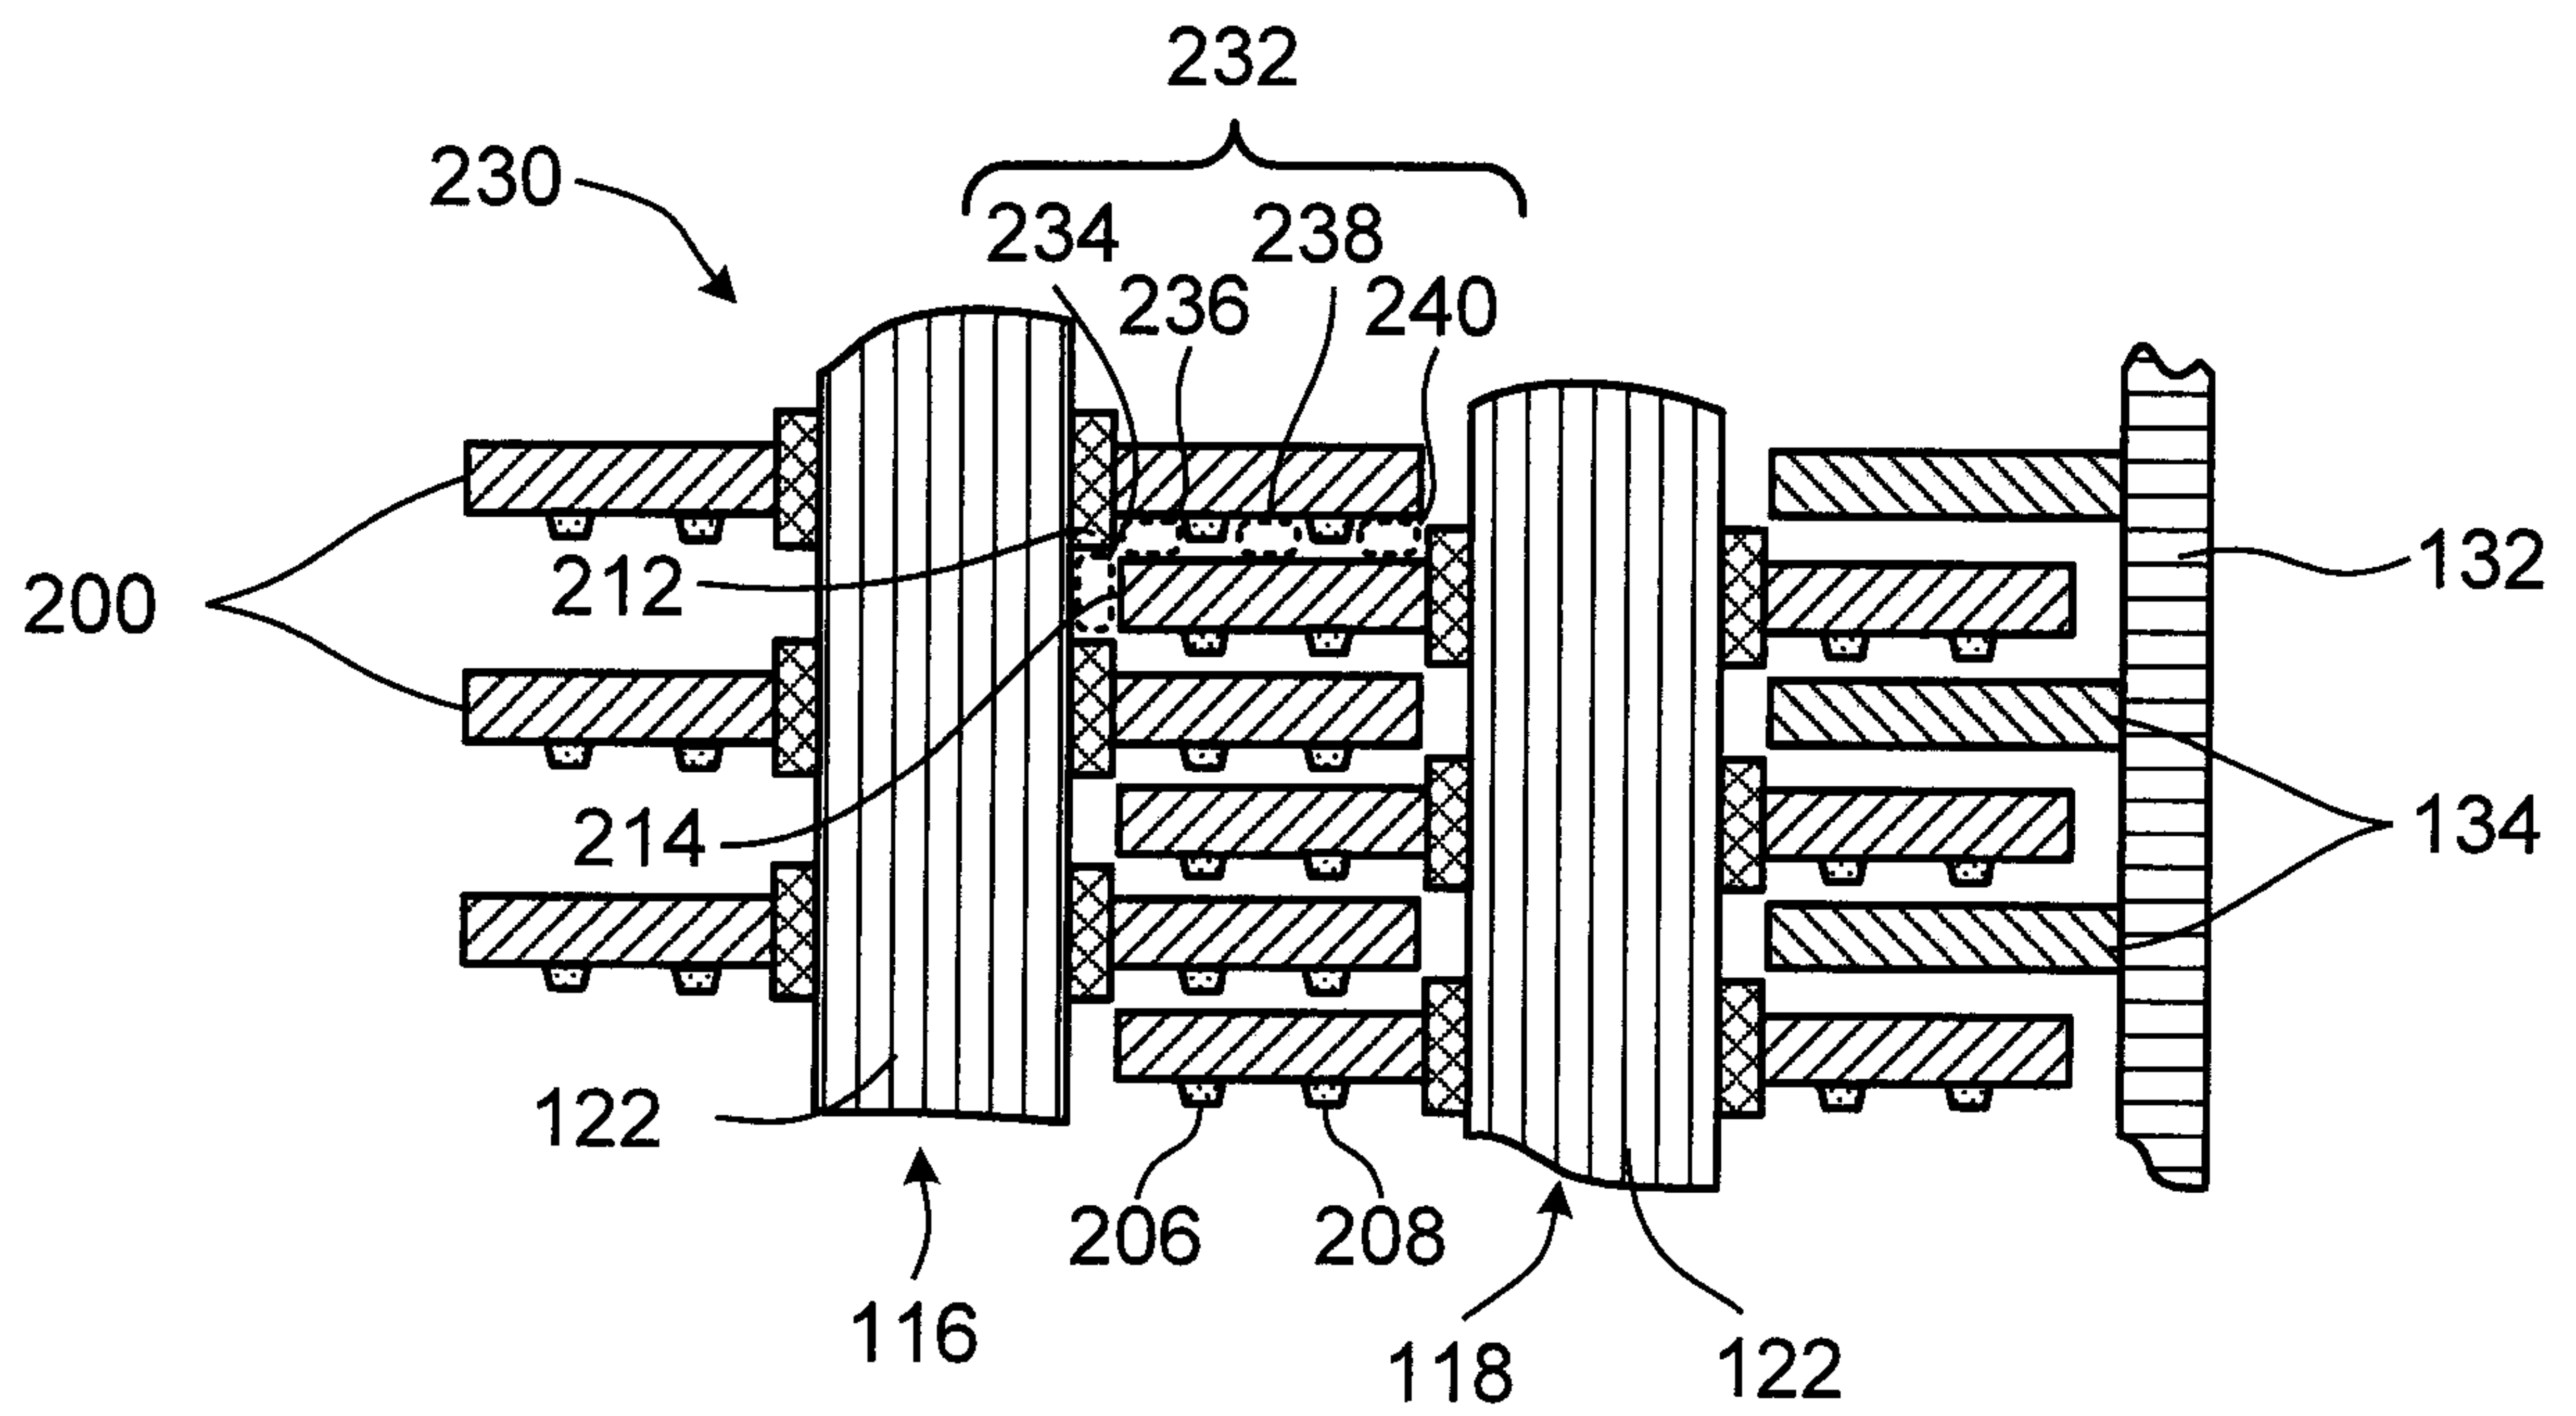


FIG. 5

+

+

4/6

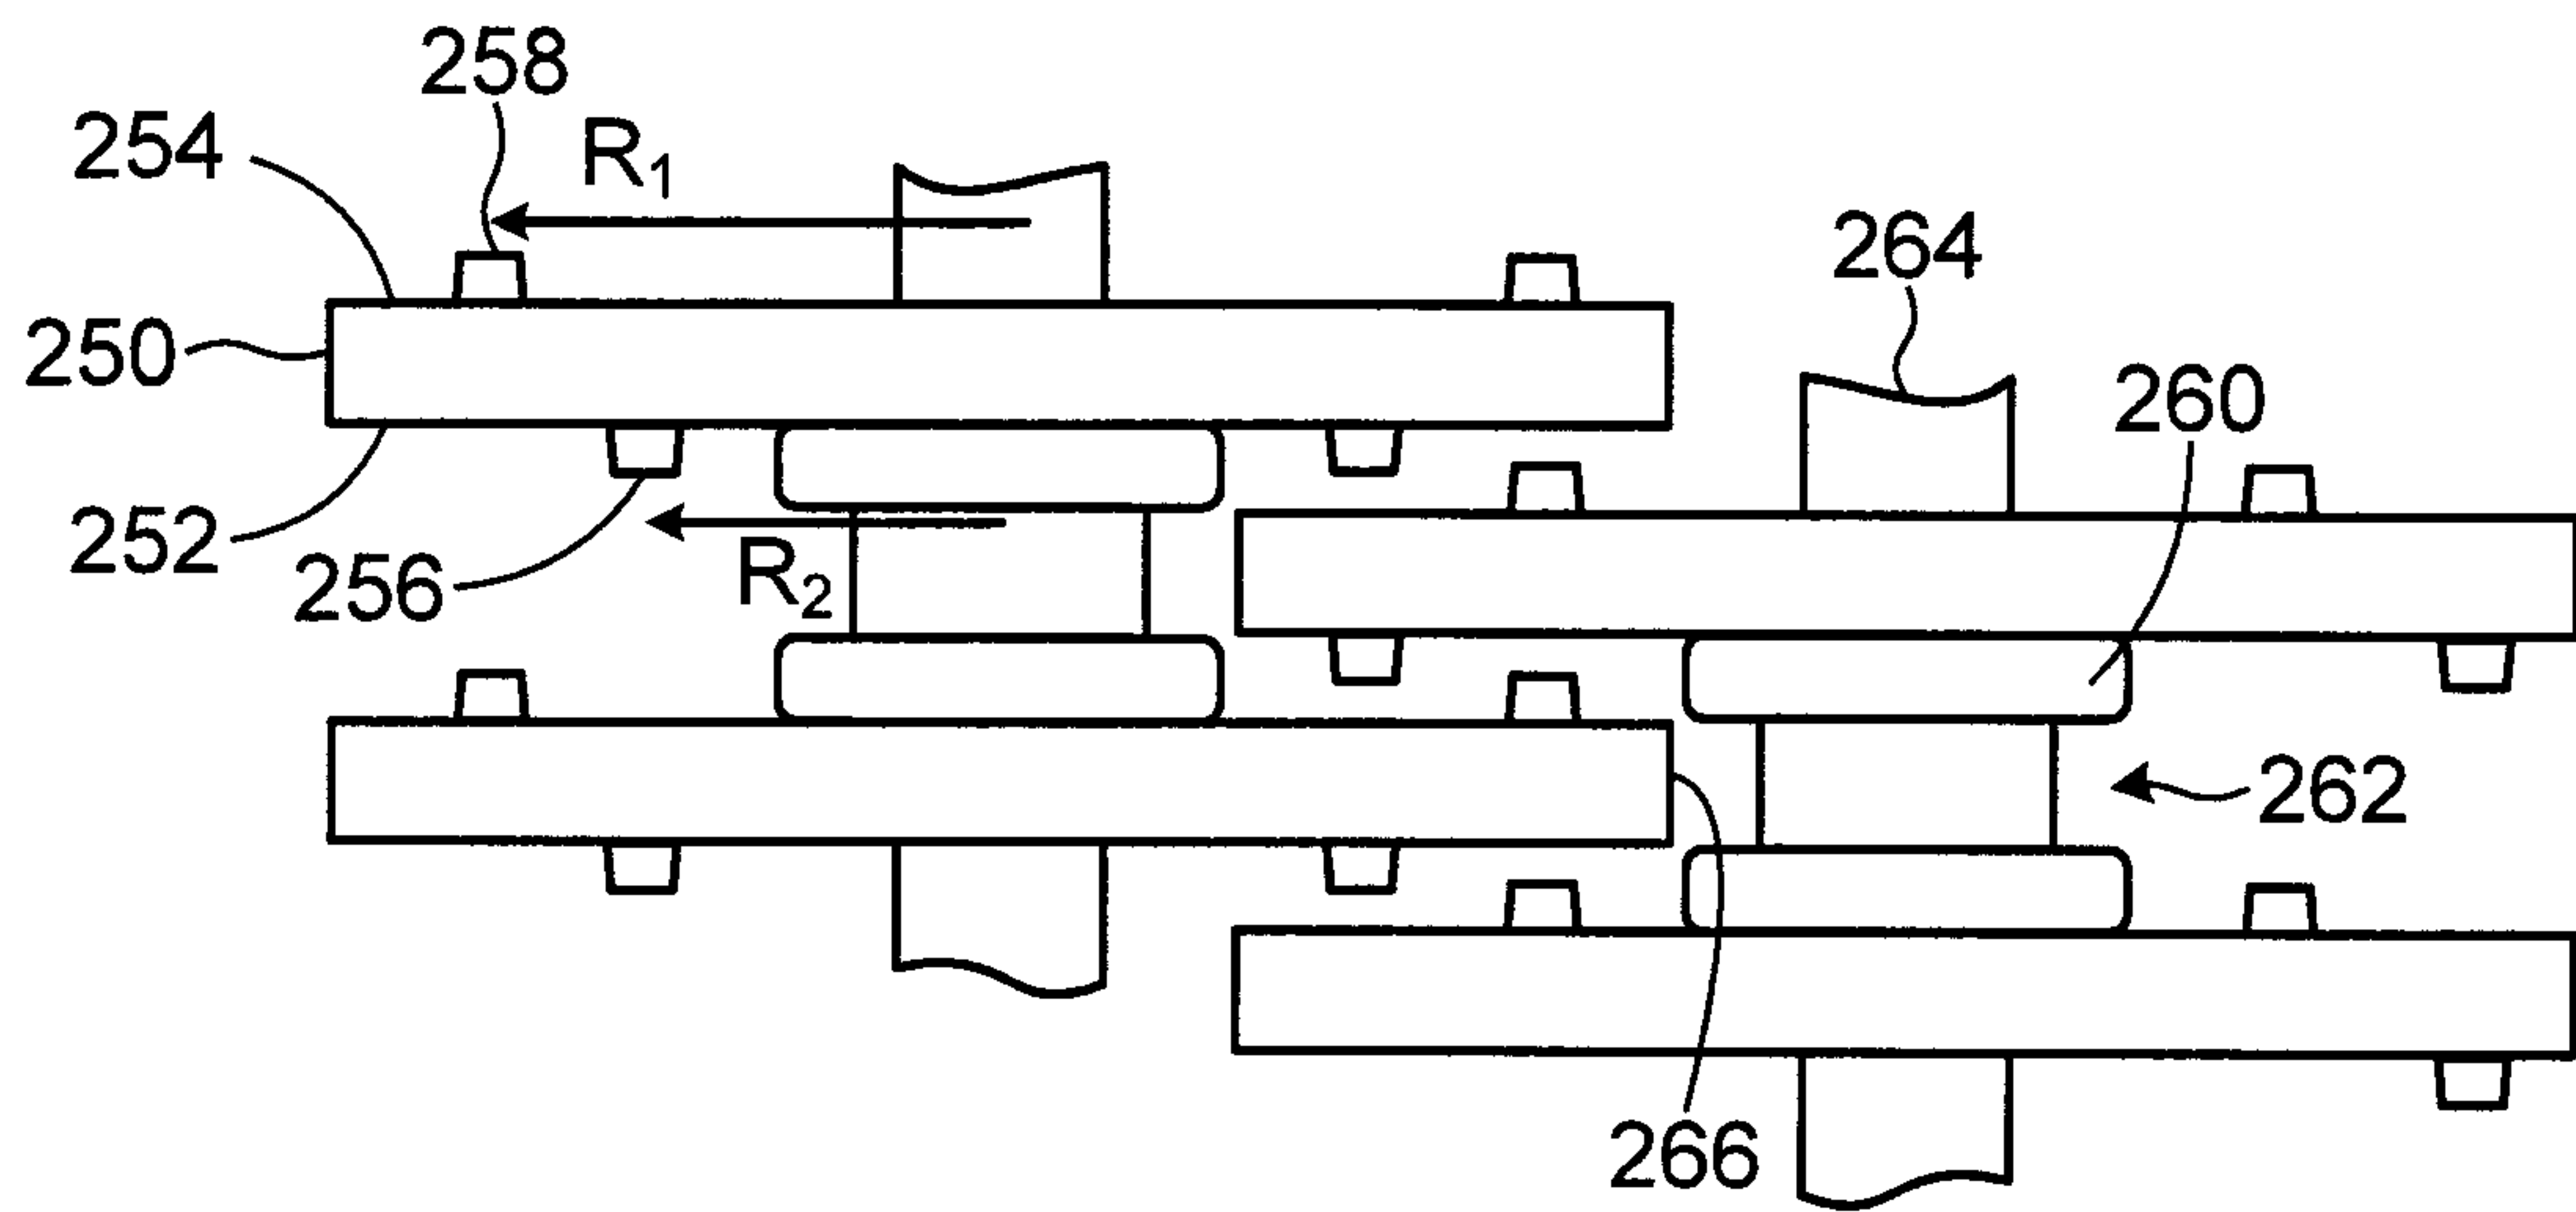


FIG. 6

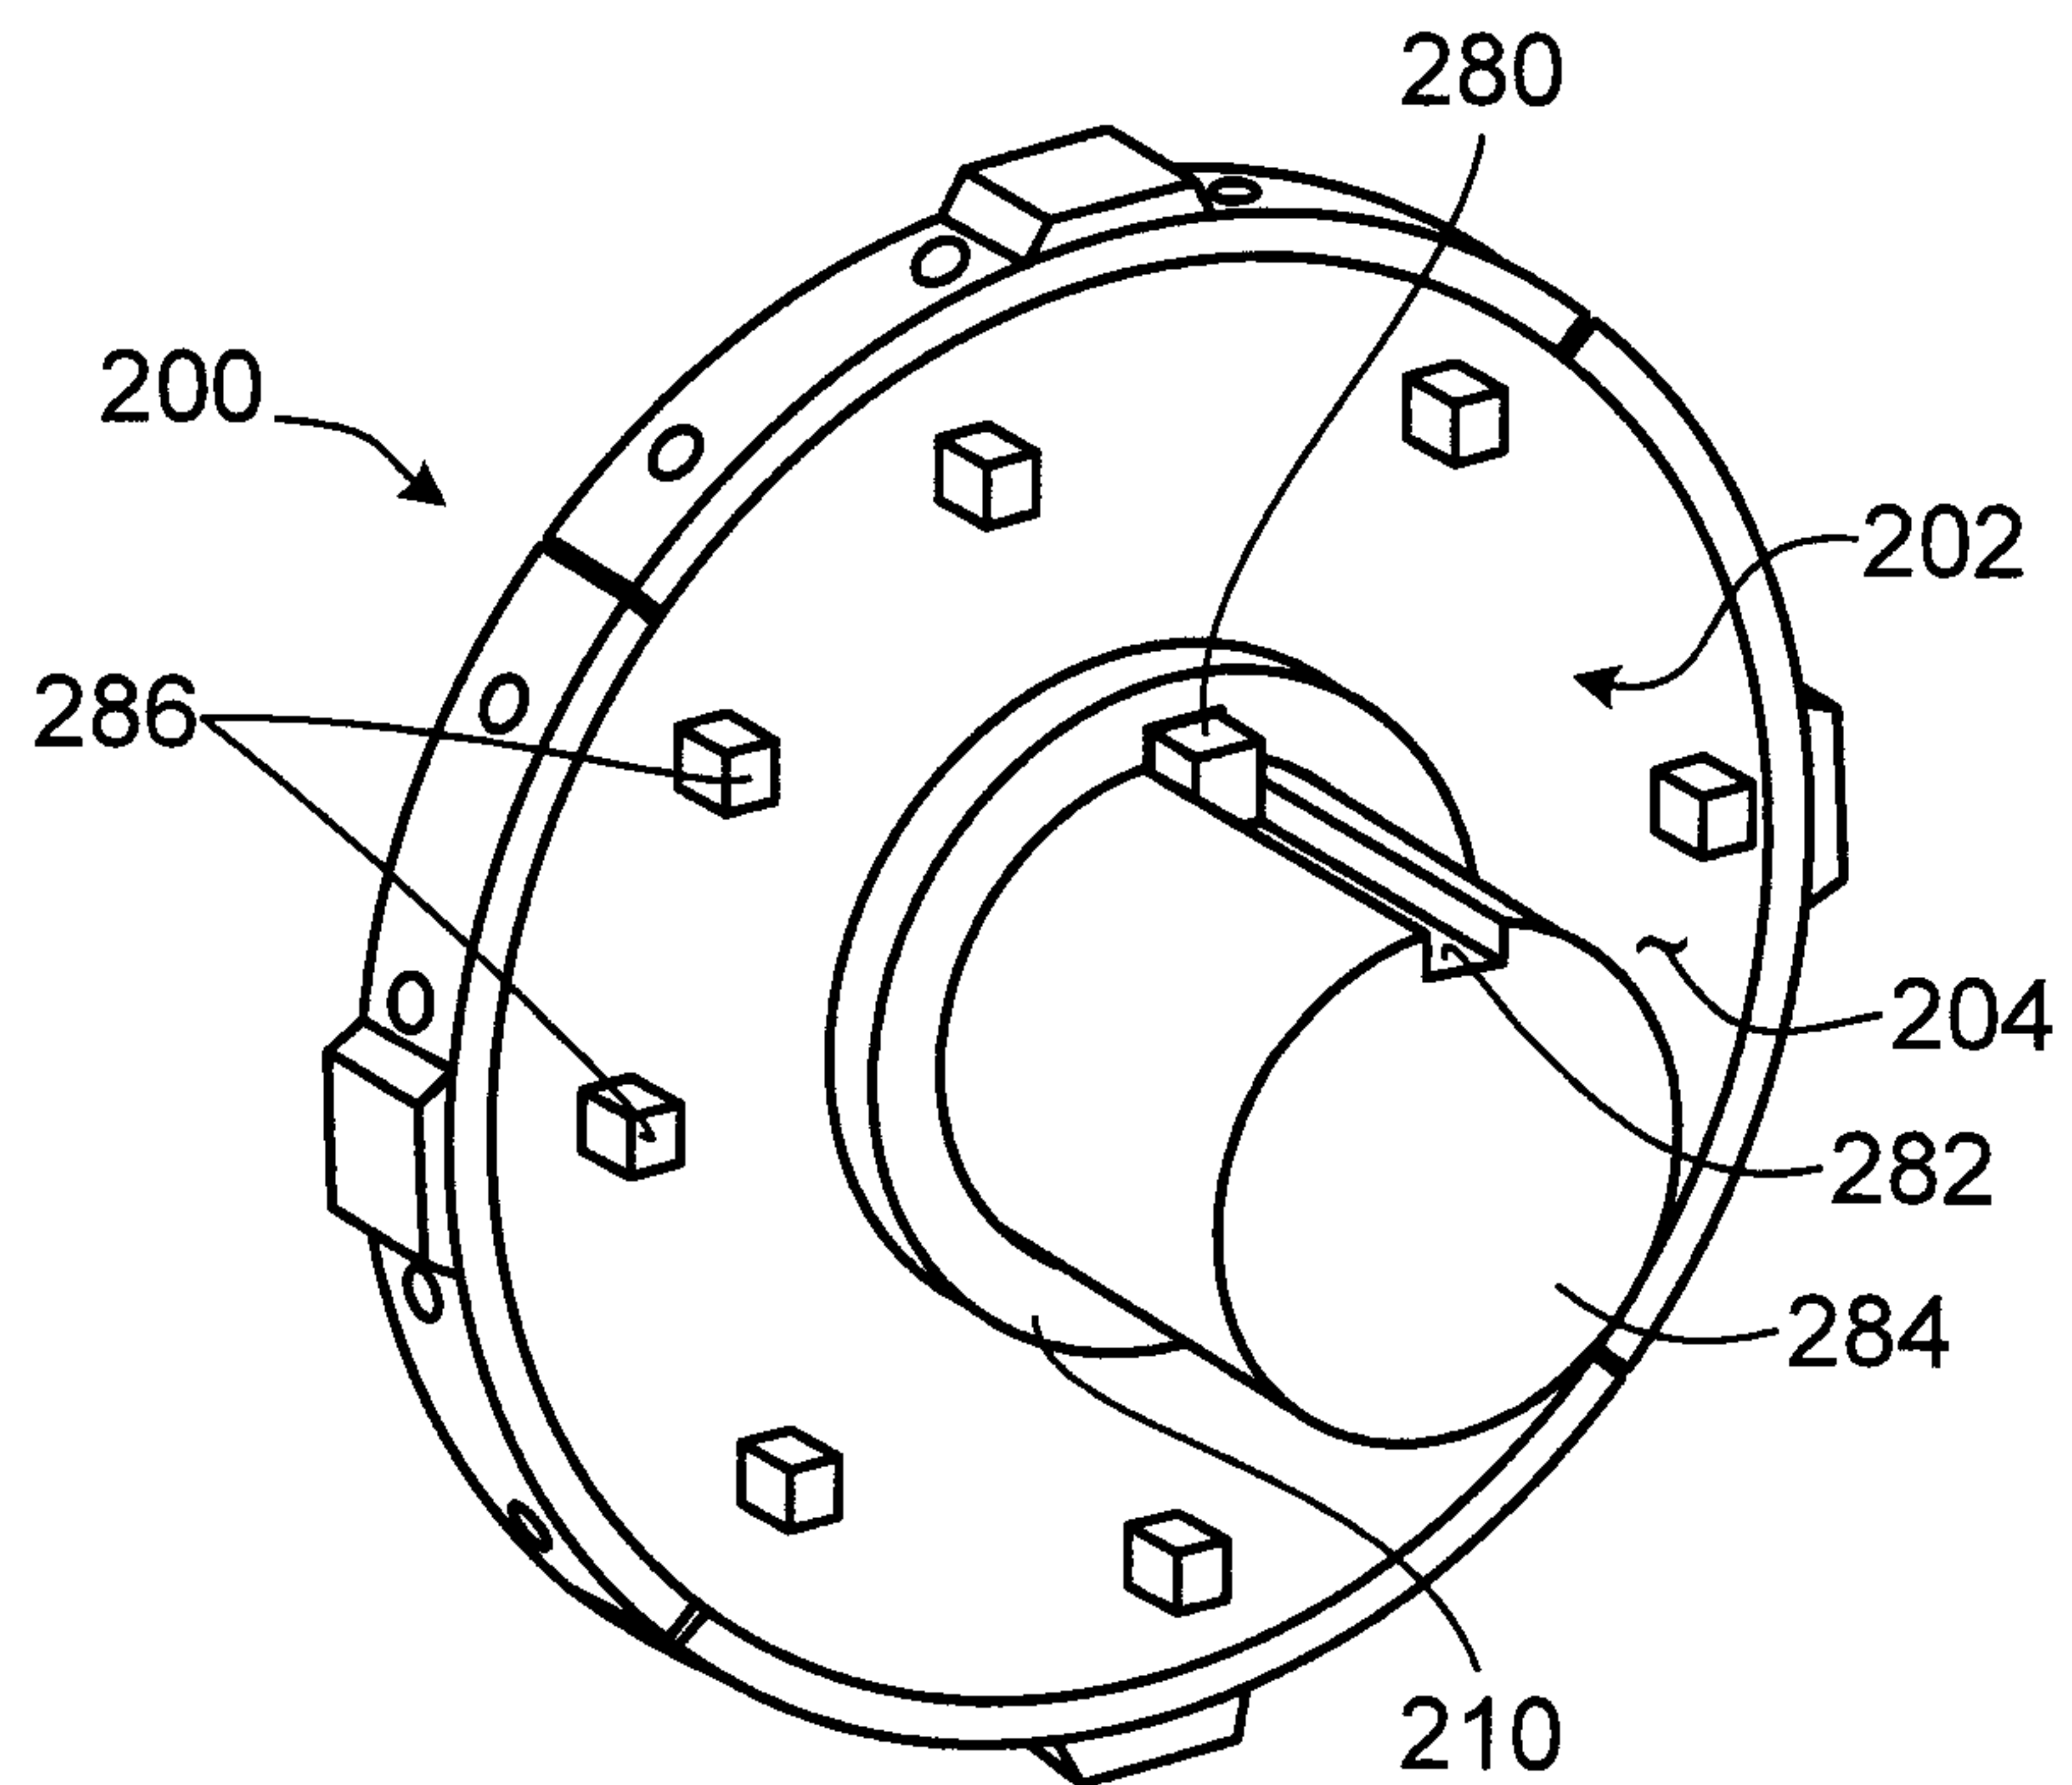


FIG. 7

+

+

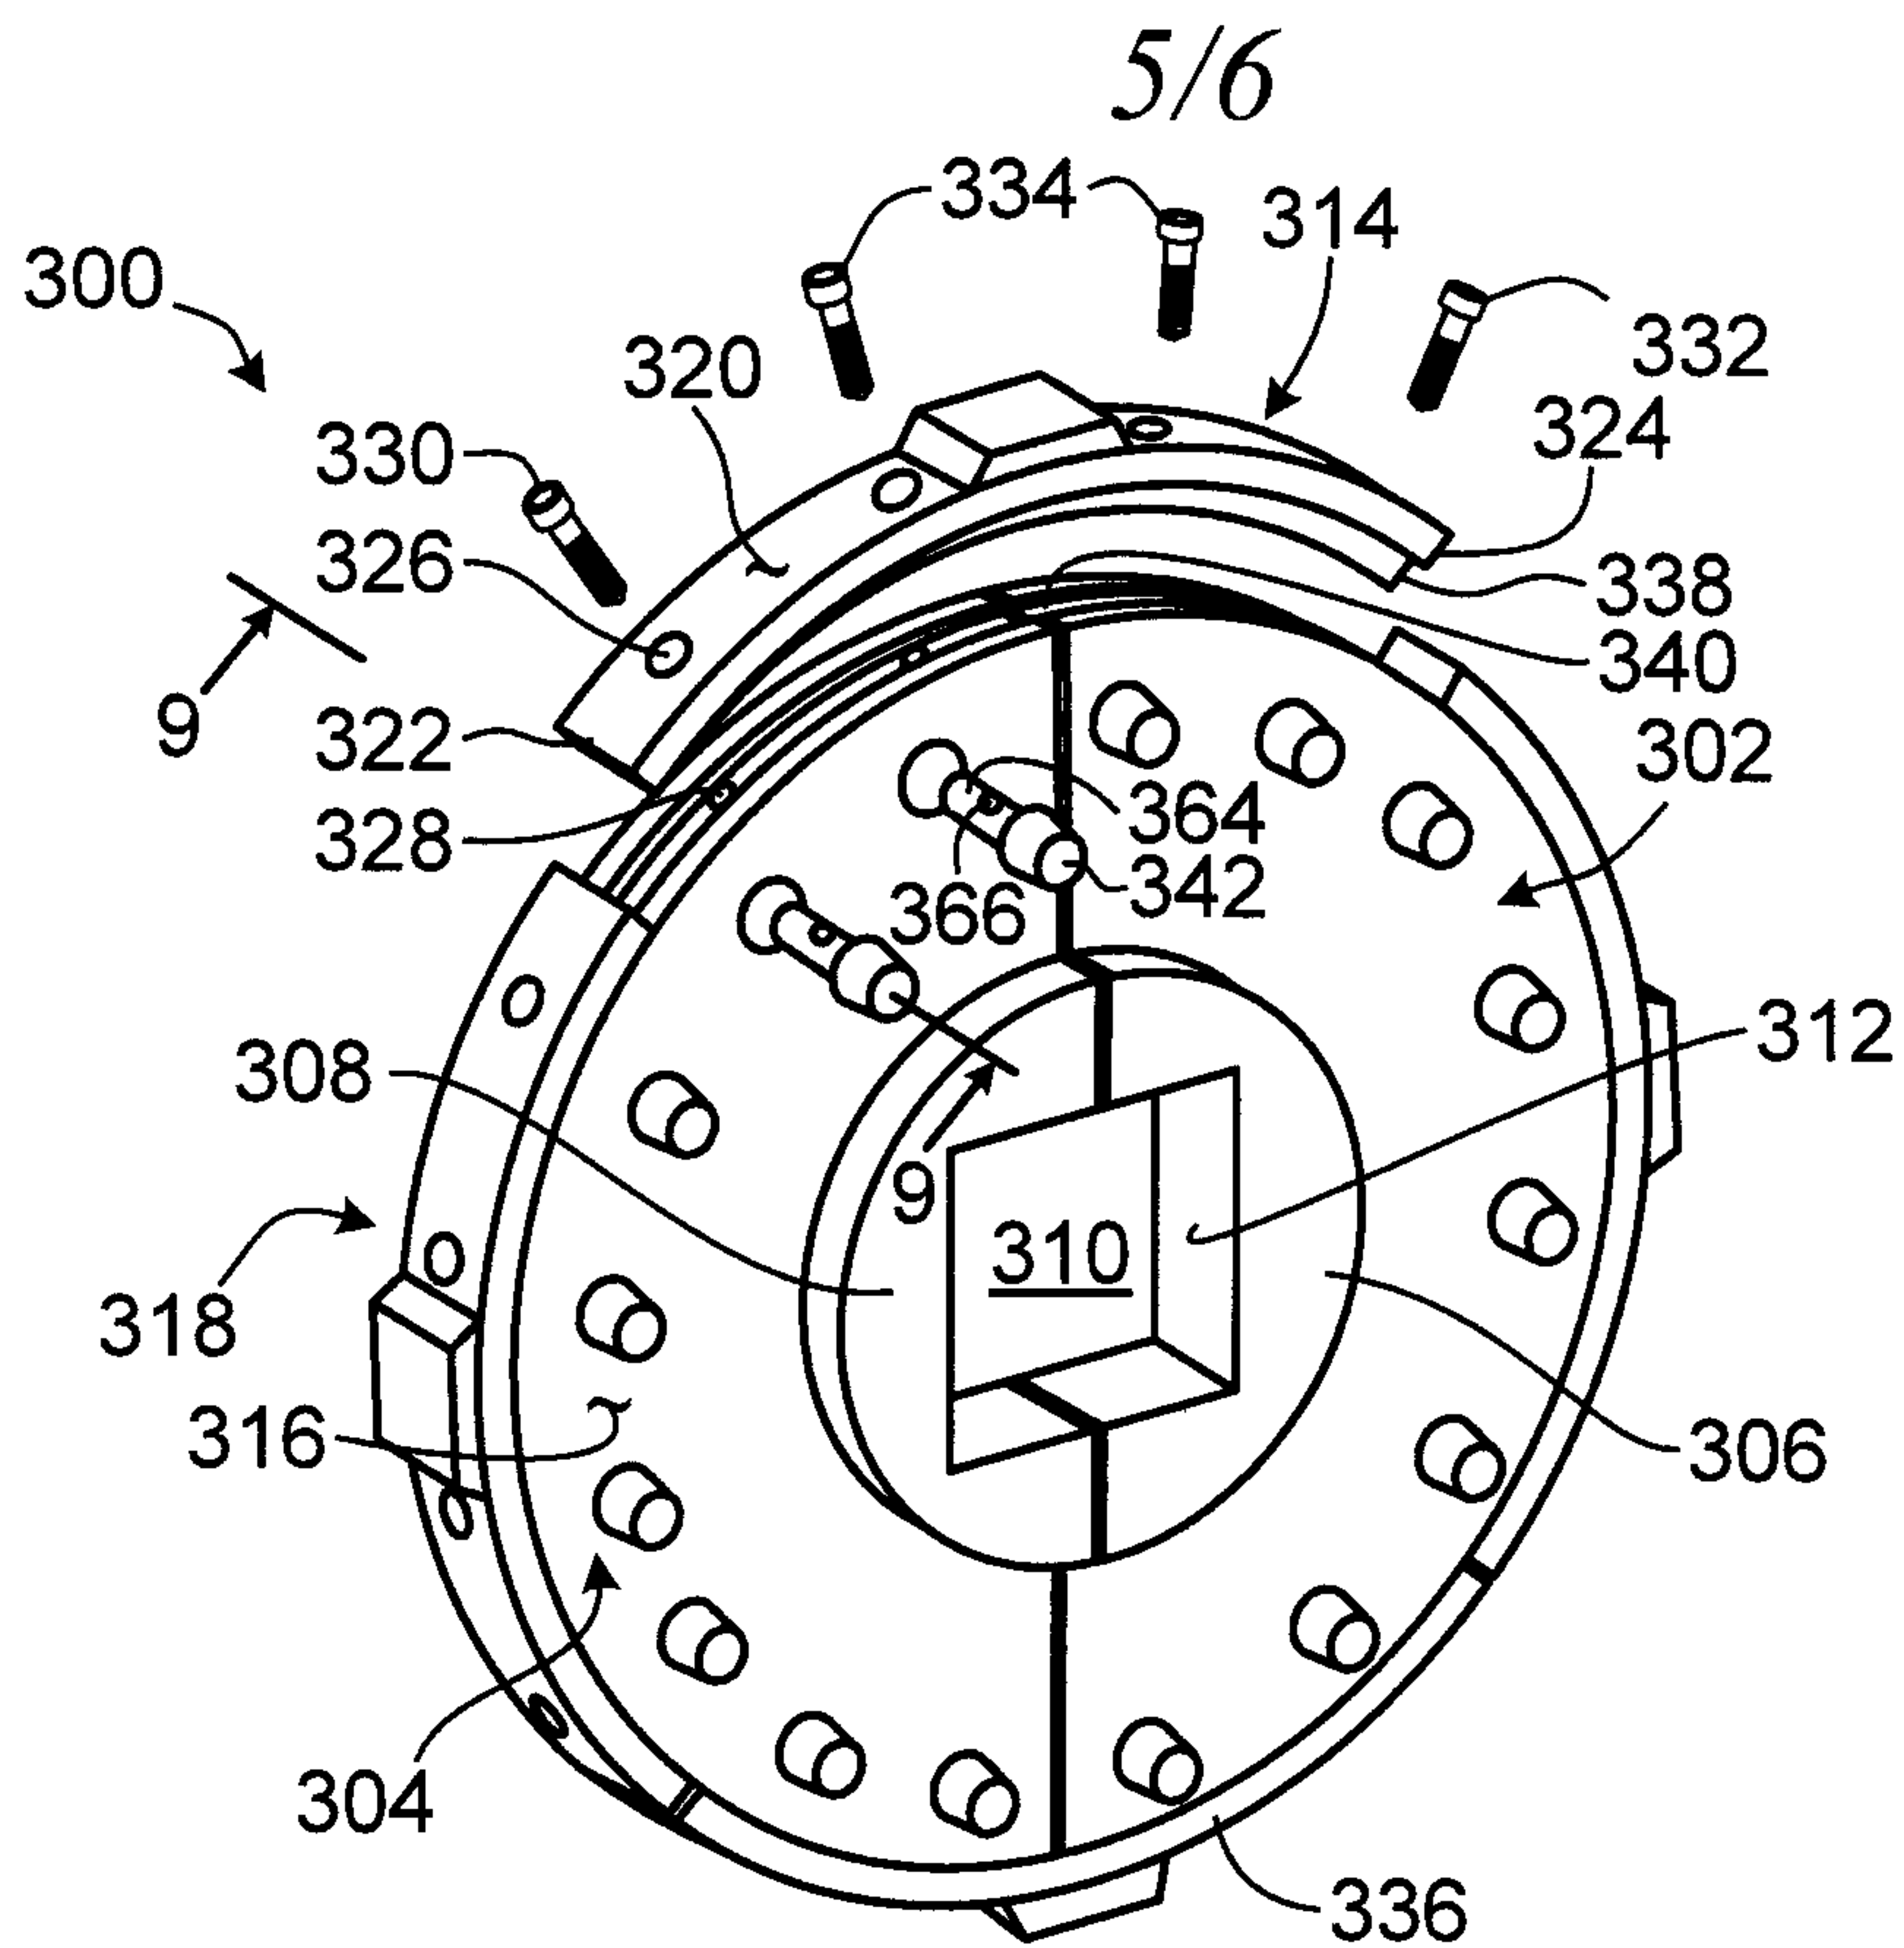


FIG. 8

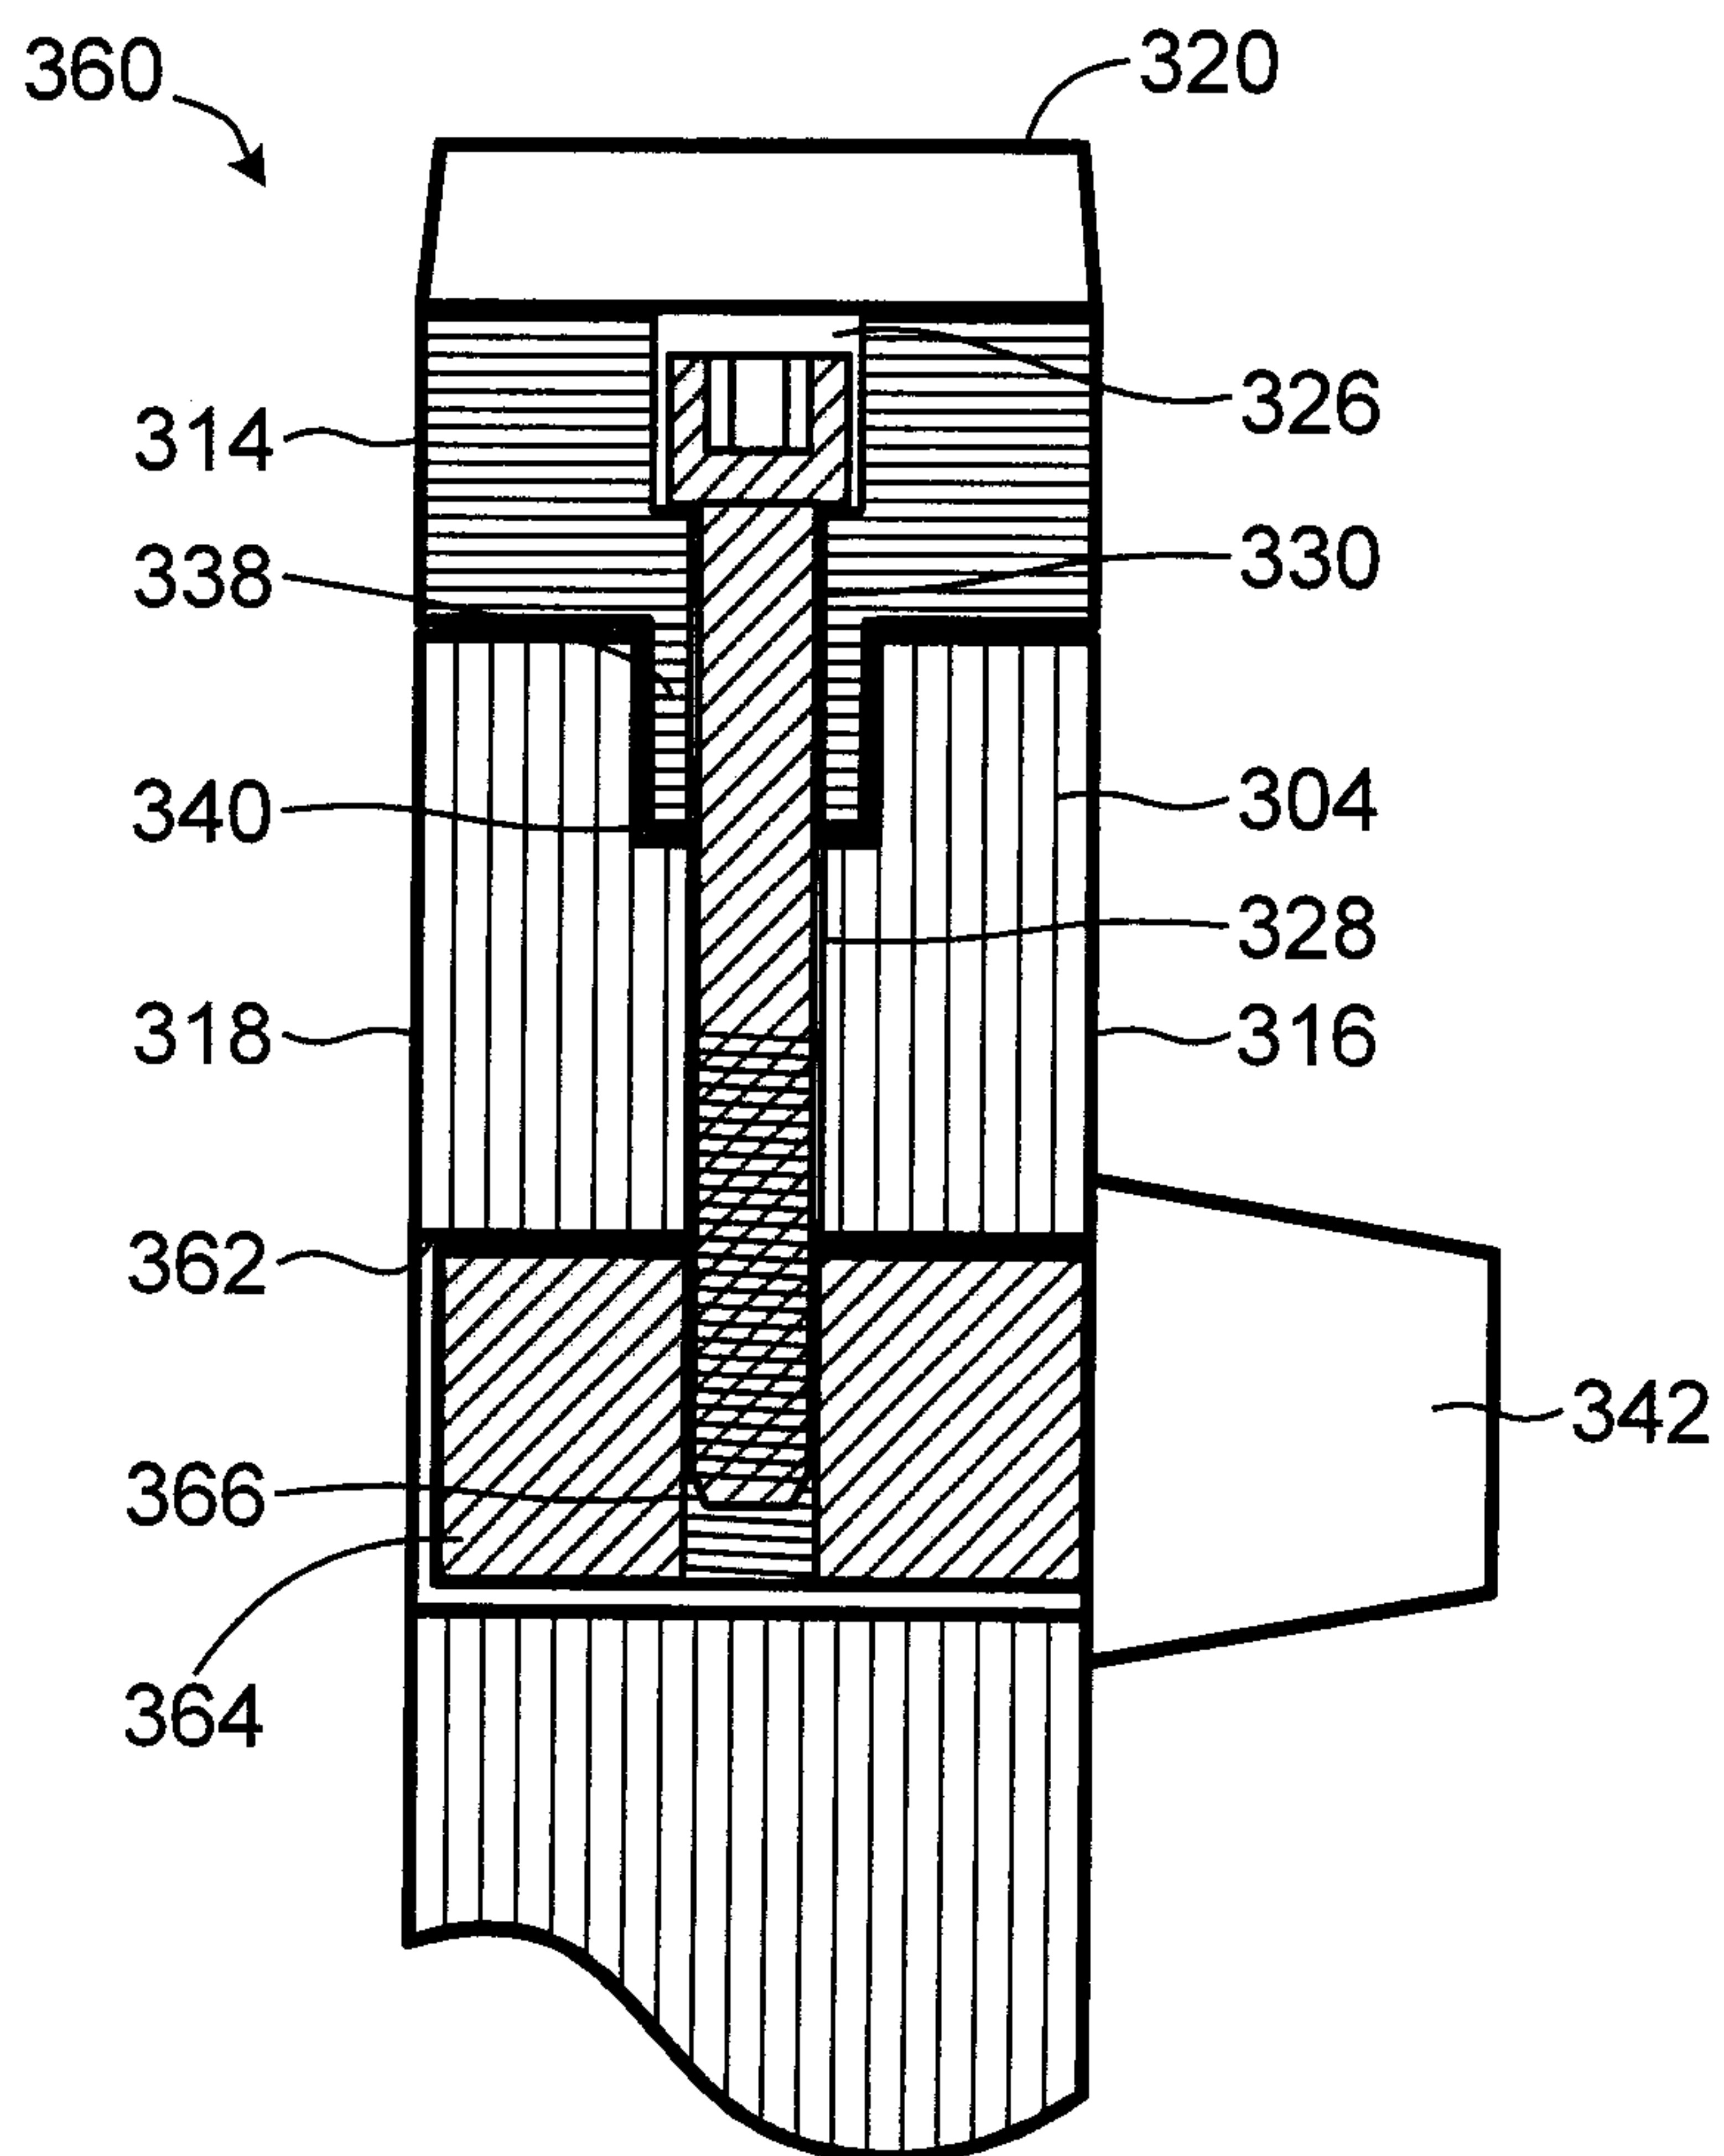


FIG. 9

+

+

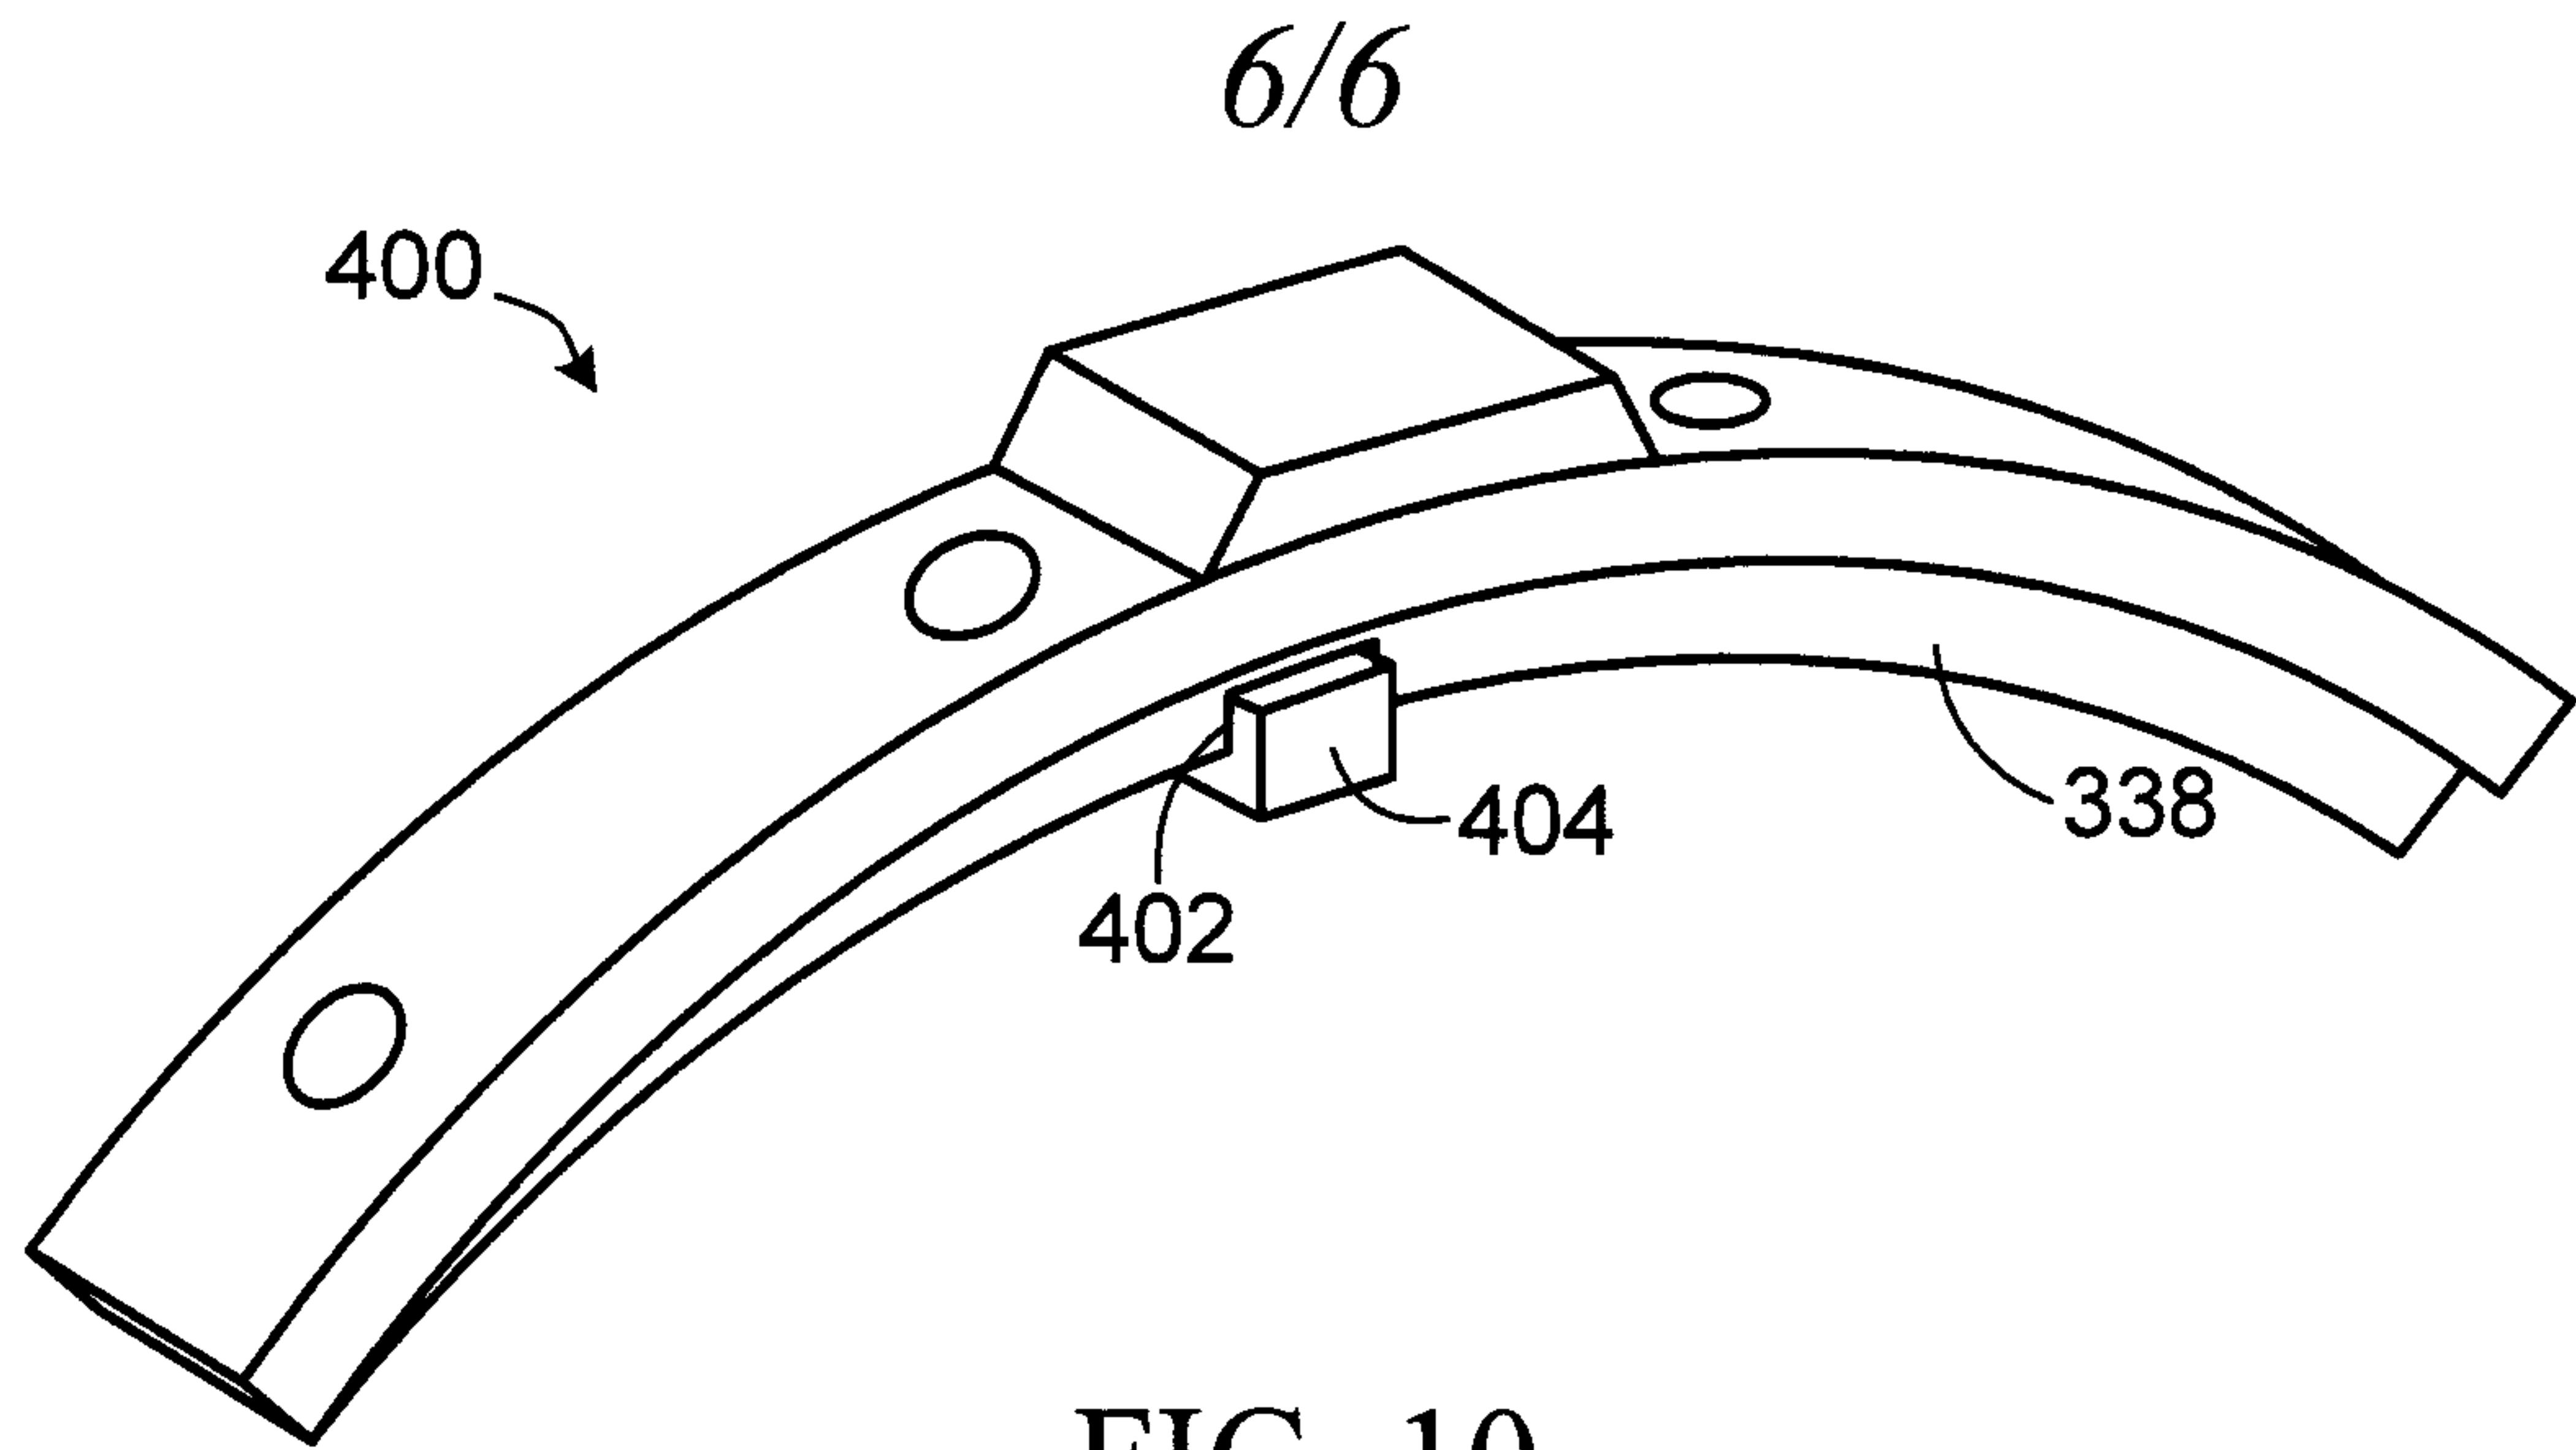


FIG. 10

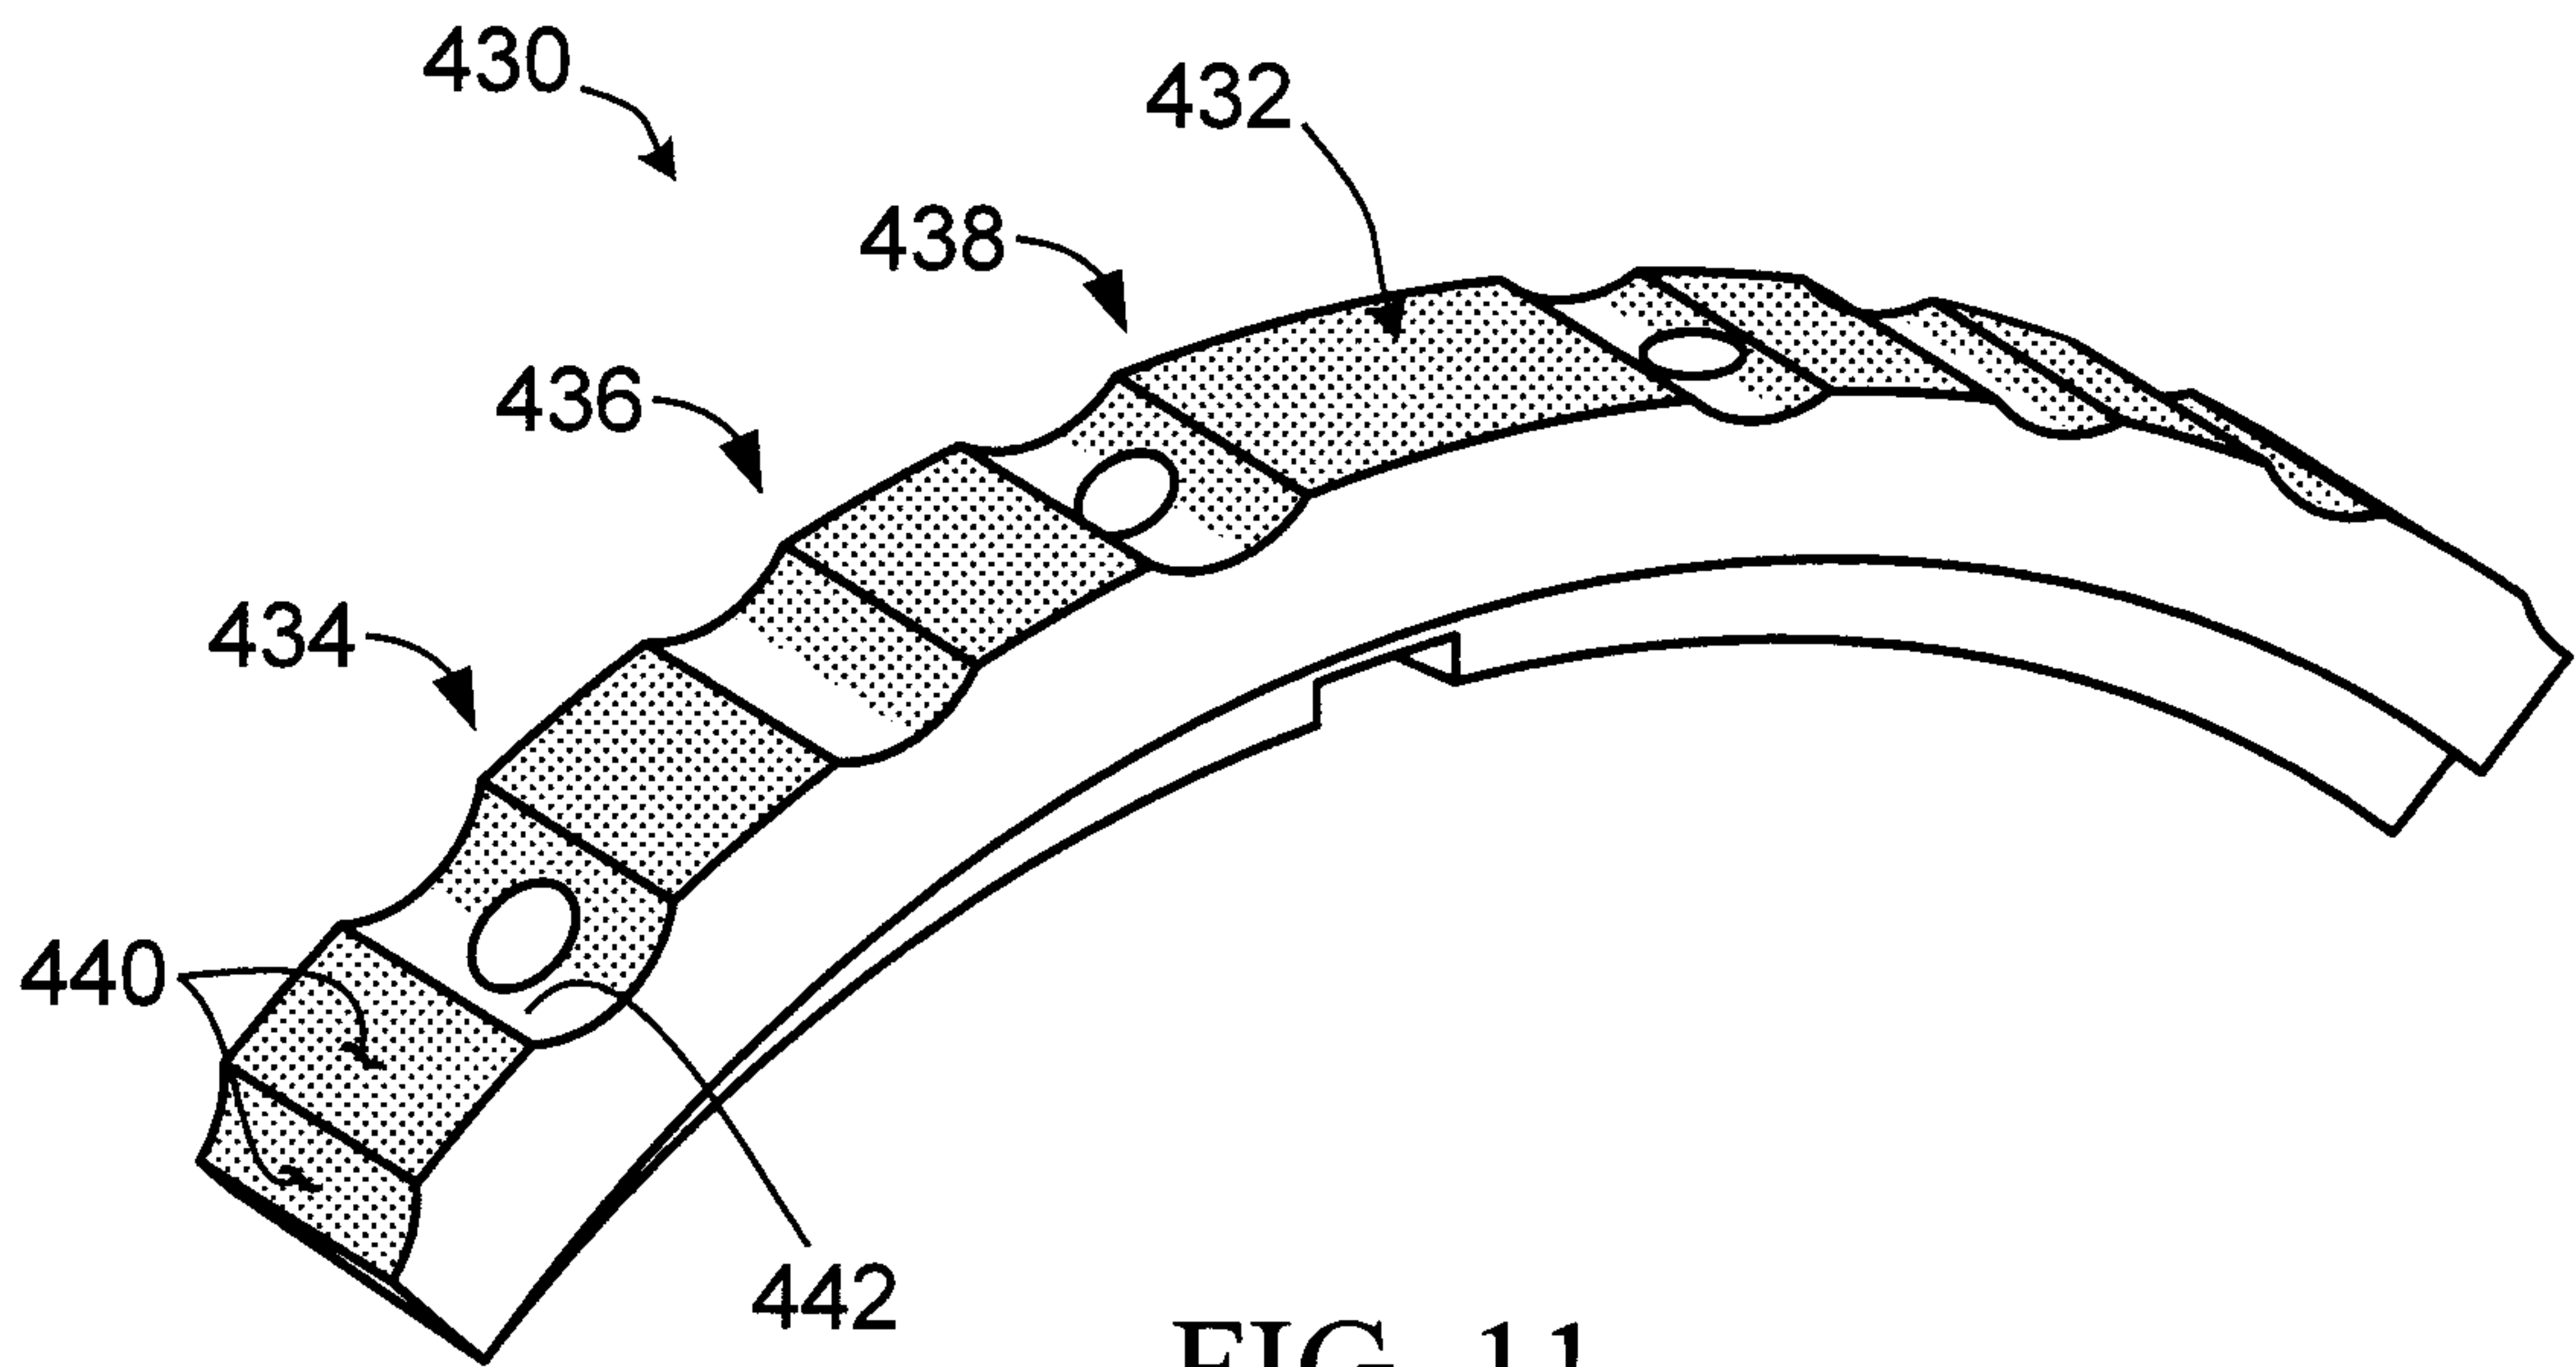


FIG. 11

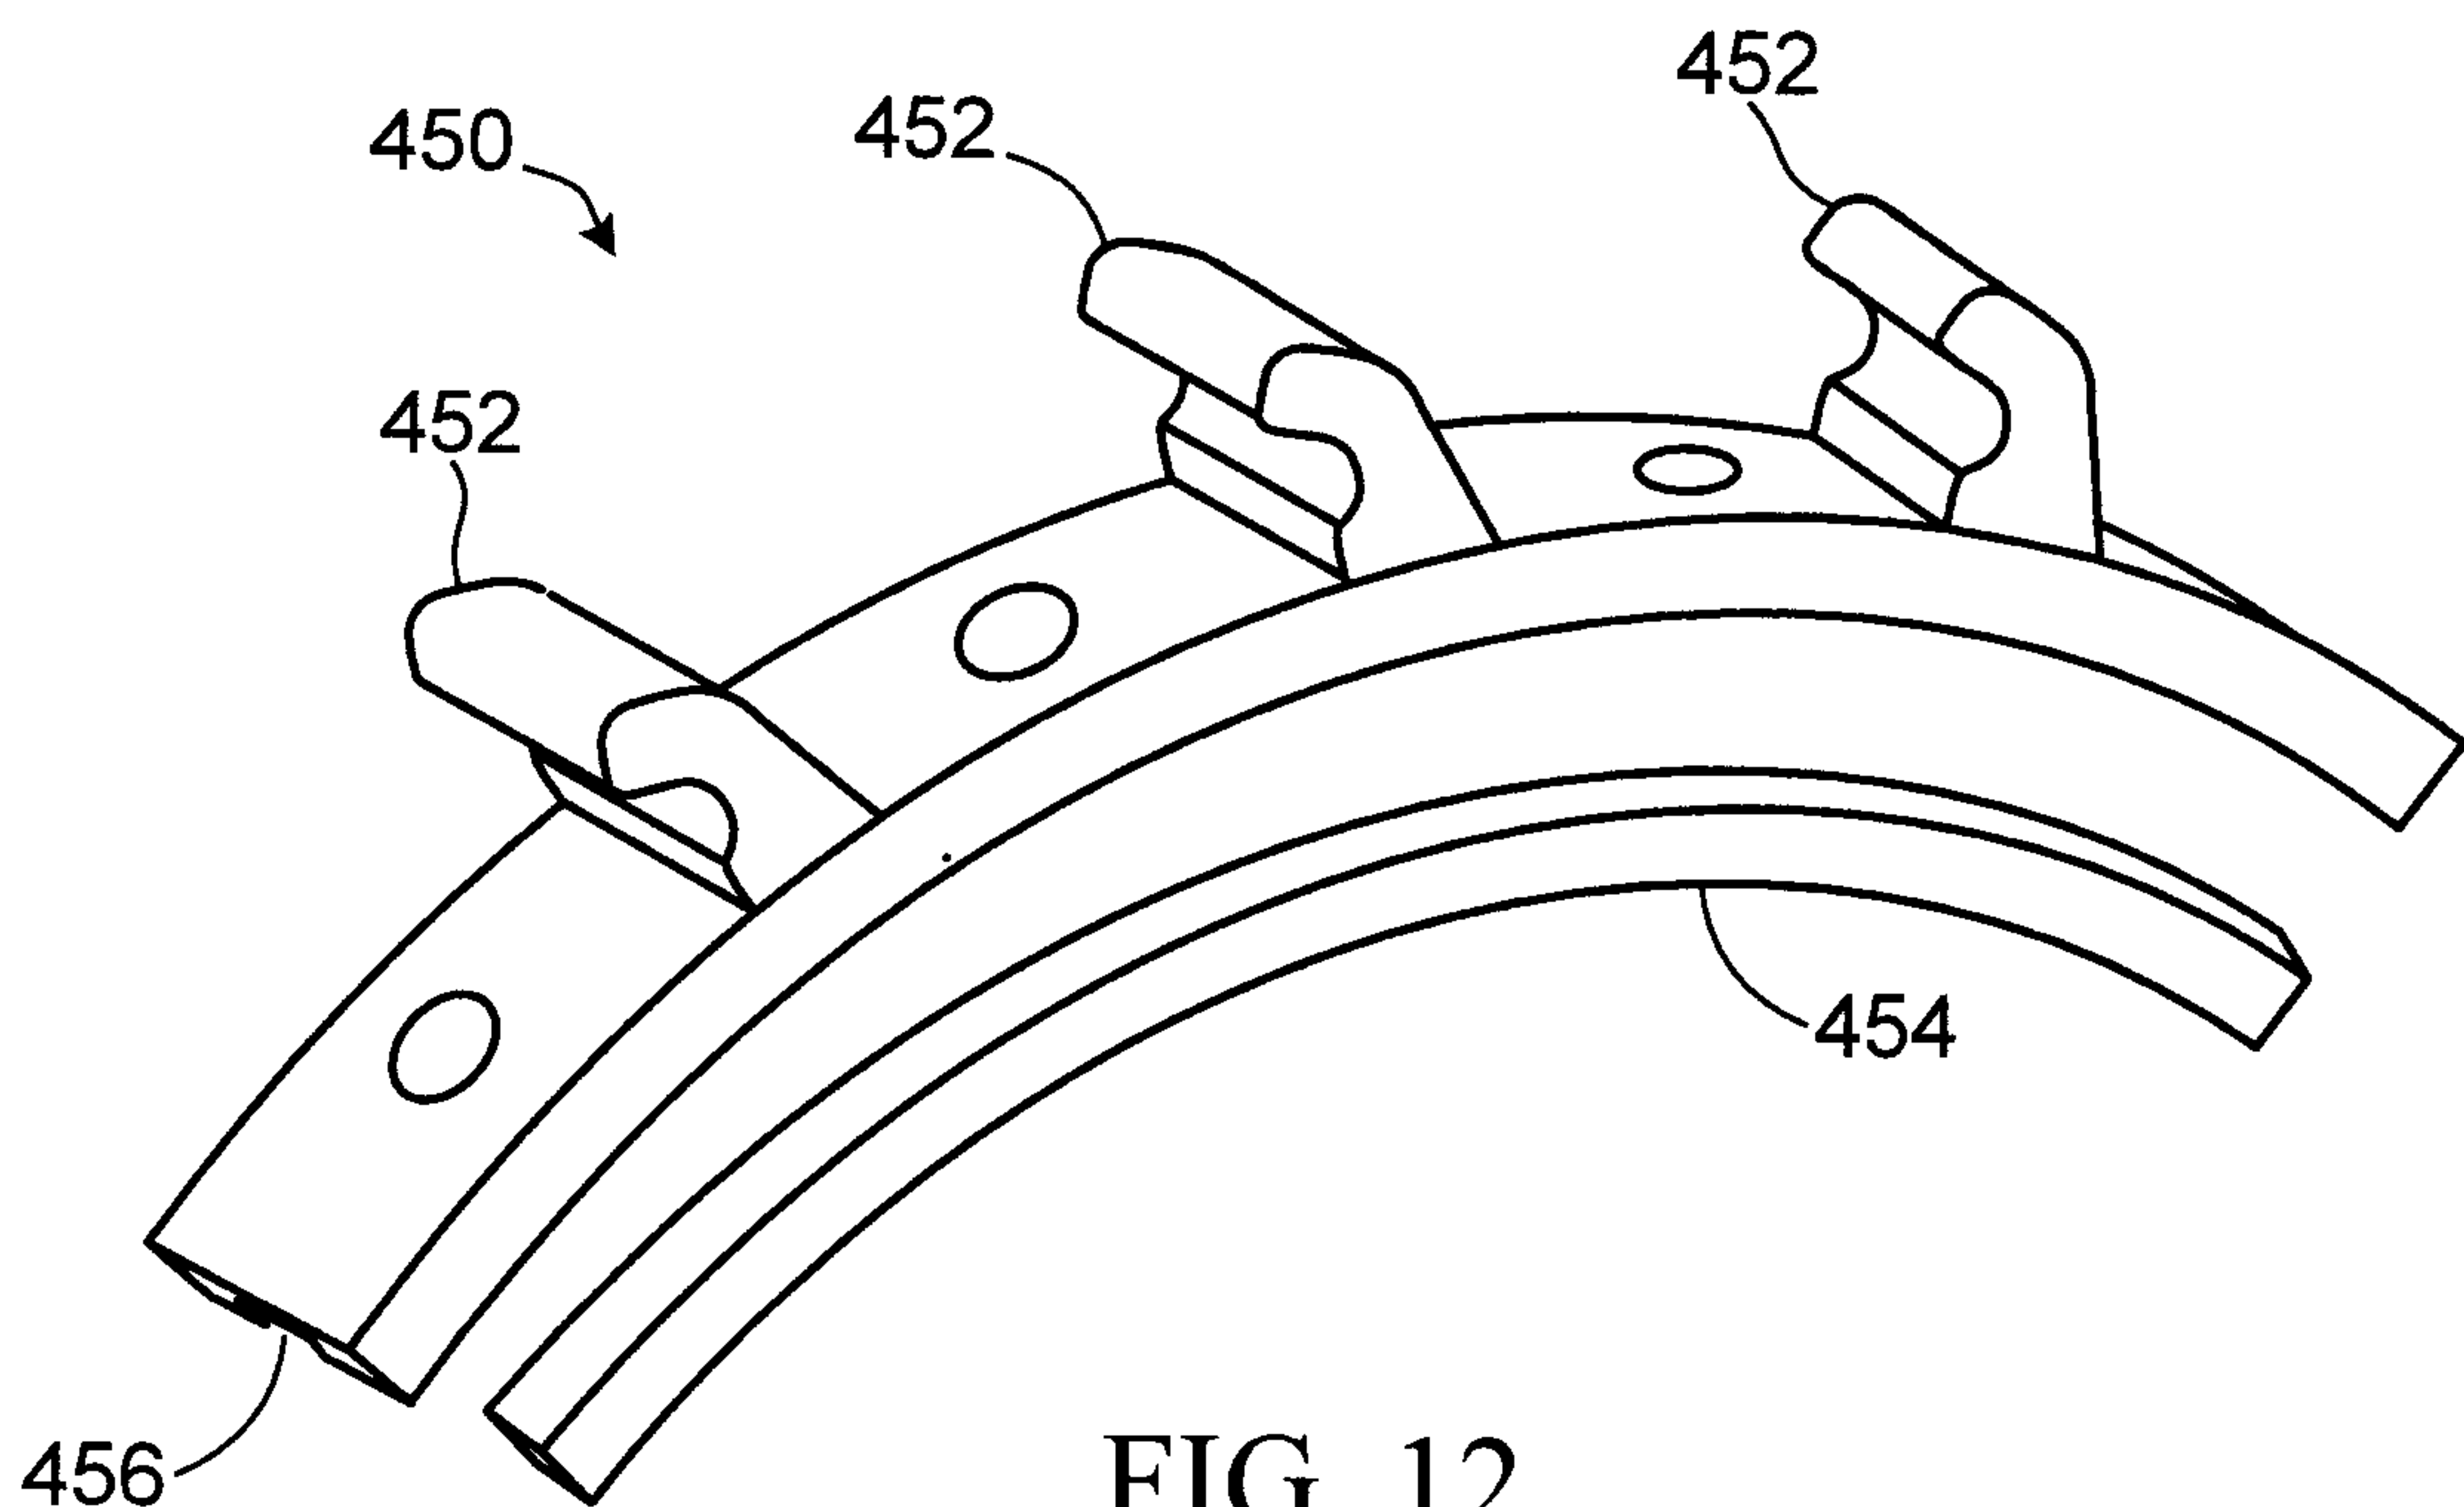


FIG. 12

+

