



- (51) **International Patent Classification:**
B41J 2/175 (2006.01)
- (21) **International Application Number:**
PCT/US2015/029578
- (22) **International Filing Date:**
7 May 2015 (07.05.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/990,439 8 May 2014 (08.05.2014) US
62/013,584 18 June 2014 (18.06.2014) US
- (71) **Applicant:** THE EXONE COMPANY [US/US]; 127 Industry Boulevard, North Huntingdon, PA 15642 (US).
- (72) **Inventors:** BRUNERMER, Daniel, T.; 43 Ridge Avenue, Leechburg, PA 15656 (US). DUGAN, Anthony, S.; 2412 Easler Street, McKeesport, PA 15679 (US). LIZZI, Thomas; 107 Red Brush Trail, Harmony, PA 16037 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

(54) **Title:** THREE-DIMENSIONAL PRINTING EXCESS DEPOSITED PARTICULATE HANDLING

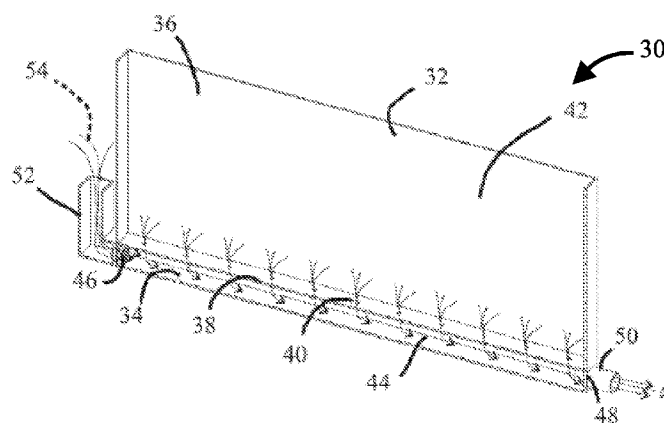


FIG. 3

(57) **Abstract:** A three-dimensional printing apparatus is disclosed has one or more troughs for receiving excess deposited particulate. Such troughs may be positioned to receive the excess deposited particulate into a particulate receiving chamber of the trough. An evacuation chamber is located at the bottom of each trough. A partition separates the evacuation chamber from the receiving chamber of the trough. The partition is selectively perforated to permit a desired amount of the particulate to flow into the evacuation chamber from the receiving chamber. The evacuation chamber is connected to a vacuum source to periodically or continuously draw ambient gas from a gas inlet to the evacuation chamber and/or from the receiving chamber through the perforations of the partition and then through the evacuation chamber toward the vacuum source to entrain an amount of the particulate and carry the entrained particulate out of the evacuation chamber.



Title: Three-Dimensional Printing Excess Deposited Particulate Handling

Inventors: Dan Brunermer, Anthony Dugan, and Thomas Lizzi

[0001] Field of the Invention: The present invention relates to apparatuses for handling excess deposited build particulate from the spreading of particulate layers in three-dimension printers. The present invention also relates to methods of handling such excess deposited particulate.

[0002] Background of the Invention: Conventional three dimensional printing processes take various forms. Nearly all involve the slicing of a software representation of a three-dimensional article into software representations of two-dimensional slices of the article and then building the article in three-dimensions by sequentially transforming such two-dimensional representations into physical layers built one upon another. Several three-dimensional printing processes make use of particulates (also sometimes referred to in the art as “powder” or “particles”) for building the article in three dimensions. Among these processes are the binder jetting process (also known as the inkjet printing process), selective layer sintering process, selective laser melting process, direct metal laser sintering process, electron beam melting process, and the selective heat sintering process.

[0003] In the three-dimension printing processes that use particulates, a first layer of the particulates is deposited onto the top surface of a build platform. This deposition is sometimes referred to in the art as “spreading” a particulate layer. An image of the two-dimensional representation of the first slice of the article may then be imparted to this first particulate layer or the first particulate layer may be covered over with one or more additional particulate layers before the image of the first slice of the article is imparted to the then-topmost particulate layer. After that, the sequence of applying a particulate layer and imparting the image of the two-dimensional representation of a subsequent slice of the article is performed until the three-dimensional article is formed. The top surface of the bare build platform or of the then-topmost particulate layer is referred to herein as the “build surface”. Often, more than one article or multiple copies of the same article are produced at the same time by simultaneously imparting the respective two-dimensional slices of the articles onto the build surface particulate layers. At the end of the particulate layer-placing plus image-imparting iterative sequence, particulate-based versions of the article or articles are surrounded by a bed of the unbonded particulates. This bed is sometimes referred to as a “build bed” or as a “powder bed” or as a “particulate bed”.

[0004] The particulate processes commonly use a support platform which is designed to be step-wise lowered into a walled cavity. At the start of the process, the support platform is positioned so that the support surface is flush with the top of the cavity walls. After each particulate layer-placing plus image-imparting iteration, the support platform is indexed down into the cavity so that the then-topmost particulate layer is flush with the cavity walls so that the next particulate layer can be deposited.

[0005] Various techniques have been devised for depositing the particulate layers, but a common problem occurs with particulate layer deposition that is due to the nature of particulate flow in normal-level gravity fields. Unlike layers of continuous solid materials, e.g. sheets of metal, plastic, or paper, the particulate layers do not terminate in sharply-defined vertical walls, but rather in somewhat irregular edges with generally downwardly-outward sloping walls, the contours of which roughly relate to the angle of repose of the particulates and depend on various material and dynamic factors, e. g. the inter-particle attractive/repulsive forces of the particulates, the velocity vectors active on the particulates during layer deposition, the presence of additives, coatings, or absorbed or adsorbed chemical species on the particulates, environmental forces such as vibrations, etc. Usually, in order to assure that the build surface always has the same predictable dimensions of the initial support surface, an excess amount of particulates is deposited for each layer. However, unless some provision is made for removing the excess deposited particulates, it is likely that the accumulation of the excess deposited particulates after the deposition of one or more layers will interfere with the desired deposition of additional layers.

[0006] A common way of handling the excess deposited particulate problem is to provide one or more receiving troughs into which the excess deposited particulate can fall or be pushed. However, sizing the receiving troughs can be problematic. Making the troughs too large requires making the overall size of the three-dimensional printing apparatus larger than it needs to be. Making the troughs too small may result in the troughs becoming ineffective upon overfilling or require the use of reservoirs which take in the particulates directly or indirectly from the trough or troughs. Also, adding to the problem is the fact that the effective bulk density of the particulate as deposited can change from one type of particulate to another and even from batch-to-batch for the same type of particulate. Furthermore, in order to prevent cross-contamination, the troughs and associated reservoirs must be thoroughly cleaned before the three dimensional printing apparatus can be utilized with another type of particulate.

Summary of the Invention

[0007] The present invention addresses the above-stated sizing problem by providing a three-dimensional printing apparatus which has one or more troughs for receiving the excess deposited particulate. Preferably such troughs are positioned parallel or perpendicular to the particulate deposition direction to receive the excess deposited particulate into a particulate receiving chamber of the trough. An evacuation chamber is located at the bottom of each trough. A partition separates the evacuation chamber from the receiving chamber of the trough. The partition is selectively perforated to permit a desired amount of the particulate to flow into the evacuation chamber from the receiving chamber. The evacuation chamber is connected to a vacuum source to periodically or continuously draw ambient gas (usually air) from a gas inlet to the evacuation chamber and/or from the receiving chamber through the perforations of the partition and then through the evacuation chamber toward the vacuum source so as to entrain a desired amount of the particulate and carry the entrained particulate out of the evacuation chamber where it may be collected in a collection vessel or otherwise disposed of.

[0008] Some preferred embodiments of the present invention also address the above-stated cleaning problem. In these embodiments, the inventive apparatus includes a build box having one or more troughs of the character described in the previous paragraph. The build box is designed to be removable from the three-dimensional printer apparatus. The build box includes walls configured to confine the particulate bed from lateral flow and a build platform which is adapted to be raised or lowered.

[0009] The present invention also includes methods of removing excess deposited particulate by capturing the particulate in a trough which has a receiving chamber and an evacuation chamber separated by a selectively perforated partition, and connecting the evacuation chamber to a vacuum source so that ambient gas is drawn from the receiving chamber through the perforations of the partition and the gas entrains a desired amount of the particulate and carries the entrained particulate out of the evacuation chamber.

[0010] In some preferred embodiments of the present invention, the perforations in the partition are adapted to be selectively opened and closed, thus providing the user with the ability to adjust the gas flow path through the partition through selected perforations.

Brief Description of the Drawings

[0011] The criticality of the features and merits of the present invention will be better understood by reference to the attached drawings. It is to be understood, however, that the

drawings are designed for the purpose of illustration only and not as a definition of the limits of the present invention.

[0012] FIG. 1A is a schematic top view of a work table surface of a prior art three-dimensional printing apparatus that uses a particulate build material. The work table surface is shown prior to the deposition of the first particulate layer and does not have troughs for receiving excess deposited particulate material.

[0013] FIG. 1B is a schematic top view of the work table surface of FIG. 1B halfway through the deposition of the first particulate layer.

[0014] FIG. 1C is a schematic top view of the work table surface of FIG. 1B after the completion of the deposition of the first particulate layer.

[0015] FIG. 1D is a schematic top view of the work table surface of FIG. 1C after an image has been imparted to the first particulate layer and the build platform has been indexed to receive a second particulate layer.

[0016] FIG. 2 is a schematic top planar view of a work table surface of a prior art three-dimensional printing apparatus which includes troughs.

[0017] FIG. 3 is a schematic, perspective, cross-sectional view of a trough having an evacuation chamber in accordance with an embodiment of the present invention.

[0018] FIG. 4 is a schematic perspective view of a trough partition in accordance with an embodiment of the present invention.

[0019] FIG. 5 is a schematic longitudinal mid-plane cross-sectional view of a partition disposed within a trough in accordance with an embodiment of the present invention.

[0020] FIG. 6 shows a schematic longitudinal mid-plane cross-sectional view of another partition in accordance with an embodiment of the present invention.

[0021] FIG. 7 is a schematic top view of a work table of a three-dimensional printer having troughs in accordance with an embodiment of the present invention.

[0022] FIG. 8 is a schematic cutaway side view taken across cutting plane 8-8 of FIG. 7.

[0023] FIG. 9 is a schematic perspective view of a removable build box according to an embodiment of the present invention.

[0024] FIG. 10 is a schematic perspective view of a three-dimensional printer into which the build box of FIG. 9 has been inserted in accordance with an embodiment of the present invention.

[0025] FIG. 11 is a schematic perspective view of a partition in accordance with an embodiment of the present invention.

[0026] FIG. 12 is a cross-sectional view of the partition of FIG. 11 taken along cutting plane 12-12.

[0027] FIG. 13 is a schematic perspective view of a strip that is designed to be used in conjunction with the partition shown in FIGS. 11 and 12 to close a plurality of perforations.

Description of Preferred Embodiments

[0028] In this section, some preferred embodiments of the present invention are described in detail sufficient for one skilled in the art to practice the present invention without undue experimentation. It is to be understood, however, that the fact that a limited number of preferred embodiments are described herein does not in any way limit the scope of the present invention as set forth in the claims. It is to be understood that whenever a range of values is described herein or in the claims that the range includes the end points and every point therebetween as if each and every such point had been expressly described. Unless otherwise stated, the word “about” as used herein and in the claims is to be construed as meaning the normal measuring and/or fabrication limitations related to the value which the word “about” modifies. Unless expressly stated otherwise, the term “embodiment” is used herein to mean an embodiment of the present invention.

[0029] Prior to describing preferred embodiments, FIGS. 1A-1D and FIG. 2 are presented to provide a better understanding of the excess deposited particulate problem. It should be understood that the particulates may range in nominal size from about a micron to about a millimeter in effective diameter and usually consist of a range of sizes, the smallest of which may be submicron in effective diameter.

[0030] FIG. 1A shows a schematic top planar view of a work table surface **2** of a three-dimensional printer that uses a particulate build material. The work table **2** here forms a curtilage around a build platform **4** that is configured to be step-wise lowered into a build cavity (not shown). Also shown in the drawing is a particulate dispenser **6** which is adapted to move above and across the work table surface **2** and the build platform **4** in the direction of arrow **8** (see FIG. 1B), i.e., the particulate layer “deposition direction” or “spread direction”, and to selectively deposit a predetermined amount of particulate as it moves along. The work table surface **2** is shown prior to the deposition of a first particulate layer and does not have troughs for receiving excess deposited particulate material.

[0031] FIG. 1B shows the scene of FIG. 1A when the particulate dispenser **6** is partway in its journey and has partially deposited a first particulate layer **10** (indicated by hashing). FIG. 1C shows the scene after the particulate dispenser **6** has completed depositing the first

particulate layer **10**. Note that first particulate layer **10** covers the build platform **4** and extends onto portions of the work table surface **2** immediately surrounding the build platform **4**. The excess deposited particulate **12** (indicated by double hashing) beyond the particulate needed to just cover the build platform **4** (indicated by single hashing) serves no purpose other than to assure that the first particulate layer **10** fully covers the build platform **4**.

[0032] FIG. 1D shows the scene after the image **14** of the first slice of the article that is being built has been imparted to the first particulate layer **10** and the build platform **4** has been indexed downward a distance equal to a layer thickness and the particulate dispenser **6** has been moved back into position to deposit the second particulate layer. Unless an operation has been conducted to remove the excess deposited particulate **12** – and none has been removed in the scene shown in FIG. 1D – the excess deposited particulate **12** remains on the surface of the work table **2** and may interfere with the deposition of a second particulate layer and the movement of the particulate dispenser **6** as it deposits the second particulate layer.

[0033] Various schemes have been developed to handle the excess deposited particulate. Such schemes typically involve using some sort of a trough and/or reservoir that is part of the three-dimensional printer apparatus to collect the excess deposited particulate. The reservoir or reservoirs may be fed by troughs in the curtilage area or directly receive the excess deposited particulate. The excess deposited particulate may fall into a trough or reservoir directly or be mechanically pushed into a trough or reservoir, e.g. by the particulate dispenser or blades attached to the particulate dispenser.

[0034] FIG. 2 shows a schematic top planar view of the work table surface **2** which has been modified to include troughs **16a-16d** surrounding the build platform **4**. The inner walls of the troughs **16a-16d**, e.g. inner wall **18**, separate the interiors of the troughs **16A-16D** from the build platform **4**. The troughs **16a-16d** are sized to receive the excess deposited particulate described above with regard to FIGS. 1C and 1D. The troughs **16a-16d** may be sized to contain all of the excess deposited particulate that is expected to be deposited during the building of an article. Alternatively, one or more of the bottoms of the troughs **16a-16d** slope toward an exit, e.g. exit **20** of the trough **16d**, to convey the excess deposited particulate to one or more collection reservoirs (not shown).

[0035] Descriptions of preferred embodiments will now be presented. FIG. 3 is a schematic, perspective, cross-sectional view of a trough **30** in accordance with the present invention. The trough **30** has four vertical walls, e.g. vertical wall **32**, a bottom wall **34**, and a top opening **36**. The trough **30** also has a perforated partition **38** which contains a plurality of through-holes, e.g. hole **40**. The partition **38** divides the space within the trough **30** into a

particulate receiving chamber **42** and an evacuation chamber **44**. An optional gas inlet **46** is located at one end of the evacuation chamber **44** and a gas outlet **48** is located at the opposite end of the evacuation chamber **44**. A nipple **50** is connected to the gas outlet **48** and is adapted to be attached to a vacuum source (not shown). The gas inlet **46** is preferably provided with some form of a particulate outflow restrictor **52** which controls the amount of particulate which can flow out of the evacuation chamber **44** through the gas inlet **46**. The particulate outflow restrictor **52** shown is in the form of hollow box having one side in communication with the gas inlet **46** and its top side open so as to permit inflow of the ambient atmosphere. The streamline arrows **54** show the direction of gas flow when the evacuation chamber **44** is operatively connected to the vacuum source. As indicated by the streamline arrows **54**, the pressure differential imposed by the vacuum source causes ambient gas (e.g. air) to flow into the evacuation chamber **44** through the open top side of the particulate outflow restrictor **52** and then the gas inlet **46** and in through the holes in the partition **38** and exit the evacuation chamber **44** through the nipple **50**. Particulates which are in the evacuation chamber **44** or about to enter the evacuation chamber **44** through the holes in the partition **38** may be entrained in the gas flow and exit the evacuation chamber **44** through nipple **50** to be carried off to a collection device, e.g. a cyclone or a screen separator, or otherwise disposed of.

[0036] The partition **38** is shown in FIG. 3 as being flat and horizontally disposed within the space of the trough **30**. However, other configurations and dispositions of a trough's partition are within the scope of the present invention. For example, the partition may be disposed at any desired acute angle from the horizontal. FIGS. 4-6 and 11-12 give examples of some of the various configurations the partitions of the present invention can take.

[0037] Referring to FIG. 4, there is shown a schematic perspective view of a partition **60**. The top surface **62** of partition **60** is concave across its width. This shape encourages the flow of particulate down into each of the holes **64** located along the length of the partition **60**.

[0038] FIG. 5 shows a schematic longitudinal mid-plane cross-sectional view of another partition **70** disposed within a trough **72**. The profile of the partition **70** has a semi-parabolic slope from its first end **74** to its second end **76**. When the partition's **70** first end **74** is placed adjacent to the gas inlet end **78** of the evacuation chamber **80**, this profile shapes the evacuation chamber **80** to enhance the acceleration of gas flow and the sweeping away of particulates through the evacuation chamber **80** as indicated by the streamline arrows **82**.

[0039] FIG. 6 shows a schematic longitudinal mid-plane cross-sectional view of another partition **90**. The partition **90** slopes from its first and second ends **92, 94** down toward its middle to encourage particulate flow toward the middle of the partition **90**.

[0040] FIG. 11 shows a schematic perspective view of another partition **150**. The partition **150** has a flat bottom wall **152**, two sidewalls **154**, **156**, and an optional horizontal stiffener **158**. The bottom section **152** has a plurality of perforations, e.g. perforation **160**. Each of the sidewalls **154**, **156** extends upward from the bottom wall **152** at a preselected included angle. Preferably the included angle is in the range of from about 5 to 90 degrees. Each of the sidewalls is shown as having an optional extension, e.g., sidewall extension **162** of sidewall **154**, which is adapted to be parallel to the trough vertical wall in which the trough is used (e.g. vertical wall **32** of trough **30** in FIG. 3). When used, a sidewall extension allows the sidewall to better seal against the sides of the trough with which the partition is used. The horizontal stiffener **158** is attached to the bottom **152** and the perforations extend through the horizontal stiffener **158**. When used, a horizontal stabilizer preferably extends horizontally to engage the vertical wall of the trough into which the partition is used so as to help position the partition within the trough in which the partition is used.

[0041] In some embodiments, one or more of the perforations of one or more of the partitions are adapted to be selectively opened or closed, thus providing the user with the ability to adjust the gas flow path through the partition through selected perforations. Selectively closing selected partition perforations has the effect of controlling the amount particulate flow through the partition.

[0042] Selectively closing a perforation may be done by securing a plug into the selected perforation and opening a closed perforation is done by removing a plug from the perforation. The plug may be secured by any conventional securing strategy, e.g. by threading the plug and the perforation, by compressing the plug within the perforation, etc. FIG. 12, which is a cross-sectional view of partition **150** of FIG. 11 taken along cutting plane 12-12, shows an example of a perforation **164** which is adapted to receive plug **166**. The perforation **164** has threads **168** which are sized to cooperate with the threads of the plug **166** to reversibly secure plug **166** (also shown in cross-section) within the perforation **164** (as indicated by arrow) to close off the perforation **164**.

[0043] Selectively closing groups of two or more adjacent perforations may be done by attaching a strip to the partition so that the strip covers the selected group of perforations. Preferably, the strip is removably secured to the partition by way of one or more plugs that securingly engage one or more perforations. FIG. 13 shows a schematic perspective view of a strip **170** that is designed to be used in conjunction with the partition shown in FIGS. 11 and 12. The strip **170** has two through-holes **172**, **174** which are sized to receive screws (not shown) which extend through through-holes **172**, **174** and thread into threaded perforations

(e.g. perforation **164** shown in FIG. 11) of partition **150** to secure the strip **170** to the partition **150**. The strip **170** is long enough to close five perforations of the partition **150** including the two perforations which are closed off by the screws which secure the strip **170** to the partition **150**.

[0044] The placement of a trough's partition within the trough's interior space determines both the relative and absolute sizes of the trough's particulate receiving chamber and evacuation chamber. The placement is selected to balance the expected rate of influx of particulate material into the particulate receiving chamber with the expected rate of particulate removal from the evacuation chamber so that the receiving chamber is not allowed to overflow during the three-dimensional printing operation. The rate of influx of particulate into the particulate receiving chamber is dependent on the amount and deposition rates of the excess deposition particulate. The rate of removal of particulate from the evacuation chamber depends, among other things, on the gas flow rate through the evacuation chamber, the particulates' propensity to become entrained in the gas flow, and the amount of time the gas flow is continuously or periodically sustained. Although it is within the scope of the present invention to have the inter-chamber transfer rate of particulates equal that of the particulate receiving chamber's influx rate, it is also within that scope for the transfer rate to be less than that influx rate, so long as this does not result in the overflow of the particulate receiving chamber during the three-dimensional printing operation.

[0045] It is to be understood that while it is preferable for the particulate removal rate from the evacuation chamber to be such that particulates do not accumulate within the evacuation chamber over the course of the three-dimensional printing operation, such accumulations are within scope of the present invention, so long as the accumulations do not result in the overflow of the trough during the three-dimensional printer operation.

[0046] The selection of the number, size, shape, and locations of the holes in the partition of a trough may be made depending on several factors. Two closely related factors are the size distribution range and the shapes of the particulates that are to be used during the three-dimensional printing operation. It is preferable that the holes be sized and shaped to allow passage of all shapes and sizes within the size distribution range without the occurrence of particulate bridging of the holes. Additional factors are the partition's profile and its angle of disposition. It is preferred that the number and distribution of holes be chosen to avoid the accumulation of particulates on the portion or portions of the partition to which the partition's profile and/or angular disposition direct greater numbers of particulates. Two more factors are the gas flow rate through the evacuation chamber and whether or not a gas inlet (e.g., gas inlet

46 of FIG. 3) has been provided to the evacuation chamber. It is desirable to size, shape, and distribute the holes to promote particulate entrainment in the vacuum-induced gas flow through the holes. It is to be understood that in embodiments wherein the optional gas inlet of the evacuation chamber is omitted, there is no need for a particulate outflow restrictor, e.g. the particulate outflow restrictor **52** shown in FIG. 3. Also, in that case, all gas inflow into the evacuation chamber is through the holes in the partition.

[0047] In some embodiments, the partition may be removed from its trough and replaced with a substitute partition. The substitute partition may have holes which are different in number, size, shape, and/or locations from the holes of the original partition and/or have a configuration that is different from that of the original partition and/or be adapted to have an angle of disposition which is different from that of the original partition. It is preferable to seal the partition against the sides of the trough so that the only passageways for particulate from the particulate receiving chamber to the evacuation chamber is through the holes in the partition.

[0048] The present invention includes three-dimensional printing apparatuses having of one or more of the inventive troughs which are adapted to directly and/or indirectly collect the excess deposited particulates appurtenant to the deposition of particulate layers during the three-dimensional printing operation. Preferably, the trough or troughs are positioned adjacent to the build platform so as to directly receive the excess deposited particulate, e.g. in the relative locations of conventional troughs **16a-16d** shown in FIG. 2. In some embodiments, one or more inventive troughs (i.e. troughs having some version of the evacuation chamber system described above) are used in conjunction with one or more conventional troughs. In some of these embodiments, at least one of the conventional troughs conveys some or all of the excess deposited particulate into one or more of the inventive troughs. FIG. 7 shows such an embodiment.

[0049] Referring to FIG. 7, there is shown a schematic top view of a work table **100** of a three-dimensional printer that uses a particulate build material. A build platform **102** is located within the work table **100**. A particulate dispenser **104** is located above the work table **100** and is adapted to deposit layers of particulate material onto the build platform **102**. In contrast to the particulate dispenser **6** of FIG. 1A-1D which was adapted to deposit particulate layers only when moving in the one direction indicated by arrow **8** in FIG. 1B, the particulate dispenser **104** is adapted to deposit particulate layers when moving in either of the directions indicated by the arrow **106**, so that the particulate dispenser **104** has two alternate deposition directions. Two inventive troughs **108a**, **108b** are positioned adjacent to the build table and

parallel to the deposition directions of the particulate dispenser **104**. Two conventional troughs **110a**, **110b** are positioned adjacent to the ends of the build platform and are adapted to feed excess particulate material into the inventive troughs **108a**, **108b**. Thus, in this arrangement, each of the inventive troughs **108a**, **108b** are adapted to receive excess deposited particulate directly from the particulate dispenser **104** and to receive excess deposited particulate indirectly by way of the conventional troughs **110a**, **110b**. FIG. 8 presents a schematic cutaway side view taken across cutting plane 8-8 of FIG. 7.

[0050] Referring to FIG. 8, the conventional trough **110a** is positioned between inventive troughs **108a**, **108b**. The inventive troughs **108a**, **108b**, have, respectively, particulate receiving chambers **112a**, **112b**, partition plates **114a**, **114b** (having through holes such as holes **116a**, **116b**), and evacuation chambers **118a**, **118b**. The conventional trough **110a** has a peaked bottom **119** which slopes so as to direct excess deposited particulate toward the particulate receiving chambers **112a**, **112b** of the inventive troughs **108a**, **108b**.

[0051] In some embodiments, the inventive troughs are built directly into the three-dimensional printing apparatus so that they are a permanent part of the apparatus. FIG. 7 illustrates one such embodiment. In other embodiments, one or more of the inventive troughs are disposed in a removable unit which is adapted to be inserted into the three-dimensional printing apparatus during a particular three-dimensional printing operation and then removed thereafter. In some particularly preferred embodiments, the removable unit also includes a build box having walls designed to laterally confine the particulate bed and a build platform which is adapted to be raised or lowered. FIG. 9 is a perspective view of a build box **120** of such an embodiment.

[0052] Referring to FIG. 9, the build box **120** is adapted to be inserted and withdrawn through the side of a three-dimensional printing apparatus in the directions indicated by the first arrow **122a** (insertion direction) and the second arrow **122b** (withdrawal direction). The third arrow **124** indicates the particulate spreading or deposition direction during the operation of the three-dimensional printing apparatus. The build box **120** has a build cavity **126** which is adapted to receive a particle bed during the building of a three-dimensional article. The build cavity **126** is bordered along its sides by four vertical walls, e.g. wall **128**, and along its bottom by a vertically-movable build platform (not shown). The build box **120** also has two conventional troughs **130a**, **130b** and two inventive troughs **132a**, **132b**. The build box **120** also has nipple **134** which is adapted to connect the inventive trough **132b** to a vacuum source and a particulate outflow restrictor **136** which has an open top **138** and is in communication with the gas inlet (not shown) for inventive trough **132b**. Although they are not visible in FIG.

9, the build box **120** also includes a corresponding nipple and particle outflow restrictor with a gas inlet for inventive trough **132a**.

[0053] FIG. 10 shows a schematic perspective view of a three-dimensional printer **140** into which the build box **120** has been inserted.

[0054] It is to be understood that the present invention includes within its scope three-dimensional printers that have build cavities that have one or more non-planar walls for laterally confining the build bed. For example, one or more of the walls may be curved. The build cavity may have a circular cross-section circumscribed by a continuously curved wall. Such non-planar walled build cavities may be either a permanent part of the three-dimensional printing apparatus or part of a removable build box.

[0055] It is also to be understood that the troughs of embodiments may have curved shapes. Such curved shaped troughs are preferred for use adjacent to a curved build cavity wall. Such curved troughs may be either a permanent part of the three-dimensional printing apparatus or removable, e.g., as part of a build box. Troughs having a curved shape may be either the troughs having an evacuation chamber or troughs not having an evacuation chamber.

[0056] In some embodiments, the particulates which are removed from a trough's evacuation chamber are subsequently collected in a collection device, e.g. a cyclone, screen separator, electrostatic precipitator, scrubber, etc. Preferably, the collection device is chosen so as to permit reuse of the collected particulate in the three-dimensional printing process with little or no subsequent conditioning operation. Although the collection device may be an integral part of the three-dimensional printer apparatus, preferably the collection device is either removably attached to the three-dimensional printer apparatus or is separate from the three-dimensional printer apparatus. These latter two configurations make it easier to avoid cross-contamination when the three-dimensional printer apparatus is first used for one type of particulate and then another type.

[0057] The present invention also includes methods of making articles with a three-dimensional printer apparatus which utilizes one or more of the inventive troughs. In such embodiments, the methods include providing a three-dimensional printer apparatus with at least one trough having a particulate receiving chamber, an evacuation chamber, and a selectively perforated partition separating the particulate receiving chamber from the evacuation chamber. The trough is positioned to receive excess deposited particulate material during the three-dimensional printing operation and is connected to a vacuum source. A vacuum source is intermittently or continuously operatively connected to the evacuation chamber and to cause a flow of ambient gas through the evacuation chamber which entrains at

least a portion of the excess deposited particulate which entered the trough's particulate receiving chamber and removes the entrained particulate from the evacuation chamber. Some method embodiments also include the steps of inserting a removable build box into the three-dimensional printing apparatus prior to the printing operation and then removing the build box after the completion of the printing operation.

[0058] Some method embodiments also include the step of selectively closing one or more partition perforations so as to control the gas flow through the partition in which the perforation is located. The step has the effect of controlling the amount particulate flow through the partition. The closing may be done by selectively and removably inserting a plug into one or more of the perforations. The closing may also be done by selectively and removably attaching a strip that is adapted to attach to the partition so as to close a plurality of perforations.

[0059] While only a few embodiments of the present invention have been shown and described, it will be obvious to those skilled in the art that many changes and modifications may be made thereunto without departing from the spirit and scope of the invention as described in the claims. All United States patents and patent applications, all foreign patents and patent applications, and all other documents identified herein are incorporated herein by reference as if set forth in full herein to the full extent permitted under the law.

CLAIMS

What is claimed is:

1. A three-dimensional printing apparatus (140) comprising at least one trough (30) which is adapted to receive excess deposited particulates from the operation of the three-dimensional printing apparatus (140), wherein the trough (30) comprises a first chamber (42) adapted to receive the particulate, a second chamber (44), and a partition (38) separating the first and second chambers (42, 44), the second chamber (44) having an exit (48) which is adapted to connect to a vacuum source, and the partition (38) having a plurality of through-holes (40) adapted to permit the particulate to gravity flow from the first chamber (42) into the second chamber (44) and for ambient gas to flow from the first chamber (42) into the second chamber (44) so as to entrain and remove at least some of the particulate from the second chamber (44) through the exit (48) when the second chamber (44) is operatively connected to the vacuum source.
2. The three-dimensional printing apparatus (140) of claim 1, wherein the second chamber (44) also has a gas inlet (46) which is adapted to permit the ambient gas to flow through the second chamber (44) so as to entrain and remove at least some of the particulate from the second chamber (44) through the exit (48) when the second chamber (44) is operatively connected to the vacuum source.
3. The three-dimensional printing apparatus (140) of claim 1, wherein the trough (30) is removable from the three-dimensional printing apparatus (140).
4. The three-dimensional printing apparatus (140) of claim 1, further comprising a removable build box (120), wherein the build box (120) includes the trough (30).
5. The three-dimensional printing apparatus (140) of claim 1, wherein the partition (38) is concave across its width.
6. The three-dimensional printing apparatus (140) of claim 1, where in the partition (38) is disposed at a non-horizontal angle within the trough (30).

7. The three-dimensional printing apparatus (140) of claim 1, wherein the partition (38) has a semi-hyperbolic longitudinal profile.
8. The three-dimensional printing apparatus (140) of claim 1, wherein the partition (38) is curved along its length.
9. The three-dimensional printing apparatus (140) of claim 1, further comprising a particulate outflow restrictor (136) which is adjacent to an end of the second chamber (44).
10. The three-dimensional printing apparatus (140) of claim 2, further comprising a particulate outflow restrictor (136) which is in fluid communication with the gas flow inlet (46).
11. The three-dimensional printing apparatus (140) of claim 1, further comprising a plug (166) adapted to selectively close one of the through-holes (40) of the plurality of through-holes (40).
12. The three-dimensional printing apparatus (140) of claim 11, wherein the plug (166) is adapted to threadingly engage at least one of the through-holes (40) of the plurality of through-holes (40).
13. The three-dimensional printing apparatus (140) of claim 1, further comprising a plurality of plugs (166), wherein each of the plurality of plugs (166) is adapted to selectively close one of the through-holes (40) of the plurality of through-holes (40).
14. The three-dimensional printing apparatus (140) of claim 1, further comprising a strip (170) adapted to removably attach to the partition (38) so as to selectively close at least two through-holes (40) of the plurality of through-holes (40).
15. The three-dimensional printing apparatus (140) of claim 1, wherein the partition (38) has a bottom wall (152) and a pair of sidewalls (154, 156), wherein the plurality of through-holes (40) is located in the bottom wall (152) and each of the sidewalls (154, 156) extends away from the bottom wall (152) at an angle in the range of 5 to 90 degrees.

16. The three-dimensional printing apparatus (140) of claim 1, wherein the trough (30) has a vertical wall (32) and the partition (38) has a sidewall (156), wherein at least a portion of the sidewall (156) is adapted to be parallel to the vertical wall (32).

17. A build box (120) comprising a movable build plate (102), a build cavity (126), and at least one wall (128) vertically defining the build cavity (126), the build box (120) being adapted to be reversibly receivable by a three-dimensional printing apparatus (140) and having at least one trough (30) which is adapted to receive excess deposited particulates from the operation of the three-dimensional printing apparatus (140), wherein the trough (30) comprises a first chamber (42) adapted to receive the particulate, a second chamber (44), and a partition (38) separating the first and second chambers (42, 44), the second chamber (44) having an exit (48) which is adapted to connect to a vacuum source, and the partition (38) having a plurality of through-holes (40) adapted to permit the particulate to gravity flow from the first chamber (42) into the second chamber (44) and for ambient gas to flow from the first chamber (42) into the second chamber (44) so as to entrain and remove at least some of the particulate from the second chamber (44) through the exit (48) when the second chamber (44) is operatively connected to the vacuum source.

18. The build box (120) of claim 17, wherein the partition (38) has width and is concave across its width.

19. The build box (120) of claim 17, where in the partition (38) is disposed at a non-horizontal angle within the trough (30).

20. The build box (120) of claim 17, wherein the partition (38) has a semi-hyperbolic longitudinal profile.

21. The build box (120) of claim 17, wherein the second chamber (44) also has a gas inlet (46) which is adapted to permit the ambient gas to flow through the second chamber (44) so as to entrain and remove at least some of the particulate from the second chamber (44) through the exit (48) when the second chamber (44) is operatively connected to the vacuum source.

22. The build box (120) of claim 21, further comprising a particulate outflow restrictor (136) which is which is in fluid communication with the gas flow inlet (46).

23. The build box (120) of claim 17, further comprising a plug (166) adapted to selectively close one of the through-holes (40) of the plurality of through-holes (40).

24. The build box (120) of claim 23, wherein the plug (166) is adapted to threadingly engage at least one of the through-holes (40) of the plurality of through-holes (40).

25. The build box (120) of claim 17, further comprising a plurality of plugs (166), wherein each of the plurality of plugs (166) is adapted to selectively close one of the through-holes (40) of the plurality of through-holes (40).

26. The build box (120) of claim 17, further comprising a strip (170) adapted to removably attach to the partition (38) so as to selectively close at least two through-holes (40) of the plurality of through-holes (40).

27. The build box (120) of claim 17, wherein the partition (38) has a bottom wall (152) and a pair of sidewalls (154, 156), wherein the plurality of holes (40) is located in the bottom wall (152) and each of the sidewalls (154, 156) angles away from the bottom wall (152) at an angle in the range of 5 to 90 degrees.

28. The build box (120) of claim 17, wherein the trough (30) has a vertical wall (32) and the partition (38) has a sidewall (156), wherein at least a portion of the sidewall (156) is adapted to be parallel to the vertical wall (32).

AMENDED CLAIMS
received by the International Bureau on 25 September 2015 (25.09.2015).

What is claimed is:

1-28 (cancelled).

29. A three-dimensional printing apparatus (140) adapted for building articles from a particulate comprising a work table (100) and an excess-particulate receiving trough (30) having an open top (36) and disposed within the work table (100), the trough (108a) comprising a chamber defined by a plurality of sides (32), a bottom (34), and the open top (36), a partition (70) having a semi-hyperbolic longitudinal profile, a gas inlet (46), and a gas outlet (48) wherein the partition (70) is disposed longitudinally within the chamber proximal to the bottom (34) thereby dividing the chamber into an upper chamber (42) and a lower chamber (44), the gas outlet (48) is disposed at a first end of the lower chamber (44), the gas inlet (46) is disposed at a second end of the lower chamber (44), the partition (70) has a plurality of through-holes (40) adapted to permit gas flow and particulate flow from the upper chamber (42) into the lower chamber (44), and the gas outlet (48) is adapted to be connected to a vacuum source.

30. The three-dimensional printing apparatus (140) of claim 29 further comprising a plug (166) adapted to removably attach to the partition (70) so as to selectively close one of the through-holes (40) of the plurality of through-holes (40).

31. The three-dimensional printing apparatus (140) of claim 29 further comprising a strip (170) adapted to removably attach to the partition (70) so as to selectively close at least two through-holes (40) of the plurality of through-holes (40).

32. The three-dimensional printing apparatus (140) of claim 29 further comprising a particulate outflow restrictor (136), the particulate outflow restrictor (146) being in fluid communication with the gas inlet (46) and the lower chamber (44).

33. A build box (120) adapted to be removably receivable by a three-dimensional printing apparatus (30) adapted for building articles from particulate, the build box (120) comprising a build cavity (126) and an excess-particulate receiving trough (132a) disposed adjacent to the

build cavity (126), the trough (132a) comprising a chamber defined by a plurality of sides (32), a bottom (34), and the open top (36), a partition (70) having a semi-hyperbolic longitudinal profile, a gas inlet (46), and a gas outlet (48), wherein the partition (70) is disposed longitudinally within the chamber proximal to the bottom (34) thereby dividing the chamber into an upper chamber (42) and a lower chamber (44), the gas outlet (48) is disposed at a first end of the lower chamber (44), the gas inlet (46) is disposed at a second end of the lower chamber (44), the partition (70) has a plurality of through-holes (40) adapted to permit gas flow and particulate flow from the upper chamber (42) into the lower chamber (44), and the gas outlet (48) is adapted to be connected to a vacuum source.

34. The build box (120) of claim 33 further comprising a plug (166) adapted to removably attach to the partition (70) so as to selectively close one of the through-holes (40) of the plurality of through-holes (40).

35. The build box (120) of claim 33 further comprising a strip (170) adapted to removably attach to the partition (70) so as to selectively close at least two through-holes (40) of the plurality of through-holes (40).

36. The build box (120) of claim 33 further comprising a particulate outflow restrictor (136), the particulate outflow restrictor (146) being in fluid communication with the gas inlet (46) and the lower chamber (44).

FIG. 1A
(Prior Art)

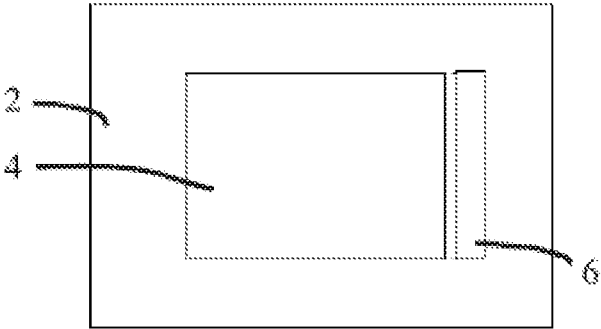


FIG. 1B
(Prior Art)

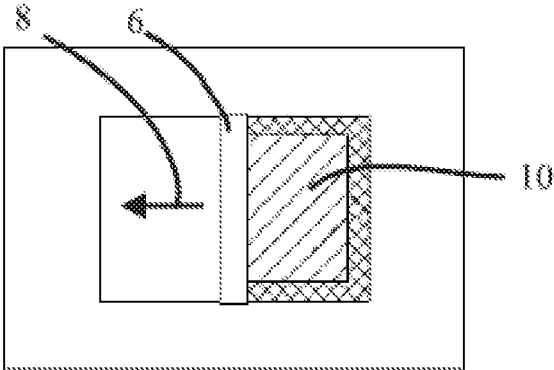


FIG. 1C
(Prior Art)


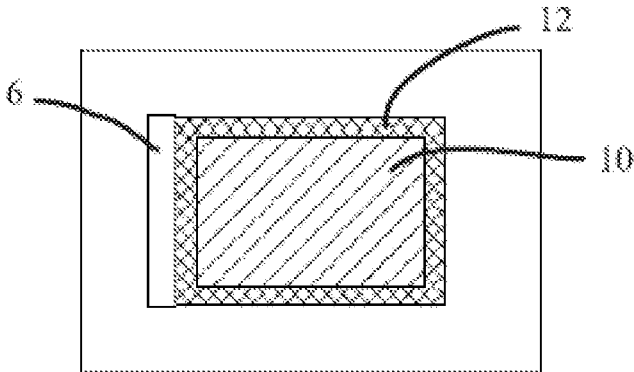


FIG. 1D
(Prior Art)

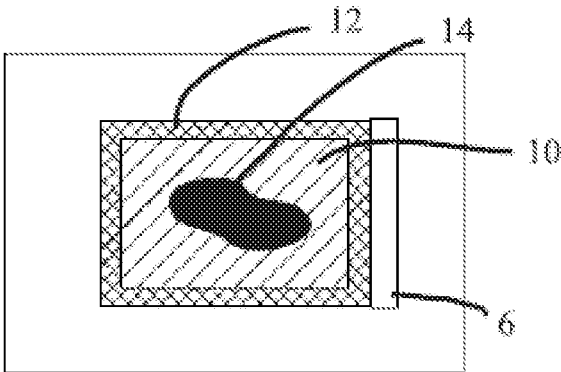

2/7

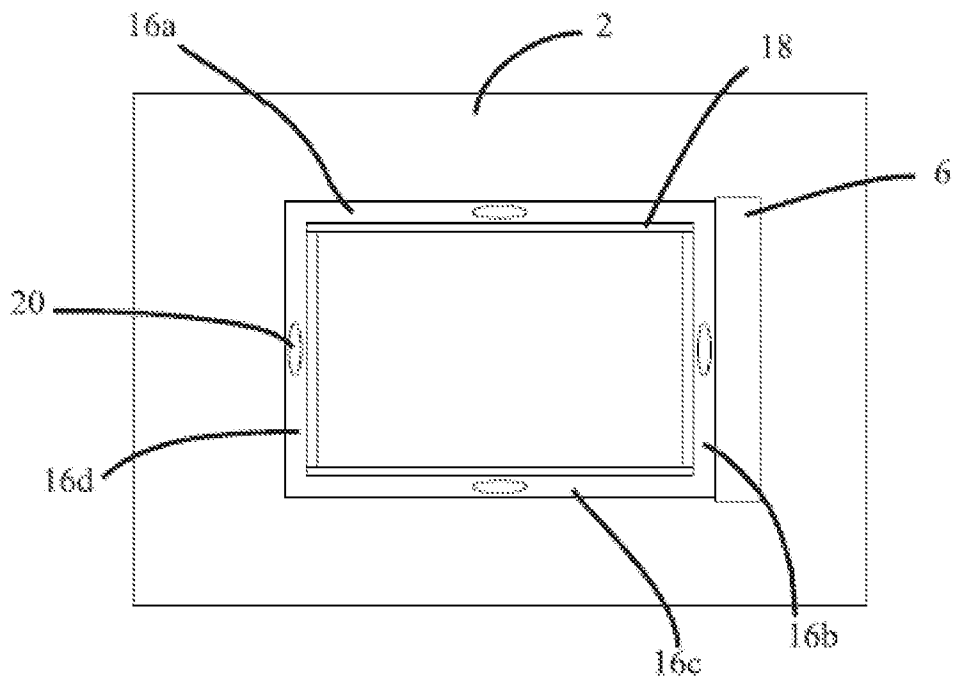


FIG. 2 (Prior Art)

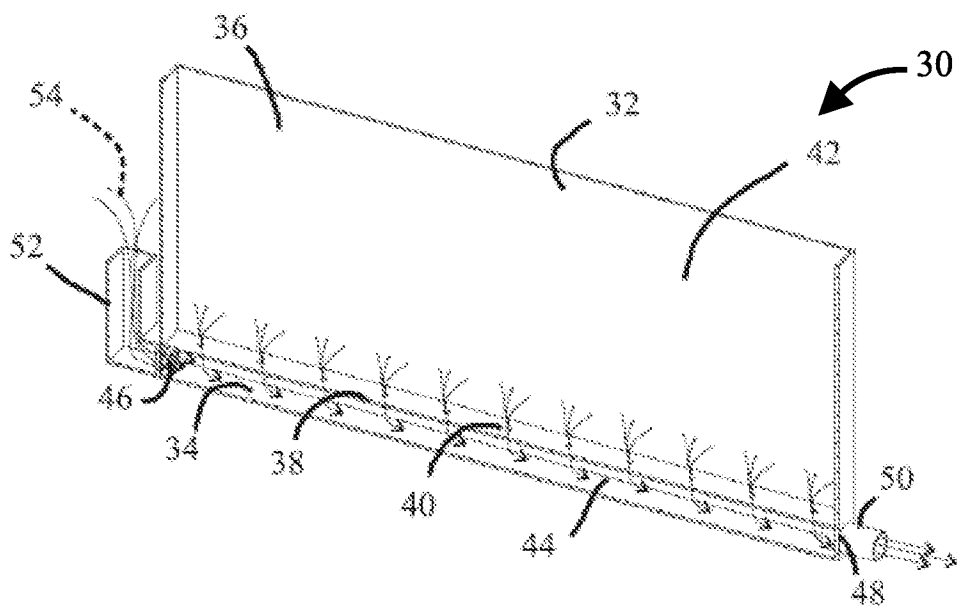


FIG. 3

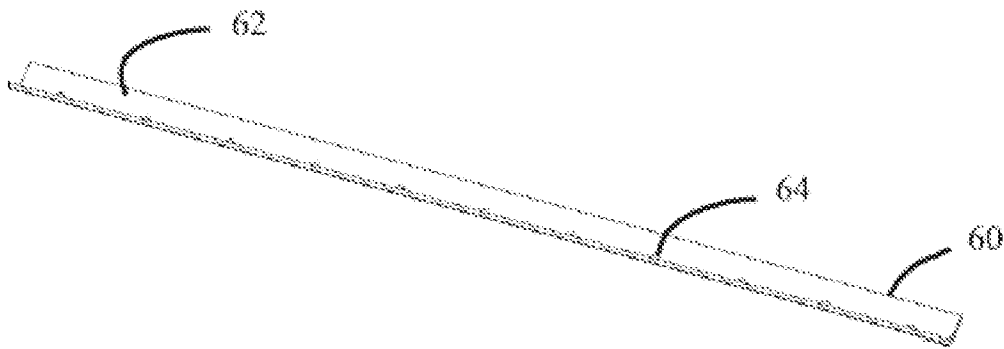


FIG. 4

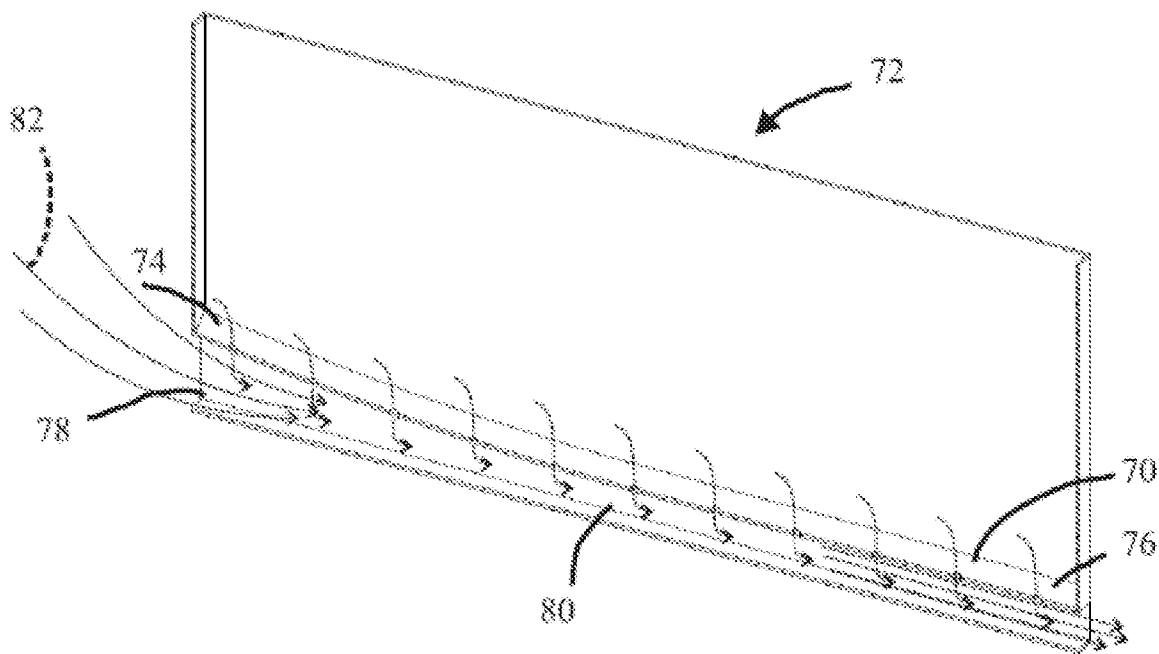


FIG. 5

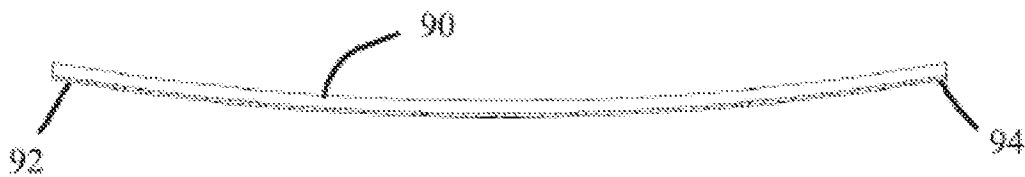


FIG. 6

4/7

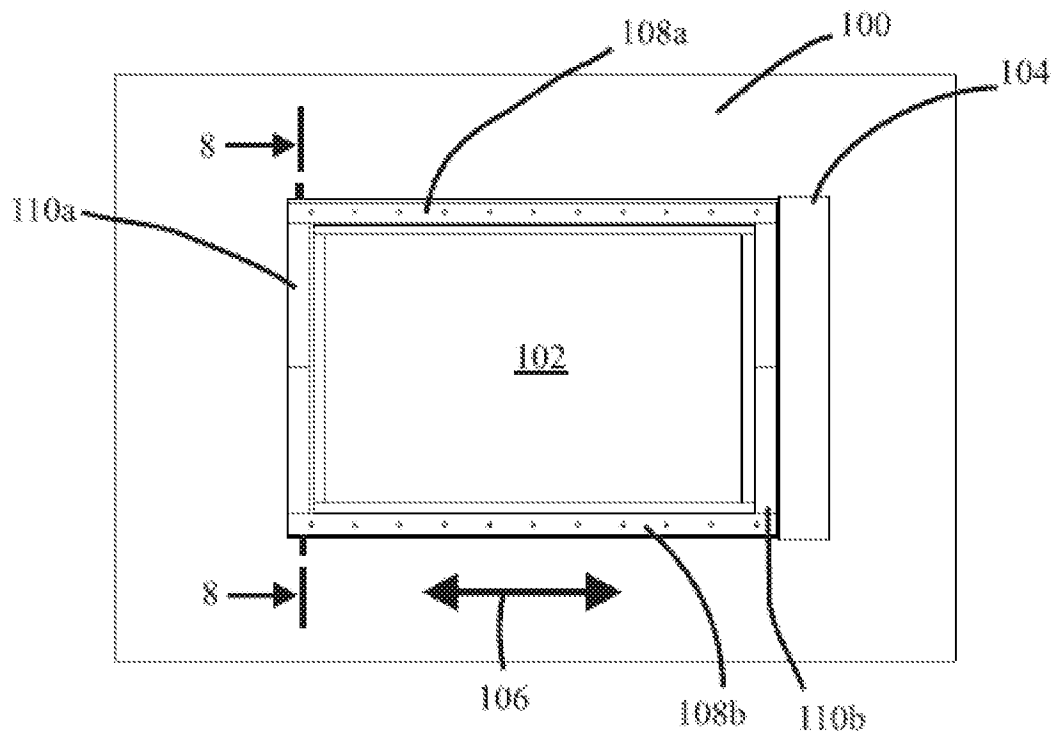


FIG. 7

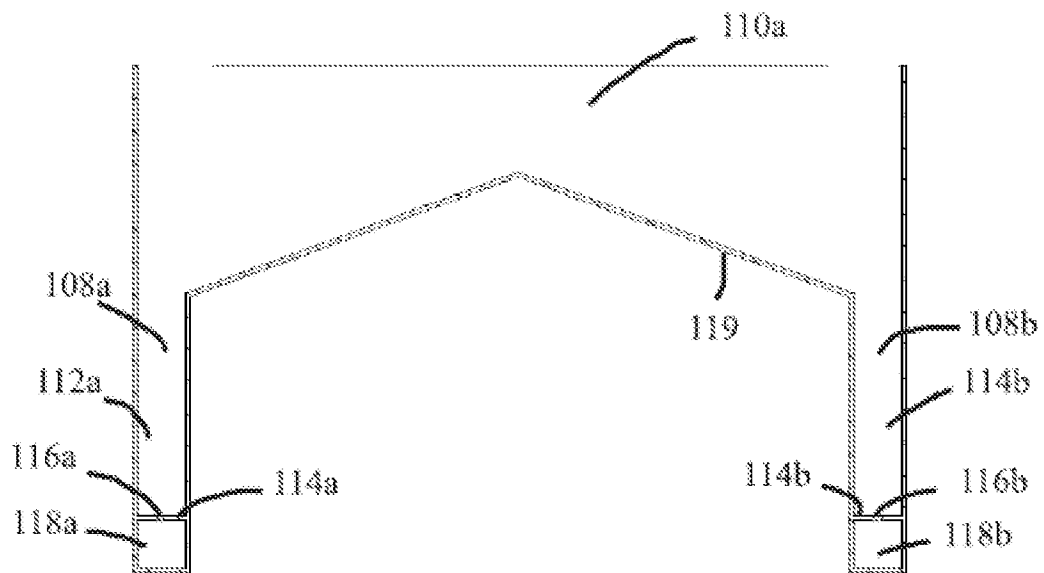


FIG. 8

5/7

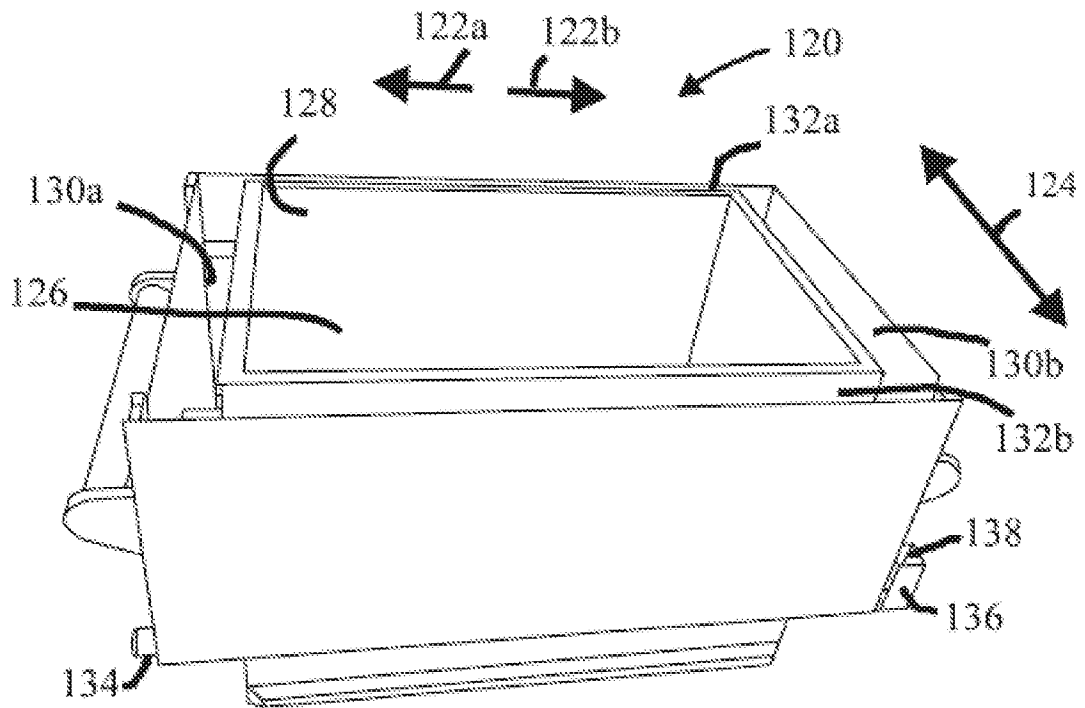


FIG. 9

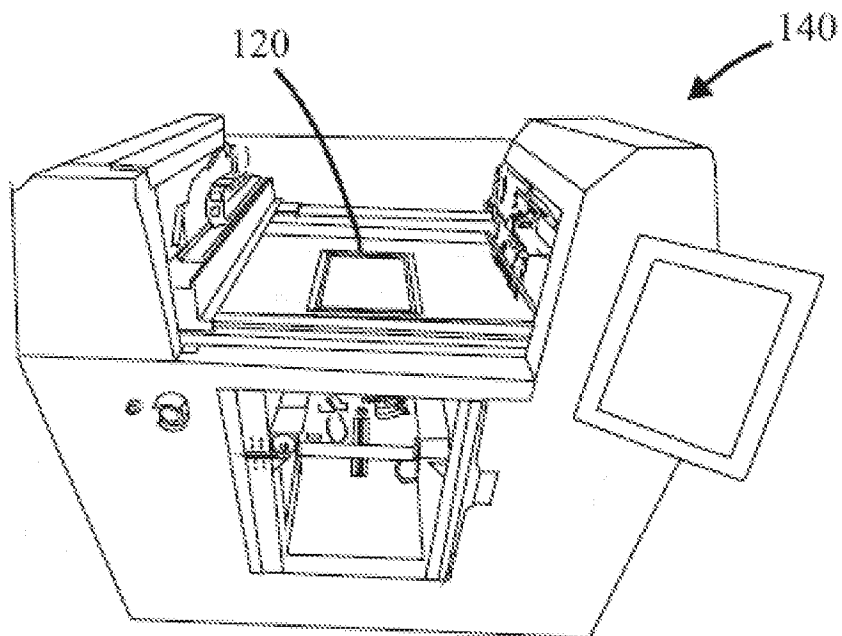


FIG. 10

6/7

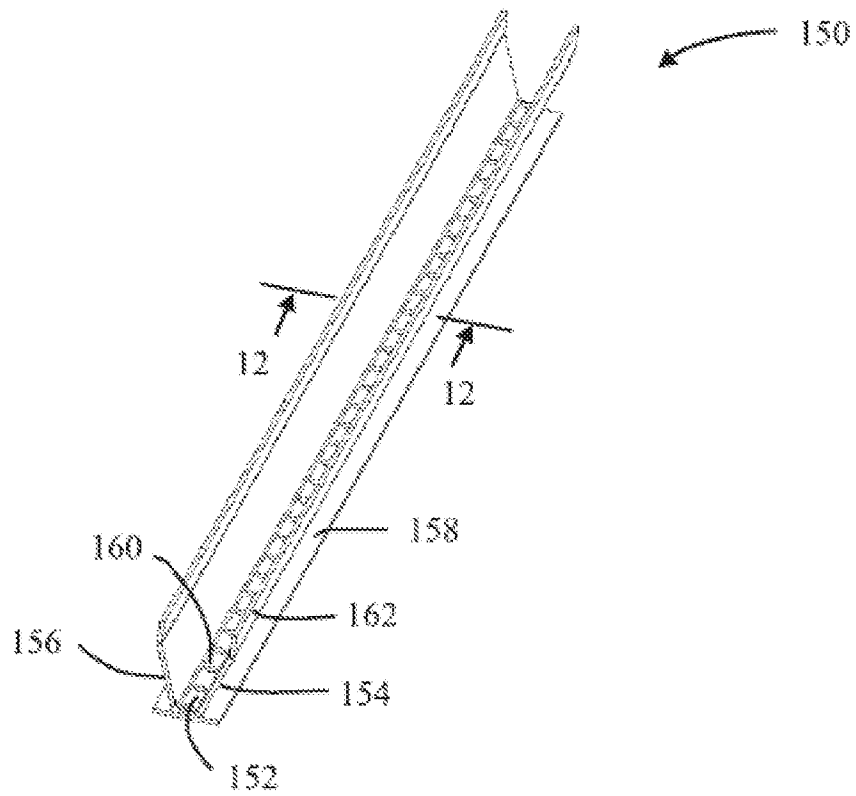


FIG. 11

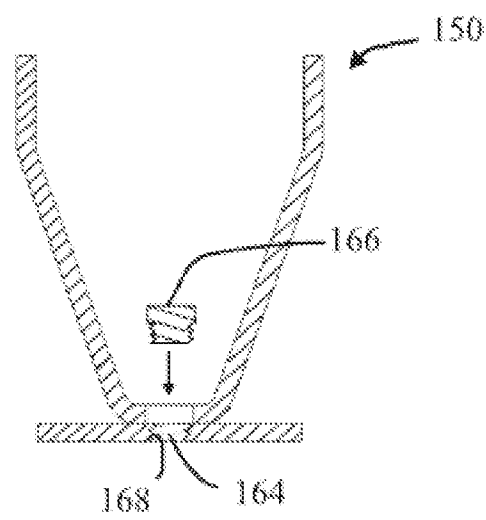


FIG. 12

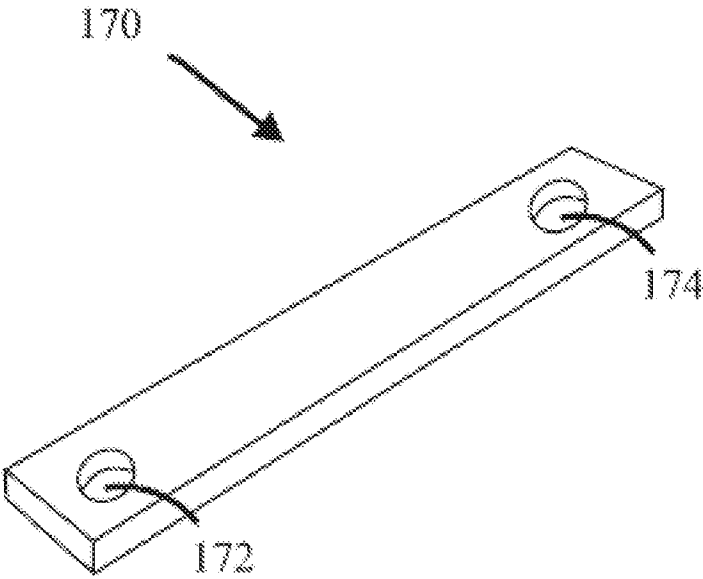


FIG. 13

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 15/29578

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - B41J 2/175 (2015.01)

CPC - B41J 2/16541

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - B41J 2/175 (2015.01)

CPC - B41J 2/16541

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
IPC(8) - B41J 2/175, 2/18, 2/165, B29C 67/00, 67/02, 41/12, 41/36, B05C 11/02, 13/02 (2015.01)

CPC - B41J 2/16541, 2002/14475, B29C 67/0081, 67/0077, 41/36, 41/12, 67/0081 (Search Terms Limited, See Below)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
PatBase, Google Patents, Google Scholar. Search Terms Included: three-dimensional printing apparatus; recovery of excess particulate in a three-dimensional printing apparatus; three-dimensional printing device excess particulate handling; build box for three-dimensional printer; three dimensional OR three-dimensional OR 3D OR 3-D; vacuum OR suction

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008/0241404 A1 (Allaman et al.) 02 October 2008 (02.10.2008), entire document,	1-3, 10
--	especially Fig 1; Claim 1, 17	-----
Y		1, 4, 9, 11-17, 21-28
Y	US 2006/0214335 A1 (Cox) 28 September 2006 (28.09.2006), entire document, especially Fig 5, 8; para [0046], [0051]-[0052], [0061]	1, 5-8, 17-20
Y	US 419,751 A (Cook) 21 January 1890 (21.01.1890), entire document, especially Fig 1	1, 5-8
Y	US 2012/0052145 A1 (Chen et al.) 01 March 2012 (01.03.2012), entire document, especially Fig 1B, 2A, 2B; para [0008], [0031]	1, 4, 9, 11-17, 27-28
Y	US 2010/0043698 A1 (Bolt) 25 February 2010 (25.02.2010), entire document, especially Fig 1-3	4, 17-28
Y	US 2012/0308332 A1 (Jackson) 06 December 2012 (06.12.2012), entire document, especially Fig 1, 3, 53	11-13, 23-25
Y	US 3,444,973 A (Stone) 01 February 1967 (01.02.1967), entire document, especially Fig 1-2	14, 26
A	US 6,007,318 A (Russell et al.) 28 December 1999 (28.12.1999), entire document	1, 17
A	US 2014/0065194 A1 (Yoo et al.) 06 March 2014 (06.03.2014), entire document	1, 17
A	US 2013/0321540 A1 (Plat et al.) 05 December 2013 (05.12.2013), entire document	1, 17
A	US 2008/0006334 A1 (Davidson et al.) 10 January 2008 (10.01.2008), entire document	1, 17

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
08 July 2015 (08.07.2015)

Date of mailing of the international search report

28 JUL 2015

Name and mailing address of the ISA/US
Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450
Facsimile No. 571-273-8300

Authorized officer:
Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774