



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2188643 C 2003/08/26

(11)(21) 2 188 643

(12) BREVET CANADIEN
CANADIAN PATENT

(13) C

(22) Date de dépôt/Filing Date: 1996/10/23

(41) Mise à la disp. pub./Open to Public Insp.: 1998/04/23

(45) Date de délivrance/Issue Date: 2003/08/26

(51) Cl.Int.⁶/Int.Cl.⁶ A45B 17/00, A45B 23/00, A45B 11/00


(72) Inventeur/Inventor:
SALIVA, FORTUNATO, IT

(73) Propriétaire/Owner:
F.I.M. S.R.L., IT

(74) Agent: SHAPIRO COHEN


(54) Titre : OMBRELLE SUSPENDUE REGLABLE

(54) Title: AN ADJUSTABLE HANGING SUNSHADE UMBRELLA

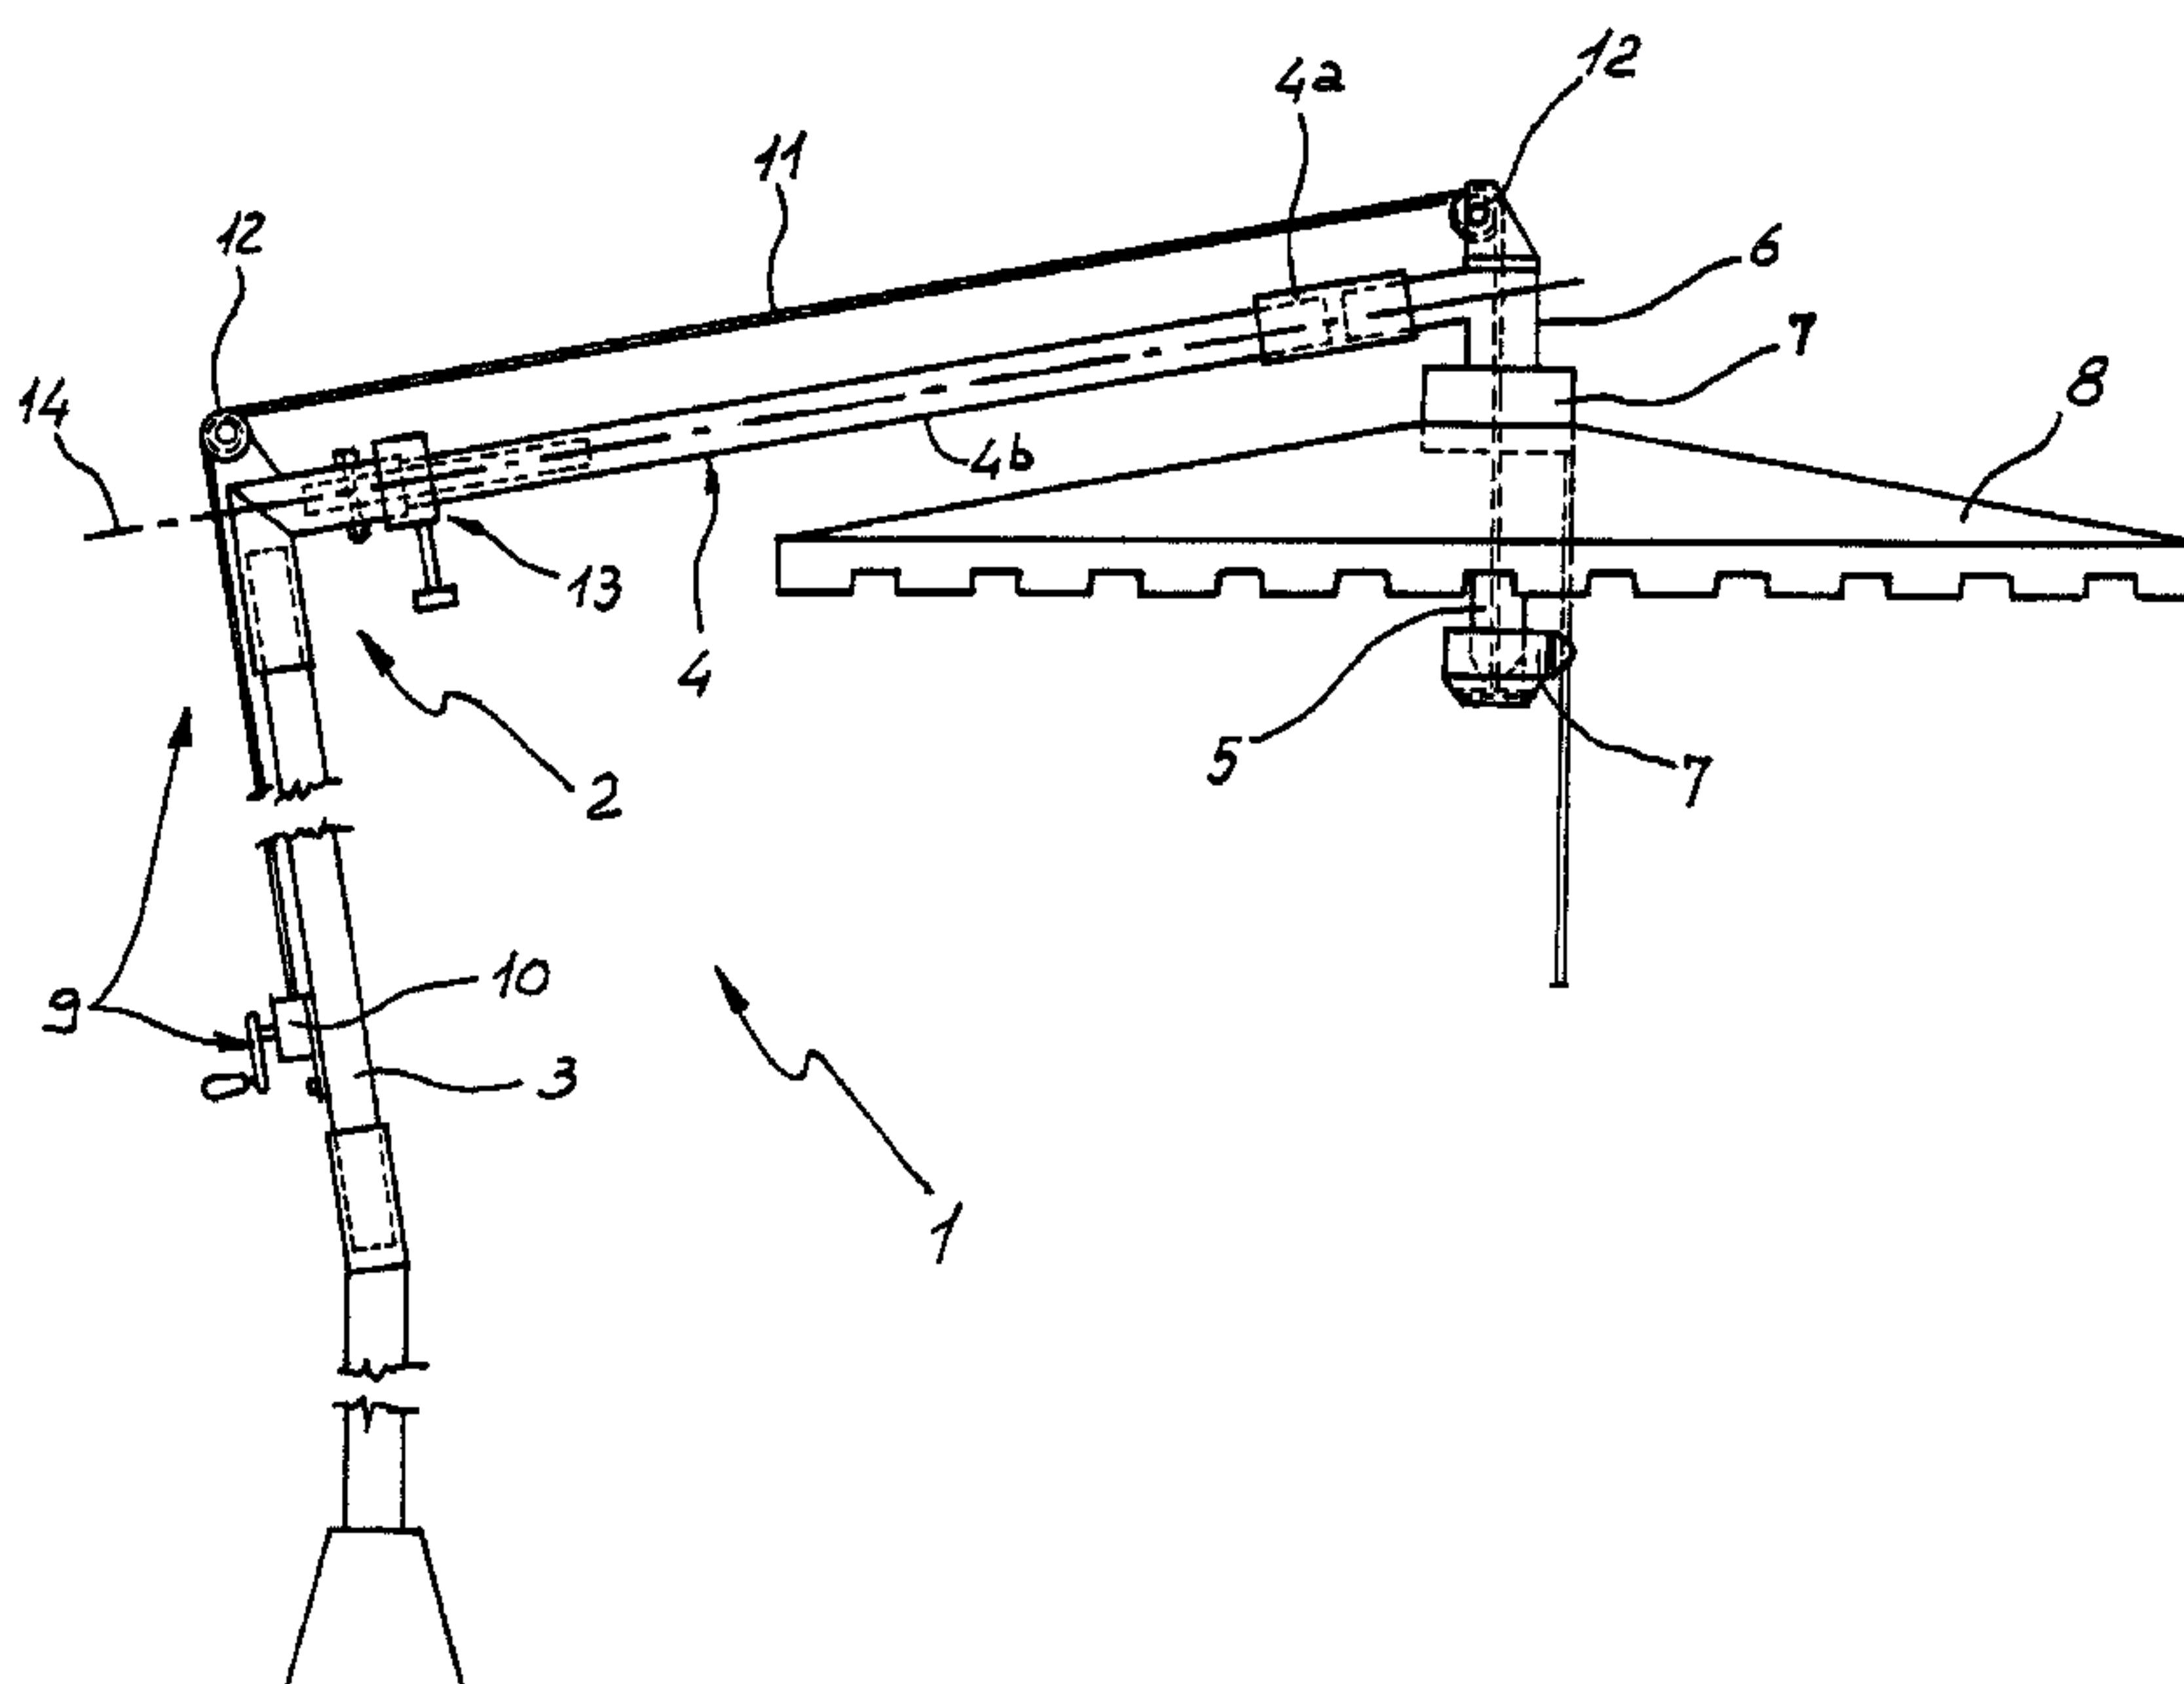

(57) Abrégé/Abstract:

An adjustable hanging sunshade umbrella is provided which comprises a side standard, a transverse arm joined to the side standard in cantilevered fashion, a central rod, support and operation means for a protective covering connected to the central rod, and a position-adjusting device adapted to cause rotation of the central rod relative to the axis of the transverse arm and lock it to the desired inclination of the protective covering.

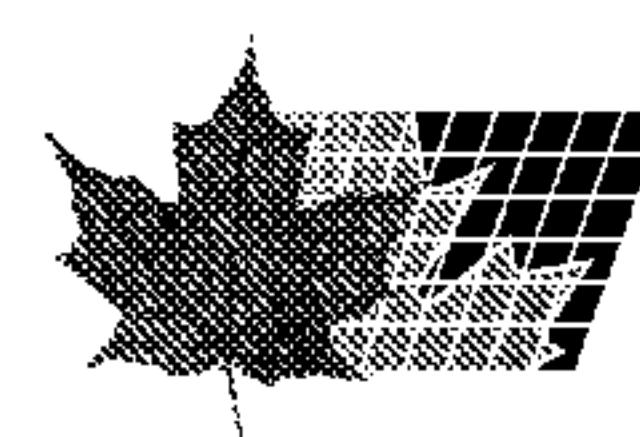

A B S T R A C T

An adjustable hanging sunshade umbrella is provided which comprises a side standard, a transverse arm joined 5 to the side standard in cantilevered fashion, a central rod, support and operation means for a protective covering connected to the central rod, and a position-adjusting device adapted to cause rotation of the central rod relative to the axis of the transverse arm 10 and lock it to the desired inclination of the protective covering.

AN ADJUSTABLE HANGING SUNSHADE UMBRELLA

The present invention relates to an adjustable hanging sunshade umbrella of the type comprising a side standard and a transverse arm joined to the side standard in cantilevered fashion.

It is known that some types of hanging sunshade umbrellas comprise an asymmetric bearing structure made up of a side standard to be fastened to the ground and a transverse arm joined to the side standard in cantilevered fashion and generally having a rectilinear longitudinal-extension direction.

Connected to the free end portion of the transverse arm is a centre rod to which, in turn, support and operation means for a protective covering is connected. Said means usually comprises a ring to which radial support ribs are connected and a slider engaging radial operating rods active on the support ribs for closing and opening said protective covering.

In the known art hanging sunshade umbrellas briefly described above can be made adjustable by interposing an articulated joint, a ball-and-socket joint for example, between the central rod and the transverse arm. While this technical solution enables the protective covering to be inclined in all directions, it however has some limits and drawbacks.

30

In fact, first of all, it involves some complexity of operation, because when the two necessary functions for adjustment of the protective covering, that is displacement of the central rod and locking of same to the desired position, are to be carried out, the use of both hands of an individual or the presence of two individuals is needed, which is not very practical.

In addition, sometimes locking of the articulated joint between the central rod and transverse arm does not fully ensure a good stability and safety, above all in some occurrences such as arising of sudden gusts of wind 5 because, as is known, articulated joints require very high frictional forces, which cannot be always obtained, in order to lock them.

Finally, according to the known art when adjustment of 10 hanging sunshade umbrellas is to be done, a manual intervention at the central area of the protective covering is required, which area is generally of difficult access and operation because it is often occupied by people, tables, chairs and other objects for 15 which the umbrella is intended and on which it performs its specific protective function.

Under this situation, the technical task underlying the present invention is to devise an adjustable hanging 20 sunshade umbrella capable of substantially obviating the above-mentioned drawbacks.

Within the scope of this technical task, it is an important aim of the invention to devise an adjustable 25 hanging sunshade umbrella of easy and quick operation, which is steady at every position and settlement, and can be modified as to its setting without being it necessary to accede to the area underlying the protective covering.

30

The technical task mentioned and the aim specified are substantially achieved by an adjustable hanging sunshade umbrella characterized in that it comprises a position-adjusting device adapted to cause rotation of said 35 central rod about a direction-adjusting axis substantially coincident with said longitudinal direction of the transverse arm until achievement of an angular position corresponding to a desired inclination

of said protective covering and to lock said central rod to said desired angular position.

In a first embodiment, the present invention provides an
5 adjustable handing sunshade umbrella of the type comprising:

- a support structure provided with a side standard and a transverse arm joined to the side standard in cantilevered fashion and having a substantially rectilinear longitudinal-extension direction,

10 - a central rod connected to a first end portion of said transverse arm, and

- support and operation means for a protective covering connected to said central rod, characterized in that the support and operation means comprises:

15 - a position-adjusting device adapted to cause rotation of said central rod about a direction-adjusting axis substantially coincident with said longitudinal direction of the transverse arm until achievement of an angular position corresponding to a desired inclination of said protective
20 covering and to lock said central rod to said desired angular position.

The description of a preferred embodiment of an adjustable hanging sunshade umbrella in accordance with the invention is
25 now given hereinafter by way of non-limiting example, with the aid of the accompanying drawings, in which:

- Fig. 1 is a side view of the inventive adjustable hanging sunshade umbrella;

- Fig. 2 is an exploded perspective view of a position-adjusting device included in the sunshade umbrella of Fig. 1;

- Fig. 3 highlights a longitudinal section of the device in Fig. 2; and

- Fig. 4 is a sectional view taken along line IV-IV in Fig. 3.

With reference to the drawings, the adjustable hanging sunshade umbrella in accordance with the invention has been
5 generally identified by reference numeral 1.

It comprises a bearing structure 2 formed of a side standard 3 and a transverse arm 4 joined to the standard 3 in cantilevered fashion and having a substantially rectilinear
10 longitudinal-extension direction.

The transverse arm 4 comprises a first end portion 4a spaced apart from the side standard 3 and to which a central rod 5 is connected, upon interposition of an angled attachment element
15 6.

Connected to the central rod 5 is support and operation means 7 for a protective covering 8, which means is, in turn, operable by a driving apparatus 9 for opening and closing the
20 protective covering. Said apparatus comprises a crank winder 10, a cable 11, and idle pulleys 12, all of a conventional type known per se.

In an original manner, the sunshade umbrella 1 comprises a position-adjusting device 13 adapted to cause the central rod 5 to rotate about a direction-adjusting axis 14 coincident with the longitudinal-extension direction 5 of the transverse arm 4, so that said central rod 5 may be disposed at an angular position corresponding to the desired inclination of the protective covering 8. The position-adjusting device 13 is also capable of locking the central rod 5 to the desired angular position.

10

More particularly, the position-adjusting device 13 comprises a support and guide pin 15 defining the direction-adjusting axis 14 by its longitudinal axis and having an end portion 15a fixedly connected to the side 15 standard 3 by fastening means 16 adapted to make the pin 15 itself integral with said standard thereby preventing any rotation thereof.

The fastening means 16 in turn comprises an attachment 20 portion 17 of the transverse arm 4 integral with the side standard 3 and defined, like the whole transverse arm, by a tubular element of substantially square section. The end portion 15a of the pin 15 is fitted into the attachment portion 17 and is positioned in the 25 middle of the latter by means of a pair of holed blocks for example comprising a first cylindrical block 18a and a second block 18b of square section, both conveniently sized.

30 A first screw 19 fixes the first block 18a to the pin 15 and a bolt passes through the attachment portion 17, the second block 18a and the pin 15, so that ultimately the pin 15 is made integral with the side standard 3.

35 Preferably, the second block 18b has an expansion 18c of the same shape as the outer contour of the attachment section 17, so that it behaves like a plug closing said attachment portion.

The support pin 15 emerges from the attachment portion 17 and practically defines an articulation-guiding shaft for a main portion 4b of the transverse arm 4 to which the first end portion 4a is connected. The main portion 5 4b is therefore in alignment with the attachment portion 17 and advantageously has a transverse section of a substantially square tubular configuration, like said attachment portion 17.

10 Interposed between the main portion 4b and the pin 5 is coupling means 21a and 21b adapted to define rotatory coupling elements between said main portion 4b and pin 15. The rotatory coupling elements 21a and 21b are for example comprised of a first sleeve 21a of cylindrical 15 conformation, sliding within the main portion 4b, fixed to the pin 15 by means of a second screw 22, and a second sleeve 21b of an external square contour sliding on the pin 15 and fixed to the main portion 4b by a third screw 23 as well as by its own outer surface 20 preventing any rotation with respect to the main portion of the transverse arm 4.

The above-mentioned main portion can be fixedly hold against rotation in respect of the pin 15, and therefore 25 the direction-adjusting axis 14, by a locking element 24 comprising a clamping portion 24a. Integral with said clamping portion is a connection portion the shape of which matches the shape of a square-section cavity of a second end portion 4c of the end arm 4, opposed to the 30 first end portion 4a. Said connection portion of the locking element 24 is advantageously defined by the above-mentioned second sleeve 21b embodying a rotatory coupling element together with the pin 15, and is therefore fitted into the cavity formed in the second 35 end portion 4c. The clamping portion 24a has a transverse section of greater area than the connection portion 21b so that it can abut against the second end portion 4c in side by side relationship therewith and be

therefore located externally of the cavity of said portion 4c in contact with the expansion 18c of the block 18b fitted in the attachment portion 17. Finally, a driving screw 25 is provided which is capable of 5 moving the two jaws of the clamping portion 24a close to and away from each other.

The driving screw 25 has a head 25a projecting from the clamping portion 24a and suitable for coupling with a 10 driving wrench 26 provided with a handgrip 26a adapted to cause rotation both of the driving screw 25 along its own axis and the locking element 24 about the pin 15.

Operation of the position-adjusting device for a hanging 15 sunshine umbrella described above mainly as regards structure is as follows.

By acting on the handgrip 26a of the driving wrench 26, closure of the clamping portion 24a is first loosened 20 until said portion is disengaged from pin 15 to a sufficient extent so as to enable rotation of the locking element about the axis of the pin 15 itself. Once the loosening step is over, rotation of the locking element 24 is caused, still acting on the handgrip 26a, 25 and therefore of the transverse arm 4 and central rod too, which are connected to said locking element, until the desired inclination of the protective covering 8 is achieved.

30 Subsequently, by turning the driving wrench 26, the jaws of the clamping portion 24a are closed and consequently the locking element 24, transverse arm 4 and central rod 5 are fixedly stopped to the desired angular position.

35 The invention achieves important advantages.

First of all, the hanging sunshade umbrella in accordance with the invention enables a quick and very

easy adjustment of its position because the use of one hand alone is sufficient for performing both the operation involving rotation of the protective covering and the operation for locking and unlocking the 5 transverse arm to the desired angular position.

In addition, the position-adjusting operation is carried out by an operator located close to the side standard, without his being obliged to accede to the area 10 underlying the protective covering.

Finally, the position-adjusting device in accordance with the invention enables the protective covering to be locked in a steady and safe manner to the desired 15 inclination because the clamping closure of the locking element of a cylindrical conformation provided therein allows a high frictional force to be exerted on the support pin, of an amount capable of holding the transverse arm of the sunshine umbrella against 20 accidental rotations.

It will be moreover recognized that the particular embodiment shown is also advantageous in its most specific aspects. Many modifications and variations can 25 be made to the invention, all of them falling within the scope of the inventive idea. In addition, all of the details may be replaced by technically equivalent elements. In carrying out the invention practically, the materials, shapes and sizes can be of any nature and 30 magnitude, in accordance with requirements.

179P174CA

- 8 -

What is claimed is:

1. An adjustable hanging sunshade umbrella of the type comprising:
 - 5 - a support structure provided with a side standard and a transverse arm joined to the side standard in cantilevered fashion and having a substantially rectilinear longitudinal-extension direction,
 - a central rod connected to a first end portion of said transverse arm, and
 - 10 - support and operation means for a protective covering connected to said central rod, characterized in that the support and operation means comprises:
 - a position-adjusting device adapted to cause rotation of said central rod about a direction-adjusting axis substantially coincident with said longitudinal direction of the transverse arm until achievement of an angular position corresponding to a desired inclination of said protective covering and to lock said central rod 20 to said desired angular position.
2. A sunshade umbrella according to claim 1, wherein said position-adjusting device comprises:
 - a support and guide pin defining said direction-adjusting axis and having an end portion connected to said side standard,
 - coupling means between said support and guide pin and at least one main portion of said transverse arm to which said first end portion is connected, and
 - 25 - at least one locking element holding said main portion of the transverse arm against rotation with respect to said direction-adjusting axis.
3. A sunshade umbrella according to claim 2, wherein fastening means is provided for securing the end portion of said support and guide pin to said side standard, which means is adapted to make said pin integral with the side standard itself and to prevent rotation of the former in respect of the latter,

- 9 -

and wherein said coupling means is defined by rotatory coupling elements and said locking element prevents rotation of said main portion of the transverse arm in respect of said pin.

5

4. A sunshade umbrella according to claim 3, wherein said main portion of the transverse arm is defined by a tubular element of substantially square section and wherein said elements for the rotatory coupling with said pin comprise at least two sleeves interposed between said pin and tubular element, said locking element comprising a portion for connection with said main portion of the transverse arm and a portion for clamping said pin.

15

5. A sunshade umbrella according to claim 4, wherein said connection portion of said locking element has a shape matching the shape of the square-section cavity of a second end portion of the transverse arm opposed to said first end portion, said connection portion being fitted in said cavity and said clamping portion being located externally of said cavity in side by side relationship with said second end portion.

25 6. A sunshade umbrella according to claim 5, wherein one of said sleeves interposed between said pin and tubular element is defined by said connection portion of said locking element.

30 7. A sunshade umbrella according to claim 5, wherein provision is made for a driving screw to operate said clamping portion and a driving wrench to be coupled with said driving screw and provided with a handgrip adapted to cause rotation both of the screw itself along its own 35 axis and of said locking element about said pin.


8. A sunshade umbrella according to claim 5, wherein said fastening means for said end portion of said pin

- 10 -

comprises an attachment portion for joining said transverse arm to said side standard in alignment with said main portion, said pin having said end portion fitted in said attachment portion and said clamping portion of the locking element being disposed between 5 said attachment portion and main portion of the transverse arm.

2188643


FIG. 1

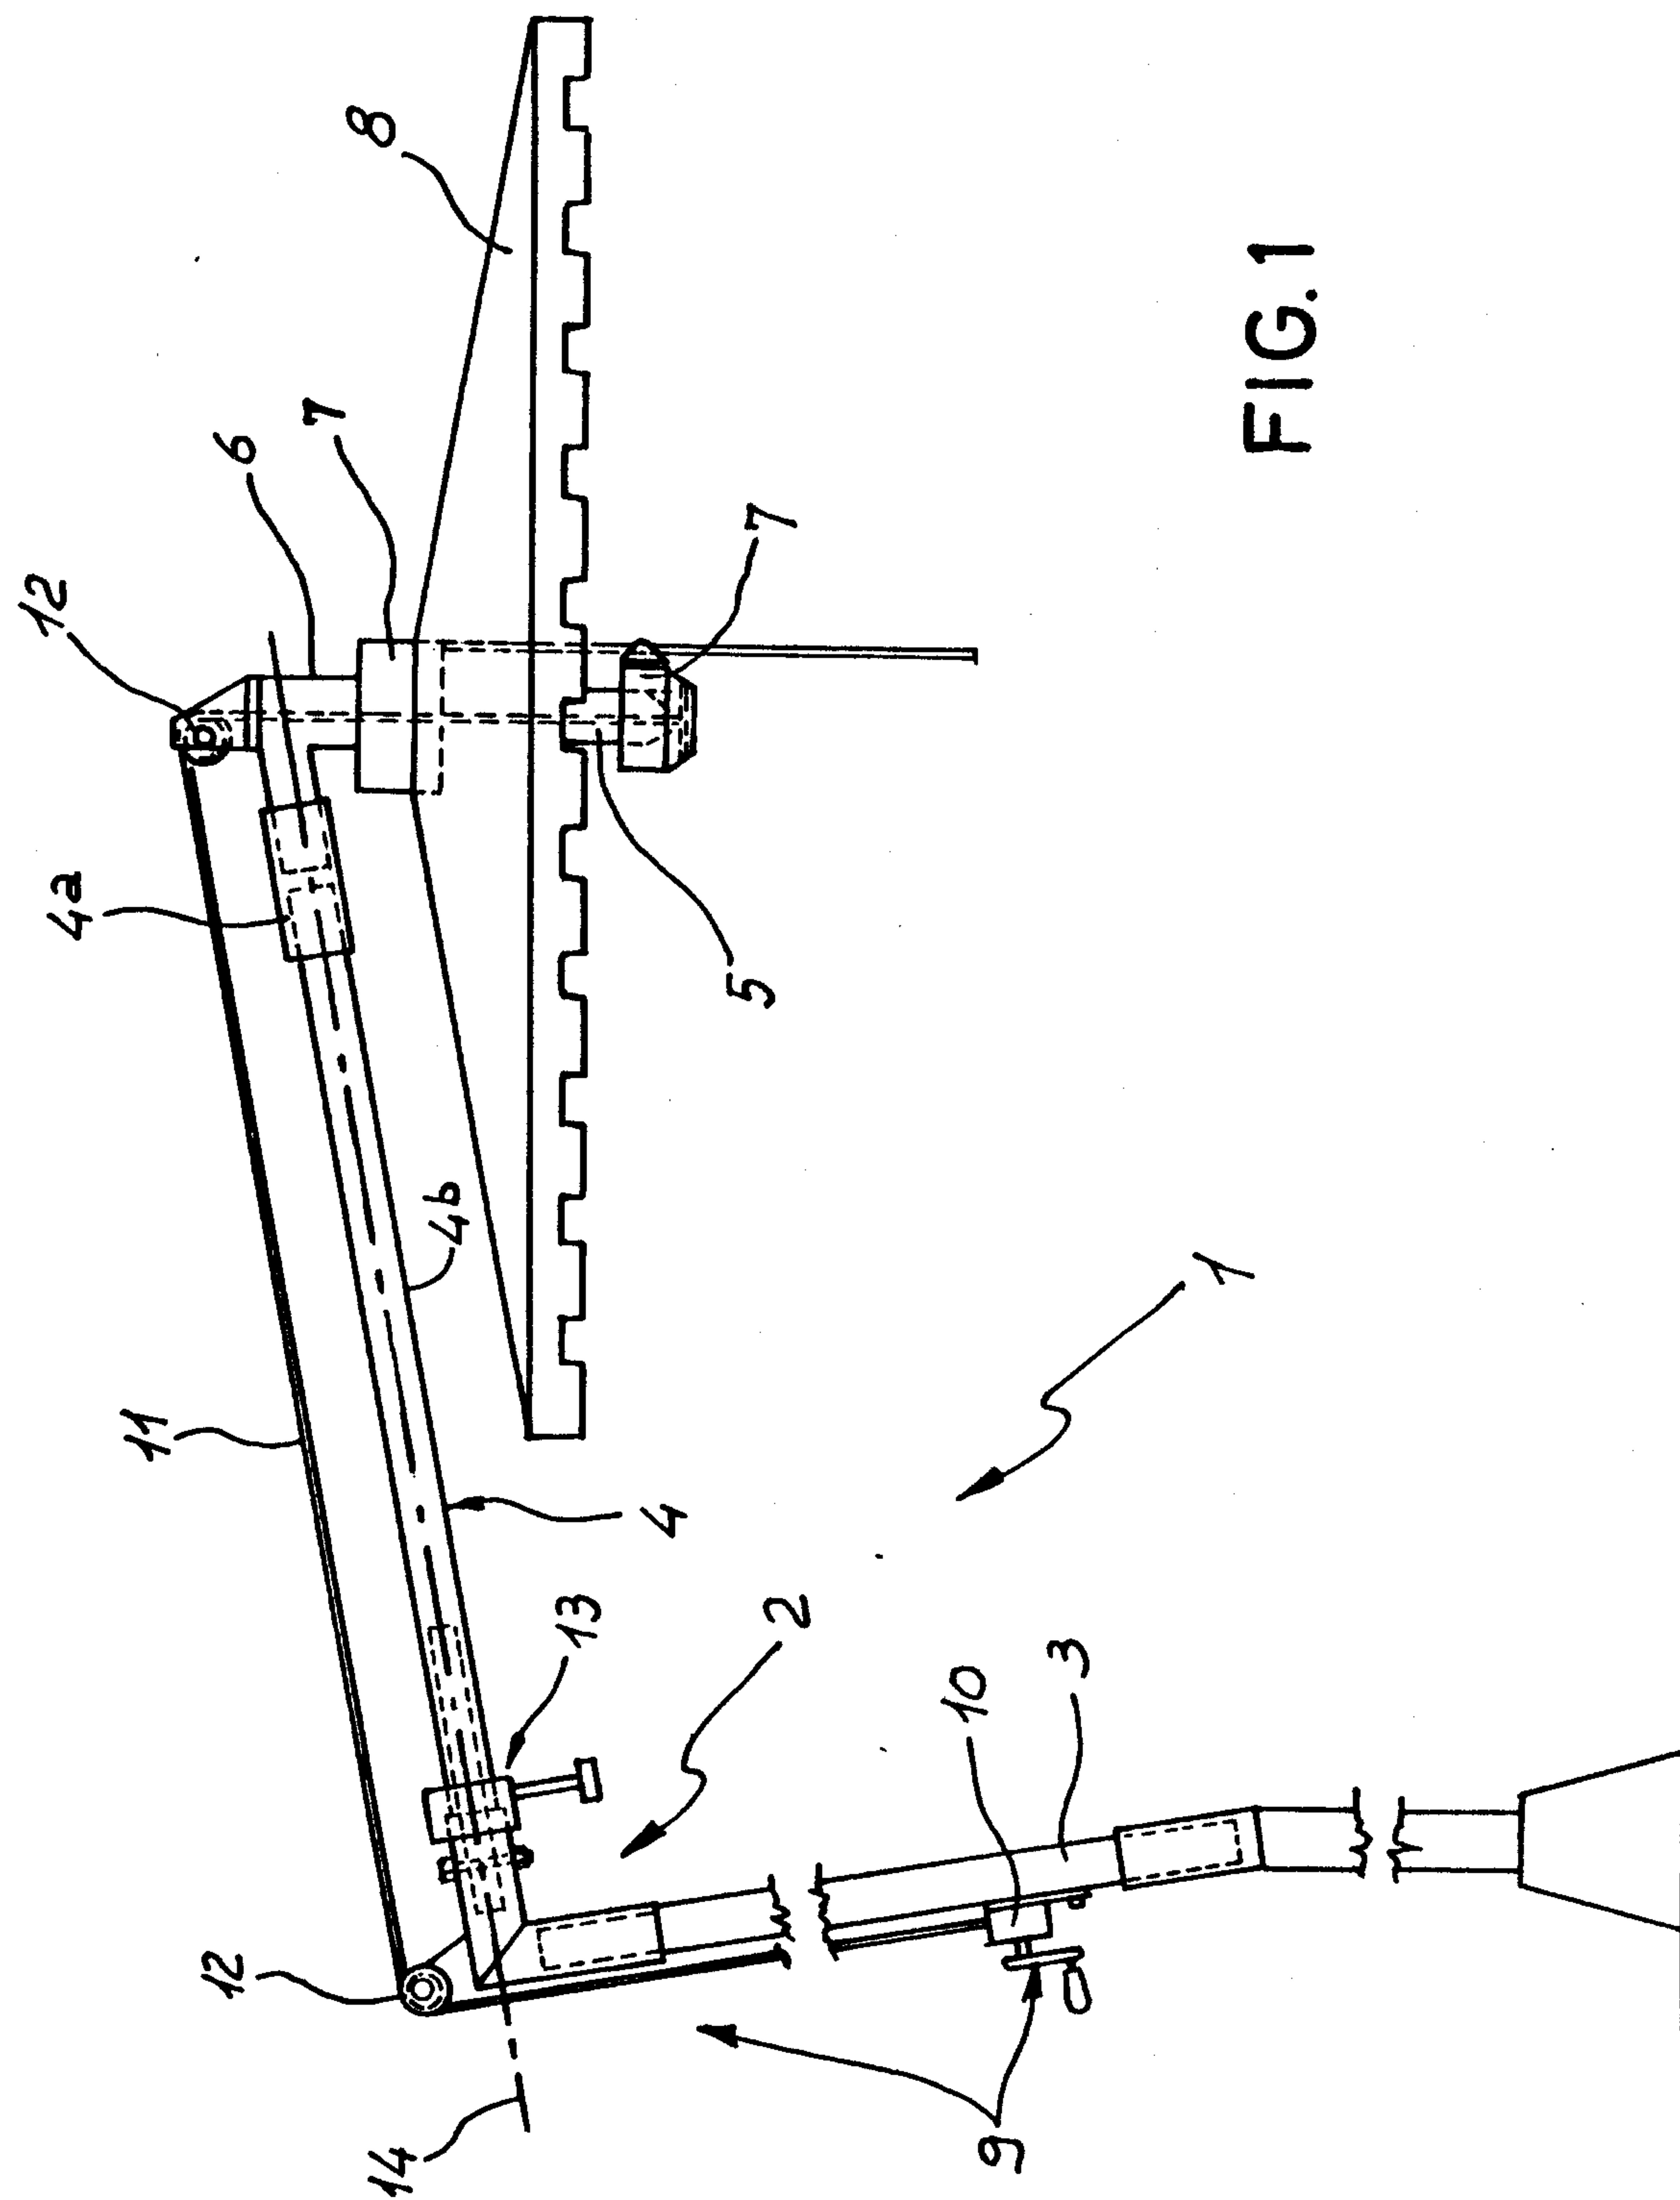

Pascal & Associates
Agent for Applicant

2188643

२

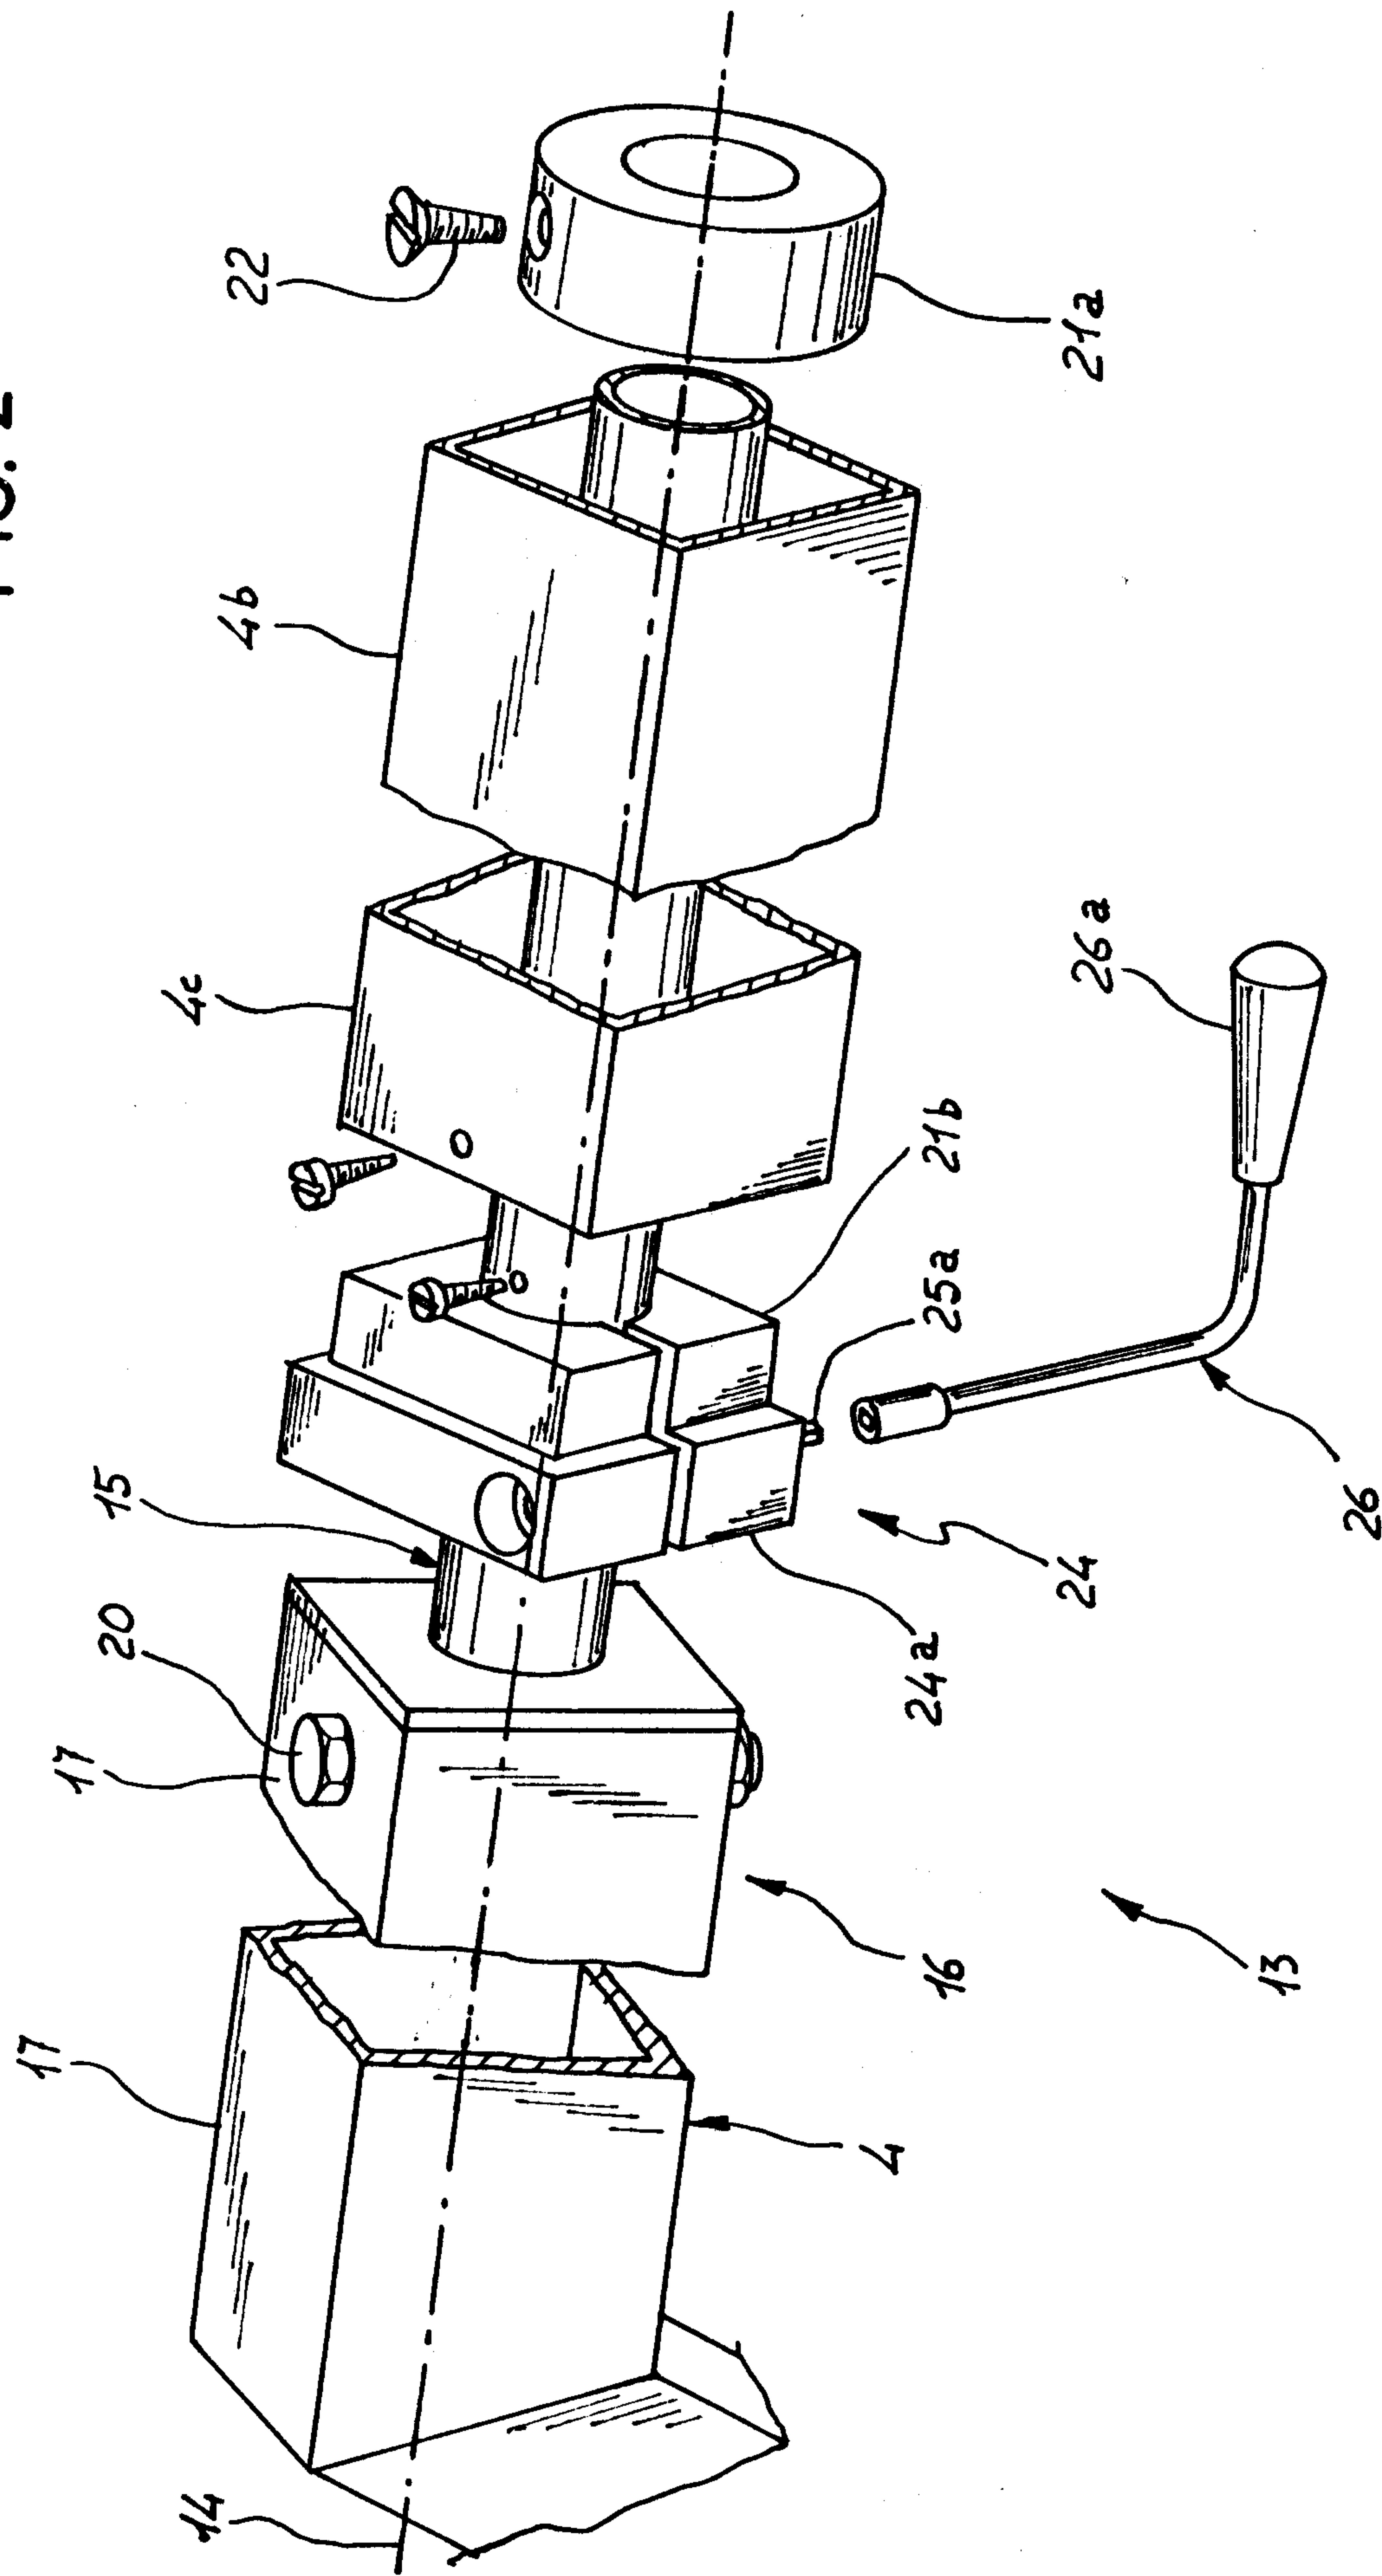

Rascal + Associates
Agent for Applicant

2188643

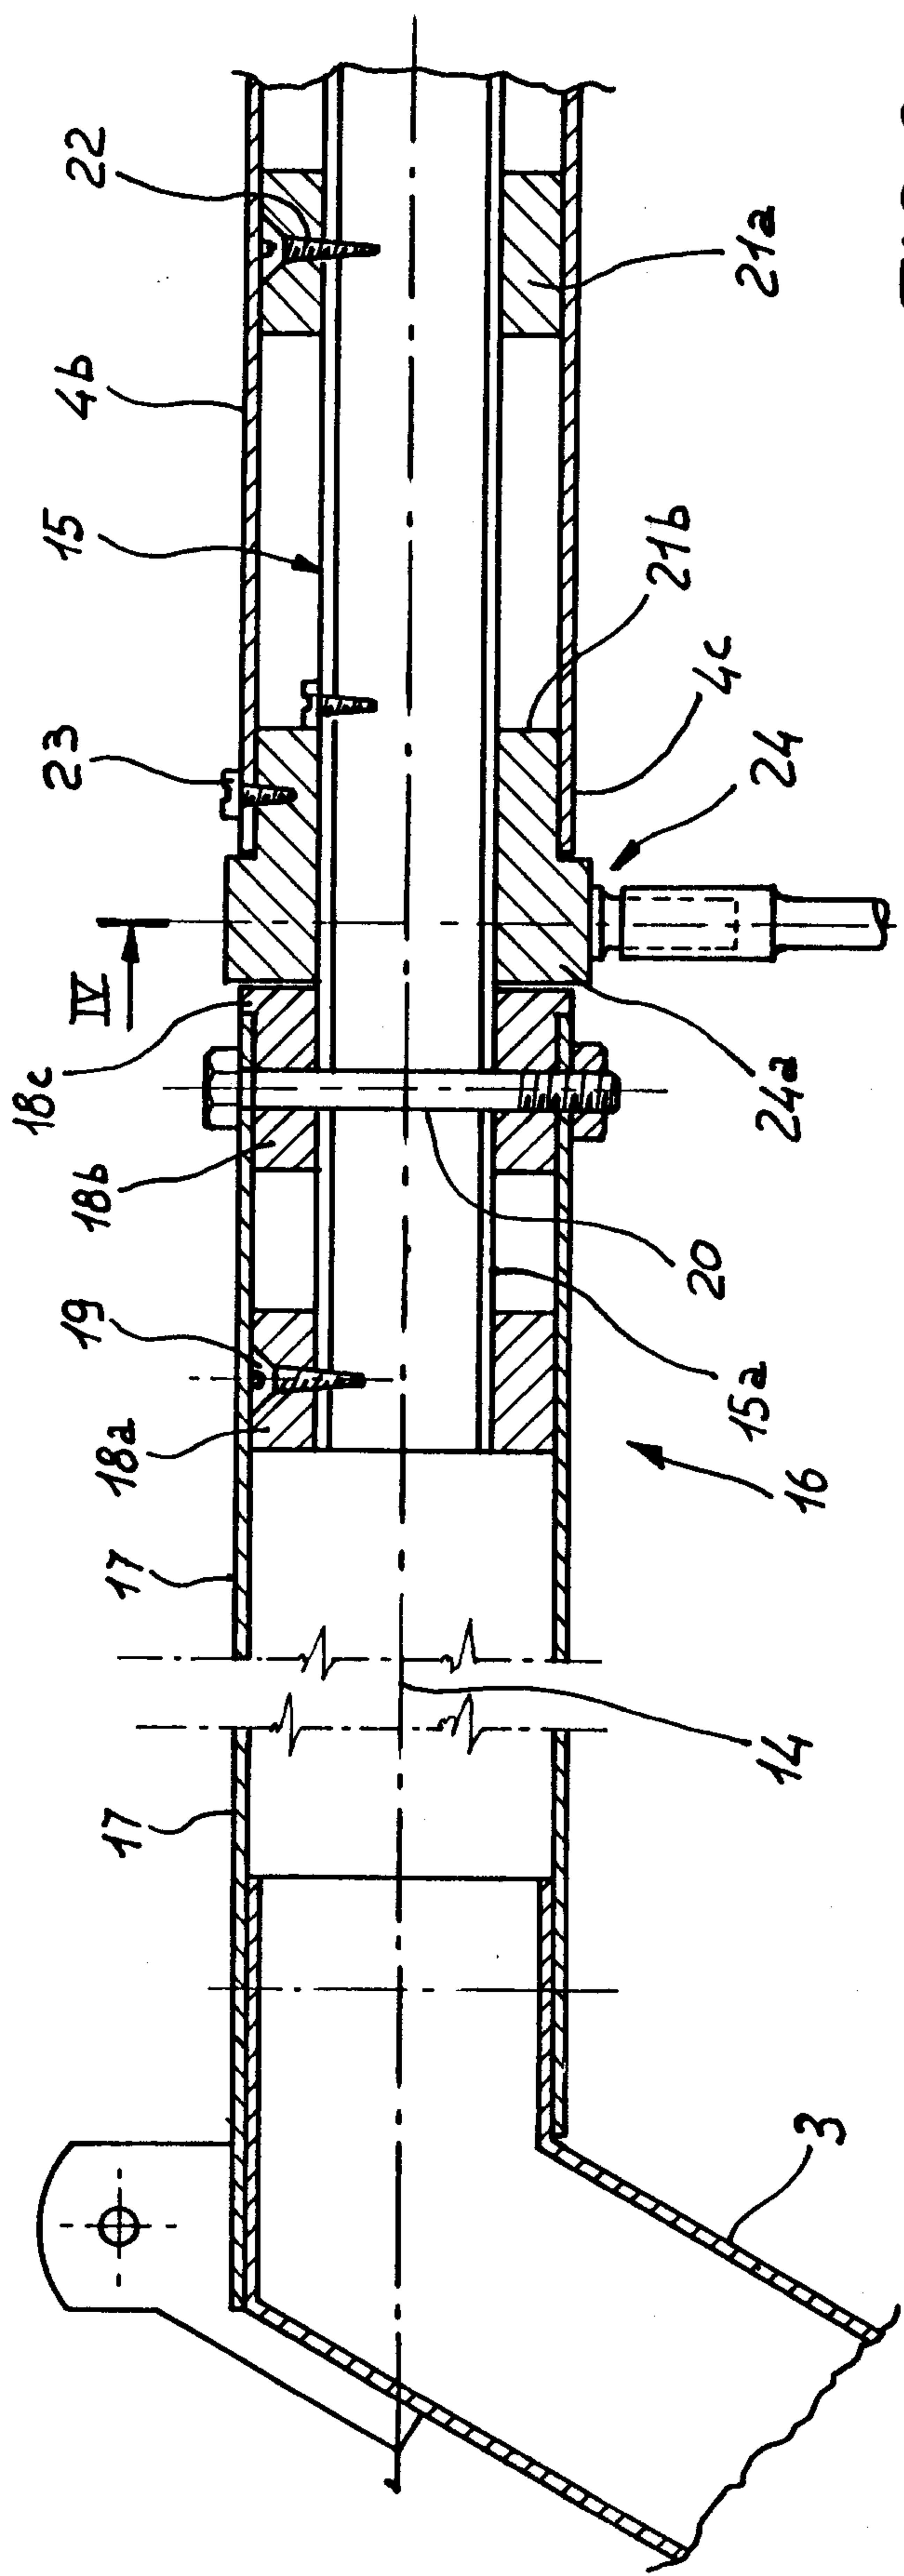


FIG. 3

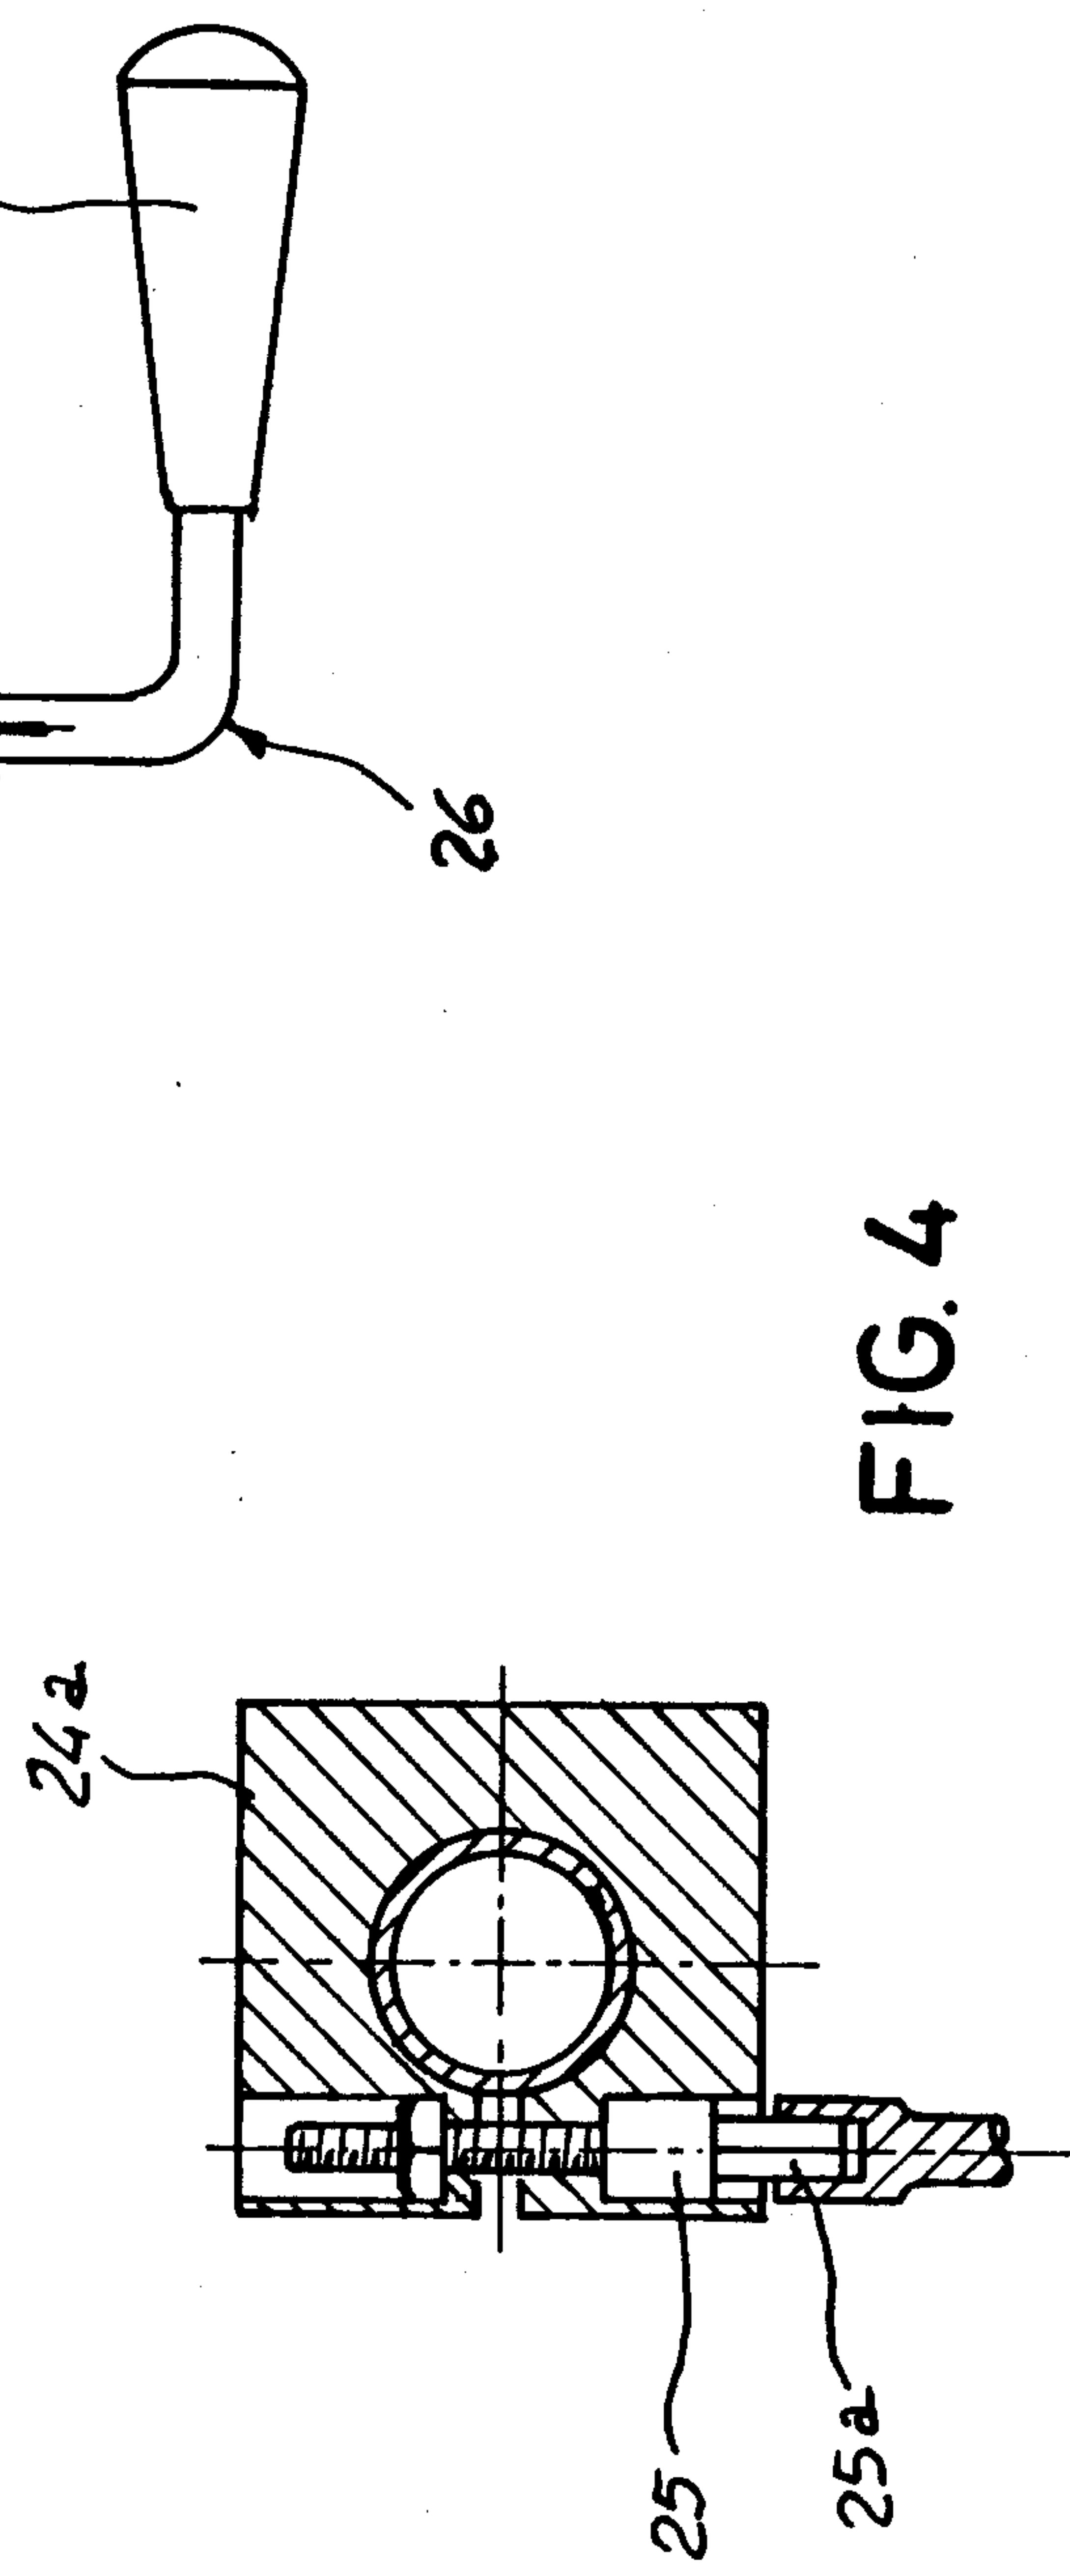


FIG. 4

