




(86) Date de dépôt PCT/PCT Filing Date: 2003/03/07
 (87) Date publication PCT/PCT Publication Date: 2004/09/16
 (85) Entrée phase nationale/National Entry: 2005/09/07
 (86) N° demande PCT/PCT Application No.: CH 2003/000157
 (87) N° publication PCT/PCT Publication No.: 2004/078049

(51) Cl.Int.⁷/Int.Cl.⁷ A61B 17/72
 (71) Demandeur/Applicant:
 SYNTHES (U.S.A.), US
 (72) Inventeurs/Inventors:
 SENN PETER, CH;
 SCHLIENGER, ANDRE, CH;
 BUETTLER, MARKUS, CH
 (74) Agent: OSLER, HOSKIN & HARCOURT LLP

(54) Titre : VIS DE BLOCAGE POUR CLOU INTRAMEDULLAIRE
 (54) Title: LOCKING SCREW FOR AN INTRAMEDULLARY NAIL

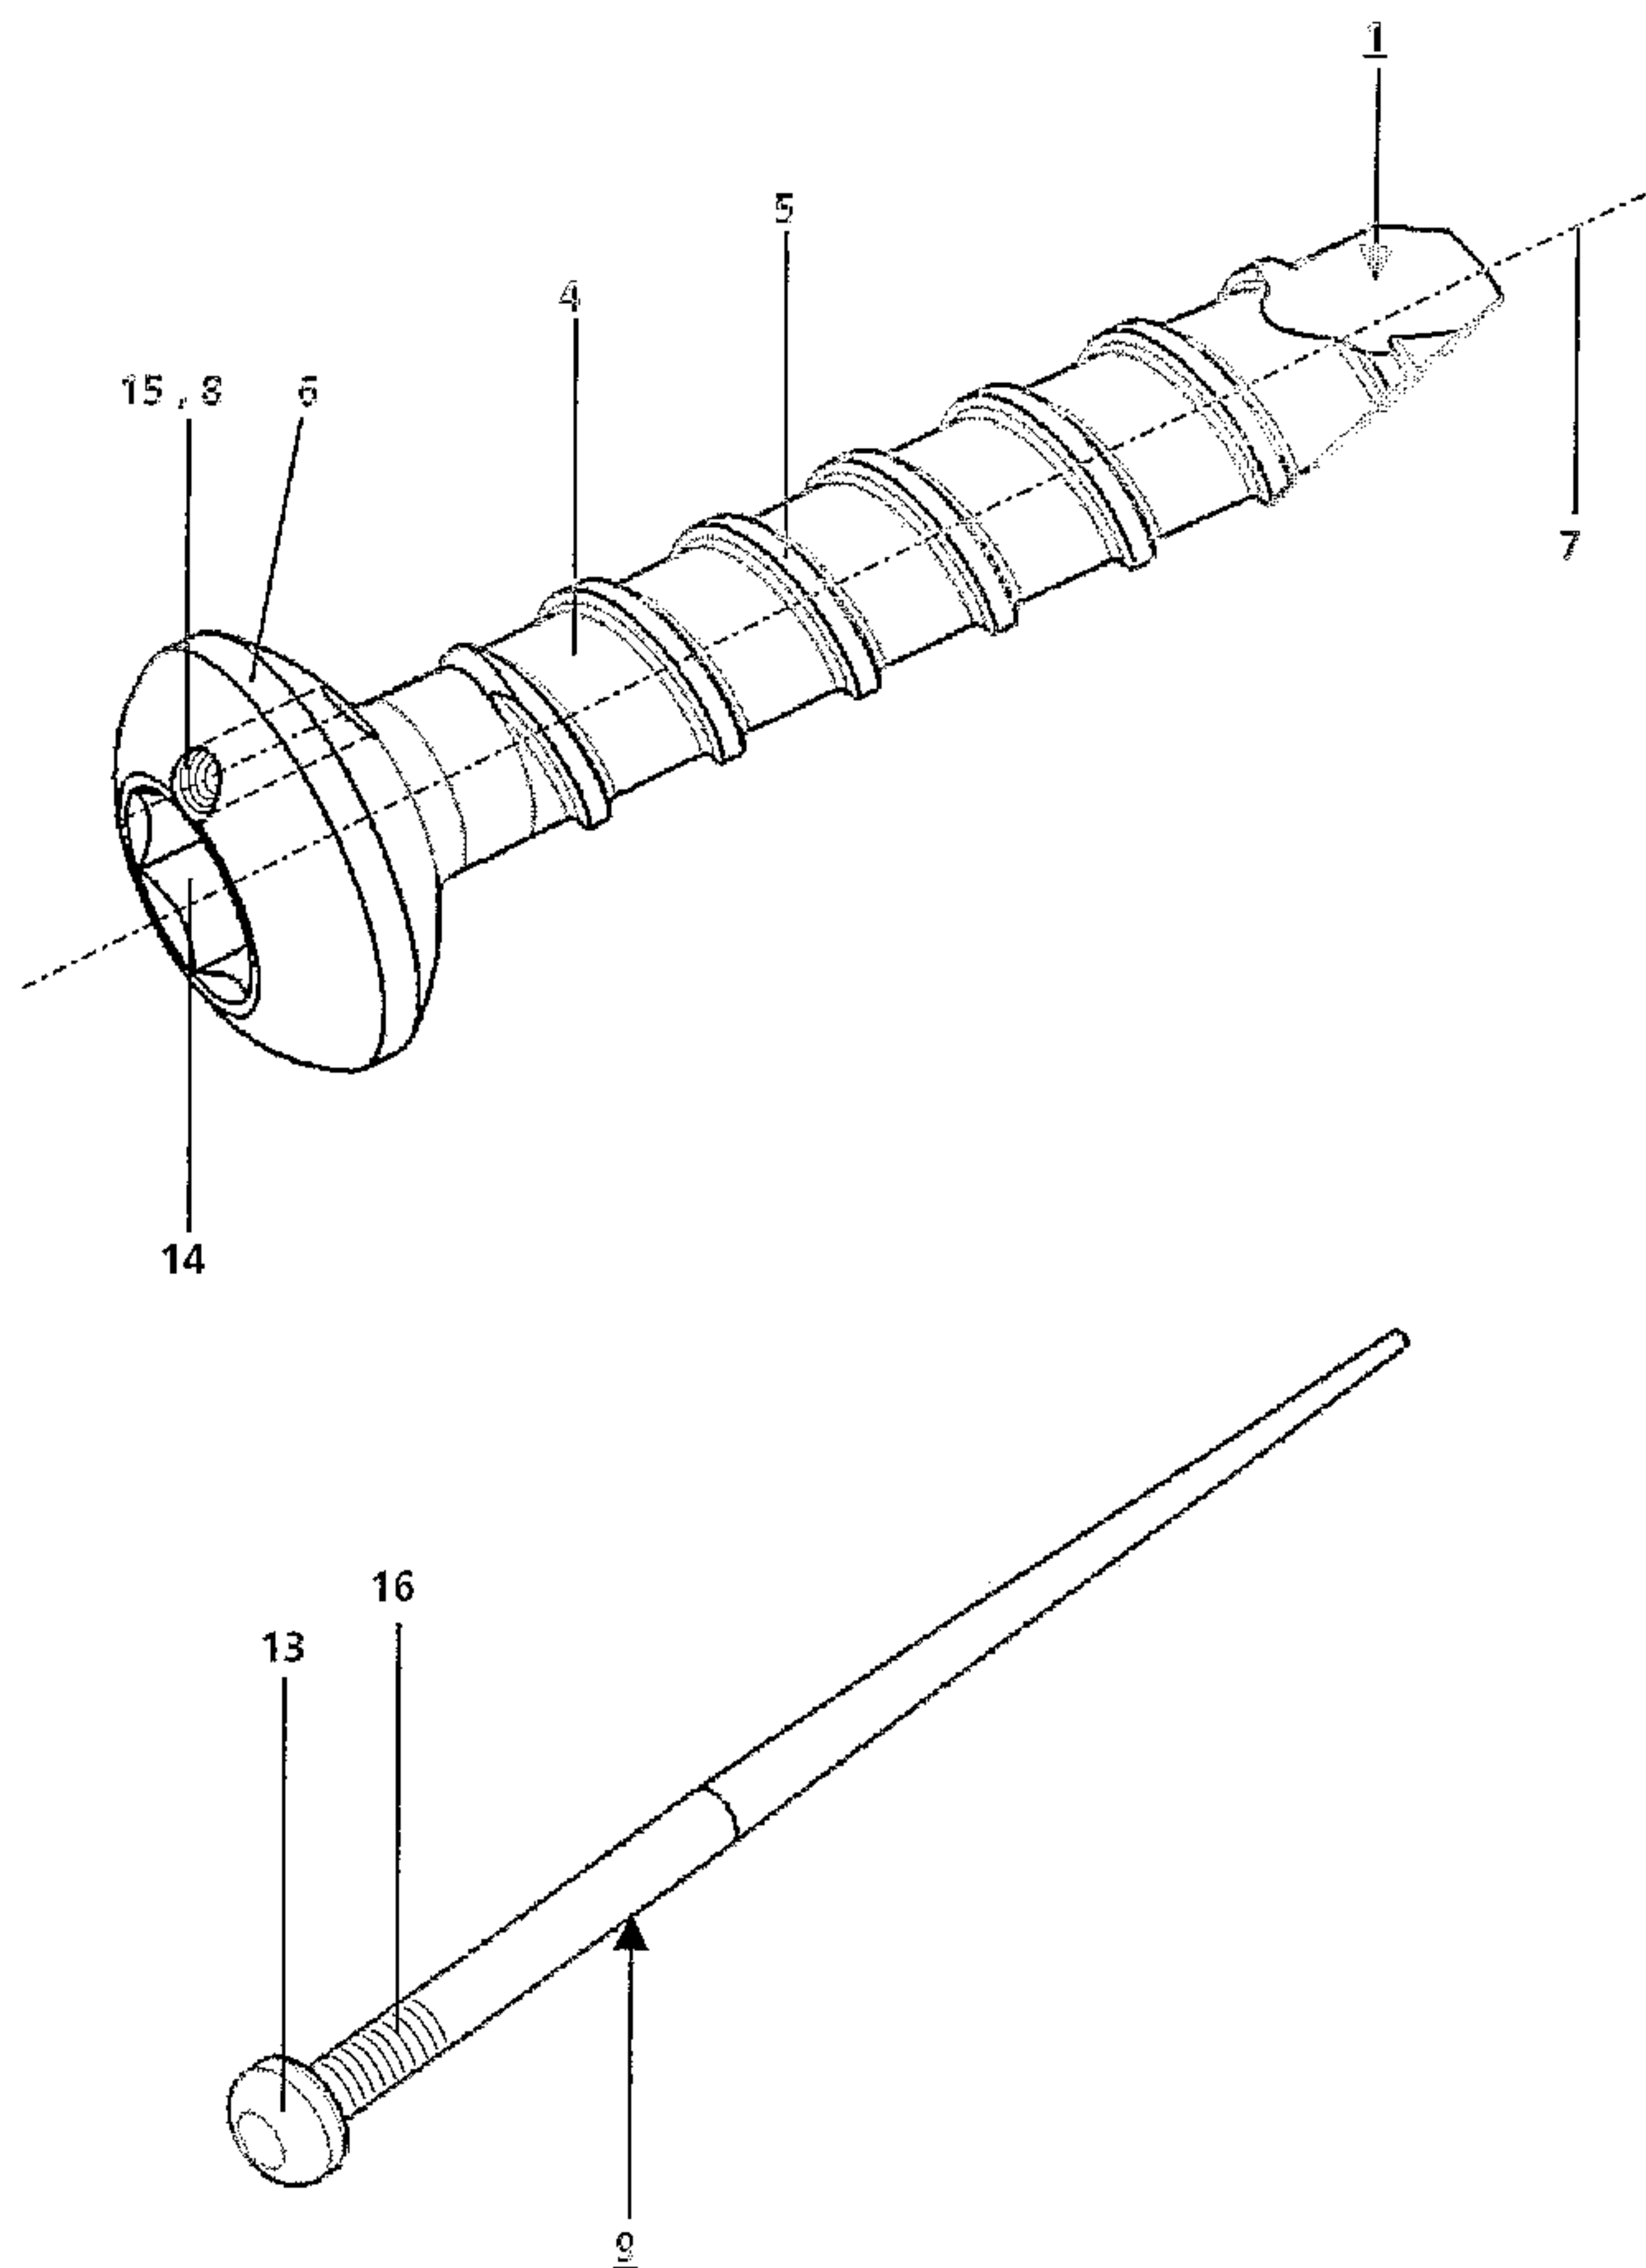

(57) Abrégé/Abstract:

The locking screw (1) for an intramedullary nail (2) comprises at least one transversal hole (3). The locking screw (1) comprises a central longitudinal axis (7), a screw shank (4) which is least partially provided with an external thread (5) and a screw head (6).

(57) **Abrégé(suite)/Abstract(continued):**

The diameter of the screw head (6) is greater than the outer diameter of the external thread (5) and the screw head (6) comprises a passage (8) which extends in an essentially parallel manner in relation to the longitudinal axis (7) and the external thread (5) in order to receive a longitudinal wedge element (9). As a result, the existing backlash between the locking screw (1) and the intramedullary nail (2) is eliminated and the locking screw (1) is wedged in the transversal hole (3) of the intramedullary nail (2).

Abstract of the Disclosure

A locking screw for an intramedullary nail having at least one transverse hole. The locking screw has a central longitudinal axis and includes a screw shank, which is at least partially provided with an external thread, and a screw head. The diameter of the screw head is greater than the outer diameter of the external thread, and the screw head includes a passage extending generally parallel to the longitudinal axis of the screw and the external thread. The passage is configured to receive a longitudinal wedge element. As a result, any gap between the locking screw and the intramedullary nail is eliminated and the screw is wedged in position in the transverse hole of the intramedullary nail.

LOCKING SCREW FOR AN INTRAMEDULLARY NAIL

RELATED APPLICATION DATA

[0001] The present application claims priority to International Patent Application No. PCT/CH2003/000157, filed March 7, 2003, the entire content of which is expressly incorporated herein by reference thereto.

FIELD OF THE INVENTION

[0002] The present invention relates to orthopaedic implants and, more particularly, to a locking screw for use with an intramedullary nail, wherein the screw includes a head portion with a passage for receiving a longitudinal wedge element.

BACKGROUND OF THE INVENTION

[0003] The locking of intramedullary nails, or intramedullary nails, is known in the art, e.g., locking screws are introduced into the transverse boreholes of the intramedullary nail either with the help of an imaging method (X-ray control) or a fairly complicated targeting device. In both cases, a certain targeting inaccuracy is unavoidable, that is, the tip of the screw cannot be aligned exactly coaxially with the middle axis of the transverse borehole and, instead, deviates therefrom by a certain amount. So that the locking screw ends up in and can be passed through the transverse borehole in spite of this targeting error, the external diameter of the screw is underdimensioned relative to the diameter of the transverse borehole. If the targeting accuracy remains in the range of this underdimensioning, the locking screw can be passed through the transverse boreholes without problems in spite of the targeting error. However, because of the underdimensioning, there is a certain clearance between the locking screw and the transverse borehole.

[0004] This clearance defines the amount by which the main fragments of the bone, which are fixed in the corresponding locking hole by means of locking screws, can move relative to the nail and, accordingly, because of the rigidity of the nail, also relative to other main bone fragments fastened with the same nail. Together with the flexibility of the material and of the overall device, this may cumulatively assume a magnitude, which prevents successful healing or delays it significantly. Admittedly, this clearance is unavoidable in order to guarantee the applicability of the locking for the surgeon. However, it is clinically undesirable for certain indications, such as metaphysical fragments.

[0005] Even nails with a full cross section, which may have an internal thread in the locking hole, are not without clearance. The internal thread merely prevents the nail from moving axially on the locking screw.

SUMMARY OF THE INVENTION

[0006] The present invention has been developed to solve this problem. It is an object of the invention to create a locking screw, with which the gap or clearance, existing between it and the intramedullary nail, can be eliminated and the locking screw can be wedged in the transverse borehole of the intramedullary nail.

[0007] Pursuant to the invention, this objective is accomplished with a locking screw having a central longitudinal axis, a screw shaft, at least a portion of which includes an external thread having an outer diameter, and a screw head having a diameter greater than the outer diameter of the external thread. A passage is formed through the screw head configured and dimensioned to receive a longitudinal wedging element, the passage extending in a first direction generally parallel to the longitudinal axis of the screw.

[0008] The advantages, achieved by the invention, are seen to lie essentially therein that, due to the inventive locking screw, the clearance between the intramedullary nail and the locking screw can be eliminated. However, the invention also permits the screw to be introduced in a first phase with clearance and to eliminate this clearance only subsequently. A further advantage consists therein that, in spite of the elimination of the clearance, the ability to rotate the locking screw is not blocked. The advantages of retaining the ability to rotate are manifold:

[0009] • the locking screw can be screwed in and out even in the state of reduced clearance (axial freedom) and

[0010] • in the case of a failure of the locking screw, it is possible to extract the locking screw with conventional techniques (by beating or pulling it out).

[0011] In the case of a special embodiment of the invention, the shaft of the screw has a first groove, which extends in the direction of the passage and preferably has a partially circular or polygonal cross-section. This construction saves space, requires a lower pressing-in force and guarantees good guidance of the wedging element.

[0012] In a further embodiment, the shaft of the screw has a second groove, which is disposed essentially parallel to the first groove, offset radially by the rotation angle α and is deeper than the first groove. The passage in the head of the screw is constructed as an elongated hole, into which both grooves terminate. Between the two grooves, there is a ramp, which arises from the first groove to the second groove. The angle of rotation α may assume a value of 40° to 120° and preferably of 60° to 90° .

[0013] This embodiment has the advantage that the wedging takes place more quickly and can also be undone again more quickly. The wedging force is also

increased significantly with the application of a (comparatively) lower force. Since the wedging force is applied over a torque, the user has to apply only a relatively slight force.

[0014] In the case of a further embodiment, the groove tapers in cross section with increasing distance from the head of the screw. By these means, on the one hand, the wedging or reduction in clearance is accomplished more quickly and, on the other, the wedging can be undone again more quickly.

[0015] For a further embodiment, the groove makes an angle with the longitudinal axis of the locking screw, which preferably is less than 5°.

[0016] The groove may have a depth, which is between 1% and 50% and preferably between 2% and 20% of the diameter of the shaft of the screw.

[0017] Advisably, the inventive locking screw is introduced into the transverse borehole of an intramedullary nail, for which the diameter of the transverse borehole is larger than the external diameter of its external thread. When a longitudinal wedging element is introduced into the passage of the locking screw, wedging takes place between the shaft of the locking screw and the inner surface of the transverse borehole of the medullary nail.

[0018] The longitudinal wedging element may be a wire, preferably with an end, the cross-section of which is tapered. Advisably, the passage of the locking screw has a borehole, which corresponds to the cross-section of the wire.

[0019] Alternatively, the longitudinal wedging element may have a cross-sectional profile, which corresponds to the cross-sectional profile of the passage and preferably is constructed wedge-shaped. The passage may be essentially circular with a diameter of 0.5-2.0 mm and preferably of 0.8-1.2 mm. The longitudinal wedging element typically has a length, which corresponds to at least two thirds of the shaft of

the screw. At one of its ends, the longitudinal wedging element may have a stop for the head of the screw. With that, the wedging element is prevented from piercing through the passage.

[0020] The passage may also be provided with an internal thread. The longitudinal wedging element may also have an external thread, which corresponds to the internal thread of the passage.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] The invention and further developments of the invention are explained in even greater detail in the following by means of the partially diagrammatic representations and drawings of several examples, in which:

[0022] Fig. 1 shows a perspective view of a locking screw with a passage in the head of the screw and a locking element;

[0023] Fig. 2 shows a longitudinal section through an intramedullary nail, in the transverse borehole of which the locking screw of Fig. 1 is inserted;

[0024] Fig. 3 shows a longitudinal section through the intramedullary nail of Fig. 2, offset by 90°, in the region of its transverse borehole;

[0025] Fig. 4 shows a perspective view of a modified locking screw with a borehole in the head of the screw and a longitudinal groove in the shaft of the screw;

[0026] Fig. 5 shows a perspective view of the locking screw of Fig. 4 with a longitudinal wedging element introduced into the head of the screw;

[0027] Fig. 6 shows an enlarged longitudinal section through the modified locking screw of Fig. 4;

[0028] Fig. 7 shows a cross section through a modified locking screw of Fig 4 in the region of the transverse borehole of the intramedullary nail;

[0029] Fig. 8 shows a perspective view of a modified locking screw with a keyhole shaped passage and a keyhole shaped locking element;

[0030] Fig. 9 shows a perspective view of a modified locking screw with two grooves;

[0031] Fig.10 shows a cross section through the locking screw of Fig. 9 of a first, unwedged position;

[0032] Fig. 11 shows a cross section through a locking screw of Fig. 9 with a second, wedged position; and

[0033] Fig. 12 shows a diagrammatic cross-sectional representation of the locking screw of Fig. 9 with a first and second position of the locking screw.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0034] The locking screw 1, shown in Fig. 1, is used for locking an intramedullary nail 2, which is shown in Fig. 2 and has several transverse boreholes 3. The locking screw 1 has a central longitudinal axis 7 and comprises a screw shaft 4, which is provided with an external thread 5, as well as a screw head 6, with a hexagonal socket 14, in order to be able to turn the locking screw 1 in one of the transverse boreholes 3 of the intramedullary nail 2.

[0035] The diameter of the screw head 6 is larger than the external diameter of the external thread 5, the screw head 6 having a passage 8 in the form of a circular borehole, which extends essentially parallel to the longitudinal axis 7 and to the external thread 5 and has an internal thread 15 for accommodating a longitudinal wedging element 9 in the form of a conically extending nail with a partial external thread 16 and a stop 13 at the head, the external thread 16 corresponding to the

internal thread 15. The wedging element 9 has a length, which corresponds approximately to two thirds of the length of the screw shaft 4.

[0036] In Fig. 3 it is shown how the wedging element 9 can be wedged between the inner surface 11 of the transverse borehole 3 and the external diameter of the external thread 5 of the locking screw 1. It is a prerequisite for this that the external diameter of the external thread 5 is smaller than the diameter of the transverse borehole 3.

[0037] As shown in Figs. 2 and 6, the longitudinal wedging element 9, at its rear end, has a stop 13, so that it cannot be forced further into the screw head 6. By these means, it is prevented that the wedging element 9 can reach the intramedullary nail.

[0038] In Figs. 4-7, a variation of the locking screw 1 is shown, for which the screw shaft 4 has a groove 10 with a partially circular cross-section, flush with the passage 8 (in the form of a circular borehole with a diameter typically of 1 mm). The groove 10 tapers conically as the distance from the screw head 6 increases. The groove 10 has a depth of 5% of the diameter of the screw shaft 4. For this variation, the wedging element 9, which also tapers conically, is wedged between the inner surface 11 of the transverse borehole 3 and the inner surface of the groove 10.

[0039] In Fig. 8, a further variant of the locking screw 1 is shown, for which the passage 8 is realized in the form of a keyhole-shaped groove for accommodating a longitudinal wedging element 9 in the form of a rod, which has a keyhole-shaped profile 22 at its head end and corresponds to the keyhole-shaped groove. The wedging element 9 is secured against twisting relative to the passage 8 by the shape of the keyhole-shaped profile 22.

[0040] In Figs. 9 to 12, a further embodiment of the locking screw 1 is shown. For this variation, the screw shaft 4, aside from a first groove 10, has a second groove 16, which extends parallel to the first groove 10, is offset radially by the rotation angle α of 50° and is deeper than the first groove 10. Moreover, the first groove 10 is connected with the second groove 16 over a wedge-shaped ramp 18. The passage 8 in the screw head 6 is constructed as an elongated hole, which corresponds to the geometry of the ramp 18 and in which the two grooves 10, 16 terminate, so that the longitudinal locking element 9 can be placed in the first groove 10 as well as in the second groove 16.

[0041] By rotating the locking screw 1 in the direction of arrow 17 (clockwise), the longitudinal locking element 9 (un-wedged position in Fig. 10), lying in the second groove 16, slides along the relatively flat, wedge-shaped ramp 18 until it falls into the first groove 10 of lesser depth (wedged position in Fig. 11). The longitudinal locking element 9 is prevented from sliding from the first groove 10 back into the second groove 16 by the relatively steep flank 19 and the camber relative to the positions 20 and 21 between the two grooves 10, 16. At the same time, the longitudinal locking element 9 moves in the elongated hole 8 from position 21 to position 20 (Fig. 9).

[0042] By rotating the locking screw 1 in the direction of arrow 23 (counterclockwise), the longitudinal locking element 9 (wedged position in Fig. 11), lying in the first groove 10, falls back into the second groove 16 (not wedged position in Fig. 10), so that the clamping of the locking screw 1 is canceled once again.

[0043] As shown in Fig. 12, the dimensioning of the individual components advantageously should be as follows:

- [0044] • the distance between the midpoint of the longitudinal locking element 9 and the midpoint of the screw shaft 4 in position 21 (broken lines) is r_1 ;
- [0045] • the distance between the midpoint of the longitudinal locking element 9 and the midpoint of the screw shaft 4 in position 20 (continuous lines) is r_2 , r_2 being greater than r_1 ;
- [0046] • the diameter of the longitudinal locking element 9 is d_p ,
- [0047] • the radius of the external thread 5 of the screw shaft 4 is r_s
- [0048] • the diameter of the transverse borehole 3 is r_b , $r_b > r_s$,
- [0049] • the desired press fit or the reduction in clearance between the external thread 5 of the screw shaft 4, the longitudinal locking element 9 and the transverse borehole 3 of the intramedullary nail arises if the sum of $[(r_s - N_{2t} + d_p) + r_s]$ is greater than or equal to $2r_b$, N_{2t} being the depth of the groove in position 20.
- [0050] While the present invention has been described with reference to the preferred embodiments, those skilled in the art will recognize that numerous variations and modifications may be made without departing from the scope of the present invention. Accordingly, it should be clearly understood that the embodiments of the invention described above are not intended as limitations on the scope of the invention, which is defined only by the following claims.

Claims

1. Locking screw (1) for an intramedullary nail (2) with at least one transverse borehole (3), the locking screw (1) having a central longitudinal axis (7) and comprising the following elements:

A) a screw shaft (4) which is provided at least sectionally only with an external thread (5) and

B) a screw head (6), the diameter of which is larger than the external diameter of the external thread (5),

characterized in that

C) the screw head (6) has a passage (8) for accommodating a longitudinal wedging element (9), the passage (8) extending essentially parallel to the longitudinal axis (7) and to the external thread (5).

2. The locking screw (1) of claim 1, characterized in that the screw shaft (4) has a first groove (10), preferably with a partially circular or polygonal cross-section, the groove (10) extending in the direction of the passage (8).

3. The locking screw (1) of claim 2, characterized in that the screw shaft (4) has a second groove (16), which is deeper than the first groove (10), the second groove (16) being disposed essentially parallel to the first groove (10) and offset radially by the rotation angle α , and that the passage (8) in the screw head (6) is constructed as an elongated hole, in which the two grooves (10, 16) terminate.

4. The locking screw (1) of claim 3, characterized in that the rotation angle α has a value of 40° to 120° and preferably of 60° to 90° .

5. The locking screw (1) of claims 3 or 4, characterized in that a ramp (18), rising from the first groove (10) to the second groove (16), is provided between the two grooves (10, 16).

6. The locking screw (1) of one the claims 1 to 5, characterized in that the groove (10; 16) tapers in cross-section, preferably conically, as its distance from the screw head (6) increases

7. The locking screw (1) of one of the claims 1 to 6, characterized in that the groove (10; 16) makes an angle with the longitudinal axis (7), which preferably is smaller than 5°.

8. The locking screw of one of the claims 1 to 7, characterized in that it is introduced into the transverse borehole (3) of an intramedullary nail (2) and that the external diameter of its external thread (5) is smaller than the diameter of the transverse borehole (3)

9. The locking screw (1) of claim 8, characterized in that a longitudinal wedging element (9) is introduced into its passage (8) and can be wedged between the screw shaft (4) of the locking screw (1) and the inner surface (11) of the transverse borehole (3) of the medullary nail (2).

10. The locking screw (1) of claim 9, characterized in that the longitudinal wedging element (9) is a wire, preferably with an end (12) tapering in cross-section and the passage (8) is a borehole, preferably corresponding to the cross-section of the wire.

11. The locking screw (1) of claims 9 or 10, characterized in that the longitudinal wedging element (9) has a cross-sectional profile, which corresponds to the cross-sectional profile of the passage (8) and preferably is constructed wedge-shaped.

12. The locking screw (1) of one of the claims 1 to 11, characterized in that the passage (8) is essentially circular with a diameter of 0.5-2.0 mm and preferably of 0.8-1.2 mm.

13. The locking screw (1) of one of the claims 9 to 12, characterized in that the longitudinal wedging element (9) has a length, which corresponds at least to two thirds of the screw shaft (4).

14. The locking screw (1) of one of the claims 9 to 13, characterized in that the longitudinal wedging element (9), at one of its ends, has a stop (13) for the screw head (6).

15. The locking screw (1) of one of the claims 1 to 14, characterized in that the first groove (10) has a depth, which corresponds to between 1% and 50% and preferably two 2% to 20% of the diameter of the screw shaft (4)

16. The locking screw (1) of one of the claims 1 to 15, characterized in that the depth of the groove N_{11} is such, that the longitudinal wedging element (9) can be introduced into the second groove (16) with clearance relative to the transverse borehole (3).

17. The locking screw (1) of one of the claims 1 to 16, characterized in that the passage (8) is provided with an internal thread (15).

18. The locking screw (1) of one of the claims 9 to 17, characterized in that the longitudinal wedging element (9) has an external thread (16), which corresponds to the internal thread (15) of the passage (8).

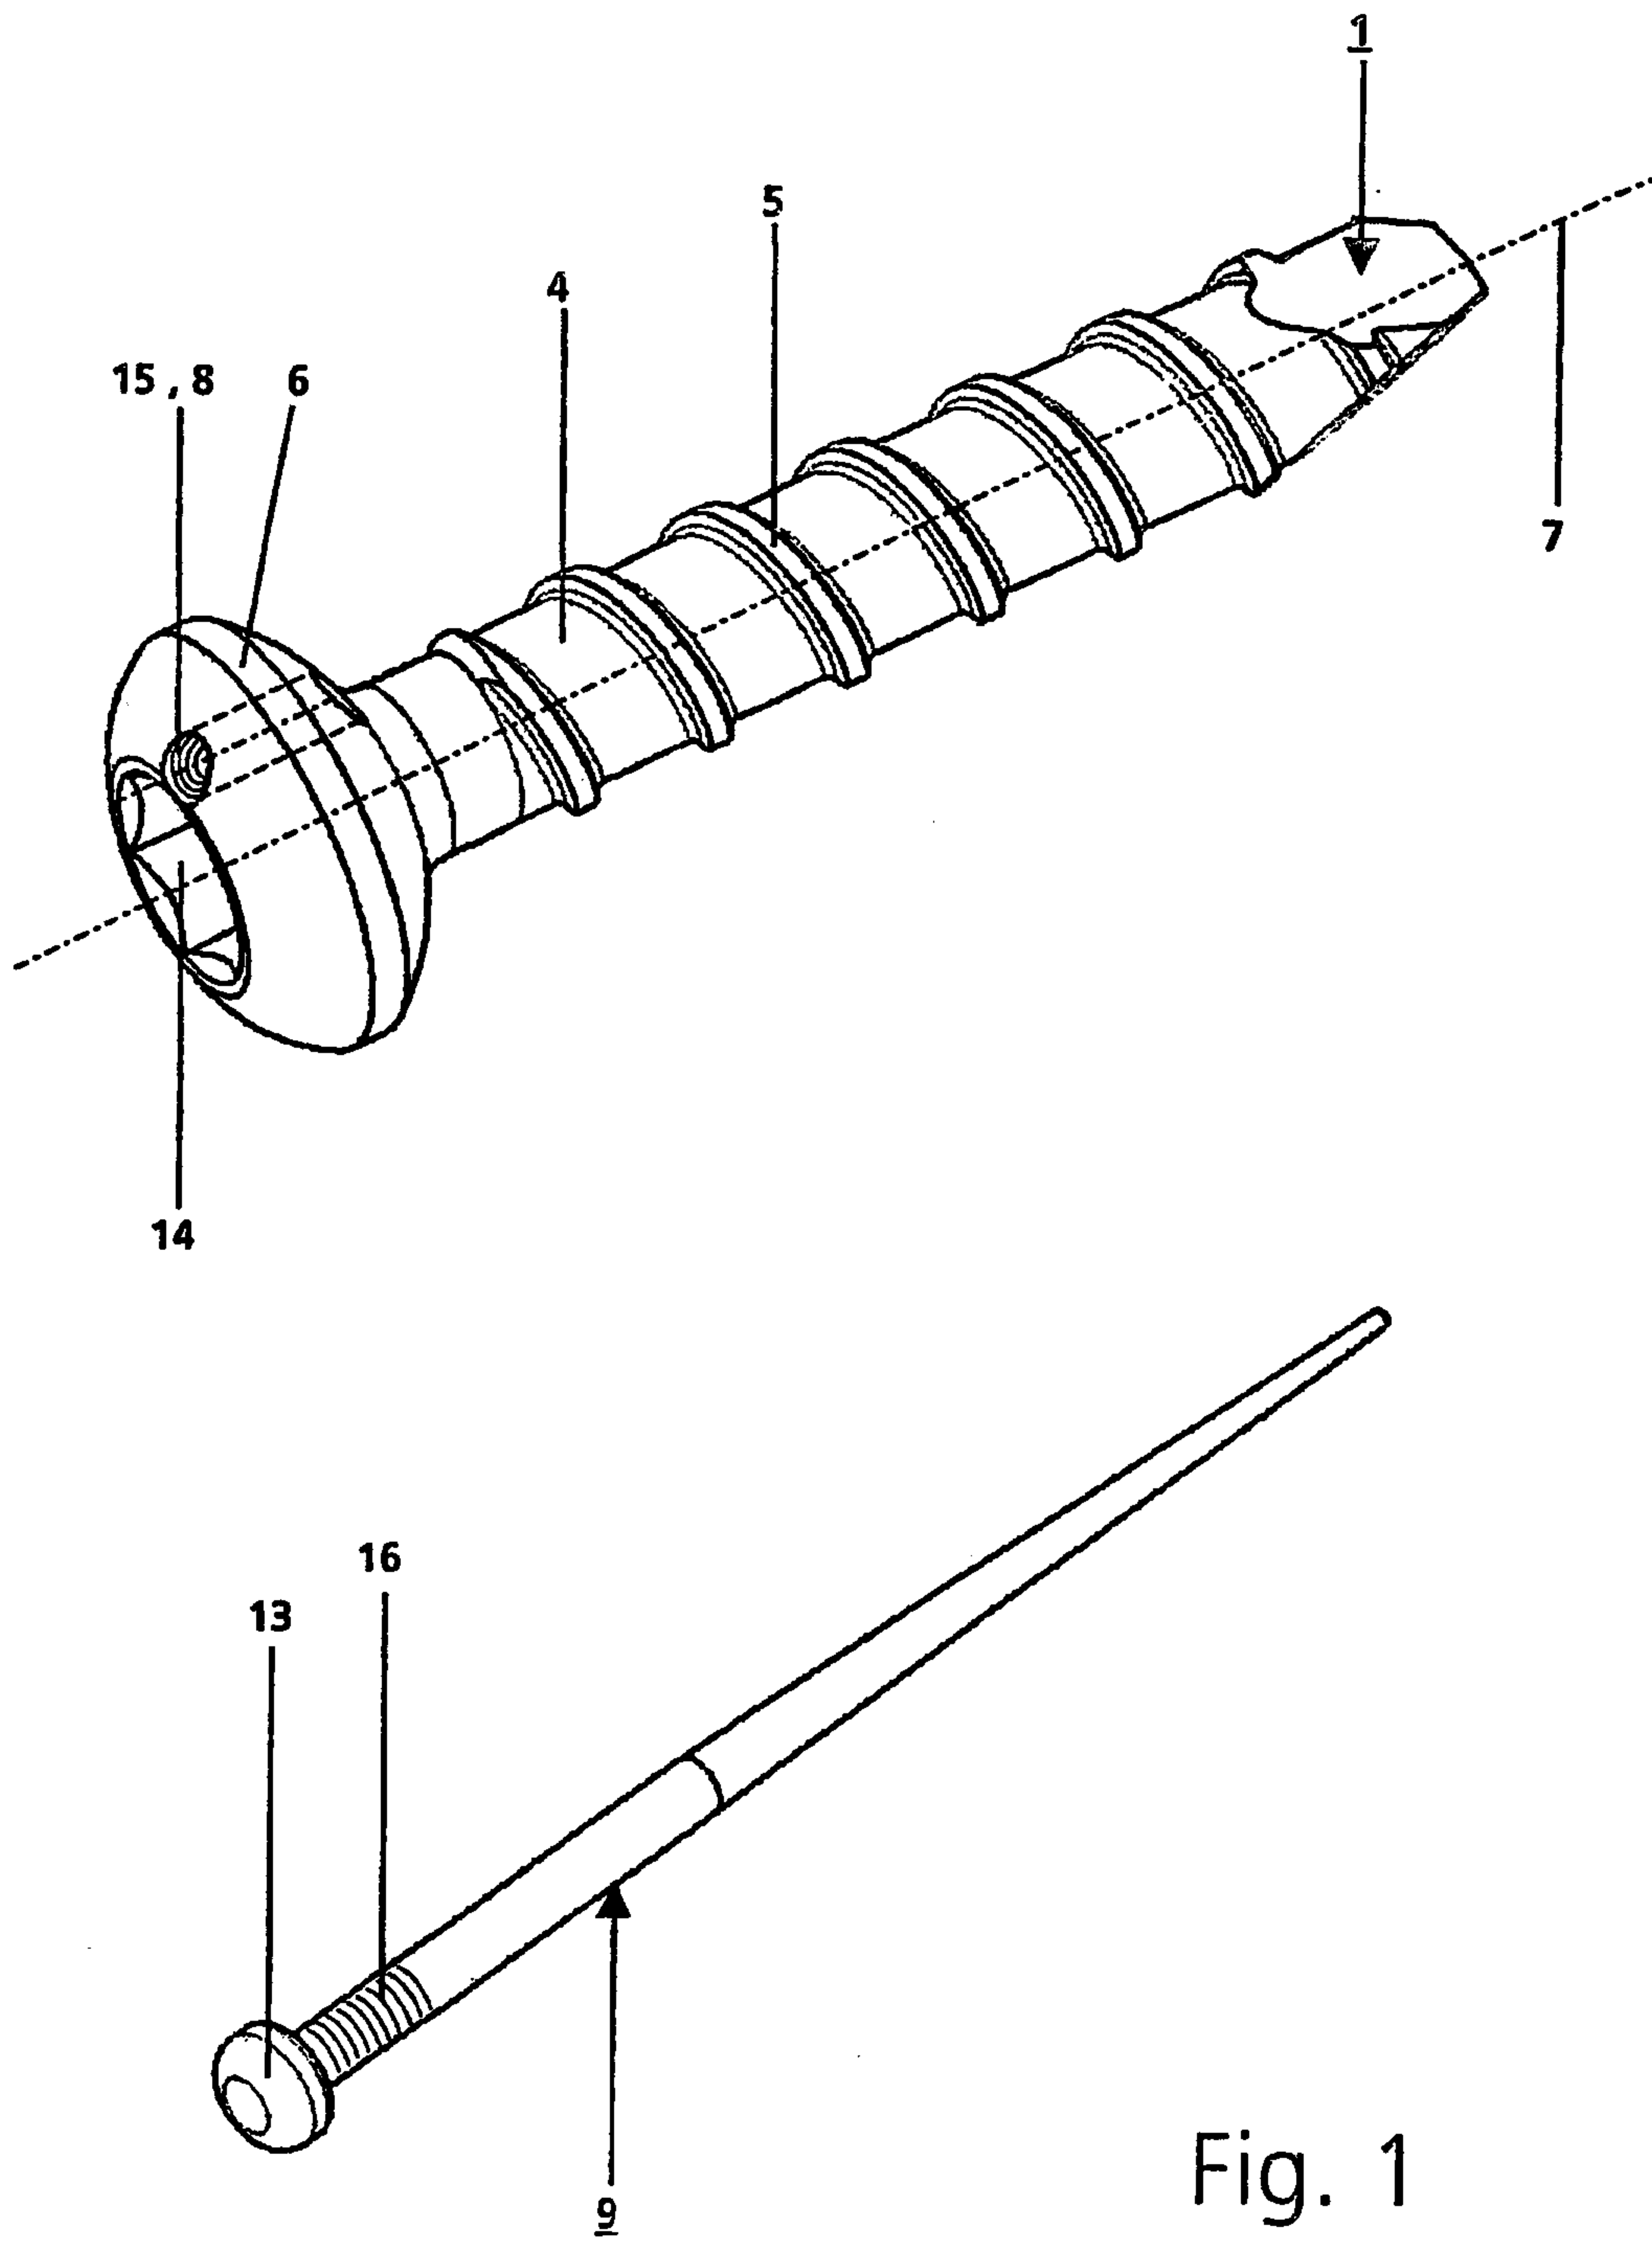
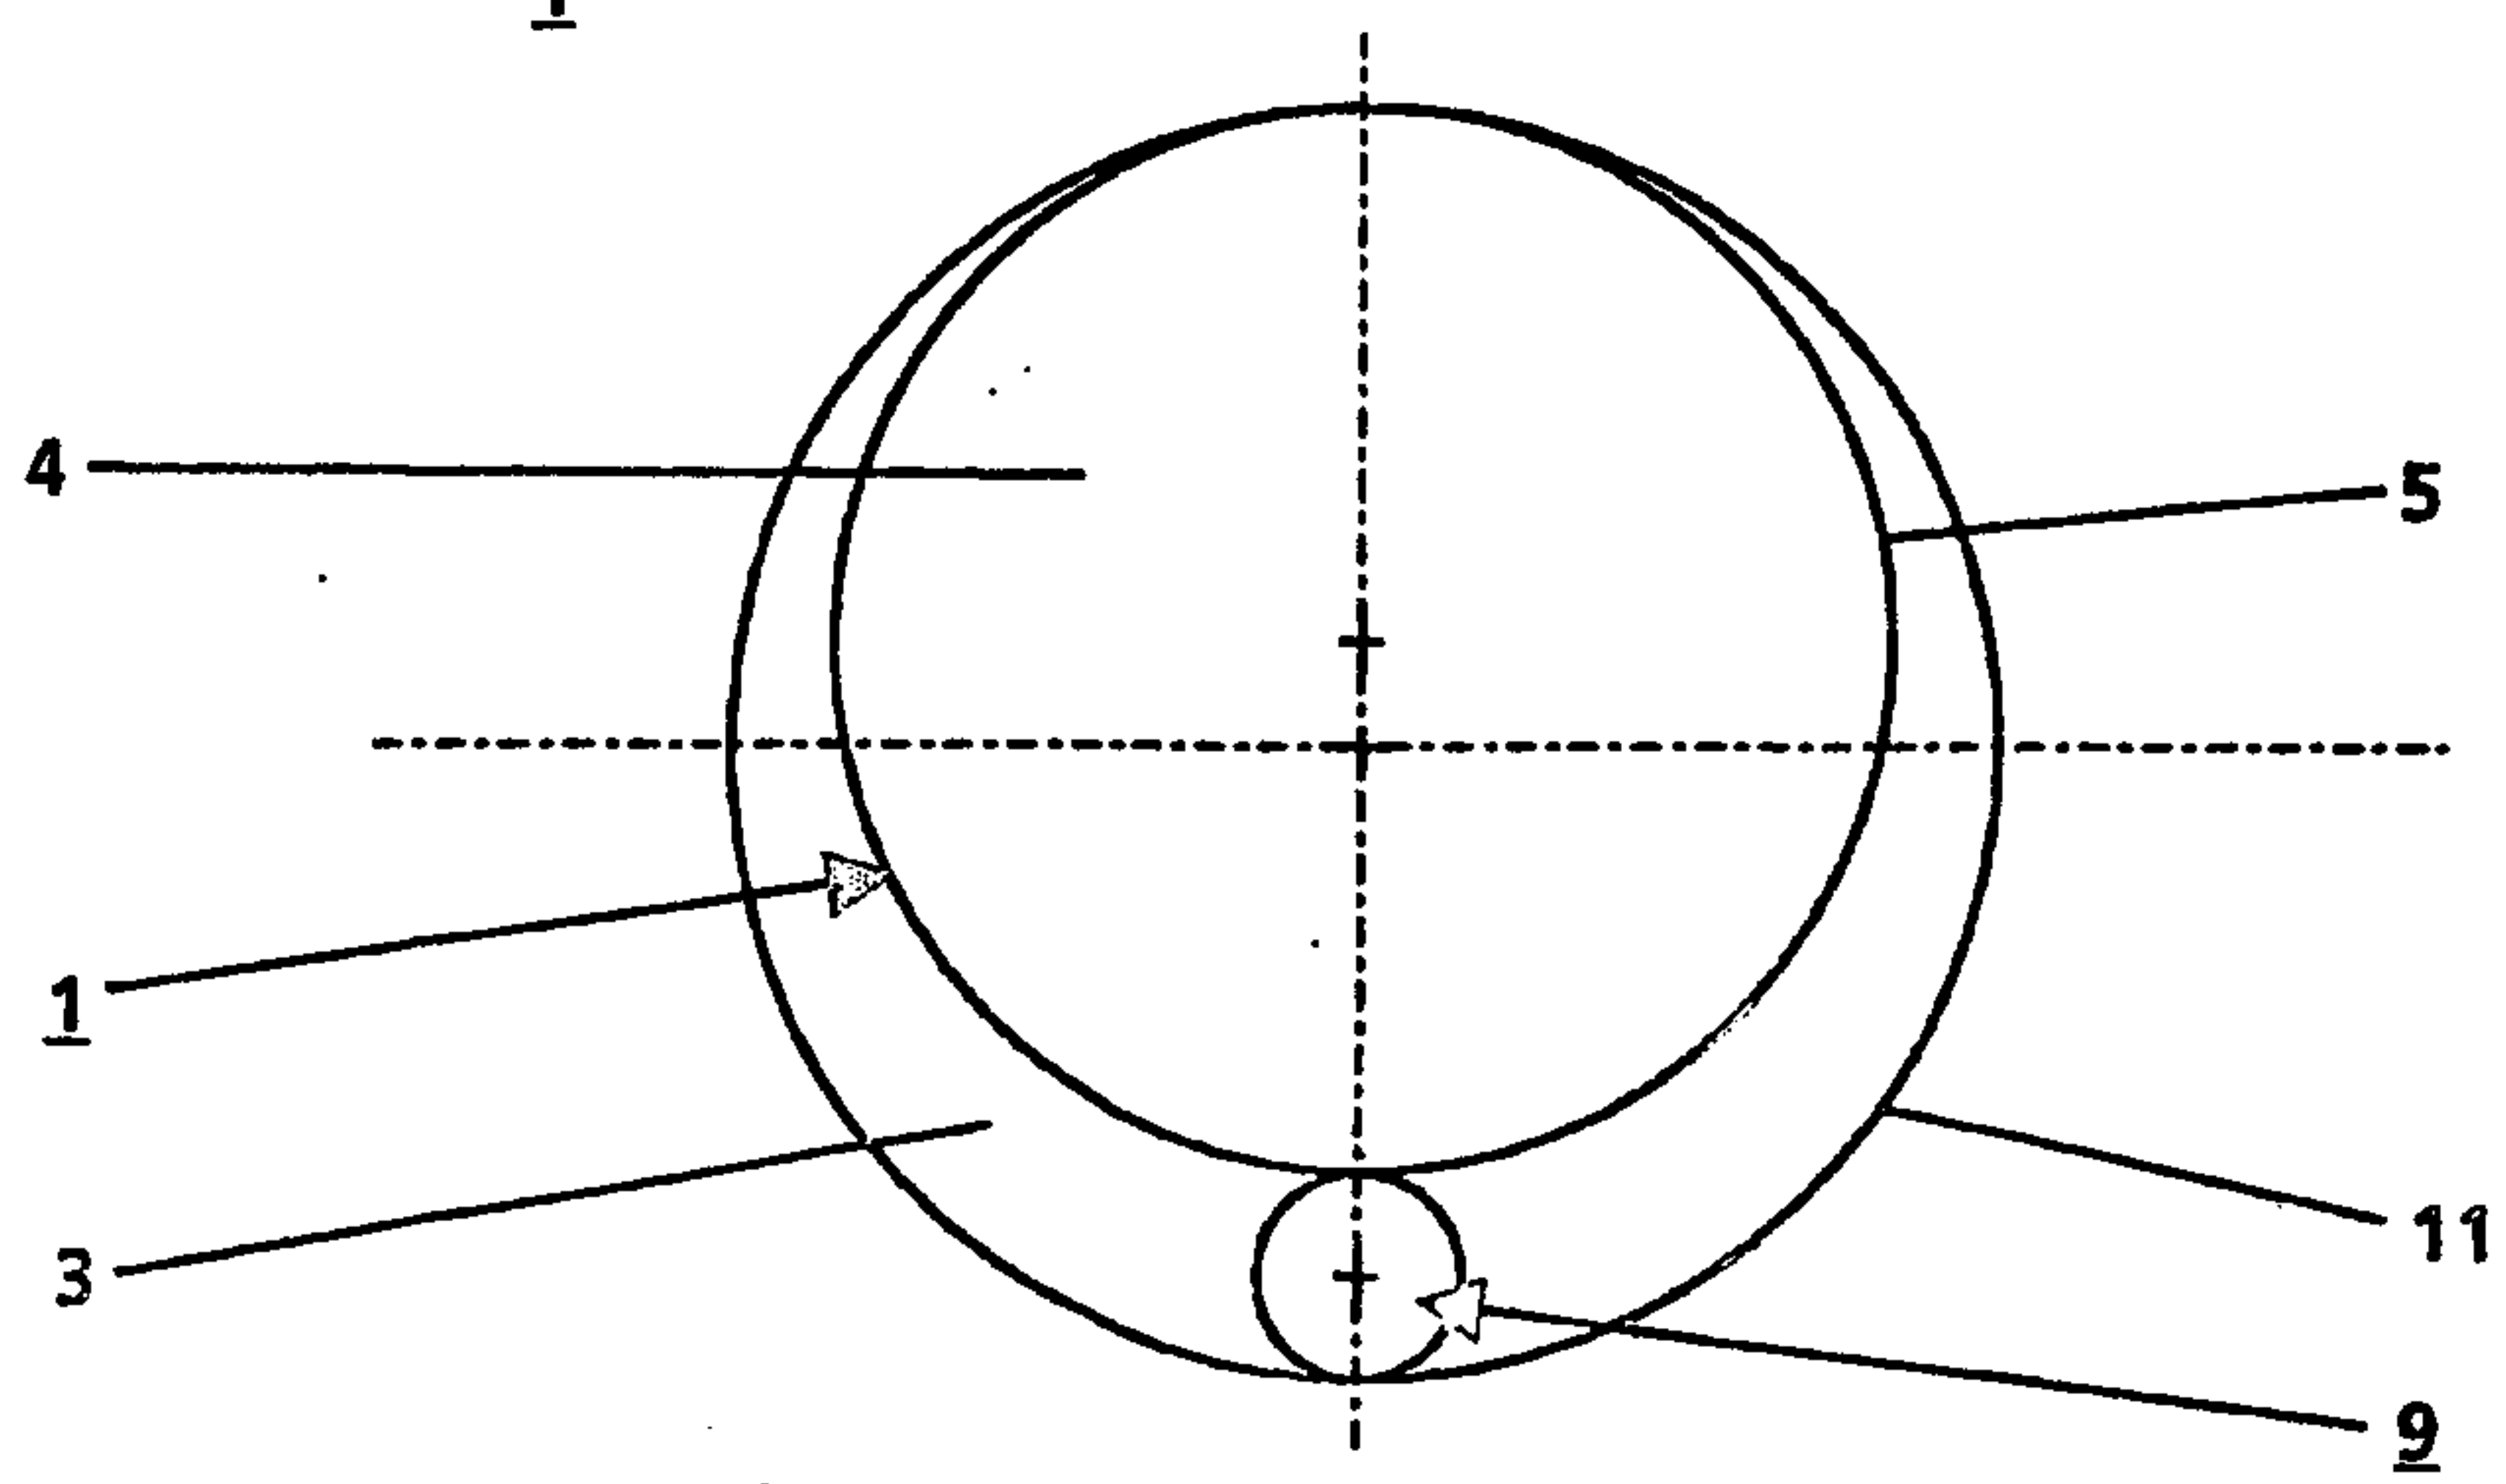
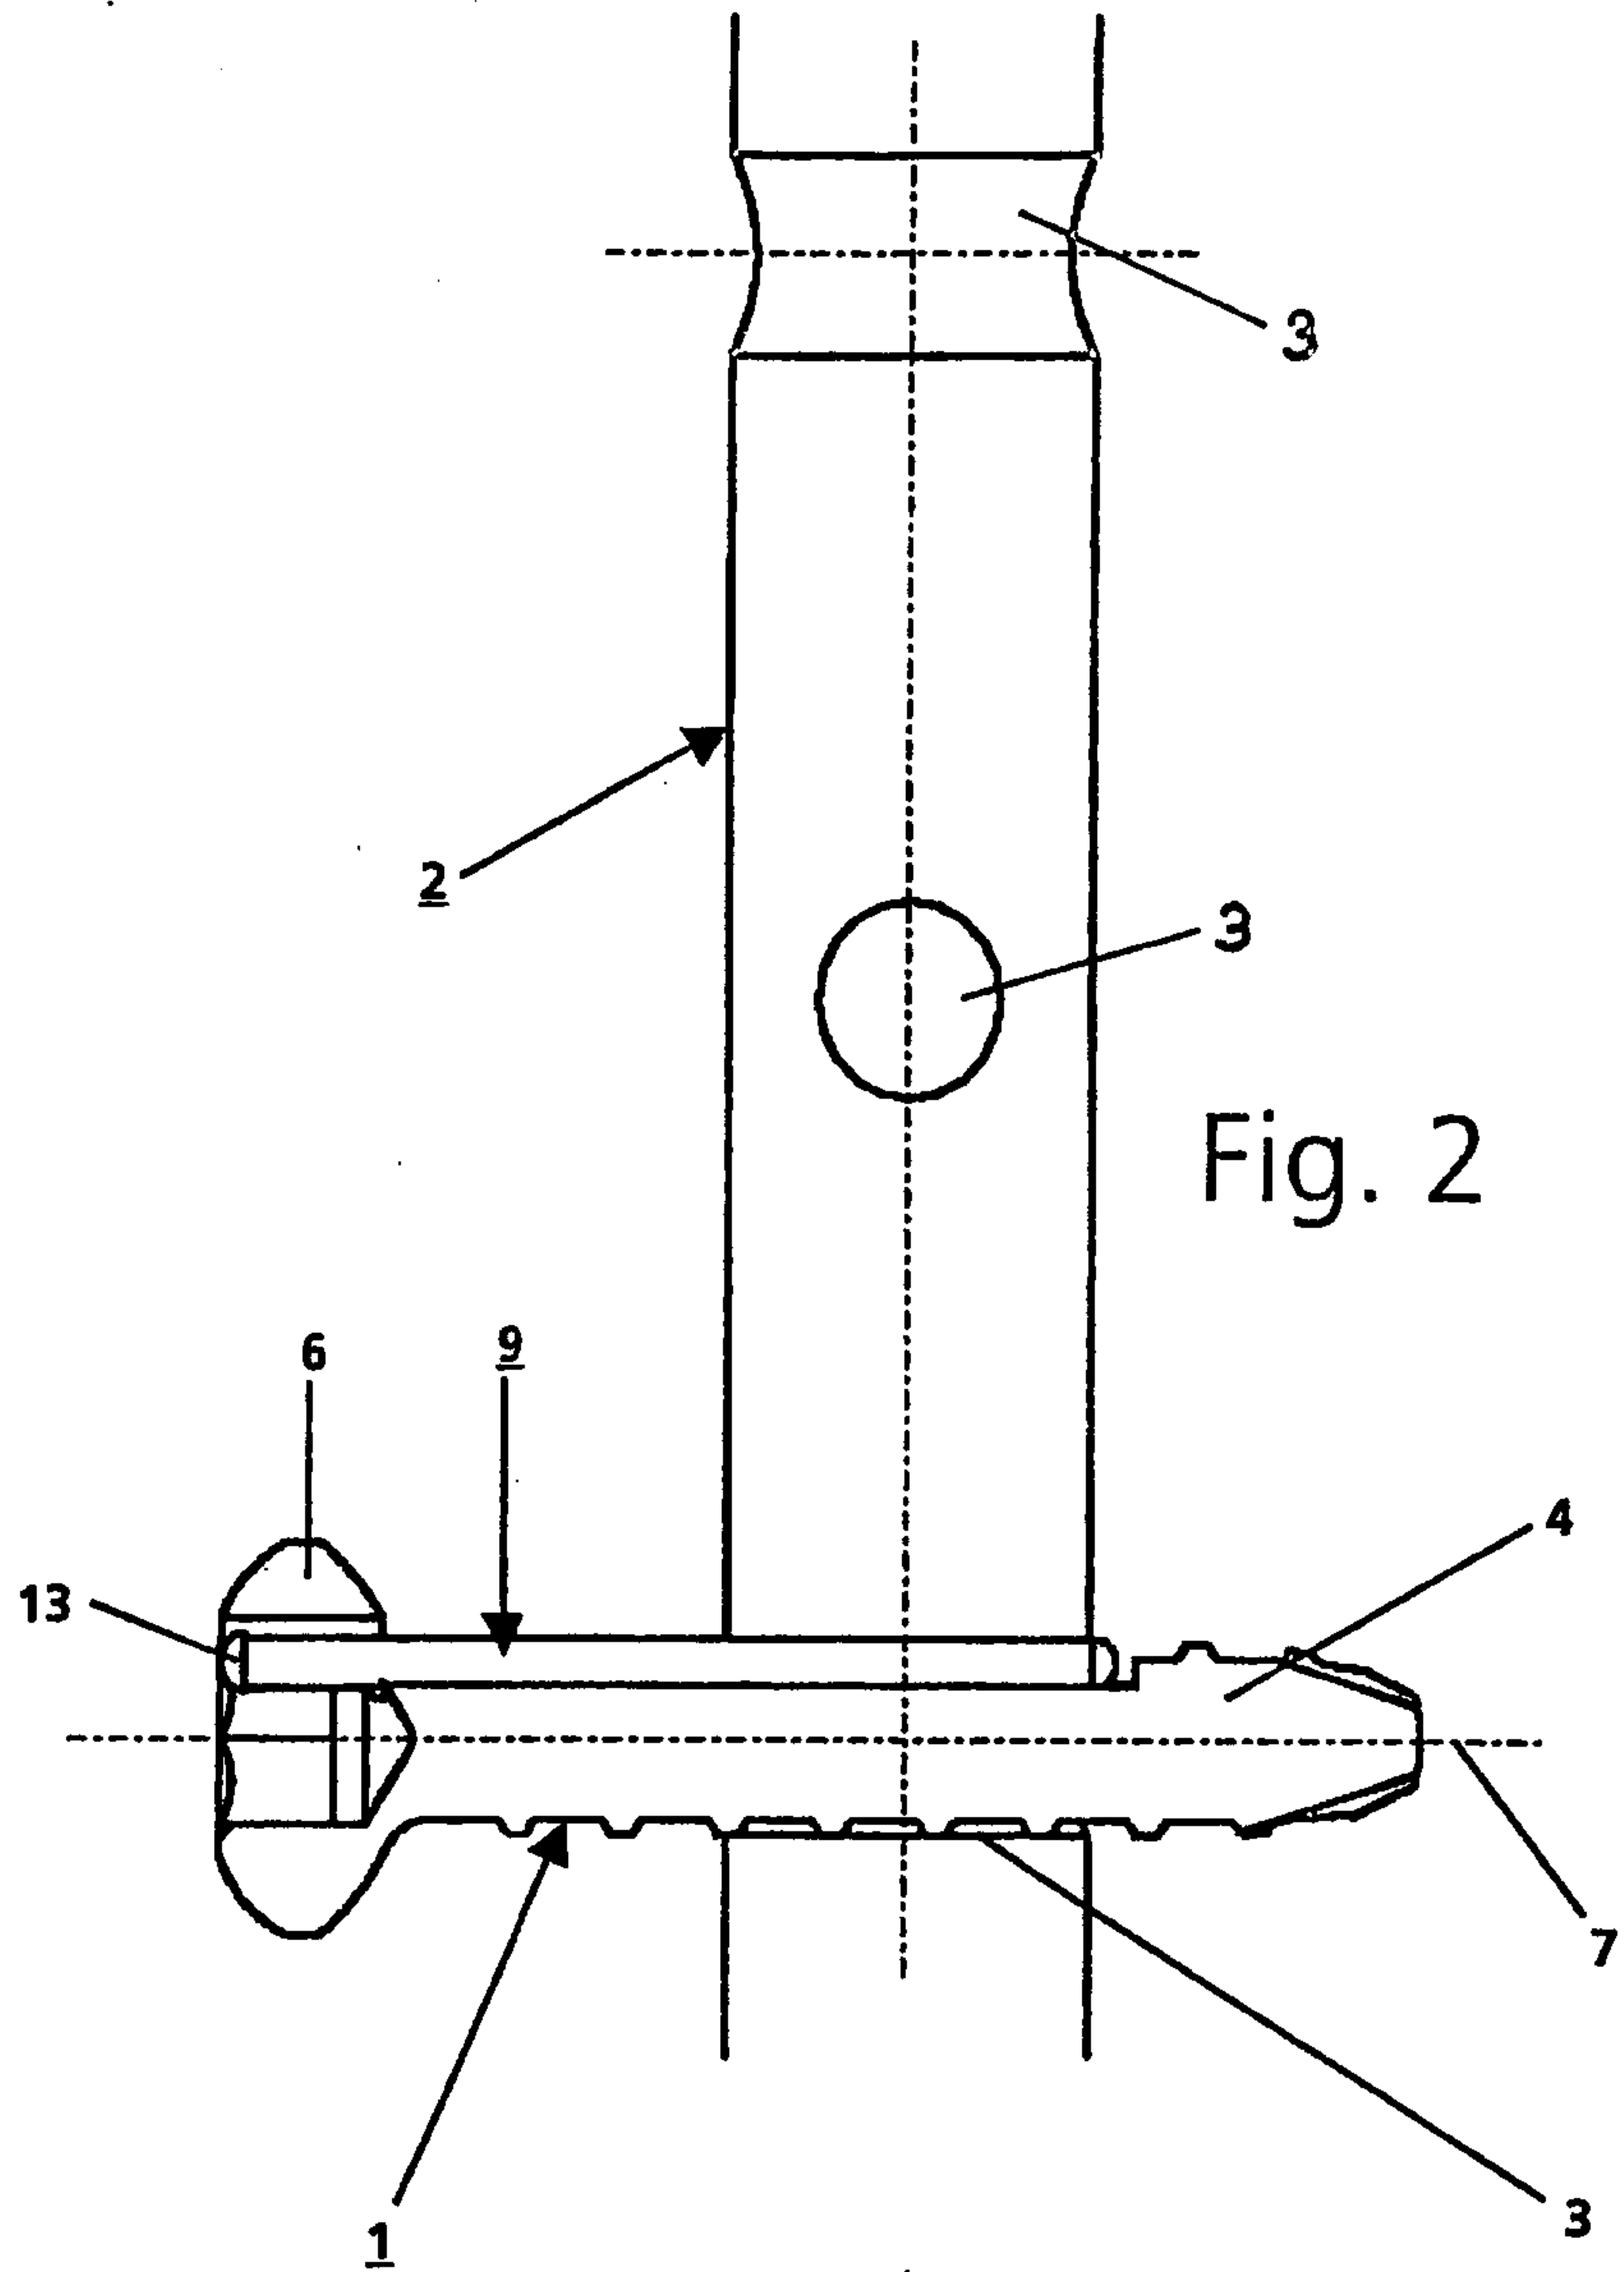


Fig. 1



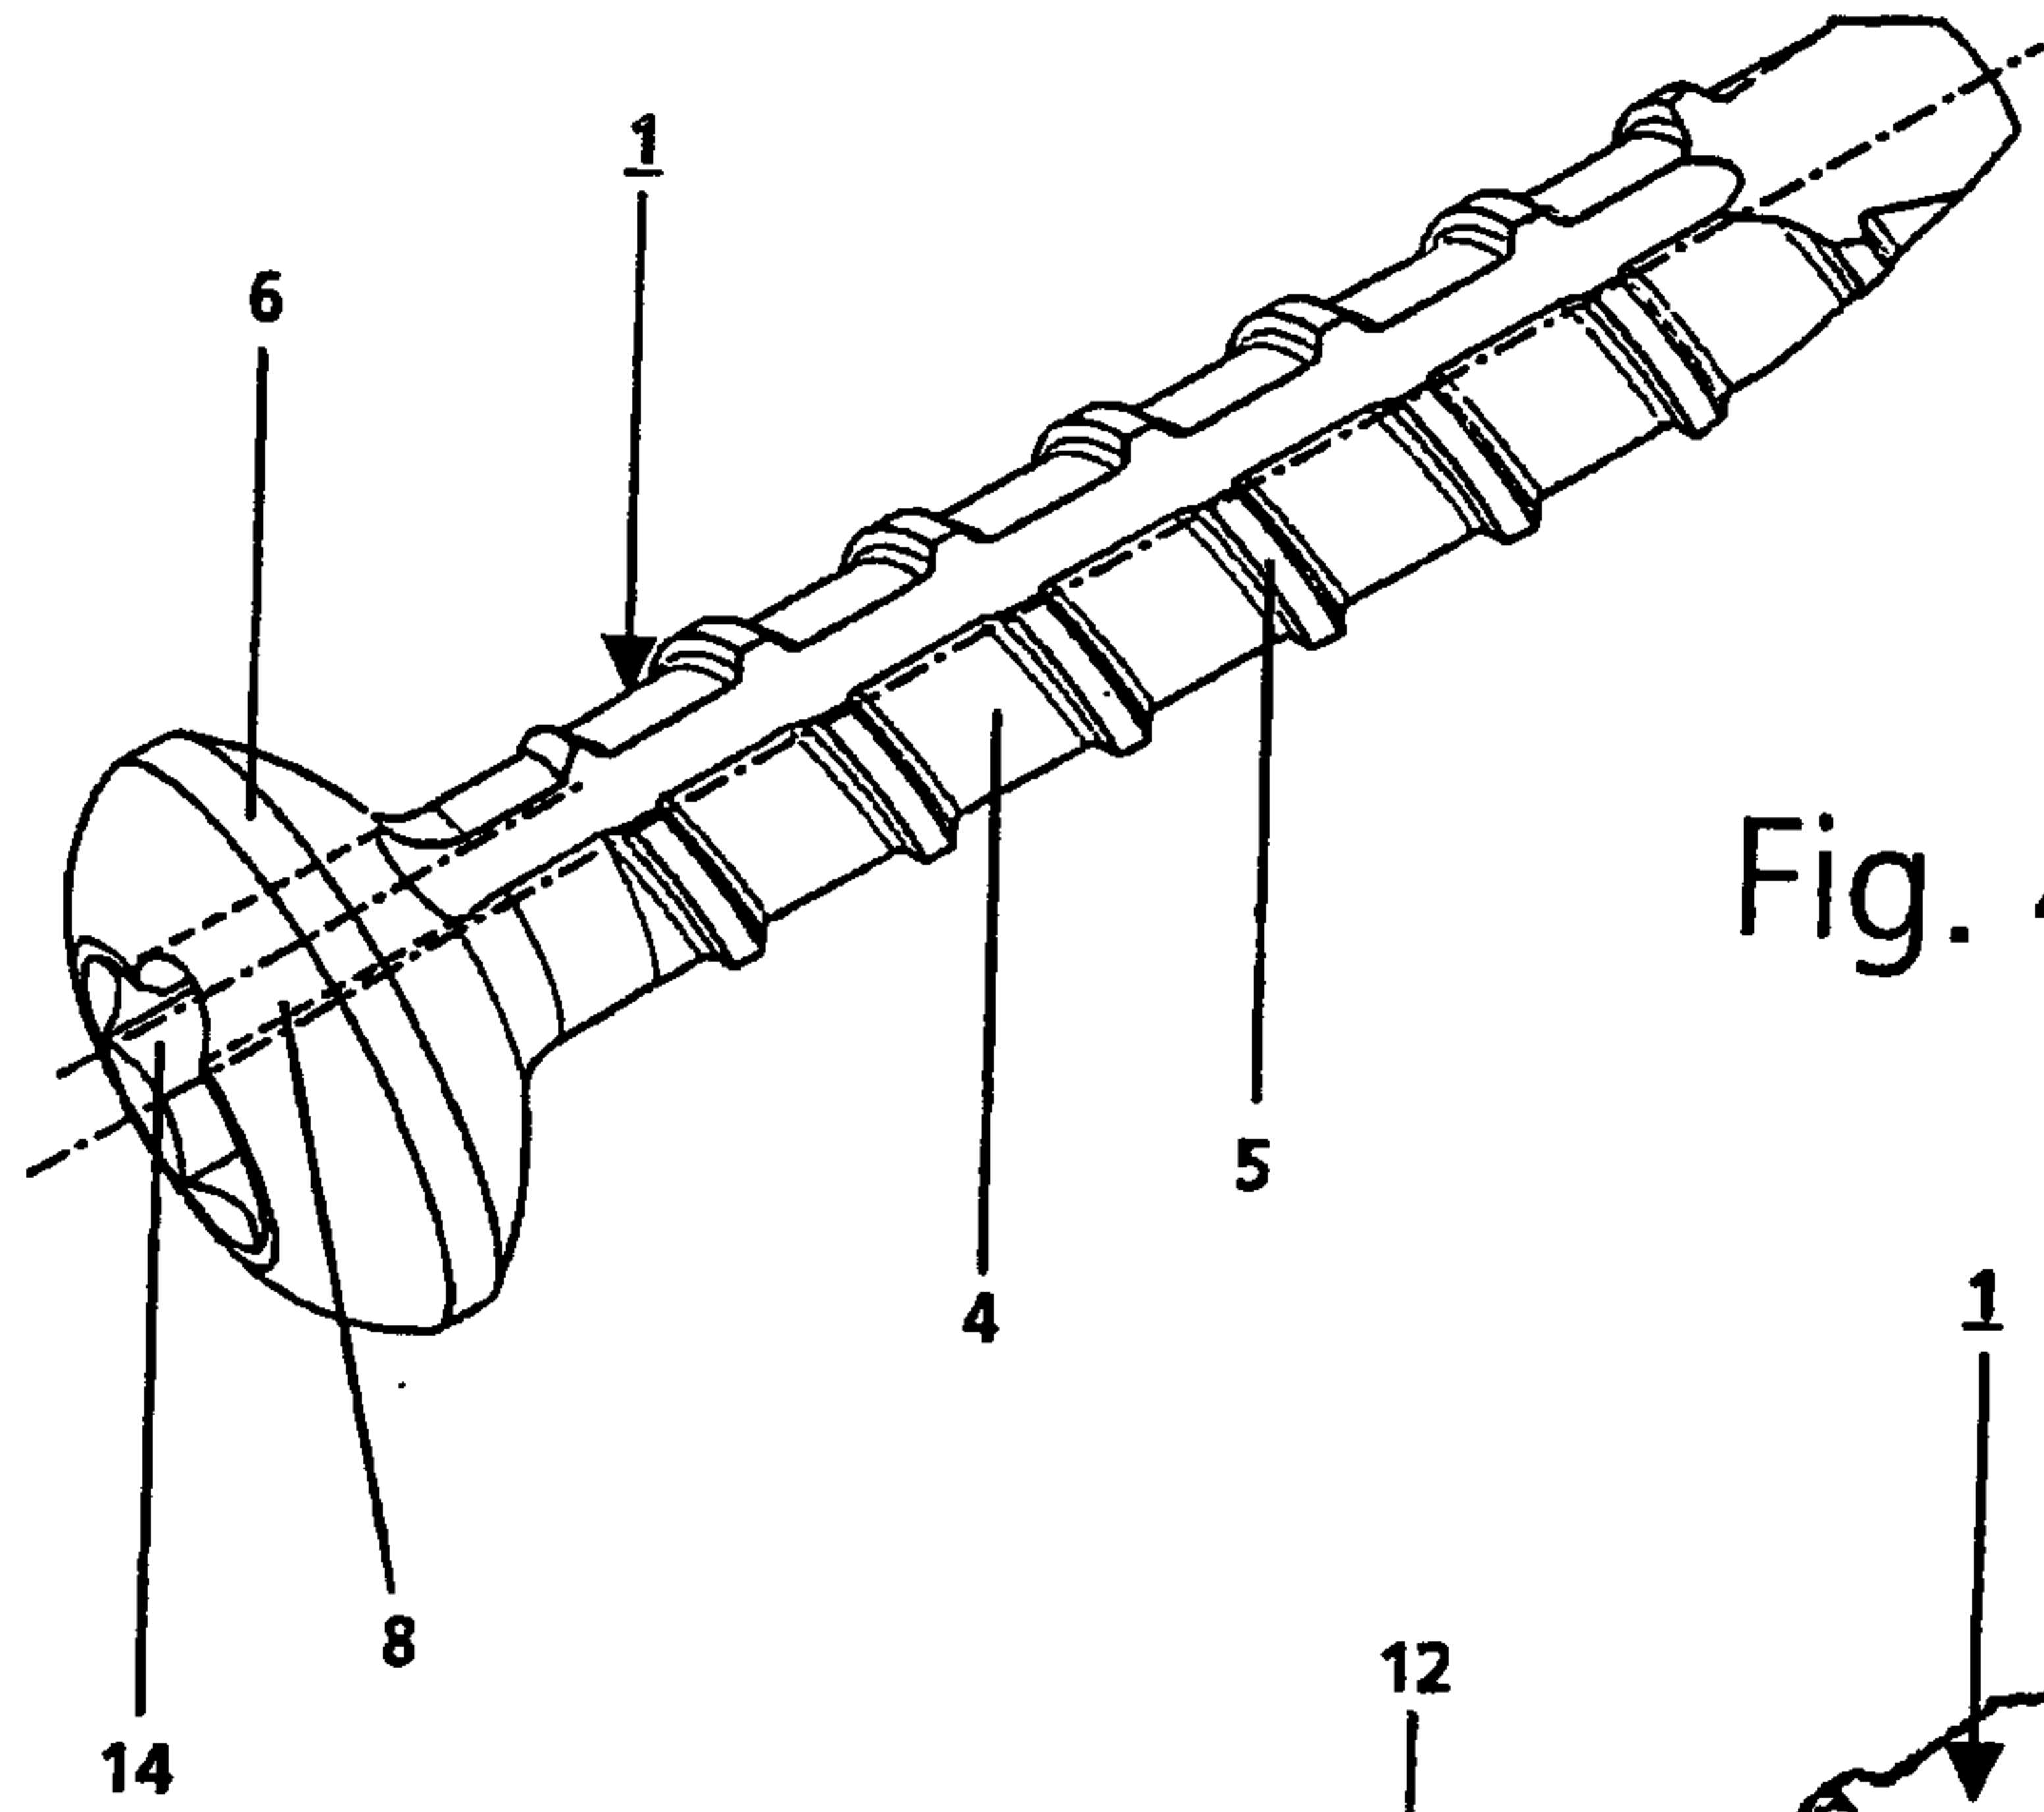


Fig. 4

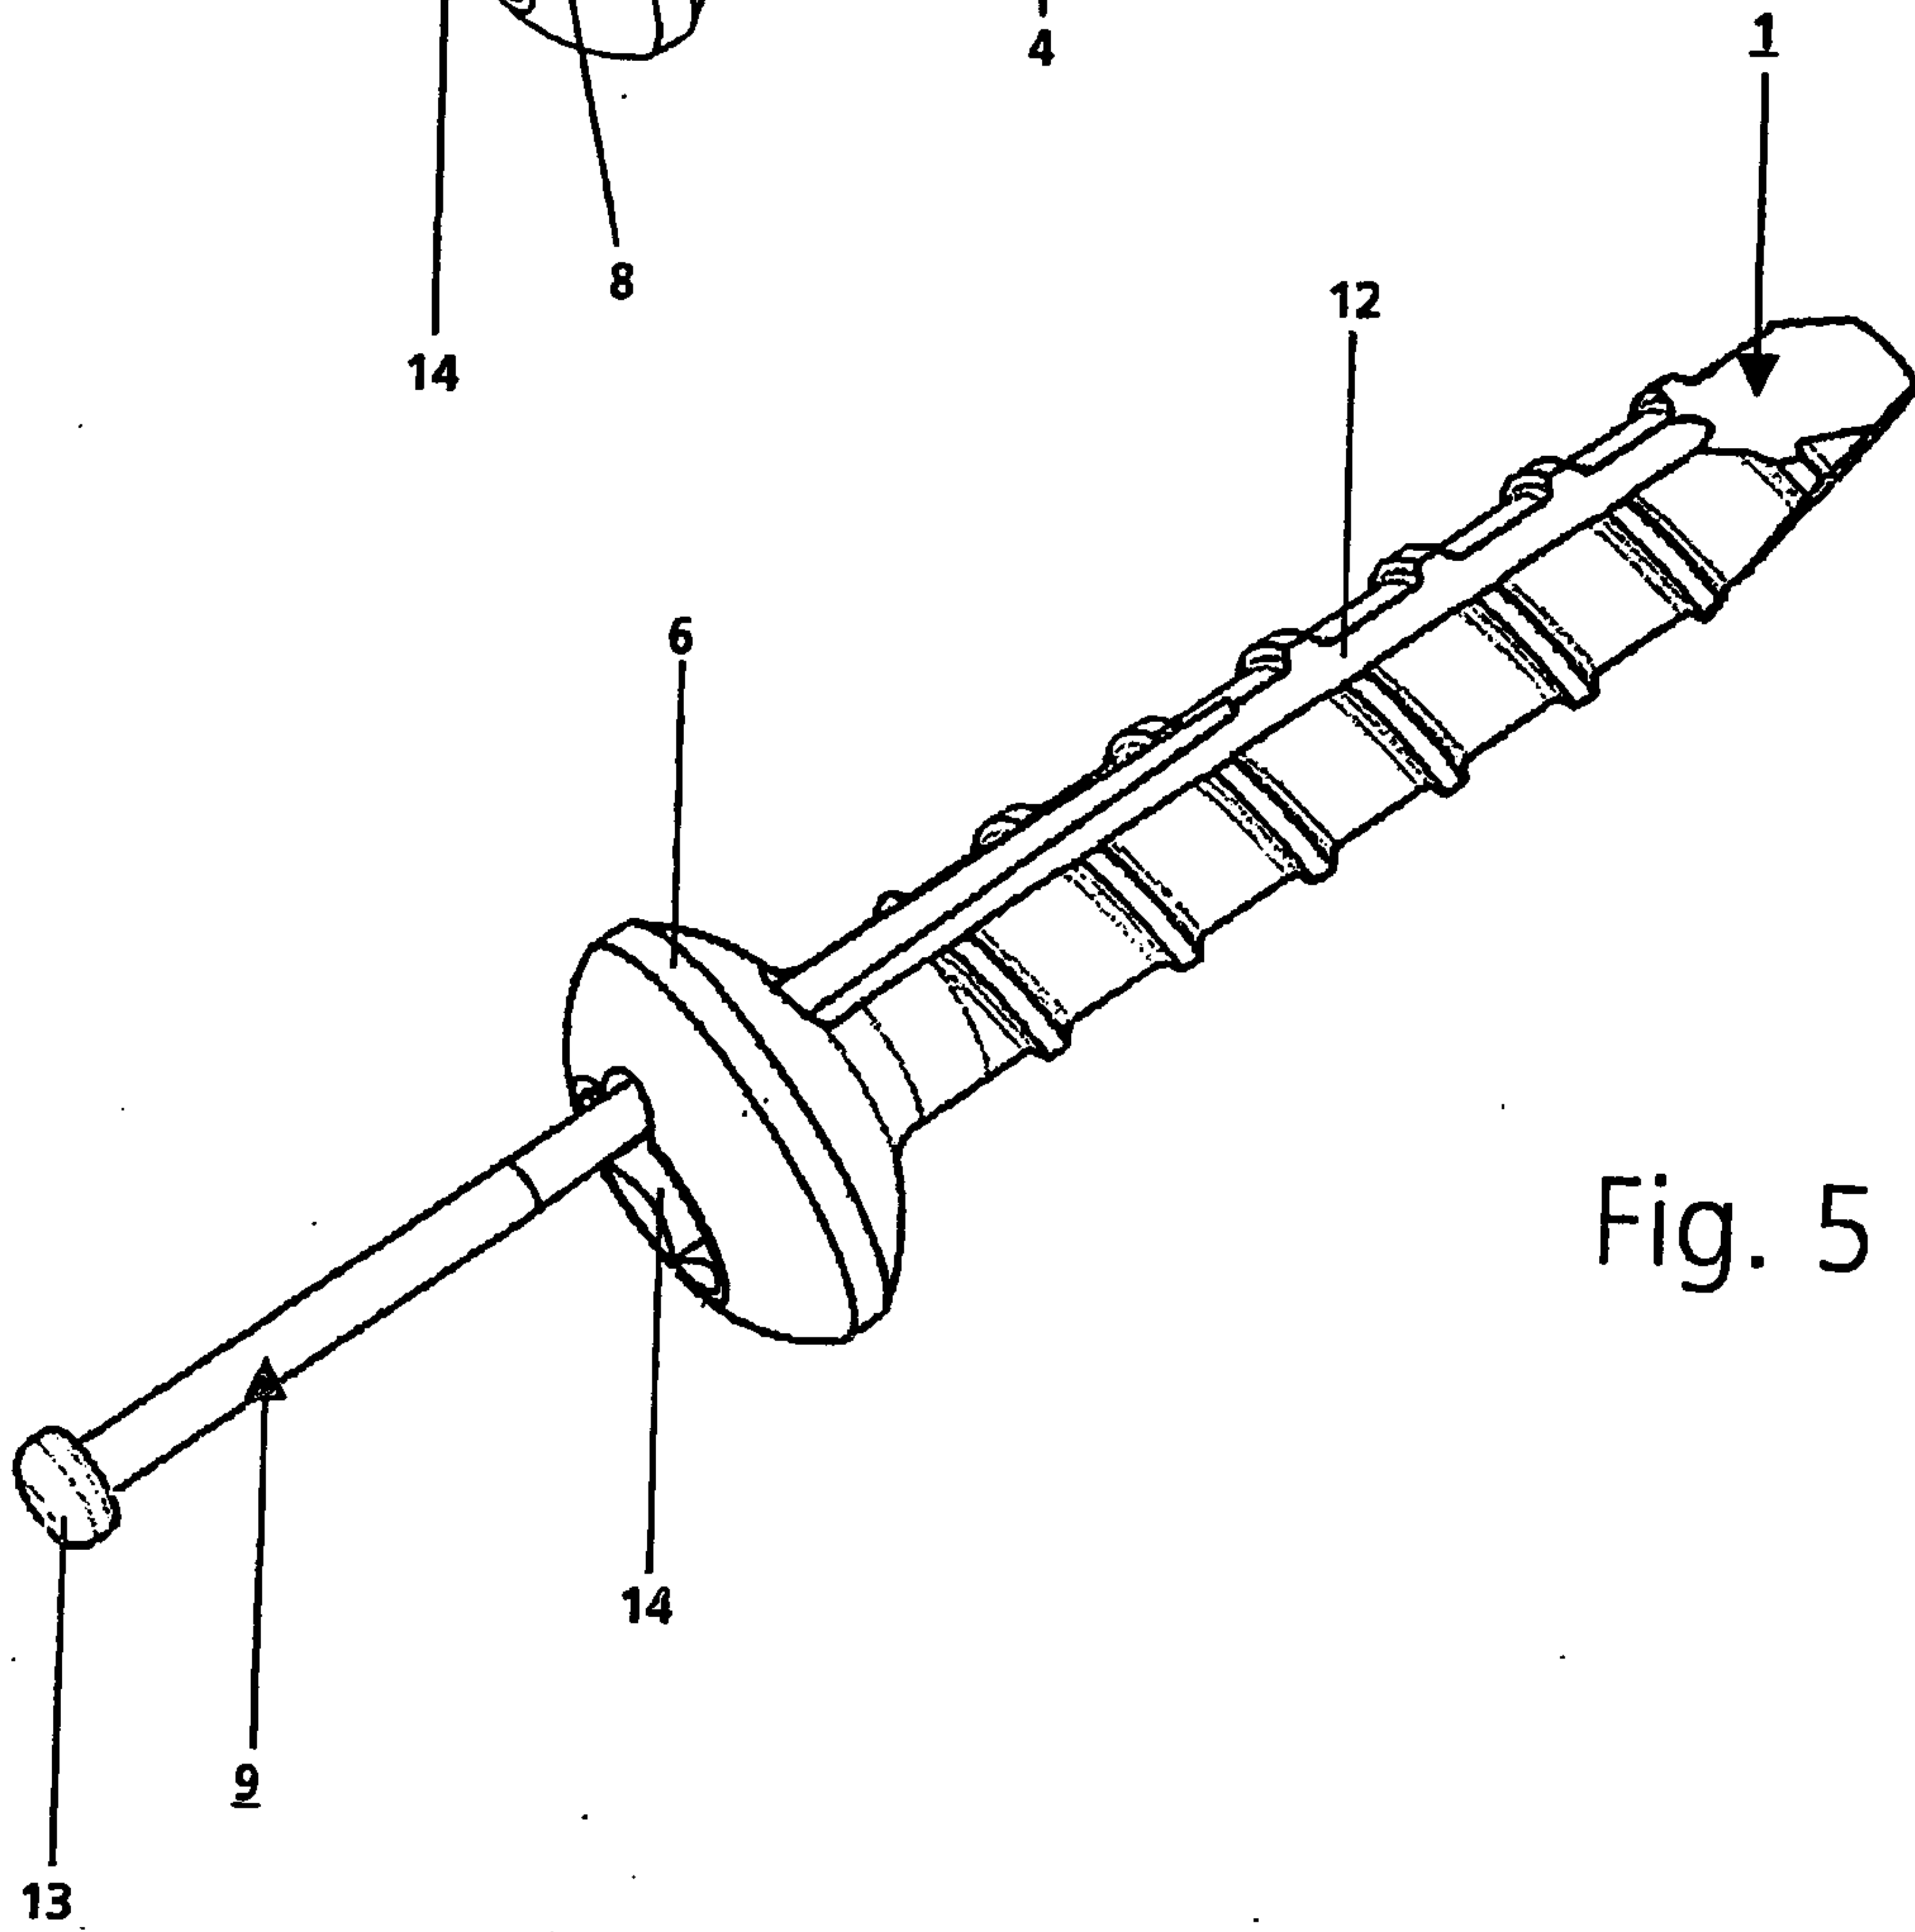


Fig. 5

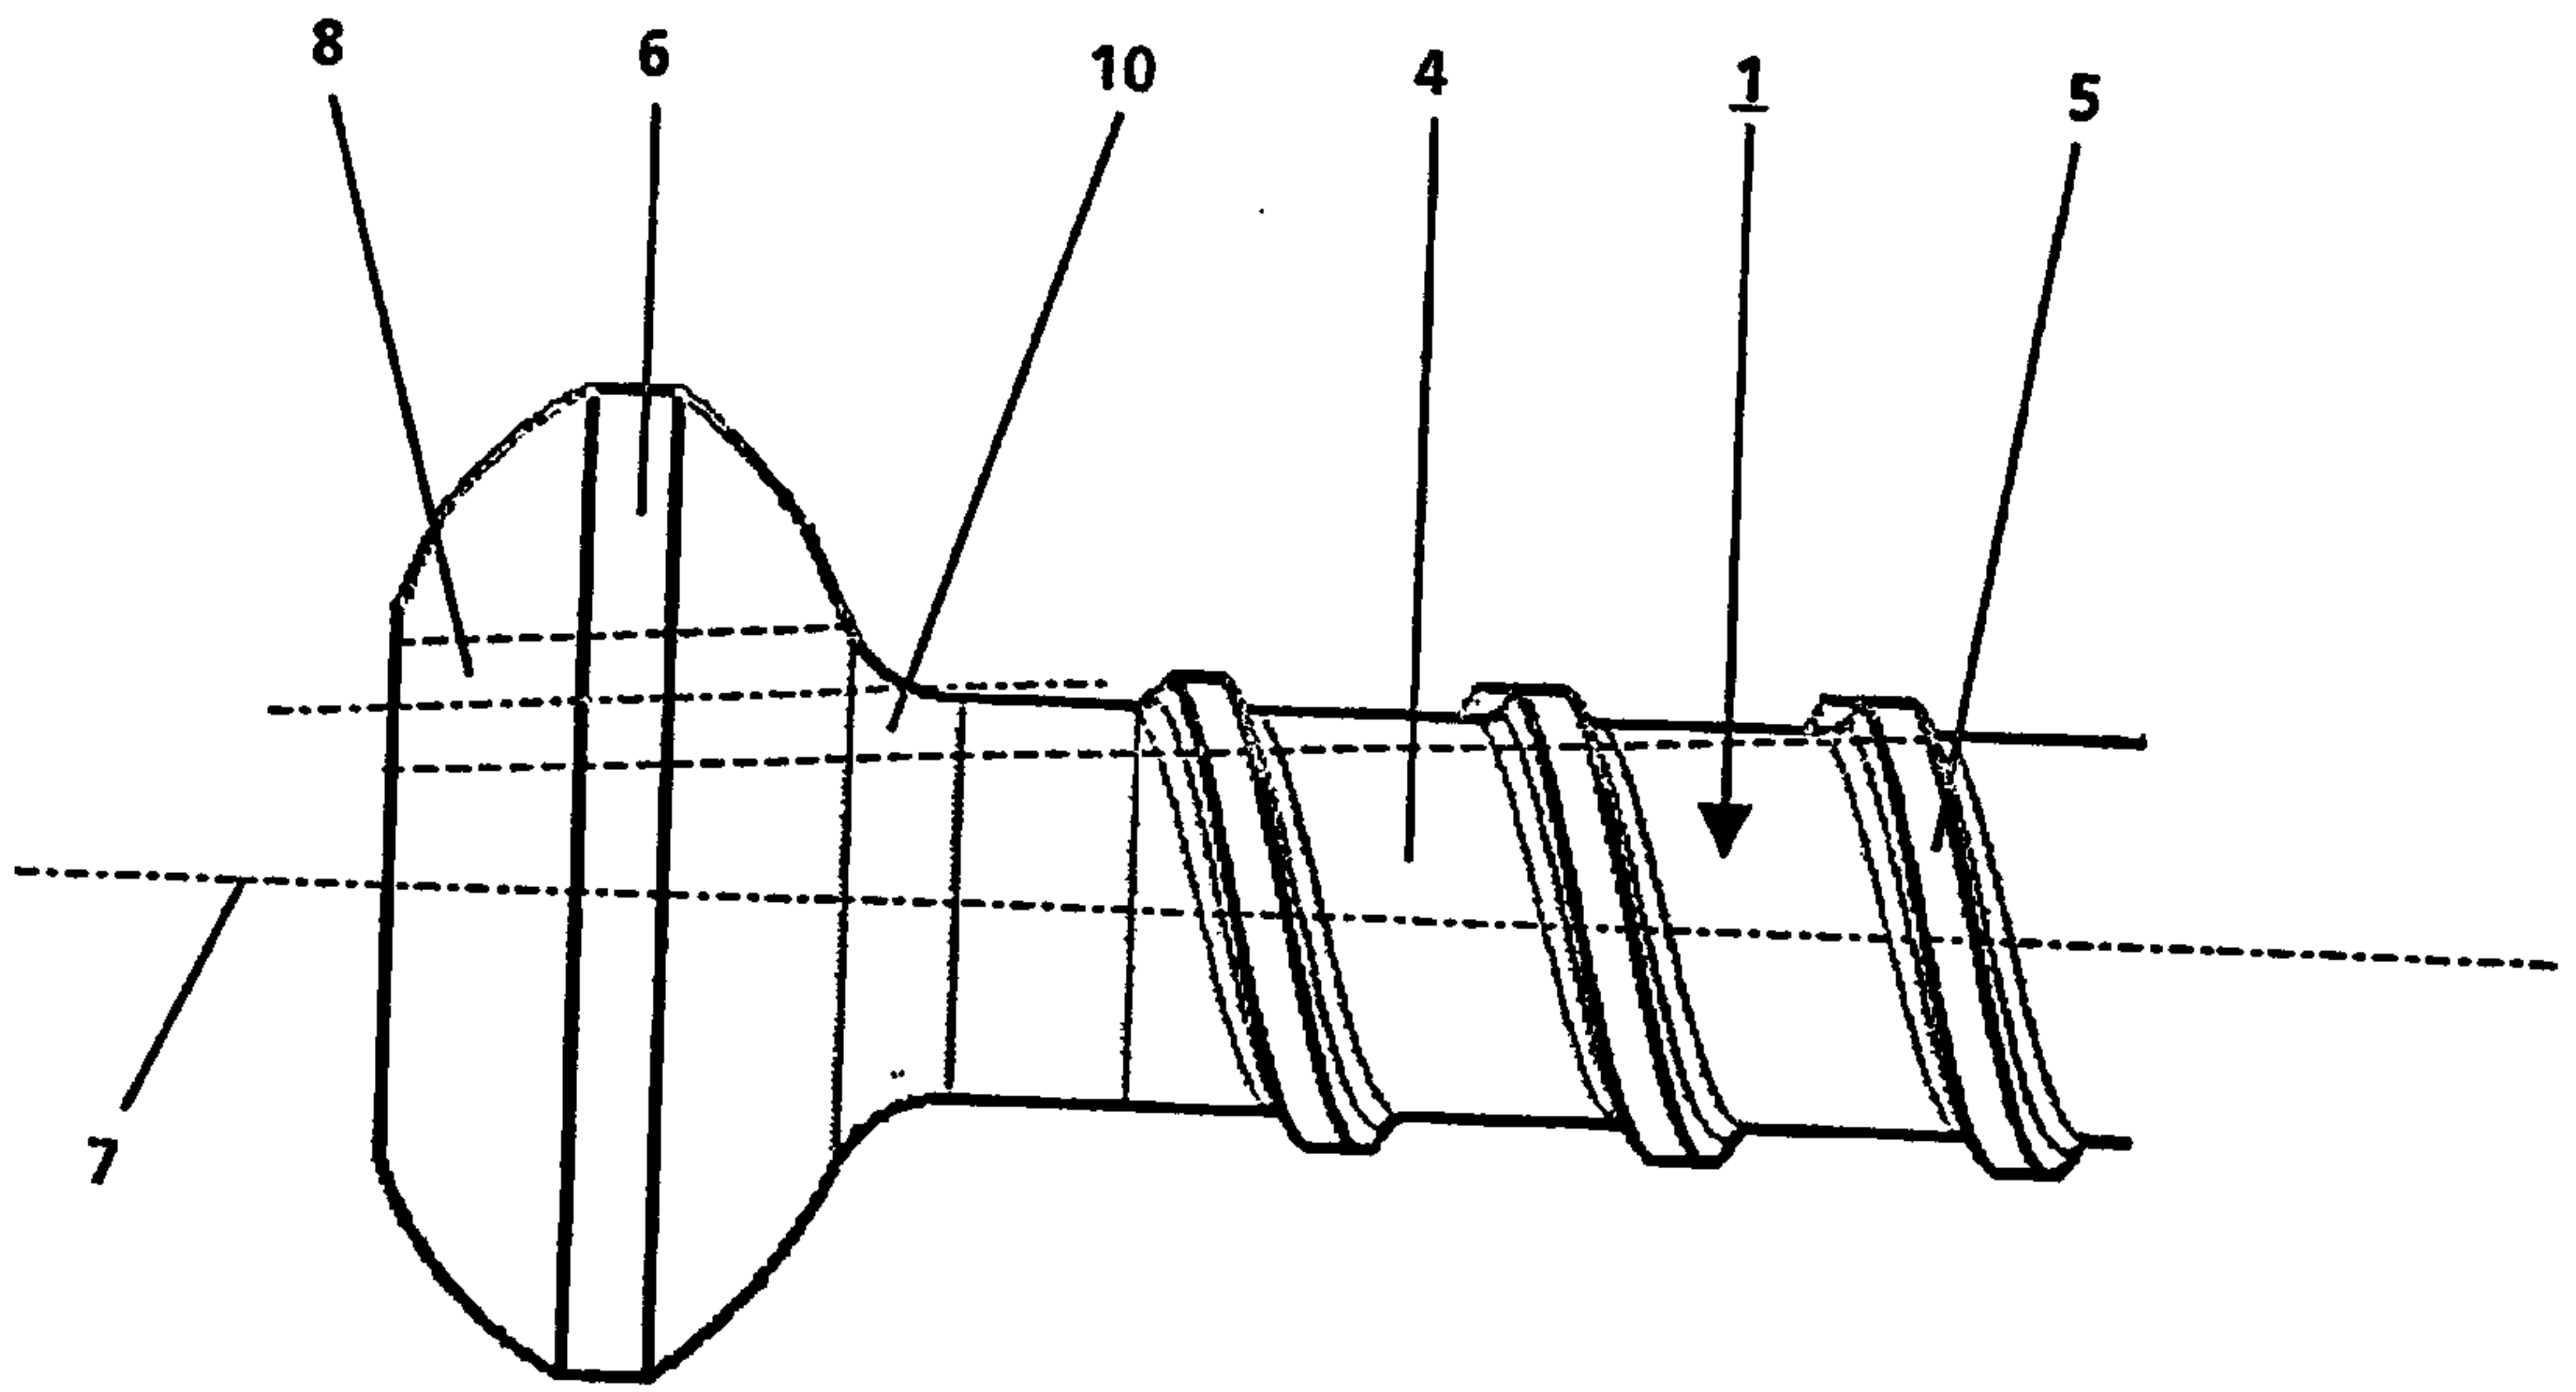


Fig. 6

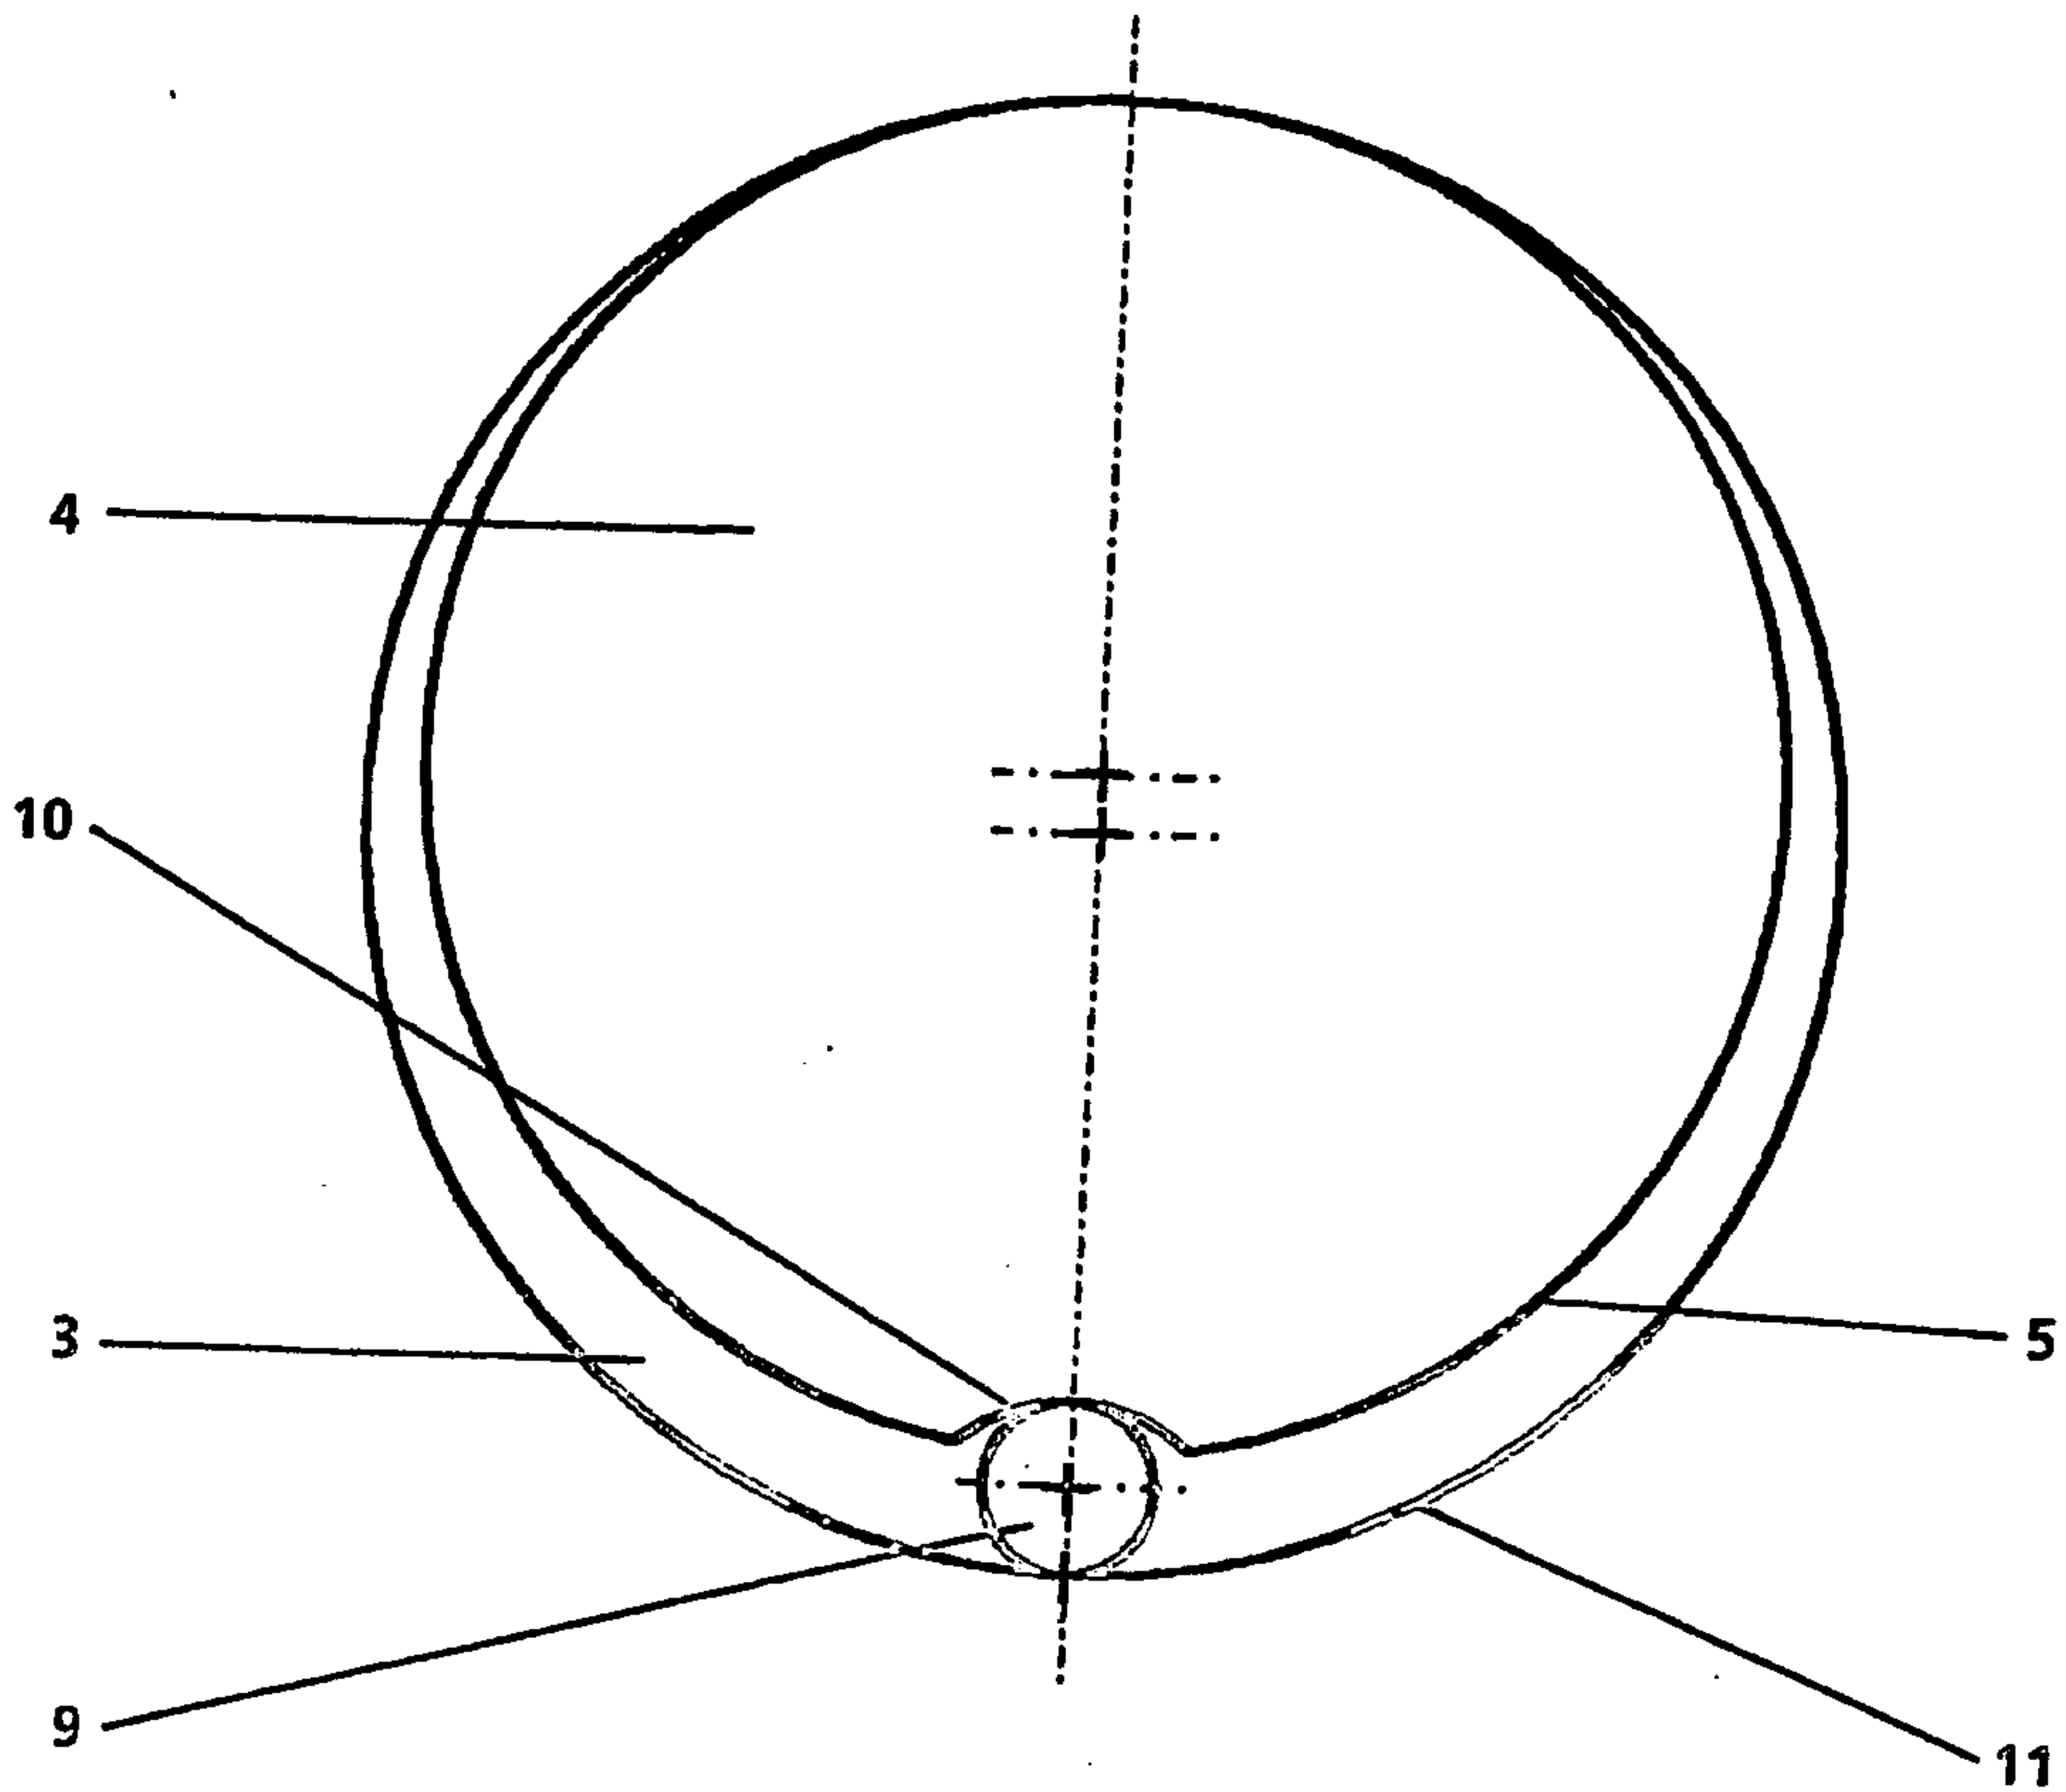


Fig. 7

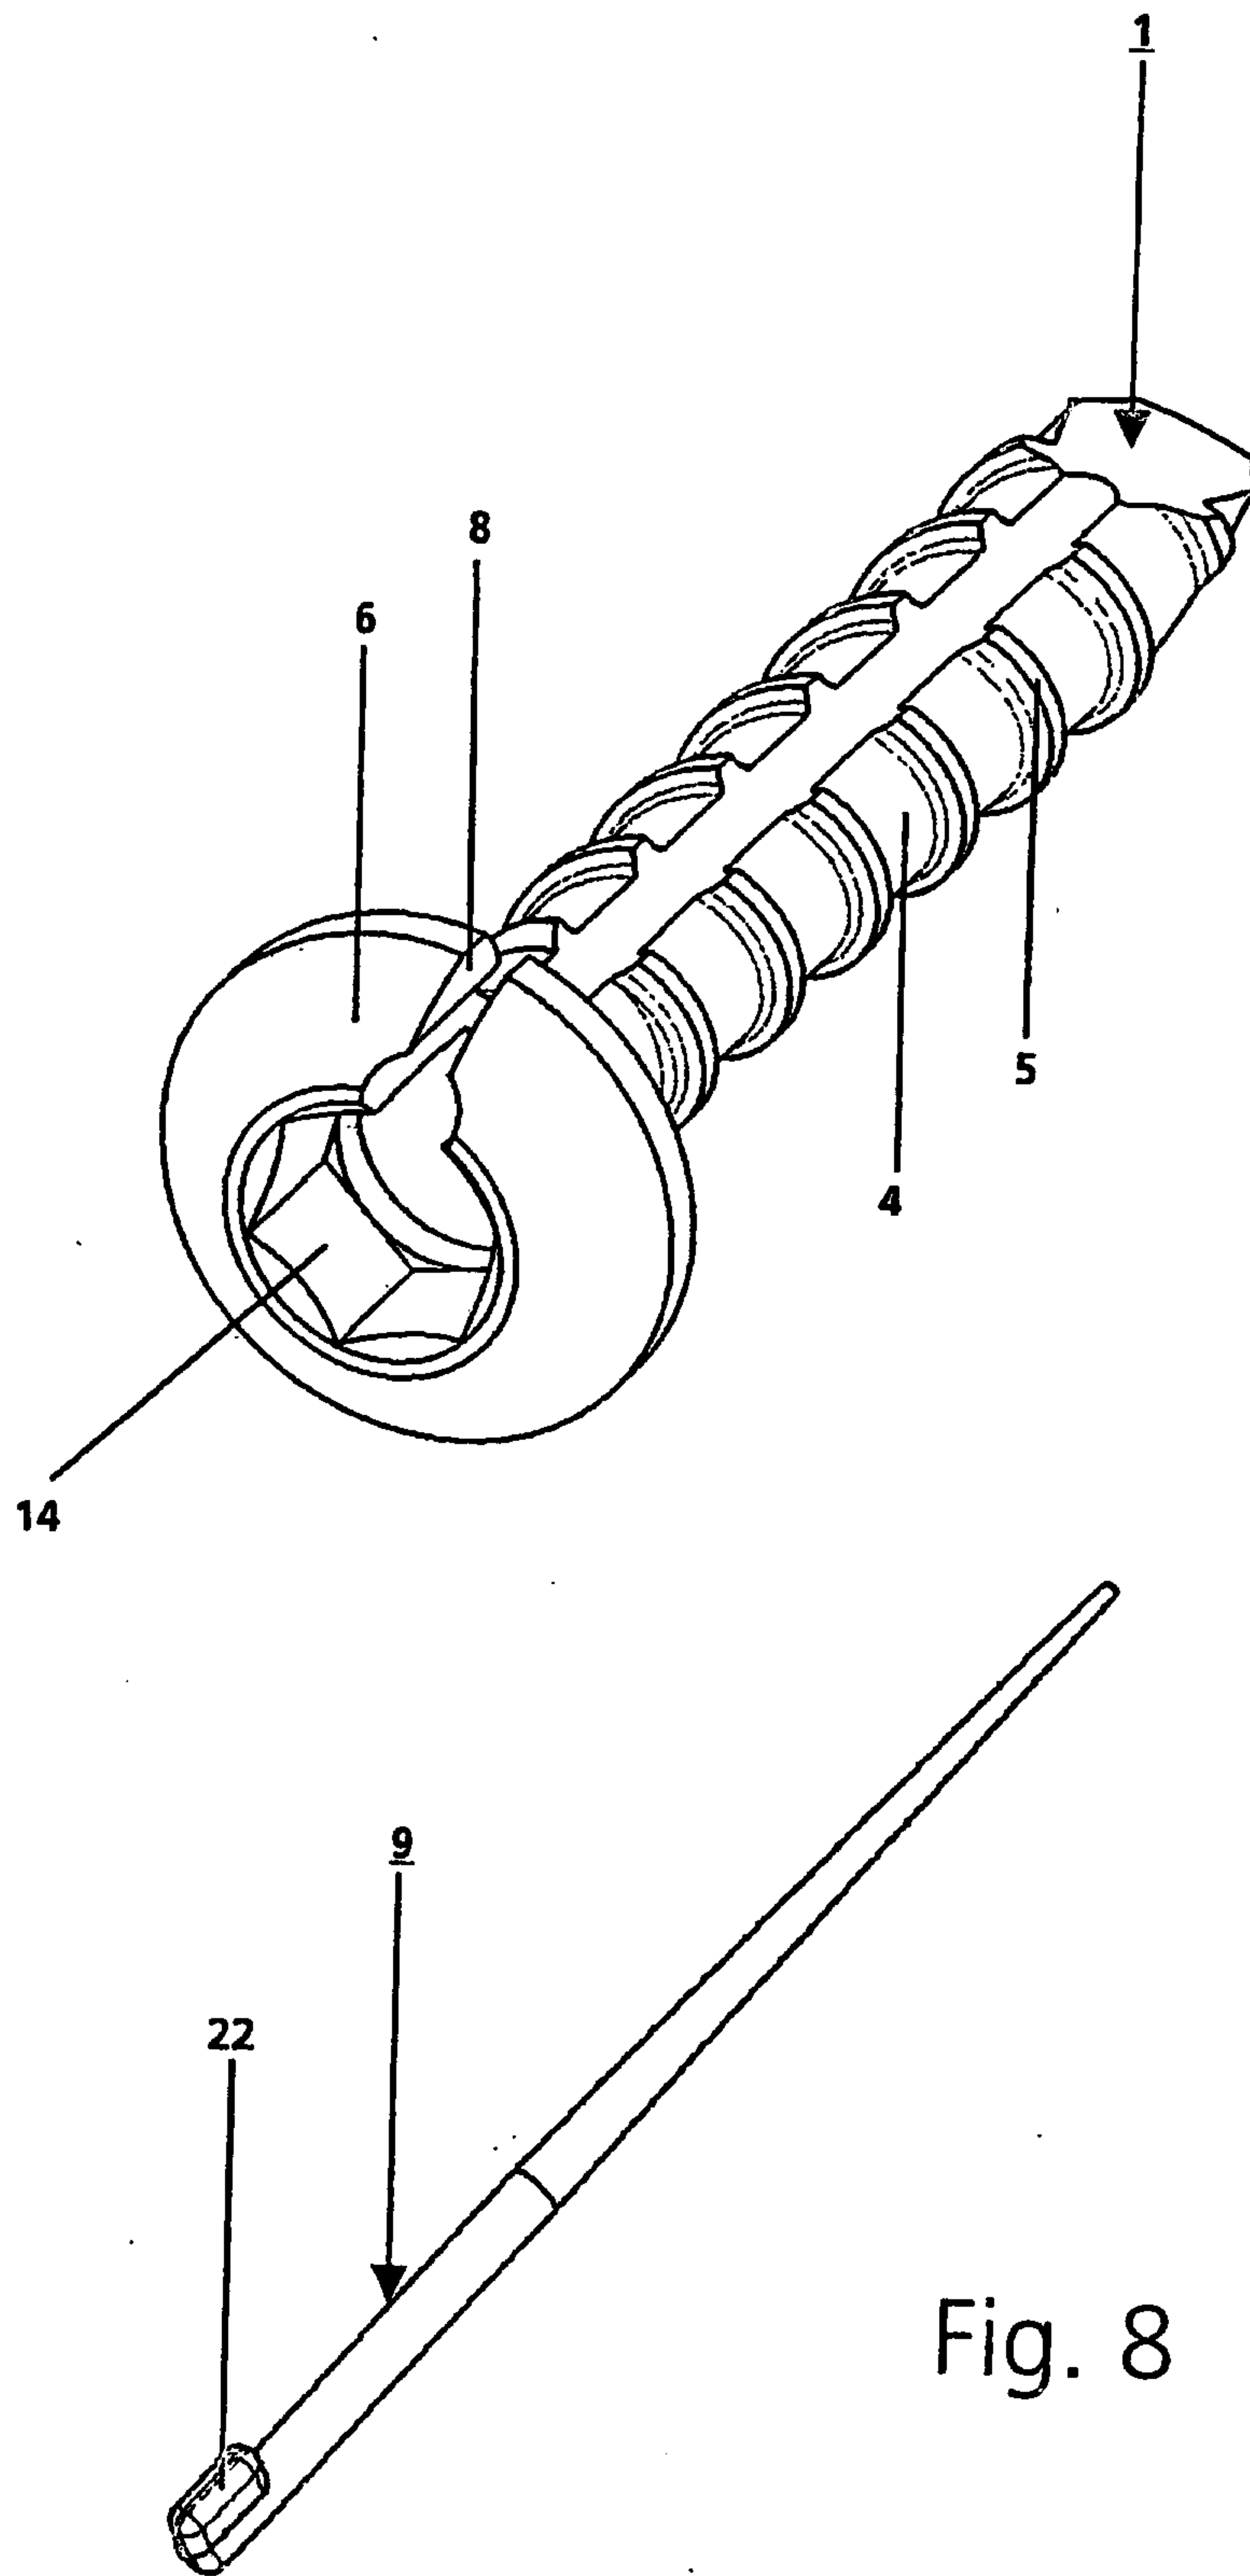


Fig. 8

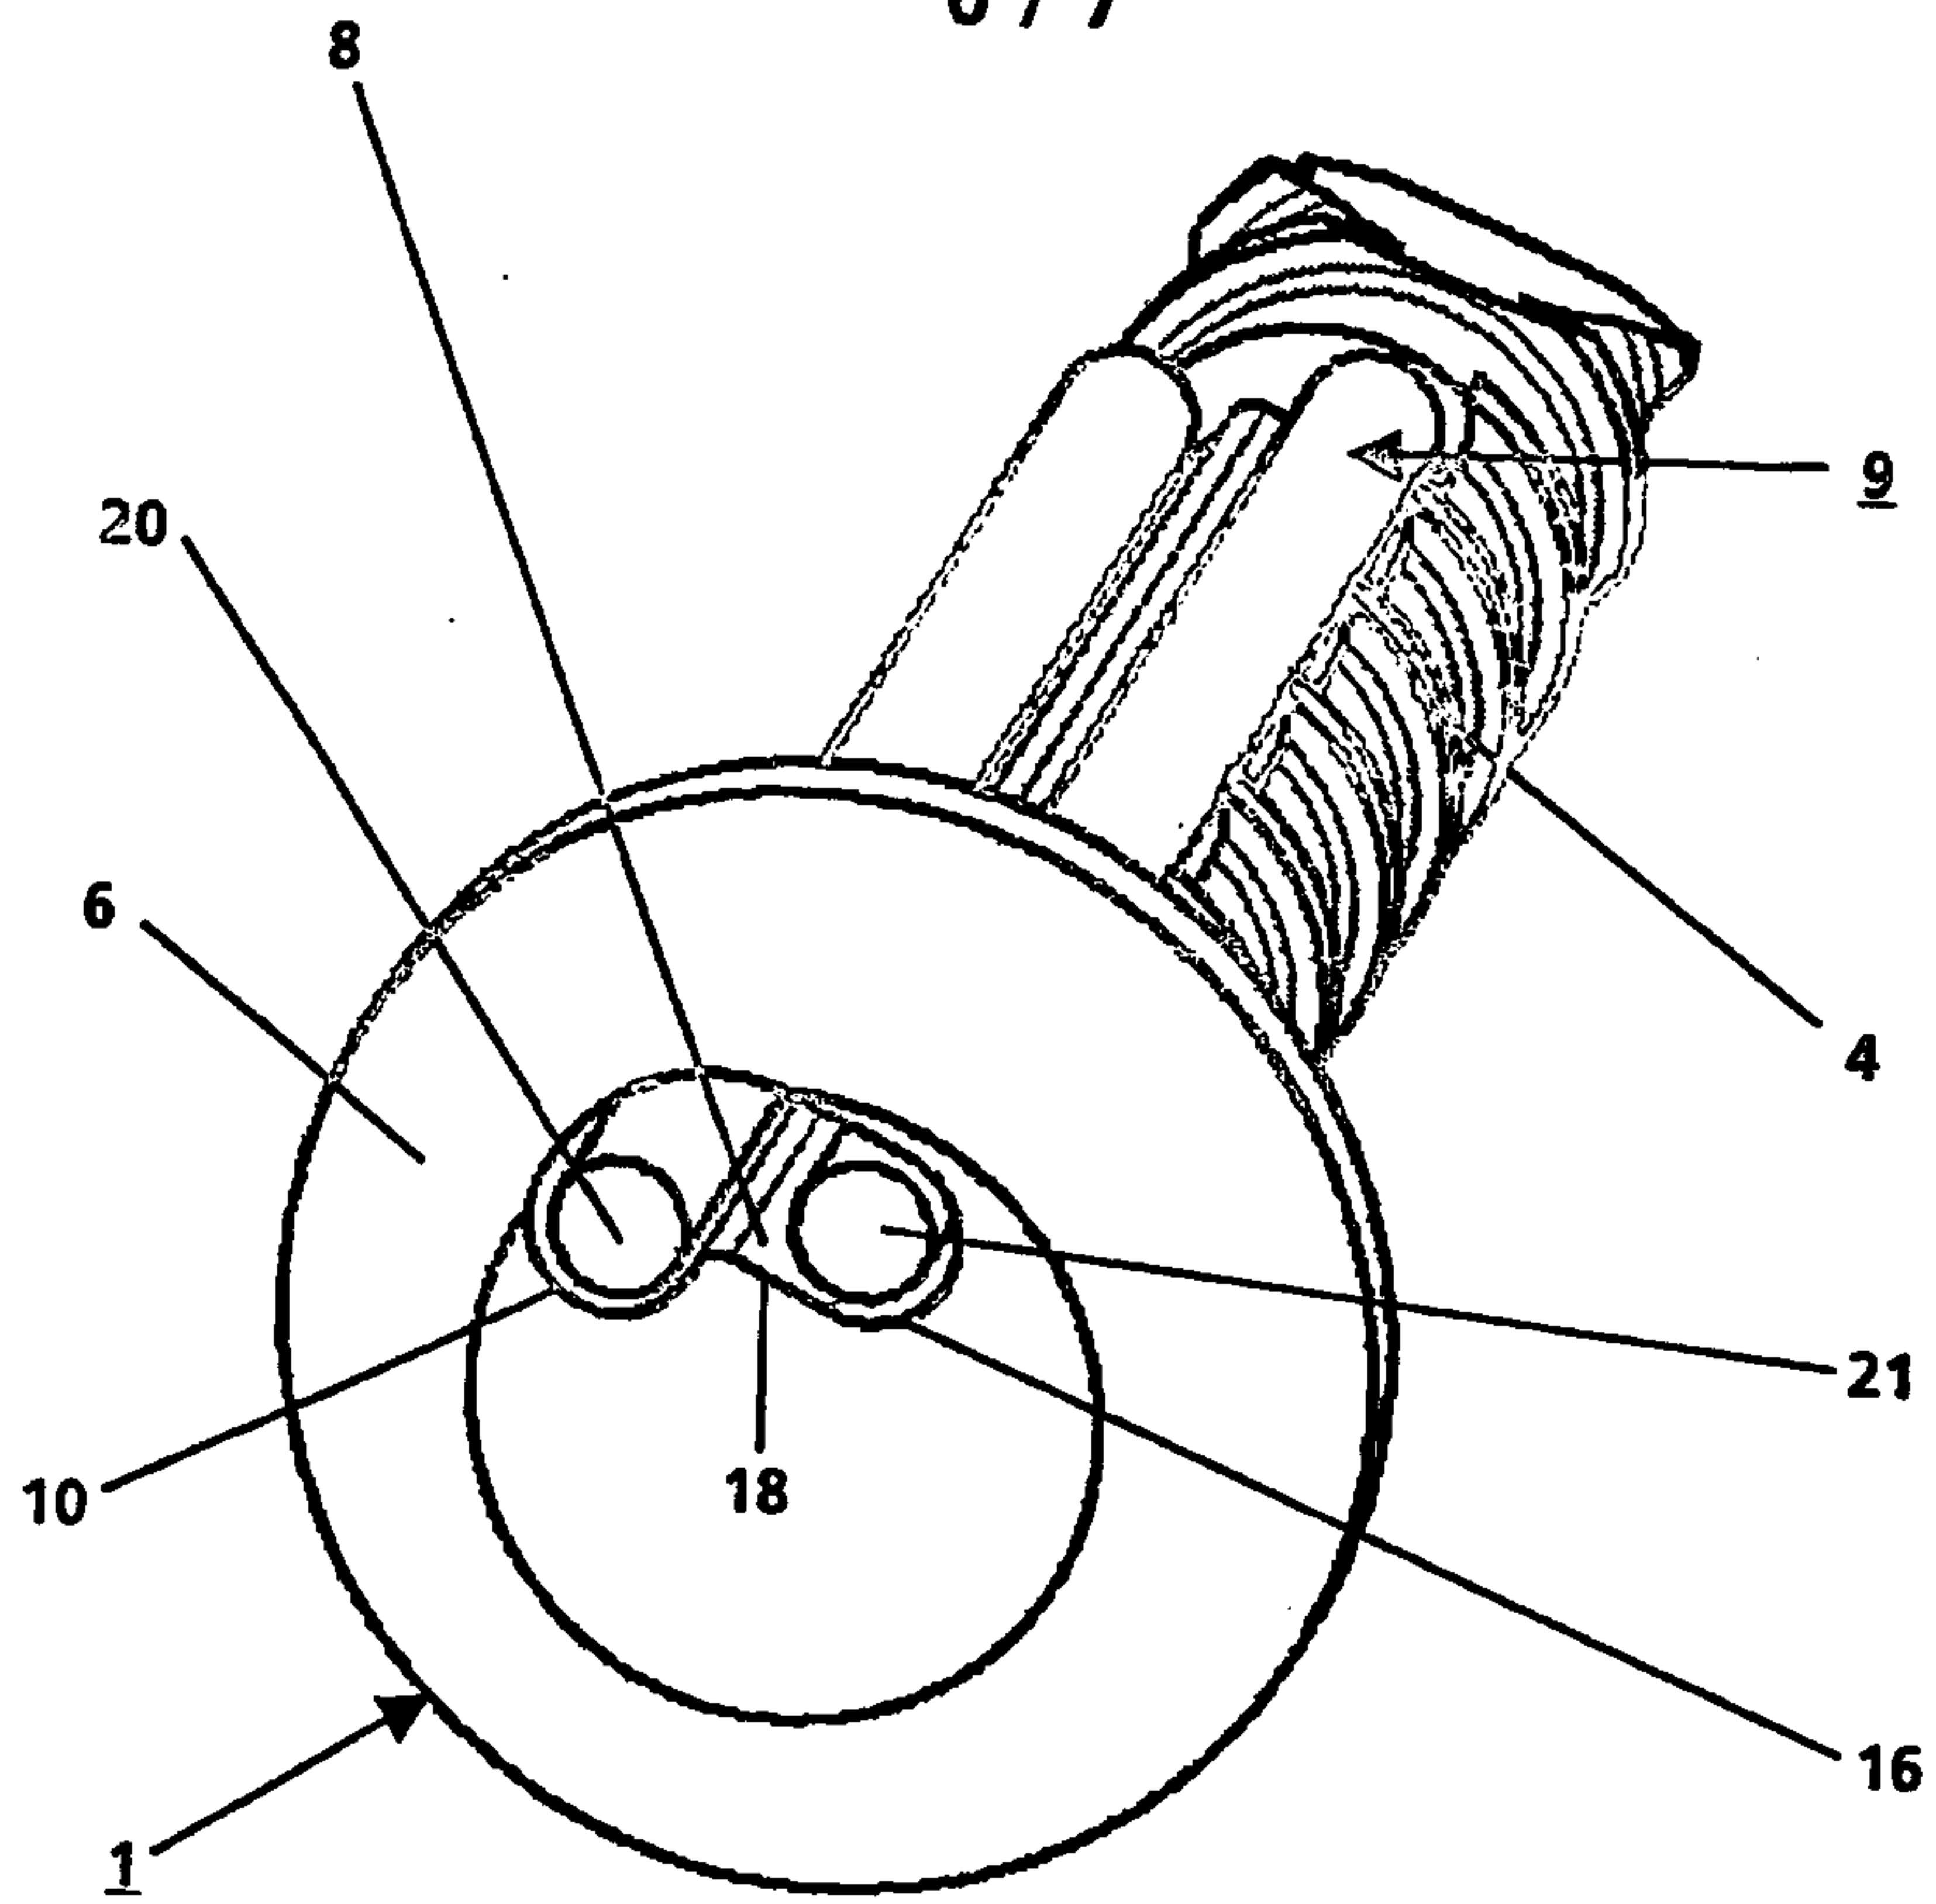


Fig. 9

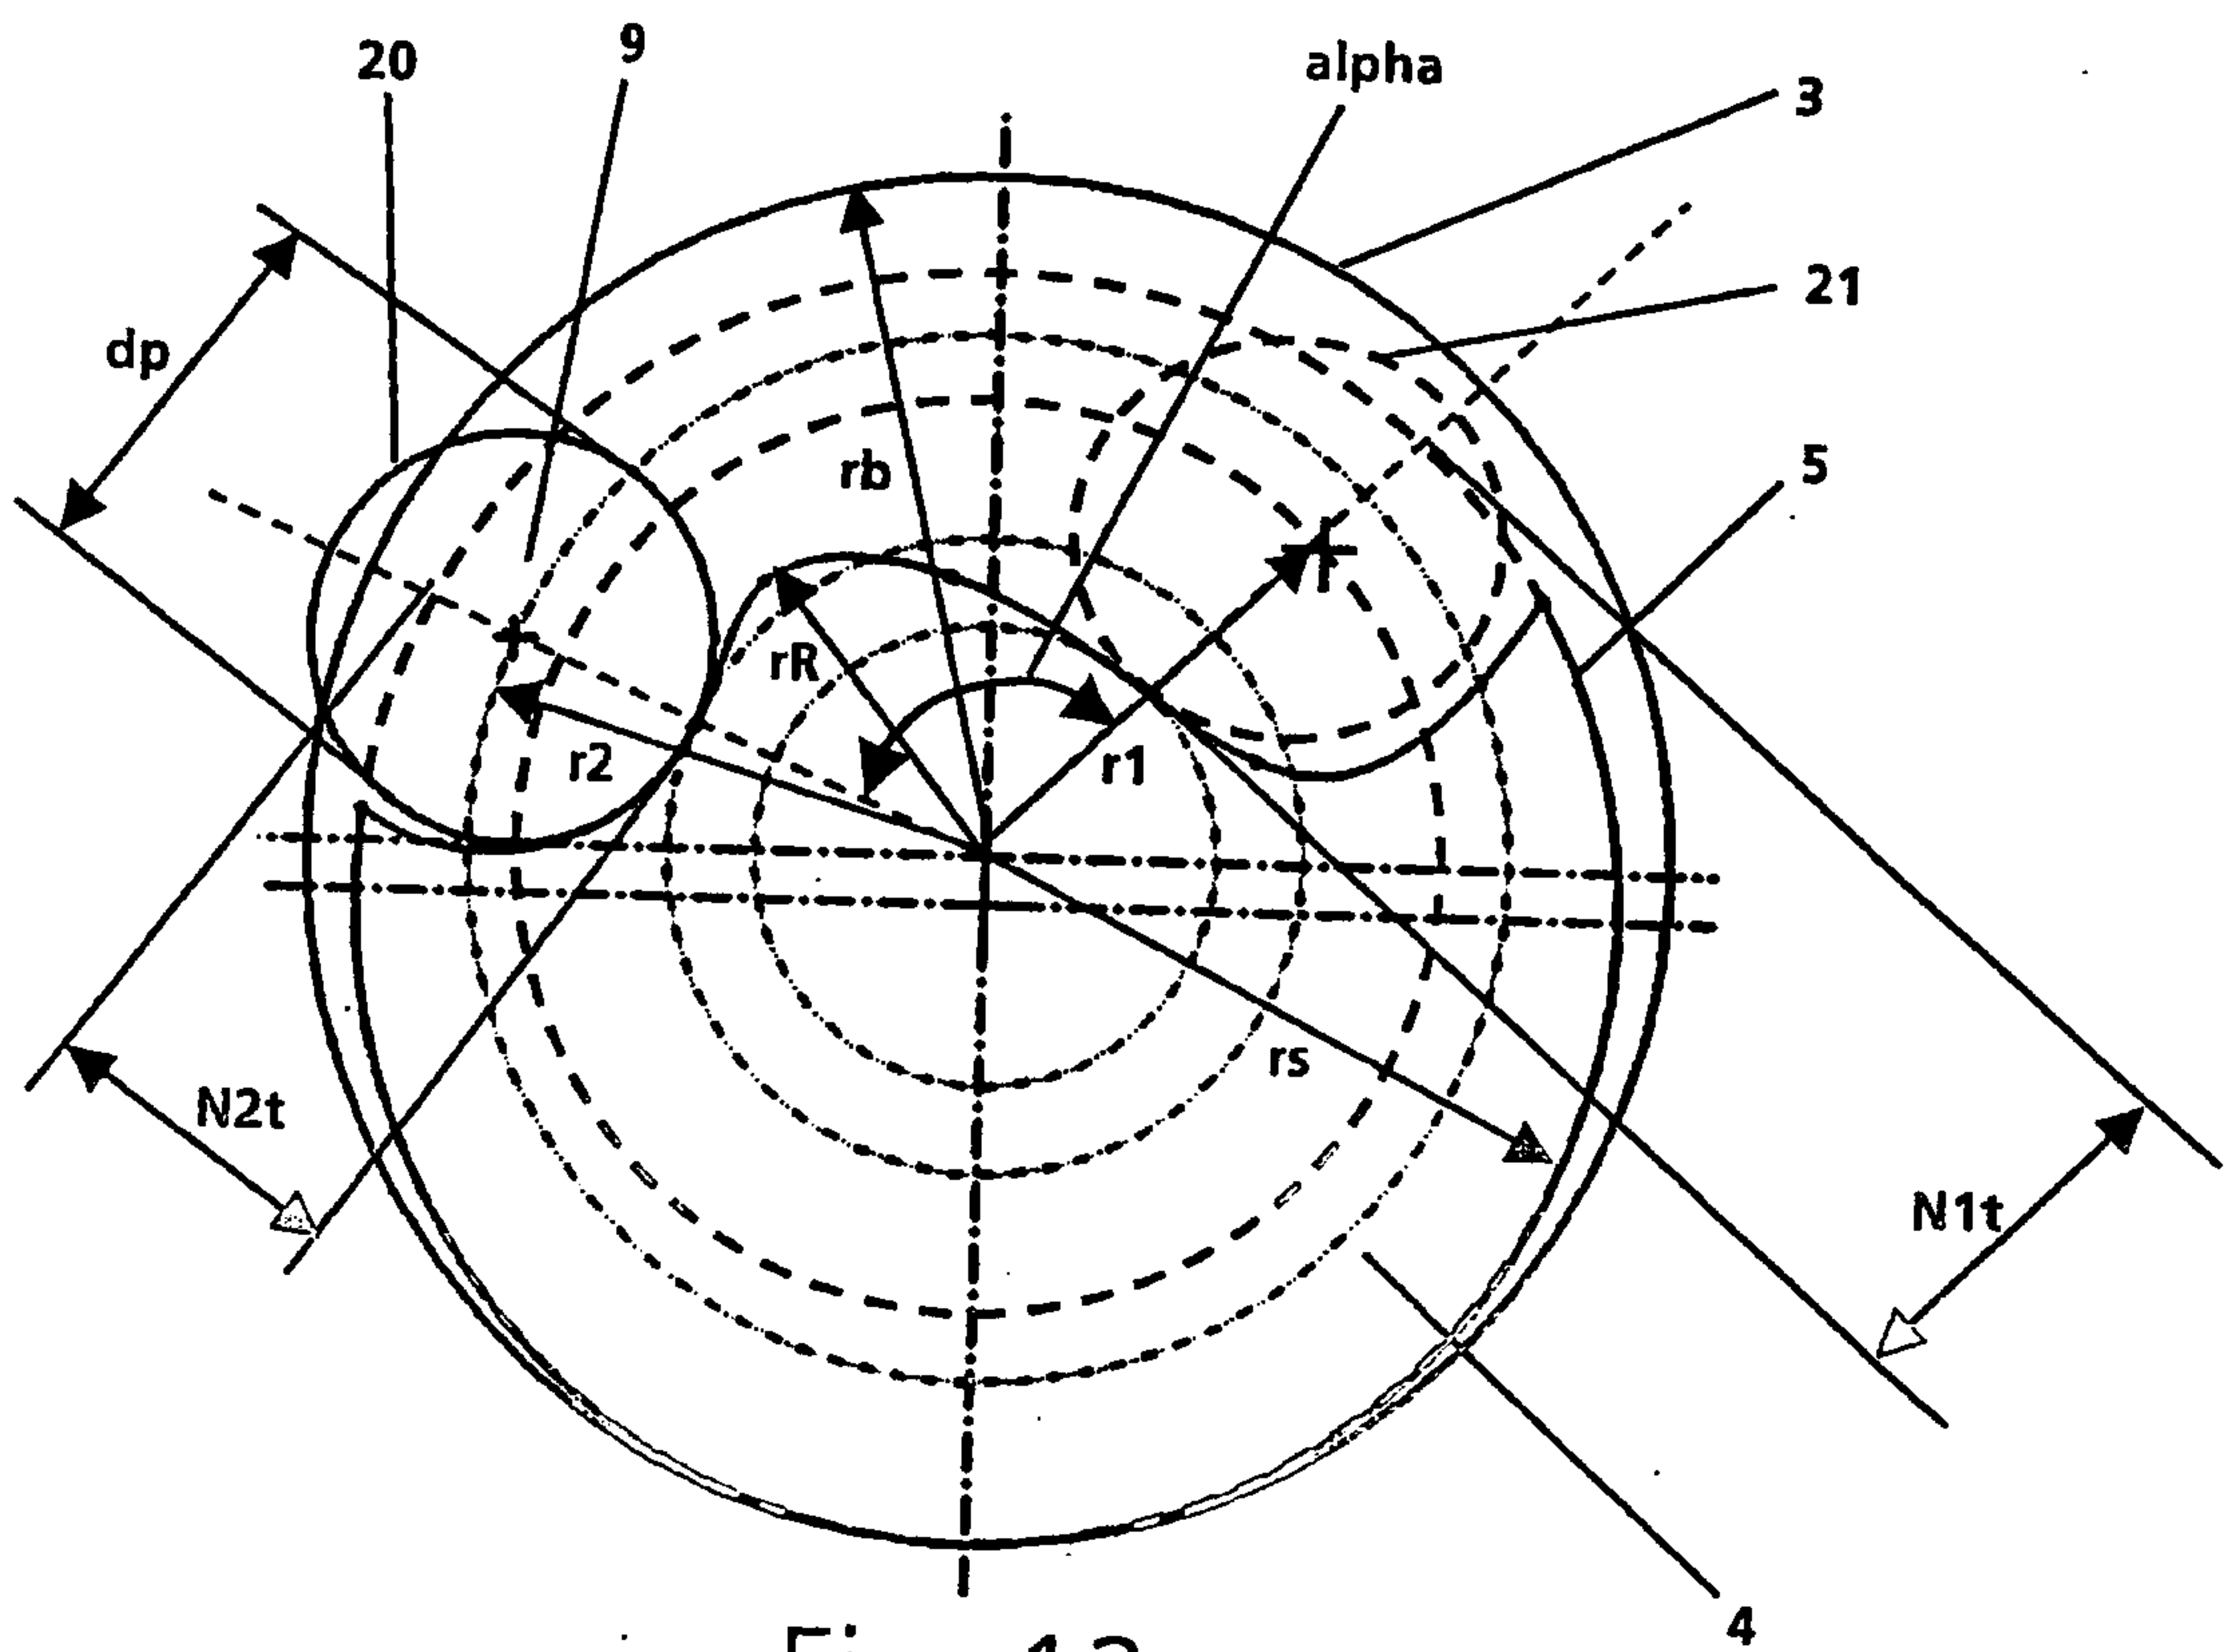


Fig. 12

