




- (51) International Patent Classification:  
*F02C 7/06* (2006.01)     *F01D 25/18* (2006.01)
- (21) International Application Number:  
PCT/US2014/013757
- (22) International Filing Date:  
30 January 2014 (30.01.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
61/761,554     6 February 2013 (06.02.2013)     US
- (71) Applicant: UNITED TECHNOLOGIES CORPORATION [US/US]; One Financial Plaza, Hartford, CT 06101 (US).
- (72) Inventors: SNYDER, Ryan, K.; 418 Weir St., Glastonbury, CT 06033 (US). KISSELBRACK, Kari, L.; 31 Payne Blvd., Portland, CT 06480 (US). BERUBE, Jesse, Ian; 34 Forest Hill Drive, Simsbury, CT 06070-2167 (US). O'BRIEN, Michael, C.; 78 Quiet Woods Road, East Hampton, CT 06424 (US). HEIMS, Eric, J.; 361 Contry Club Road, Avon, CT 06001 (US). MATTE, Ryan, Timothy; 16 Tammie Ann Drive, East Hampton, CT

06424 (US). GUARDI, Vito; 100 Vine Street, Stratford, CT 06614 (US). PARADISE, Bruce; 560 Huckleberry Hill Road, Avon, CT 06001 (US).

- (74) Agent: MILLER, Thomas, A.; Miller, Matthias & Hull LLP, One North Franklin, Suite 2350, Chicago, IL 60606 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: OIL CONTROL MODULE

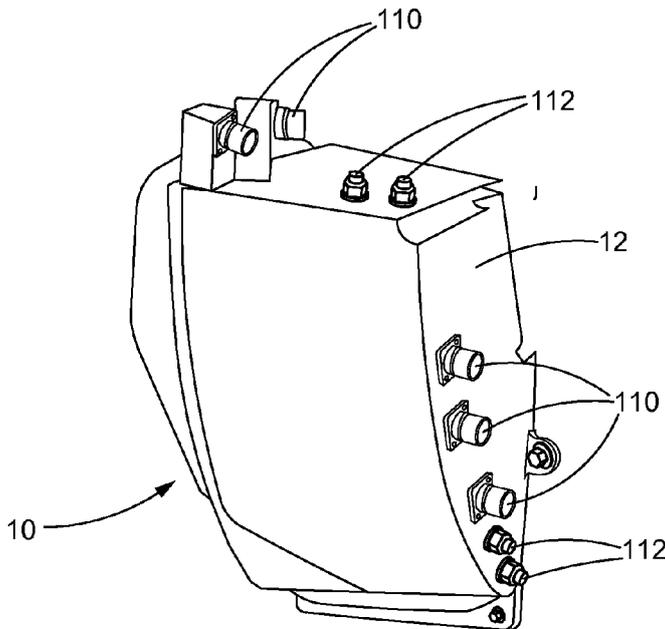

**FIG. 4**

(57) Abstract: An oil control module for a gas turbine engine is provided comprising a housing on which numerous components of a lubricating system are mounted. The components may include a variable oil reduction valve/shuttle valve, a main oil pressure sensor, a main oil temperature sensor, a main oil filter delta pressure sensor, an oil debris monitor, a lube filter, an active oil damper valve, a cool oil orifice, a knock down orifice and a lube trim orifice. By packing numerous lubricating system components onto or within a housing located adjacent to the gas turbine engine, the oil control module reduces cost and weight and simplifies the maintenance of the lubricating system.

WO 2014/123740 A1

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**  
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with international search report (Art. 21(3))*  
GW, KM, ML, MR, NE, SN, TD, TG).

## OIL CONTROL MODULE

### FIELD OF THE DISCLOSURE

[0001] The subject matter of the present disclosure relates generally to lubricating control systems for jet aircraft. More particularly, the subject matter of the present disclosure relates to an oil control module for a jet aircraft lubricating system in which various components of the lubricating system are condensed within the module to make it easier to package and maintain the various components of the lubricating system.

### BACKGROUND OF THE DISCLOSURE

[0002] Gas turbine engines typically comprise a fan delivering air into a compressor section where the air is compressed before being delivered into a combustion section. In the combustion section the air is mixed with fuel and ignited to provide propulsion for the aircraft. Combustion products pass downstream over turbine rotors which are driven to rotate by the combustion products. A lubricating system provides oil to engine bearings, gears and other components within the engine.

[0003] The present disclosure is directed to an oil control module for a gas turbine jet aircraft lubricating system in which various components of the lubricating system are condensed within the module, thereby eliminating numerous oil tubes and connections.

## SUMMARY OF THE DISCLOSURE

[0004] According to an embodiment of the disclosure, an oil control module (OCM) is provided in which various components of the lubricating system are condensed within the module. By co-locating (packing) numerous lubricating system components within an OCM housing located adjacent to the gas turbine engine, the OCM of the present disclosure reduces cost and weight and simplifies the maintenance of the lubricating system. The OCM also permits improved hardware packaging in a highly limited engine design space.

[0005] The OCM may comprise a housing having an exterior and defining an interior; one or more oil processing components hard mounted to the housing, a lube filter located within the housing and one or more plug-like devices defining orifices located within the housing and configured to passively regulate the flow of oil in circuits located within the oil control module.

[0006] The oil processing components may include a variable oil reduction valve/shuttle valve, a main oil pressure sensor, a main oil temperature sensor; a main oil filter delta pressure sensor; and an oil debris monitor. The oil processing components may be hard mounted to the exterior of the housing.

[0007] The one or more plug-like devices may include a cool oil orifice, a knock down orifice, and a lube trim orifice. Preferably the plug-like devices are configured and positioned within the housing so they can easily be changed out.

[0008] The oil control module may further comprise a lube filter located within the housing.

[0009] The oil control module may also comprise a plurality of oil tubes running into and out of the housing for accommodating fluid flow. The oil tubes may include a plurality of lube in lines and a plurality of lube out lines.

[0010] The oil control module may further comprise an active oil damper valve located in fluid communication with one of the lube out lines. The active oil damper valve may be hard mounted to the outside of the housing. The oil control module may further comprise a vent line running from the variable oil reduction valve/shuttle valve and tied into the active oil damper valve.

[0011] In another aspect of the disclosure an oil control module is provided comprising a housing containing multiple lubricating components and one or more internally manifolded systems that permit the functional interconnection between two or more of the components. The lubricating components may include a variable oil reduction valve/shuttle valve, a main

oil pressure sensor, a main oil temperature sensor, a main oil filter delta pressure sensor, an oil debris monitor, a lube filter, an active oil damper valve, a cool oil orifice, a knock down orifice and a lube trim orifice.

[0012] In still another aspect of the disclosure a method of installing lubricating system components for a gas turbine engine, the method comprising the steps of:

providing an oil control module comprising a housing, one or more oil processing components hard mounted to an exterior of the housing, and one or more plug-like devices defining oil flow control orifices located within the housing; and

mounting the oil control module to the gas turbine engine, preferably aft of the compressor section and forward the turbine section.

[0013] Although the different examples described herein may have the specific components shown in the illustrations, embodiments of this disclosure are not limited to those particular combinations of components. It is possible to use some of the components or features from one of the examples in combination with features or components from another one of the examples.

**BRIEF DESCRIPTION OF THE DRAWINGS**

[0014] So that the manner in which the concepts of the present disclosure recited herein may be understood in detail, a more detailed description is provided with reference to the embodiments illustrated in the accompanying drawings. It is to be noted, however, that the accompanying drawings illustrate only certain embodiments and are therefore not to be considered limiting of the scope of the disclosure, for the concepts of the present disclosure may admit to other equally effective embodiments. Moreover, the drawings are not necessarily to scale, emphasis generally being placed upon illustrating the principles of certain embodiments.

[0015] Thus, for further understanding of these concepts and embodiments, reference may be made to the following detailed description, read in connection with the drawings in which:

[0016] Figure 1 is a schematic diagram of a first embodiment of an oil control module according to the present disclosure;

[0017] Figure 2 is a schematic diagram of a second embodiment of an oil control module according to the present disclosure;

[0018] Figure 3 is a side perspective view of a jet engine equipped with an oil control module; and

[0019] Figure 4 is an enlarged side perspective view of the oil control module of Figure 3.

## DETAILED DESCRIPTION

[0020] The present disclosure relates to a lubricating system for jet aircraft in which pressurized oil flows to various areas of the engine. In particular, the disclosure relates to an oil control module for a jet aircraft lubricating system in which various components of the lubricating system are condensed within an oil control module that is easy to package and easy to maintain. Components that would normally be distributed in various locations throughout the lubricating system and separately plumbed, such as valves and sensors, are consolidated into a single oil control module.

[0021] The oil control module eliminates numerous tube routings and connections that would normally be required to connect the various lubricating system components by consolidating them into a single oil control module. These advantages are especially important in newer geared engines having more complex lubricating systems but less space for packaging lubricating components. The oil control module is not limited to geared engines however, since the oil control module can be part of a lubricating system that lubricates bearings and/or other components.

[0022] Turning to the figures, Figure 1 is a schematic diagram of a first embodiment of an oil control module 10 according to the present disclosure. The oil control module 10 (OCM) comprises a housing 12 to which may be mounted, either externally or internally, numerous lubricating system components such as a variable oil reduction valve/shuttle valve (VORV) 14, a main oil pressure sensor 16 (MOP), a main oil temperature sensor 18 (MOT), a main oil filter delta pressure sensor 20 (MOFDP), and an oil debris monitor 22 (ODM) and a main oil filter 24 (a.k.a. lube filter). The OCM 10 may further comprise plug-like devices for controlling oil flow, including a cool oil orifice 28, a knock down orifice 30 and a lube trim orifice 32. A fourth orifice 34 may be located upstream of a last chance screen 36 which is external to the housing 12. In addition, the housing 12 may contain electronic control and power signals that interface with the lubricating system components. The various components may be plumbed in a manner that keeps them close together.

[0023] Oil tubes and electrical conduit run into and out of the OCM 10. For example, and by way of illustration only, oil may flow into the OCM 10 through a first lube in line 52 and a second lube in line 54. Oil may exit the OCM 10 through a first lube out line 56 to lubricate the engine gears (not shown) and through a second lube out line 58 to lubricate a journal bearing compartment (not shown). Oil may also exit the OCM 10 through a third lube out line 60, a fourth lube out line 62, a fifth lube out line 64 and a sixth lube out line 66

to lubricate other engine components. Oil may also enter the OCM 10 through an auxiliary in line 70 and a scavenger line 68 and exit the OCM 10 through a scavenger out line 72.

[0024] Some of the oil processing components may be hard mounted to the housing 12, typically onto the exterior of the housing 12, making access and maintenance easier, while the oil circuits may be located within (inside) the housing 12. "Hard mounted" means the component is mounted in fixed or semi-fixed relationship to the housing 12. Hard mounting may be accomplished in any suitable manner, including without limitation by bolting, brazing or welding. For example, the VORV 14 may be hard mounted onto the exterior of the housing 12, making it easily separable from the housing 12. Similarly, the MOP 16 may be hard mounted to the housing exterior and piloted into the housing 12 to sense oil pressure within a cavity within the housing 12. The MOT 18 may be hard mounted to the exterior to the housing 12 and may sense the temperature of an oil line within the housing 12. The MOFDP 20 may be a bolt-on unit, and so too may be the ODM 22.

[0025] The internal, removable plug-like devices referred to herein as orifices can be sized to passively regulate oil flow through the circuits (bearing compartment supply lines) located within the OCM 10 according to engine needs. The orifices can be changed out as needed. The cool oil orifice 28 preferably is internal, that is, located within the housing 12. Similarly, the knock down orifice 30 and the lube trim orifice 32 are internal to the housing 12. Finally, the lube filter 24 may be located within the housing 12, which is configured so that the lube filter 24 can easily be changed out.

[0026] Figure 2 is a schematic diagram of a second embodiment of an oil control module 40 according to the present disclosure, the configuration and operation of which is similar to the first embodiment depicted. Like the first embodiment, the OCM 40 comprises a housing 12 containing numerous lubricating system components such as a variable oil reduction valve/shuttle valve (VORV) 14, a main oil pressure sensor 16 (MOP), a main oil temperature sensor 18 (MOT), a main oil filter delta pressure sensor 20 (MOFDP), an oil debris monitor 22 (ODM), a main oil filter 24, an active oil damper valve 46 (AODP), a cool oil orifice 28, a knock down orifice 30 and a lube trim orifice 32.

[0027] An active oil damper valve (AODV) 46 may be provided in one of the lube out lines and hard mounted to the outside of the OCM housing 12. The second embodiment also includes a vent line 45 running from the VORV 14 outside of the housing 12. The pressure driven vent line 45 is dedicated to and may be tied into the AODV 46.

[0028] In another aspect of the disclosure an oil control module 10, 40 is provided comprising a housing 12 on which may be mounted multiple lubricating components and one or more internally manifolded systems that permit the functional interconnection between two or more of the lubricating components. The lubricating components may include a variable oil reduction valve/shuttle valve 14, a main oil pressure sensor 16, a main oil temperature sensor 18, a main oil filter delta pressure sensor 20, an oil debris monitor 22, a lube filter 24, an active oil damper valve 46, a cool oil orifice 28, a knock down orifice 30 and a lube trim orifice 32. Further functional integration of the lubricating components can achieve a further reduction in electrical conduits to and from the OCM.

[0029] Figure 3 is a side perspective view of a gas turbine engine 100. The gas turbine engine 100 generally comprises a fan section 102, a compressor section 104, a combustor section 106 and a turbine section 108. Alternative engines might include an augmentor section (not shown) among other systems or features. The fan section 102 drives air along a bypass flow path while the compressor section 104 drives air along a core flow path for compression and communication into the combustor section 106, then expansion through the turbine section 108. Although depicted as a turbofan gas turbine engine in the disclosed non-limiting embodiment, it should be understood that the concepts described herein are not limited to use with turbofans as the teachings may be applied to other types of turbine engines including three-spool architectures. An oil control module 10 according to the disclosure may be mounted in a location close to and exterior of the gas turbine engine 100. For example, the housing 12 may be mounted to the engine 100 aft of the compressor section 104 and forward the turbine section 108.

[0030] Figure 4 is an enlarged side perspective view of the oil control module 10 of Figure 3 shown without certain external lubricating components for clarity. As explained above, numerous components (not shown) may bolt onto the housing 12, typically onto the exterior of the housing 12 thereby making access and maintenance easier, while the oil circuits may be located within (inside) the housing 12. Electrical interfaces 110 and plumbing interfaces 112 may extend from the housing 12.

[0031] In another aspect of the disclosure a method of installing lubricating system components for a gas turbine engine 100 is provided, the method comprising the steps of:  
providing an oil control module 10, 40 comprising a housing 12, one or more oil processing components hard mounted to an exterior of the housing 12, and one or more plug-like devices defining orifices located within the housing 12; and

mounting the oil control module 10 to the engine 100, preferably aft of the compressor section 104 and forward the turbine section 108.

[0032] While the present disclosure has been shown and described in terms of one or more exemplary embodiments, it will be understood by one skilled in the art that various changes in detail may be effected therein without departing from the spirit and scope of the disclosure as defined by claims that may be supported by the written description and drawings. Further, where these exemplary embodiments (and other related derivations) are described with reference to a certain number of elements it will be understood that other exemplary embodiments may be practiced utilizing either less than or more than the certain number of elements.

What is claimed is:

1. An oil control module comprising:
  - a housing;
  - one or more oil processing components hard mounted to the housing, the housing having an exterior and defining an interior;
  - a lube filter located within the housing interior; and
  - one or more plug-like devices defining orifices located within the housing interior and configured to passively regulate a flow of oil in circuits located within the oil control module.
  
2. The oil control module of claim 1 wherein the one or more oil processing components includes:
  - a variable oil reduction valve/shuttle valve;
  - a main oil pressure sensor;
  - a main oil temperature sensor;
  - a main oil filter delta pressure sensor; and
  - an oil debris monitor.
  
3. The oil control module of claim 2 wherein the one or more oil processing components are hard mounted to the exterior of the housing.
  
4. The oil control module of claim 3 wherein the one or more plug-like devices includes:
  - a cool oil orifice;
  - a knock down orifice; and
  - a lube trim orifice.
  
5. The oil control module of claim 4 wherein the one or more plug-like devices are configured such that they can be changed out.
  
6. The oil control module of claim 5 further comprising:
  - a lube filter located within the housing interior, the housing configured such that the lube filter can be easily changed out.
  
7. The oil control module of claim 6 further comprising:

a plurality of oil tubes running into and out of the housing for accommodating fluid flow.

8. The oil control module of claim 7 wherein the plurality of oil tubes includes:  
a plurality of lube in lines; and  
a plurality of lube out lines.
9. The oil control module of claim 8 further comprising:  
an active oil damper valve located in fluid communication with one of the lube out lines.
10. The oil control module of claim 9 wherein:  
the active oil damper valve is hard mounted to the outside of the housing.
11. The oil control module of claim 10 further comprising:  
a vent line running from the variable oil reduction valve/shuttle valve and tied into the active oil damper valve.
12. An oil control module comprising:  
a housing on which are mounted multiple lubricating components, the housing defining an interior; and  
one or more internally manifolded systems that permit a functional interconnection between two or more of the lubricating components.
13. The oil control module of claim 12 wherein the multiple lubricating components comprise:  
a variable oil reduction valve/shuttle valve;  
a main oil pressure sensor;  
a main oil temperature sensor;  
a main oil filter delta pressure sensor; and  
an oil debris monitor.

14. The oil control module of claim 13 wherein the multiple lubricating components further comprise:
  - a lube filter located within the housing interior.
15. The oil control module of claim 14 wherein the multiple lubricating components further comprise:
  - an active oil damper valve;
  - a cool oil orifice;
  - a knock down orifice; and
  - a lube trim orifice.
16. The oil control module of claim 14 further comprising:
  - electrical interfaces and plumbing interfaces extending from the housing.
17. The oil control module of claim 16 wherein:
  - the housing is configured to mount to a gas turbine engine in a location close to and exterior of the gas turbine engine.
18. The oil control module of claim 17 wherein:
  - the gas turbine engine comprises a fan section, a compressor section, a combustor section and a turbine section; and
  - the housing is configured to mount aft of the compressor section and forward the turbine section.
19. A method of installing lubricating system components for a gas turbine engine, the method comprising the steps of:
  - providing an oil control module comprising a housing, one or more oil processing components hard mounted to an exterior of the housing, and one or more plug-like devices defining oil flow control orifices located within the housing; and
  - mounting the oil control module to the gas turbine engine.
20. The method of claim 19 wherein:

the gas turbine engine comprises a fan section, a compressor section, a combustor section and a turbine section; and

the mounting step includes mounting the oil control module to the gas turbine engine aft of the compressor section and forward the turbine section.

1/3

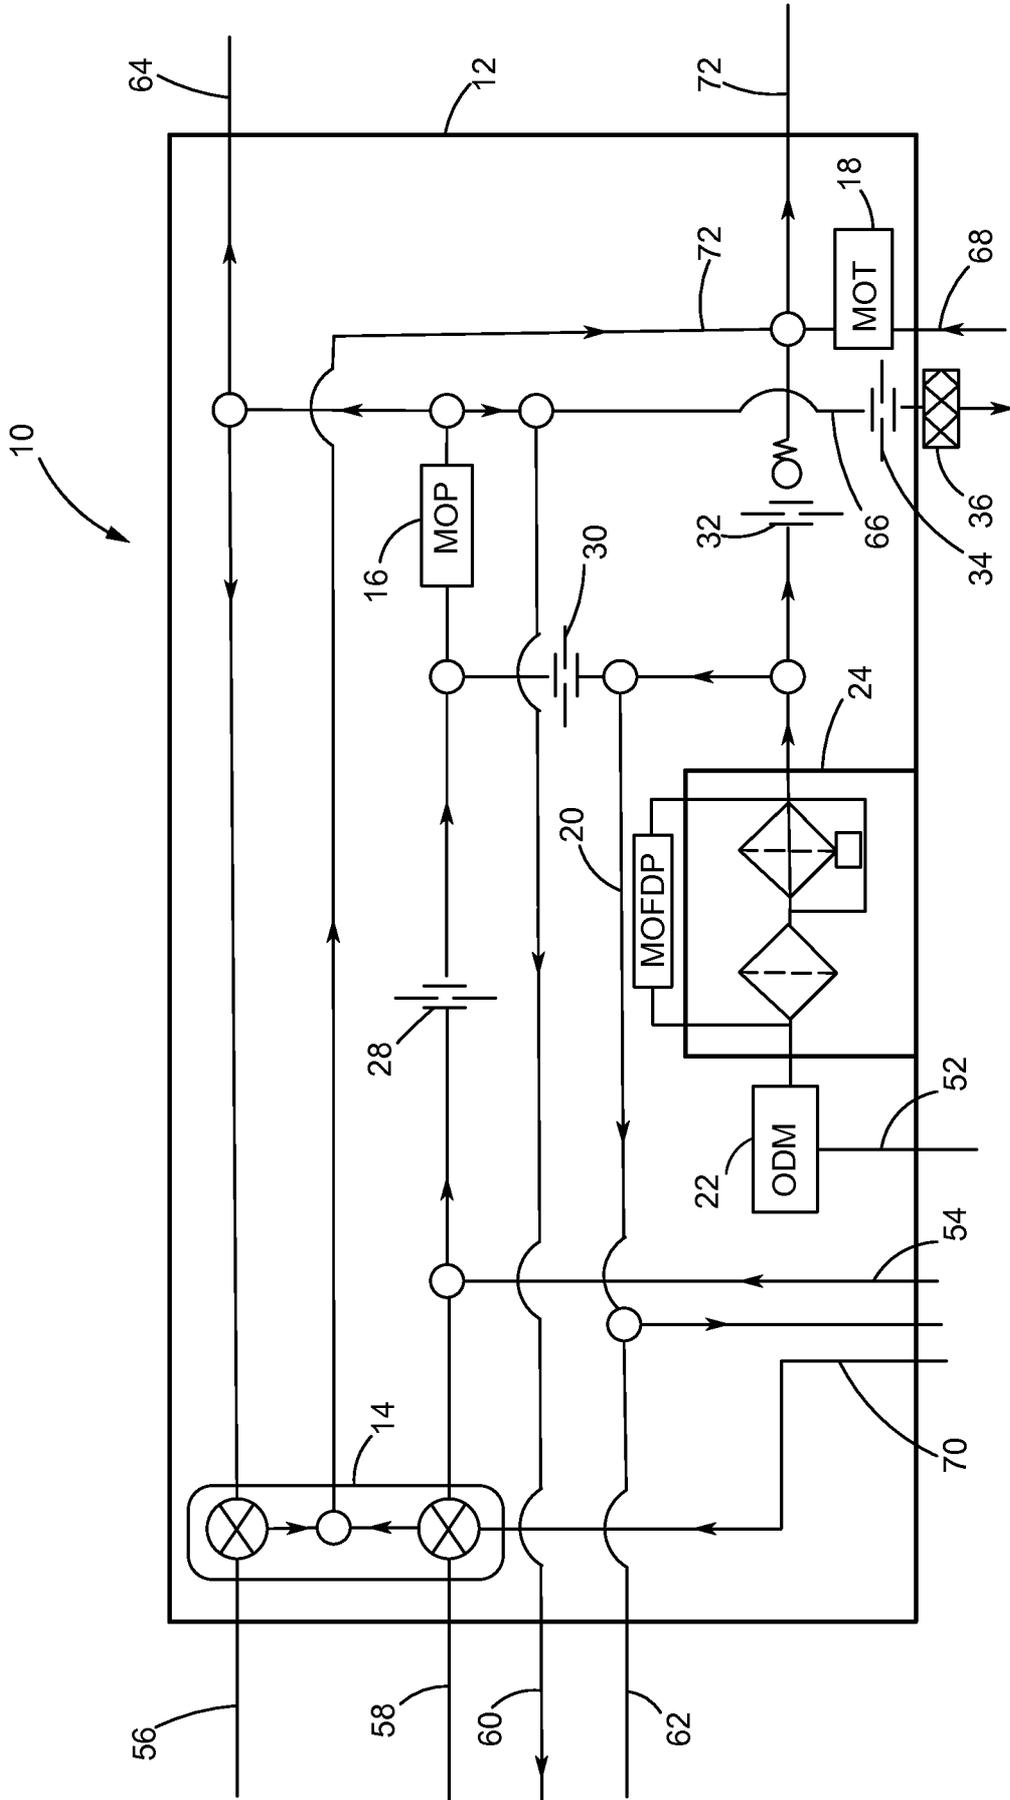


FIG. 1



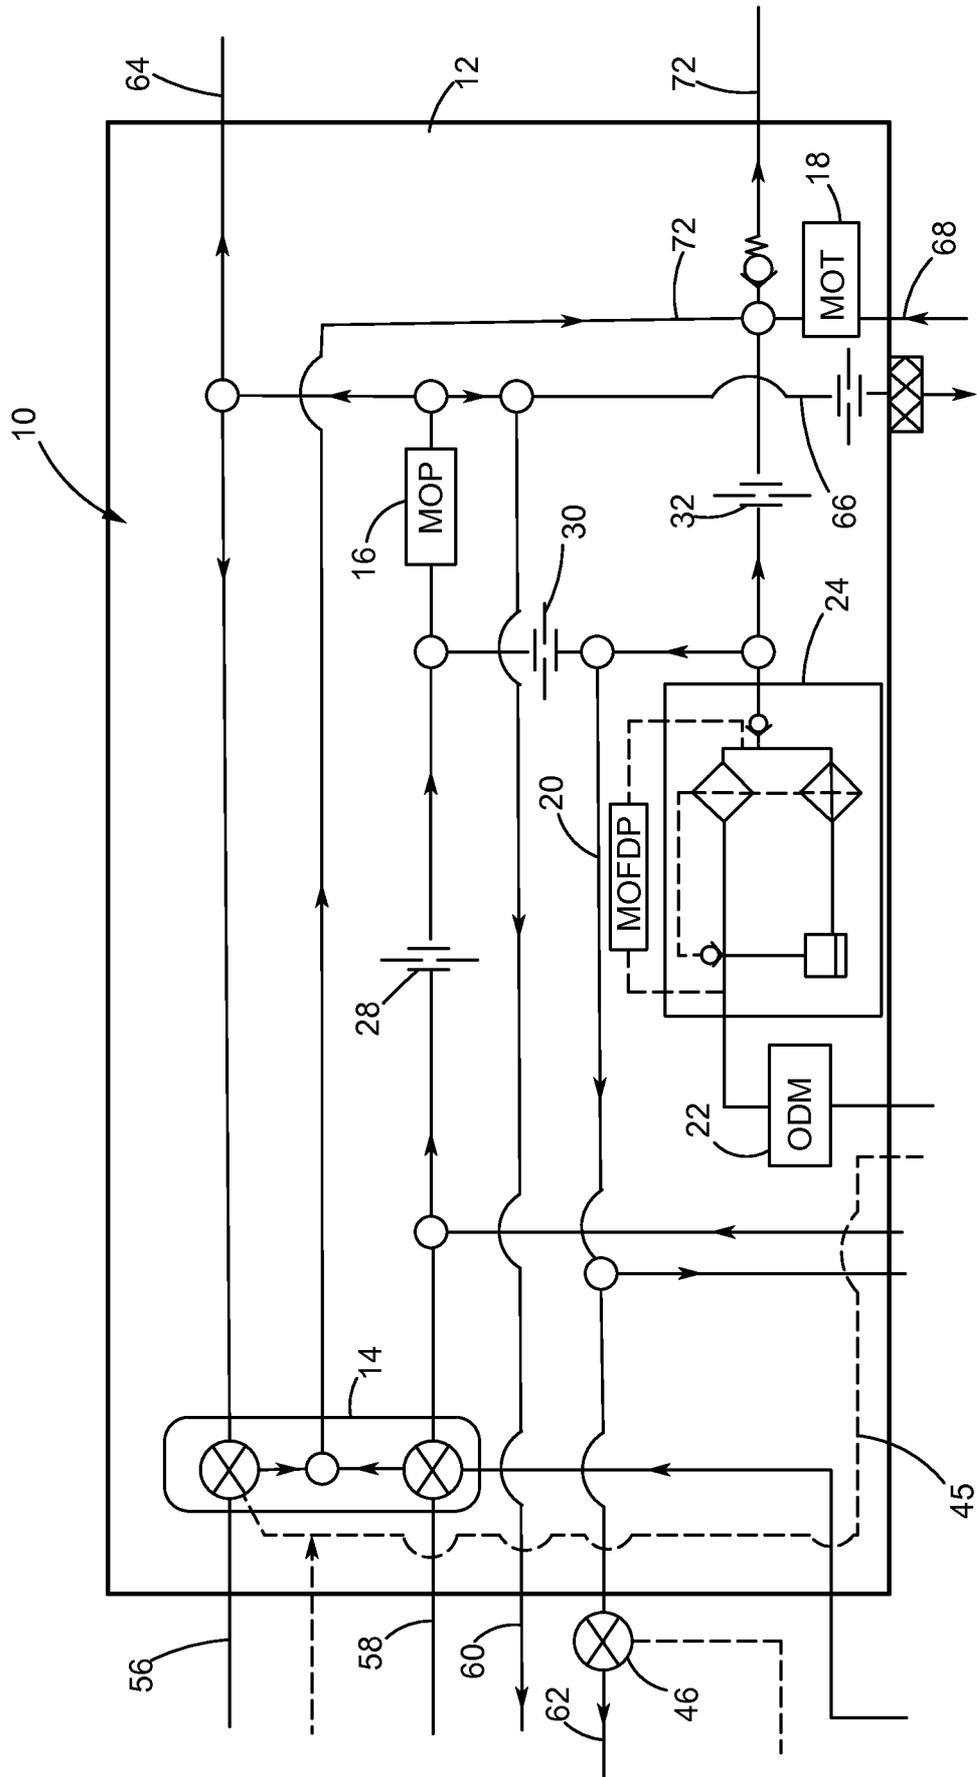


FIG. 2

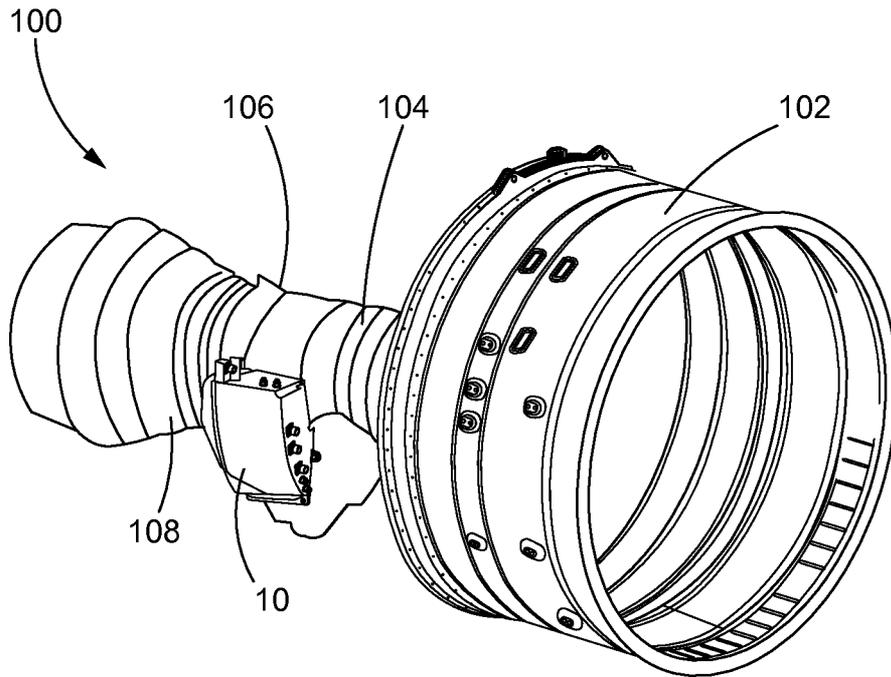

**FIG. 3**

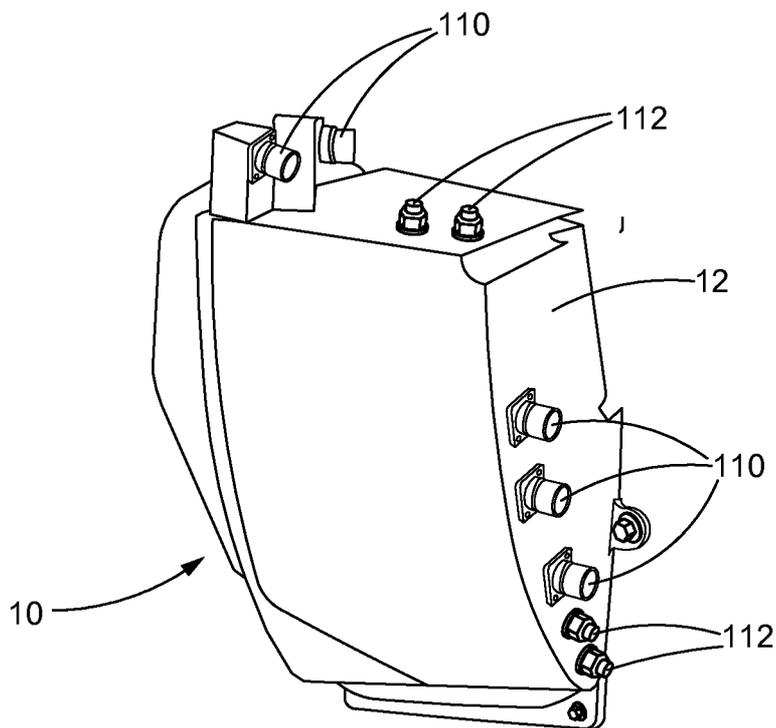

**FIG. 4**

## INTERNATIONAL SEARCH REPORT

International application No.  
**PCT/US2014/013757****A. CLASSIFICATION OF SUBJECT MATTER****F02C 7/06(2006.01)i, F01D 25/18(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

F02C 7/06; F01M 11/00; F01D 17/06; F02C 6/04; F01M 5/00; G01N 33/26; F01D 25/18; B01D 17/12; F02M 37/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &amp; keywords: housing, valve, sensor, filter, orifice, oil tube, and oil control module

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5968371 A (VERDEGAN et al.) 19 October 1999 See abstract, column 7, line 24 - column 8, line 15, and figure 1.	1-20
Y	US 2011-0239660 A1 (SUCIU et al.) 06 October 2011 See abstract, paragraphs [0013],[0015], and figures 1-2.	1-20
Y	US 6067962 A (BARTLEY et al.) 30 May 2000 See abstract, column 2, lines 39-61, and figures 1-2.	9-11, 15
A	US 2011-0056769 A1 (CZECHOWSKI et al.) 10 March 2011 See abstract, paragraphs [0013],[0018], and figure 2.	1-20
A	US 8201662 B2 (DELALOYE et al.) 19 June 2012 See abstract, column 3, line 41 - column 4, line 27, and figure 1.	1-20

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

23 May 2014 (23.05.2014)

Date of mailing of the international search report

**23 May 2014 (23.05.2014)**

Name and mailing address of the ISA/KR

International Application Division  
Korean Intellectual Property Office  
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,  
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

LEE, Jong Kyung

Telephone No. +82-42-481-3360



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2014/013757**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5968371 A	19/10/1999	None	
US 2011-0239660 A1	06/10/2011	EP 2372129 A2 EP 2372129 A3	05/10/2011 17/04/2013
US 6067962 A	30/05/2000	AU 1998-96094 A1 EP 1157195 A1 GB 2332240 A JP 11-257585 A US 5894830 A WO 00-28193 A1	01/07/1999 28/11/2001 16/06/1999 21/09/1999 20/04/1999 18/05/2000
US 2011-0056769 A1	10/03/2011	BR PI0707952 A2 GB 0814970 D0 GB 2448646 A GB 2448646 B GB 2478079 A NO 20083586 A SG 163560 A1 US 2007-0209878 A1 US 2011-0303490 A1 US 7854299 B2 US 8069949 B2 US 8496089 B2 WO 2007-098059 A2 WO 2007-098059 A3	17/05/2011 24/09/2008 22/10/2008 02/11/2011 24/08/2011 12/11/2008 30/08/2010 13/09/2007 15/12/2011 21/12/2010 06/12/2011 30/07/2013 30/08/2007 06/11/2008
US 8201662 B2	19/06/2012	CA 2665727 A1 US 2009-0045014 A1	16/01/2010 19/02/2009