




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : E21B 7/18</p>	<p>A1</p>	<p>(11) International Publication Number: WO 97/21900 (43) International Publication Date: 19 June 1997 (19.06.97)</p>
<p>(21) International Application Number: PCT/AU96/00783 (22) International Filing Date: 5 December 1996 (05.12.96) (30) Priority Data: PN 7031 8 December 1995 (08.12.95) AU (71) Applicants (for all designated States except US): THE UNIVERSITY OF QUEENSLAND [AU/AU]; St. Lucia, QLD 4067 (AU). COMMONWEALTH SCIENTIFIC AND INDUSTRIAL RESEARCH ORGANISATION [AU/AU]; Limestone Avenue, Campbell, ACT 2601 (AU). BHP COAL PTY. LTD. [AU/AU]; Level 13, Riverside Centre, 123 Eagle Street, Brisbane, QLD 4000 (AU). (72) Inventors; and (75) Inventors/Applicants (for US only): TRUEMAN, Robert [AU/AU]; 17 McDougall Street, Karana Downs, QLD 4306 (AU). MEYER, Timothy, Gregory, Hamilton [AU/AU]; 49 Baynes Street, Highgate Hill, QLD 4101 (AU). STOCKWELL, Matthew [AU/AU]; 19 Cedar Street, Cannon Hill, QLD 4170 (AU). (74) Agent: CULLEN & CO.; Level 12, 240 Queen Street, Brisbane, QLD 4000 (AU).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>

(54) Title: FLUID DRILLING SYSTEM

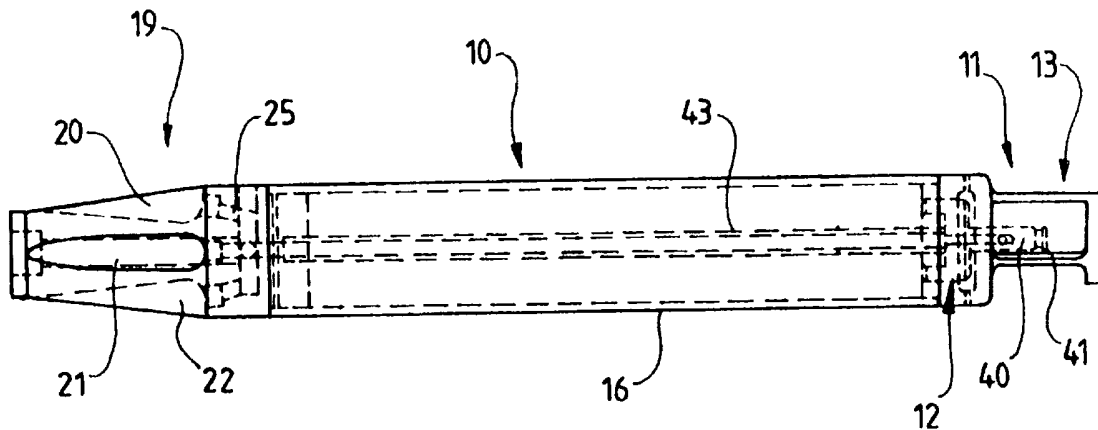

(57) Abstract

A self-advancing drilling system comprising a drilling apparatus, the drilling apparatus having at least one leading fluid cutting nozzle, means on the drilling apparatus to provide forward movement to the drilling apparatus, the drilling system further comprising a drill string formed from a recoverable flexible hose.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

TITLE

FLUID DRILLING SYSTEM

FIELD OF THE INVENTION

This invention relates to a fluid drilling
5 system and particularly relates to a self-advancing fluid
drilling system which can be used in a variety of mining
applications, including but not limited to, drilling into
coal seams, to drain methane gas.

BACKGROUND ART

10 Fluid drilling systems are known and use water
under high pressure to cut solids such as soft rock, coal
and the like. These water jet drilling systems are
finding greater acceptance in the mining industry and can
be used instead of the traditional mechanical cutting
15 heads.

The known water jet drilling systems all have a
cutting apparatus advanced by forces transmitted along a
rigid drill string or in one instance by fluid pressure
exerted on a piston type arrangement. The cutting
20 apparatus has one or more water jet cutting nozzles on a
leading portion of the apparatus.

Conventionally, in order to cut a circular
hole, the rigid drill string is rotated thereby sweeping
the forward cutting jets through a circular path.

25 More recently a more successful arrangement has
been developed whereby the cutting jets alone are rotated
by means of a swivel head powered by the thrust from the
cutting jets, with all other parts of the drill stem
leading to the cutting head being stationary. The
30 apparatus is advanced by pushing on the rigid drill
string with the rotating fluid cutting head cutting a
hole in the solid.

More recently, a water jet drilling system has
been developed which is effective in drilling in-seam
35 boreholes of up to 300m length or more with a rigid drill
string. The major features of this drilling nozzle are:

- a commercially available Woma FR47 high speed
self-rotating water jet nozzle as the main

cutting component,

- a stepless shroud cage to prevent the Woma FR47 nozzle from stalling (stop spinning),
- a bent sub member to control the borehole trajectory,
- a retro sub member to provide sufficient flow to flush the relatively large cuttings from the hole,
- a nozzle cross over sub to connect the Woma FR47 nozzle to the retro sub member and the retro sub member to the drill string.

To advance the cutting apparatus and to provide the cutting fluid to the nozzle, drill rods of 3m length, designed to withstand internal pressures of up to 1000 bar, were used. These drill rods were used as a conduit for the required supply of high pressure water to the drilling nozzle. (The rods were also used as a conduit for the required supply of high pressure water to the drilling nozzle). The rods were also used in association with a drilling rig to push or advance the nozzle into the borehole. To facilitate the removal of the cutting debris from the borehole, rearwardly facing flushing nozzles (or retro jets) were used. A high pressure water pump capable of a maximum pressure of 650 Bar at a flow rate of 160 litres per minute was used for this work.

In this more recent arrangement, the drilling technique involved the following steps:

- align the drill rig to the desired borehole direction,
- attach the Woma FR47 nozzle to the high pressure drill rods (the first 10 metres of borehole were drilled without the bent sub and retro assembly members. This is done to avoid unnecessary spray back from the flushing jets on the retro sub),
- after collaring 10 metres of borehole the drill string is withdrawn from the hole and the bent sub and retro assembly members attached behind

the Woma FR47 nozzle,
● the nozzle assembly and drill string are re-
inserted to the bottom of hole (BOH) and
drilling continued, the nozzle assembly being
5 advanced by pushing on the drill string with
the rig.

A recognised advantage of fluid drilling
systems is their propensity for Round the Corner or
Ultra-Short Radius Drilling. These methods typically
10 involve drilling horizontal holes radiating out from a
vertical well. To allow Round the Corner Drilling, it is
known to make the drill string tube up in steel segments
each 45cm long and hinged on the top surface. A drive
chain is welded along the length of the string. As the
15 segments come down the vertical well, they are
disconnected on their lower side and are able to rotate
around a drive cog at the bottom of the vertical well.
Thus, the drill string would feed down the vertical well
as a rigid unit and would also feed into the horizontal
20 hole as a rigid unit.

The water cutting nozzle was powered by
pressurised water which was fed through a high pressure
hose. The high pressure hose either extended through the
rigid drill string, or to one side of the drill string.

25 One method of Ultra-Short Radius Drilling
involves a fluid drilling apparatus attached to a length
of coiled tubing. The fluid drilling apparatus and
coiled tubing are fed through a whipstock assembly which
bends the tubing through an ultra-short radius bend (0.3m
30 radius). The tubing is thereby deflected laterally away
from the vertical well by plastically deforming the
tubing through a series of guides and rollers. The
coiled tubing is used to supply the high pressure cutting
fluid to the fluid drilling apparatus. The fluid
35 drilling apparatus is forced into the formation to be
drilled by means of a complicated piston arrangement
which utilises the high pressure of the cutting fluid.

A difficulty with water cutting systems is

ensuring that the nozzle assembly remains in the desired horizon as the apparatus is advanced by the rigid drill string. It is noted with conventional systems that there is a tendency for the cutting apparatus to drop relative to an horizon as it is advanced.

While not wishing to be bound by theory, it appears that the drop is caused by the drill string being rigid, or by the drill string otherwise being predominant in the advancement of the nozzle assembly.

To steer these devices, a bent sub is used and the rigid drill string is rotated to rotate the orientation of the bent sub and this provides a measure of steering to the system.

Drill strings formed from coiled tubing are known. The coiled tubing allows the drill string to exhibit some degree of flexibility. However the coiled tubing allows only a restricted amount of flex, and it is found that if the coiled tubing is forced around a whipstock, the tubing goes past its elastic limit which means that it is difficult to retrieve. The tubing must be cut-off electrochemically, or by some other means and therefore does not function as a flexible hose.

International Patent Application WO 95/09963 describes a drilling system. In this system a first drill string is pushed down a borehole and deflected horizontally via an elbow. The first drill string has a mechanical ball cutter and the drill string is rotated to rotate the ball cutter. This drill string is then removed, and a second flexible drill string is inserted down the bore hole and through the elbow.

The second drill string does not rotate and terminates with a relatively low pressure fluid cutter, cutting at about 3000 - 4000 psi. The fluid cutter slowly blasts a bore in the surrounding strata. There appears to be no method to advance the drill string into the horizontal bore other than by the weight of the drill string in the vertical or by conventional pushing on the drill string. The cutter has a more or less conventional

low pressure retro jet assembly (about 3000 - 4000 psi) which functions to flush away the cuttings. The stated angle of the retro jets (45°) is consistent with a flushing action but at this angle the jets do not
5 function to provide any meaningful forward thrust. In fact, it appears that the jets, if anything, may have an additional function to balance the kick back caused by the front non rotating nozzles, such that advancement is caused by the weight of the drill string.

10 As there is no advancement mechanism other than by the weight of the drill string, the fluid cutter advances very slowly with a stated cutting rate being 60m in 6 - 10 hours even in soft rock.

As the drill string appears to effect the
15 forward movement of the cutter, the problem of drop in the cutting angle may still occur, a problem found with rigid drill strings.

With no advancement means other than the weight of the drill string being apparent, there is a high
20 probability that extended horizontal drilling will cause the flexible drill string to adopt what is known as "helical lock up" which is when the drill string can no longer be advanced by pushing on the drill string. This effect is probably why the horizontal hole lengths in the
25 examples were limited to about 60m.

In the examples, the drill string is a coiled steel tube of smaller than usual diameter (12.5mm) to provide it with sufficient flexibility. With the small diameter tube, only small volumes of low pressure water
30 can pass to the fluid cutter.

In draining methane from a coal seam, it is essential for the sake of efficiency to not change the permeability of the coal. Any reduction in the permeability will adversely effect methane drainage into
35 the cut bore from the surrounding coal. It is known that surfactants reduce coal permeability and therefor, for drilling drainage holes in coal seams, the drilling system described above would not be suitable as

surfactants are required.

OBJECT OF THE INVENTION

In the present invention, a system has been developed whereby the rigid drill string is replaced by a flexible drill string which is not intended to advance the nozzle assembly. We find that with a flexible drill string the cutting device remains in the same horizon. Our flexible drill string can accommodate high pressure fluid (10000 - 20000 psi) and has a reduced ability, or no ability to push or advance the cutting apparatus. Therefore the present invention also includes a self-advancing system which, in one form, may be in the form of retro jets having a configuration and sufficient thrust to provide advancement to the cutting apparatus.

A major advantage of using a high pressure flexible hose as the drill string is that it can be fed and retracted continuously from a drum. This eliminates the requirement to continuously add and take off rigid drill rods. Significant productivity gains are therefore possible with this technology. Although coiled steel tubing which is known technology can be used in a similar way, the capital cost of the tubing and winches are considerably greater than for this invention.

Additionally complicated and expensive ways are required to advance it in to the borehole. With this invention, the cutting assembly and flexible drill string can be advanced relatively simply and cheaply.

The flexibility of the drill string also makes the invention applicable to directional drilling. Directional drilling relates to situations where there are benefits in changing the direction of a drill hole in a controlled manner. In particular the high pressure hose is capable of being turned relatively easily through an ultra-short-radius which is defined as 0.6m or less. The only other known technology capable of achieving this is again coiled tubing which has a significant greater capital cost associated with it as mentioned earlier. Additionally coiled tubing can only be made to turn

through an ultra-short-radius by forcing the steel tubing past the elastic limit of the material. The strains involved seriously reduces the working life of the tubing which typically means that the section of tubing that passes through the ultra-short-radius is not retracted and complicated methods have to be used to sever it, including mechanical and electro chemical shearing devices. This adds significantly to costs. With this invention the flexible drill string can be retracted and re-used without the working lifetime of the high pressure hose being unduly affected. A further disadvantage of coiled tubing for directional drilling in coal is that if not retracted, the tubing can represent a safety hazard for the subsequent mining of the coal by underground methods. The chemicals used to sever the tubing may also adversely affect the permeability of the coal seam.

It is an object of the invention to provide a drilling system which may overcome the abovementioned disadvantages or provide the public with a useful or commercial choice.

In one form, the invention resides in a self-advancing drilling system comprising a drilling apparatus, the drilling apparatus having at least one leading fluid cutting nozzle, means on the drilling apparatus to provide forward movement to the drilling apparatus, and a drill string formed from a recoverable flexible hose.

Thus, by doing away with the rigid drill string, and providing a self-advancing mechanism preferably in the form of one or more retro jets, an efficient drilling system is obtained.

The flexible hose may function only as the drill string, but it is preferred that the flexible hose also functions as a conduit for the fluid to power the cutting nozzle and the retro jets. It is envisaged that separate further hoses may be provided as a conduit for the fluid, but at this stage, it is preferred that the drill string itself also functions as the fluid hose.

The hose should be able to withstand high pressures of 10000 - 20000 psi.

The drilling apparatus itself may comprise a number of interconnected sub members.

5 A leading portion of the drilling apparatus may include a rotating high pressure nozzle. A suitable nozzle is a Woma FR47 nozzle which is available commercially. This nozzle includes forward cutting jets and side reaming jets and can be used with nozzle
10 pressures of between 10000 - 20000 psi and typically 10000 - 15000 psi.

The nozzle may be mounted for rotation within a protective housing. The protective housing may comprise a rear tubular portion and a forward open cage portion.
15 The cage portion can protect the nozzles and reduce the incident of a nozzle striking the solid as the nozzle rotates.

The cage may be stepped with the location of the step being immediately behind the reaming jets. The
20 step can aim the reaming jets onto protrusions on the borehole wall which catch on the step and prevent the nozzle from advancing. The reaming jets may then be able to remove the protrusions and hence allow the cutting apparatus to advance.

25 The apparatus does not require a bent sub member as the flexible hose may not be suitable for controlling the orientation of the bent sub member.

Preferably, at least one retro jet is provided which may form part of a retro jet sub member. The retro
30 jet sub member can be positioned adjacent a rear portion of the cutting apparatus. This sub member may have four retro jets comprising rearwardly pointing nozzles, and the retro jets may be equally spaced about the sub member. The retro jets provide forward thrust, and thus
35 self advancement to the drilling apparatus. The jets typically function at 10000 - 20000 psi and the number and size of the jets can be varied to provide a net forward thrust to the apparatus.

To function efficiently as "thrust" jets, the jet nozzles are preferably at a small angle to longitudinal axis of the apparatus. Angles of 0° - 30° are preferred, with an angle of about 5° being particularly preferred as this angle causes "thrust" water to clear the attached flexible hose (and not cut into it), while still having an acceptable rearward thrust angle.

The cutting apparatus can be steered by a steering means. One form of the steering means comprises fluid passing through the retro jet nozzles which can be selectively deflected by a deflecting assembly. The deflecting assembly can thereby assist in steering the cutting apparatus. The deflecting assembly may comprise a deflecting member which can be moved selectively into and out of the fluid jet stream to deflect the stream. Suitably, the deflecting member comprises a protrusion, or like member on a ring, the ring extending about the retro sub member. Rotation of the ring can cause the deflecting member to selectively pass into and out of a fluid jet stream. The ring may be rotated by an actuator which may be located within the cutting apparatus.

The deflecting assembly may form part of a guiding system for steering the cutting apparatus through a solid body such as a coal seam. The guiding system can be designed to provide a continuous real time indication of the attitude of the cutting apparatus and can allow an operator to steer the apparatus by computer control on the surface. The guiding system can comprise the following components:

- (a) a sensing instrument which determines the location of the cutting apparatus in 3-D space,
- (b) a single core wireline to transmit information between the cutting apparatus and the surface,
- (c) a computer to calculate and display information relating to the trajectory of the cutting apparatus, and
- (d) a steering mechanism which may comprise the

deflecting assembly as described above.

BRIEF DESCRIPTION OF THE DRAWINGS

An embodiment of the invention will be described with reference to the following drawings in
5 which:

Figure 1 is an overall side view of a cutting apparatus according to an embodiment of the invention;

Figure 2 is a view of a large leading protective housing;

10 Figures 3A and 3B are side and end views of a small stepped leading protective housing;

Figure 4 illustrates the forward fluid cutting nozzles;

15 Figure 5 illustrates the rear retro jet assembly of the cutting apparatus;

Figure 6 illustrates the apparatus of Figure 1 having a deflector mechanism to deflect the retro water jet.

20 Figure 7 illustrates part of the forward fluid cutting nozzle;

Figure 8 illustrates a cutting apparatus according to a second embodiment.

Figure 9 illustrates generally, the fluid drilling system in use.

25 **BEST MODE**

Referring to the drawings and initially to Figure 9, there is shown diagrammatically a system for cutting a substantially horizontal passage into a coal seam 100. Figure 9 shows a vertical bore 101 extending
30 through the coal seam. A whipstock apparatus 104 is positioned in the bore and in a pre-formed cavity 105. The whipstock apparatus can be that described in the applicants co-pending international patent application, the contents of which are incorporated herein by suitable
35 cross reference. Whipstock apparatus 104 has a main body 106 sized to allow the whipstock to be inserted into the bore. An extendible arm 107 is attached to the main body portion, and the arm can be hydraulically erected to

adopt a horizontal orientation (other angles are also possible).

The fluid drilling apparatus 108 which is the subject of the current application can be housed in the arm 107, such that when the arm is erected, the apparatus can start cutting a bore in the coal seam. The flexible hose 109 is pulled along by the apparatus, with the hose passing through the whipstock, up the bore and which can be unrolled from a drum 110 on the surface. The flexibility of the hose 109 allows it to pass through a quite tight radius, which in turn allows the whipstock to be compact.

Once the fluid drilling apparatus has cut a desired length of bore, it can be wound back into the arm 107, the arm can be retracted, and the whipstock containing the drilling apparatus can be raised to the surface. The system finds particular use in forming long methane drainage bores in coal.

It should be appreciated that the fluid drilling system is not limited to use with a whipstock, and can be used alone or with other apparatus.

Referring to figure 1, there is illustrated a fluid cutting apparatus 10. Apparatus 10 is formed from a number of separate but interconnectable sub members. The leading sub member 11 comprises a protective housing. The protective housing has a rear substantially hollow tubular portion 12 and a forward cage portion 13. Inside housing 11 is located a Woma FR47 or like type of self-rotating high pressure nozzle assembly 40 which is available commercially (see Figure 4 and 7). The nozzle assembly is fitted to a boss 40A and comprises a spindle 40B on which a spinning nozzle 40C sits. Nozzle 40C has forwardly extending cutting jets 41 and side reaming jets 42. Jets 41,42 operate at pressures of between 10000 - 15000 psi. Nozzle 40C is attached to spindle via a pin 40D which is captured in an annular groove 40E in the spindle.

Cage portion 13 allows the cutting jets and

the reaming jets to cut a passageway through solid material (such as a coal seam), with the cage portion protecting the nozzle against damage and stalling.

In Figure 3, cage portion 13 has a step 14 which is positioned immediately behind the reaming nozzles of the Woma unit. Step 14 aims the reaming jets onto protrusions on the borehole wall which catch on the step and prevent the nozzle from advancing. The reaming jets are then able to remove the protrusions and hence will allow the drilling apparatus 10 to advance.

Figure 2 illustrates a different type of cage portion 13A without the step.

Immediately behind housing 11 is an intermediate sub member 16 which is substantially hollow and can contain sensors, guidance systems and the like. In addition, the sub member is cylindrical in shape, thereby providing a symmetry to the nozzle which assists in drilling straighter holes. The cylindrical shape also effectively reduces the annulus between the nozzle and the borehole wall through which the water and coal cuttings have to pass. High pressure water passes through internal pipe 43 and to the Woma FR47 nozzle. If the borehole diameter gets too small, then this water and cuttings cannot escape past the nozzle fast enough. This leads to an increase in pressure in front of the nozzle to a level at which the nozzle is pushed back against the force of the retro jets. This effectively allows the cutting and reaming jets another opportunity to cut the borehole and increase its diameter. In this manner a more consistent borehole diameter is achieved.

Connected to member 16 is a rear retro jet sub member 19 which is more clearly illustrated in Figure 5. Retro jet sub member 19 has four retro jets 20 - 23 evenly spaced about a tail end of the member. Each retro jet comprises a channel machined or otherwise formed into the sub member 19. A nozzle (not shown) is positioned in a corresponding socket 24 inside the retro jet sub member 19 and adjacent the channel. The socket and therefore

nozzle is in fluid communication with the interior of retro jet sub-member 19 through channels 25. The nozzles are angled at an optimum 5° to the horizontal to clear the attached trailing flexible hose and to provide a good forward thrust to the apparatus. Water passes through the nozzles at 10000 - 20000 psi. A proportion of high pressure fluid passing into retro jet sub member 19 will therefore pass out through nozzles 24 to provide a forward thrust to the drilling apparatus 10. A flexible drilling string (not shown) is attached at the rear portion 26 of retro jet sub member 19. High pressure fluid can pass through the flexible drill string and into and along cutting apparatus 10. The drill string functions as a conduit for the high pressure fluid but is too flexible to provide any meaningful forward thrust to the fluid cutter. The flexibility makes the drill string ideal for passing through tight curves, for instance with a whipstock, and surfactants are not required.

In use, high pressure fluid such as water is passed through the flexible drill string and passes into and through the apparatus 10. The high pressure fluid powers the Woma self-rotating nozzle and also the retro jets.

In a further form, a guidance system for steering the nozzle through the coal seam can be incorporated into the apparatus. The guidance system is designed to provide a continuous and real time indication of the nozzles attitude and position allowing an operator to steer the nozzle by computer control on the surface. The guidance system consists of the following components:

- a survey instrument which determines the location of the nozzle in 3-D space,
- a single core wireline to transmit information between the nozzle and the surface
- a computer and display monitor which calculate and display information relating to the nozzles trajectory, and
- a steering mechanism located on the nozzle to

control the direction of advancement hence maintain a desired trajectory.

The survey instrumentation may consist of a tri-axial array of fluxgate magnetometers and accelerometers. The magnetometers are used to determine the azimuth which the nozzle is pointing relative to magnetic north. The accelerometers are used to determine the inclination of the nozzle along its longitudinal axis, and the clock face orientation of the nozzle.

The output from the magnetometers and accelerometers is collected and processed by a processing chip located in the body of the nozzle. This information is then transmitted to the surface in binary form along the single core wireline. The wireline will be either built into the high pressure hose braiding, attached to the outside of the hose or threaded through the centre of the hose.

On the surface the wireline unit is connected to a computer which downloads the signal from the nozzle, processes the information and calculates the azimuth, inclination and clock face orientation of the nozzle in real time. This information is then displayed on a computer monitor allowing the operator to view the nozzles trajectory and compare this with the desired trajectory.

If the nozzle is deviating from the desired trajectory by a significant amount then the operator can activate the nozzle steering mechanism by using the computer keyboard. The operator enters in the desired change in direction. The computer determines how best to effect the change in direction and a signal is sent down the wireline to the processing chip in the nozzle. The chip activates the steering mechanism and the borehole trajectory is changed.

The steering mechanism consists of a slip ring (see Figure 6) which is mounted in a circumferential groove located behind the retro jets. A protrusion in the form of a plate 31 designed to deflect a retro jet

towards the borehole wall is mounted on the slip ring. An actuator stepping motor inside the assembly is used to rotate the slip ring such that the deflector plate is positioned behind the appropriate jet for the desired directional change. The forces generated by deflecting the appropriate retro jet steer the nozzle towards the desired direction.

Referring to Figure 8, there is shown a variation in the cutting assembly. The cutting assembly again includes a forward cage portion 51, an intermediate body 52 and a retro jet unit 53, the retro jet unit 53 and the forward cage 51 being substantially the same as described above.

Intermediate body 52 contains four internal stud bars 54 - 57 which extend longitudinally along and inside intermediate body 52. The stud bars form a support for additional components such as electronic surveying instrumentation. The instrumentation is moulded into epoxy resin and sealed in a canister for protection. The instrument package is mounted in such a manner that it slides onto the four stud bars. The drilling head boss 59 is the cap to the canister and allows attachment of the FR47 nozzle or the like to the assembly. The arrangement is tensioned using nuts which are screwed into the stud bar and the tensioning also seals the assembly together using nylon or similar bushes. Step cage 51 can then be located over the FR47 nozzle. In this arrangement, the internal water pipe 60 is placed to one side along internal body 52 to provide room for the instrument package.

The flexible hose which is attached to the cutting apparatus is a high pressure flexible hose which is sufficiently flexible to allow it to be withdrawn from the bore hole. The hose is also sufficiently flexible to allow it to be deviated by a whipstock. The flexible hose is not designed to act as a pusher to the cutting apparatus, the cutting apparatus being self-advancing via the retro jets. Thus, the flexible hose is different to

coiled tubing which can be bent past its elastic limit (for instance past a whipstock), but cannot be retrieved without difficulty and is usually cut-off electrochemically.

5 In the embodiment, the hose is formed from an inner core being polyoxymethylene and polyamide. Four spiral layers of high tensile steel wire are wrapped around the inner core to provide pressure reinforcement. The outer core is a polyamide. The flexible hose is
10 available commercially under the Polyflex High Pressure Hose™.

 In a further form the steering mechanism uses side "thruster" jets to change the direction of the borehole. These jets are activated by solenoid
15 controlled high pressure valves.

 In examples, fifty-four non-deflected holes and seven holes with the drill string being deflected through a 0.3m radius were drilled with the High Pressure Waterjet Drilling Nozzle according to the invention.
20 Various pump pressures, cage types and nozzle orifice sizes were trialled to determine the optimum operating parameters for the nozzle.

 On the basis of the results of trials, an optimum combination for drilling is a pump pressure of
25 115MPa, a fluid flow rate of 234 litres per minute, and 1.0mm and 1.2mm diameter cutting and reaming jets on the Woma FR47 self-rotating nozzle and 1.2mm diameter orifice for the retro jets. A stepped cage shielding the FR47 nozzle creates a smoother borehole and more consistent
30 borehole diameter.

 An example of this nozzle combination was a borehole which penetrated one hundred and ninety-four metres in a total time of 42 minutes when drilling a non-deflected borehole. A further example was a borehole
35 that penetrated one hundred and ninety-two metres in a total time of 97 minutes with the drill string negotiating an ultra-short-radius turn of 0.3m. Note there is no requirement to stop drilling to couple drill

strings with this system. In both the above cases, drilling was ceased because these were the limit of available drill string at that time. The hole diameter was about 110mm. It is apparent that drilling rates are 5 10 times that of the known system which uses the weight of the drill string to advance the fluid cutter.

It should be appreciated that various other changes and modifications may be made to the embodiment described without departing from the spirit or scope of 10 the invention.

CLAIMS:

1. A self-advancing drilling system comprising a drilling apparatus, the drilling apparatus having at least one leading fluid cutting nozzle, means on the
5 drilling apparatus to provide forward movement to the drilling apparatus, and a drill string formed from a flexible hose.
2. The system of claim 1, wherein the means to provide forward movement comprises at least one retro jet
10 to provide a forward thrust to the drilling apparatus.
3. The system of claim 2, wherein the flexible hose functions as a conduit for the fluid to power the cutting nozzle and the at least one retro jet, but is not used to deliberately advance the cutting nozzle.
- 15 4. The system of claim 3, wherein the drilling apparatus comprises a number of interconnected sub members.
5. The system of claim 4, wherein a leading portion of the drilling apparatus includes a rotating
20 high pressure nozzle having at least one forward cutting jet and at least one side reaming jet.
6. The system of claim 5, wherein the nozzle is mounted for spinning motion within a protective cage to protect the nozzle and reduce the incidence of the nozzle
25 striking the bore wall as the nozzle spins.
7. The system of claim 6, wherein the cage is stepped with the location of the step being immediately behind the at least one reaming jet the step functioning to aim the reaming jets onto protrusions on the borehole
30 wall which catch on the step and prevent the nozzle from advancing.
8. The system of claim 7, wherein the cutting apparatus is steered by a steering means.
9. The system of claim 8, wherein the steering
35 means comprises fluid passing through the at least one retro jet nozzle which can be selectively deflected by a deflecting assembly.
10. The system of claim 9, wherein the deflecting

assembly comprises a deflecting member which can be moved selectively into and out of the fluid jet stream to deflect the stream the deflecting member comprising a protrusion on a ring, the ring extending about the retro sub member whereby rotation of the ring causes the
5 deflecting member to selectively pass into and out of a fluid jet stream.

11. The system of claim 1, wherein the flexible hose comprises a plastics inner core, steel wire
10 reinforcement and an outer plastics cover.

12 A method for removing methane from a coal seam the method comprising passing the self advancing drilling system of claim 1 into the coal seam to cut a bore, removing the self advancing drilling system from the coal
15 seam, and removing methane through the cut bore.

13. A method for removing methane from an underground coal seam, the method comprising drilling a borehole from a ground surface and into the coal seam, forming a cavity in the borehole adjacent the coal seam,
20 passing a whipstock down the borehole and into the cavity, positioning a self advancing fluid drilling system in a desired orientation in the cavity and causing the system to self advance to cut a bore into the coal seam.

25 14. The method of claim 13, wherein the self advancing system is as defined in any one of claims 1 - 10 and 18.

15. The method of claim 13 or claim 14, wherein the whipstock has an erectable arm member.

30 16. The method of claim 15, wherein the erectable arm member has at least one fluid cutting nozzle thereon to cut a slot in the bore wall as the arm is erected.

17. The method of claim 15 or claim 16, wherein the self advancing fluid drilling system includes a drilling
35 apparatus which is initially housed in the arm member and which can advance therefrom to cut a bore.

18. The system of claim 2, wherein the at least one retro jet expels high pressure water at an angle of about

0° - 30° degrees from the longitudinal axis of the drilling apparatus.

1/5

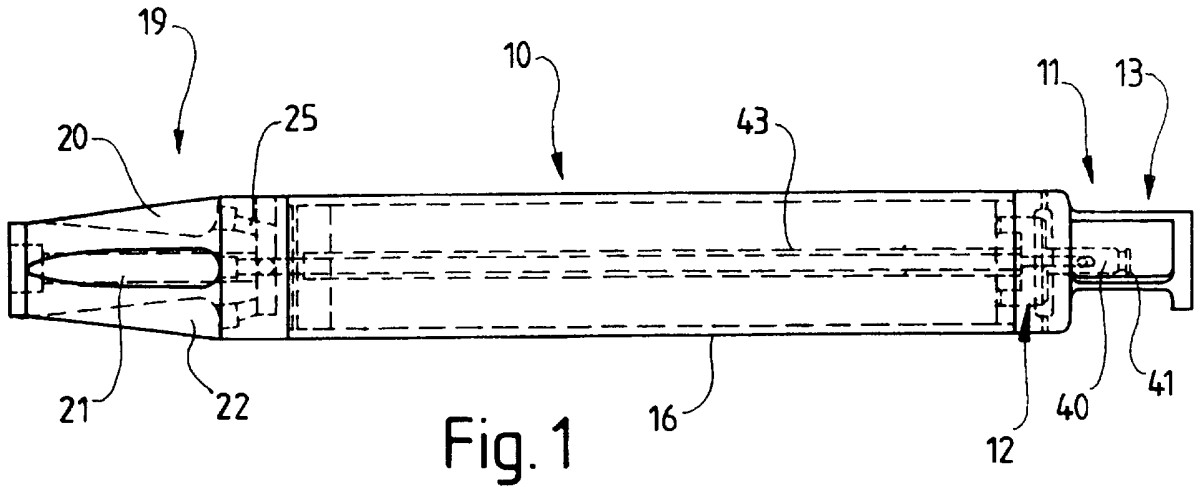


Fig. 1

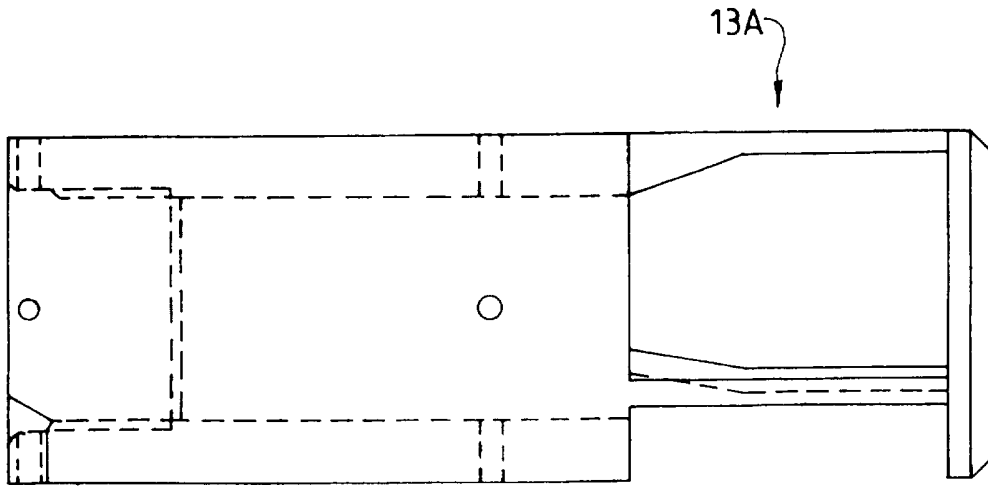


Fig. 2

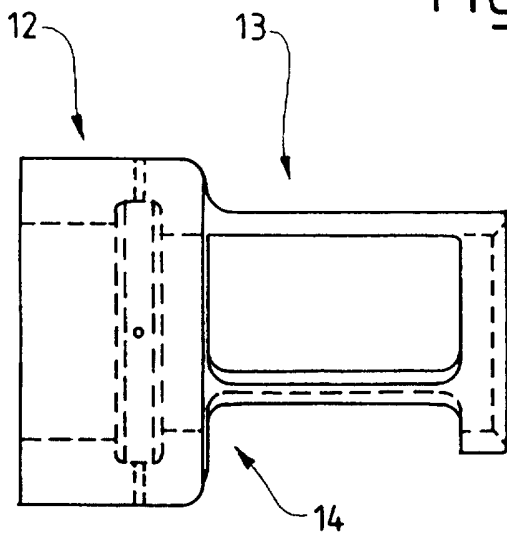


Fig. 3A

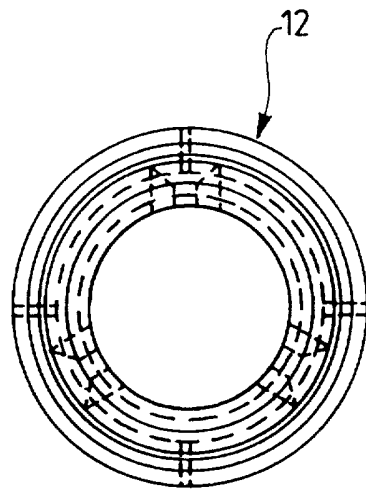


Fig. 3B

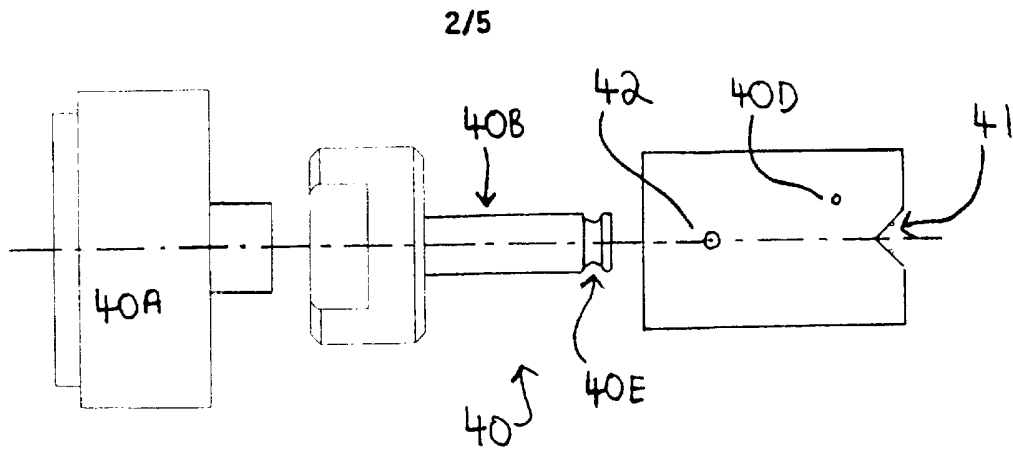


Fig. 4

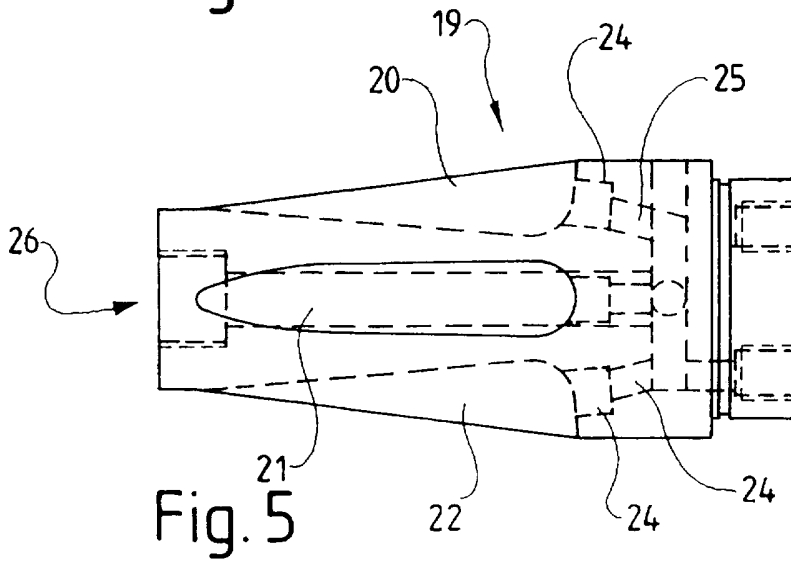


Fig. 5

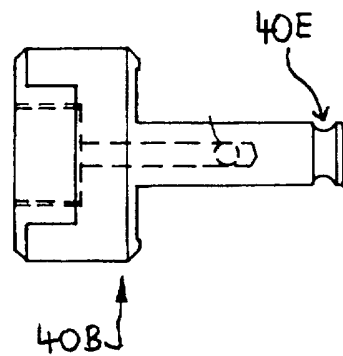


Fig. 7

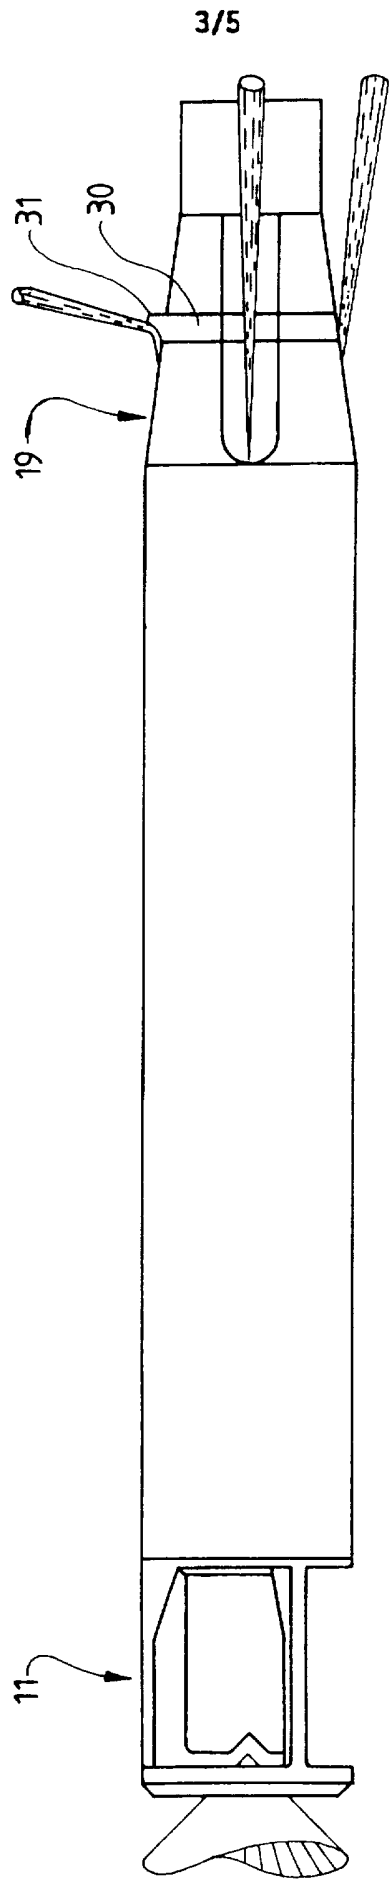


Fig. 6

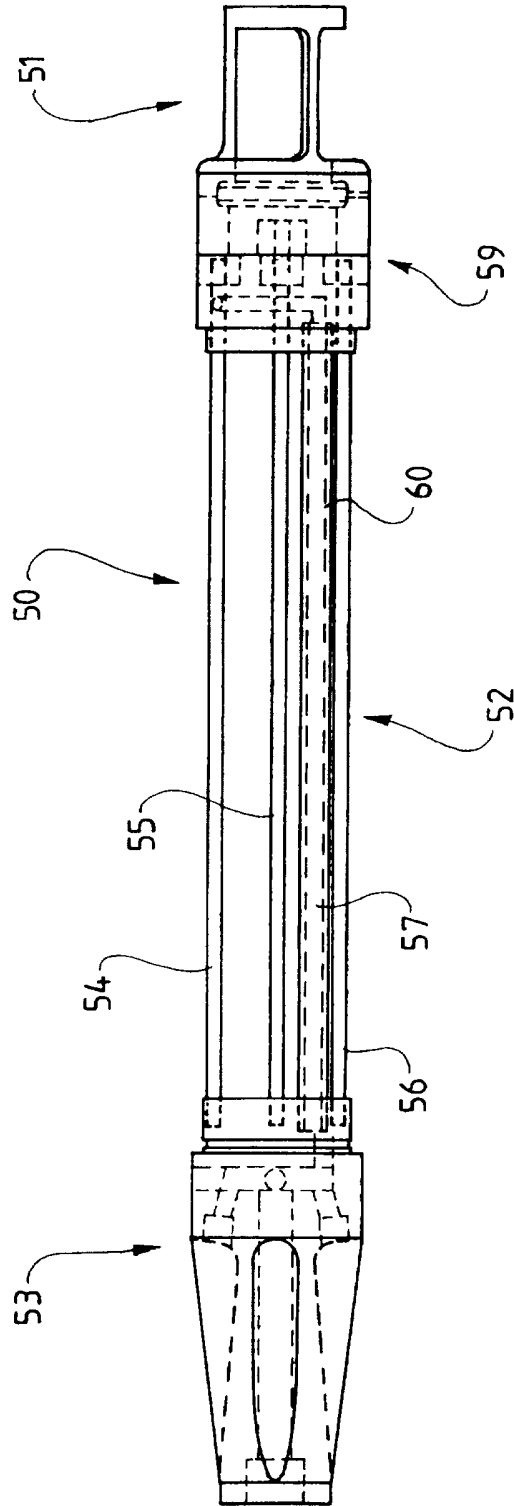


Fig. 8

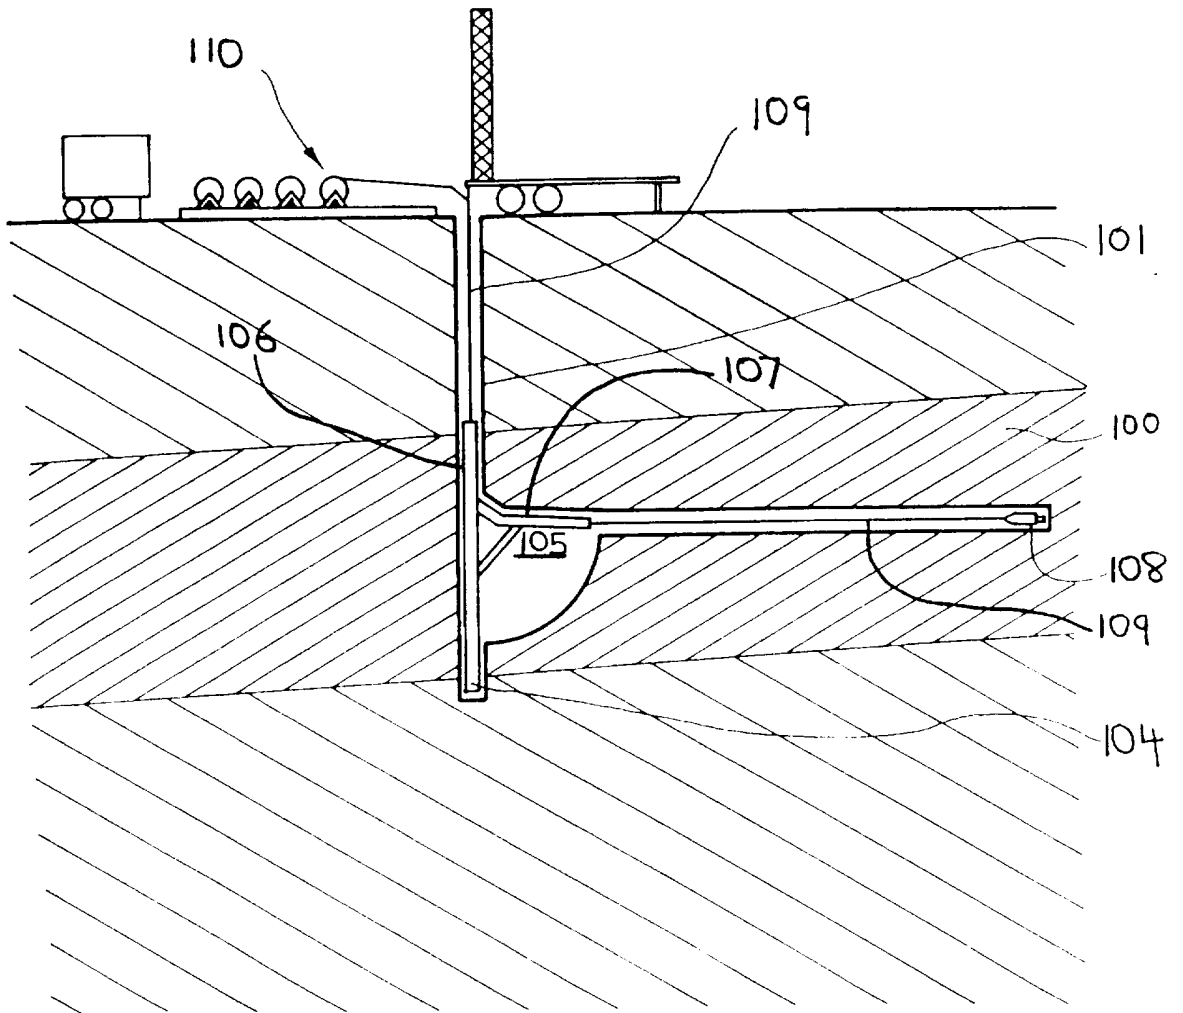


Fig. 9

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/AU 96/00783

A. CLASSIFICATION OF SUBJECT MATTER																						
Int Cl ⁶ : E21B 7/18																						
According to International Patent Classification (IPC) or to both national classification and IPC																						
B. FIELDS SEARCHED																						
Minimum documentation searched (classification system followed by classification symbols) IPC : E21B 7/18, 7/06																						
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU : IPC as above																						
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DERWENT : "SELF ADVANC: OR FORWARD"																						
C. DOCUMENTS CONSIDERED TO BE RELEVANT																						
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																				
A	US 5413184 A (LANDERS) 9 May 1995																					
X	US 5288173 A (JENNE et al) 22 February 1994 column 3 lines 15-58	1, 11,-17																				
X	US 5255750 A (WILKES, Jr. et al) 26 October 1993 see whole document	1, 11-17																				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex																						
<p>* Special categories of cited documents:</p> <table border="0"> <tr> <td>"A"</td> <td>document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T"</td> <td>later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E"</td> <td>earlier document but published on or after the international filing date</td> <td>"X"</td> <td>document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L"</td> <td>document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y"</td> <td>document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O"</td> <td>document referring to an oral disclosure, use, exhibition or other means</td> <td>"&"</td> <td>document member of the same patent family</td> </tr> <tr> <td>"P"</td> <td>document published prior to the international filing date but later than the priority date claimed</td> <td></td> <td></td> </tr> </table>			"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E"	earlier document but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family	"P"	document published prior to the international filing date but later than the priority date claimed		
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																			
"E"	earlier document but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																			
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																			
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family																			
"P"	document published prior to the international filing date but later than the priority date claimed																					
Date of the actual completion of the international search 24 February 1997		Date of mailing of the international search report 27 FEB 1997																				
Name and mailing address of the ISA/AU AUSTRALIAN INDUSTRIAL PROPERTY ORGANISATION PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No.: (06) 285 3929		Authorized officer <i>S. K. Ghosh</i> S. GHOSH Telephone No.: (06) 283 2163																				

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/AU 96/00783

C (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4527639 A (DICKINSON III, et al) 9 July 1985 column 7 lines 14-30 column 11 lines 23-49	1, 11-17
X	US 3844362 A (ELBERT et al) 29 October 1974 see whole document	1-4, 11-17
X	DE 3012482 A1 (SPECK) 8 October 1981 see whole document	1-4, 11-17
A	FR 2493907 A1 (CHARBONNAGES DE FRANCE) 14 May 1982	
X	JP, 6-346676 A (NIPPON STEEL CORP et al) 20 December 1994	1, 11-17

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/AU 96/00783

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member					
US	5413184	AU	78442/94	CA	2172498	EP	720684
		WO	9509963				
US	5288173	DE	4122350	EP	522446		
US	5255750						
US	4527639	MX	159238	AU	16968/83	BE	897361
		BR	8303989	CA	1214768	DE	3326350
		EP	100230	FR	254-968	GB	2124278
		IL	69277	IT	1163856	JP	59085088
		SE	8304122	ZA	8305245		
US	3844362						
DE	3012482						
FR	2493907						
END OF ANNEX							