



- (51) **International Patent Classification:**
G01K 11/00 (2006.01) *G01V 3/12* (2006.01)
- (21) **International Application Number:**
PCT/US2013/073365
- (22) **International Filing Date:**
5 December 2013 (05.12.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/708,315 7 December 2012 (07.12.2012) US
- (71) **Applicant:** HARRIS CORPORATION [US/US]; 1025 W. Nasa Blvd., M/S A-11I, Melbourne, Florida 32901 (US).
- (72) **Inventors:** BEADLE, Edward; 5760 Newbury Circle, Melbourne, Florida 32940 (US). MEDLIN, William Gregory; 2140 Tarrytown Lane NE, Palm Bay, Florida 32905 (US). FREEMAN, Sean K.; 528 Peregrine Drive, Indialantic, Florida 32903 (US). GANTHIER, Emile;

4041 Hield Road NW, Palm Bay, Florida 32907 (US). HOGUE, Stephen T.; 775 Autumn Glen Drive, Melbourne, Florida 32940 (US). SHIPLEY, John Warner; 8080 142nd Street, Sebastian, Florida 32958 (US).

- (74) **Agents:** EVANDER, G. Mitchell et al.; Harris Corporation, 1025 W. Nasa Blvd., M/S A-11I, Melbourne, Florida 32919 (US).

- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

- (54) **Title:** METHOD AND SYSTEM USING RADIOMETRIC VOLUMETRIC DATA FOR DETECTING OIL COVERED BY ICE

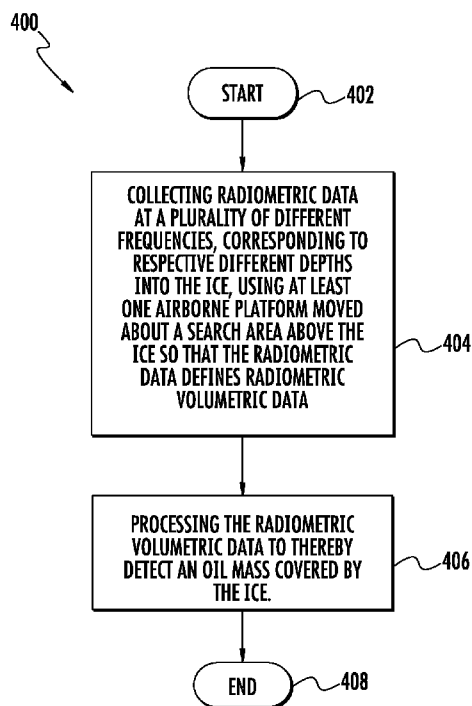


FIG. 8

- (57) **Abstract:** A method for detecting an oil mass covered by ice includes collecting radiometric data different frequencies, corresponding to respective different depths into the ice, using at least one airborne platform moved about a search area above the ice so that the radiometric data defines radiometric volumetric data. The radiometric volumetric data is processed to thereby detect an oil mass covered by the ice.



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

METHOD AND SYSTEM USING RADIOMETRIC VOLUMETRIC DATA FOR DETECTING OIL COVERED BY ICE

5

Field of the Invention

The present invention relates to the field of oil resources, and more particularly, to a method and system for detecting an oil mass covered by ice.

10

Background of the Invention

As the world's demand for fossil fuels increases, energy companies find themselves pursuing hydrocarbon resources in more remote areas of the world. Such pursuits often take place in harsh, offshore conditions. In recent years, drilling and production activities have been started in the Arctic regions.

Spill detection and mapping may be particularly important for Arctic spills as oil may be hidden from view under snow and ice during periods of almost total darkness. Close to 24 hours of daylight in the spring and summer months facilitates monitoring oil spilled during the break-up and open water periods, but periods of fog and a low cloud ceiling remain as serious impediments. During freeze-up and through much of the winter, long periods of darkness and multiple oil/ice scenarios add to the challenges of detection, mapping and tracking oil in ice.

One approach for detecting an oil mass trapped beneath or within a solid ice sheet or on the ice surface under snow is based on the use of a low level airborne ground penetrating radar (GPR). In a paper titled "Remote Sensing for the Oil in Ice Joint Industry Program 2007-2009" by Dickins et al., a commercially available GPR system in the 500 MHz to 1 GHz frequency range is described that may be operated both from the ice surface and at low altitude from a helicopter to detect oil layers in the 1-3 cm range trapped in relatively smooth ice.

GPR is sensitive to the presence of oil in the snow pack over a broad range of snow densities and oil types. Oil located at the base of the snow tends to reduce the impedance contrast with the underlying ice or soil substrate resulting in anomalously low amplitude radar reflections and thereby enhances the prospects for detection with GPR. Sea ice, on the other hand, has a much higher electrical

conductivity that varies substantially both laterally and vertically and can exhibit a high degree of anisotropy due to preferred crystal alignment. GPR may provide reliable thickness measurements for low salinity ice, but significant signal attenuation occurs for high-salinity first-year ice. Consequently, the problem of
5 detecting an oil mass is simpler to formulate for dry snow than it is for sea ice since snow has a relatively isotropic structure and low conductivity.

Direct spill detection from SAR satellites and airborne SLAR/SAR systems is relatively straightforward for large spills in very open drift ice. However, detection of an oil mass covered by ice is much more difficult. Moreover, during
10 freeze-up in fall and early winter, any detection of oil among ice with SAR/SLAR airborne or satellite sensors may be complicated by the presence of grease ice. Grease ice is the earliest smooth stage of ice crystals at the water surface. The presence of grease or new ice in conjunction with an oil spill on the water will produce close to identical signatures in the radar imagery, making detection of an
15 oil slick difficult or impossible.

Other technologies that may be used to detect Arctic oil spills or leakages include forward looking infrared (FLIR) systems, SONAR systems, and hyperspectral imaging systems. In some cases, trained dogs may be used to reliably detect oil near the surface of the ice. A thickness of the ice in Arctic regions, for
20 example, may vary from a few centimeters to 5 meters. While these other technologies may work when the oil is on or near the surface of the ice, they may not be very effective in detecting an oil mass covered by thick ice.

Yet another approach for detecting an oil mass under ice is based on nuclear magnetic resonance (NMR), as disclosed in U.S. Published Patent
25 Application No. 2011/0181279. In this approach, a volume of substances is located under the surface, wherein at least a portion of the volume of substances is within a static magnetic field. At least one radio-frequency excitation pulse is transmitted from a remote location above the volume of substances to generate a nuclear magnetic resonance (NMR) signal from the volume of substances. From the
30 remote location, the NMR signal from the volume of substances is detected. The detected NMR signal is processed to determine whether the volume of substances

includes the liquid. Even in view of NMR, there is still a need to improve upon the detection of an oil mass covered by ice.

Summary of the Invention

5 In view of the foregoing background, it is therefore an object of the present invention to provide a method and system that reliably detects an oil mass covered by ice.

 This and other objects, features, and advantages in accordance with the present invention are provided by a method for detecting an oil mass covered by
10 ice comprising collecting radiometric data at a plurality of different frequencies, corresponding to respective different depths into the ice, using at least one airborne platform moved about a search area above the ice so that the radiometric data defines radiometric volumetric data. The radiometric volumetric data may be processed to thereby detect an oil mass covered by the ice.

15 Multi-band radiometry advantageously takes advantage of energy differences in RF signatures of black-body radiations with respect to an oil mass and ice to reliably detect an oil mass covered by ice. The radiometric data collected at the different frequencies defines a combined x-y-depth profile that may advantageously provide a 3-dimensional visualization of the oil mass covered by
20 the ice.

 In some embodiments, the collecting may include passively collecting the radiometric volumetric data. The different frequencies may extend over a range of 30 MHz to 8 GHz, for example.

 In other embodiments, the method may further include exposing the search
25 area to electromagnetic (EM) radiation so that the collecting includes actively collecting the radiometric volumetric data. This may include exposing the search area to EM radiation having a frequency resonant with the oil. For example, the EM radiation may have a frequency in a range of 8 MHz to 30 MHz.

 The collecting may include collecting the radiometric data over a
30 predetermined dwell time for a given location. This advantageously allows a sufficient energy level to be received so as to more accurately process the radiometric volumetric data.

The processing may include processing based upon at least one polarization characteristic of the radiometric volumetric data.

The method may further include collecting the radiometric volumetric data for the search area at a plurality of different times, and wherein the processing may
5 further include using change detection based upon the plurality of different times to detect the oil mass covered by the ice.

The search area may include a predetermined area around an oil extraction site. Alternatively or additionally, the search area may include a predetermined area around an oil pipeline site. In addition, the at least one airborne platform may
10 include at least one unmanned airborne platform.

Another aspect is directed to a system for detecting an oil mass covered by ice comprising at least one airborne platform configured to collect radiometric data at a plurality of different frequencies, corresponding to respective different depths into the ice, as the at least one airborne platform moves about a search area above
15 the ice so that the radiometric data defines radiometric volumetric data. A processor and a memory coupled thereto may process the radiometric volumetric data to thereby detect an oil mass covered by the ice.

Brief Description of the Drawings

20 FIG. 1 is a flow chart for a method for detecting an oil mass covered by ice using polarimetric radar data in accordance with the present invention.

FIG. 2 is a schematic block diagram of a back scatter system for detecting an oil mass covered by ice using polarimetric radar data in accordance with the present invention.

25 FIG. 3 is a more detailed flow chart illustrating a method for detecting an oil mass under ice using the single airborne platform illustrated in FIG. 2.

FIG. 4 is a plot of dielectric loss for ice as a function of frequency in accordance with the present invention.

FIG. 5 is a schematic diagram representing a polarimetric radar data cube
30 used to provide a scattering matrix defining a polarimetric depth slice in accordance with the present invention.

FIG. 6 is a schematic block diagram of a forward scatter system for detecting an oil mass covered by ice using polarimetric radar data in accordance with the present invention.

FIG. 7 is a more detailed flow chart illustrating a method for detecting an oil mass under ice using the multiple airborne platforms illustrated in FIG. 6.

FIG. 8 is a flow chart for a method for detecting an oil mass covered by ice using radiometric volumetric data in accordance with the present invention.

FIG. 9 is a schematic block diagram of a system with a passively operated multi-band receiver for detecting an oil mass covered by ice using radiometric volumetric data metric radar data in accordance with the present invention.

FIG. 10 is a flow chart illustrating a method for detecting an oil mass under ice using the system with the passively operated multi-band receiver illustrated in FIG. 9.

FIG. 11 is a graph illustrating RF spectral signatures for ice and an oil mass at different frequencies with respect to a search area in accordance with the present invention.

FIG. 12 is an energy map of the search area reflecting operation of the passively operated multi-band receiver in FIG. 9 at different frequencies.

FIG. 13 is a schematic diagram of a 3-dimensional visualization of an oil mass based on combined x-y-depth information data in accordance with the present invention.

FIG. 14 is a schematic block diagram of a system with an actively operated multi-band receiver for detecting an oil mass covered by ice using radiometric volumetric data metric radar data in accordance with the present invention.

FIG. 15 is a flow chart illustrating a method for detecting an oil mass under ice using the system with the actively operated multi-band receiver illustrated in FIG. 14.

FIG. 16 is a flow chart for a method for detecting an oil mass covered by ice using coordinated airborne and ground platforms in accordance with the present invention.

FIG. 17 is a schematic block diagram of a system using coordinated airborne and ground platforms for detecting an oil mass covered by ice in accordance with the present invention.

5

Detailed Description of the Preferred Embodiments

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein.

10

Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout, and prime notation is used to indicated similar elements in alternative embodiments.

15

In Arctic regions, for example, a thickness of ice may vary from a few centimeters to 5 meters. The area to be searched when looking for a leaked oil mass is typically within a predetermined area associated with an oil extraction site or an oil pipeline site. The oil extraction site may be an oil platform within the Arctic waters, and the oil pipeline site may extend away from the oil platform to deliver recovered crude oil. As an example, the search area is about 10 km²

20

surrounding the oil platform and the oil pipeline site. The search area is to be frequently searched to look for changes indicative of a pocket of oil forming under or trapped within a layer of ice, in other words, the area is searched to detect a mass of oil covered by ice. Those of skill in the art will recognize that the oil mass will also be detected on the surface of the snow or ice; however, an oil mass

25

covered by ice presents the more difficult detection challenge.

In addition, since the characteristics of ice changes as a function of time and temperature, it may be desirable to establish a baseline of the environmental characteristics within the search area. Since the thickness of ice and its salinity varies throughout the season, this has an effect on the penetration depth of the radar used to collect the environmental characteristics.

30

One aspect of detecting an oil mass covered by ice is based on the use of polarimetric volumetric radar data. As will be discussed in greater detail below,

polarimetric volumetric radar data advantageously allows an oil mass to be reliably detected within the search area when covered by ice. Once an oil mass is detected, its size and volume may be determined based on the polarimetric volumetric radar data.

5 Referring initially to the flowchart **20** in FIG. 1, a method for detecting an oil mass covered by ice includes, from the start (Block **22**), collecting polarimetric radar data at different depths into the ice at Block **24** using at least one airborne platform moved about the search area above the ice so that the polarimetric radar data defines polarimetric volumetric radar data. The polarimetric volumetric radar
10 data is processed at Block **26** based upon at least one polarimetric feature to thereby detect an oil mass covered by the ice. The method ends at Block **28**.

In one embodiment, the at least one airborne platform is a single airborne platform **50** as illustrated in FIG. 2. In greater detail, a corresponding method of detecting an oil mass **86** covered by ice **84** using the single airborne platform **50** is
15 now explained with additional reference to the flow chart **30** in FIG. 3. From the start (Block **32**), the single airborne platform **50** is moved about a search area **80** at Block **34**. The single airborne platform **50** includes spaced apart transmit and receive antennas **52, 54**. The spaced apart transmit and receive antennas **52, 54** allow for bi-static operation of a radar **56** carried by the single airborne platform
20 **50**. The single airborne platform **50** is about 100 feet above the ice **84**, for example.

A transmitter **57** within the radar **56** transmits polarized signals **60** to the search area **80** at Block **36**. The polarized signals **60** include horizontal polarization and vertical polarization, which are orthogonal to one another. In lieu of or in
25 additional to the horizontal and vertical polarizations, left-hand and right-hand circular polarizations may be used, which are also orthogonal to one another.

A desired operating frequency of the radar **56** may be selected based on antenna size and penetration depth of the polarized signals into the ice **84**. As readily understood by those skilled in the art, ice acts as an insulator and a
30 dielectric loss of the ice varies with respect to frequency. As illustrated by line **102** in the graph **100** provided in FIG. 4, the dielectric loss of the ice **84** increases as the frequency is lowered to the 10 MHz range. Within the 0.1–1.0 GHz frequency

range, as highlighted by box **104**, a balance between dielectric loss and frequency is obtained. In the illustrated example, the operating frequency of the radar **56** is 0.1 GHz.

A receiver **58** within the radar **56** is operated to receive reflected polarized signals **62** from the search area **80** at Block **38** based on the transmitted polarization signals **60** being reflected from the search area. The return signals **62** provide a polarimetric depth slice based on different measurements.

Referring now to FIG. 5, an illustrated polarimetric radar data cube **110** is defined based on the radar transmitter **57** transmitting vertically polarized signals and horizontally polarized signals **60**. The radar receiver **58** receives both horizontal and vertically polarized signals **62** on corresponding horizontally and vertically polarized antennas.

Still referring to FIG. 5, given these four measurements, a polarimetric depth slice **112** represented by a scattering matrix $S(d)$ is obtained. The polarimetric depth slice **112** corresponds to the polarimetric volumetric radar data being provided at Block **40** to a data acquisition unit **72** carried by the airborne platform **50**. The illustrated data acquisition unit **72** is included within a processor **70** coupled to the radar **56**. Alternatively, the data acquisition unit **72** may be configured as a memory **75** external the processor **70** within the single airborne platform **50**. Of course, the processor may also include memory embedded on the same integrated circuit as the processor circuitry.

Each scattering matrix $S(d)$ corresponds to a particular depth. The depth is determined based on a round trip time (RTT) of a transmitted polarization signal **60** being reflected **62** and received by the radar receiver **58**. Since distance = rate * time, the longer the radar receiver **58** waits to receive the return signal, then the greater is the corresponding depth into the ice **84**. By adjusting the RTTs, different scattering matrixes $S(d)$ are obtained, where the different scattering matrixes $S(d)$ correspond to different depths into the ice **84**. The different scattering matrixes $S(d)$ are stored in the data acquisition unit **72** or memory **75**.

The different scattering matrixes $S(d)$ included within the polarimetric radar data are processed by a data processing unit **74** at Block **42**. The data processing unit **74** may be within the processor **70** carried by the single airborne

platform **50**, or alternatively, the data processing unit may be external the single airborne platform **50**. In the illustrated embodiment, the data processing unit **132** is located at a remote command and control processing center **130**.

Polarimetric volumetric radar data from the data acquisition unit **72** may be provided to the data processing unit **132** at the command and control processing center **130** via a data link **78**. The data link **78** includes an antenna **79** coupled thereto. The command and control processing center **130** includes a corresponding data link **134** with an antenna **135** coupled thereto. Alternatively, the polarimetric volumetric radar data may be on a removable data storage medium that is physically inserted into the data processing unit **132** at the command and control processing center **130**.

When processing the polarimetric volumetric radar data, polarization profiles are used to identify boundaries of different layer or strata interfaces. The layers making up the search area **80** are snow **82**, ice **84**, an oil mass **86** and water **88**. The different layer interfaces thus include a snow-to-ice interface **90**, an ice-to-water interface **92**, an ice-to-oil interface **94**, and an oil-to-water interface **96**. Each one of these interfaces provides a different polarization profile which can then be used to identify the particular type of interface. By reliably determining the different types of interfaces, when an ice-to-oil interface **94** or an oil-to-water interface **96** is detected under the ice **84**, then a reliable determination can be made that an oil mass **86** has been detected.

In one embodiment, the radar **56** operates based on pulses. To build up sufficient energy on a target within the search area **80**, a longer pulse width may be used or multiple pulses are used. A pulse may be an impulse or pulse-compression with an appropriate equalizer. In another embodiment, the radar **56** operates based on a frequency modulated, continuous wave (FMCW) waveform. An FMCW waveform is frequency agile and adaptive, as readily appreciated by those skilled in the art.

RF sounding may be used to adjust an operating frequency of the radar transmitter **57** based on the environmental conditions in the search area **80**. RF sounding allows characteristics of the ice **84** to be determined at Block **44**. Based

on the determined characteristics of the ice **84**, such as thickness and salinity, the operating frequency of the transmitter is adjusted at Block **46**.

RF sounding involves transmitting a signal to the ice, and based on a return signal, the thickness of the ice may be determined. Since ice acts as an insulator, as illustrated by the graph **100** in FIG. 4, the operating frequency may be adjusted up or down depending on the thickness of the ice. As an alternative to RF sounding, ice characteristics may be determined based on preexisting geological surveys, for example.

If the four different measurements within the different scattering matrixes $S(d)$ are not strong enough to determine the different polarization profiles, then other polarimetric features may be used. For example, the other polarimetric features are provided in TABLE 1 below, and include the following:

TABLE 1

#	Feature
1	Entropy H
2	Anisotropy A
3	Polarimetric span
4	Mean scattering angle α
5	Alternative entropy A_{12}
6	Standard deviation of CDP
7	Conformity coefficient μ
8	Co-pol correlation coefficient ρ_{cp}
9	Combined feature F
10	Circular polarization coherence CPC
11	Bragg likelihood ratio

The scattering matrix $S(d)$ may first be represented as the following T matrix:

$$T = \frac{1}{2} \begin{bmatrix} \langle |S_{HH} + S_{VV}|^2 \rangle & \langle (S_{HH} + S_{VV})(S_{HH} - S_{VV})^* \rangle & 2\langle (S_{HH} + S_{VV})S_{HV}^* \rangle \\ \langle (S_{HH} - S_{VV})(S_{HH} + S_{VV})^* \rangle & \langle |S_{HH} - S_{VV}|^2 \rangle & 2\langle (S_{HH} - S_{VV})S_{HV}^* \rangle \\ 2\langle S_{HV}(S_{HH} + S_{VV})^* \rangle & 2\langle S_{HV}(S_{HH} - S_{VV})^* \rangle & 4\langle |S_{HV}|^2 \rangle \end{bmatrix}$$

$$p_i = \frac{\lambda_i}{\sum_{j=1}^3 \lambda_j}$$

where the different T matrixes correspond to different polarimetric depth slices **112**, as illustrated in FIG. 5. One or more of the polarimetric features in TABLE 1 may be used for determining the different polarization profiles.

In one such combination, an eigenvalue decomposition on the T matrixes provides the value p_i . The value p_i is then used to determine the entropy H, as follows:

$$H = - \sum_{i=1}^3 p_i \log_3 p_i$$

$$A = \frac{p_2 - p_3}{p_2 + p_3}$$

To get the anisotropy A, the less dominant eigenvalues p_2 and p_3 are used. If the H and A measurements are strong enough, then they may be used to determine the different profile interfaces. However, if the H and A measurements are weak, then the conformity coefficient may be calculated for using the information in matrix T defining the polarimetric depth slice **112**, as follows:

$$\mu = \frac{2(\operatorname{Re}(S_{HH}S_{VV}^*) - |S_{HV}|^2)}{|S_{HH}|^2 + 2|S_{HV}|^2 + |S_{VV}|^2}.$$

Yet other features from TABLE 1 may be used, as readily appreciated by those skilled in the art. The method as illustrated in FIG. 3 ends at Block **48**.

The single airborne platform **50** may be piloted by a human, or it may be remote controlled via the data link **134** at the command and control processing center **130**. In yet other alternative embodiments, the single airborne platform **50** may be autonomously controlled, such as a lighter-than-air aircraft intended to hover over the search area **80** for extended periods of time.

As an alternative to a single airborne platform **50** allowing for bi-static operation, multiple airborne platforms **200**, **202** may be used allowing for a forward scatter operation, as illustrated in FIG. 6. In greater detail, a corresponding method of detecting an oil mass **286** covered by ice **284** using first and second

airborne platforms **200, 202** is now described with reference to the flow chart **230** in FIG. 7.

The first airborne platform **200** includes a transmitter **257** and a transmit antenna **252** coupled thereto. The second airborne platform **202** includes a receiver **258** and a receive antenna **254** coupled thereto. As an example, the first and second airborne platforms **200, 202** may be about 100 feet above the ice **284**, and may be separated by about 3 degrees off normal.

From the start (Block **232**), the first and second airborne platforms **200, 202** are moved about a search area **280** at Block **234**. The transmitter **257** in the first airborne platform **200** is operated to transmit polarized signals **260** to the search area **280** at Block **236**, and to also transmit a reference signal **261** to the receiver **258** in the second airborne platform **202**.

The receiver **258** in the second airborne platform **202** is operated at Block **238** to receive reflected polarized signals **262** from the search area **280** based on the transmitted polarization signals **260** being reflected from the search area **280**, and to also receive the reference signal **261** from the first airborne platform **200**. The reference signal **261** corresponds to a timing signal so that the receiver **258** in the second airborne platform **202** is coordinated with the transmitter **257** in the first airborne platform **200** to allow processing of the polarimetric radar data.

The polarimetric radar data is provided at Block **240** to a data acquisition unit **272** carried by the second airborne platform **202**. As with the single airborne platform **50**, the illustrated data acquisition unit **272** is included within a processor **270** coupled to the receiver **258**. Alternatively, the data acquisition unit **272** may be configured as a memory **75** external the processor **270** within the second airborne platform **202**.

The polarimetric radar data is processed by a data processing unit **274** at Block **242** based upon at least one polarimetric feature to thereby detect an oil mass covered by the ice. As with the single airborne platform **50**, the data processing unit **274** may be within the processor **270** carried by the second airborne platform **202**, or alternatively, the data processing unit may be replaced or supplemented by a data processing unit **332** at the command and control processing center **330**.

RF sounding may also be used to adjust an operating frequency of the transmitter **257** based on the environmental conditions in the search area **280**. RF sounding allows characteristics of the ice **284** to be determined at Block **244**. Based on the determined characteristics of the ice **284**, such as thickness and salinity, the operating frequency of the transmitter **257** is adjusted at Block **246**.
The method ends at Block **248**.

As discussed above, a forward scatter operation is performed between the first and second platforms **200, 202** to detect an oil mass **286** covered by ice **284**. Another forward scatter operation may be performed between the first and second platforms **200, 202** when the second airborne platform **202** further includes a transmitter and the first airborne platform **200** further includes a receiver. Operation of the further transmitter and receiver is similar to operation of the above discussed transmitter **257** and receiver **258**, and this need no further discussion herein.

Another aspect of detecting an oil mass covered by ice is based on the use of radiometric volumetric data. As will be discussed in greater detail below, radiometric volumetric data advantageously allows an oil mass to be reliably detected within the search area when covered by ice. Once an oil mass is detected, its size and volume may be determined based on the radiometric volumetric data.

Referring initially to the flowchart **400** in FIG. 8, a method for detecting an oil mass covered by ice includes, from the start (Block **402**), collecting radiometric data at Block **404** at a plurality of different frequencies, corresponding to respective different depths into the ice, using at least one airborne platform moved about a search area above the ice so that the radiometric data defines radiometric volumetric data. The radiometric volumetric data is processed at Block **406** to thereby detect an oil mass covered by the ice. The method ends at Block **408**.

In one embodiment, an airborne platform **450** with a multi-band receiver **452** is passively operated to collect the radiometric volumetric data, as illustrated in FIG. 9. In greater detail, a corresponding method of detecting an oil mass **486** covered by ice **484** using radiometric volumetric data is described with additional reference to the flow chart **540** in FIG. 10. From the start (Block **542**), the airborne platform **450** is moved about a search area **480** at Block **544**. The airborne platform

450 includes a multi-band receiver **452** and a broadband aperture **454** coupled thereto. The airborne platform **450** is about 100 feet above the ice **484**, for example.

5 The multi-band receiver **452** is passively operated at Block **546** to collect radiometric data at different frequencies, corresponding to respective different depths into the ice **484**, so that the radiometric data defines radiometric volumetric data. Multi-band radiometry advantageously takes advantage of energy differences in RF signatures of black-body radiations with respect to an oil mass and ice to reliably detect an oil mass covered by ice.

10 The multi-band receiver **452** is configured to operate over a range of 30 MHz to 8 GHz, for example. Based on IEEE frequency band designations, 30 MHz to 8 GHz corresponds to the following designations: VHF (30-300 MHz), UHF (300-1000 MHz), L-band (1-2 GHz), S-band (2-4 GHz) and C-band (4-8 GHz). Determining a depth of the oil mass is advantageously exploited based on the
15 different penetration depths of the RF bands. The operating range may be contiguous, meaning that the multi-band receiver **452** operates at a frequency within each band. In other embodiments, selected bands may not be used so that the multi-band receiver **452** is non-contiguous as will be appreciated by those skilled in the art.

20 As illustrated in FIG. 9, the ice **484** provides an RF signature **490** having a certain energy level, whereas the oil mass **486** has an RF signature **492** at a higher signature level. This is due the emissivity of the oil mass **486** being greater than the emissivity of the ice **484**, as readily appreciated by those skilled in the art.

A graph **560** illustrating RF spectral signatures for ice and an oil mass at
25 different frequencies with respect to the search area **480** is provided in FIG. 11. Curve **562** corresponds to the oil mass **486** and curve **564** corresponds to the ice **484**. Reference **566** corresponds to L-band, whereas reference **568** corresponds to VHF. As illustrated, less black body radiance at L-band allows for a shallower band when creating a radiometric map. In contrast, there is more black body
30 radiance at VHF which allows for a deeper band when creating the radiometric map.

An energy map **580** of the search area **480** reflecting operation of the passively operated multi-band receiver **452** will now be discussed with reference to FIG. 12. The x-y coordinates of the energy map **580** are based on overlapping energy maps of each individual frequency band. For example, suspected oil pools **582** in the energy map **580** are a result of a VHF energy map. Possible oil pool **584** in the energy map **580** is a result of an UHF energy map. The remaining area **586** represents no oil detection and is a result of an L-band energy map. The energy maps associated with S-band and C-band also did not indicate any oil detection.

The radiometric volumetric data is provided to a data acquisition unit **462** carried by the airborne platform **450** at Block **548**. The illustrated data acquisition unit **462** is included within a processor **460** coupled to the multi-band receiver **452**. Alternatively, the data acquisition unit **462** may be configured as a memory **470** external the processor **460** within the airborne platform **450**.

The radiometric volumetric data is processed at Block **550** by a data processing unit **464**. The data processing unit **464** may be within the processor **460** carried by the airborne platform **450**, or alternatively, the data processing unit may be external the airborne platform **450**. In this configuration, the data processing unit **512** is at a command and control processing center **510**.

Radiometric volumetric data from the data acquisition unit **462** may be provided to the data processing unit **512** at the command and control processing center **130** via a data link **500**. The data link **500** includes an antenna **502** coupled thereto. The command and control processing center **510** includes a corresponding data **514** with an antenna **516** coupled thereto. Alternatively, the radiometric volumetric data is on a removable medium that is physically inserted into the data processing unit **512** at the command and control processing center **510**.

Processing of the radiometric volumetric data by the data processing unit **512** collected at the different frequencies defines a combined x-y-depth profile that may advantageously provide a 3-dimensional visualization of the oil mass **486** covered by the ice **484**, as perhaps best illustrated by the radiometric profile **590** in FIG. 13. Reference **591** represents the detected oil mass **486**.

Operation of the multi-band receiver **452** may be performed over a predetermined dwell time for a given location. This advantageously allows a sufficient energy level to be received so as to more accurately process the radiometric volumetric data. The processing may further include
5 processing based upon at least one polarization characteristic of the radiometric volumetric data. Energy detectors for each band may be used to provide soft decisions (multiple thresholds) for inferring oil detection confidence between an oil/ice mixture and an ice/water column that is passively interrogated.

The multi-band receiver **452** may be operated at a plurality of different
10 times, which allows the processing to further include using change detection based upon the plurality of different times to detect the oil mass covered by the ice. The method ends at Block **552**.

The airborne platform **450** may be piloted by a human, or it may be remote controlled via the data link **514** at the command and control processing center **510**.
15 In yet other alternative embodiments, the airborne platform **450** may be autonomously controlled, such as a lighter-than-air aircraft intended to hover over the search area **480** for extended periods of time.

The multi-band receiver **452** may be configured with a separate receiver for each frequency band. The broadband aperture **454** may be a single aperture with a
20 number of different feeds corresponding to the different frequency bands. Alternatively, separate antennas may be used in lieu of the broadband aperture **454**. As a further alternative, the broadband aperture **454** may be configured as a phased array.

Another aspect of detecting an oil mass covered by ice using radiometric
25 volumetric data includes an actively operated multi-band receiver **452'**, as illustrated in FIG. 14. A transmitter **453'** and an antenna **455'** coupled thereto is carried by the airborne platform **450'**. In greater detail, a corresponding method of detecting an oil mass **486'** covered by ice **484'** using radiometric volumetric data is provided by the flow chart **600** in FIG. 15.

30 From the start (Block **602**), the airborne platform **450'** is moved about a search area **480'**. A transmitter **453'** carried by the airborne platform **450'** is operated at Block **606** to expose the search area **480'** with EM radiation. The

search area **480'** is exposed to EM radiation having a frequency resonant with the oil **486'**. This advantageously allows a stronger energy signature for the oil mass **486'** to be detected. The EM radiation may have a frequency in a range of 8 MHz to 30 MHz, for example.

5 The multi-band receiver **452'** is actively operated at Block **608** to collect radiometric data at a plurality of different frequencies, corresponding to respective different depths into the ice, so that the radiometric data defines radiometric volumetric data.

The radiometric volumetric data is provided to a data acquisition unit **462'** carried
10 by the airborne platform **450'** at Block **610**. The radiometric volumetric data is processed at Block **610** to thereby detect an oil mass **486'** covered by the ice **484'**. The method ends at Block **612**.

Another aspect of detecting an oil mass covered by ice is based on using coordinated airborne and ground platforms to provide a very high probability of
15 detection at a particular location. Once an oil mass is detected, then appropriate remedial action may be taken. Since the probability of detection is very high, time and cost are not wasted on false alarms.

Referring now to FIGS. 16 and 17, a flowchart **950** and corresponding system for detecting an oil mass **754** covered by ice **752** using coordinated ground
20 and airborne platforms **700, 800** will be discussed. From the start (Block **952**) in the flow chart **950**, alert data is collected at Block **954** at a first probability of detection using at least one airborne platform **800** moved about a search area **750** above the ice **754**. An alert area outlined by cone **801** is determined at Block **956** having a likelihood of an oil mass **756** covered by the ice **754** based upon the alert
25 data.

Confirmation data is collected at Block **958** at a second probability of detection higher than the first probability of detection using a ground platform **700** moved over the alert area **801**. An oil mass **756** covered by the ice **754** is detected at Block **960** based upon the confirmation data. A confirmation area outlined by
30 cone **701** is within the alert area **801**. The method ends at Block **962**.

The airborne platform **800** includes a radar **802**. The radar **802** includes a transmitter **804** and a receiver **806**. Spaced apart transmit and receive antennas

805, 807 are respectively coupled to the transmitter and receiver **804, 806**. Alert data collected by the radar **802** is provided to a data acquisition unit **812**. The illustrated data acquisition unit **812** is included within a processor **810** coupled to the radar **802**.

5 The alert data is provided to a data processing unit **814** that may also be included within the processor **810**. The data processing unit **814** determines the alert area having a likelihood of an oil mass covered by the ice based upon the alert data. This is performed having a first probability of detection. A data link **816** having an antenna **818** coupled thereto interfaces with the processor **810**.

10 The illustrated ground platform **700** includes a wideband impulse radar **702**, an acoustic radar sensor **704** and a LIDAR sensor **706** to collectively provide the confirmation data to a data acquisition unit **712**. The data acquisition unit **712** is within a processor **710** within the ground platform **700**.

15 Information on the alert area as determined by the airborne platform **800** is provided to the ground platform **700** via data links **716, 816**. In particular, a contour map of the surface of the alert area is provided to the ground platform **700**. Since the ground platform **700** is mobile, the contour map is advantageously used to avoid cracks and crevices that may cause the ground platform to become stuck or turned over on its side.

20 The confirmation data is provided to a data processing unit **714** that may also be included within the processor **710**. The data processing unit **714** determines the oil mass **756** covered by the ice **754** based upon the confirmation data. The data processing unit **714** has a second probability of detection higher than the first probability of detection. A data link **716** having an antenna **718** coupled thereto
25 interfaces with the processor **710**.

30 In lieu of the data processing unit **814** determining the alert area in the airborne platform **800** and the data processing unit **714** determining the oil mass **756** in the ground platform **700**, the respective data used for this processing may be transmitted via data links **816, 716** to a command and control processing center **900**.

 The command and control processing center **900** includes a processor **902** performing these functions via a data processing unit **904** and data processing unit

906. A data link **908** with an antenna **910** coupled interfaces with the processor **902** for providing the collected alert data received via data link **816** at the airborne platform **800**, and the collected confirmation data received via data link **716** at the ground platform **700**.

5 In one embodiment, the ground platform **700** is manned and the airborne platform **800** is unmanned. The airborne platform **800** is controlled by the command and control processing center **900** via the data links **908, 816**. In another embodiment, the airborne platform **800** is manned, and the ground platform **700** is unmanned. The ground platform **700** is controlled by the command and control
10 processing center **900** via the data links **908, 716**. In yet another embodiment, both the ground and airborne platforms **700, 800** are unmanned and are controlled by the command and control processing center **900**.

 The radar **802** within the airborne platform may be a synthetic-aperture radar (SAR). Alternatively, the radar **802** may be a circular polarization diversity
15 synthetic-aperture radar data. The Circular Polarization Ratio (CPR) will be used to distinguish between returns from ice and oil deposits in ice.

 The first probability of detection may be less than or equal to 80%, and the second probability of detection may be greater than or equal to 99%. In addition, the insulator characteristics of the oil mass **756** will produce a capacitive effect
20 similar to a parallel-plate capacitor when interrogated by an RF electromagnetic field. The equivalent RC circuit ringing depends on a size of the oil mass **756** (i.e., area and volume) and penetration of the RF signal. A time constant RC determines a ringing duration, as readily appreciated by those skilled in the art.

 The various different oil detection techniques as described herein may be
25 used individually or may be combined with one another as will be appreciated by those skilled in the art. In addition, many modifications and other embodiments of the invention will come to the mind of one skilled in the art having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is understood that the invention is not to be limited to the specific
30 embodiments disclosed, and that modifications and embodiments are intended to be included within the scope of the appended claims.

CLAIMS

1. A method for detecting an oil mass covered by ice comprising:
collecting radiometric data at a plurality of different frequencies,
corresponding to respective different depths into the ice, using at least one airborne
5 platform moved about a search area above the ice so that the radiometric data
defines radiometric volumetric data; and
processing the radiometric volumetric data to thereby detect an oil mass covered
by the ice.
- 10 2. The method according to Claim 1 wherein collecting comprises
passively collecting the radiometric volumetric data.
3. The method according to Claim 1 further comprising exposing
the search area to electromagnetic (EM) radiation so that the collecting comprises
15 actively collecting the radiometric volumetric data.
4. The method according to Claim 1 wherein the collecting
comprises collecting the radiometric data over a predetermined dwell time for a
given location.
- 20 5. The method according to Claim 1 further comprising collecting
the radiometric volumetric data for the search area at a plurality of different times;
and wherein processing further comprises using change detection based upon the
plurality of different times.
- 25 6. A system for detecting an oil mass covered by ice comprising:
at least one airborne platform configured to collect radiometric data
at a plurality of different frequencies, corresponding to respective different depths
into the ice, as the at least one airborne platform moves about a search area above
30 the ice so that the radiometric data defines radiometric volumetric data; and

a processor and a memory coupled thereto configured to process the radiometric volumetric data to thereby detect an oil mass covered by the ice.

5 7. The system according to Claim 6 wherein said at least one airborne platform is configured to passively collect the radiometric volumetric data.

10 8. The system according to Claim 6 wherein said at least one airborne platform is configured to expose the search area to electromagnetic (EM) radiation so as to actively collect the radiometric volumetric data.

15 9. The system according to Claim 6 said at least one airborne platform is configured to collect the radiometric volumetric data over a predetermined dwell time for a given location.

20 10. The system according to Claim 6 wherein said at least one airborne platform is configured to collect the radiometric volumetric data for the search area at a plurality of different times; and wherein said processor is configured to process the radiometric volumetric data using change detection based upon the plurality of different times.

1/15

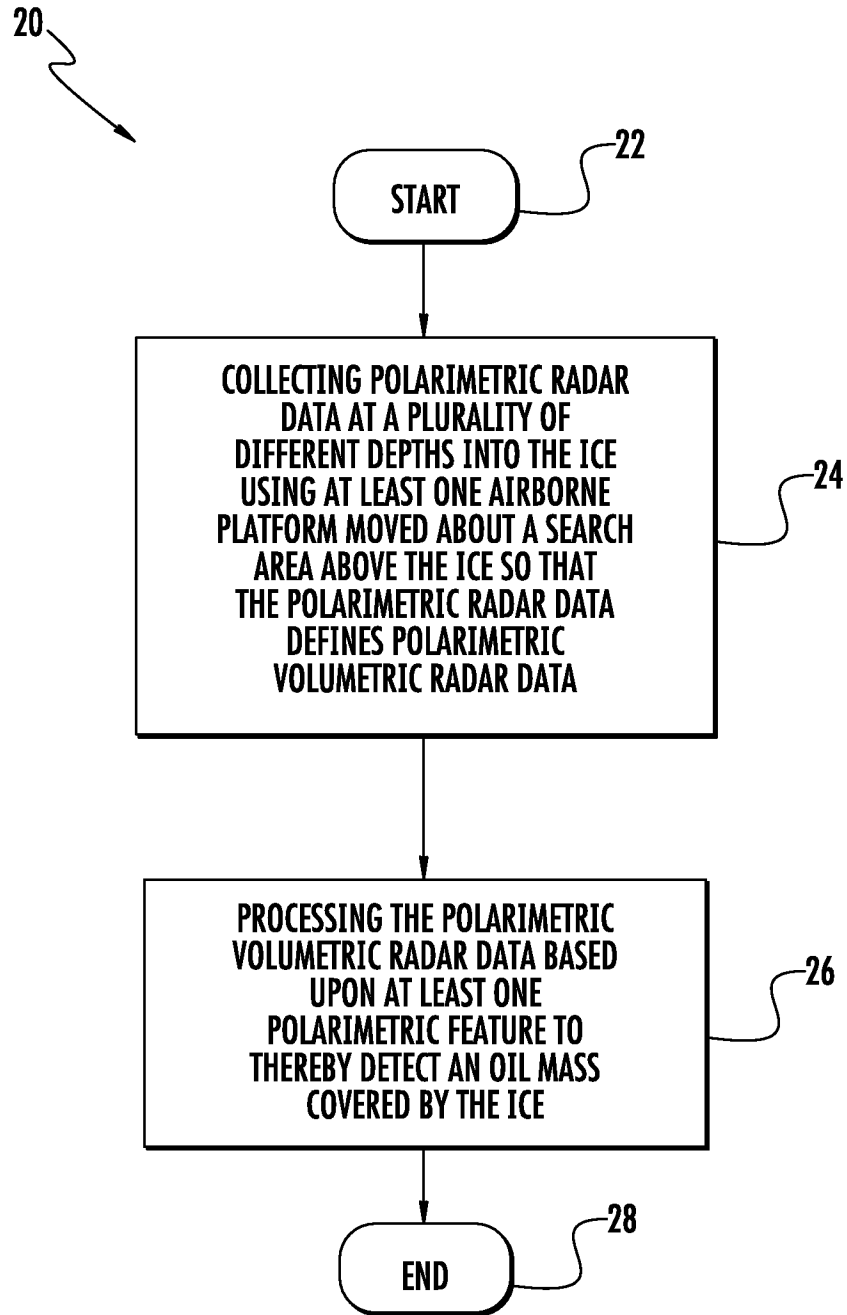


FIG. 1

2/15

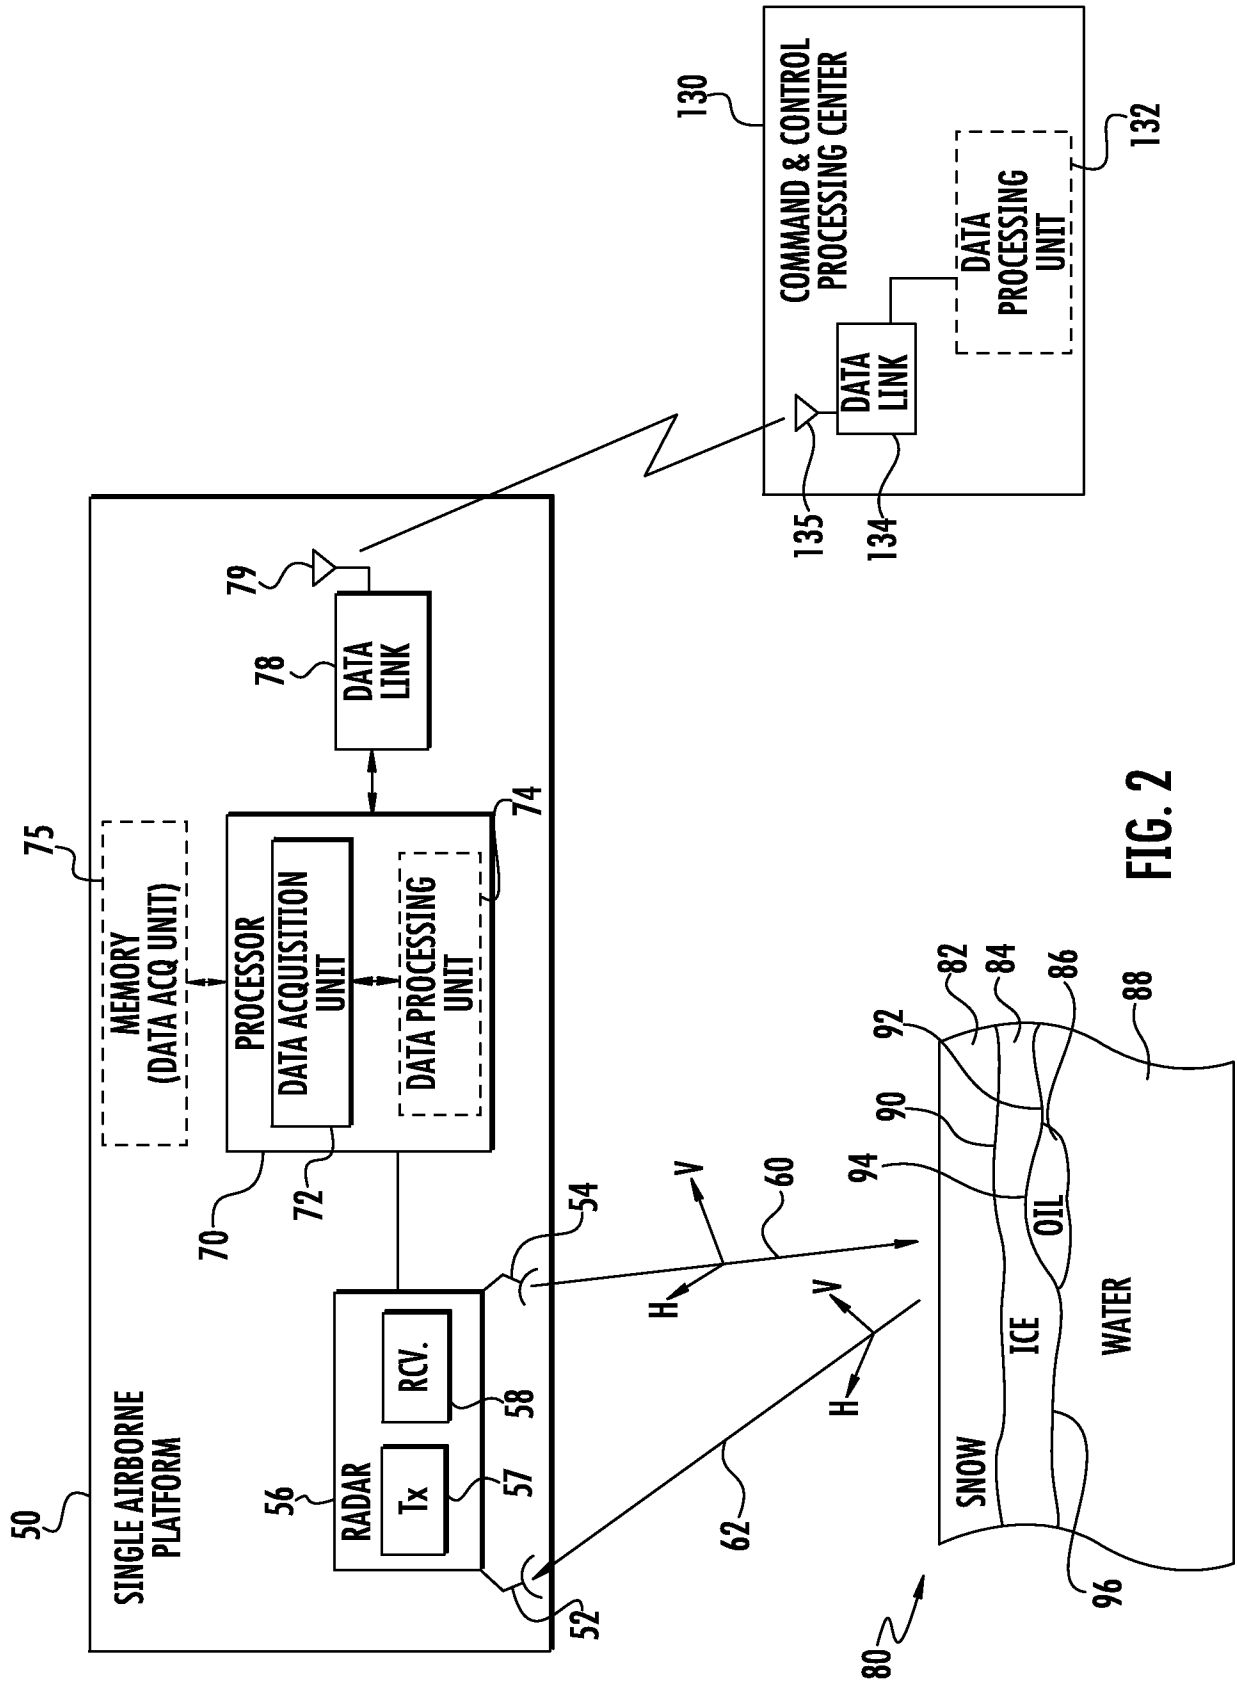


FIG. 2

3/15

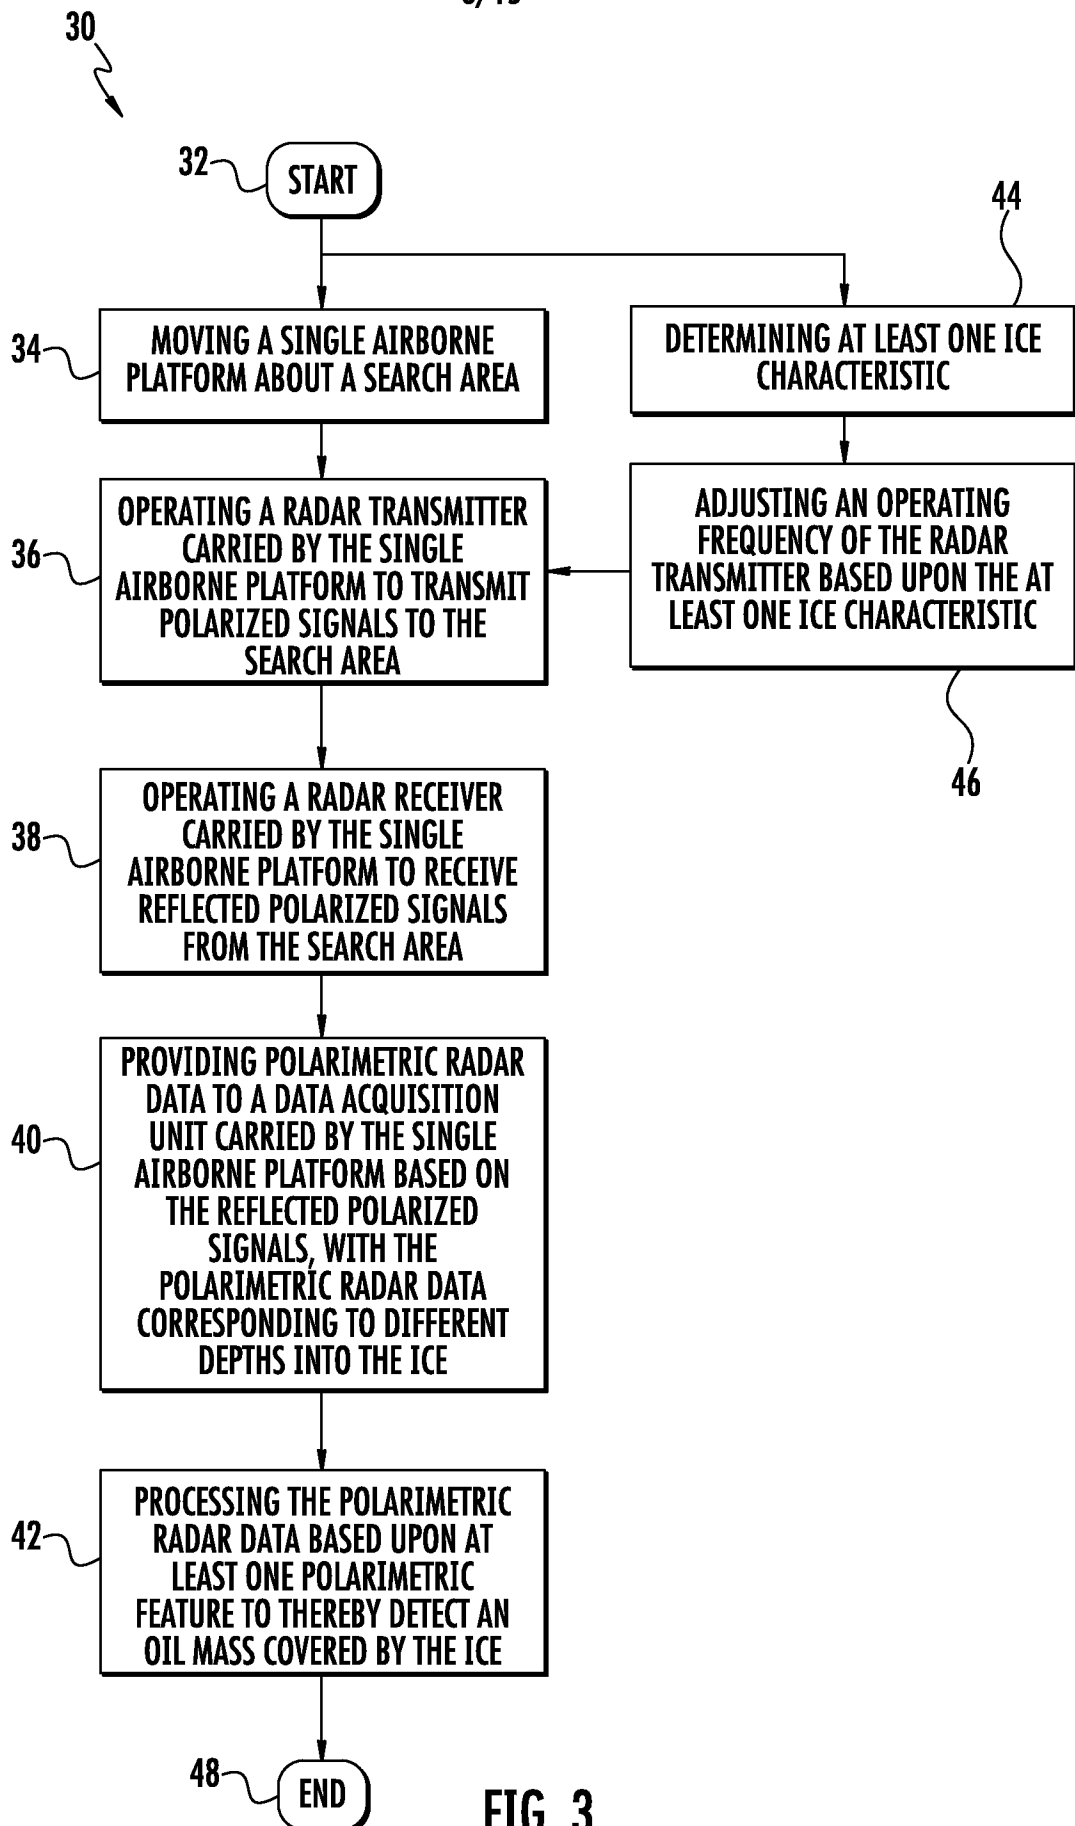


FIG. 3

4/15

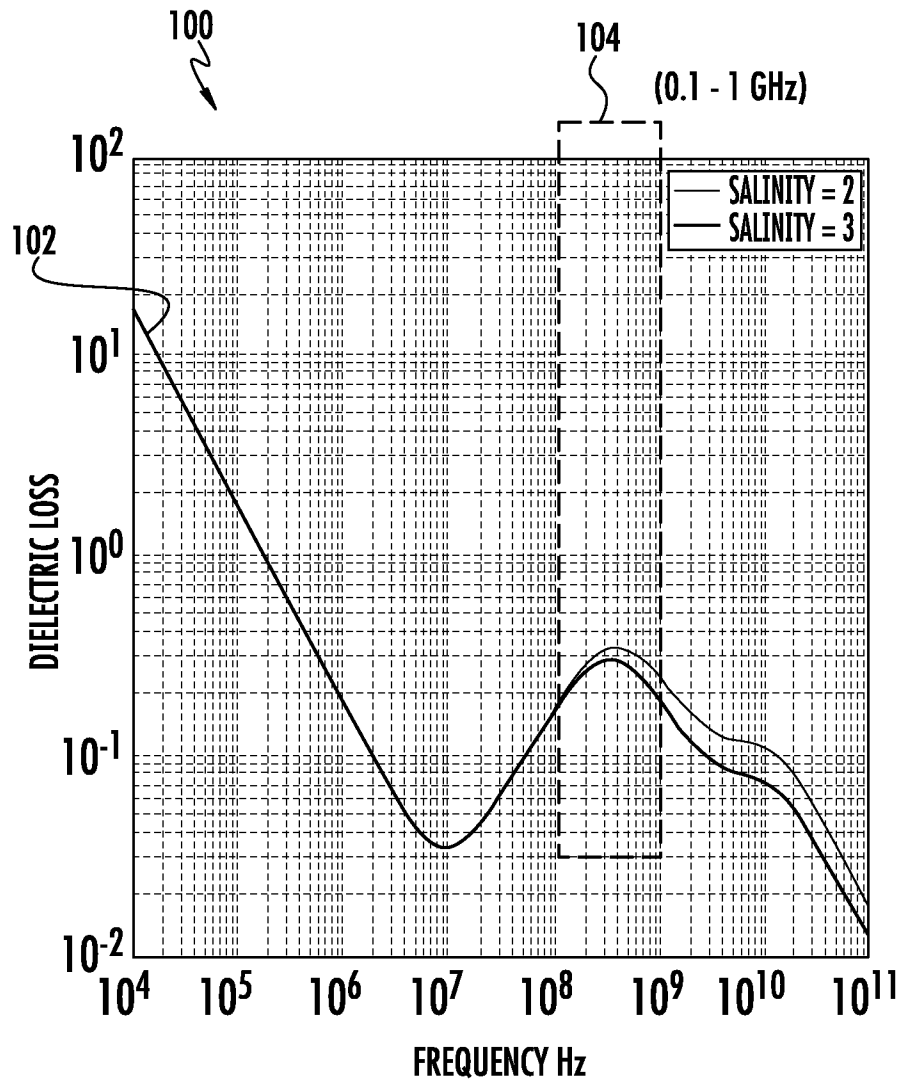


FIG. 4

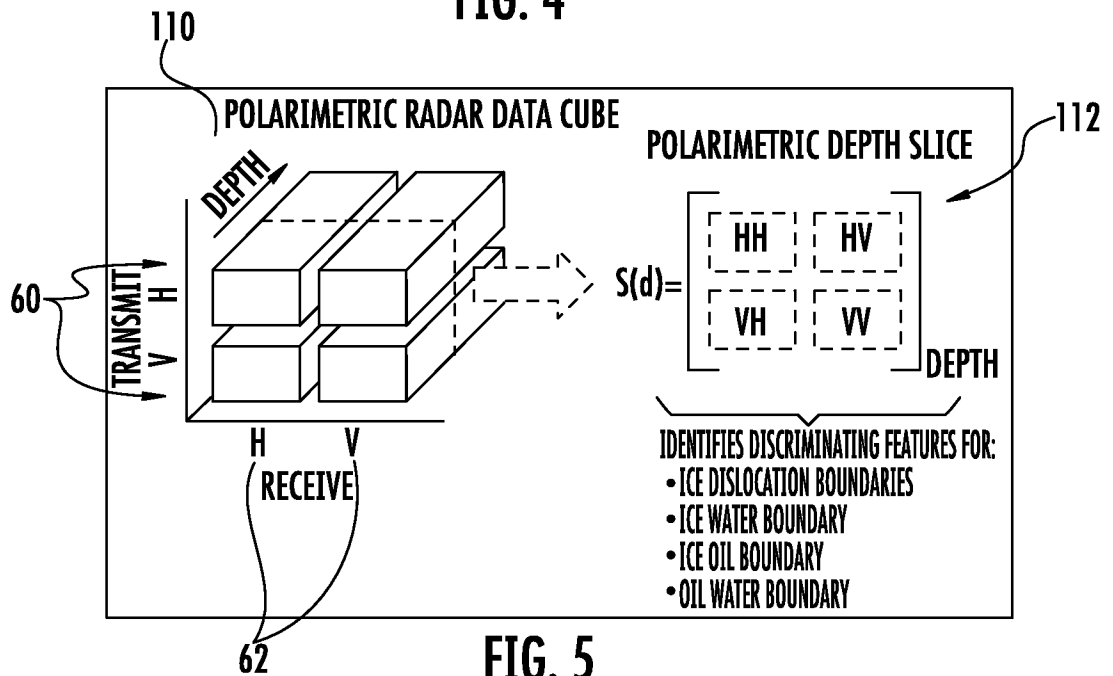


FIG. 5

5/15

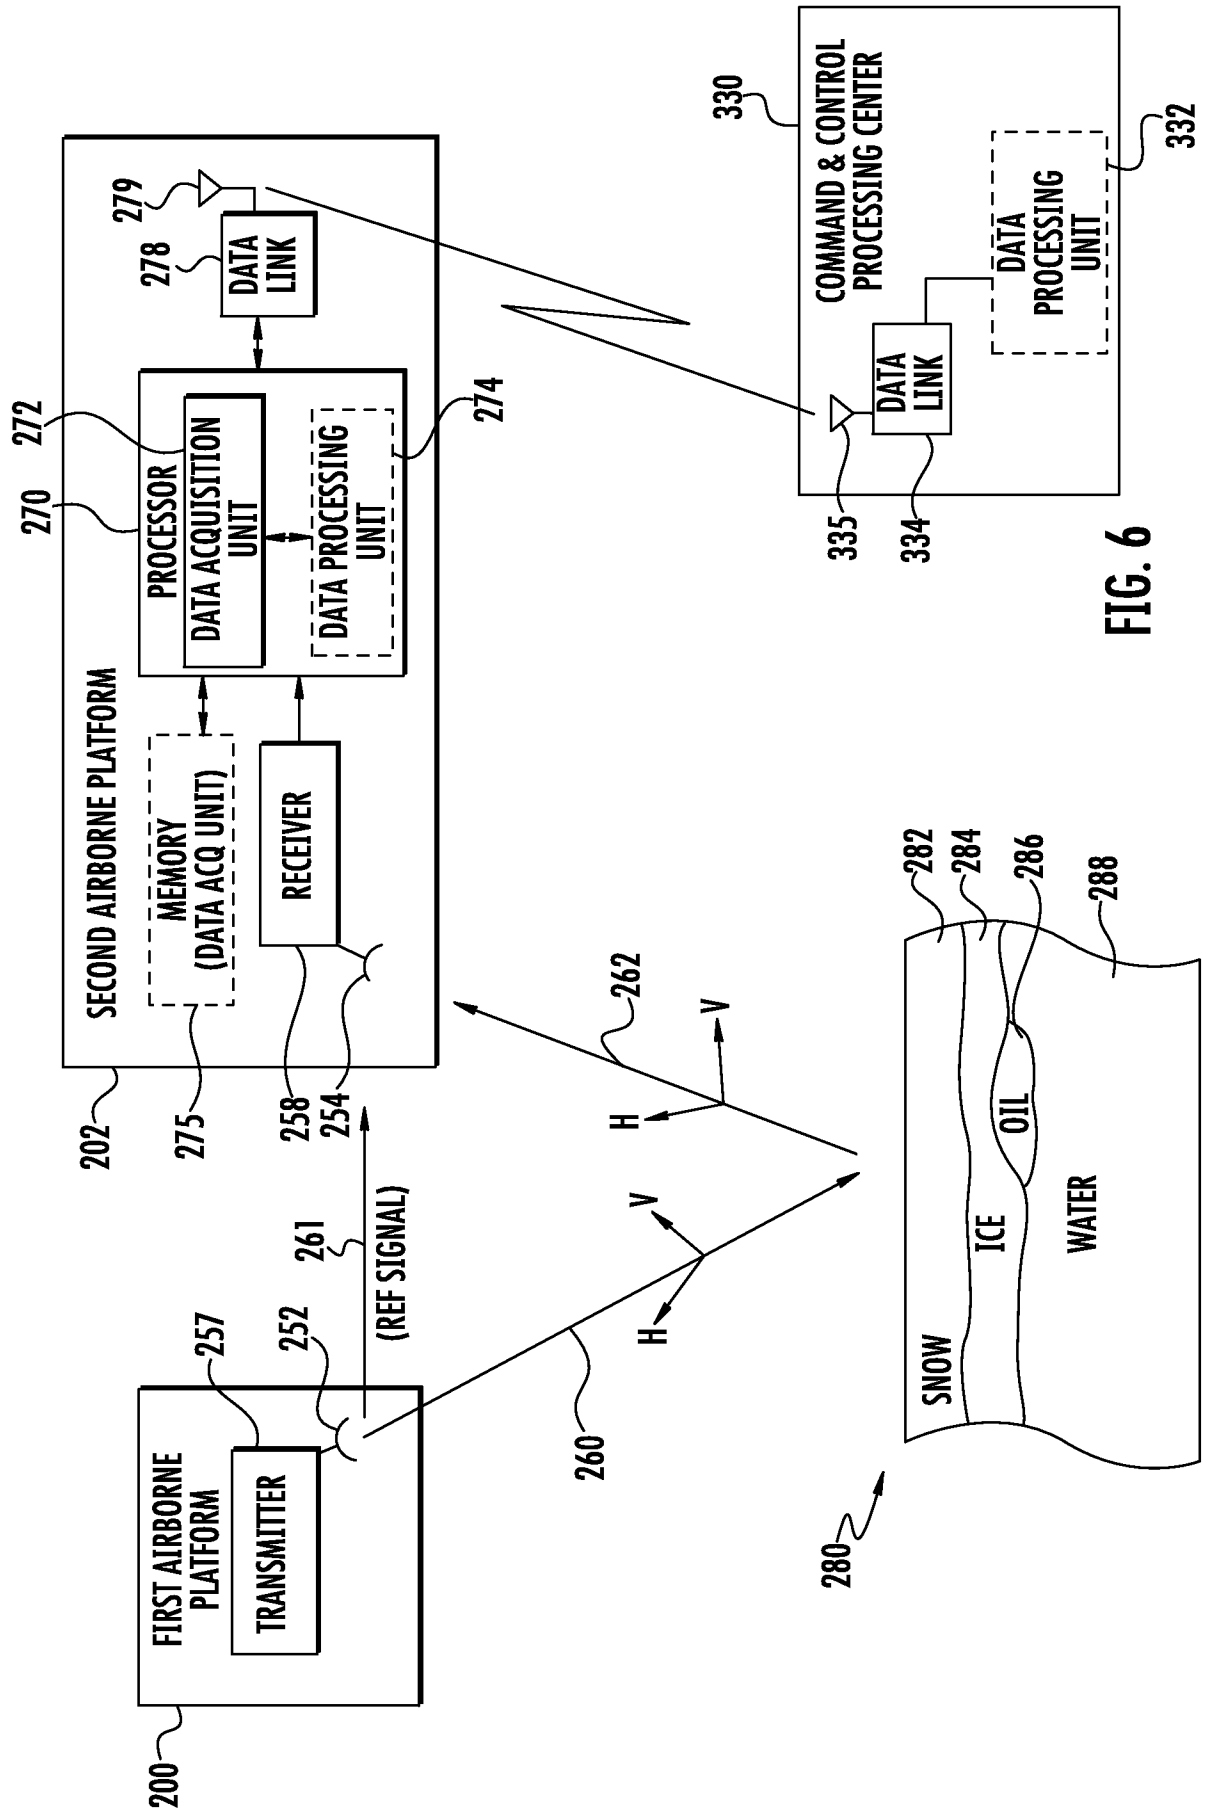


FIG. 6

6/15

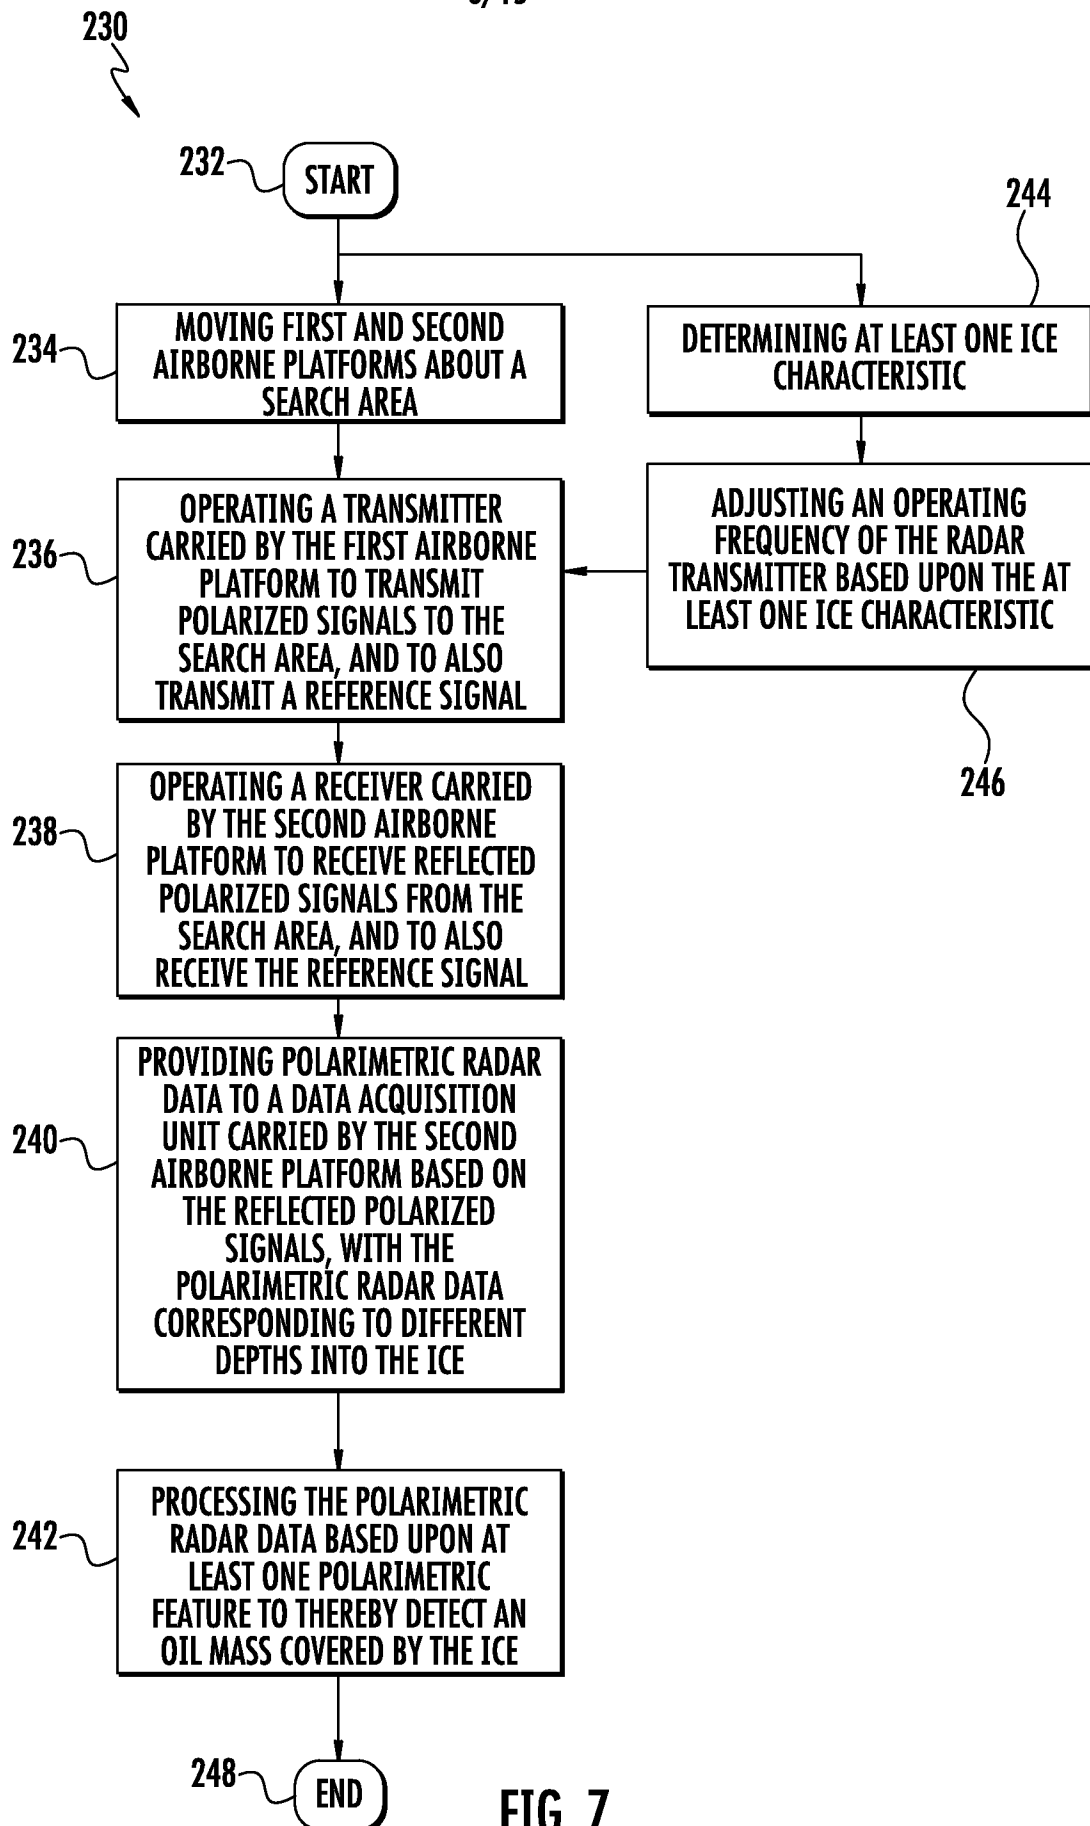


FIG. 7

7/15

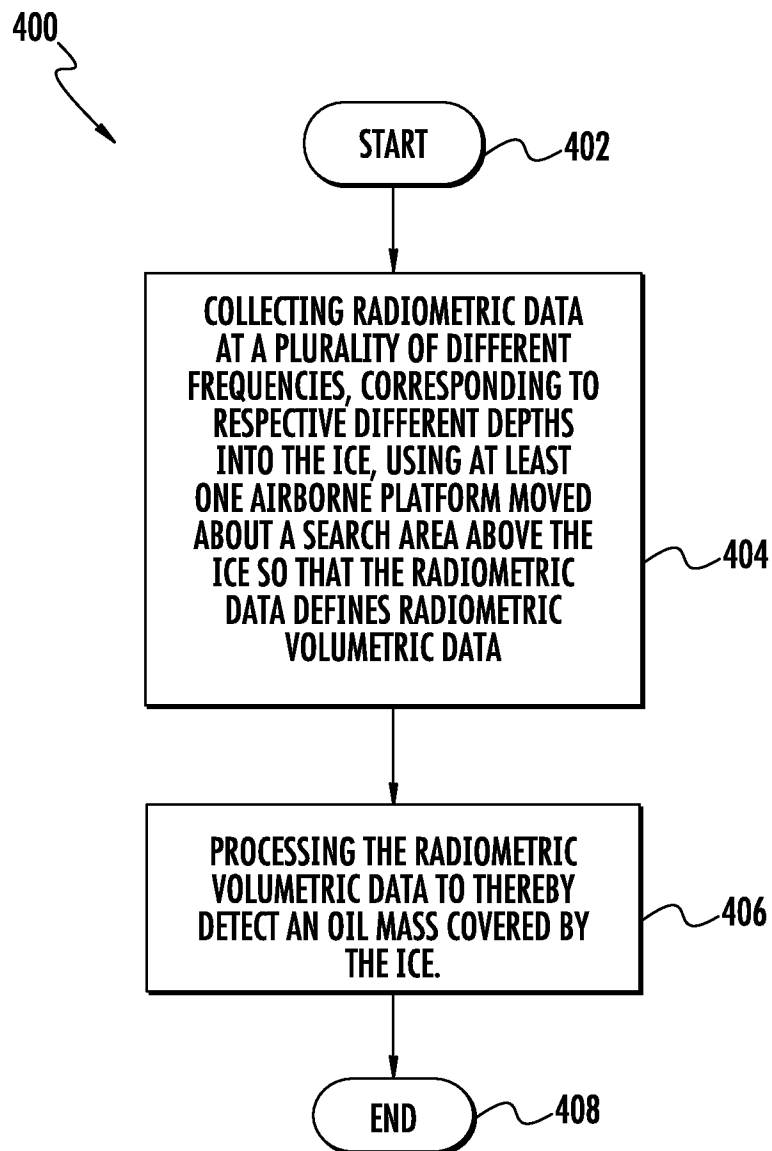


FIG. 8

8/15

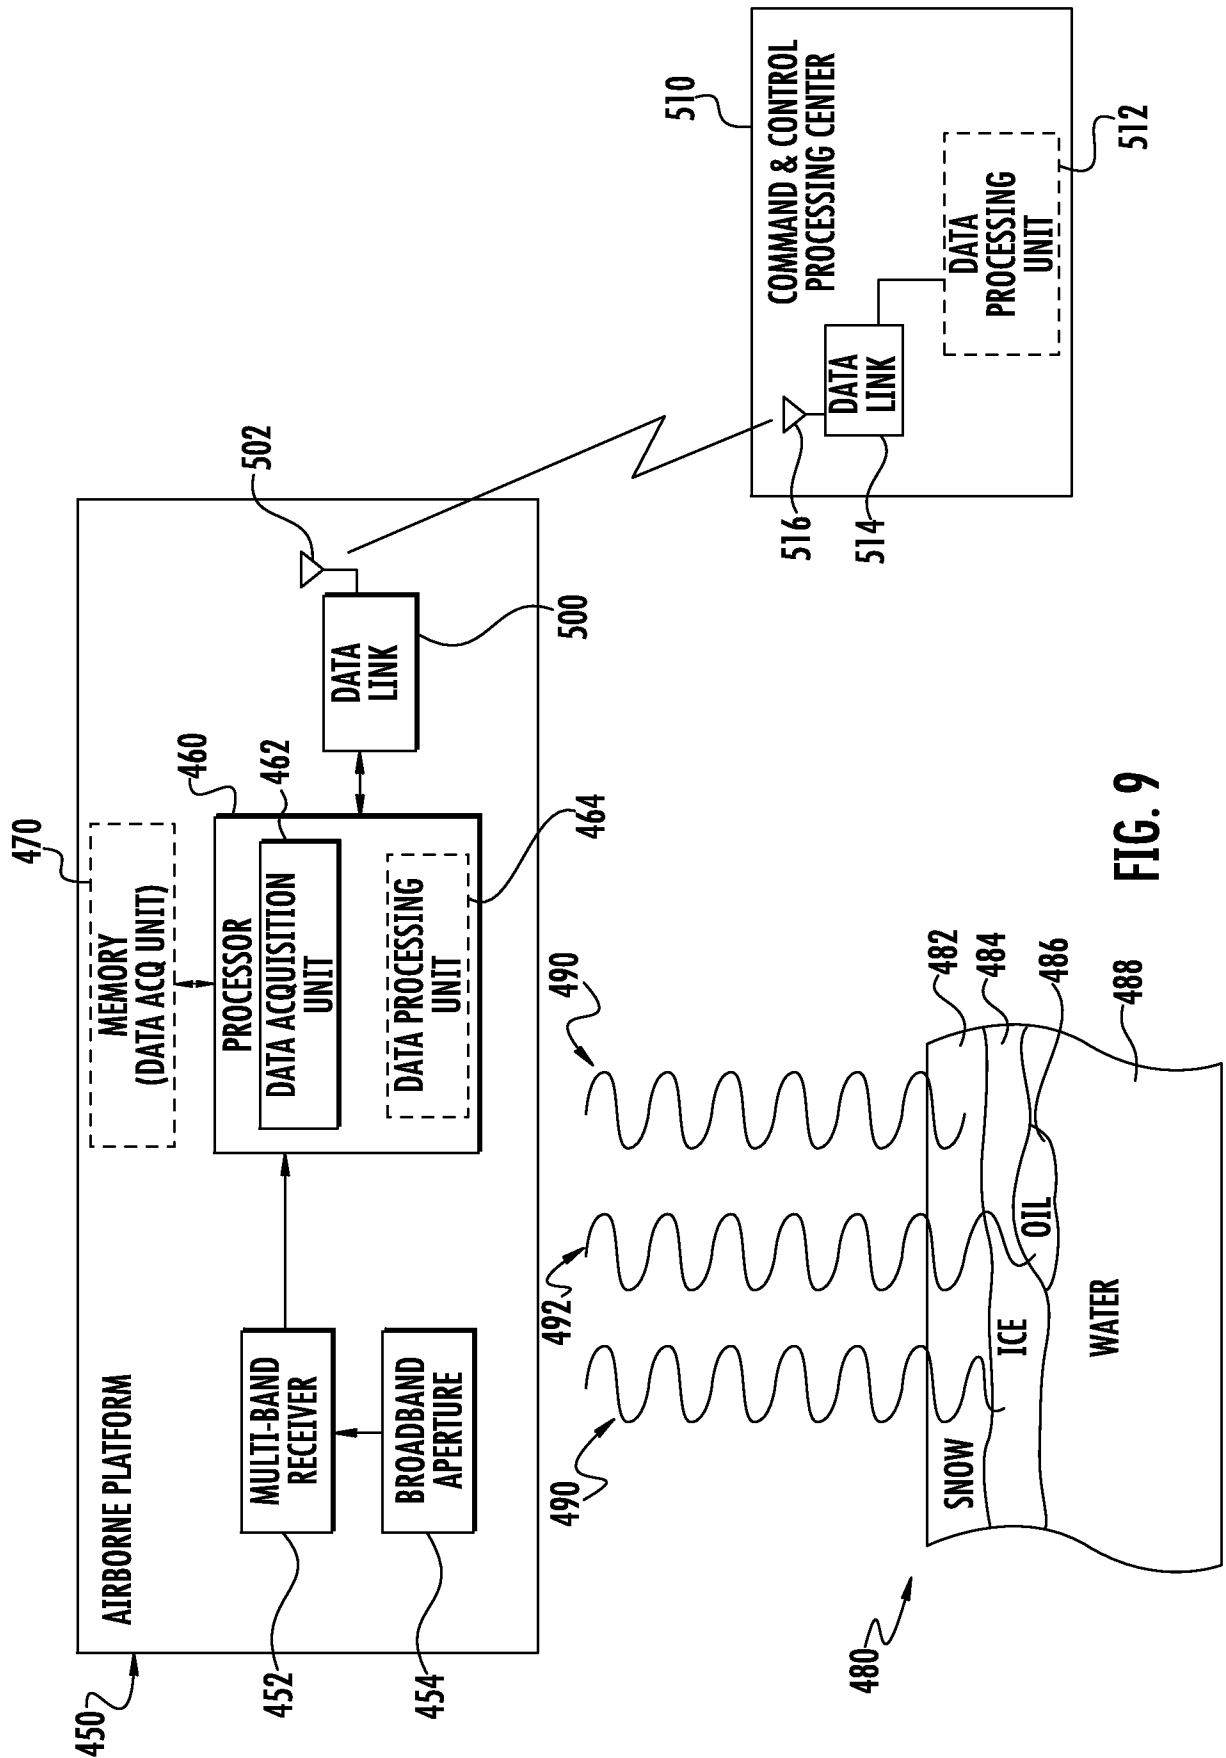


FIG. 9

9/15




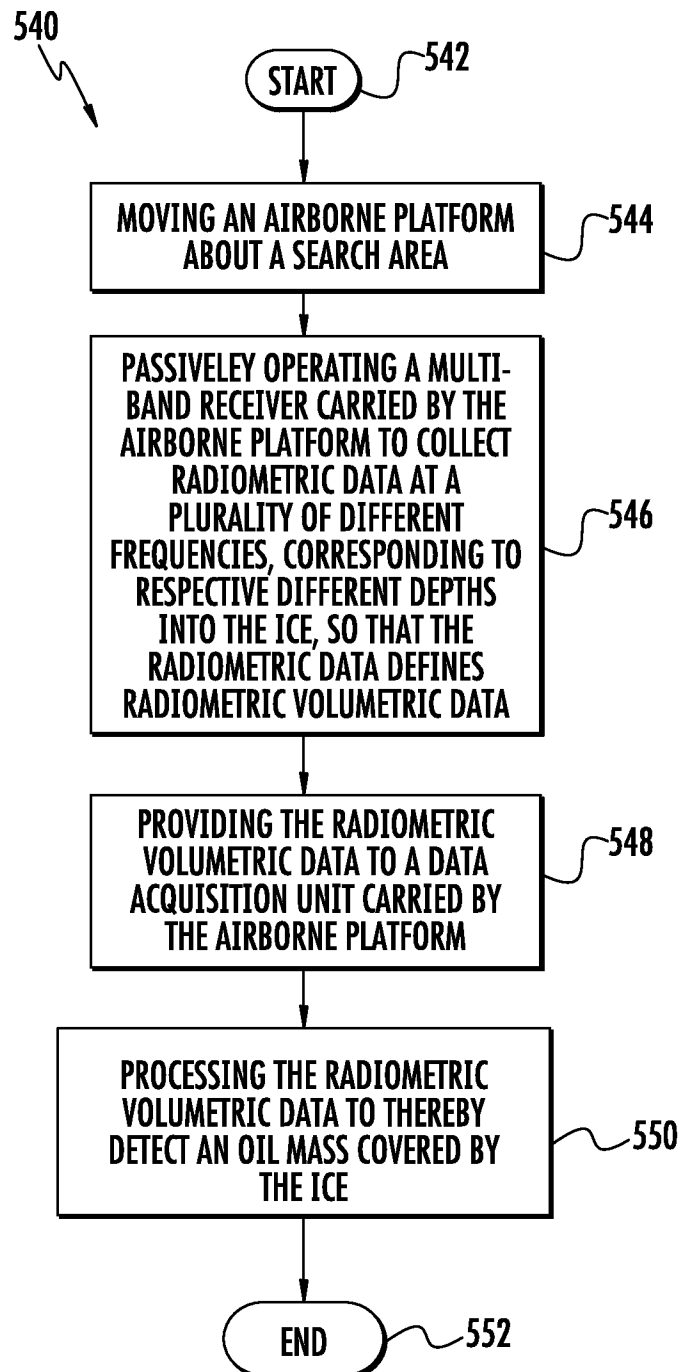


FIG. 10

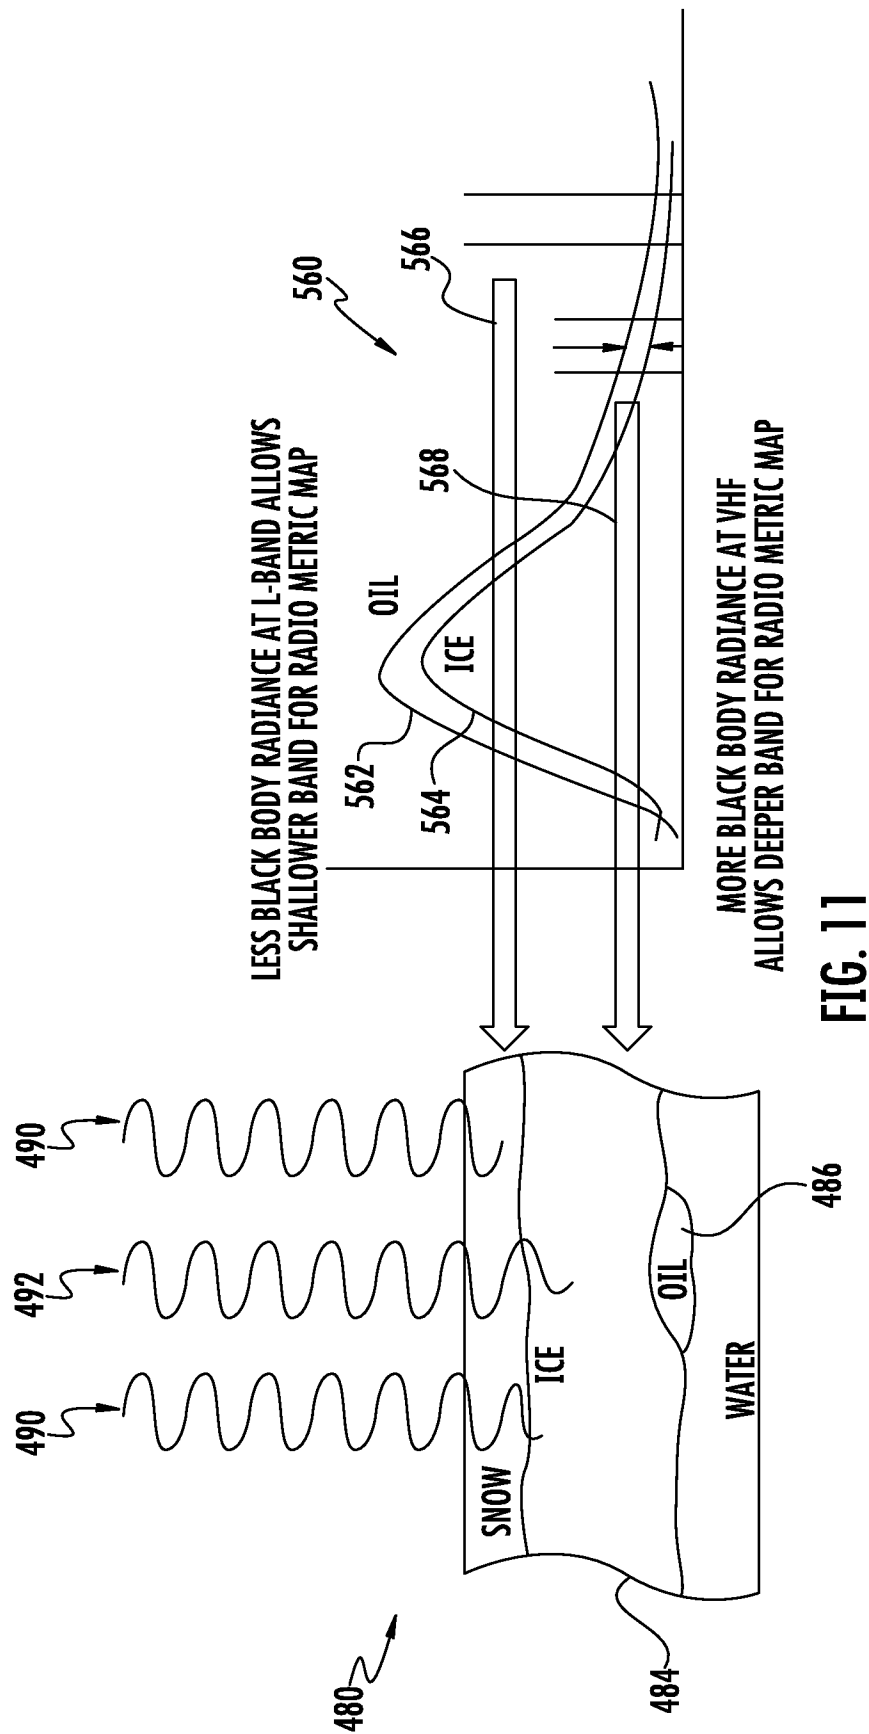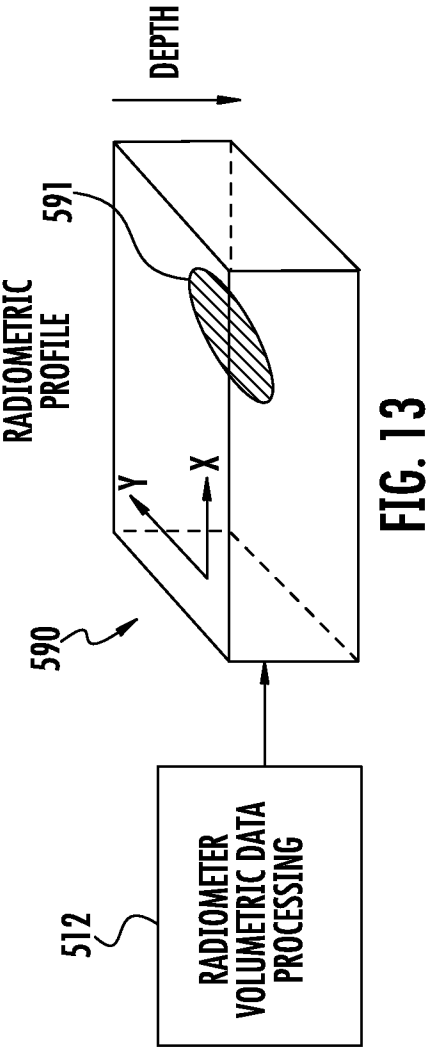

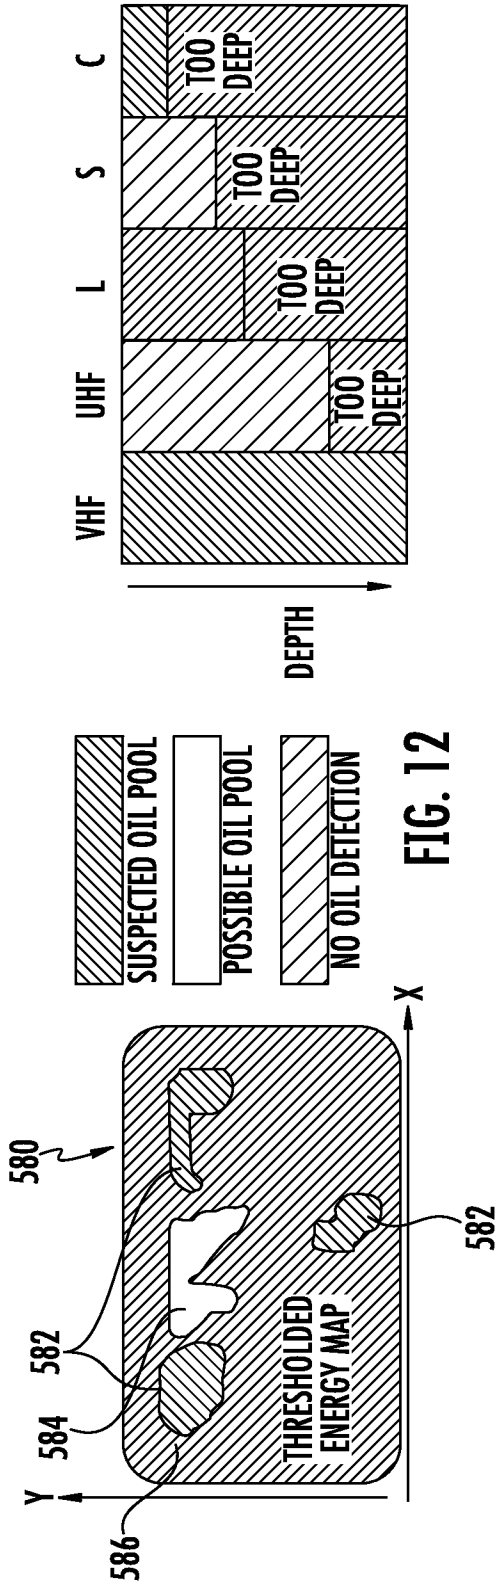

12/15

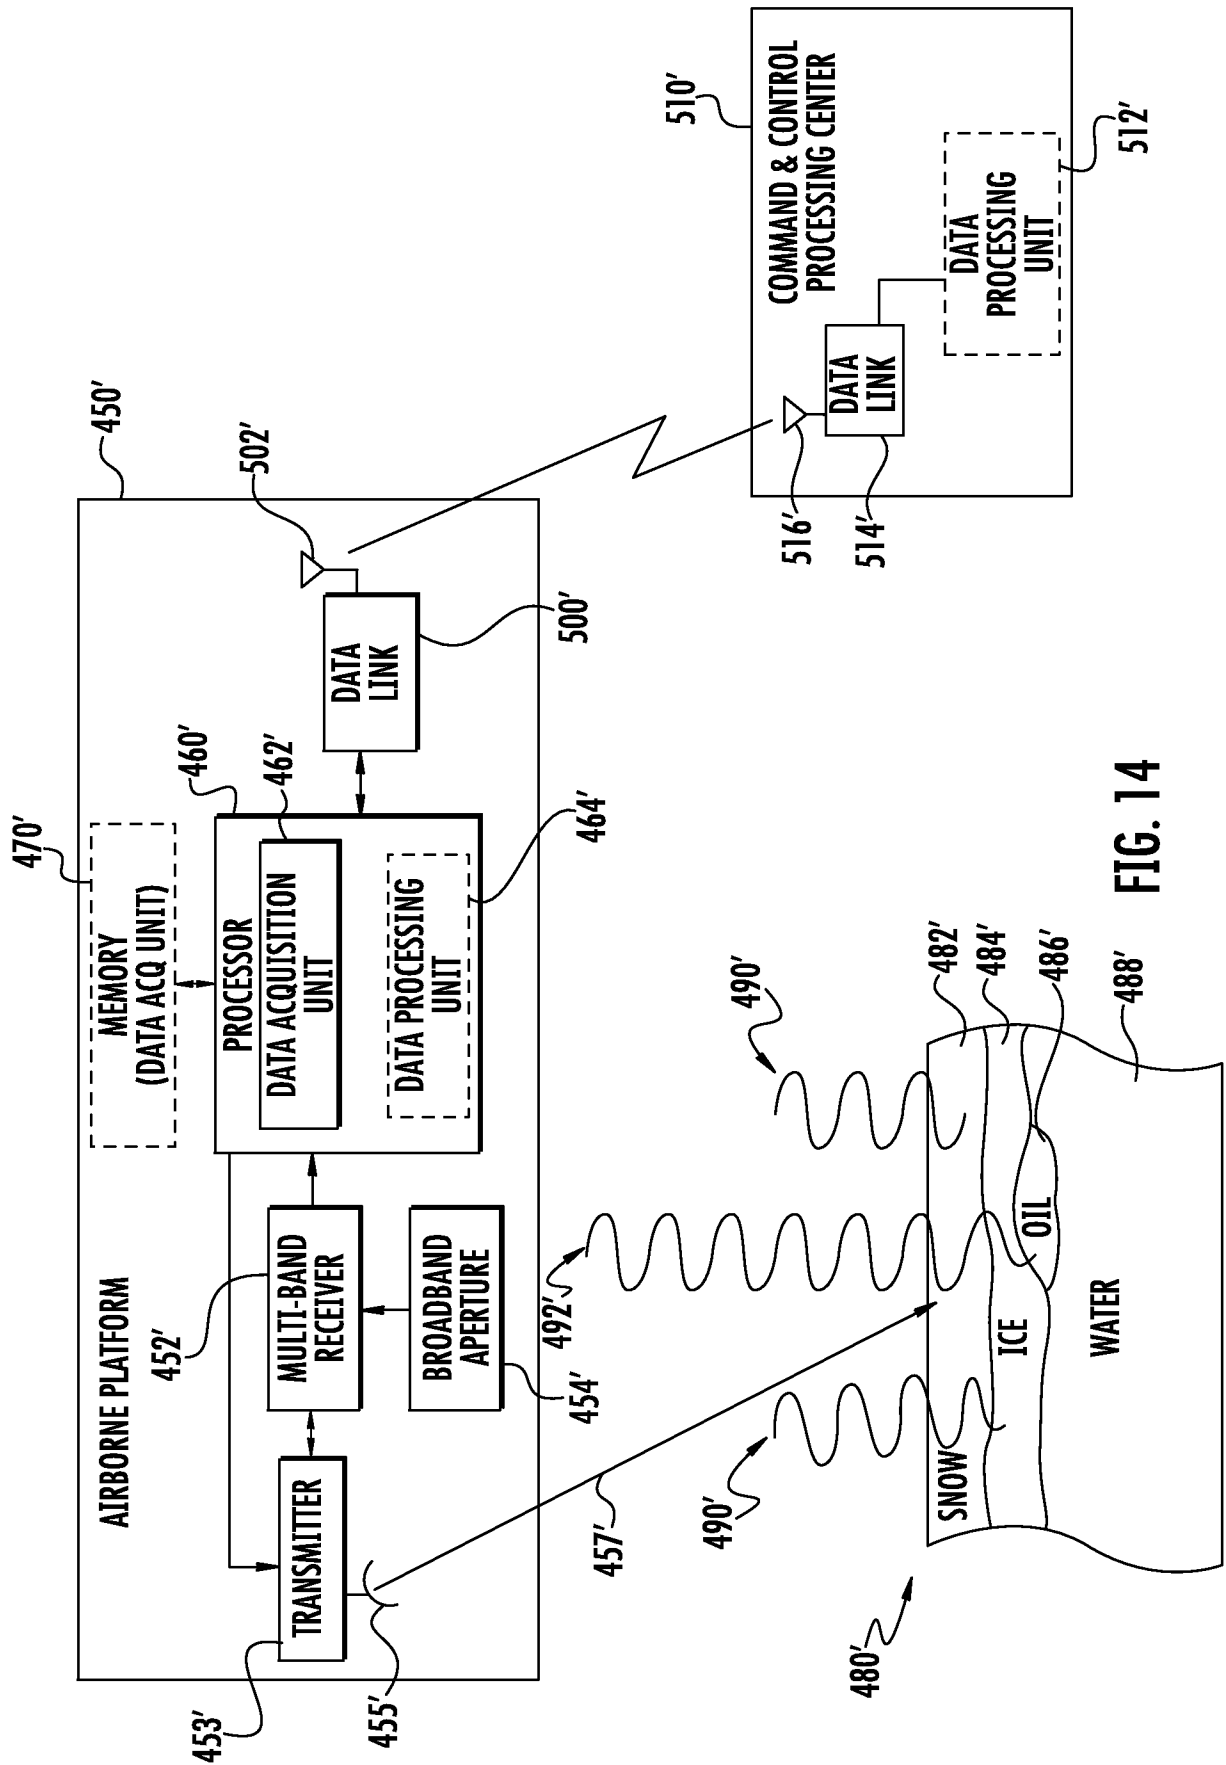


FIG. 14

13/15

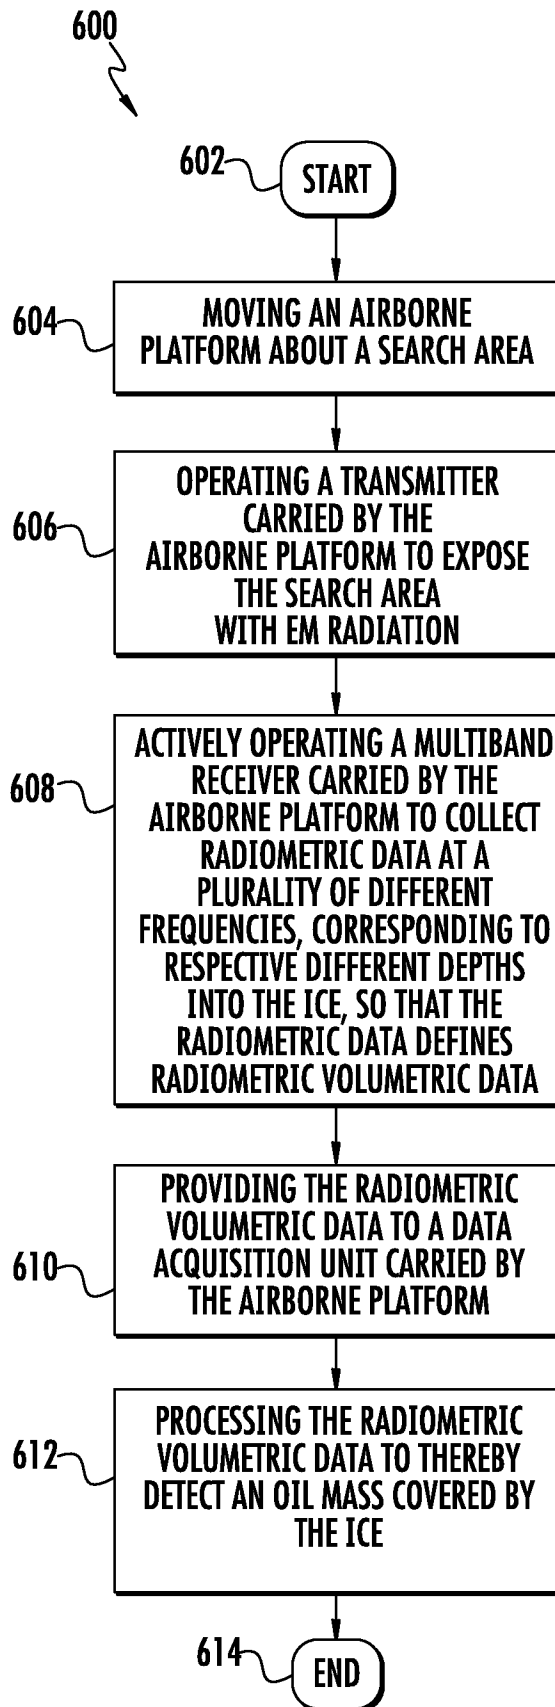


FIG. 15

14/15

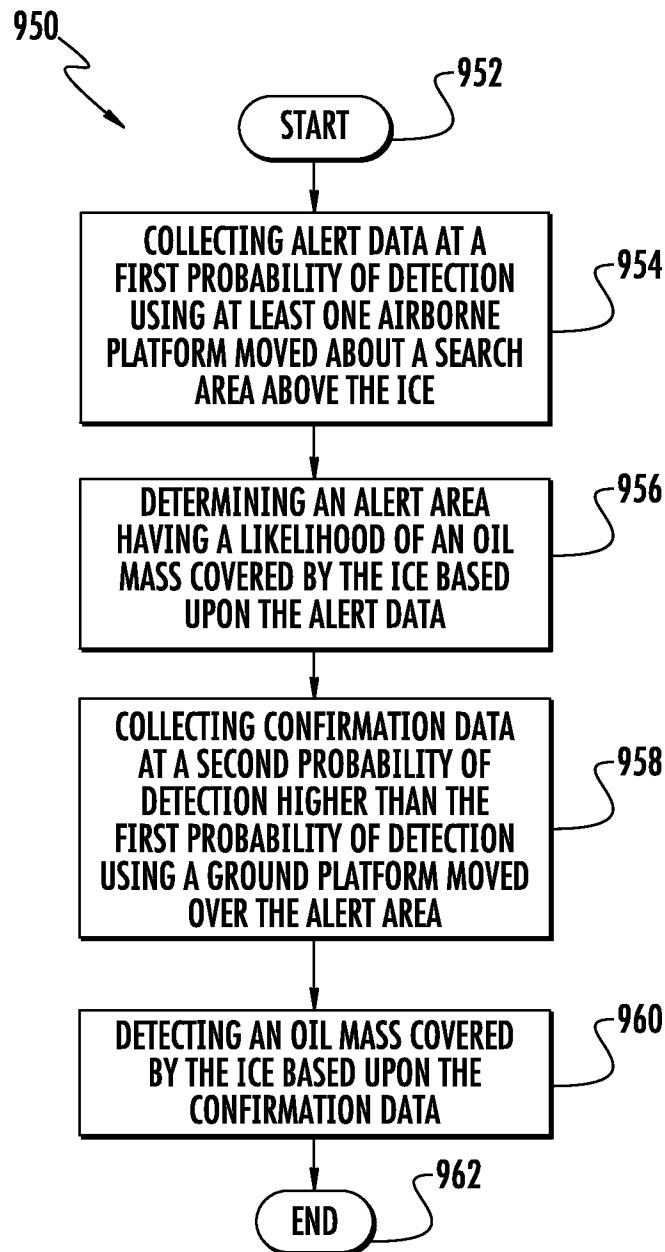


FIG. 16

15/15

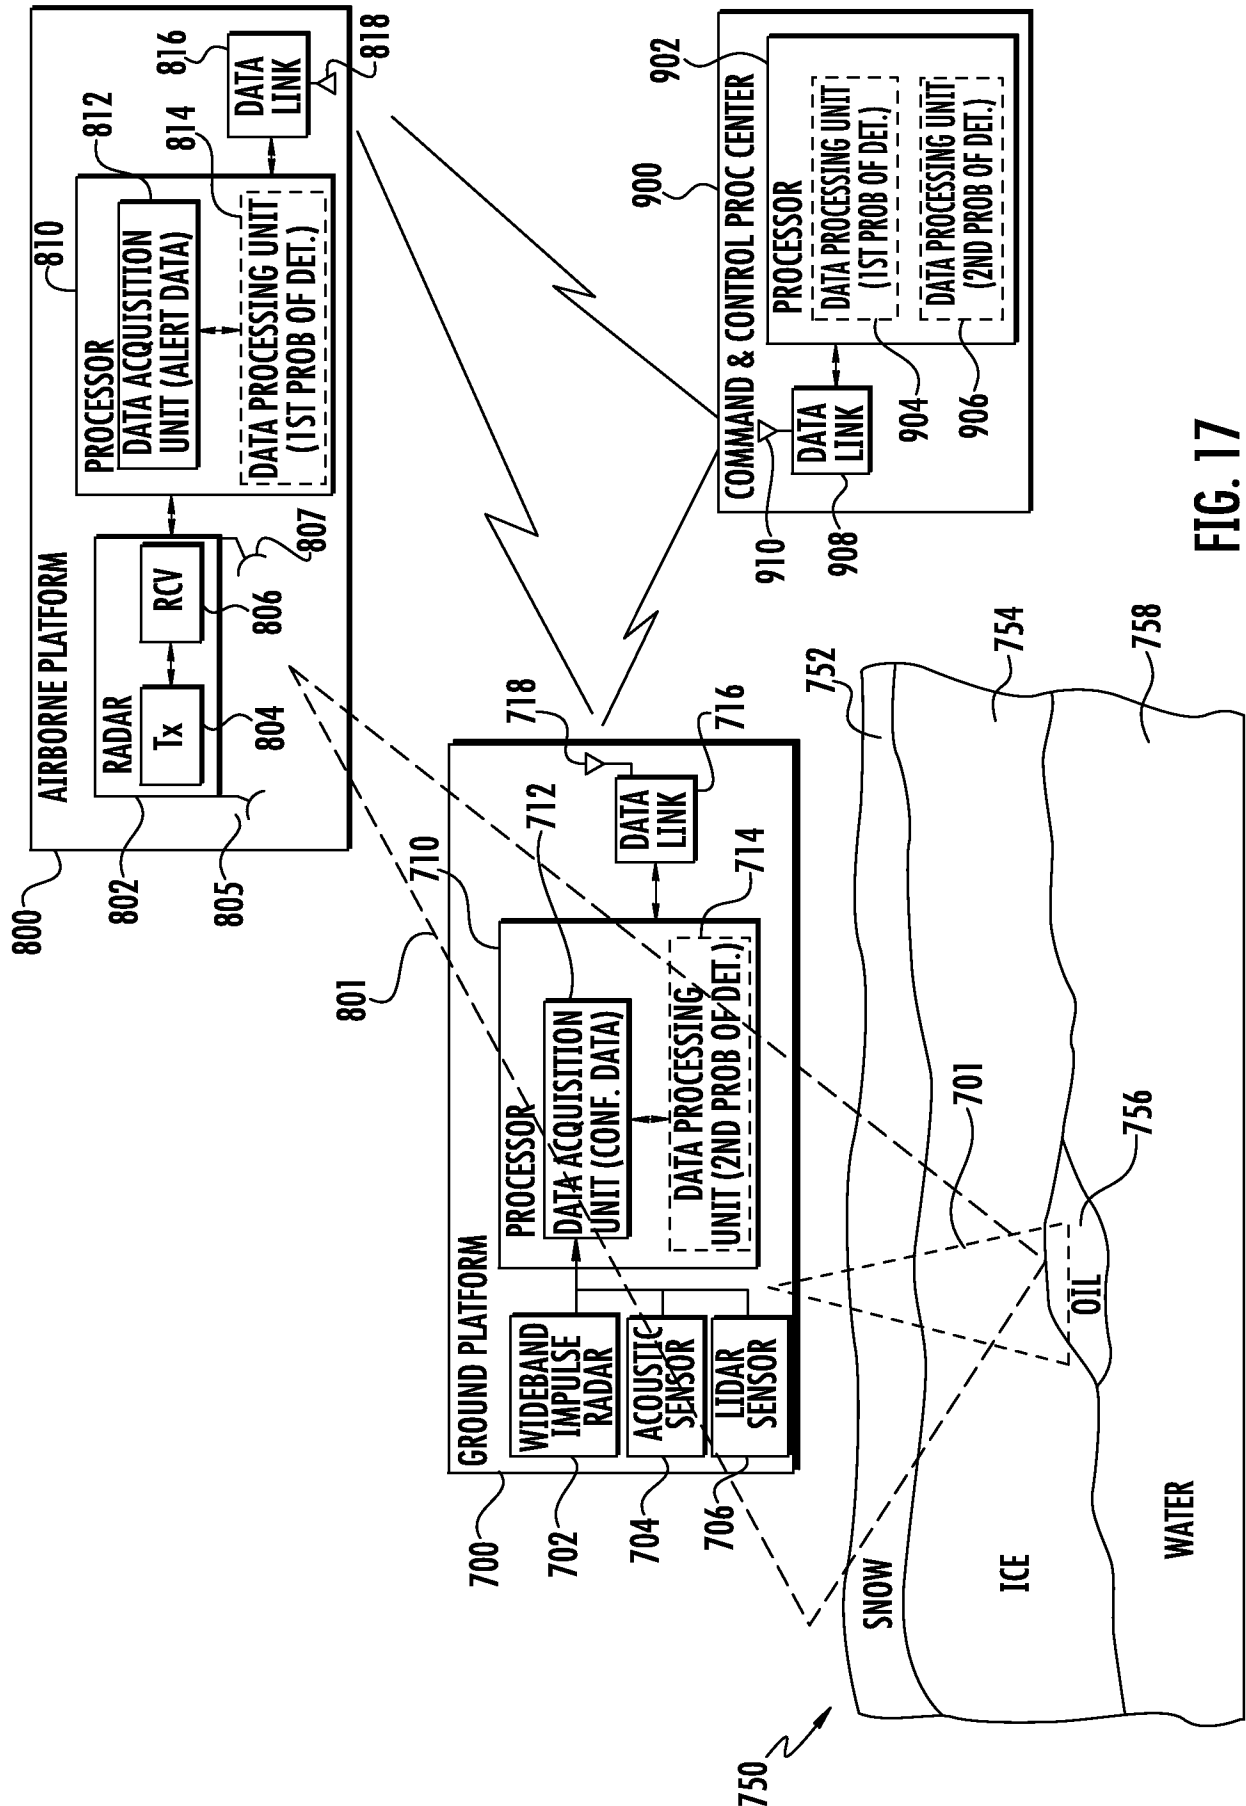


FIG. 17

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/073365A. CLASSIFICATION OF SUBJECT MATTER
INV. G01K11/00 G01V3/12
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G01K G01V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	David Dickins ET AL: "Remote Sensing Technology ! Review and Screening", 24 November 2009 (2009-11-24), XP055102809, Retrieved from the Internet: URL: http://www.sintef.no/project/JIP_Oil_In_Ice/Dokumenter/publications/JIP-rep-no-2-2-RSScreening-Final.pdf [retrieved on 2014-02-18] sec. 2.1.3 ----- -/--	1-10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 February 2014

Date of mailing of the international search report

26/02/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Rudolf, Hans

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/073365

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	MERV FINGAS ET AL: "A Review of the Status of Advanced Technologies for the Detection of Oil in and with Ice", SPILL SCIENCE & TECHNOLOGY BULLETIN, vol. 6, no. 5-6, 1 October 2000 (2000-10-01), pages 295-302, XP055102248, ISSN: 1353-2561, DOI: 10.1016/S1353-2561(01)00056-1 page 297 - page 297 -----	1-10
A	J P HOLLINGER ET AL: "Oil Spills: Measurements of Their Distributions and Volumes by Multifrequency Microwave Radiometry", SCIENCE, vol. 181, 1 January 1973 (1973-01-01), pages 54-56, XP055102763, the whole document -----	1-10
A	S.A. PELYUSHENKO: "Microwave radiometer system for the detection of oil slicks", SPILL SCIENCE & TECHNOLOGY BULLETIN, vol. 2, no. 4, 1 January 1995 (1995-01-01), pages 249-254, XP055102775, ISSN: 1353-2561, DOI: 10.1016/1353-2561(95)00031-3 the whole document -----	1-10
A	GARY L HOVER: "USCG R&D Center Conducts Research in Tactical Oil Spill Surveillance Technology", PROCEEDINGS OF THE MARINE SAFETY COUNCIL, 28 January 1997 (1997-01-28), XP055102863, the whole document -----	1-10
A	O TRIESCHMANN ET AL: "A MULTIPLE REMOTE SENSOR SYSTEM FOR THE AERIAL SURVEILLANCE OF THE NORTH SEA AND BALTIC SEA", FIFTH INTERNATIONAL AIRBORNE REMOTE SENSING CONFERENCE, 20 September 2001 (2001-09-20), pages 17-20, XP055102791, San Francisco the whole document -----	1-10