




(22) Date de dépôt/Filing Date: 2020/03/02  
(41) Mise à la disp. pub./Open to Public Insp.: 2020/09/06  
(45) Date de délivrance/Issue Date: 2024/05/28  
(30) Priorités/Priorities: 2019/03/06 (US62/814349);  
2019/04/18 (US16/388356)

(51) Cl.Int./Int.Cl. *B64U 20/80* (2023.01),  
*B64U 50/30* (2023.01), *G05B 19/042* (2006.01),  
*H02P 5/46* (2006.01)  
(72) Inventeurs/Inventors:  
DONG, JOHN JIAN, US;  
DUFFY, MICHAEL JAMES, US;  
CAMERON, DOUGHLAS C., US;  
HUSSAIN, NAVEED MOAYYED, US  
(73) Propriétaire/Owner:  
THE BOEING COMPANY, US  
(74) Agent: SMART & BIGGAR LP

(54) Titre : VEHICULE A ROTORS MULTIPLES AVEC SYSTEMES INFORMATIQUES PERIPHERIQUES  
(54) Title: MULTI-ROTOR VEHICLE WITH EDGE COMPUTING SYSTEMS

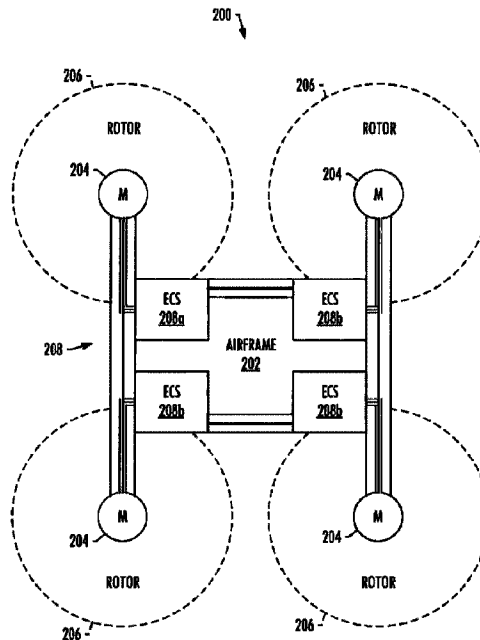

(57) **Abrégé/Abstract:**

A multi-rotor vehicle includes a plurality of electric motors and edge computing systems (ECSs). The electric motors are operatively coupled to respective rotors, and cause the respective rotors to rotate relative to the airframe. The ECSs are independent, distinct and distributed to the electric motors, each operatively coupled to a respective electric motor and thereby a respective rotor. Each ECS is configured to acquire and process sensor data for the respective rotor to determine rotor status information, and execute motor commands to control the respective electric motor and thereby the respective rotor. The ECSs are configured according to a model in which any of the ECSs is selectable as a primary ECS, and others of the ECSs are operable as secondary ECSs, the secondary ECSs configured to communicate respective rotor status information to the primary ECS, and the primary ECS configured to provide the motor commands to the secondary ECSs.

## **ABSTRACT**

A multi-rotor vehicle includes a plurality of electric motors and edge computing systems (ECSs). The electric motors are operatively coupled to respective rotors, and cause the respective rotors to rotate relative to the airframe. The ECSs are independent, distinct and distributed to the electric motors, each operatively coupled to a respective electric motor and thereby a respective rotor. Each ECS is configured to acquire and process sensor data for the respective rotor to determine rotor status information, and execute motor commands to control the respective electric motor and thereby the respective rotor. The ECSs are configured according to a model in which any of the ECSs is selectable as a primary ECS, and others of the ECSs are operable as secondary ECSs, the secondary ECSs configured to communicate respective rotor status information to the primary ECS, and the primary ECS configured to provide the motor commands to the secondary ECSs.

# **MULTI-ROTOR VEHICLE WITH EDGE COMPUTING SYSTEMS**

## **FIELD**

The present disclosure relates generally to vehicles and, in particular, to multi-rotor vehicles.

## **BACKGROUND**

A multi-rotor vehicle is generally a vehicle with more than one rotor, typically more than two rotors. A primary example of a multi-rotor vehicle is a non-fixed wing aircraft, referred to as a rotorcraft or rotary-wing aircraft. This multi-rotor vehicle is an aircraft that uses lift generated by wings or propellers, referred to as rotary wings, rotor blades or more simply rotors, that revolve around a mast. A rotorcraft may include one or multiple rotors mounted on a single mast or multiple masts. For example, a quadcopter is a multi-rotor rotorcraft that generates lift via four rotors. Other examples include a tricopter, hexacopter and octocopter that include respectively three, six and eight rotors. A rotorcraft may be an unmanned rotorcraft controlled via a remote communications station and/or programmed instructions, although in other examples, a rotorcraft may be a manned vehicle.

Multi-rotor rotorcraft typically include a centrally-located flight controller, which makes it a single point of failure. Most flight control computers and sensors are triple redundant to improve flight worthiness; however, this requires control forces (control rods), actuator communication and sensor communication must be routed from the central flight controller to each actuator on the rotorcraft. This equates to added weight and complexity.

Therefore it would be desirable to have a system and method that takes into account at least some of the issues discussed above, as well as other possible issues.

## **BRIEF SUMMARY**

Example implementations of the present disclosure are directed to a multi-rotor vehicle with distributed modular-based edge computing systems that may be embedded with an integrated flight and motor control system for each rotor. The edge computing

systems may also include one or more communication interfaces for communication with others of the edge computing systems, and/or remote stations. The modular-based edge computing systems of example implementations may increase the reliability and survivability of the multi-rotor vehicle.

The present disclosure thus includes, without limitation, the following example implementations.

Some example implementations provide a multi-rotor vehicle comprising: an airframe; and coupled to the airframe, a plurality of electric motors operatively coupled to a respective plurality of rotors, the plurality of electric motors configured to cause the respective plurality of rotors to rotate relative to the airframe; and a plurality of edge computing systems that are independent, distinct and distributed to the plurality of electric motors, each edge computing system of the plurality of edge computing systems operatively coupled to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors, each edge computing system configured to acquire and process sensor data for the respective rotor to determine rotor status information, and execute motor commands to control the respective electric motor and thereby the respective rotor, wherein the plurality of edge computing systems are configured according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems, the secondary edge computing systems configured to communicate respective rotor status information to the primary edge computing system, and the primary edge computing system configured to provide the motor commands to the secondary edge computing systems.

In some example implementations of the multi-rotor vehicle of any preceding example implementation, or any combination of any preceding example implementations, each edge computing system includes: processing circuitry configured to acquire and process the sensor data for the respective rotor to determine rotor status information, and execute the motor commands to control the respective electric motor and thereby the respective rotor; and a communication interface configured to enable

the edge computing system to communicate with others of the plurality of edge computing systems.

In some example implementations of the multi-rotor vehicle of any preceding example implementation, or any combination of any preceding example implementations, each edge computing system further includes a second communication interface configured to enable the edge computing system to communicate with a remote station, the primary edge computing system among the plurality of edge computing systems being configured to communicate with the remote station.

In some example implementations of the multi-rotor vehicle of any preceding example implementation, or any combination of any preceding example implementations, the processing circuitry of each edge computing system further includes a clock to measure and keep time at the edge computing system, the secondary edge computing systems configured to communicate with the primary edge computing system via respective communication interfaces to synchronize respective clocks of the secondary edge computing systems with the clock of the primary edge computing system.

In some example implementations of the multi-rotor vehicle of any preceding example implementation, or any combination of any preceding example implementations, each edge computing system is configured as an integrated flight computer and motor controller.

In some example implementations of the multi-rotor vehicle of any preceding example implementation, or any combination of any preceding example implementations, each edge computing system includes first power distribution circuitry for the flight computer, and second power distribution circuitry for the motor controller.

In some example implementations of the multi-rotor vehicle of any preceding example implementation, or any combination of any preceding example implementations, each edge computing system further includes a power inverter circuit coupled to the second power distribution circuitry, the power inverter circuit configured to supply power to the respective electric motor of the edge computing system.

In some example implementations of the multi-rotor vehicle of any preceding example implementation, or any combination of any preceding example implementations, the primary edge computing system is configured to implement the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and provide the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading.

In some example implementations of the multi-rotor vehicle of any preceding example implementation, or any combination of any preceding example implementations, each edge computing system includes an inertial measurement unit (IMU) and magnetometer, and the IMU and magnetometer of the primary edge computing system are configured to determine the attitude, position and heading of the multi-rotor vehicle.

In some example implementations of the multi-rotor vehicle of any preceding example implementation, or any combination of any preceding example implementations, each edge computing system is configured to store a configuration file with an ordered list of the plurality of edge computing systems that begins with the primary edge computing system and then a first of the secondary edge computing systems, and wherein the primary edge computing system is configured to communicate health status information to the first of the secondary edge computing systems, and in response, the first of the secondary edge computing systems is configured to determine a health status of the primary edge computing system from the health status information, and assume responsibility as the primary edge computing system when the health status reaches a predetermined threshold.

In some example implementations of the multi-rotor vehicle of any preceding example implementation, or any combination of any preceding example implementations, the ordered list includes a second of the secondary edge computing systems after the first of the secondary edge computing systems, and wherein after the first of the secondary edge computing systems assumes responsibility as the primary edge computing system, the second of the secondary edge computing systems assumes responsibility as the first of the secondary edge computing systems.

Some example implementations provide an edge computing system of a plurality of edge computing systems configured for use on a multi-rotor vehicle including a plurality of electric motors operatively coupled to a respective plurality of rotors, the plurality of electric motors configured to cause the respective plurality of rotors to rotate relative to an airframe, the plurality of edge computing systems being independent, distinct and distributable to the plurality of electric motors, the edge computing system comprising: processing circuitry operatively coupleable to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors, the processing circuitry configured to acquire and process sensor data for the respective rotor to determine rotor status information, and execute motor commands to control the respective electric motor and thereby the respective rotor; and a communication interface configured to enable the edge computing system to communicate with others of the plurality of edge computing systems, wherein the edge computing system is configured to communicate with the others of the plurality of edge computing systems according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems, the secondary edge computing systems configured to communicate respective rotor status information to the primary edge computing system, and the primary edge computing system configured to provide the motor commands to the secondary edge computing systems.

In some example implementations of the edge computing system of any preceding example implementation, or any combination of any preceding example implementations, the edge computing system further comprises a second communication interface configured to enable the edge computing system to communicate with a remote station, the primary edge computing system among the plurality of edge computing systems being configured to communicate with the remote station.

In some example implementations of the edge computing system of any preceding example implementation, or any combination of any preceding example implementations, the processing circuitry of the edge computing system further includes

a clock to measure and keep time at the edge computing system, the secondary edge computing systems configured to communicate with the primary edge computing system via respective communication interfaces to synchronize respective clocks of the secondary edge computing systems with the clock of the primary edge computing system.

In some example implementations of the edge computing system of any preceding example implementation, or any combination of any preceding example implementations, the edge computing system is configured as an integrated flight computer and motor controller.

In some example implementations of the edge computing system of any preceding example implementation, or any combination of any preceding example implementations, the edge computing system further comprises first power distribution circuitry for the flight computer, and second power distribution circuitry for the motor controller.

In some example implementations of the edge computing system of any preceding example implementation, or any combination of any preceding example implementations, the edge computing system further comprises a power inverter circuit coupled to the second power distribution circuitry, the power inverter circuit configured to supply power to the respective electric motor of the edge computing system.

In some example implementations of the edge computing system of any preceding example implementation, or any combination of any preceding example implementations, the primary edge computing system is configured to implement the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and provide the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading.

In some example implementations of the edge computing system of any preceding example implementation, or any combination of any preceding example implementations, the edge computing system further comprises an inertial measurement unit (IMU) and magnetometer, and the IMU and magnetometer of the primary edge computing system are configured to determine the attitude, position and heading of the multi-rotor vehicle.

In some example implementations of the edge computing system of any preceding example implementation, or any combination of any preceding example implementations, the edge computing system is configured to store a configuration file with an ordered list of the plurality of edge computing systems that begins with the primary edge computing system and then a first of the secondary edge computing systems, and wherein the primary edge computing system is configured to communicate health status information to the first of the secondary edge computing systems, and in response, the first of the secondary edge computing systems is configured to determine a health status of the primary edge computing system from the health status information, and assume responsibility as the primary edge computing system when the health status reaches a predetermined threshold.

In some example implementations of the edge computing system of any preceding example implementation, or any combination of any preceding example implementations, the ordered list includes a second of the secondary edge computing systems after the first of the secondary edge computing systems, and wherein after the first of the secondary edge computing systems assumes responsibility as the primary edge computing system, the second of the secondary edge computing systems assumes responsibility as the first of the secondary edge computing systems.

Some example implementations provide a method of operating a multi-rotor vehicle including a plurality of electric motors operatively coupled to a respective plurality of rotors, and a plurality of edge computing systems that are independent, distinct and distributed to the plurality of electric motors, each edge computing system of the plurality of edge computing systems operatively coupled to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors, the method comprising each edge computing system: acquiring and processing sensor data for the respective rotor to determine rotor status information; and executing motor commands to control the respective electric motor and thereby the respective rotor, wherein the plurality of edge computing systems are configured according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems,

the method further comprising the secondary edge computing systems communicating respective rotor status information to the primary edge computing system, and the primary edge computing system providing the motor commands to the secondary edge computing systems.

In some example implementations of the method of any preceding example implementation, or any combination of any preceding example implementations, each edge computing system is enabled to communicate with a remote station, and the method further comprises the primary edge computing system among the plurality of edge computing systems communicating with the remote station.

In some example implementations of the method of any preceding example implementation, or any combination of any preceding example implementations, each edge computing system includes a clock to measure and keep time at the edge computing system, and the method further comprises the secondary edge computing systems communicating with the primary edge computing system to synchronize respective clocks of the secondary edge computing systems with the clock of the primary edge computing system.

In some example implementations of the method of any preceding example implementation, or any combination of any preceding example implementations, each edge computing system is configured as an integrated flight computer and motor controller.

In some example implementations of the method of any preceding example implementation, or any combination of any preceding example implementations, each edge computing system includes first power distribution circuitry for the flight computer, second power distribution circuitry for the motor controller, and a power inverter circuit coupled to the second power distribution circuitry, and the method further comprises the power inverter circuit supplying power to the respective electric motor of the edge computing system.

In some example implementations of the method of any preceding example implementation, or any combination of any preceding example implementations, the method further comprises the primary edge computing system implementing the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and

providing the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading.

In some example implementations of the method of any preceding example implementation, or any combination of any preceding example implementations, each edge computing system includes an inertial measurement unit (IMU) and magnetometer, and the method further comprises the IMU and magnetometer of the primary edge computing system determining the attitude, position and heading of the multi-rotor vehicle.

In some example implementations of the method of any preceding example implementation, or any combination of any preceding example implementations, each edge computing system is configured to store a configuration file with an ordered list of the plurality of edge computing systems that begins with the primary edge computing system and then a first of the secondary edge computing systems, and wherein the method further comprises the primary edge computing system communicating health status information to the first of the secondary edge computing systems, and in response, the first of the secondary edge computing systems determining a health status of the primary edge computing system from the health status information, and assuming responsibility as the primary edge computing system when the health status reaches a predetermined threshold.

In some example implementations of the method of any preceding example implementation, or any combination of any preceding example implementations, the ordered list includes a second of the secondary edge computing systems after the first of the secondary edge computing systems, and wherein the method further comprises, after the first of the secondary edge computing systems assumes responsibility as the primary edge computing system, the second of the secondary edge computing systems assuming responsibility as the first of the secondary edge computing systems.

In one embodiment there is provided a multi-rotor vehicle comprising an airframe and coupled to the airframe, a plurality of electric motors operatively coupled to a respective plurality of rotors, the plurality of electric motors configured to cause the respective plurality of rotors to rotate relative to the airframe. Also coupled to the

airframe are a plurality of edge computing systems that are independent, distinct and distributed to the plurality of electric motors, each edge computing system operatively coupled to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors, each edge computing system configured to acquire and process sensor data for the respective rotor to determine rotor status information and execute motor commands to control the respective electric motor and thereby the respective rotor. The plurality of edge computing systems are configured according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems, the secondary edge computing systems configured to communicate respective rotor status information to the primary edge computing system, and the primary edge computing system configured to provide the motor commands to the secondary edge computing systems. Each edge computing system is configured as an integrated flight computer and motor controller, and includes an inertial measurement unit (IMU) and magnetometer, and the primary edge computing system is configured to implement the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and provide the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading of the multi-rotor vehicle. The IMU and magnetometer of the primary edge computing system are configured to determine the attitude, position and heading of the multi-rotor vehicle, and the IMU of each edge computing system is co-located with the respective rotor of the respective plurality of rotors.

In another embodiment there is provided an edge computing system of a plurality of edge computing systems configured for use on a multi-rotor vehicle including a plurality of electric motors operatively coupled to a respective plurality of rotors, the plurality of electric motors configured to cause the respective plurality of rotors to rotate relative to an airframe, the plurality of edge computing systems being independent, distinct and distributable to the plurality of electric motors. The edge computing system comprises processing circuitry operatively coupleable to a respective electric motor of

the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors. The processing circuitry is configured to acquire and process sensor data for the respective rotor to determine rotor status information, and execute motor commands to control the respective electric motor and thereby the respective rotor. The edge computing system also comprises a communication interface configured to enable the edge computing system to communicate with others of the plurality of edge computing systems. The edge computing system is configured to communicate with the others of the plurality of edge computing systems according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems configured to communicate respective rotor status information to the primary edge computing system, and the primary edge computing system configured to provide the motor commands to the secondary edge computing systems. The edge computing system is configured as an integrated flight computer and motor controller, and includes an inertial measurement unit (IMU) and magnetometer, and the primary edge computing system is configured to implement the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and provide the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading of the multi-rotor vehicle. The IMU and magnetometer of the primary edge computing system are configured to determine the attitude, position and heading of the multi-rotor vehicle, and the IMU of the edge computing system is co-located with the respective rotor of the respective plurality of rotors.

In another embodiment there is provided a method of operating a multi-rotor vehicle including a plurality of electric motors operatively coupled to a respective plurality of rotors, and a plurality of edge computing systems that are independent, distinct and distributed to the plurality of electric motors. Each edge computing system of the plurality of edge computing systems is operatively coupled to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors. The method involves each edge computing system acquiring and

processing sensor data for the respective rotor to determine rotor status information and executing motor commands to control the respective electric motor and thereby the respective rotor. The plurality of edge computing systems are configured according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems. The method further comprises the secondary edge computing systems communicating respective rotor status information to the primary edge computing system, and the primary edge computing system providing the motor commands to the secondary edge computing systems. The edge computing system is configured as an integrated flight computer and motor controller and includes an inertial measurement unit (IMU) and magnetometer, and the method further comprises the primary edge computing system implementing the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and providing the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading of the multi-rotor vehicle. The method further comprises the IMU and magnetometer of the primary edge computing system determining the attitude, position and heading of the multi-rotor vehicle, and the IMU of the edge computing system is co-located with the respective rotor of the respective plurality of rotors.

In another embodiment there is provided a multi-rotor vehicle comprising an airframe and coupled to the airframe a plurality of electric motors operatively coupled to a respective plurality of rotors, the plurality of electric motors configured to cause the respective plurality of rotors to rotate relative to the airframe. A plurality of edge computing systems that are independent, distinct and distributed to the plurality of electric motors are also coupled to the airframe and each edge computing system of the plurality of edge computing systems is operatively coupled to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors. Each edge computing system is configured to acquire and process sensor data for the respective rotor to determine rotor status information, and execute motor commands to control the respective electric motor and thereby the respective

rotor. Each edge computing system is configured as an integrated flight computer and motor controller.

In another embodiment there is provided an edge computing system of a plurality of edge computing systems configured for use on a multi-rotor vehicle including a plurality of electric motors operatively coupled to a respective plurality of rotors, the plurality of electric motors configured to cause the respective plurality of rotors to rotate relative to an airframe, the plurality of edge computing systems being independent, distinct and distributable to the plurality of electric motors. The edge computing system comprises processing circuitry operatively coupleable to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors. The processing circuitry is configured to acquire and process sensor data for the respective rotor to determine rotor status information, and execute motor commands to control the respective electric motor and thereby the respective rotor. The edge computing system further comprises a communication interface configured to enable the edge computing system to communicate with others of the plurality of edge computing systems. The edge computing system is configured as an integrated flight computer and motor controller.

In another embodiment there is provided a method of operating a multi-rotor vehicle including a plurality of electric motors operatively coupled to a respective plurality of rotors, and a plurality of edge computing systems that are independent, distinct and distributed to the plurality of electric motors. Each edge computing system of the plurality of edge computing systems is operatively coupled to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors. The method involves each edge computing system acquiring and processing sensor data for the respective rotor to determine rotor status information and executing motor commands to control the respective electric motor and thereby the respective rotor. Each edge computing system is configured as an integrated flight computer and motor controller.

In another embodiment there is provided a multi-rotor vehicle comprising an airframe and coupled to the airframe, a plurality of electric motors operatively coupled to

a respective plurality of rotors, the plurality of electric motors configured to cause the respective plurality of rotors to rotate relative to the airframe. A plurality of edge computing systems that are independent, distinct and distributed to the plurality of electric motors are also coupled to the airframe. Each edge computing system of the plurality of edge computing systems is operatively coupled to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors. Each edge computing system is configured to acquire and process sensor data for the respective rotor to determine rotor status information, and execute motor commands to control the respective electric motor and thereby the respective rotor. The plurality of edge computing systems are configured according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems. The secondary edge computing systems are configured to communicate respective rotor status information to the primary edge computing system, and the primary edge computing system are configured to provide the motor commands to the secondary edge computing systems. Each edge computing system is configured as an integrated flight computer and motor controller, and includes an inertial measurement unit (IMU) and a magnetometer. The primary edge computing system is configured to implement the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and to provide the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading. The IMU and magnetometer of the primary edge computing system are configured to determine the attitude, position and heading of the multi-rotor vehicle. The IMUs of the edge computing systems are co-located with the respective rotor of the plurality of rotors.

In another embodiment there is provided a method of operating a multi-rotor vehicle including a plurality of electric motors operatively coupled to a respective plurality of rotors, and a plurality of edge computing systems that are independent, distinct and distributed to the plurality of electric motors. Each edge computing system of the plurality of edge computing systems is operatively coupled to a respective electric

motor of the plurality of electric motors, and thereby to a respective rotor of the respective plurality of rotors. The method involves each edge computing system acquiring and processing sensor data for the respective rotor to determine rotor status information and executing motor commands to control the respective electric motor and thereby the respective rotor. The plurality of edge computing systems are configured according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems. The method further involves the secondary edge computing systems communicating respective rotor status information to the primary edge computing system, and the primary edge computing system providing the motor commands to the secondary edge computing systems, wherein each edge computing system is configured as an integrated flight computer and motor controller, and includes an inertial measurement unit (IMU) and a magnetometer. The primary edge computing system is configured to implement the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and to provide the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading. The IMU and magnetometer of the primary edge computing system are configured to determine the attitude, position and heading of the multi-rotor vehicle and the IMUs of the edge computing systems are co-located with the respective rotor of the plurality of rotors.

These and other features, aspects, and advantages of the present disclosure will be apparent from a reading of the following detailed description together with the accompanying figures, which are briefly described below. The present disclosure includes any combination of two, three, four or more features or elements set forth in this disclosure, regardless of whether such features or elements are expressly combined or otherwise recited in a specific example implementation described herein. This disclosure is intended to be read holistically such that any separable features or elements of the disclosure, in any of its aspects and example implementations, should be viewed as combinable unless the context of the disclosure clearly dictates otherwise.

It will therefore be appreciated that this Brief Summary is provided merely for purposes of summarizing some example implementations so as to provide a basic understanding of some aspects of the disclosure. Accordingly, it will be appreciated that the above described example implementations are merely examples and should not be construed to narrow the scope or spirit of the disclosure in any way. Other example implementations, aspects and advantages will become apparent from the following detailed description taken in conjunction with the accompanying figures which illustrate, by way of example, the principles of some described example implementations.

### **BRIEF DESCRIPTION OF THE FIGURE(S)**

Having thus described example implementations of the disclosure in general terms, reference will now be made to the accompanying figures, which are not necessarily drawn to scale, and wherein:

FIG. 1 illustrates a multi-rotor vehicle environment in accordance with example implementations of the present disclosure;

FIG. 2 illustrates a multi-rotor vehicle according to some example implementations;

FIG. 3 more particularly illustrates an edge computing system, according to example implementations;

FIG. 4 is a flowchart illustrating various steps in a method of operating a multi-rotor vehicle, according to example implementations; and

FIG. 5 illustrates an edge computing system including processing circuitry and various components of the edge computing system coupled thereto, according to example implementations.

### **DETAILED DESCRIPTION**

Some implementations of the present teachings will now be described more fully hereinafter with reference to the accompanying figures, in which some, but not all

implementations of the disclosure are shown. Indeed, various implementations of the disclosure may be embodied in many different forms and should not be construed as limited to the implementations set forth herein; rather, these example implementations are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the disclosure to those skilled in the art. For example, unless otherwise indicated, reference something as being a first, second or the like should not be construed to imply a particular order. Also, something may be described as being above something else (unless otherwise indicated) may instead be below, and vice versa; and similarly, something described as being to the left of something else may instead be to the right, and vice versa. Like reference numerals refer to like elements throughout.

FIG. 1 illustrates a multi-rotor vehicle environment **100** in accordance with example implementations of the present disclosure. The multi-rotor vehicle environment is an example of an environment in which a multi-rotor vehicle **102** may operate. The multi-rotor vehicle is generally a vehicle such as a rotorcraft with more than one rotor, typically more than two rotors. These rotors are sometimes referred to as wings, propellers, rotary wings, rotor blades or the like, and each revolves around a mast coupled to a motor. As shown, the multi-rotor vehicle takes the form of a quadcopter, which may be manned or unmanned. Other examples of suitable multi-rotor vehicles include a manned or unmanned tricopter, hexacopter, octocopter or the like.

The multi-rotor vehicle **102** flies and may perform additional operations in the multi-rotor vehicle environment **100**. For example, the multi-rotor vehicle may perform operations for a surveillance mission. The operations for the surveillance mission may include generating images of objects including a building **104**. These images may be still images, video, or some combination thereof. Additionally, the surveillance mission also may include generating images of traffic on road **106**. For example, the multi-rotor vehicle may generate images of a vehicle **108** moving on the road.

According to example implementations of the present disclosure, the multi-rotor vehicle **102** includes distributed modular-based edge computing systems that may increase the reliability and survivability of the multi-rotor vehicle. FIG. 2 illustrates a multi-rotor vehicle **200** that may correspond to multi-rotor vehicle **102**, according to some example implementations of the present disclosure. As shown, the multi-rotor

vehicle includes an airframe **202**, and coupled to the airframe, a plurality of electric motors **204** operatively coupled to a respective plurality of rotors **206**. The plurality of electric motors are configured to cause the respective plurality of rotors to rotate relative to the airframe.

Also coupled to the airframe **202**, the multi-rotor vehicle **200** includes a plurality of edge computing systems (ECS) **208** (shown operable as including primary and secondary edge computing systems **208a**, **208b**) that are independent, distinct and distributed to the plurality of electric motors (M) **204**. Each edge computing system of the plurality of edge computing systems is operatively coupled to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors **206**. Each edge computing system is configured to acquire and process sensor data for the respective rotor to determine rotor status information, and execute motor commands to control the respective electric motor and thereby the respective rotor. Examples of suitable sensor data include rotor status information such as rotation direction, rotation speed, blade angle, altitude, wind and the like.

In some examples, the plurality of edge computing systems **208** are configured according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system **208a**, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems **208b**. The secondary edge computing systems are configured to communicate respective rotor status information to the primary edge computing system, and the primary edge computing system is configured to provide the motor commands to the secondary edge computing systems.

In some examples, each edge computing system **208** is configured to store a configuration file with an ordered list of the plurality of edge computing systems that begins with the primary edge computing system **208a** and then a first of the secondary edge computing systems **208b**. In these examples, the primary edge computing system is configured to communicate health status information to the first of the secondary edge computing systems. In response, the first of the secondary edge computing systems is configured to determine a health status of the primary edge computing system from the

health status information, and assume responsibility as the primary edge computing system when the health status reaches a predetermined threshold.

In some further examples, the ordered list includes a second of the secondary edge computing systems **208b** after the first of the secondary edge computing systems. In these examples, after the first of the secondary edge computing systems assumes responsibility as the primary edge computing system **208a**, the second of the secondary edge computing systems assumes responsibility as the first of the secondary edge computing systems.

FIG. 3 more particularly illustrates an edge computing system **208**, according to example implementations of the present disclosure. As shown, the edge computing system includes processing circuitry **310** and a communication interface **312**. The processing circuitry is configured to acquire and process the sensor data for the respective rotor of the plurality of rotors **206** to determine rotor status information, and execute the motor commands to control the respective electric motor **204** and thereby the respective rotor. And the communication interface is configured to enable the edge computing system to communicate with others of the plurality of edge computing systems.

In some examples, the edge computing system **208** further includes a second communication interface **314** configured to enable the edge computing system to communicate with a remote station **316**. In these examples, the primary edge computing system **208a** among the plurality of edge computing systems is configured to communicate with the remote station. Examples of suitable remote stations include fixed or mobile ground stations or terminals, other vehicles such as other aircraft, rotorcraft or the like.

In some examples, the processing circuitry **310** further includes a clock **318** to measure and keep time at the edge computing system. In these examples, the secondary edge computing systems is configured to communicate with the primary edge computing system **208a** via respective communication interfaces to synchronize respective clocks of the secondary edge computing systems with the clock of the primary edge computing system.

In some examples, each edge computing system **208** is configured as an integrated flight computer and motor controller. To this end, the edge computing system may include first power distribution circuitry **320a** such as low-voltage power distribution circuitry for the flight computer, and second power distribution circuitry **320b** such as high-voltage power distribution circuitry for the motor controller. In some further examples, the edge computing system includes a power inverter circuit **322** coupled to the second power distribution circuitry, the power inverter circuit configured to supply power to the respective electric motor **204** of the edge computing system.

In some examples, the primary edge computing system **208a** is configured to implement the flight computer to determine attitude, position and heading of the multi-rotor vehicle **200**, and provide the motor commands based on the rotor status information for the respective plurality of rotors **206**, and the attitude, position and heading. In some of these examples, each edge computing system **208** includes an inertial measurement unit (IMU) **324** and one or more navigation sensors **326** such as a magnetometer. The IMU and magnetometer of the primary edge computing system are configured to determine the attitude, position and heading of the multi-rotor vehicle. In these examples, the IMU of the edge computing system is co-located with the respective rotor of the plurality of rotors **206**. This may enable high bandwidth phase stabilization of local dynamic motor elastic modes without the need for high bandwidth sharing across multiple flight computers (no need to share high frequency data with other flight computers).

FIG. 4 is a flowchart illustrating various steps in a method **400** of operating a multi-rotor vehicle **200**, according to example implementations of the present disclosure. As shown at **402** and **408**, the method includes each edge computing system **208** acquiring and processing sensor data for the respective rotor of the plurality of rotors **206** to determine rotor status information, and executing motor commands to control the respective electric motor **204** and thereby the respective rotor. Again, the plurality of edge computing systems are configured according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system **208a**, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems **208b**. The

method further includes the secondary edge computing systems communicating respective rotor status information to the primary edge computing system, and the primary edge computing system providing the motor commands to the secondary edge computing systems, as shown at **404** and **406**.

According to example implementations of the present disclosure, the edge computing system **208** and its components may be implemented by various means. Means for implementing the edge computing system and its components may include hardware, alone or under direction of one or more computer programs from a computer-readable storage medium. FIG. **5** illustrates the edge computing system including its processing circuitry **310** and various components of the edge computing system coupled to the processing circuitry for carrying out functions of the edge computing system such as those described herein. As shown, the edge computing system may include one or more of each of a number of components such as, for example, the processing circuitry **310** connected to a memory **528** (e.g., storage device).

The processing circuitry **310** may include one or more processors alone or in combination with one or more memories. The processing circuitry is generally any piece of computer hardware that is capable of processing information such as, for example, data, computer programs and/or other suitable electronic information. The processing circuitry is composed of a collection of electronic circuits some of which may be packaged as an integrated circuit or multiple interconnected integrated circuits (an integrated circuit at times more commonly referred to as a “chip”). The processing circuitry may be configured to execute computer programs, which may be stored onboard the processing circuitry or otherwise stored in the memory **528** (of the same or another apparatus).

The processing circuitry **310** may be a number of processors, a multi-core processor or some other type of processor, depending on the particular implementation. The processing circuitry may include a graphic processing unit (GPU), a central processing unit (CPU), or a combination of GPU and CPU. Further, the processing circuitry may be implemented using a number of heterogeneous processor systems in which a main processor is present with one or more secondary processors on a single chip. As another illustrative example, the processing circuitry may be a symmetric multi-

processor system containing multiple processors of the same type. In yet another example, the processing circuitry may be embodied as or otherwise include one or more ASICs, FPGAs or the like. Thus, although the processing circuitry may be capable of executing a computer program to perform one or more functions, the processing circuitry of various examples may be capable of performing one or more functions without the aid of a computer program. In either instance, the processing circuitry may be appropriately programmed to perform functions or operations according to example implementations of the present disclosure.

The memory **528** is generally any piece of computer hardware that is capable of storing information such as, for example, data, computer programs (e.g., computer-readable program code **530**) and/or other suitable information either on a temporary basis and/or a permanent basis. The memory may include volatile and/or non-volatile memory, and may be fixed or removable. Examples of suitable memory include random access memory (RAM), read-only memory (ROM), a hard drive, a flash memory, a thumb drive, a removable computer diskette, an optical disk, a magnetic tape or some combination of the above. Optical disks may include compact disk – read only memory (CD-ROM), compact disk – read/write (CD-R/W), DVD or the like. In various instances, the memory may be referred to as a computer-readable storage medium. The computer-readable storage medium is a non-transitory device capable of storing information, and is distinguishable from computer-readable transmission media such as electronic transitory signals capable of carrying information from one location to another. Computer-readable medium as described herein may generally refer to a computer-readable storage medium or computer-readable transmission medium.

In addition to the memory **528**, as described above, the processing circuitry **310** may also be connected to one or more interfaces for displaying, transmitting and/or receiving information. The interfaces may include the communications interface **312**, and perhaps also the second communication interface **314**. The communications interface(s) may be configured to transmit and/or receive information, such as to and/or from other edge computing systems **208**, remote stations **316** or the like. The communications interface(s) may be configured to transmit and/or receive information by physical (wired) and/or wireless communications links. These physical (wired) communication links in

particular may be configured to implement any of a number of different technologies such as RS-485, controller area network (CAN) bus or the like. Likewise, wireless communication links in particular may be configured to implement any of a number of different radio access technologies such as any of a number of 3GPP or 4GPP radio access technologies, UMTS UTRA, GSM radio access technologies, CDMA 2000 radio access technologies, WLANs (e.g., IEEE 802.xx, e.g., 802.11a, 802.11b, 802.11g, 802.11n), WiMAX, IEEE 802.16, wireless PANs (WPANs) (e.g., IEEE 802.15, Bluetooth®, low power versions of Bluetooth®, IrDA, UWB, Wibree, Zigbee®), near-field communication technologies, and the like.

The processing circuitry 310 may also be connected to an IMU 324 and one or more navigation sensors 326. The IMU may include one or more sensors such as accelerometers and gyroscopes, and may also include magnetometers. As indicated above, the navigation sensor(s) may likewise include a magnetometer. Other examples of suitable navigation sensors include a barometer, satellite-based navigation receiver (e.g., GPS, GLONASS) and the like.

As indicated above, program code instructions may be stored in memory, and executed by processing circuitry that is thereby programmed, to implement functions of the systems, subsystems, tools and their respective elements described herein. As will be appreciated, any suitable program code instructions may be loaded onto a computer or other programmable apparatus from a computer-readable storage medium to produce a particular machine, such that the particular machine becomes a means for implementing the functions specified herein. These program code instructions may also be stored in a computer-readable storage medium that can direct a computer, a processing circuitry or other programmable apparatus to function in a particular manner to thereby generate a particular machine or particular article of manufacture. The instructions stored in the computer-readable storage medium may produce an article of manufacture, where the article of manufacture becomes a means for implementing functions described herein. The program code instructions may be retrieved from a computer-readable storage medium and loaded into a computer, processing circuitry or other programmable apparatus to configure the computer, processing circuitry or other

programmable apparatus to execute operations to be performed on or by the computer, processing circuitry or other programmable apparatus.

Retrieval, loading and execution of the program code instructions may be performed sequentially such that one instruction is retrieved, loaded and executed at a time. In some example implementations, retrieval, loading and/or execution may be performed in parallel such that multiple instructions are retrieved, loaded, and/or executed together. Execution of the program code instructions may produce a computer-implemented process such that the instructions executed by the computer, processing circuitry or other programmable apparatus provide operations for implementing functions described herein.

Execution of instructions by a processing circuitry, or storage of instructions in a computer-readable storage medium, supports combinations of operations for performing the specified functions. In this manner, an edge computing system **208** may include processing circuitry **310** and a computer-readable storage medium or memory **528** coupled to the processing circuitry, where the processing circuitry is configured to execute computer-readable program code **530** stored in the memory. It will also be understood that one or more functions, and combinations of functions, may be implemented by special purpose hardware-based apparatuses and/or processing circuitry s which perform the specified functions, or combinations of special purpose hardware and program code instructions.

Many modifications and other implementations of the teachings set forth herein will come to mind to one skilled in the art to which the disclosure pertains having the benefit of the teachings presented in the foregoing description and the associated figures. Therefore, it is to be understood that the teachings are not to be limited to the specific implementations disclosed and that modifications and other implementations are intended to be included within the scope of the teachings herein. Moreover, although the foregoing description and the associated figures describe example implementations in the context of certain example combinations of elements and/or functions, it should be appreciated that different combinations of elements and/or functions may be provided by alternative implementations without departing from the scope of the teachings herein. In

this regard, for example, different combinations of elements and/or functions than those explicitly described above are also contemplated as may be set forth in some of the combinations described herein. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

**EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. A multi-rotor vehicle comprising:

an airframe; and

coupled to the airframe,

a plurality of electric motors operatively coupled to a respective plurality of rotors, the plurality of electric motors configured to cause the respective plurality of rotors to rotate relative to the airframe; and

a plurality of edge computing systems that are independent, distinct and distributed to the plurality of electric motors, each edge computing system of the plurality of edge computing systems operatively coupled to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors, each edge computing system configured to acquire and process sensor data for the respective rotor to determine rotor status information, and execute motor commands to control the respective electric motor and thereby the respective rotor,

wherein the plurality of edge computing systems are configured according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing

systems, the secondary edge computing systems configured to communicate respective rotor status information to the primary edge computing system, and the primary edge computing system configured to provide the motor commands to the secondary edge computing systems,

wherein each edge computing system is configured as an integrated flight computer and motor controller, and includes an inertial measurement unit (IMU) and magnetometer, and the primary edge computing system is configured to implement the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and provide the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading of the multi-rotor vehicle, and

wherein the IMU and magnetometer of the primary edge computing system are configured to determine the attitude, position and heading of the multi-rotor vehicle, and the IMU of each edge computing system is co-located with the respective rotor of the respective plurality of rotors.

**2. The multi-rotor vehicle of claim 1, wherein each edge computing system includes:**

processing circuitry configured to acquire and process the sensor data for the respective rotor to determine rotor status information, and execute the motor commands to control the respective electric motor and thereby the respective rotor; and

a communication interface configured to enable the edge computing system to communicate with others of the plurality of edge computing systems.

3. The multi-rotor vehicle of claim 2, wherein each edge computing system further includes a second communication interface configured to enable the edge computing system to communicate with a remote station, the primary edge computing system among the plurality of edge computing systems being configured to communicate with the remote station.
4. The multi-rotor vehicle of claim 2, wherein the processing circuitry of each edge computing system further includes a clock to measure and keep time at the edge computing system, the secondary edge computing systems configured to communicate with the primary edge computing system via respective communication interfaces to synchronize respective clocks of the secondary edge computing systems with the clock of the primary edge computing system.
5. The multi-rotor vehicle of claim 1, wherein each edge computing system includes first power distribution circuitry for the flight computer, and second power distribution circuitry for the motor controller.
6. The multi-rotor vehicle of claim 5, wherein each edge computing system further includes a power inverter circuit coupled to the second power distribution circuitry, the power inverter circuit configured to supply power to the respective electric motor of the edge computing system.
7. The multi-rotor vehicle of any one of claims 1-6, wherein each edge computing system is configured to store a configuration file with an ordered list of the plurality of edge computing systems that begins with the primary edge computing system and then a first of the secondary edge computing systems, and

wherein the primary edge computing system is configured to communicate health status information to the first of the secondary edge computing systems, and in

response, the first of the secondary edge computing systems is configured to determine a health status of the primary edge computing system from the health status information, and assume responsibility as the primary edge computing system when the health status reaches a predetermined threshold.

8. The multi-rotor vehicle of claim 7, wherein the ordered list includes a second of the secondary edge computing systems after the first of the secondary edge computing systems, and

wherein after the first of the secondary edge computing systems assumes responsibility as the primary edge computing system, the second of the secondary edge computing systems assumes responsibility as the first of the secondary edge computing systems.

9. An edge computing system of a plurality of edge computing systems configured for use on a multi-rotor vehicle including a plurality of electric motors operatively coupled to a respective plurality of rotors, the plurality of electric motors configured to cause the respective plurality of rotors to rotate relative to an airframe, the plurality of edge computing systems being independent, distinct and distributable to the plurality of electric motors, the edge computing system comprising:

processing circuitry operatively coupleable to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors, the processing circuitry configured to acquire and process sensor data for the respective rotor to determine rotor status information, and execute motor commands to control the respective electric motor and thereby the respective rotor; and

a communication interface configured to enable the edge computing system to communicate with others of the plurality of edge computing systems,

wherein the edge computing system is configured to communicate with the others of the plurality of edge computing systems according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems, the secondary edge computing systems configured to communicate respective rotor status information to the primary edge computing system, and the primary edge computing system configured to provide the motor commands to the secondary edge computing systems

wherein the edge computing system is configured as an integrated flight computer and motor controller, and includes an inertial measurement unit (IMU) and magnetometer, and the primary edge computing system is configured to implement the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and provide the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading of the multi-rotor vehicle, and

wherein the IMU and magnetometer of the primary edge computing system are configured to determine the attitude, position and heading of the multi-rotor vehicle, and the IMU of the edge computing system is co-located with the respective rotor of the respective plurality of rotors.

10. The edge computing system of claim 9, wherein the edge computing system further comprises a second communication interface configured to enable the edge computing system to communicate with a remote station, the primary edge computing system among the plurality of edge computing systems being configured to communicate with the remote station.

11. The edge computing system of claims **9** or **10**, wherein the processing circuitry of the edge computing system further includes a clock to measure and keep time at the edge computing system, the secondary edge computing systems configured to communicate with the primary edge computing system via respective communication interfaces to synchronize respective clocks of the secondary edge computing systems with the clock of the primary edge computing system.
12. The edge computing system of claim **9**, wherein the edge computing system further comprises first power distribution circuitry for the flight computer, and second power distribution circuitry for the motor controller.
13. The edge computing system of claim **12**, wherein the edge computing system further comprises a power inverter circuit coupled to the second power distribution circuitry, the power inverter circuit configured to supply power to the respective electric motor of the edge computing system.
14. The edge computing system of any one of claims **9-13**, wherein the edge computing system is configured to store a configuration file with an ordered list of the plurality of edge computing systems that begins with the primary edge computing system and then a first of the secondary edge computing systems, and  
  
wherein the primary edge computing system is configured to communicate health status information to the first of the secondary edge computing systems, and in response, the first of the secondary edge computing systems is configured to determine a health status of the primary edge computing system from the health status information, and assume responsibility as the primary edge computing system when the health status reaches a predetermined threshold.

15. The edge computing system of claim 14, wherein the ordered list includes a second of the secondary edge computing systems after the first of the secondary edge computing systems, and

wherein after the first of the secondary edge computing systems assumes responsibility as the primary edge computing system, the second of the secondary edge computing systems assumes responsibility as the first of the secondary edge computing systems.

16. A method of operating a multi-rotor vehicle including a plurality of electric motors operatively coupled to a respective plurality of rotors, and a plurality of edge computing systems that are independent, distinct and distributed to the plurality of electric motors, each edge computing system of the plurality of edge computing systems operatively coupled to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors, the method comprising each edge computing system:

acquiring and processing sensor data for the respective rotor to determine rotor status information; and

executing motor commands to control the respective electric motor and thereby the respective rotor,

wherein the plurality of edge computing systems are configured according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems, the method further comprising the secondary edge computing systems communicating respective rotor status information to the primary edge computing system, and the primary edge

computing system providing the motor commands to the secondary edge computing systems

wherein the edge computing system is configured as an integrated flight computer and motor controller, and includes an inertial measurement unit (IMU) and magnetometer, and the method further comprises the primary edge computing system implementing the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and providing the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading of the multi-rotor vehicle, and

wherein the method further comprises the IMU and magnetometer of the primary edge computing system determining the attitude, position and heading of the multi-rotor vehicle, and the IMU of the edge computing system is co-located with the respective rotor of the respective plurality of rotors.

17. The method of claim 16, wherein each edge computing system is enabled to communicate with a remote station, and the method further comprises the primary edge computing system among the plurality of edge computing systems communicating with the remote station.
18. The method of claim 16 or 17, wherein each edge computing system includes a clock to measure and keep time at the edge computing system, and the method further comprises the secondary edge computing systems communicating with the primary edge computing system to synchronize respective clocks of the secondary edge computing systems with the clock of the primary edge computing system.
19. The method of claim 16, wherein each edge computing system includes first power distribution circuitry for the flight computer, second power distribution circuitry for the motor controller, and a power inverter circuit coupled to the second power

distribution circuitry, and the method further comprises the power inverter circuit supplying power to the respective electric motor of the edge computing system.

- 20.** The method of any one of claims **16-19**, wherein each edge computing system is configured to store a configuration file with an ordered list of the plurality of edge computing systems that begins with the primary edge computing system and then a first of the secondary edge computing systems, and

wherein the method further comprises the primary edge computing system communicating health status information to the first of the secondary edge computing systems, and in response, the first of the secondary edge computing systems determining a health status of the primary edge computing system from the health status information, and assuming responsibility as the primary edge computing system when the health status reaches a predetermined threshold.

- 21.** The method of claim **20**, wherein the ordered list includes a second of the secondary edge computing systems after the first of the secondary edge computing systems, and

wherein the method further comprises, after the first of the secondary edge computing systems assumes responsibility as the primary edge computing system, the second of the secondary edge computing systems assuming responsibility as the first of the secondary edge computing systems.

- 22.** A multi-rotor vehicle comprising:

an airframe; and

coupled to the airframe:

a plurality of electric motors operatively coupled to a respective plurality of rotors, the plurality of electric motors configured to cause the respective plurality of rotors to rotate relative to the airframe; and

a plurality of edge computing systems that are independent, distinct and distributed to the plurality of electric motors, each edge computing system of the plurality of edge computing systems operatively coupled to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors, each edge computing system configured to acquire and process sensor data for the respective rotor to determine rotor status information, and execute motor commands to control the respective electric motor and thereby the respective rotor,

wherein each edge computing system is configured as an integrated flight computer and motor controller.

- 23.** The multi-rotor vehicle of Claim **22**, wherein each edge computing system includes first power distribution circuitry for the flight computer, and second power distribution circuitry for the motor controller.
- 24.** The multi-rotor vehicle of Claim **23**, wherein each edge computing system further includes a power inverter circuit coupled to the second power distribution circuitry, the power inverter circuit configured to supply power to the respective electric motor of the edge computing system.
- 25.** The multi-rotor vehicle of any one of claims **22-24**, wherein each edge computing system includes:

processing circuitry configured to acquire and process the sensor data for the respective rotor to determine rotor status information, and execute the motor commands to control the respective electric motor and thereby the respective rotor; and

a communication interface configured to enable the edge computing system to communicate with others of the plurality of edge computing systems.

- 26.** The multi-rotor vehicle of Claim **25**, wherein the plurality of edge computing systems are configured according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems, the secondary edge computing systems configured to communicate respective rotor status information to the primary edge computing system, and the primary edge computing system configured to provide the motor commands to the secondary edge computing systems.
- 27.** The multi-rotor vehicle of Claim **26**, wherein each edge computing system further includes a second communication interface configured to enable the edge computing system to communicate with a remote station, the primary edge computing system among the plurality of edge computing systems being configured to communicate with the remote station.
- 28.** The multi-rotor vehicle of Claim **26**, wherein the processing circuitry of each edge computing system further includes a clock to measure and keep time at the edge computing system, the secondary edge computing systems configured to communicate with the primary edge computing system via respective

communication interfaces to synchronize respective clocks of the secondary edge computing systems with the clock of the primary edge computing system.

- 29.** The multi-rotor vehicle of Claim **26**, wherein the primary edge computing system is configured to implement the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and provide the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading.
- 30.** The multi-rotor vehicle of Claim **29**, wherein each edge computing system includes an inertial measurement unit (IMU) and magnetometer, and the IMU and magnetometer of the primary edge computing system are configured to determine the attitude, position and heading of the multi-rotor vehicle.
- 31.** The multi-rotor vehicle of Claim **29**, wherein each edge computing system is configured to store a configuration file with an ordered list of the plurality of edge computing systems that begins with the primary edge computing system and then a first of the secondary edge computing systems, and

wherein the primary edge computing system is configured to communicate health status information to the first of the secondary edge computing systems, and in response, the first of the secondary edge computing systems is configured to determine a health status of the primary edge computing system from the health status information, and assume responsibility as the primary edge computing system when the health status reaches a predetermined threshold.

- 32.** The multi-rotor vehicle of Claim **31**, wherein the ordered list includes a second of the secondary edge computing systems after the first of the secondary edge computing systems, and

wherein after the first of the secondary edge computing systems assumes responsibility as the primary edge computing system, the second of the secondary edge computing systems assumes responsibility as the first of the secondary edge computing systems.

- 33.** An edge computing system of a plurality of edge computing systems configured for use on a multi-rotor vehicle including a plurality of electric motors operatively coupled to a respective plurality of rotors, the plurality of electric motors configured to cause the respective plurality of rotors to rotate relative to an airframe, the plurality of edge computing systems being independent, distinct and distributable to the plurality of electric motors, the edge computing system comprising:

processing circuitry operatively coupleable to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors, the processing circuitry configured to acquire and process sensor data for the respective rotor to determine rotor status information, and execute motor commands to control the respective electric motor and thereby the respective rotor; and

a communication interface configured to enable the edge computing system to communicate with others of the plurality of edge computing systems,

wherein the edge computing system is configured as an integrated flight computer and motor controller.

- 34.** The edge computing system of Claim **33**, wherein the edge computing system further comprises first power distribution circuitry for the flight computer, and second power distribution circuitry for the motor controller.

- 35.** The edge computing system of Claim **34**, wherein the edge computing system further comprises a power inverter circuit coupled to the second power distribution circuitry, the power inverter circuit configured to supply power to the respective electric motor of the edge computing system.
- 36.** The edge computing system of any one of claims **33-35**, wherein the edge computing system is configured to communicate with the others of the plurality of edge computing systems according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems, the secondary edge computing systems configured to communicate respective rotor status information to the primary edge computing system, and the primary edge computing system configured to provide the motor commands to the secondary edge computing systems.
- 37.** The edge computing system of Claim **36**, wherein the edge computing system further comprises a second communication interface configured to enable the edge computing system to communicate with a remote station, the primary edge computing system among the plurality of edge computing systems being configured to communicate with the remote station.
- 38.** The edge computing system of Claim **36**, wherein the processing circuitry of the edge computing system further includes a clock to measure and keep time at the edge computing system, the secondary edge computing systems configured to communicate with the primary edge computing system via respective communication interfaces to synchronize respective clocks of the secondary edge computing systems with the clock of the primary edge computing system .

**39.** The edge computing system of Claim **36**, wherein the primary edge computing system is configured to implement the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and provide the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading.

**40.** The edge computing system of Claim **39**, wherein the edge computing system further comprises an inertial measurement unit (IMU) and magnetometer, and the IMU and magnetometer of the primary edge computing system are configured to determine the attitude, position and heading of the multi-rotor vehicle.

**41.** The edge computing system of Claim **36**, wherein the edge computing system is configured to store a configuration file with an ordered list of the plurality of edge computing systems that begins with the primary edge computing system and then a first of the secondary edge computing systems , and

wherein the primary edge computing system is configured to communicate health status information to the first of the secondary edge computing systems, and in response, the first of the secondary edge computing systems is configured to determine a health status of the primary edge computing system from the health status information, and assume responsibility as the primary edge computing system when the health status reaches a predetermined threshold.

**42.** The edge computing system of Claim **41**, wherein the ordered list includes a second of the secondary edge computing systems after the first of the secondary edge computing systems, and

wherein after the first of the secondary edge computing systems assumes responsibility as the primary edge computing system, the second of the secondary

edge computing systems assumes responsibility as the first of the secondary edge computing systems.

- 43.** A method of operating a multi-rotor vehicle including a plurality of electric motors operatively coupled to a respective plurality of rotors, and a plurality of edge computing systems that are independent, distinct and distributed to the plurality of electric motors, each edge computing system of the plurality of edge computing systems operatively coupled to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors, the method comprising each edge computing system:

acquiring and processing sensor data for the respective rotor to determine rotor status information; and

executing motor commands to control the respective electric motor and thereby the respective rotor,

wherein each edge computing system is configured as an integrated flight computer and motor controller.

- 44.** The method of Claim **43**, wherein each edge computing system includes first power distribution circuitry for the flight computer, second power distribution circuitry for the motor controller, and a power inverter circuit coupled to the second power distribution circuitry, and the method further comprises the power inverter circuit supplying power to the respective electric motor of the edge computing system.

- 45.** The method of claims **43** or **44**, wherein the plurality of edge computing systems are configured according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of

edge computing systems other than the primary edge computing system are operable as secondary edge computing systems, the method further comprising the secondary edge computing systems communicating respective rotor status information to the primary edge computing system, and the primary edge computing system providing the motor commands to the secondary edge computing systems.

46. The method of Claim 45, wherein each edge computing system is enabled to communicate with a remote station, and the method further comprises the primary edge computing system among the plurality of edge computing systems communicating with the remote station.
47. The method of Claim 45, wherein each edge computing system includes a clock to measure and keep time at the edge computing system, and the method further comprises the secondary edge computing systems communicating with the primary edge computing system to synchronize respective clocks of the secondary edge computing systems with the clock of the primary edge computing system.
48. The method of Claim 45, wherein the method further comprises the primary edge computing system implementing the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and providing the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading.
49. The method of Claim 48, wherein each edge computing system includes an inertial measurement unit (IMU) and magnetometer, and the method further comprises the IMU and magnetometer of the primary edge computing system determining the attitude, position and heading of the multi-rotor vehicle.

**50.** The method of Claim **45**, wherein each edge computing system is configured to store a configuration file with an ordered list of the plurality of edge computing systems that begins with the primary edge computing system and then a first of the secondary edge computing systems, and

wherein the method further comprises the primary edge computing system communicating health status information to the first of the secondary edge computing systems, and in response, the first of the secondary edge computing systems determining a health status of the primary edge computing system from the health status information, and assuming responsibility as the primary edge computing system when the health status reaches a predetermined threshold.

**51.** The method of Claim **50**, wherein the ordered list includes a second of the secondary edge computing systems after the first of the secondary edge computing systems, and

wherein the method further comprises, after the first of the secondary edge computing systems assumes responsibility as the primary edge computing system, the second of the secondary edge computing systems assuming responsibility as the first of the secondary edge computing systems.

**52.** A multi-rotor vehicle comprising:

an airframe; and

coupled to the airframe:

a plurality of electric motors operatively coupled to a respective plurality of rotors, the plurality of electric motors configured to cause

the respective plurality of rotors to rotate relative to the airframe;  
and

a plurality of edge computing systems that are independent, distinct and distributed to the plurality of electric motors, each edge computing system of the plurality of edge computing systems being operatively coupled to a respective electric motor of the plurality of electric motors, and thereby a respective rotor of the respective plurality of rotors, each edge computing system being configured to acquire and process sensor data for the respective rotor to determine rotor status information, and execute motor commands to control the respective electric motor and thereby the respective rotor,

wherein the plurality of edge computing systems are configured according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems, the secondary edge computing systems configured to communicate respective rotor status information to the primary edge computing system, and the primary edge computing system configured to provide the motor commands to the secondary edge computing systems, wherein

each edge computing system is configured as an integrated flight computer and motor controller, and includes an inertial measurement unit (IMU) and a magnetometer,

the primary edge computing system configured to implement the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and to provide the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading,

the IMU and magnetometer of the primary edge computing system configured to determine the attitude, position and heading of the multi-rotor vehicle,

the IMUs of the edge computing systems being co-located with the respective rotor of the plurality of rotors.

**53.** The multi-rotor vehicle of claim **52**, wherein each edge computing system includes:

processing circuitry configured to acquire and process the sensor data for the respective rotor to determine rotor status information, and execute the motor commands to control the respective electric motor and thereby the respective rotor; and

a communication interface configured to enable the edge computing system to communicate with others of the plurality of edge computing systems.

**54.** The multi-rotor vehicle of claim **53**, wherein each edge computing system further includes a second communication interface configured to enable the edge computing system to communicate with a remote station, the primary edge computing system among the plurality of edge computing systems configured to communicate with the remote station, or wherein the processing circuitry of each edge computing system further includes a clock to measure and keep time at the edge computing system, the secondary edge computing systems configured to

communicate with the primary edge computing system via respective communication interfaces to synchronize respective clocks of the secondary edge computing systems with the clock of the primary edge computing system.

- 55.** The multi-rotor vehicle of any one of claims **52-54**, wherein each edge computing system includes first power distribution circuitry for the flight computer, and second power distribution circuitry for the motor controller, wherein each edge computing system further includes a power inverter circuit coupled to the second power distribution circuitry, the power inverter circuit configured to supply power to the respective electric motor of the edge computing system.
- 56.** The multi-rotor vehicle of any one of claims **52-55**, wherein each edge computing system is configured to store a configuration file with an ordered list of the plurality of edge computing systems that begins with the primary edge computing system and then a first of the secondary edge computing systems, and

wherein the primary edge computing system is configured to communicate health status information to the first of the secondary edge computing systems, and in response, the first of the secondary edge computing systems is configured to determine a health status of the primary edge computing system from the health status information, and assume responsibility as the primary edge computing system when the health status reaches a predetermined threshold, wherein the ordered list includes a second of the secondary edge computing systems after the first of the secondary edge computing systems, and wherein after the first of the secondary edge computing systems assumes responsibility as the primary edge computing system, the second of the secondary edge computing systems assumes responsibility as the first of the secondary edge computing systems.

- 57.** The multi-rotor vehicle of claim **53**, wherein the processing circuitry of each edge computing system further includes a clock to measure and keep time at the edge computing system, the secondary edge computing systems configured to communicate with the primary edge computing system via respective communication interfaces to synchronize respective clocks of the secondary edge computing systems with the clock of the primary edge computing system.
- 58.** The multi-rotor vehicle of claim **56**, wherein the ordered list includes a second of the secondary edge computing systems after the first of the secondary edge computing systems, and wherein the first of the secondary edge computing systems is configured to assume responsibility as the primary edge computing system and in response, the second of the secondary edge computing systems is configured to assume responsibility as the first of the secondary edge computing systems.
- 59.** The multi-rotor vehicle of any one of claims **52-58**, wherein the multi-rotor vehicle is a quadricopter or a tricopter or a hexacopter or an octocopter.
- 60.** A method of operating a multi-rotor vehicle including a plurality of electric motors operatively coupled to a respective plurality of rotors, and a plurality of edge computing systems that are independent, distinct and distributed to the plurality of electric motors, each edge computing system of the plurality of edge computing systems being operatively coupled to a respective electric motor of the plurality of electric motors, and thereby to a respective rotor of the respective plurality of rotors, the method comprising each edge computing system:

acquiring and processing sensor data for the respective rotor to determine rotor status information; and

executing motor commands to control the respective electric motor and thereby the respective rotor,

wherein the plurality of edge computing systems are configured according to a model in which any of the plurality of edge computing systems is selectable as a primary edge computing system, and the plurality of edge computing systems other than the primary edge computing system are operable as secondary edge computing systems, and wherein the method further comprises the secondary edge computing systems communicating respective rotor status information to the primary edge computing system, and the primary edge computing system providing the motor commands to the secondary edge computing systems,

wherein each edge computing system is configured as an integrated flight computer and motor controller, and includes an inertial measurement unit (IMU) and a magnetometer,

wherein the primary edge computing system is configured to implement the flight computer to determine attitude, position and heading of the multi-rotor vehicle, and to provide the motor commands based on the rotor status information for the respective plurality of rotors, and the attitude, position and heading,

the IMU and magnetometer of the primary edge computing system being configured to determine the attitude, position and heading of the multi-rotor vehicle,

the IMU of the edge computing systems being co-located with the respective rotor of the plurality of rotors.

- 61.** The method of claim **60**, wherein each edge computing system is enabled to communicate with a remote station, and the method further comprises the primary edge computing system among the plurality of edge computing systems communicating with the remote station, or wherein each edge computing system includes a clock to measure and keep time at the edge computing system, and the method further comprises the secondary edge computing systems communicating with the primary edge computing system to synchronize respective clocks of the secondary edge computing systems with the clock of the primary edge computing system.
- 62.** The method of claim **60**, wherein each edge computing system includes first power distribution circuitry for the flight computer, second power distribution circuitry for the motor controller, and a power inverter circuit coupled to the second power distribution circuitry, and wherein the method further comprises the power inverter circuit supplying power to the respective electric motor of the edge computing system.
- 63.** The method of any one of claims **60-62**, wherein each edge computing system is configured to store a configuration file with an ordered list of the plurality of edge computing systems that begins with the primary edge computing system and then a first of the secondary edge computing systems, and
- wherein the method further comprises the primary edge computing system communicating health status information to the first of the secondary edge computing systems, and in response, the first of the secondary edge computing systems determining a health status of the primary edge computing system from the health status information, and assuming responsibility as the primary edge computing system when the health status reaches a predetermined threshold.

**64.** The method of claim **63**, wherein the ordered list includes a second of the secondary edge computing systems after the first of the secondary edge computing systems, and

wherein the method further comprises, after the first of the secondary edge computing systems assumes responsibility as the primary edge computing system, the second of the secondary edge computing systems assuming responsibility as the first of the secondary edge computing systems.

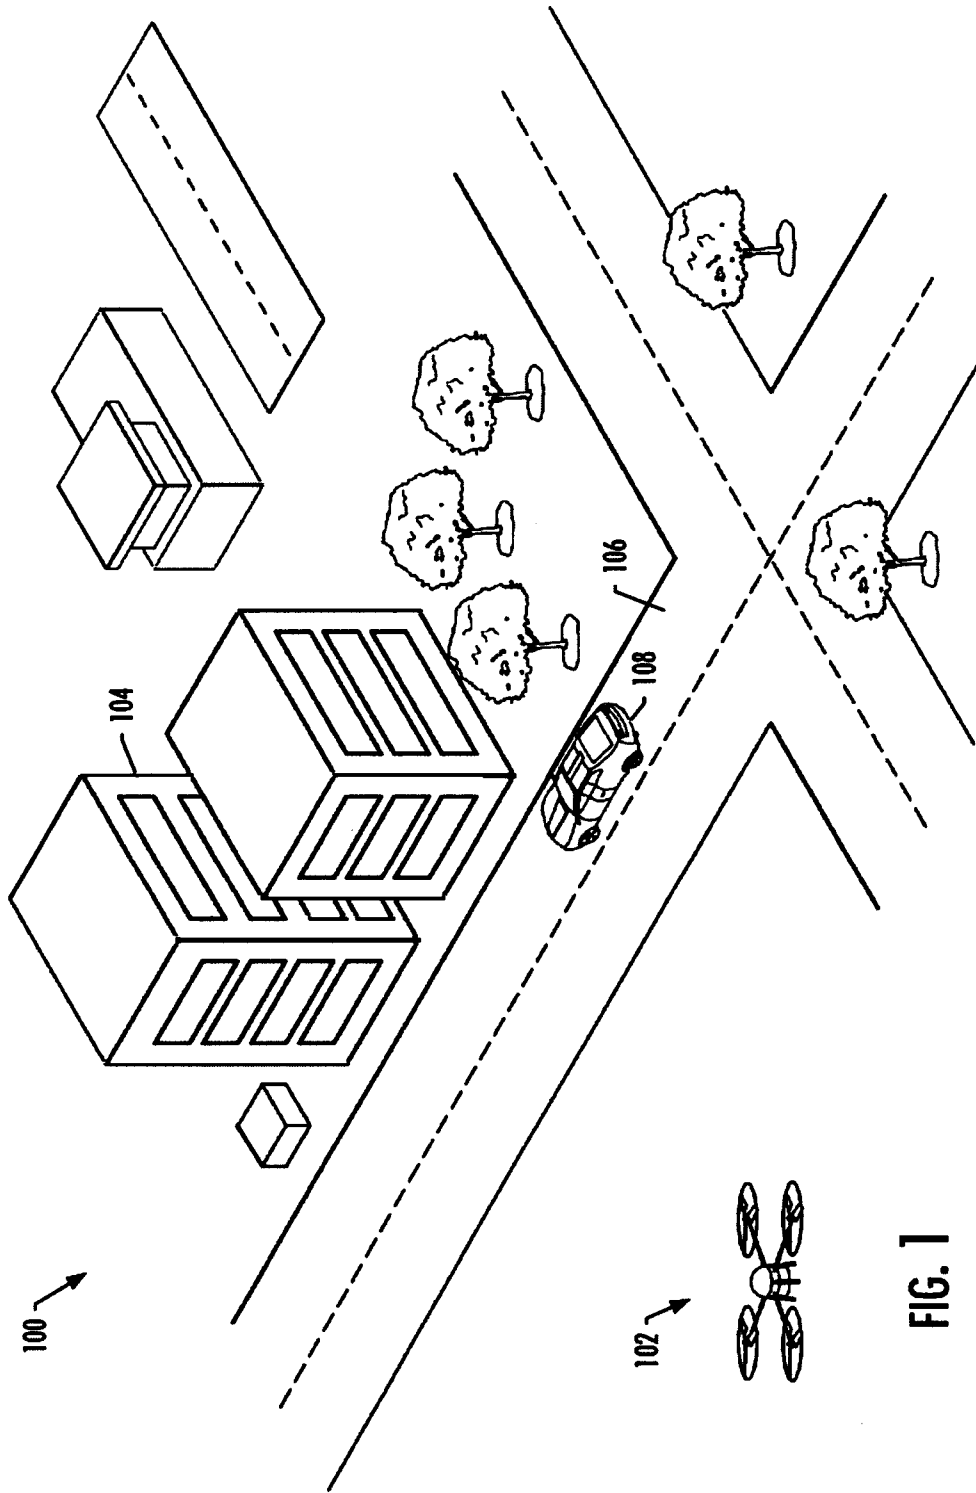


FIG. 1

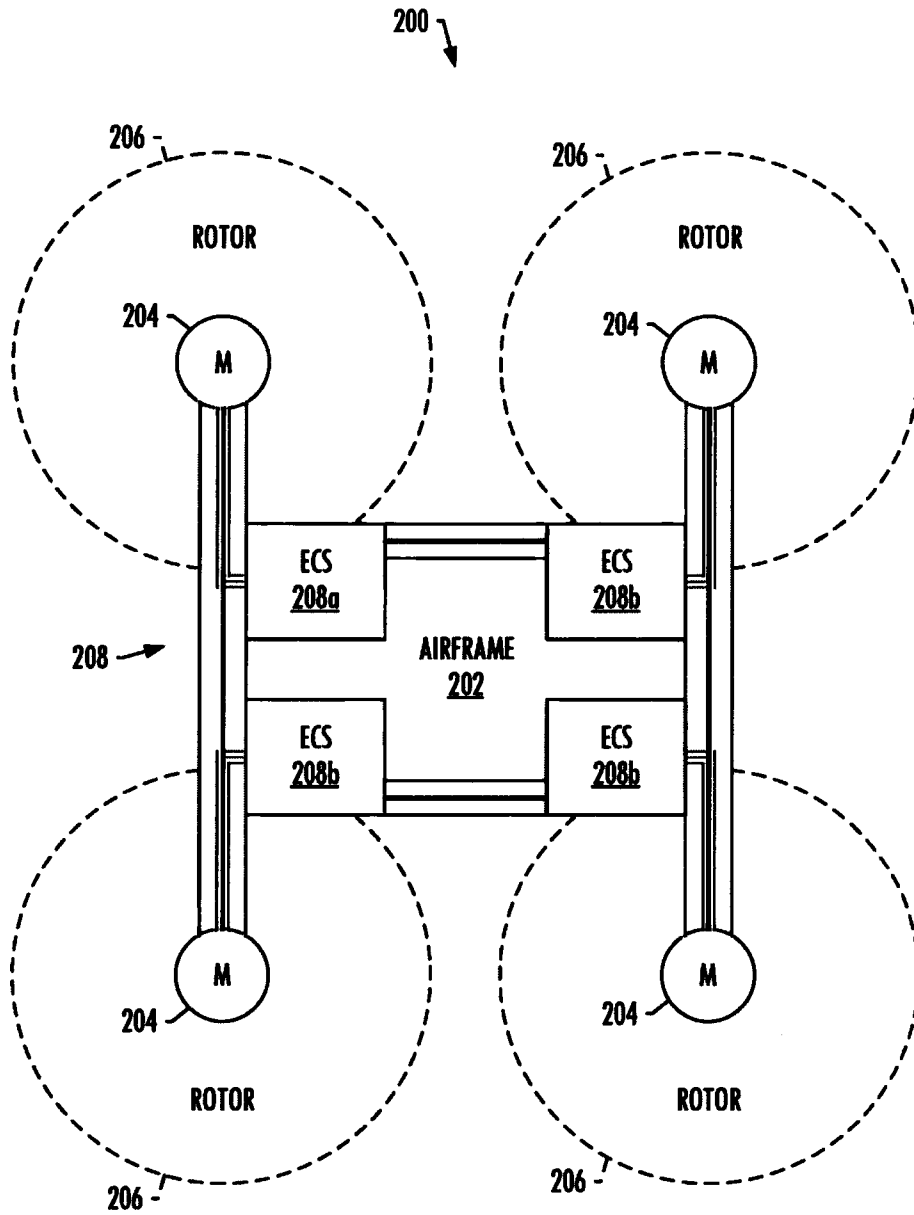


FIG. 2

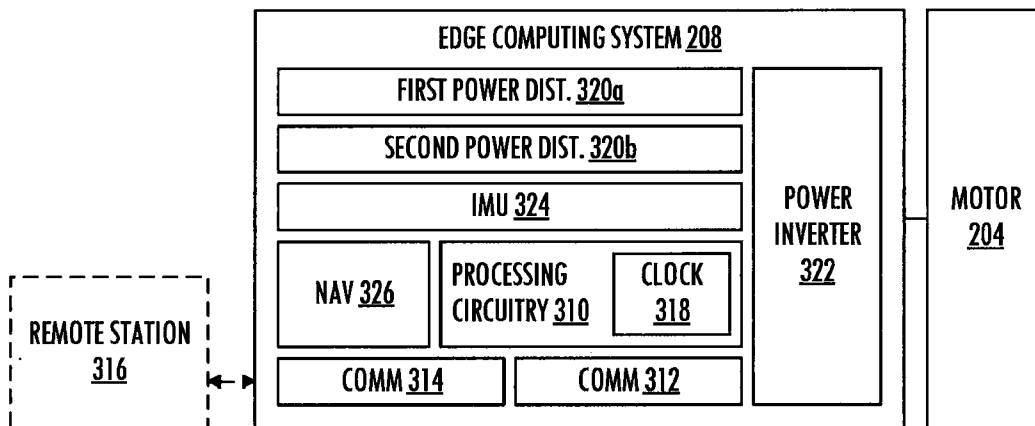


FIG. 3

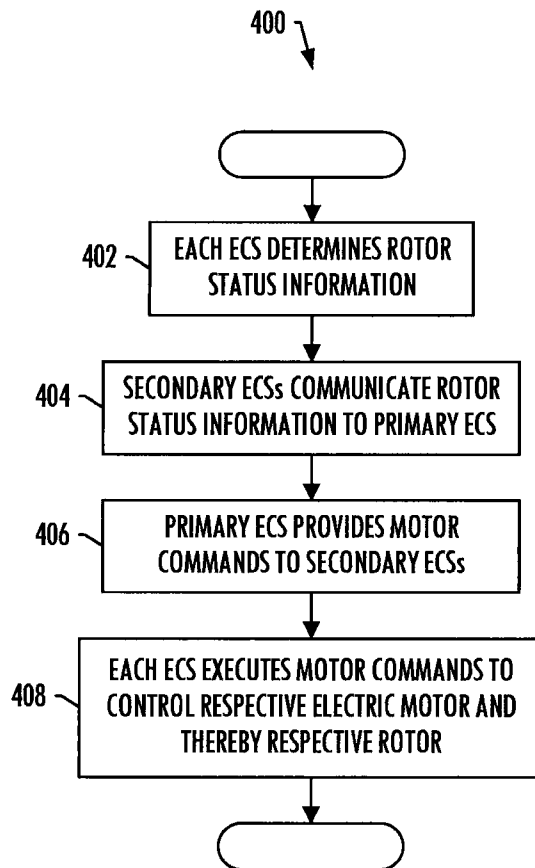


FIG. 4

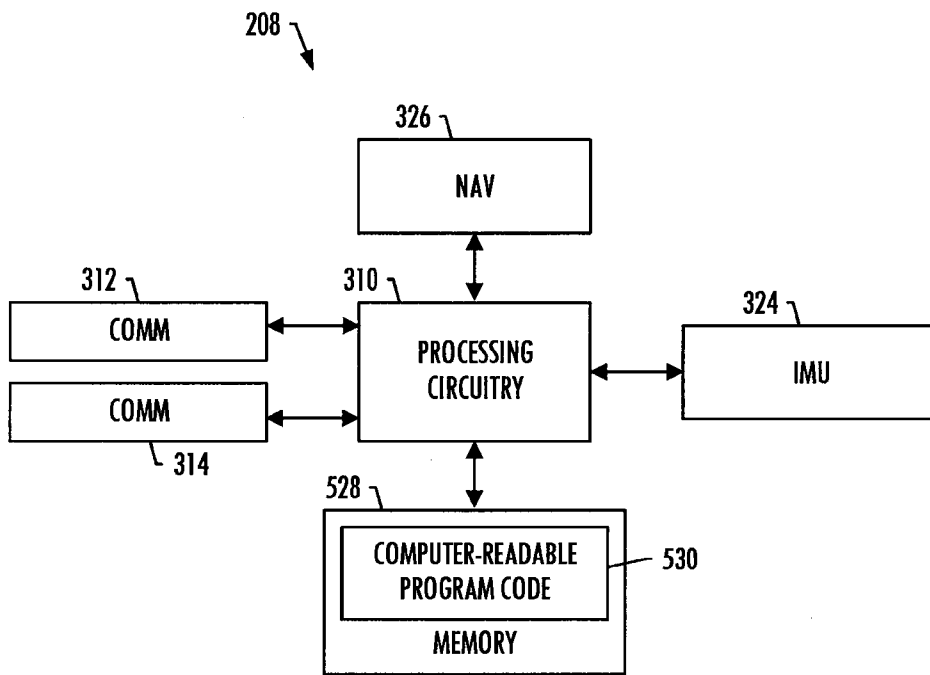


FIG. 5

200 ↘

