



US00RE40226E

(19) **United States**
(12) **Reissued Patent**
Miyata

(10) **Patent Number: US RE40,226 E**
(45) **Date of Reissued Patent: Apr. 8, 2008**

(54) **REAR PROJECTION SCREEN HAVING REDUCED SCINTILLATION**

(75) Inventor: **Hideki Miyata**, Tokyo-To (JP)

(73) Assignee: **Dai Nippon Printing, Co, Ltd.**, Tokyo (JP)

(21) Appl. No.: **10/638,222**

(22) Filed: **Aug. 7, 2003**

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **6,400,504**
Issued: **Jun. 4, 2002**
Appl. No.: **09/879,121**
Filed: **Jun. 13, 2001**

U.S. Applications:

(63) Continuation of application No. 09/029,848, filed as application No. PCT/JP97/02546 on Jul. 23, 1997, now Pat. No. 6,271,965.

(30) **Foreign Application Priority Data**

Jul. 23, 1996 (JP) 8-193039

(51) **Int. Cl.**
G03B 21/60 (2006.01)

(52) **U.S. Cl.** **359/453; 359/457**

(58) **Field of Classification Search** 359/452, 359/453, 456, 457, 460

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,705,757 A * 12/1972 Huber 359/453
3,712,707 A * 1/1973 Henkes, Jr. 359/453
5,196,960 A * 3/1993 Matsuzaki et al. 359/453
5,206,761 A * 4/1993 Ogino 359/457
5,457,572 A * 10/1995 Ishii et al. 359/457
5,477,380 A * 12/1995 Watanabe et al. 359/457

5,485,308 A * 1/1996 Hirata et al. 359/457
5,675,435 A * 10/1997 Ishii et al. 359/460
5,675,455 A 10/1997 Ishii et al. 359/460
5,724,182 A * 3/1998 Mitani et al. 359/457
5,760,955 A * 6/1998 Goldenberg et al. 359/456
5,880,887 A * 3/1999 Goto 359/456

FOREIGN PATENT DOCUMENTS

EP 0 732 615 A1 * 9/1996

(Continued)

OTHER PUBLICATIONS

Patent Abstracts of Japan, vol. 008, No. 031 (P-253), Feb. 8, 1984 (1984-02-09) & JP 58 186732, Oct. 31, 1983 Abstract.*

Patent Abstracts of Japan, vol. 1995, No. 08, Sep. 29, 1995 & JP 07 128745, May 19, 1995 Abstract.*


Primary Examiner—Christopher Mahoney

(74) *Attorney, Agent, or Firm*—Lawrence T. Kass

(57) **ABSTRACT**

A rear projection screen of the present invention includes lens sheets or optical sheets having an optical function of condensing or diffusing light. The lens sheets or optical sheets have, as a whole, two or more diffusing layers (diffusing parts) separately provided in the light-transmitting direction. It is preferable that one of the two or more diffusing layers be provided on the light-entering-side surface of the outermost lens sheet or optical sheet on the light source side and that another one of the diffusing layers be provided on the light-emerging-side surface of the outermost lens sheet or optical sheet on the observation side. Any two of the two or more diffusing layers are such that the light-source-side diffusing layer has a diffusing power lower than that of the observation-side diffusing layer. Further, it is preferable that the types (refractive indexes or average particle diameters) of diffusers to be respectively incorporated into any two of the two or more diffusing layers be different from each other.

13 Claims, 6 Drawing Sheets

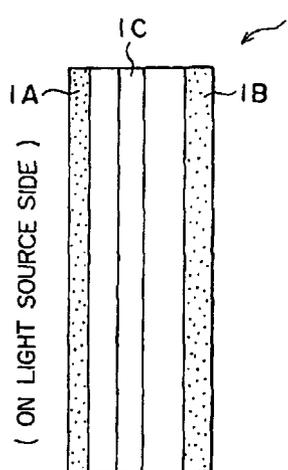

US RE40,226 E

Page 2

FOREIGN PATENT DOCUMENTS

EP	0 807 849 A1	*	11/1997	JP	03013931	*	1/1991
JP	55012980	*	7/1978	JP	3-213841/1991		9/1991
JP	55-12980		1/1980	JP	8-15780	*	1/1996
JP	58-186732		10/1983	JP	8-313865/1996		11/1996
JP	63199338	*	2/1987	JP	9-114003	*	5/1997
JP	3-13931		1/1991				

* cited by examiner

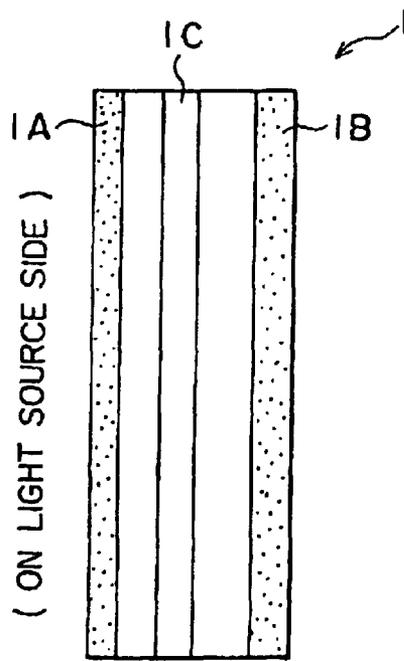


FIG. 1

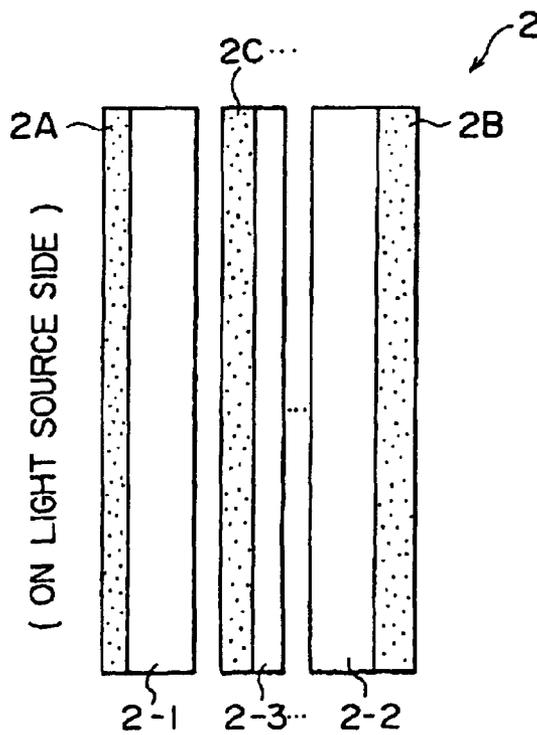


FIG. 2

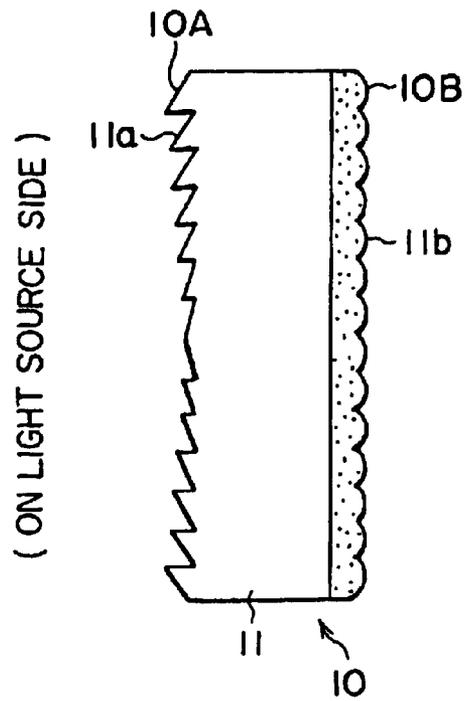


FIG. 3

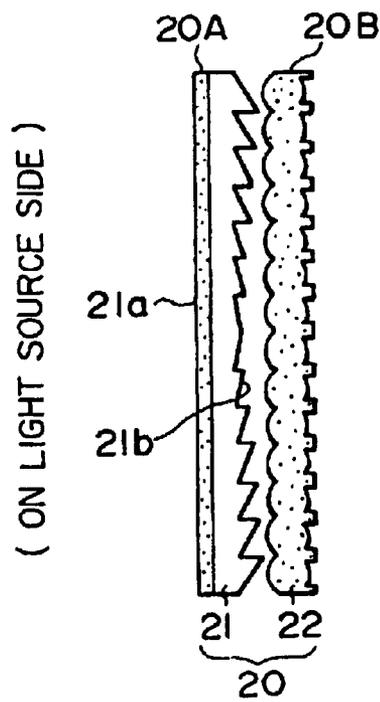


FIG. 4

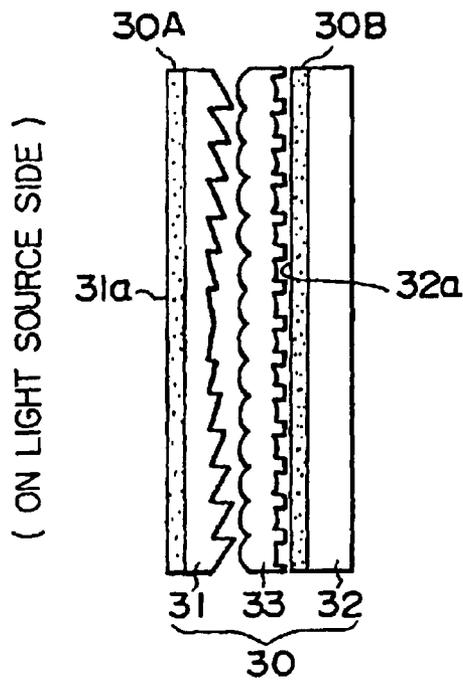


FIG. 5

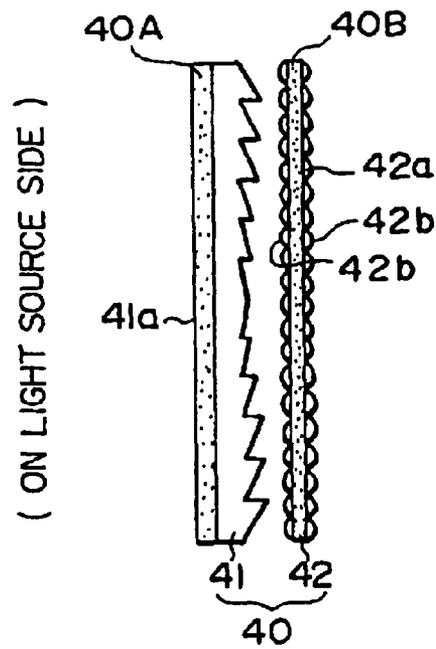


FIG. 6

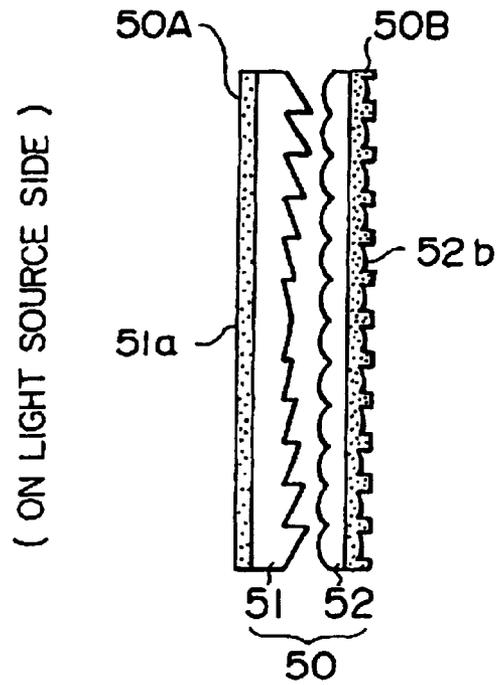


FIG. 7

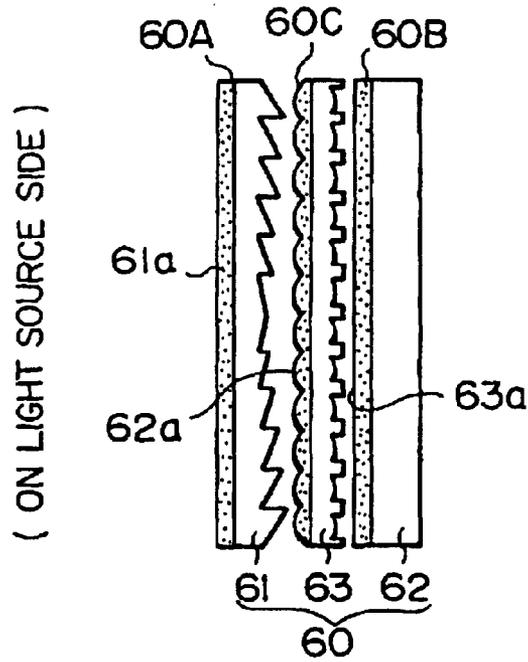


FIG. 8

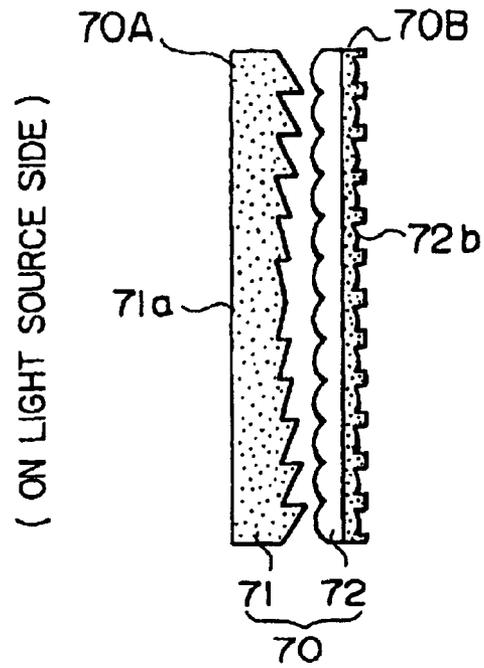


FIG. 9A


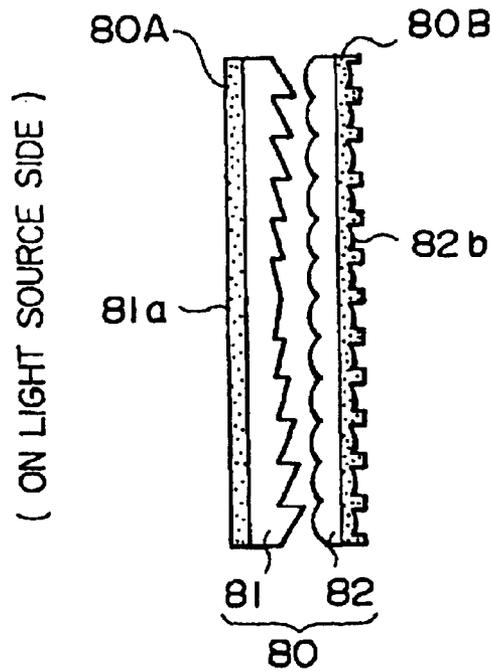


FIG. 9B

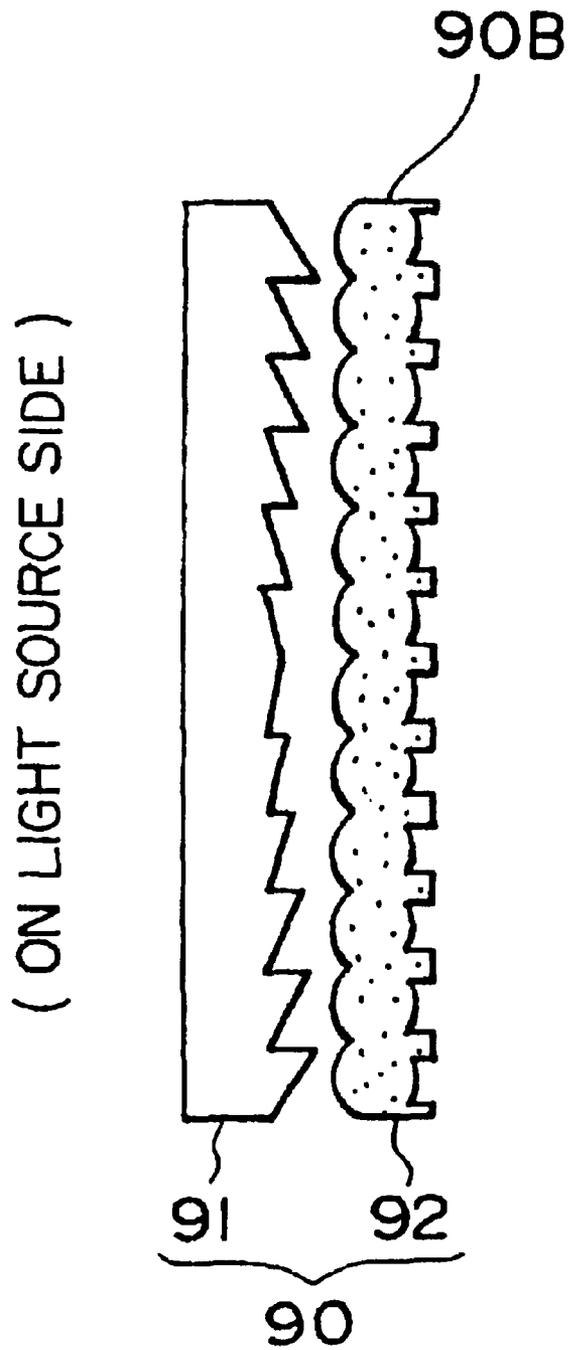

(COMPARATIVE EXAMPLE)

FIG. 10

REAR PROJECTION SCREEN HAVING REDUCED SCINTILLATION

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue.

This is a continuation of application Ser. No. 09/029,848 filed Mar. 26, 1998, now U.S. Pat. No. 6,271,965. *Application Ser. No. 09/029,848 is a national phase application of PCT/JP97/02546, filed Jul. 23, 1997.*

TECHNICAL FIELD

The present invention relates to rear projection screens chiefly used for rear-projection-type projectors such as video projectors and slide projectors.

BACKGROUND ART

As rear projection screens of this type, there have conventionally been known those screens composed of a single lenticular lens sheet comprising as a base material a synthetic resin such as polymethyl methacrylate, and those screens composed of such a lenticular lens sheet and other lens sheets. To form images on these rear projection screens, imaging light is projected on the screens by using light sources such as CRTs.

In recent years, projection tubes having small projection apertures, such as liquid crystal projectors and light bulbs came to be used as light sources in place of CRTs. However, the conventional rear projection screens have such a problem that, when images are formed on these screens by the use of projection tubes having small projection apertures, scintillation or speckle is caused on the images.

In order to solve this problem, there have conventionally been proposed a method in which the screens are scanned by using laser light sources (see Japanese Patent Laid-Open Publication No. 173094/1993); a method in which the screens are vibrated (see Reference 1 (J. Opt. Soc. Am., Vol. 66, No. 11, Nov. 1976, "Speckle-free rear-projection screen using two close screens in slow relative motion")); and a method in which large amounts of diffusers are incorporated into lens sheets.

DISCLOSURE OF THE INVENTION

However, in the aforementioned conventional methods, the modification of the projectors themselves is needed, or additional apparatus are required in order to prevent images from undergoing scintillation or the like. Further, the incorporation of large amounts of diffusers into lens sheets causes such troubles that the gain is decreased and that the resolution is unfavorably lowered.

The present invention was accomplished in view of the above-described drawbacks. An object of the present invention is therefore to provide a rear projection screen capable of forming thereon an image free from scintillation or the like with the decrease in gain and resolution minimized without using any additional apparatus even when a projection tube having a small projection aperture is used.

The first aspect of the present invention is a rear projection screen comprising a lens sheet having an optical function of condensing or diffusing light, wherein the lens sheet has two or more diffusing parts separately provided in a light-transmitting direction.

In the first aspect of the present invention, it is preferable that one of the two or more diffusing parts be provided on

a light-entering-side surface of the lens sheet and that another one of the diffusing parts be provided on a light-emerging-side surface of the lens sheet. Further, it is preferable that the two or more diffusing parts be provided on a surface of the lens sheet and inside the same.

The second aspect of the present invention is a rear projection screen comprising two or more lens sheets or optical sheets having an optical function of condensing or diffusing light, wherein at least one of the two or more lens sheets or optical sheets has at least one diffusing part, and the two or more lens sheets or optical sheets have, as a whole, two or more diffusing parts.

In the second aspect of the present invention, it is preferable that the diffusing parts be provided on surfaces of the two or more lens sheets or optical sheets, or inside the same. Further, it is preferable that the diffusing part of the outermost lens sheet or optical sheet on a light source side be provided on the light-entering-side surface of this lens sheet or optical sheet and that the diffusing part of the outermost lens sheet or optical sheet on an observation side be provided on a light-emerging-side surface of this lens sheet or optical sheet.

In the above-described first and second aspects of the present invention, any two of the two or more diffusing parts are preferably such that a light-source-side diffusing part has a diffusing power lower than that of an observation-side diffusing part. Further, any two of the two or more diffusing parts are preferably such that a light-source-side diffusing part is formed by incorporating first diffusive fine particles into a first base material, that an observation-side diffusing part is formed by incorporating second diffusive fine particles into a second base material and that a difference between a refractive index of the first diffusive fine particles and that of the first base material is smaller than a difference between a refractive index of the second diffusive fine particles and that of the second base material.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an illustration showing a first embodiment of a rear projection screen according to the present invention.

FIG. 2 is an illustration showing a second embodiment of a rear projection screen according to the present invention.

FIG. 3 is an illustration showing a rear projection screen of Example 1 according to the present invention.

FIG. 4 is an illustration showing a rear projection screen of Example 2 according to the present invention.

FIG. 5 is an illustration showing a rear projection screen of Example 3 according to the present invention.

FIG. 6 is an illustration showing a rear projection screen of Example 4 according to the present invention.

FIG. 7 is an illustration showing a rear projection screen of Example 5 according to the present invention.

FIG. 8 is an illustration showing a rear projection screen of Example 6 according to the present invention.

FIGS. 9A and 9B are illustrations showing rear projection screens of Example 7 according to the present invention.

FIG. 10 is an illustration showing a comparative rear projection screen.

BEST MODE FOR CARRYING OUT THE INVENTION

By referring now to the accompanying drawings, embodiments of the present invention will be described below.

First Embodiment

FIG. 1 is an illustration showing a first embodiment of a rear projection screen according to the present invention.

As shown in FIG. 1, a rear projection screen 1 is composed of a single lens sheet having on one surface or both surfaces thereof a Fresnel lens or lenticular lenses, wherein two or more diffusing parts 1A, 1B are provided separately in the light-transmitting direction (in the direction of the left and right sides in the figure). In this first embodiment, the diffusing parts 1A and 1B are provided on the light-entering-side surface (light-entering surface) and light-emerging-side surface (light-emerging surface) of the lens sheet, respectively.

The diffusing parts 1A, 1B are parts for diffusing light, and can readily be formed by a conventional method, for example, by using a resin layer containing a diffuser (diffusive fine particles) such as microlenses, glass beads or organic beads, or by embossing the surfaces of microlenses.

It is noted that the diffusing parts can be provided not only on the surfaces of the lens sheet but also inside the lens sheet like a diffusing part 1C.

The diffusing parts 1A, 1B diffuse light emitted from a light source to destroy the coherence of the light, so that they can solve the problem of scintillation or speckle. However, when light from a light source is diffused, the resolution is lowered. Further, when a large amount of a diffuser is incorporated into one diffusing part as in the conventional method, the gain is decreased, and the image thus becomes very dark.

According to the first embodiment of the present invention, since the two diffusing parts 1A and 1B are separately provided on the lens sheet, it is possible to make the intensity of scintillation or the like low by using a diffuser in an amount smaller than that of a diffuser which is required for a lens sheet having only one diffusing part to attain the equally low intensity of scintillation or the like. Moreover, since the amount of the diffuser used is small, the lowering of the gain is prevented, and the brightness of the image can thus be prevented from being unfavorably decreased.

Further, since the two diffusing parts 1A and 1B are separately provided on the lens sheet, it is enough to incorporate a decreased amount of a diffuser into one diffusing part. Therefore, the amount of stray light to be produced inside the diffusing parts 1A, 1B can be decreased, and the unfavorable lowering of resolution to be caused by flare, ghost or the like can thus be prevented.

Furthermore, by this light-diffusing effect, moires to be formed by the interference between Fresnel lenses, lenticular lenses, or pixels of a light source can be decreased.

It is preferable that the diffusing parts 1A and 1B be provided on the light-entering-side surface and light-emerging-side surface of the lens sheet, respectively. The reason for this is as follows. When the diffusing parts 1A and 1B are provided at the above-described positions, the distance between the two diffusing parts becomes long, so that light emitted from a light source cannot show coherence. Therefore, the intensity of scintillation or the like can be decreased, and the lowering of the brightness of the image can be minimized while controlling the light-diffusing effect at the diffusing parts 1A and 1B to extremely low.

Further, it is preferable that the diffusing power of the diffusing part 1A on the light source side be made lower than that of the diffusing part 1B on the observation side. By doing so, the degree of the diffusion of light which is caused on the light-entering side by diffusing elements becomes low. The intensity of scintillation or the like can thus be decreased while preventing the resolution from being unfavorably lowered.

Scintillation or the like can be evaluated not only by the above-described intensity of scintillation or the like, but also by the magnitude (roughness) of scintillation or the like which is caused when a dynamic picture image is projected. In order to decrease the intensity of scintillation or the like, it is preferable to use such a diffuser that the difference between the refractive index of the diffuser and that of a base material in which the diffuser is dispersed is small. On the other hand, in order to decrease the magnitude (roughness) of scintillation or the like, it is preferable to use a diffuser whose average particle diameter is small.

For this reason, when only scintillation or the like is taken into consideration, it seems to be effective to incorporate, into both the diffusing part 1A on the light source side and the diffusing part 1B on the observation side, a diffuser whose average particle diameter is small and whose refractive index is such that the difference between the refractive index of the diffuser and that of a base material in which the diffuser is dispersed is small. However, a diffuser whose refractive index is such that the difference between the refractive index of the diffuser and that of a base material in which the diffuser is dispersed is small, or a diffuser whose average particle diameter is small makes the angle of visibility narrow. Therefore, in order to solve the problem of scintillation or the like and that of the angle of visibility at the same time, it is preferable that the type of a diffuser to be incorporated into the diffusing part 1A be made different from that of a diffuser to be incorporated into the diffusing part 1B.

Specifically, as will be described later in Example 7, it is preferable that the difference between the refractive index of a diffuser to be incorporated into the diffusing part 1A on the light source side and that of a base material in which the diffuser is dispersed be made smaller than the difference between the refractive index of a diffuser to be incorporated into the diffusing part 1B on the observation side and that of a base material in which the diffuser is dispersed, and that a diffuser having an average particle diameter not greater than a predetermined range (e.g., 15 micrometers) be incorporated into the diffusing part 1B on the observation side.

A variety of methods have been known as the method for controlling the degree of the diffusion of light. Specifically, when a diffusing part is formed by means of embossing, irregularities to be produced by embossing are changed; and when a diffuser is employed, the particle diameter, refractive index, or amount of the diffuser to be used is changed. The relationship between the particle diameter, refractive index or the like of a diffuser and the light-diffusing effect is described in, for example, Reference 2 (J. Opt. Soc. Am. A, Vol. 2, No. 12, Dec. 1985, "Diffraction analysis of bulk diffusers for projection-screen applications").

Second Embodiment

FIG. 2 is an illustration showing a second embodiment of a rear projection screen according to the present invention.

As shown in FIG. 2, a rear projection screen 2 is composed of two or more lens sheets or optical sheets 2-1, 2-2, 2-3, . . . , and diffusing parts 2A, 2B, 2C, . . . are provided on the lens sheet or optical sheets 2-1, 2-2, 2-3, . . . , respectively.

In this figure, the diffusing part 2A is provided on the light-entering-side surface (light-entering surface) of the outermost lens sheet or optical sheet 2-1 on the light source side; the diffusing part 2B is provided on the light-emerging-side surface (light-emerging surface) of the outermost lens sheet or optical sheet 2-2 on the observation side; and the

5

diffusing part **2C** is provided on the light-entering-side surface (light-entering surface) of the lens sheet or optical sheet **2-3**.

As the lens sheet for use in this embodiment, it is possible to employ a linear or circular Fresnel lens sheet, a lenticular lens sheet having on one surface or both surfaces thereof lenticular lenses, a lens sheet having on each surface thereof a combination of Fresnel lenses or lenticular lenses, or the like.

As the optical sheet, a panel made from polymethyl methacrylate or the like, whose both surfaces are flat, or the like can be used.

The properties of the diffusing parts **2A**, **2B**, **2C**, . . . , and the properties related to the configuration of the diffusing parts **2A**, **2B**, **2C**, . . . , are the same as those of the diffusing parts **1A**, **1B**, **1C** in the above-described first embodiment. Therefore, detailed explanations for these properties are herein omitted.

EXAMPLES

Specific examples of the rear projection screens as shown in FIGS. **1** and **2** will be given below.

Example 1

FIG. **3** is an illustration showing a rear projection screen of Example 1 according to the present invention. Example 1 corresponds to the first embodiment shown in FIG. **1**, and, in this rear projection screen of Example 1, two diffusing layers (diffusing parts) are separately provided on both surfaces of a single lens sheet.

Namely, in this Example, a rear projection screen **10** was produced, as shown in FIG. **3**, by respectively providing diffusing layers **10A** and **10B** on the light-entering surface **11a** and light-emerging surface **11b** of a lens sheet **11** made from polymethyl methacrylate, having a thickness of 5 mm. The diffusing layer **10A** was formed on the light-entering surface **11a** by embossing a Fresnel lens part on the light-entering surface **11a**. On the light-emerging surface **11b** of the lens sheet **11** was formed the diffusing layer **10B** having a thickness of 500 micrometers, in which 15 parts by weight of glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535 were dispersed. It is noted that, in this Example and also in the following Examples 2 to 7 and Comparative Example, the amount (parts of weight) of the diffuser such as glass beads is a value based on 100 parts by weight of the base material into which the diffuser is incorporated.

As the base material of the lens sheet **11**, an impact-resistant methacrylic resin (refractive index 1.51) manufactured by Sumitomo Chemical Co., Ltd., Japan was used. As the glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535, "EMB20" manufactured by Toshiba-Ballotini Co., Ltd., Japan was used.

An image was projected on the thus-produced rear projection screen **10** by using an LCD projector, and observed for evaluation. As a result, it was confirmed that the intensity of scintillation caused on the image was low and that the resolution of the image was excellent.

Example 2

FIG. **4** is an illustration showing a rear projection screen of Example 2 according to the present invention. Example 2 corresponds to the second embodiment shown in FIG. **2**, and, in this rear projection screen of Example 2, two

6

diffusing layers (diffusing parts) are separately provided on two lens sheets, one diffusing part on one lens sheet. One of the two diffusing layers is provided on the surface of the lens sheet (the light-entering-surface of a Fresnel lens sheet).

Namely, in this Example, a rear projection screen **20** was produced, as shown in FIG. **4**, by the combination use of a Fresnel lens sheet **21** having a thickness of 2 mm, made from polymethyl methacrylate, and a lenticular lens sheet **22** having a thickness of 1 mm, made from polymethyl methacrylate. On the light-entering surface **21a** of the Fresnel lens sheet **21** was formed a diffusing layer **20A** having a thickness of 150 micrometers, in which 7.0 parts by weight of organic beads (cross-linked polymer beads) having an average particle diameter of 12 micrometers and a refractive index of 1.59 were dispersed. Further, into the lenticular lens sheet **22** (diffusing layer **20B**) were homogeneously incorporated 0.75 parts by weight of organic beads having an average particle diameter of 12 micrometers and a refractive index of 1.59.

As the base material of the Fresnel lens sheet **21** and that of the lenticular lens sheet **22**, an impact-resistant methacrylic resin (refractive index 1.51) manufactured by Sumitomo Chemical Co., Ltd., Japan was used. As the organic beads having an average particle diameter of 12 micrometers and a refractive index of 1.59, "PB3011" (styrene beads) manufactured by Sumitomo Chemical Co., Ltd., Japan was used.

An image was projected on the thus-produced rear projection screen **20** by using an LCD projector, and observed for evaluation. As a result, it was confirmed that the intensity of scintillation caused on the image was low and that the resolution of the image was excellent.

Example 3

FIG. **5** is an illustration showing a rear projection screen of Example 3 according to the present invention. Example 3 corresponds to the second embodiment shown in FIG. **2**, and, in this rear projection screen of Example 3, two diffusing layers (diffusing parts) are separately provided on three lens/optical sheets. One of the two diffusing layers is provided on the surface of the outermost lens sheet on the light source side (the light-entering-surface of a Fresnel lens sheet), and the other diffusing layer is provided on the surface of the outermost optical sheet on the observation side (the light-entering-surface of a flat face panel).

Namely, in this Example, a rear projection screen **30** was produced, as shown in FIG. **5**, by the combination use of a Fresnel lens sheet **31** having a thickness of 2 mm, made from polymethyl methacrylate, a flat face panel **32** having a thickness of 2 mm, made from polymethyl methacrylate, and a lenticular lens sheet **33** having a thickness of 1 mm, made from polymethyl methacrylate, containing no diffuser, provided between the Fresnel lens sheet **31** and the flat face panel **32**. On the light-entering surface **31a** of the Fresnel lens sheet **31** was formed a diffusing layer **30A** having a thickness of 150 micrometers, in which 45 parts by weight of glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535 were dispersed. On the light-entering surface **32a** of the flat face panel **32** was formed a diffusing layer **30B** having a thickness of 150 micrometers, in which 45 parts by weight of glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535 were dispersed.

As the base material of the Fresnel lens sheet **31**, of the flat face panel **32** and of the lenticular lens sheet **33**, an impact-resistant methacrylic resin (refractive index 1.51)

manufactured by Sumitomo Chemical Co., Ltd., Japan was used. As the glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535, "EMB20" manufactured by Toshiba-Ballotini Co., Ltd., Japan was used.

An image was projected on the thus-produced rear projection screen **30** by using an LCD projector, and observed for evaluation. As a result, it was confirmed that the intensity of scintillation caused on the image was low and that the resolution of the image was excellent.

Example 4

FIG. **6** is an illustration showing a rear projection screen of Example 4 according to the present invention. Example 4 corresponds to the second embodiment shown in FIG. **2**, and, in this rear projection screen of Example 4, two diffusing layers (diffusing parts) are separately provided on two lens sheets. One of the two diffusing layers is provided on the surface of the outermost lens sheet on the light source side (the light-entering-surface of a Fresnel lens sheet), and the other diffusing layer is provided inside the outermost lens sheet on the observation side (inside a lenticular lens sheet). Further, the diffusing layer provided on the light source side has a diffusing power lower than that of the diffusing layer provided on the observation side.

Namely, in this Example, a rear projection screen **40** was produced, as shown in FIG. **6**, by the combination use of a Fresnel lens sheet **41** having a thickness of 2 mm, made from polymethyl methacrylate, and a lenticular lens sheet **42** obtained by forming transparent lenses **42b** on both surfaces of a film **42a** having a thickness of 200 micrometers, made from polymethyl methacrylate. On the light-entering surface **41a** of the Fresnel lens sheet **41** was formed a diffusing layer **40A** having a thickness of 100 micrometers, in which 35 parts by weight of glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535 were dispersed. Further, into the film **42a** (diffusing layer **40B**) of the lenticular lens sheet **42** were homogeneously incorporated 10.0 parts by weight of organic beads having an average particle diameter of 12 micrometers and a refractive index of 1.59.

As the base material of the Fresnel lens sheet **41**, an impact-resistant methacrylic resin (refractive index 1.51) manufactured by Sumitomo Chemical Co., Ltd., Japan was used. As the glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535, "EMB20" manufactured by Toshiba-Ballotini Co., Ltd., Japan was used. Further, as the organic beads having an average particle diameter of 12 micrometers and a refractive index of 1.59, "PB3011" (styrene beads) manufactured by Sumitomo Chemical Co., Ltd., Japan was used. The lenticular lens sheet **42** was obtained by covering, with the film **42a**, a UV- (ultraviolet)- or EB- (electron beam-) curable resin poured into a mold in a shape reverse to the shape of the transparent lenses **42b**, and applying ultraviolet rays or electron beams to the UV- or EB-curable resin.

An image was projected on the thus-produced rear projection screen **40** by using an LCD projector, and observed for evaluation. As a result, it was confirmed that the intensity of scintillation caused on the image was low and that the resolution of the image was excellent.

Example 5

FIG. **7** is an illustration showing a rear projection screen of Example 5 according to the present invention. Example 5 corresponds to the second embodiment shown in FIG. **2**,

and, in this rear projection screen of Example 5, two diffusing layers (diffusing parts) are separately provided on two lens sheets. One of the two diffusing layers is provided on the surface of the outermost lens sheet on the light source side (the light-entering-surface of a Fresnel lens sheet), and the other diffusing layer is provided on the surface of the outermost lens sheet on the observation side (the light-emerging surface of a lenticular lens sheet). Further, the diffusing layer provided on the light source side has a diffusing power lower than that of the diffusing layer provided on the observation side.

Namely, in this Example, a rear projection screen **50** was produced, as shown in FIG. **7**, by the combination use of a Fresnel lens sheet **51** having a thickness of 2 mm, made from polymethyl methacrylate, and a lenticular lens sheet **52** having a thickness of 1 mm, made from polymethyl methacrylate. On the light-entering surface **51a** of the Fresnel lens sheet **51** was formed a diffusing layer **50A** having a thickness of 100 micrometers, in which 35 parts by weight of glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535 were dispersed. On the light-emerging surface **52b** of the lenticular lens sheet **52** was formed a diffusing layer **50B** having a thickness of 100 micrometers, in which 12.0 parts by weight of organic beads having an average particle diameter of 12 micrometers and a refractive index of 1.59 were dispersed.

As the base material of the Fresnel lens sheet **51**, and that of the lenticular lens sheet **52**, an impact-resistant methacrylic resin (refractive index 1.51) manufactured by Sumitomo Chemical Co., Ltd., Japan was used. As the glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535, "EMB20" manufactured by Toshiba-Ballotini Co., Ltd., Japan was used. Further, as the organic beads having an average particle diameter of 12 micrometers and a refractive index of 1.59, "PB3011" (styrene beads) manufactured by Sumitomo Chemical Co., Ltd., Japan was used.

An image was projected on the thus-produced rear projection screen **50** by using an LCD projector, and observed for evaluation. As a result, it was confirmed that the intensity of scintillation caused on the image was low and that the resolution of the image was excellent.

Example 6

FIG. **8** is an illustration showing a rear projection screen of Example 6 according to the present invention. Example 6 corresponds to the second embodiment shown in FIG. **2**, and, in this rear projection screen of Example 6, three diffusing layers (diffusing parts) are separately provided on three lens/optical sheets, one diffusing layer on one lens or optical sheet. The three diffusing layers are respectively provided on the surfaces (the light-entering surfaces) of the three lens/optical sheets.

Namely, in this Example, a rear projection screen **60** was produced, as shown in FIG. **8**, by the combination use of a Fresnel lens sheet **61** having a thickness of 2 mm, made from polymethyl methacrylate, a flat face panel having a thickness of 2 mm, made from polymethyl methacrylate, and a lenticular lens sheet **63** having a thickness of 1 mm, made from polymethyl methacrylate, provided between the Fresnel lens sheet **61** and the flat face panel **62**. On the light-entering surface **61a** of the Fresnel lens sheet **61** was formed a diffusing layer **60A** having a thickness of 100 micrometers, in which 3.5 parts by weight of glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535 were dispersed. On the light-

entering surface **62a** of the flat face panel **62** was formed a diffusing layer **60B** having a thickness of 100 micrometers, in which 3.5 parts by weight of glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535 were dispersed. On the light-entering surface **63a** of the lenticular lens sheet **63** was formed a diffusing layer **60C** having a thickness of 300 micrometers, in which 5.0 parts by weight of organic beads having an average particle diameter of 30 micrometers and a refractive index of 1.49 were dispersed.

As the base materials of the Fresnel lens sheet **61**, of the flat face panel **62**, and of the lenticular lens sheet **63**, an impact-resistant methacrylic resin (refractive index 1.51) manufactured by Sumitomo Chemical Co., Ltd., Japan was used. As the glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535, "EMB20" manufactured by Toshiba-Ballotini Co., Ltd., Japan was used. Further, as the organic beads having an average particle diameter of 30 micrometers and a refractive index of 1.49, "XC01" (acrylic beads) manufactured by Sumitomo Chemical Co., Ltd., Japan was used.

An image was projected on the thus-produced rear projection screen **60** by using an LCD projector, and observed for evaluation. As a result, it was confirmed that the intensity of scintillation caused on the image was low and that the resolution of the image was excellent.

Example 7

FIGS. **9A** and **9B** are illustrations showing rear projection screens of Example 7 according to the present invention. Example 7 corresponds to the second embodiment shown in FIG. **2**, and in these rear projection screens of Example 7, two diffusing layers (diffusing parts) are separately provided on two lens sheets. Further, the type (refractive index and average particle diameter) of the diffuser incorporated into the diffusing layer provided on the light source side is different from that of the diffuser incorporated into the diffusing layer provided on the observation side.

Namely, in this Example, rear projection screens **70**, **80** were produced, as shown in FIGS. **9A** and **9B**, by the combination use of Fresnel lens sheets **71**, **81** made from polymethyl methacrylate, and lenticular lens sheets **72**, **82** having a thickness of 1 mm, made from polymethyl methacrylate. As shown in FIGS. **9A** and **9B**, the shape and structure of the rear projection screen **70** are identical with those of the rear projection screen **80** except that the structure of the Fresnel lens sheet **71** is different from that of the Fresnel lens sheet **81**.

As the base material of the Fresnel lens sheets **71**, **81**, an impact-resistant methacrylic resin (refractive index 1.51) manufactured by Sumitomo Chemical Co., Ltd., Japan was used. This resin was subjected into extrusion molding, and a Fresnel lens part was formed on one surface of the molded product by coating thereto a UV-curable resin containing no diffuser, followed by curing the UV-curable resin by the application of ultraviolet rays, thereby obtaining the Fresnel lens sheets **71**, **81**. It is noted that the boundary between the substrate and the Fresnel lens part formed thereon by the use of the UV-curable resin is not shown in FIGS. **9A** and **9B**.

The Fresnel lens sheet **71** shown in FIG. **9A** is a lens sheet obtained by forming a Fresnel lens part on one surface of a single layer (diffusing layer **70A**), serving as a substrate, into which a diffuser having a predetermined average particle diameter and refractive index is homogeneously incorporated. On the other hand, the Fresnel lens sheet **81** shown in FIG. **9B** is a lens sheet obtained by forming a Fresnel lens

part on one surface of a co-extruded two-layered substrate having, on the light-entering surface **81a** thereof, a diffusing layer **80A** in which a diffuser having a predetermined average particle diameter and refractive index is dispersed.

Into the diffusing layers **70A**, **80A** was incorporated, as the diffuser, one of (1) acrylic beads having an average particle diameter of 30 micrometers and a refractive index of 1.49 ("XC01" manufactured by Sumitomo Chemical Co., Ltd., Japan), (2) acrylic beads having an average particle diameter of 11 micrometers and a refractive index of 1.49 ("MBX" manufactured by Sekisui Chemical Co., Ltd., Japan), (3) glass beads having an average particle diameter of 17 micrometers and a refractive index of 1.535 ("EGB210" manufactured by Toshiba-Ballotini Co., Ltd., Japan), and (4) styrene beads having an average particle diameter of 12 micrometers and a refractive index of 1.59 ("PB3011" manufactured by Sumitomo Chemical Co., Ltd., Japan).

These diffusers (1) to (4) were incorporated into the diffusing layers **70A**, **80A** of the Fresnel lens sheets **71**, **81** in a manner as shown in the following Table 1.

TABLE 1

	Concentration of Diffuser		Thickness of Diffusing Layer (mm)
	on Light-Entering Side	on Observation Side	
XC01 2.5t		2.0P	—
XC01 1.8t		3.0P	—
XC01 1.8t (2)	17P	Clear	0.2
MBX 1.8t		1.15P	—
MBX 1.8t (2)	9.0P	Clear	0.2
EGB 1.8t	6.8P	Clear	0.2
EGB 2.5t (2)	3.4P	Clear	0.4
PB3011 1.8t		0.17P	—

In the above Table 1, the numeral (e.g. "2.5 t") shown next to the type of the diffuser (e.g., "XC01") indicates the thickness (mm) of the substrate of the Fresnel lens sheet **71**, **81**. The thickness of the Fresnel lens sheet **71**, **81** is the sum total of the thickness of the substrate and 0.2 mm, the thickness of the Fresnel lens part formed by using a UV-curable resin. Further, the numeral in parentheses, "(2)", shown next to the numeral (e.g., "1.8 t") indicating the thickness (mm) of the substrate represents that the substrate of the Fresnel lens sheet into which the diffuser is incorporated has a two-layered structure (the structure as shown in FIG. **9B**). The unit (P) of the concentration of the diffuser is parts by weight (number of grams) of the diffuser incorporated into 100 parts by weight (100 g) of polymethyl methacrylate, the base material.

On the other hand, as the base material of the lenticular lens sheets **72**, **82**, an impact-resistant methacrylic resin (refractive index 1.51) manufactured by Sumitomo Chemical Co., Ltd., Japan was used as in the case of the above-described Fresnel lens sheets **71**, **81**. The entire lenticular lens sheets **72**, **82** were obtained by subjecting the resin to extrusion molding. As shown in FIGS. **9A** and **9B**, diffusing layers **70B**, **80B** having a thickness of 600 micrometers, in which a diffuser having a predetermined particle diameter and refractive index was dispersed were respectively formed on the light-emerging surfaces of the lenticular lens sheets **72**, **82**.

Into the diffusing layers **70B**, **80B** was incorporated, as the diffuser, one of (1) glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535

("EMB20" manufactured by Toshiba-Ballotini Co., Ltd., Japan), (2) glass beads having an average particle diameter

tillation or the like were evaluated according to 6 ranks of "5" (most excellent) to "0" (poorest).

TABLE 2

	XC01 + EGB-1		XC01 + EGB-2		EGB		EMB	
	intensity	magnitude (roughness)	intensity	magnitude (roughness)	intensity	magnitude (roughness)	intensity	magnitude (roughness)
XC01 2.5t	5	4	5	4	5	4	5	5
XC01 1.8t	3	2	3	2	2	2	2	3
XC01 1.8(2)	4	4	4	4	3	4	5	5
MBX 1.8t	3	2	3	2	2	2	2	3
MBX 1.8t(2)	4	4	4	4	3	4	5	5
EGB 1.8t(2)	3	2	2	2	2	2	2	4
EGB 2.5t(2)	4	4	3	4	3	4	3	4
PB3011 1.8t	1	1	1	0	0	0	0	1

XC01: acrylic beads (30 μm , 1.49)

EMB: glass beads (11 μm , 1.535)

MBX: acrylic beads (11 μm , 1.49)

XC01 + EGB-1: a 6:1 mixture of "XC01" and "EGB"

EGB: glass beads: (17 μm , 1.535)

XC01 + EGB-2: a 2:3 mixture of "XC01" and "EGB"

PB3011: styrene beads (12 μm , 1.59)

of 17 micrometers and a refractive index of 1.535 ("EGB210" manufactured by Toshiba-Ballotini Co., Ltd., Japan), (3) a 6:1 mixture of acrylic beads having an average particle diameter of 30 micrometers and a refractive index of 1.49 ("XC01" manufactured by Sumitomo Chemical Co., Ltd., Japan) and the above "EGB210" manufactured by Toshiba-Ballotini Co., Ltd., Japan (XC01+EGB-1), and (4) a 2:3 mixture of the above "XC01" manufactured by Sumitomo Chemical Co., Ltd., Japan and the above "EGB210" manufactured by Toshiba-Ballotini Co., Ltd., Japan (XC01+EGB-2).

These diffusers (1) and (4) were incorporated into the diffusing layers 70B, 80B of the lenticular lens sheets 72, 82 in the following manner. Namely, among the above-described diffuser (1) and (4), the diffuser (3), which is a 6:1 mixture of "XC01" manufactured by Sumitomo Chemical Co., Ltd., Japan and "EGB210" manufactured by Toshiba-Ballotini Co., Ltd., Japan, "XC01+EGB-1", was taken as a standard, and the concentration of the "EGB210" contained in the "XC01+EGB-1" was made 2.0 P. The concentrations of the other diffusers (1), (2) and (4) were so adjusted that the gain of a rear projection screen obtainable by the combination use of a lenticular lens sheet containing the diffuser (1), (2) or (4), and the Fresnel lens sheet having the diffusing layer indicated by "XC01 2.5 t" in the above Table 1 would be almost equal (within ± 0.2) to the gain of a rear projection screen obtainable by the combination use of the lenticular lens sheet having the diffusing layer containing the above-described diffuser "XC01+EGB-1", and the above-described Fresnel lens sheet having the diffusing layer indicated by "XC01 2.5 t".

Rear projection screens 70, 80 were respectively produced by assembling, in a frame (not shown in the figure), the above-described various Fresnel lens sheets 71, 81, and lenticular lens sheets 72, 82. While images were projected on the thus-produced various rear projection screens 70, 80 by using an LCD projector, and evaluated in terms of the intensity and magnitude (roughness) of scintillation or the like caused on the images. The results obtained are as shown in the following Table 2. The magnitude (roughness) of scintillation or the like was evaluated by the roughness of speckle perceived by an observer when he/she moved his/her eyes. The intensity and magnitude (roughness) of scin-

The results shown in the above Table 2 demonstrate that those screens produced by using acrylic beads having an average particle diameter of 30 micrometers and a refractive index of 1.49 ("XC01" manufactured by Sumitomo Chemical Co., Ltd., Japan) as the diffuser to be incorporated into the Fresnel lens sheet (FL) on the light source side, and glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535 ("EMB20" manufactured by Toshiba-Ballotini Co., Ltd., Japan) as the diffuser to be incorporated into the lenticular lens sheet (LL) on the observation side show good results in terms of both the intensity and magnitude (roughness) of scintillation or the like.

Further, from the results shown in the above Table 2, the following tendency is confirmed: the intensity of the scintillation or the like becomes lower and the magnitude (roughness) of the same becomes smaller as the difference between the refractive index of the diffuser to be incorporated into the Fresnel lens sheet (FL) on the light source side and that (1.51) of the base material in which the diffuser is dispersed becomes smaller (for instance, compare the "MBX 1.8 t" series results with the "PB3011 1.8 t" series results, where the average particle diameter of "MBX" is almost equal to that of "PB3011"). Furthermore, it is also confirmed that the magnitude (roughness) of scintillation or the like becomes smaller as the average particle diameter of the diffuser incorporated into the lenticular lens sheet (LL) on the observation side becomes smaller (for instance, compare the "EGB" series results with the "EMB" series results, where the refractive index of "EGB" is equal to that of "EMB"). With respect to the average particle diameter of the diffuser to be incorporated into the lenticular lens sheet (LL), a great improvement is found in the magnitude (roughness) of scintillation between the average particle diameter of 17 micrometers ("EGB210") and that of 11 micrometers ("EMB20"), especially in the vicinity of the average particle diameter of 15 micrometers.

The following is also confirmed from the results shown in the above Table 2: the intensity of scintillation becomes lower and the magnitude (roughness) of the same becomes smaller as the thickness of the Fresnel lens sheet (FL) becomes greater, and when the Fresnel lens sheet is not composed of a single layer but composed of two layers.

Comparative Example

FIG. 10 is an illustration showing a comparative rear projection screen.

In this Comparative Example, a rear projection screen 70 was produced, as shown in FIG. 10, by the combination use of a Fresnel lens sheet 91 having a thickness of 2 mm, made from polymethyl methacrylate, containing no diffuser, and a lenticular lens sheet 92 having a thickness of 1 mm, made from polymethyl methacrylate. Into the lenticular lens sheet 72 (diffusing layer 90B), 5 parts by weight of glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535 were homogeneously incorporated.

As the base material of the Fresnel lens sheet 91, and that of the lenticular lens sheet 92, an impact-resistant methacrylic resin (refractive index 1.51) manufactured by Sumitomo Chemical Co., Ltd., Japan was used. As the glass beads having an average particle diameter of 11 micrometers and a refractive index of 1.535, "EMB20" manufactured by Toshiba-Ballotini Co., Ltd., Japan was used.

An image was projected on the thus-produced rear projection screen 90 by using an LCD projector, and observed for evaluation. As a result, it was confirmed that the intensity of scintillation caused on the image was high and that the quality of the image was poor.

According to the present invention, since at least two diffusing parts are separately provided on one lens sheet or optical sheet, or on a plurality of lens sheets or optical sheets, it is possible to make the intensity of scintillation low by using a diffuser in an amount smaller than that of a diffuser which is required for a lens sheet having only one diffusing part to attain tile equally low intensity of scintillation. Further, by respectively incorporating diffusers of different types into two diffusing parts, not only the intensity of scintillation or the like can be made low, but also the magnitude (roughness) of the same can be made small. Scintillation or the like to be caused on an image can thus be effectively decreased without lowering the resolution and brightness of the image.

What is claimed is:

1. A rear projection screen comprising:

a lens sheet for condensing or diffusing light, said lens sheet comprising a plurality of diffusing parts spaced from each other in a light-transmitting direction by a non-diffusing part, wherein two of the diffusing parts comprise a light-source side diffusing part and an observation-side diffusing part, the light-source side diffusing part having a diffusing power lower than the diffusing power of the observation-side diffusing part, the light-source side diffusing part being formed by incorporating first diffusive fine particles into a first base material, and the observation-side diffusing part being formed by incorporating second diffusive fine particles into a second base material, a refractive index difference between the first diffusive fine particles and the first base material being smaller than a refractive index difference between the second diffusive fine particles and the second base material.

2. The rear projection screen according to claim 1, wherein one of the two or more diffusing parts is provided on a light-entering-side surface of the lens sheet, and another one of the diffusing parts is provided on a light-emerging-side surface of the lens sheet.

3. The rear projection screen according to claim 1, wherein the two or more diffusing parts are provided on a surface of the lens sheet and inside the same.

4. The rear projection screen according to claim 1, wherein the second diffusive fine particles have an average particle diameter not greater than 15 micrometers.

5. A rear projection screen comprising:

a plurality of lens sheet or optical sheets for condensing or diffusing light, at least one of said lens sheets or optical sheets comprising at least one diffusing part so that said lens sheets or optical sheets, as a whole, comprise a plurality of diffusing parts spaced from each other in a light-transmitting direction by a non-diffusing part, wherein two of the diffusing parts comprise a light-source side diffusing part and an observation-side diffusing part, the light-side diffusing part having a diffusing power lower than the diffusing power of the observation-side diffusing part, the light-side diffusing part being formed by incorporating first diffusive fine particles into a first base material, and the observation-side diffusing part being formed by incorporating second diffusive fine particles into a second base material, a refractive index difference between the first diffusive fine particles and the first base material being smaller than a refractive index difference between the second diffusive fine particles and the second base material.

6. The rear projection screen according to claim 5, wherein the diffusing parts are provided on surfaces of the two or more lens sheets or optical sheets, or inside the same.

7. The rear projection screen according to claim 5, wherein the diffusing part of the outermost lens sheet or optical sheet on a light source side is provided on a light-entering-side surface of this lens sheet or optical sheet, and the diffusing part of the outermost lens sheet or optical sheet on an observation side is provided on a light-emerging-side surface of this lens sheet or optical sheet.

8. The rear projection screen according to claim 5, wherein the second diffusive fine particles have an average particle diameter not greater than 15 micrometers.

9. A rear projection screen comprising:

a Fresnel lens sheet; and

a lenticular lens sheet;

wherein said Fresnel lens sheet and said lenticular lens sheet each comprise at least one diffusing part; said lenticular lens sheet comprises a non-diffusing part; said Fresnel lens sheet and said lenticular lens sheet, as a whole, comprise a plurality of diffusing parts spaced apart from each other by said non-diffusing part; and the diffusing part of said Fresnel lens sheet placed on a light-source side has a diffusing power lower than the diffusing power of the diffusing part of said lenticular lens sheet placed on an observation side,

wherein the diffusing part of said Fresnel lens sheet placed on a light-source side is formed by incorporating first diffusive fine particles into a first base material, and the diffusing part of said lenticular lens sheet placed on an observation side is formed by incorporating second diffusive fine particles into a second base material, wherein a refractive index difference between the first diffusive fine particles and the first base material is smaller than a refractive index difference between a refractive index of the second diffusive fine particles and the second base material.

10. A rear projection screen comprising:

a Fresnel lens sheet; and

a lenticular lens sheet;

wherein said Fresnel lens sheet and said lenticular lens sheet each comprise at least one diffusing part com-

15

prising diffusive fine particles; said lenticular lens sheet comprises a non-diffusing part; said Fresnel lens sheet and said lenticular lens sheet, as a whole, comprise a plurality of diffusing parts spaced apart from each other by said non-diffusing part; and the diffusing part of said Fresnel lens sheet placed on a light-source side has a diffusing power lower than the diffusing power of the diffusing part of said lenticular lens sheet placed on an observation side

wherein the diffusing part of said Fresnel lens sheet placed on a light-source side is formed by incorporating first diffusive fine particles into a first base material, and the diffusing part of said lenticular lens sheet placed on an observation side is formed by incorporating second diffusive fine particles into a second base material, wherein a refractive index difference between the first diffusive fine particles and the first base material is smaller than a refractive index difference between a refractive index of the second diffusive fine particles and the second base material.

11. A rear projection screen comprising:

a Fresnel lens sheet; and
a lenticular lens sheet;

wherein said Fresnel lens sheet and said lenticular lens sheet each comprise at least one part comprising diffusive fine particles; said lenticular lens sheet comprises a part substantially free from diffusive fine particles; said Fresnel lens sheet and said lenticular lens sheet, as a whole, comprise a plurality of parts comprising diffusive fine particles spaced apart from each other by said part substantially free from diffusive fine particles; and the part comprising diffusive fine particles of said Fresnel lens sheet placed on a light-source side has a diffusing power lower than the diffusing power of the part comprising diffusive fine particles of said lenticular lens sheet placed on an observation side,

wherein the part comprising diffusive fine particles of said Fresnel lens sheet placed on a light-source side is

16

formed by incorporating first diffusive fine particles into a first base material, and the part comprising diffusive fine particles of said lenticular lens sheet placed on an observation side is formed by incorporating second diffusive fine particles into a second base material, wherein a refractive index difference between the first diffusive fine particles and the first base material is smaller than a refractive index difference between a refractive index of the second diffusive fine particles and the second base material.

12. A rear projection screen comprising:

a Fresnel lens sheet; and
a lenticular lens sheet comprising at least one lens layer and a flat panel portion;

wherein said Fresnel lens sheet and said flat panel each comprise at least one diffusing part; said lenticular lens sheet comprises a non-diffusing part; said Fresnel lens sheet, said lenticular lens sheet, and said flat panel, as a whole, comprise a plurality of diffusing parts spaced apart from each other by said non-diffusing part; and the diffusing part of said Fresnel lens sheet or said flat panel placed on a light-source side has a diffusing power lower than the diffusing power of the diffusing part of said flat panel or said Fresnel lens sheet placed on an observation side.

13. The rear projection screen according to claim 12, wherein the diffusing part of said Fresnel lens sheet or said flat panel placed on a light-source side is formed by incorporating first diffusive fine particles into a first base material, and the diffusing part of said flat panel or said Fresnel lens sheet placed on an observation side is formed by incorporating second diffusive fine particles into a second base material, wherein a refractive index difference between the first diffusive fine particles and the first base material is smaller than a refractive index difference between a refractive index of the second diffusive fine particles and the second base material.

* * * * *