

(19)



(11)

EP 2 573 322 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
29.04.2020 Bulletin 2020/18

(51) Int Cl.:
F01D 5/14 (2006.01)

(21) Application number: **12185422.8**

(22) Date of filing: **21.09.2012**

(54) **FAN BLADE**

GEBLÄSESCHAUFEL

AUBE DE SOUFFLANTE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **23.09.2011 US 201113241756**

(43) Date of publication of application:
27.03.2013 Bulletin 2013/13

(73) Proprietor: **United Technologies Corporation
Farmington, CT 06032 (US)**

(72) Inventors:
• **McKaveney, Christopher S.
East Hartford, CT 06118 (US)**

• **Wang, Letain
Amston, CT 06231 (US)**

(74) Representative: **Dehns
St. Bride's House
10 Salisbury Square
London EC4Y 8JD (GB)**

(56) References cited:
**EP-A1- 0 731 874 EP-A1- 2 014 386
EP-A1- 2 239 083 EP-A2- 0 924 380
EP-A2- 0 926 312 EP-A2- 1 152 123
EP-A2- 1 439 281 EP-A2- 2 500 263
US-A- 6 033 186**

EP 2 573 322 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND

[0001] This application relates to a hollow fan blade for a gas turbine engine, wherein a unique rib geometry is utilized.

[0002] Gas turbine engines may be provided with a fan for delivering air to a compressor section. From the compressor section, the air is compressed and delivered into a combustion section. The combustion section mixes fuel with the air and combusts the combination. Products of the combustion pass downstream over turbine rotors, which in turn are driven to rotate and rotate the compressor and fan.

[0003] The fan may include a rotor having a plurality of blades.

[0004] One type of fan blade is a hollow fan blade having a plurality of channels defined by intermediate ribs in a main fan blade body. An outer skin is attached over the main fan blade body to close off the cavities. The blades are subject to a number of challenges, including internal stresses that vary along a length of the fan blade.

[0005] Prior art fan blades are disclosed in EP 1 439281 A2, EP 0731874 A1, EP 0924380 A2, EP 0926312 A2, EP 1152123 A2 and US 6033186. A method of manufacturing an aerofoil is disclosed in EP 2014386 A1.

[0006] A hollow airfoil and method of manufacturing the same is disclosed in EP 2239083 A1.

SUMMARY

[0007] The present invention provides a fan blade as recited in claim 1.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The invention will be described with regard to the specific drawings, the following of which is a brief description.

Figure 1A shows a fan blade.

Figure 1B shows another feature of the Figure 1A fan blade.

Figure 2 is a cross-sectional view along line 2-2 as shown in Figure 1A.

Figure 3 shows a main body of the Figure 1A fan blade.

Figure 4 is a simplified view of one rib.

Figure 5A is a first embodiment taken along line 5-5 of Figure 4.

Figure 5B is a second embodiment taken along line 5-5 of Figure 4.

Figure 5C is a third embodiment taken along line 5-5 of Figure 4.

Figure 6A is a first embodiment rib break-edge.

Figure 6B is another embodiment rib break-edge.

Figure 7 shows another area within the fan blade.

Figure 8 shows a radially inner end of the channels.

DETAILED DESCRIPTION

[0009] A fan blade 20 is illustrated in Figure 1A having an airfoil 18 extending radially outwardly from a dovetail 24. A leading edge 21 and a trailing edge 22 define the forward and rear limits of the airfoil 18.

[0010] As shown in Figure 1B, a fan rotor 16 receives the dovetail 24 to mount the fan blade 20 with the airfoil 18 extending radially outwardly. As the rotor 16 is driven to rotate, it carries the fan blades 20 with it. There are higher stresses adjacent to the rotor 16, than occur radially outwardly of the rotor.

[0011] Figure 2 shows a cross-section of the fan blade 20, at the airfoil 18. As shown, the leading edge 21 carries a cap 37 secured to a main body 28. A cover skin 32 closes off cavities or channels 30 in the main body 28. The main body 28, the cap 37 and the skin 32 may all be formed of various aluminum alloys. While aluminum alloys or aluminum may be utilized, other materials, such as titanium, titanium alloys, or other appropriate metals may be utilized.

[0012] As shown, a plurality of ribs 26 separate channels 30 in the cross-section illustrated in Figure 2. These channels 30 are closed off by the skin 32. As shown, the channels 30 extend from an open end inwardly to a closed side. The open end is closed off by skin 32. It is within the scope of this invention, however, that the channel extends across the width of the main body 28, and there are two skins on opposed sides of the main body 28.

[0013] In addition, the channels may be filled with lighter weight filler material to provide stiffness, as known.

[0014] A contact area 132 at the forward face of the ribs 26 serves as a mount point for the skin 32, and receives an adhesive. Chamfers 38 are formed at the break-edges, or the edges of the ribs 26, and will be described in more detail below. As shown, the channels 30 have a side extent formed by a compound radius 34 and 36, again to be described in greater detail below.

[0015] Figure 3 shows the main body 28. There are a plurality of channels 30 from the front or leading edge 21, to the back or trailing edge 22, and varying from the radially inner end toward the radially outer tip. As shown, some of the channels 30 extend generally radially upwardly. Other channels, such as channel 40, bend toward the leading edge 21. Other channels 41 simply extend generally from the middle of the main body 28 toward the leading edge 21.

[0016] To reduce the weight, it is desirable to maximize the amount of channels and minimize the amount of rib. However, there is also a need for additional stiffness adjacent the radially inner edge 42, to provide greater durability, and minimize blade pull. Thus, the ribs 26 are formed such that they are thicker adjacent a radially inner edge 42, and become thinner when moving toward the radially outer portions 44.

[0017] It is also desirable to form a blade which avoids certain operational modes across the engine operational range. Additional mass toward the tip or outer end of the blade raises challenges against tuning away from fundamental modes.

[0018] As shown schematically in Figure 4, ribs 26 are thinner at radially outer end 44 than at the inner end 42. A thickness t_1 at the radially inner end 42 is greater than the thickness t_2 at the tip or radially outer end 44. The ratio of t_1 to t_2 is between 1.1 and 8. As can be appreciated from Figure 3, the variation need not be linear as shown in Figure 4, and may be different across the several ribs.

[0019] As shown in Figure 5A, a cross-section through the rib could be a trapezoid as shown in Figure 5A, wherein the bottom 50, which extends into the main body 28, is larger than the outer end 48 which attaches to the skin 32. Sides 46 are angled between the two ends 48 and 50.

[0020] Figure 5B shows a rectangular cross-section for the rib 26 wherein the ends 52 and 54 are generally of the same thickness, and the sides 56 are generally perpendicular to those ends.

[0021] Figure 5C shows yet another embodiment, wherein the ends 58 and 60 are of different thicknesses, and the sides 62 curve relative to each other along a particular radius.

[0022] By modifying these several variables, a designer is able to tune or optimize the operation of the fan blade for its use in a gas turbine engine.

[0023] Notably, as will be explained below, it is desirable that the upper end 48/52/58 actually has a more complex surface at its break-edges.

[0024] Figure 6A shows the actual break-edge 38 on a rib 26. The contact area 132 which will actually contact the skin, and provide a surface for receiving adhesive and securing the skin should be maximized. On the other hand, there are stresses which are induced at the break-edges, and thus a chamfer 38 is formed in this embodiment.

[0025] As shown in Figure 6A, the rib 26 has a nominal thickness t_3 at the upper end, if not for the chamfers 38. Stated another way, t_3 is the distance between sides 200 at the end of the chambers 38. The chamfers 38 extend for a thickness c measured in a plane perpendicular to the top edge 132.

[0026] A ratio of c to t_3 may be between 0.02 and 0.15. The use of the chamfer at the break-edge location reduces the stress. There would otherwise be stress concentrations at that area. On the other hand, by utilizing a chamfer within the disclosed range, the amount of surface area available to provide a good adhesion to the cover is still adequate.

[0027] Figure 6B shows an embodiment of a rib 64, wherein the break-edges are provided along a radius r_1 . In embodiments, the ratio of r_1 to t_3 is between 0.02 and 0.15.

[0028] Figure 7 shows the surfaces 34 and 36 as illustrated in Figure 2. The areas at that side of the channels 30 are prone to stress concentrations. A typical fillet, or

single curve, may be considered for formation at that area to reduce stress. However, in the disclosed embodiment, a compound fillet having two curves 34 and 36 is utilized. Curve 34 is formed along a radius r_2 while curve 36 is formed along a radius r_3 . As is clear, r_2 is greater than r_3 . A ratio of r_3 to r_2 is between 0.03 and 0.25. More narrowly, it may be between 0.06 and 0.13. The use of the compound fillet provides a great reduction in stress concentration, which would otherwise be maximized at the general location of the curve 36.

[0029] Finally Figure 8 shows a radially inner end, bottom or termination 100 of a channel 30. As shown, there is a compound curve or fillet including a bottom portion 104 formed at a radius r_4 and a side portion 102 formed at a radius r_5 , which merges into the side of the ribs. As is clear, r_5 is greater than r_4 . Again, this arrangement reduces a stress concentration at the corners which would otherwise be induced into the cavity terminations. In embodiments, a ratio of r_4 to r_5 is between 0.03 and 0.25.

[0030] The compound fillets as disclosed in Figures 7 and 8 reduce stress concentrations with minimum weight increase. Further, the compound fillets may be provided with minimal additional cost, because multi-pass machining is not required. Instead, a cutter with a compound radius shape may be utilized.

[0031] The fan blade as described above reduces stresses that are raised during operations, when mounted in a gas turbine engine.

[0032] Although embodiments have been disclosed, a worker of ordinary skill in the art would recognize the modifications which come within the scope of this Application. Thus, the following claims should be studied to determine the true scope and content.

Claims

1. A fan blade (20) comprising a main body (28) extending between a leading edge (21) and a trailing edge (22), and having channels (30) formed into said main body (28) from an open side to an inner side with a plurality of ribs (26) extending across the main body (28) intermediate the channels (30), the fan blade (20) having a dovetail (24), and an airfoil (18) extending radially outwardly from said dovetail (24), said ribs (26) having a thickness defined as measured generally from said leading edge (21) toward said trailing edge (22), with a thickness of at least one of said ribs (26) being formed to be generally thicker adjacent a rib radially inner end (42), and becoming thinner moving in a radially outward direction;

characterized in that

a ratio of a thickness (t_1) of said at least one rib (26) selected near the rib radially inner end (42) compared to a thickness (t_2) selected near a rib radially outer end (44) is between 1.1 and 8, and in that

an outer skin (32) closes off the channels (30) at the at least one open side (48, 52, 58).

2. The fan blade (20) as set forth in claim 1, wherein a cross-section through at least one said rib (26) from the open side (48) and toward the inner side (50) is trapezoidal.
3. The fan blade (20) as set forth in claim 2, wherein an end (48) of said trapezoidal rib (26) spaced toward said open side (48) is smaller than an end (50) at said inner side (50).
4. The fan blade (20) as set forth in claim 1, wherein a cross-section taken through at least one rib (26) moving from the open side (52) and toward said inner side (54) is rectangular.
5. The fan blade (20) as set forth in claim 1, wherein a cross-section through at least one rib (26) from the open side (58) toward an inner side (60) has generally curved sides (62), and is smaller at said open side (58) than it is at said inner side (60).
6. The fan blade (20) as set forth in any preceding claim, wherein said outer skin (32) and said main body (28) are both formed of aluminum or aluminum alloy.
7. The fan blade (20) as set forth in any of claims 1 to 5, wherein said outer skin (32) and said main body (28) are both formed of titanium or a titanium alloy.
8. The fan blade (20) as set forth in any preceding claim, wherein said channels (30) extend from said open side (48) to said inner side (60) within said main body (28).

Patentansprüche

1. Gebläseschaufel (20), umfassend einen Hauptkörper (28), der sich zwischen einer Vorderkante (21) und einer Hinterkante (22) erstreckt, und Kanäle (30) aufweisend, die von einer offenen Seite zu einer Innenseite in den Hauptkörper (28) gebildet sind, mit einer Vielzahl von Rippen (26), die sich quer durch den Hauptkörper (28) zwischen den Kanälen (30) erstreckt, wobei die Gebläseschaufel (20) einen Schwalbenschwanz (24) aufweist, und eine Schaufel (18), die sich radial von dem Schwalbenschwanz (24) auswärts erstreckt, wobei die Rippen (26) eine Dicke aufweisen, die als im Allgemeinen von der Vorderkante (21) in Richtung der Hinterkante (22) gemessen definiert ist, wobei eine Dicke von zumindest einer der Rippen (26) gebildet ist, sodass sie im Allgemeinen dicker benachbart zu einem radial inneren Rippenende (42) ist und sich in eine radial auswärtige Richtung bewegend dünner wird;

dadurch gekennzeichnet, dass

ein Verhältnis einer Dicke (t_1) der zumindest einen Rippe (26) ausgewählt nahe dem radial inneren Rippenende (42) verglichen mit einer Dicke (t_2) ausgewählt nahe einem radial äußeren Rippenende (44) zwischen 1.1 und 8 beträgt, und dass eine Außenhaut (32) die Kanäle (30) auf der zumindest einen offenen Seite (48, 52, 58) verschließt.


2. Gebläseschaufel (20) nach Anspruch 1, wobei ein Querschnitt durch zumindest eine Rippe (26) von der offenen Seite (48) und in Richtung der Innenseite (50) trapezförmig ist.
3. Gebläseschaufel (20) nach Anspruch 2, wobei ein Ende (48) der trapezförmigen Rippe (26) in Richtung der offenen Seite (48) beabstandet kleiner als ein Ende (50) auf der Innenseite (50) ist.
4. Gebläseschaufel (20) nach Anspruch 1, wobei ein Querschnitt genommen durch zumindest eine Rippe (26), die sich von der offenen Seite (52) und in Richtung der Innenseite (54) bewegt, rechteckig ist.
5. Gebläseschaufel (20) nach Anspruch 1, wobei ein Querschnitt durch zumindest eine Rippe (26) von der offenen Seite (58) in Richtung einer Innenseite (60) im Allgemeinen gebogene Seiten (62) aufweist und auf der offenen Seite (58) kleiner als auf der Innenseite (60) ist.
6. Gebläseschaufel (20) nach einem vorhergehenden Anspruch, wobei die Außenhaut (32) und der Hauptkörper (28) beide aus Aluminium oder Aluminiumlegierung gebildet sind.
7. Gebläseschaufel (20) nach einem der Ansprüche 1 bis 5, wobei die Außenhaut (32) und der Hauptkörper (28) beide aus Titan oder einer Titanlegierung gebildet sind.
8. Gebläseschaufel (20) nach einem vorhergehenden Anspruch, wobei sich die Kanäle (30) von der offenen Seite (48) zu der Innenseite (60) innerhalb des Hauptkörpers (28) erstrecken.






Revendications




1. Aube de soufflante (20) comprenant un corps principal (28) s'étendant entre un bord d'attaque (21) et un bord de fuite (22), et ayant des canaux (30) formés dans ledit corps principal (28) d'un côté ouvert à un côté intérieur avec une pluralité de nervures (26) s'étendant à travers le corps principal (28) entre les canaux (30), l'aube de soufflante (20) ayant une queue d'aronde (24), et un profil aérodynamique (18) s'étendant radialement vers l'extérieur depuis ladite

queue d'aronde (24), lesdites nervures (26) ayant une épaisseur définie comme mesurée généralement depuis ledit bord d'attaque (21) vers ledit bord de fuite (22), une épaisseur d'au moins une desdites nervures (26) étant formée pour être généralement plus épaisse adjacente à une extrémité radialement intérieure (42) de nervure, et se rétrécissant en se déplaçant dans une direction radialement extérieure ; **caractérisée en ce que** un rapport d'une épaisseur (t_1) de ladite au moins une nervure (26) sélectionnée près de l'extrémité radialement intérieure (42) de nervure à une épaisseur (t_2) sélectionnée près d'une extrémité radialement extérieure (44) de nervure est compris entre 1,1 et 8, et **en ce qu'**une peau extérieure (32) ferme les canaux (30) au niveau de l'au moins un côté ouvert (48, 52, 58).

2. Aube de soufflante (20) selon la revendication 1, dans laquelle une section transversale à travers au moins une dite nervure (26) depuis le côté ouvert (48) et vers le côté intérieur (50) est trapézoïdale.
3. Aube de soufflante (20) selon la revendication 2, dans laquelle une extrémité (48) de ladite nervure trapézoïdale (26) espacée vers ledit côté ouvert (48) est plus petite qu'une extrémité (50) au niveau dudit côté intérieur (50).
4. Aube de soufflante (20) selon la revendication 1, dans laquelle une section transversale prise à travers au moins une nervure (26) se déplaçant depuis le côté ouvert (52) et vers ledit côté intérieur (54) est rectangulaire.
5. Aube de soufflante (20) selon la revendication 1, dans laquelle une section transversale à travers au moins une nervure (26) depuis le côté ouvert (58) vers un côté intérieur (60) a des côtés généralement incurvés (62), et est plus petite au niveau dudit côté ouvert (58) qu'elle ne l'est au niveau dudit côté intérieur (60).
6. Aube de soufflante (20) selon une quelconque revendication précédente, dans laquelle ladite peau extérieure (32) et ledit corps principal (28) sont tous deux formés d'aluminium ou d'alliage d'aluminium.
7. Aube de soufflante (20) selon l'une quelconque des revendications 1 à 5, dans laquelle ladite peau extérieure (32) et ledit corps principal (28) sont tous deux formés de titane ou d'un alliage de titane.
8. Aube de soufflante (20) selon une quelconque revendication précédente, dans laquelle lesdits canaux (30) s'étendent dudit côté ouvert (48) audit côté intérieur (60) à l'intérieur dudit corps principal (28).

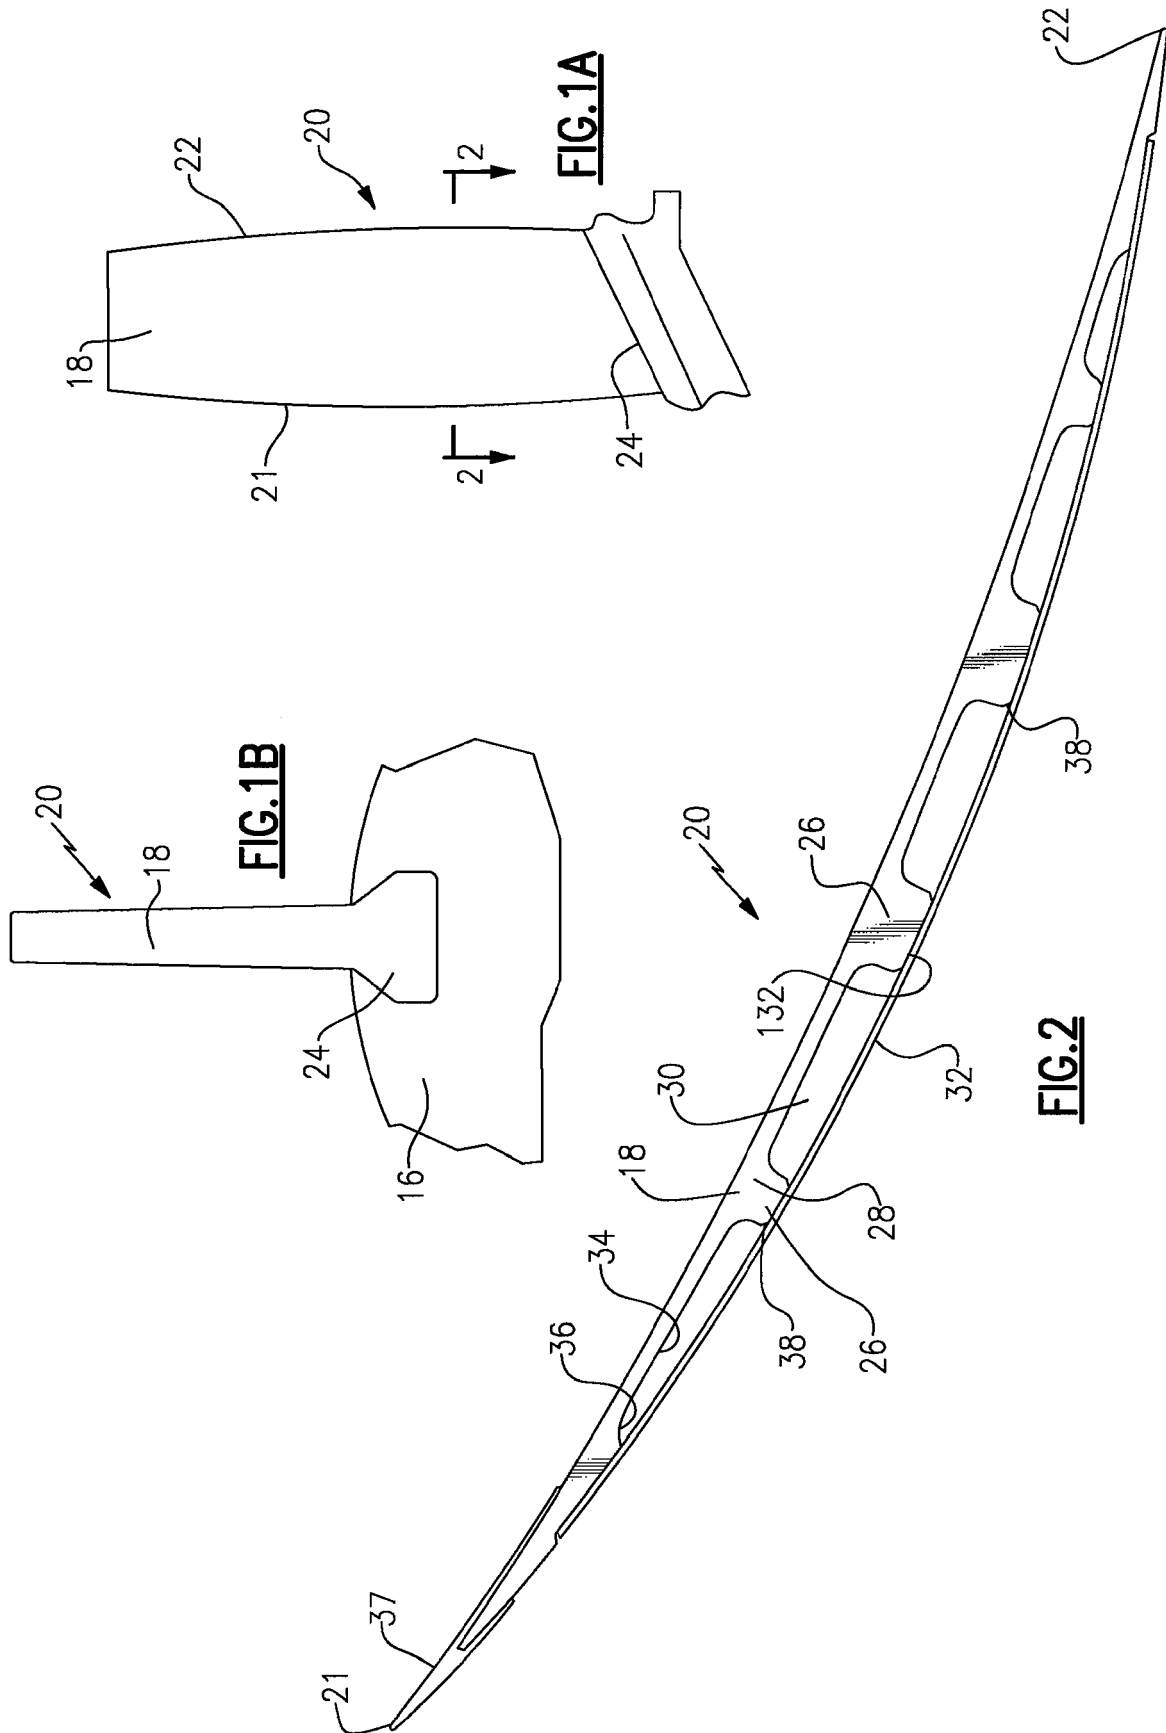

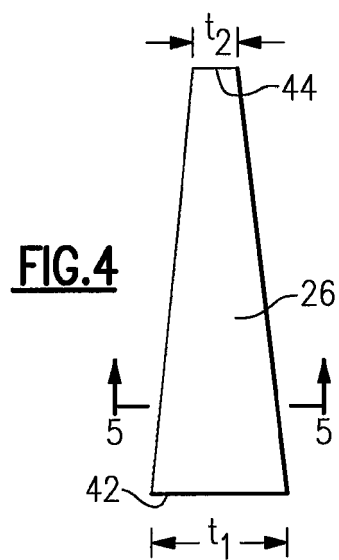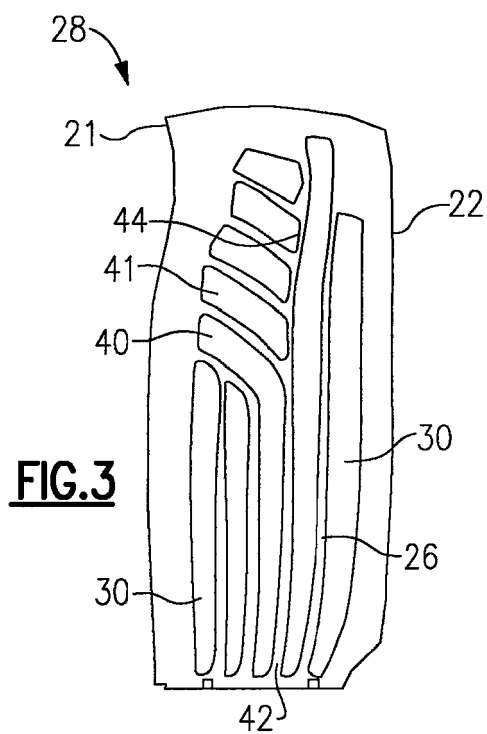

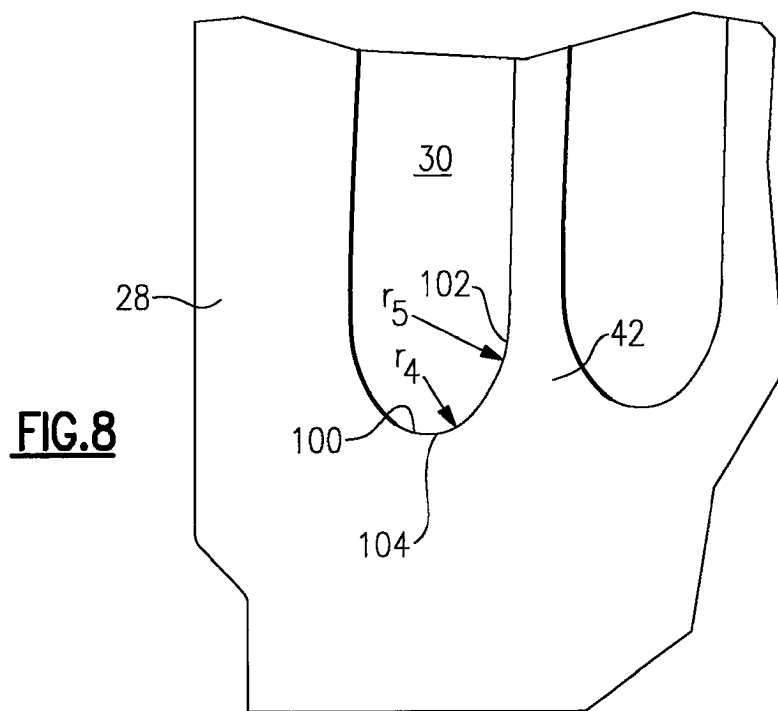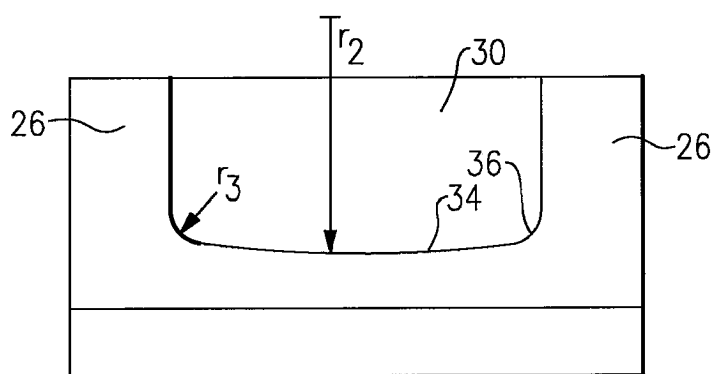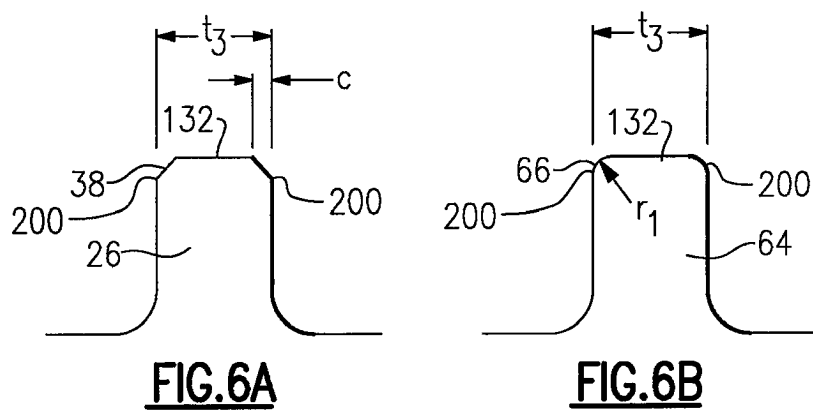

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1439281 A2 **[0005]**
- EP 0731874 A1 **[0005]**
- EP 0924380 A2 **[0005]**
- EP 0926312 A2 **[0005]**
- EP 1152123 A2 **[0005]**
- US 6033186 A **[0005]**
- EP 2014386 A1 **[0005]**
- EP 2239083 A1 **[0006]**