

(11) (21) (C) **2,191,374**
 (22) 1996/11/27
 (43) 1997/06/27
 (45) 2000/10/17

(72) Foladare, Mark Jeffrey, US

(72) Goldman, Shelley B., US

(72) Silverman, David Phillip, US

(72) Weber, Roy Philip, US


(73) AT&T CORP., US

(51) Int.Cl.⁶ H04Q 7/12, H04Q 7/08

(30) 1995/12/26 (581,710) US

(54) **METHODE ET SYSTEME DE LOCALISATION DES ABONNES
D'UN SERVICE DE RADIOMESSAGERIE BIDIRECTIONNEL**

(54) **METHOD AND SYSTEM FOR DETERMINING LOCATION OF
SUBSCRIBER OF TWO-WAY PAGING SERVICE**

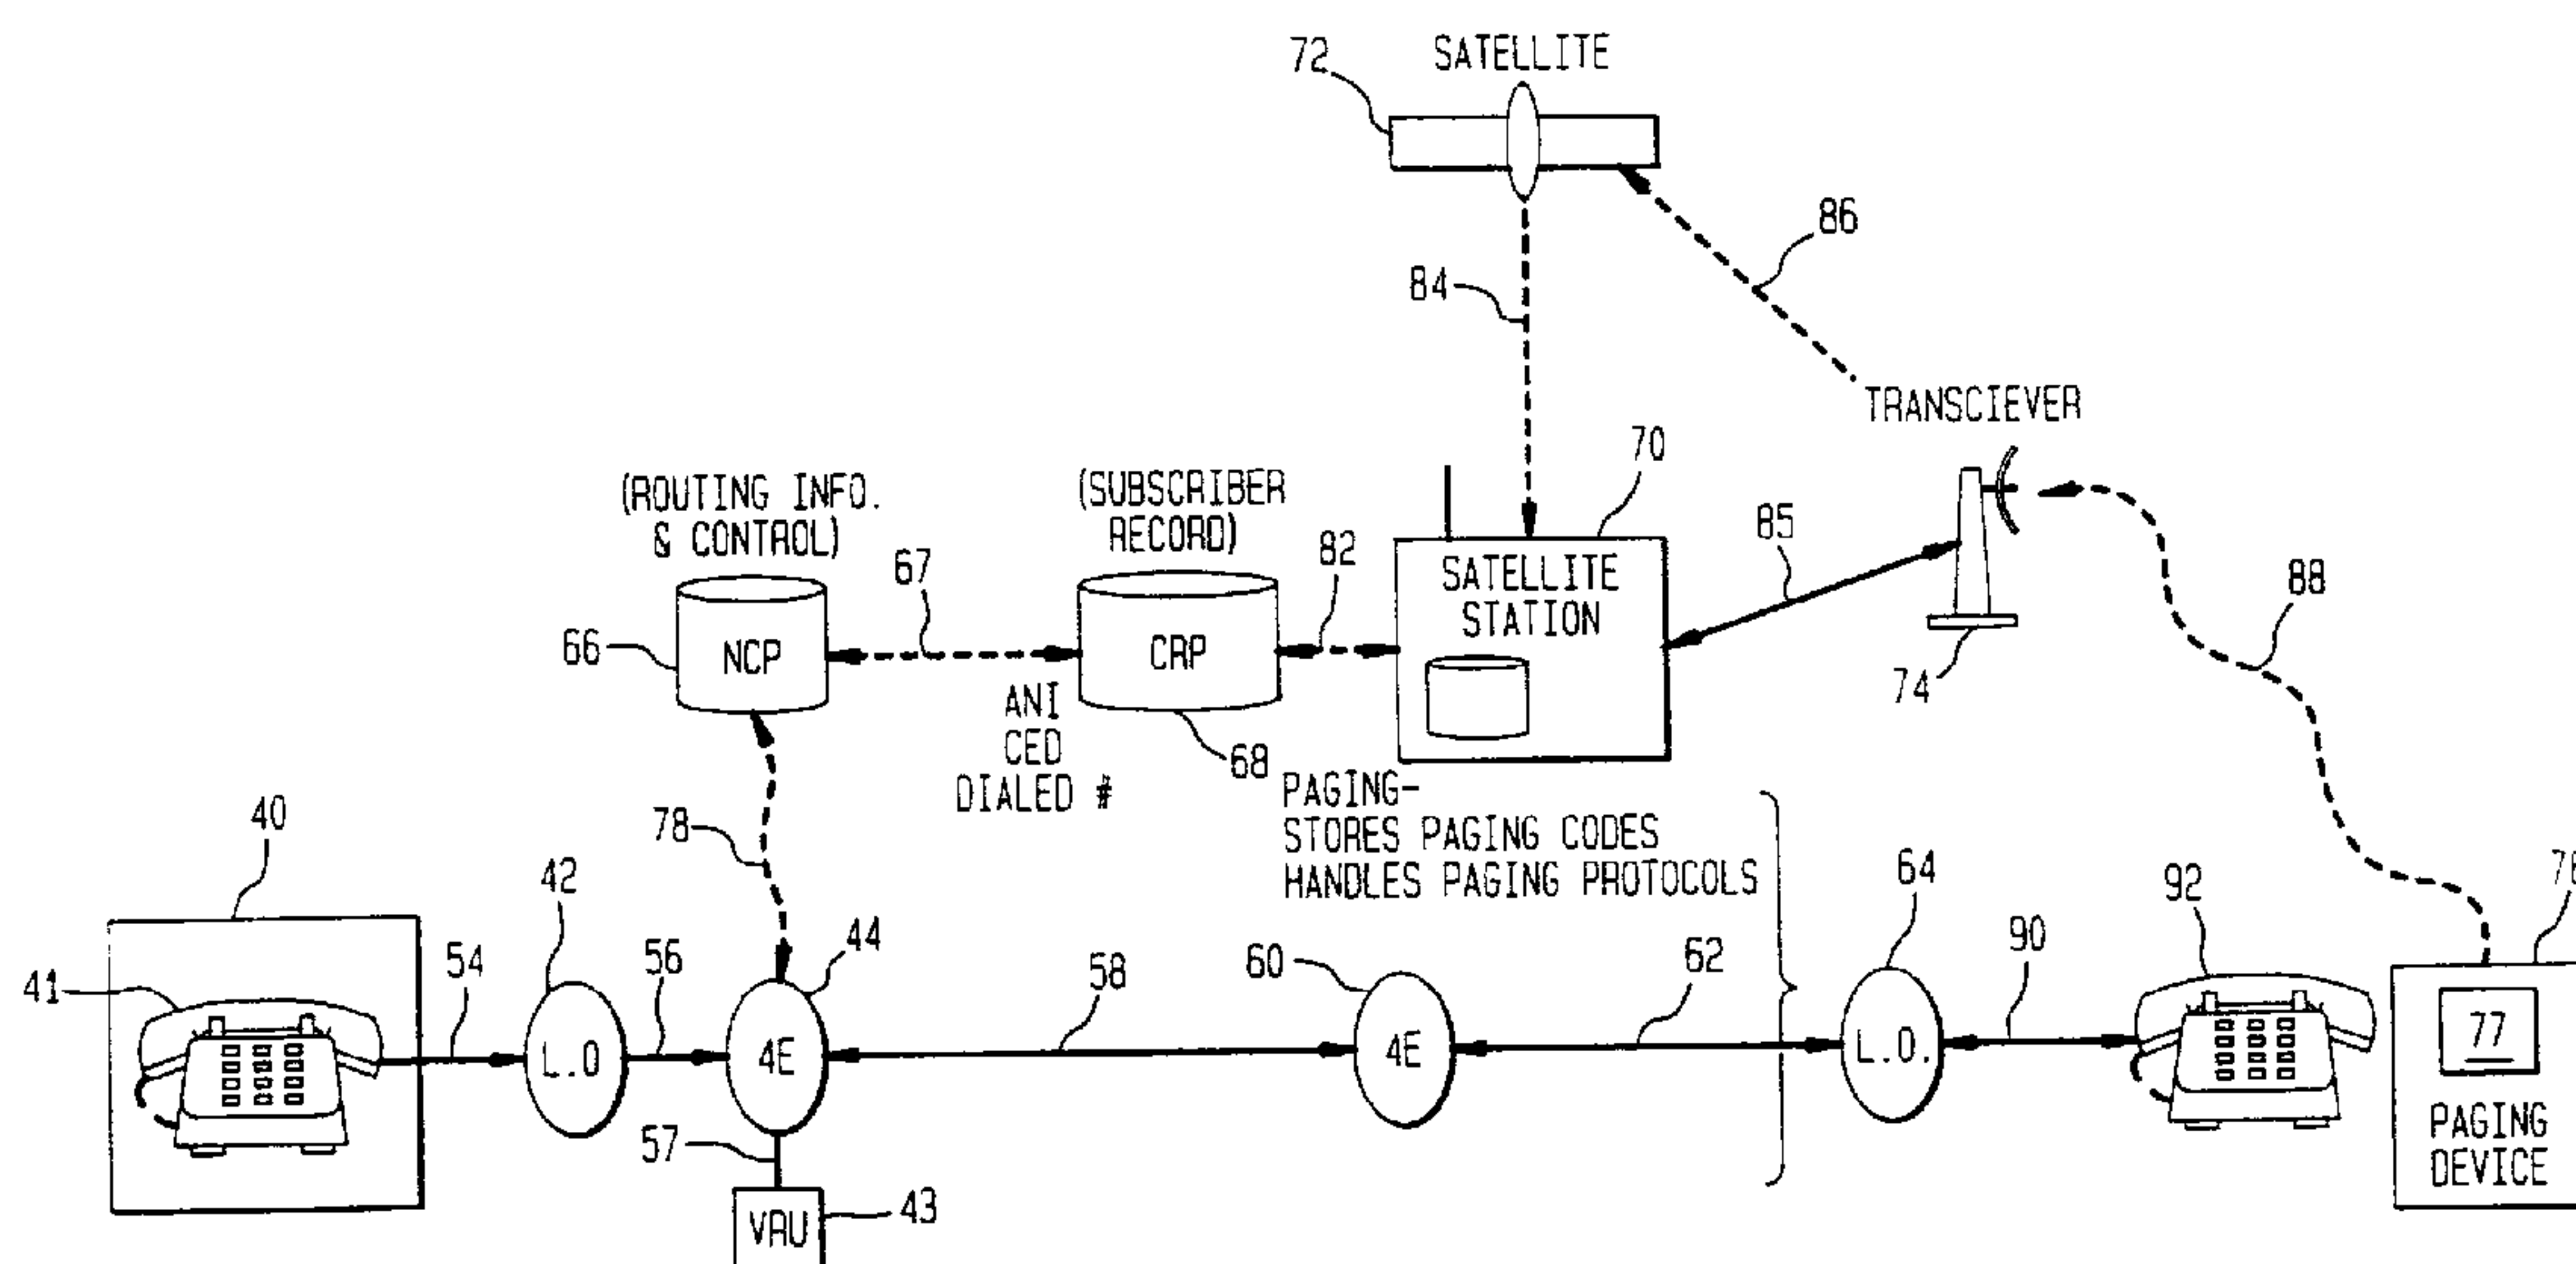

(57) A method and system for determining the location of a subscriber of a two-way paging service includes a telephone network with a switched network and a paging service operatively connected thereto. The paging service includes a paging receiver for receiving a location parameter from a two-way pager of a subscriber of a paging network. The switched network includes a unit for generating a location message to a caller when the caller queries the network for the subscriber location.

**METHOD AND SYSTEM FOR DETERMINING LOCATION
OF SUBSCRIBER OF TWO-WAY PAGING SERVICE**

5 **ABSTRACT**

 A method and system for determining the location of a subscriber
of a two-way paging service includes a telephone network with a switched
network and a paging service operatively connected thereto. The paging service
includes a paging receiver for receiving a location parameter from a two-way
10 pager of a subscriber of a paging network. The switched network includes a unit
for generating a location message to a caller when the caller queries the network
for the subscriber location.

**METHOD AND SYSTEM FOR DETERMINING LOCATION
OF SUBSCRIBER OF TWO-WAY PAGING SERVICE**

5

FIELD OF THE INVENTION

This invention relates to a method and system for determining the location of a subscriber of a two-way paging service.

10

BACKGROUND OF THE INVENTION

Two-way paging is an emerging technology that is advantageous because a mobile party can be more readily located to establish communications. The network link to a two-way paging network allows dependent - location calling and other services.

15

It would be advantageous if the two-way paging network could be used also for locating a subscriber without establishing two-way communication. For example, at times a caller may desire the whereabouts of the subscriber, without establishing two-way communication. For example, a wife, employer, probation officer or other individual may want to know the location of a spouse,
20 employee, parolee or friend. There would be no need for connecting the call to the subscriber. The only need would be determining the subscriber location.

SUMMARY OF THE INVENTION

In accordance with the present invention, the location of a subscriber to a two-way paging service can now be determined without establishing two-way communication. In one aspect of the invention, a signal is
5 transmitted from a two-way pager carried by a subscriber to a paging service of a telephone network. The signal includes a location parameter. The location parameter is forwarded to a network switch. After the caller queries the network for the subscriber location, the network generates a location message. This location message could be a text-to-speech recording that is derived from the
10 location parameter.

In one aspect of the present invention, an announcement is supplied to the caller indicating the location of the subscriber. In still another aspect of the invention, a personal identification number can be requested from the caller before supplying a location message. An announcement can also be supplied
15 requesting the caller to state their name and querying a database to determine if the caller has clearance to receive location information. In another aspect of the present invention, the call can be connected to a voice response unit. One or more digits are collected and the digits passed to a network control point. The

digits are used to determine whether a location message should be routed to the caller entering the digits.

In accordance with one aspect of the present invention there is provided a method for determining the location of a subscriber of a two-way paging service comprising the steps: requesting a personal identification number of a caller to determine if the caller has clearance to receive location information before supplying a subscriber location message to the caller; transmitting a signal having a location parameter from a two-way pager carried by the subscriber to a database in a paging service of a telephone network, the location parameter originated by the subscriber; forwarding the location parameter to a network switch; and supplying a location message to a caller when the caller queries the network for the subscriber location, provided the caller has clearance to receive the location information.

In accordance with another aspect of the present invention there is provided a system for determining the location of a subscriber of a two-way paging service comprising: a telephone network including a voice response and database unit, a switched network and a paging service operatively connected thereto, said voice response requesting a caller personal identification number of a caller to determine if the caller has clearance to receive location information before supplying a subscriber location message to the caller; said paging service including a paging receiver for receiving a location parameter from a two-way pager of the subscriber to the paging network, the location parameter originated by the subscriber; and said switched network including

means for generating a location message to a caller when the caller queries the network for the subscriber location, provided the caller has clearance to receive the location information.

BRIEF DESCRIPTION OF THE DRAWINGS

5 The foregoing features and advantages of the present invention can be appreciated more fully from the following description, with reference to the accompanying drawings, in which:

 Figure 1 is a block-schematic diagram of the method and system for determining the location of a subscriber of a two-way paging service in accordance with
10 the present invention.

 Figure 2 is a block-schematic diagram of one aspect of the system of the present invention.

 Figure 3 shows a two-way pager configuration that could be used with the present invention.

15 Figure 4 is a flow chart depicting one method of the present invention.

DETAILED DESCRIPTION

Referring to FIG. 1, there is shown a block diagram of a communication system incorporating the present invention that allows a caller to locate a subscriber of a two-way paging service. The caller initiates the call via a caller telephone **12**. The caller telephone, like other telephones hereinafter discussed, is used merely as an illustration. The invention may be implemented using a variety of communication devices, including, but not limited to telephones, computers, and facsimile machines.

The caller telephone **12** is connected to a network access switch **14** by a first communication coupling **16** which may take the form of a telephone line, twisted pair line, coaxial cable, fiber optic line, wireless link, or any other type of communication coupling. Other communication couplings described hereafter could be a telephone line, twisted pair line, coaxial cable, fiber optic line, wireless link or other similar communication coupling.

A second communication coupling **22** connects the network access switch **14** to a Network Control Point (NCP) **24** that is coupled to a database **34** via a third communication coupling **26**. The database is coupled to a paging service **28** via a fourth communication coupling **27**. The mobile party uses the pager to transmit a location signal, represented by wireless link **30**, to the paging

service. The location signal includes location parameters that are associated with the location of the two-way paging subscriber, such as a call-site number. The location signal may also include other identifying information, which can be used by the paging service to identify the transmitting pager.

5 Upon receiving the location signal from the pager, the paging service relays the signal to the database where the location parameter is extracted from the signal and stored. The location parameter supplied by the mobile party is cross-referenced with the party's personal telephone number (PTN) so that whenever the party's PTN is dialed the actual location for that party may be
10 retrieved from the database, and supplied as a voice response by means such as a Voice Response Unit (VRU). Additionally, the system can be designed so that only certain callers have the option of accessing the database.

 When a caller initiates a call by dialing the mobile party's PTN, the call is coupled to network access switch 14 via first communication coupling
15 16. The network access switch 14 then queries the NCP for instructions via second communication coupling 22, and the NCP, in turn, queries the database through third communication coupling 26. Based on the dialed PTN, the database retrieves the mobile party's location parameter and passes it back to the NCP via the third communication coupling. The NCP, in turn, passes this information to

the network access switch **14** which can then have a Voice Response Unit supply an announcement.

In another aspect of the present invention, it will be apparent to those skilled in the art that the database **34** may be incorporated into the NCP **24**
5 or paging service **28**. The invention could then be implemented without a separate database element.

In one aspect of the invention, as shown in FIG. 2, the present invention is incorporated into an existing telephone network. As shown in the figure, a caller **40** seeks the location of a mobile party, or "subscriber", **76** who is
10 assigned a Personal Telephone Number (PTN) and is equipped with a two-way pager **77**. The caller initiates an incoming call from a telephone **41** by dialing the subscriber's PTN. This incoming call is coupled to a first local office **42** in the caller's locality through a first telephone line **54**. The first local office routes the call to an originating access switch **44** over a first trunk line **56**. Switch **44** may
15 take the form of a digital switch, or an electronic switching system, such as an AT&T 4ESS™ switch ("4E" switch) commonly known to those skilled in the art.

Once the call has been routed, the switch **44** queries a Network Control Point (NCP) **66** via a first Common Channel Interoffice Signaling (CCIS) link **78**. (Common Channel Interoffice Signaling) refers to the transmission of

call control signaling between telephone offices, wherein a plurality of call control channels are multiplexed onto a single data link. At this point, if the subscriber has provisioned for the collection of Customer Entered Digits (CED) the NCP instructs the switch **44** to couple the call to a Voice Response Unit (VRU) **43** via a first communication link **67**. The VRU (e.g. an AT&T Network Services Complex, or NSCX) then plays a standard prompting announcement to the caller and collects the CED (e.g. a Personal Identification Number, or PIN) via the reception of up to ten Dual Tone Multi Frequency (DTMF) digits (i.e. Touch Tone™ signals from a Touch Tone™ telephone). In a system using a CED, provision must be made for the case where a caller can not enter digits because the caller is at a rotary dial station or does not respond to the prompt. In these two situations, the VRU may allow for a time-out or an abbreviated dialing sequence (e.g., #) to denote that no digits are forthcoming. Any CED collected by the VRU is passed back to the NCP.

After the collection of CED, or immediately after the originating access switch queries the NCP, the NCP queries a Customer Routing Point (CRP) **68** via a second CCIS link **67**. In the query, the NCP sends the CED, the PTN, and the caller telephone number (Automatic Number Identification number, or "ANI"). Based on the ANI and/or CED, the CRP screens the call, deciding

whether or not the caller is to receive the subscriber location information. If the caller is not to receive subscriber information, the CRP instructs the NCP to route the call to a switch where an announcement could be played. If the caller is to receive location information, the CRP accesses a subscriber record stored within
5 the CRP, retrieves the location parameter for the subscriber from the record, and returns the parameter to the NCP via CCIS link 67. The NCP relays the location parameter to the originating access switch via CCIS link 78 where the parameter could be subject to a text-to-voice translation.

The subscriber may update the location parameter at any time
10 using the two-way pager. The update can be done automatically or voluntarily. The subscriber 76 could generate a location signal containing the new location parameter using the two-way pager 77. The location signal is transmitted to a paging service transceiver 74. The transceiver relays the signal to a satellite ground station 70, either directly, via communication coupling 85, or indirectly,
15 via wireless link 86, satellite 72, and wireless link 84 via wireless link 86. The satellite ground station, in turn, passes the signal to the CRP via a second communication link 82. The CRP extracts the new location parameter and uses it to update the subscriber's CRP record.

Calls are routed based on the most recent update of the CRP record. As described above, whenever an incoming call passes screening by the CRP, the NCP 66 retrieves the location parameter from CRP 68 and passes it to originating access switch 44.

5 FIG. 3 shows an illustrative embodiment of a two-way pager 102, a transceiver 112, a satellite 114, a satellite ground station 116, wireless links 111, 113 and 115, and a communication link 117, the embodiment being suitable for use in accordance with the present invention. The pager 100 includes: a display 102, such as a liquid crystal display or light emitting diode display; a
10 select key 104; a menu key 106; a keypad 108; and a mode indicator 110, that may be included within the display 102.

The pager can include processing hardware and software that automatically sends a signal back to the paging service that updates the database. Additionally, the paging service can send a signal that seeks nationwide the
15 subscriber having the two-way pager. The network can send a signal seeking the two-way pager only periodically, or only when a caller calls seeking the subscriber location.

A high level flow chart is shown in Figure 4 and is described below. For purposes of description, the flow chart is described with reference numerals beginning in the 200 series of numbers.

In accordance with the invention, a signal is first transmitted from
5 a two-way pager that carried by a subscriber to a paging service of a telephone network (Block 200). A location parameter based on the signal is then stored within a database (Block 202). A caller then dials the personal identification number of the subscriber and the network switch connects him to a network control point (Block 204). A Voice Response Unit can request the caller to state
10 their name or enter a PIN through a series of Dual Tone Multi Frequency signals (Block 206). If the correct name is spoken or the proper PIN number entered, the database is queried to retrieve the location parameter (Block 208) which is then forwarded to the caller through a text-to-speech conversion such as a cell cite number or a city location (Block 210). If the caller had recently queried the
15 location and there has been no change, then the network can respond with an appropriate response such as "there has been no change since your last query (Block 212)."

While the best mode for carrying out the invention has been described in detail, those familiar with the art to which the invention relates will

recognize various alternative designs and embodiments for practicing the invention as defined by the following claims.

Claims:

1. A method for determining the location of a subscriber of a two-way paging service comprising the steps:

requesting a personal identification number of a caller to determine if the caller
5 has clearance to receive location information before supplying a subscriber location message to the caller;

transmitting a signal having a location parameter from a two-way pager carried by the subscriber to a database in a paging service of a telephone network, the location parameter originated by the subscriber;

10 forwarding the location parameter to a network switch; and

supplying a location message to a caller when the caller queries the network for the subscriber location, provided the caller has clearance to receive the location information.

2. The method according to claim 1, including supplying an announcement to the
15 caller indicating the location of the subscriber.

3. The method according to claim 1, including supplying an announcement requesting the caller to state their name, and querying a database to determine if the caller has clearance to receive location information.

4. The method according to claim 1, including the step of using a network control point to route the call to the caller.

5. The method according to claim 1, including the step of connecting the call to a voice response unit;

5 using the voice response unit to collect one or more entered digits;
passing the entered digits to a network control point;
using the entered digits to determine whether the call is to be continued; and
after determining whether the call is to be continued, switching the call to receive a location parameter.

10 6. A system for determining the location of a subscriber of a two-way paging service comprising:

a telephone network including a voice response and database unit, a switched network and a paging service operatively connected thereto, said voice response requesting a caller personal identification number of a caller to determine if the caller has
15 clearance to receive location information before supplying a subscriber location message to the caller; said paging service including a paging receiver for receiving a location parameter from a two-way pager of the subscriber to the paging network, the location parameter originated by the subscriber; and

said switched network including means for generating a location message to a
20 caller when the caller queries the network for the subscriber location, provided the caller has clearance to receive the location information.

7. The system according to claim 6, including a voice response unit for supplying an announcement to a caller requesting a personal identification number from the caller.

8. The system according to claim 6, including a voice response unit for supplying an announcement requesting the caller to state their name.

5 9. The system according to claim 6, including a database containing a list of names which are compared with the caller name to determine if the caller has clearance to receive location information.

10. The system according to claim 6, wherein said paging service comprises a transceiver for receiving said location parameter.

10 11. The system according to claim 6, wherein said paging service further comprises a satellite station for receiving said parameters from said transceiver.

12. A system for determining the location of a subscriber of a two-way paging service comprising:

a database for receiving a location parameter originating from a two-way pager
15 associated with a telephone number of the subscriber, the location parameter being originated by the subscriber;

a network control point for use in routing the location parameter to a caller requesting the location of the subscriber having the two-way pager; and

means for requesting a personal identification number of a caller to determine if the caller has clearance to receive location information before supplying a subscriber location message to the caller.

13. The system according to claim 12, including a voice response unit for supplying
5 one or more announcements of the caller.

14. The system according to claim 12, including a paging network, and wherein said location parameter originates from said two-way pager after said paging network sends a signal seeking the location of the two-way pager.

15. The system according to claim 14, wherein said paging network sends a signal
10 seeking the location of the two-way pager only after a caller requests a location of the subscriber.

16. A method for determining the location of a subscriber of a two-way paging service comprising the steps:

- 15
- a) transmitting a call from a caller to a network switch to determine the location of a subscriber;
 - b) supplying an announcement requesting a personal identification number of a caller to determine if the caller has clearance to receive location information before supplying a subscriber location message to the caller,

and querying a database to determine if the caller has clearance to receive the location information;

5 c) transmitting a signal to the subscriber on a paging service of a telephone network for location information if the caller has clearance to receive the information;

d) transmitting a signal having a location parameter from a two-way pager carried by the subscriber to the paging service;

e) forwarding the location parameter to a network switch; and

10 f) supplying a location message to the caller when the caller queries the network for the subscriber location, provided the caller has clearance to receive the location information.

17. A system for determining the location of a subscriber of a two-way paging service comprising:

15 a) a telephone network including a switched network and a paging service operatively connected thereto;

b) said switched network including a voice response unit for supplying an announcement to a caller requesting a personal identification number of a caller to determine if the caller has clearance to receive location information before supplying a subscriber location message to the caller;

20 c) said paging service including a paging receiver for receiving a location parameter from a two-way pager of the subscriber to the paging network; and

- d) said switched network including means for generating a location message to the caller if the proper personal identification number is supplied to the voice response unit.

18. A system for determining the location of a subscriber of a two-way paging service

5 comprising:

- a) a database for receiving a location parameter originating from a two-way pager associated with a telephone number of the subscriber;
- b) a voice response unit for supplying one or more announcements to a caller requesting location information of the subscriber; said
10 announcement including a query requesting the caller to enter a personal identification number to determine if the caller has clearance to receive location information before supplying a subscriber location information to the caller; and
- c) a network control point for use in routing the location parameter to the
15 caller requesting the location of the subscriber having the two-way pager provided the caller has clearance to receive the location information.

FIG. 1

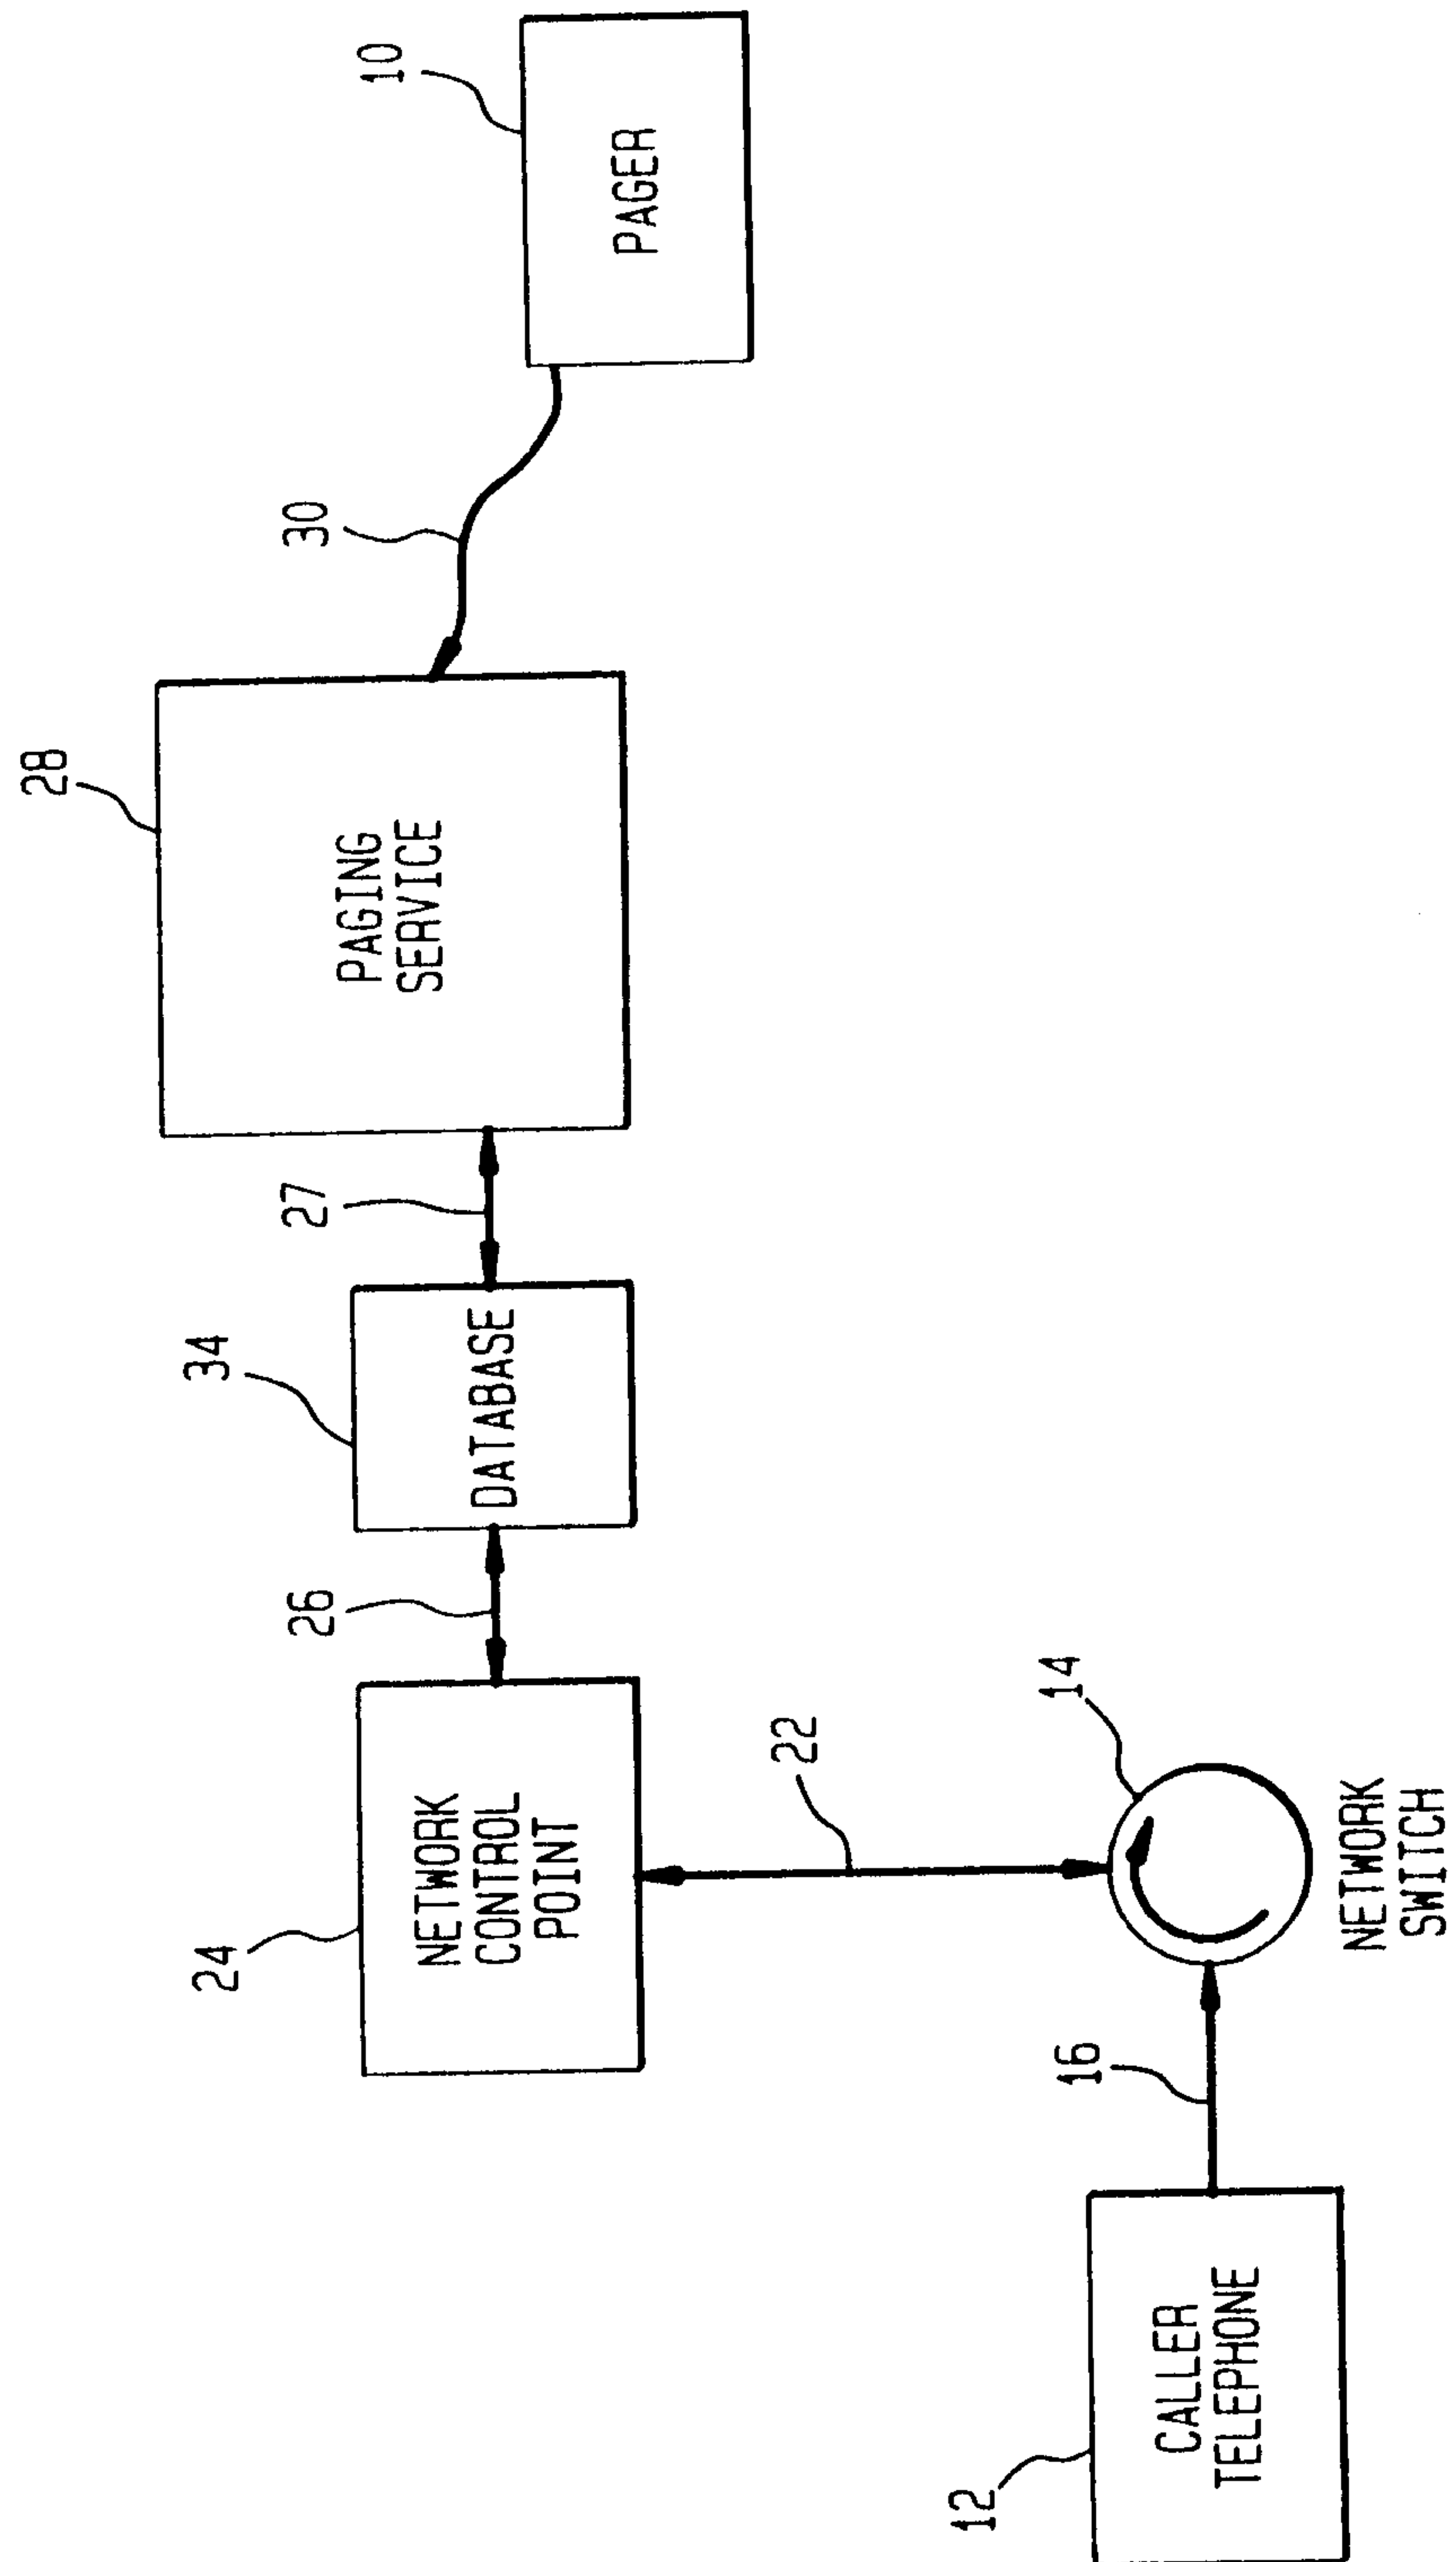


FIG. 3

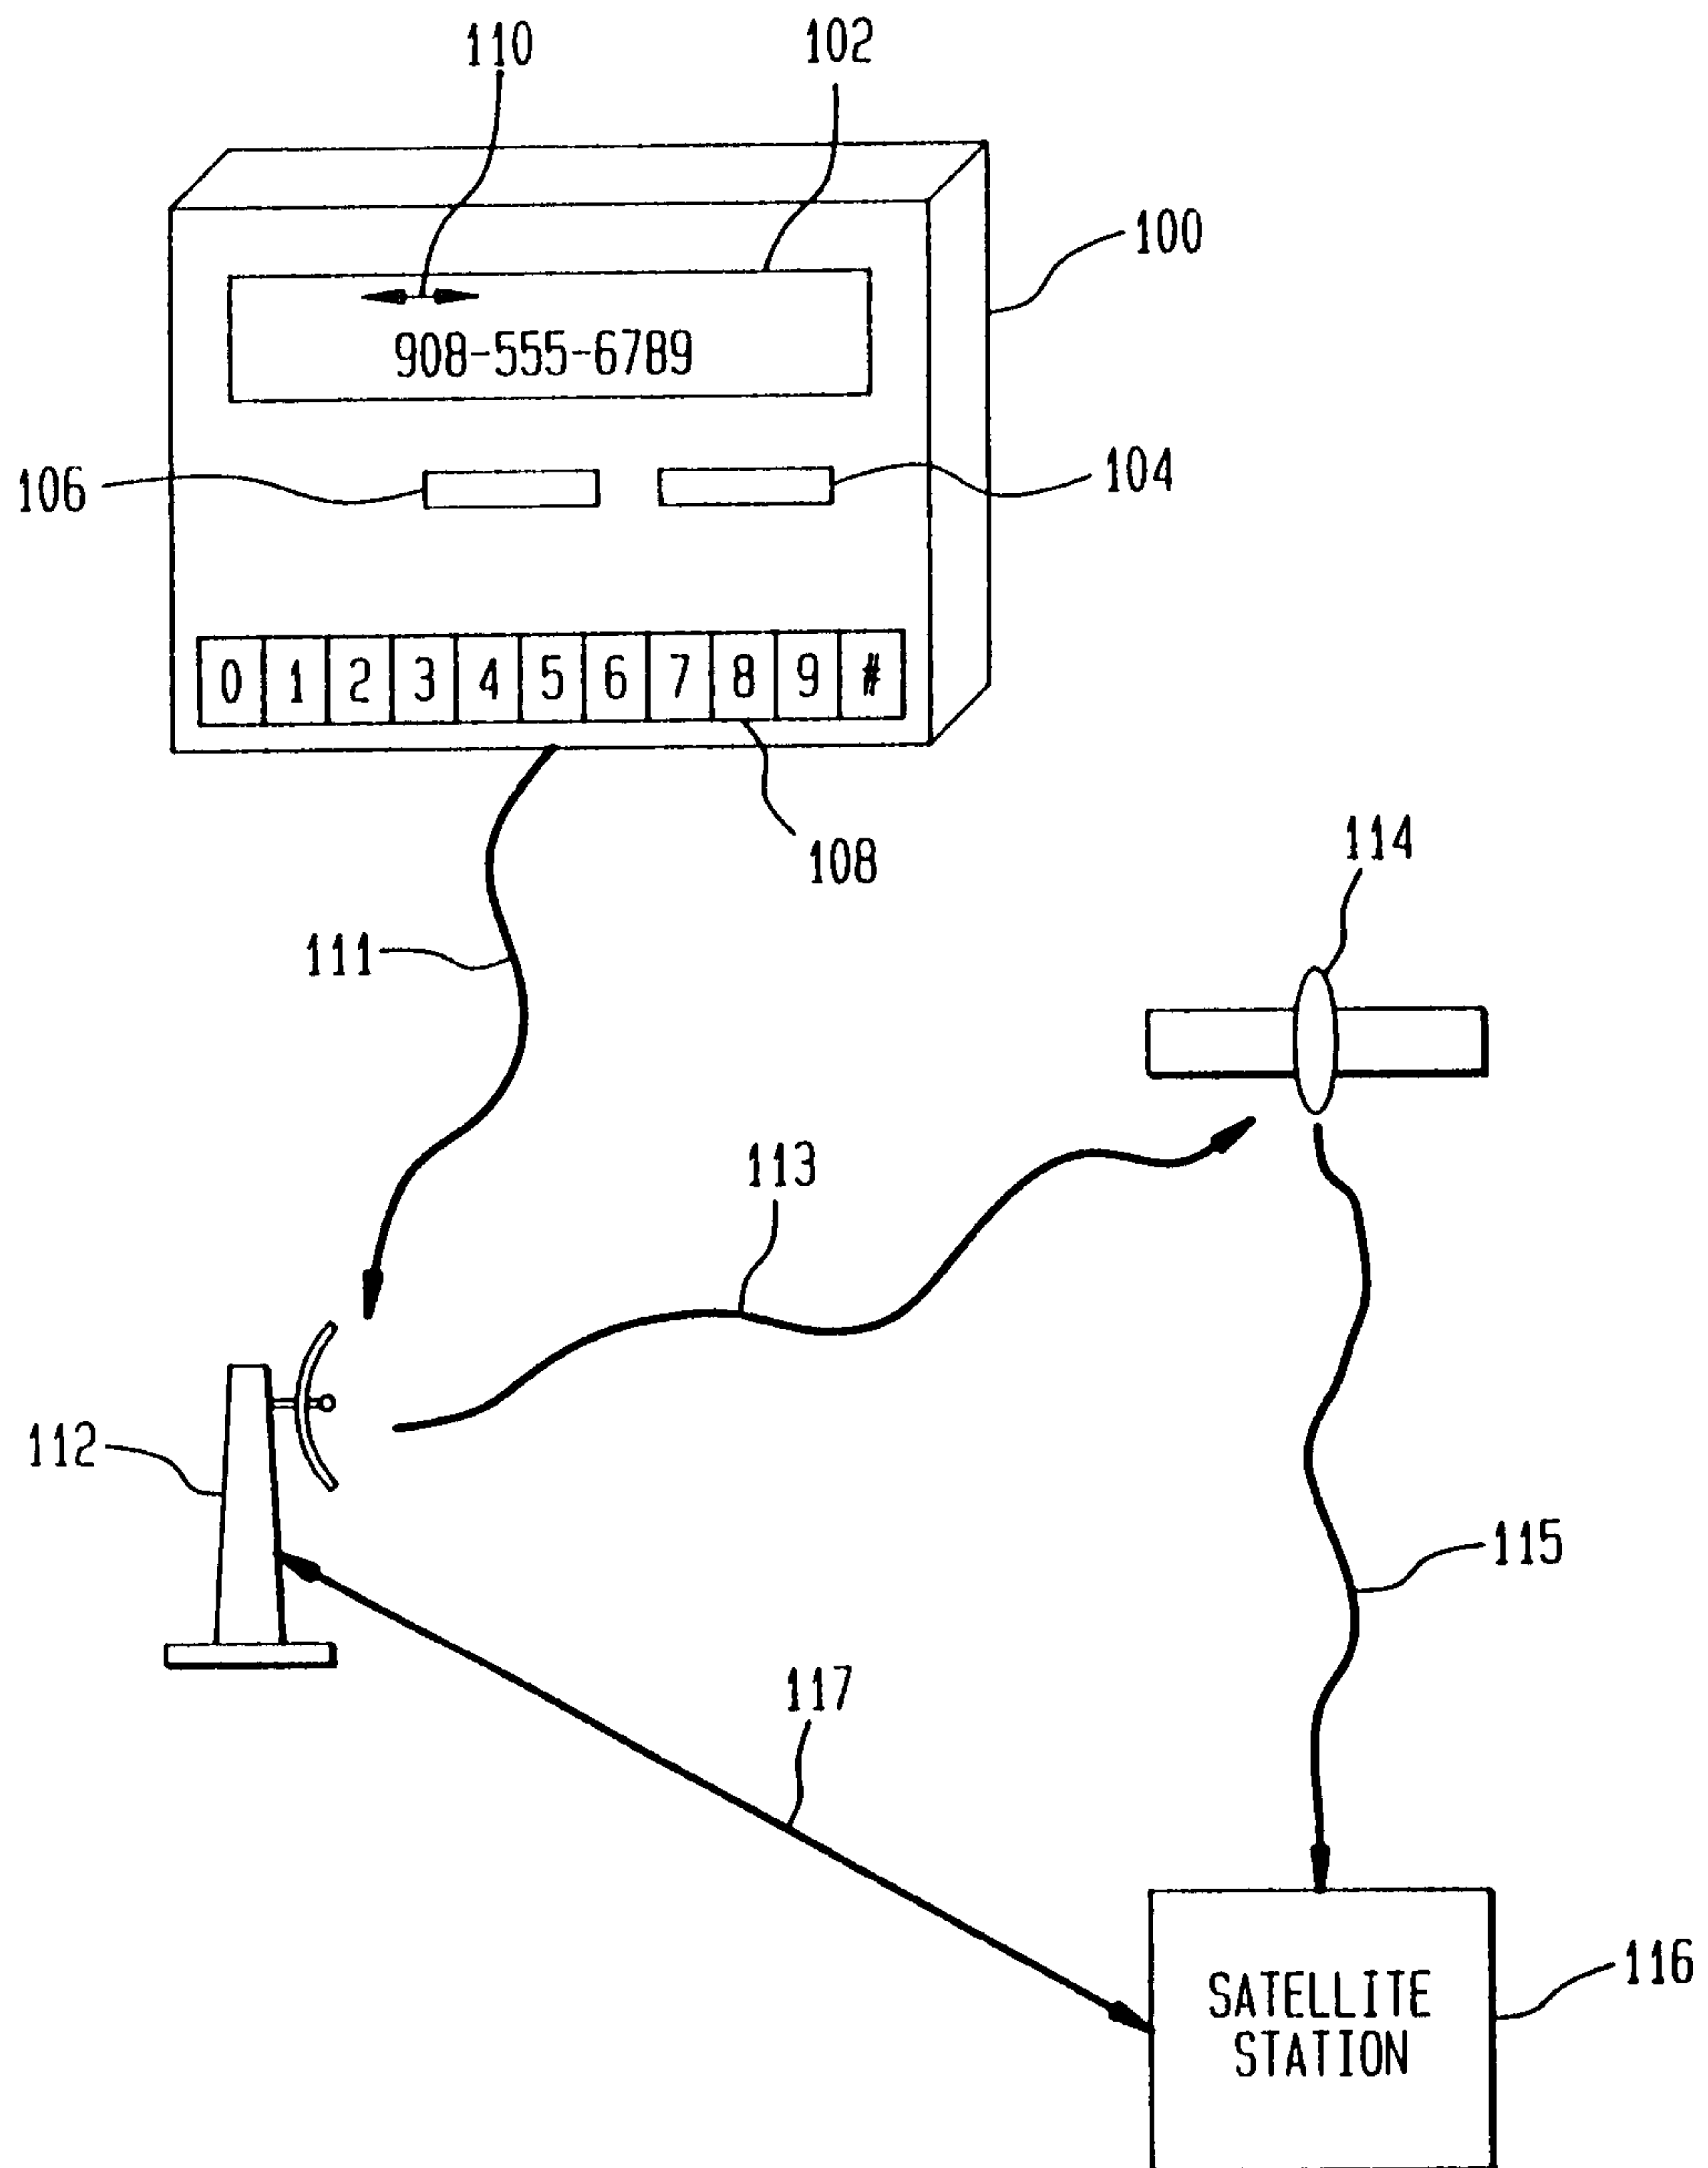


FIG. 4

