




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01C 3/06, H01B 7/00	A1	(11) International Publication Number: WO 95/12205 (43) International Publication Date: 4 May 1995 (04.05.95)
(21) International Application Number: PCT/US94/12275 (22) International Filing Date: 24 October 1994 (24.10.94) (30) Priority Data: 08/145,980 29 October 1993 (29.10.93) US (71) Applicant: SPLITFIRE, INC. [US/US]; 4065 Commercial Avenue, Northbrook, IL 60062 (US). (72) Inventors: YOCHUM, Edwin, L.; 11829 Maple Road, Plymouth, IN 46563 (US). OLSON, Richard, H.; 15405 Tuxedo Drive, Plymouth, IN 46563 (US). (74) Agents: PLOTECHER, Gary, R. et al.; Whyte Hirschboeck Dudek S.C., Suite 2100, 111 East Wisconsin Avenue, Milwaukee, WI 53202 (US).		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LT, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ). Published <i>With international search report.</i>

(54) Title: IMPROVED MULTIPLE-CORE ELECTRICAL IGNITION SYSTEM CABLE**(57) Abstract**

A failure-resistant electrical ignition system cable (10) comprises first and second terminal contacts (28 and 30) for contacting a source of ignition pulses and contacting the predetermined destination of these pulses, respectively; a plurality of flexible ignition conductors (16 and 18) connected between the first and second terminal contacts, each of the ignition conductors being capable of electrically communicating the ignition pulses between the terminal contacts, each of the ignition conductors comprising an electrically-inert center (20), an elongated conductive wire (22) spirally and interstitially wound around the center for substantially the full length thereof, each of the ignition conductors then being twisted about each other so as to provide repeated electrical contacts of the conductive wire of each whereby electrical continuity between the terminal contacts may be maintained despite the occurrence of one or more electrical discontinuities; the outer exposed surfaces of the twisted ignition conductors being electrically insulated by a flexible insulating medium (26). The cable may optionally include a concentric reinforcing braid (32) intermediate the ignition conductors and the outer surface of the ignition system cable.

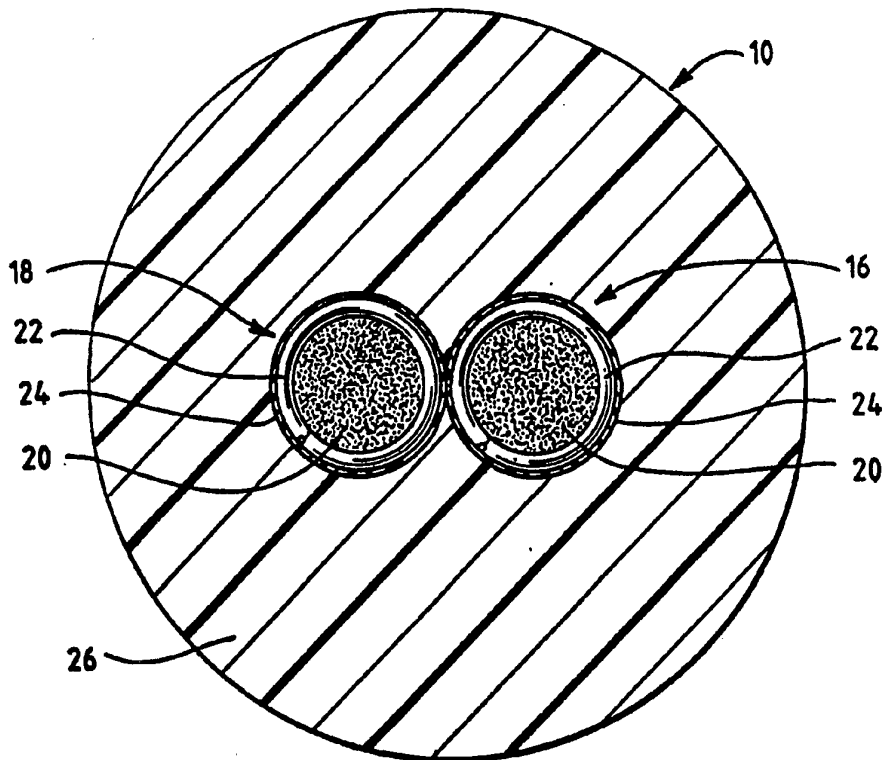

The cable may optionally include a concentric reinforcing braid (32) intermediate the ignition conductors and the outer surface of the ignition system cable.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

IMPROVED MULTIPLE-CORE ELECTRICAL IGNITION SYSTEM CABLEBACKGROUND OF THE INVENTIONField of the Invention

This invention relates to cables for a variety of
5 electrical ignition systems. Specifically, it relates to
improved electrical-pulse-carrying cables having
electromagnetic-radiation-suppression characteristics
which can be efficiently manufactured using conventional
techniques, are failure resistant and otherwise have
10 enhanced operating characteristics. While the present
invention will be described primarily in connection with
its applicability to automotive ignition systems, it is
not limited thereto as those skilled in the art will
readily recognize.

15

Discussion of the Prior Art

Electrical cables for carrying pulsating currents
must meet a number of requirements, sometimes
conflicting, including the reliable delivery of the
20 electrical pulse from where it is generated, e.g., the
ignition coil of a car, to where it is employed, e.g.,
the spark plug of an internal combustion engine. As has
been long recognized, however, the electromagnetic field
generated by the electrical pulses must be suppressed so
25 as not to interfere with other commonly encountered
electronic devices, including, for example, radio and
telephone communication systems, but particularly on-
board automotive devices.

Prior-art electromagnetic suppression cables have
30 successfully coped with the electromagnetic radiation
problem but occasional breaks in the lengthy spirally-
wound metal conductors employed in many of such cables
due to deterioration, fatigue, vibration, mechanical
stress or the like may lead to cable failure or
35 unshielded sparking or both. Thus, a cable may fail to

perform its basic function of conducting the electrical pulse, or such conduction may be accompanied by unacceptable electromagnetic interference. In the case of an automotive ignition cable, a break in the wire may
5 result in the failure of the spark plug to fire, rendering the associated cylinder inoperative, or unsuppressed sparking, resulting in undesired interference, as those skilled in the art are fully aware.

10 Periodic routine checking of prior art ignition cables having suppression characteristics will not necessarily reveal a potential for incipient wire failure. As a result, in the case of motor vehicles, the first sign of wire failure may be cylinder-firing
15 disruption or failure or excessive electromagnetic interference. Such failures may occur at inconvenient times or inconvenient locations, resulting in unscheduled costly and untimely maintenance requirements.

20 Objects of the Invention

It is therefore a general object of the present invention to cope with these shortcomings of prior-art ignition cables.

It is another general object to provide an improved
25 ignition system cable having enhanced failure resistance.

It is another object to provide an ignition cable having electromagnetic suppression characteristics which will continue to perform satisfactorily even in the event of wire discontinuity, including multiple discontinu-
30 ities.

It is another object to provide an ignition cable of improved reliability which can be routinely checked for incipient failure prior to inoperativeness or loss of electromagnetic suppression characteristics.

35 It is a specific object of the present invention to provide an ignition cable of superior strength without

undue sacrifice of flexibility, including multiplane flexibility, which cable also appears like prior-art cables so as not to cause undue concern or puzzlement by unskilled installers.

5 It is still another object to provide an improved ignition cable which lends itself to manufacture by conventional techniques, may be employed with conventional end connectors and can be installed and employed in the same manner as prior-art ignition cables.

10 These and other objects of the present invention will become apparent from the description hereinafter set forth.

15 SUMMARY OF THE INVENTION

These objects are achieved by a multiple-core electrical ignition system wherein the multiple cores are disposed in such a manner as to assure continued acceptable performance despite the existence of one or
20 more discontinuities in the conductive wires employed therein. The improved failure-resistant electrical system cable comprises first and second terminal contacts for electrically-contacting both a source of ignition pulses and the predetermined destination thereof,
25 respectively. A plurality of flexible ignition conductors are connected between the first and second terminal contacts and are disposed with respect to each other to achieve greater reliability than merely two parallel paths, as hereinafter set forth.

30 Each of the ignition conductors are individually capable of electrically communicating the ignition pulses between the first and second terminal contacts, and each has electromagnetic-radiation-suppression characteristics. Each of the ignition conductors
35 comprises an electrically-inert center and an elongated conductive wire spirally and interstitially wound around

the center for substantially the full length so as to provide a continuous electrical path for electrically communicating the ignition pulses between the first and second terminal contacts. As will be apparent to those skilled in the art, the combination of the spiral winding and inherent electrical resistance of the elongated conductive wire is designed to impart desired electromagnetic-suppression characteristics to the ignition conductors.

10 To achieve a level of reliability greater than that associated with simply having a plurality of flexible ignition conductors disposed in parallel relationship between the first and second terminal contacts, each of the ignition conductors are generally-helically twisted
15 about each other so as to provide at least repeated, if not continuous, electrical contact of the elongated conductive wire of each with each other along the respective lengths of each. This greatly enhances the probability of electrical continuity between the terminal
20 contacts despite the undesired occurrence of one or more electrical discontinuities along the elongated conductive wire of one or more of the ignition conductors.

As is apparent, electrical discontinuities or breaks in the spirally-wound conductive wire of all of the
25 ignition conductors will not necessarily cause electrical failure of the cable unless such breaks unlikely occur at the same electrical locations along each of the conductive wires. Moreover, absent such total failure, the presence of breaks in any of the conductive wires can
30 be detected by changes in the resistance between the terminal contacts. Each of the wires are in electrical parallel relationship with the others and any break in one of them would increase the measured resistance between the terminal contacts. Thus, the potential
35 problem can be detected and remedied (typically by replacement of the cable) during routine maintenance

checks. In contrast, prior art cables give no such early warning, the first indication being failure of conduction or failure of electromagnetic suppression, often in situations where such failures can not be readily remedied.

The helically-twisted ignition conductors are, of course, somewhat longer than the single conductor of prior-art ignition cables of comparable length. The twisted disposition provides longitudinal resilience to the conductor (and thus less tendency to rupture), in addition to the aforesaid advantage of greater electrical integrity. The helical twisting of the wires also has the advantageous result of a combination which is flexible in all planes, in contrast to a non-twisted combination of parallel conductors having single-plane or otherwise limited flexibility.

Between the terminal contacts the twisted ignition conductors of the present invention are enclosed within a flexible insulating medium which electrically insulates the outer exposed surfaces of the twisted ignition conductors substantially the full length thereof. In practice, the flexible insulating medium is extruded around the ignition conductors. This results in a unitary ignition system cable of essentially conventional exterior appearance but of greater reliability.

The flexible insulating medium may be opaque and of any desired color. The flexible insulating medium may optionally be translucent or transparent so that the plurality of helically-twisted ignition conductors is visible. This may be advantageous in readily identifying the type of cable to the purchaser or installer. Color coding of the conductors may also enhance appearance and marketability.

An attribute of the present invention is the fact that each of the plurality of ignition conductors may be of essentially conventional design whereby they lend

themselves to conventional manufacturing techniques. While as many as three or more of the flexible ignition conductors can be employed in the practice of the present invention, only two are required in the presently-
5 preferred automotive spark plug cable embodiment.

As indicated, each of the ignition conductors may be of conventional design, that is, the single ignition conductor of prior-art cables. In a preferred embodiment, each comprises an electrically-inert center
10 comprising, for example, elongated strands of fiberglass or Kevlar (a DuPont aramid fiber), or a combination of both. The Kevlar enhances the strength of the center and thus the cable as a whole. In the automotive spark plug cable embodiment, such inert core may be generally
15 circular in cross section, typically having a diameter of about 0.02" to 0.10", e.g., about 0.05".

The elongated conductive wire which is spirally and interstitially wound around the electrically-inert center, typically about 50-150 spirals per inch, may
20 comprise, for example, stainless steel or nickel-copper alloy, which are well known to those skilled in the art. In a specific automotive spark plug cable embodiment the wire may typically comprise 403 stainless steel wire having a diameter corresponding to about 39 AWG.

25 In a preferred embodiment, the conductive wire of at least one of said ignition conductors is at least partially and preferably completely coated with a conductive acrylic or conductive latex. Such coating tends to cement the conductive wire into place around the
30 inert center during further steps in the manufacturing process. Typically, the conductivity of the acrylic or latex coating is provided by the carbon black content thereof whereby the coating can become part of the electrical circuit, if need be. The coating may
35 optionally contain ingredients which assist during

manufacture in terminating the cable, e.g., during cutting and stripping of the insulation. Each conductor typically has a diameter in the range of about 0.025" to 0.140", e.g., about 0.060.

5 The helical twisting of each of the conductors about each other is an essential element of the present invention. In the automotive ignition cable embodiment, the twists number about 5 to 25 per foot, e.g., about 10 to 20 per foot, preferably about 15.

10 The outer insulating material may also be of conventional origin. In a preferred embodiment, silicon rubber or EPDM (Ethylene Propylene Diene Monomer) insulating material may be employed. The diameter of the resulting insulated cable is typically in the range of
15 about 0.20" to 0.40", e.g., about 0.32".

 In another preferred embodiment of the present invention a concentric reinforcing braid, e.g., braided fiberglass or equivalent, is employed intermediate the plurality of flexible ignition conductors and the outer
20 surface. This embodiment is described in further detail in connection with the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

 The present invention may be more clearly understood
25 from the following description of a specific and preferred embodiment read in conjunction with the accompanying drawings, wherein:

 FIG. 1 is an overall view, partially cutaway, of a preferred embodiment of the present invention employed as
30 a part of a spark plug ignition cable;

 FIG. 2 is a highly-magnified cross-sectional view taken along the line 2-2 of FIG. 1;

 FIG. 3 is a view of the ignition conductors of the present invention with the opaque flexible insulation
35 medium and the connector insulators of FIG. 1 removed therefrom, and illustrating the helically-twisted

disposition of the ignition conductors between the terminal contacts; and

FIG. 4 is a highly-magnified cross-sectional view similar to that of FIG. 2 showing an alternative embodiment, including a reinforcing braid and other flexible jacket or sheath.

It should be recognized that because certain elements depicted in these drawings differ so substantially in actual size, the relative dimensions may not necessarily be to the same scale. Any such apparent inconsistencies assist, however, in readily portraying and understanding the present invention.

DETAILED DESCRIPTION OF THE DRAWINGS

Referring to FIG. 1, the preferred embodiment of the ignition system cable of the present invention comprises cable portion 10 having first and second terminal contacts (not shown) at the left and right extremities, as viewed in FIG. 1. These contacts are housed within the ignition coil connector insulator 12 and spark plug connector insulator 14, both of which may be of conventional design well known to those skilled in the art.

Typically, cable portion 10 may have a length between connector insulators 12 and 14 of less than a foot to several feet or more. Connector insulators 12 and 14 comprise rubber or rubber-like protective insulation which is shaped and otherwise designed to perform the insulation function and maintain the integrity of the connection in the particular ignition system in which it is employed.

The cutaway portions adjacent the center of FIG. 1 show a plurality of flexible ignition conductors adjacent the center which are two in number in the illustrated embodiment. The invention, however, is not necessarily

limited thereto. Details of these ignition conductors are discussed in connection with FIGs. 2 and 3.

Referring to the highly-magnified cross-sectional view of FIG. 2, electrical ignition system cable 10 comprises flexible ignition conductors 16 and 18, which in the illustrated embodiment are identical but need not be. They comprise inert core 20 comprising a multiplicity of elongated strands of glass and Kevlar fibers, the particular size and configuration thereof being well known to those skilled in the art. While the cross-sectional configuration of the electrically-inert center is shown as circular, such cross section may vary somewhat depending upon the manufacturing technique, whether the conductor is flexed, and the like.

Spirally and interstitially wound around the inert center 20 is an elongated conductive wire 22. Each of these wires 22 is sized so as to be individually electrically capable of communicating the ignition pulses to be carried by the wire.

As will be apparent from FIG. 3, the flexible ignition conductors 16 and 18 are helically twisted about each other whereby wires 22 are in repeated or substantially continuous electrical contact along the respective lengths of each. In the embodiment of FIG. 2, however, wire 22 of conductors 16 and 18 are coated, continuously or at least partially with an electrically-conductive coating 24. This coating tends to stabilize the positioning of conductors 16 and 18 and may be formulated to otherwise assist in the manufacture of the cable particularly when attaching terminal contacts thereto.

In a particular embodiment, coating 24 comprises a conductive acrylic or a conductive latex or equivalent. Limited conductivity thereof is imparted by its carbon black content or other suitable material. While the inherent resistivity of the coating may be greater than

the underlying wire, the conductivity is more than sufficient to establish a conductive path between the wires 22 in the event of a break or breaks therein or substantial increase in resistance thereof due to wire deterioration, partial rupture or the like. Accordingly, while spirally wound wires 22 are in electrical parallel relationship, they in effect provide a multiplicity of cross paths between each other throughout their entire length.

In effect, the twisting of the conductors can be considered a "safety twist". As already indicated, this assures that electrical integrity is maintained despite one or more breaks in either or both of wires 22. Should portions of wires 22 be electrically segregated by breaks, the presence of such breaks may be detected by changes (increases) in resistance between the contacts during routine maintenance checks.

Conductors 16 and 18 are housed in a flexible medium 26 to insulate and protect the conductors and otherwise impart an attractive and user-friendly appearance and configuration thereto. As already indicated, flexible insulating medium 26 may comprise a silicon rubber, EPDM insulating material or equivalent, which is preferably added by extrusion techniques. In the embodiment of the drawings the flexible insulating medium 26 is opaque; optionally, it may be transparent or translucent, as already indicated.

Referring to FIG. 3, wires 16 and 18 are helically twisted along their entire length between ignition coil contact 28 and spark plug contact 30 which are housed within connector insulators 12 and 14 (FIG. 1), respectively. As with connector insulators 12 and 14, the configuration of contacts 28 and 30 may be of conventional design to match the particular installation requirements.

Referring to the reinforced embodiment of FIG. 4, the flexible ignition conductors 16 and 18 and flexible insulating medium 26 are substantially the same as in FIG. 2. Insulating medium 26, however, is radially
5 narrower and is encased in a concentric, annular reenforcing braid 32 of suitable flexible material, e.g., braided fiberglass or other strengthening equivalent. A protective outer annular jacket or sheath 34 of flexible insulating material provides the external surface of
10 cable 10. As those skilled in the art will recognize, the outer annular jacket may also be added by extrusion techniques, resulting in a plurality of extrusion steps.

Sheath 34 may comprise the same flexible insulating material as medium 26, e.g., silicon rubber, EPDM or
15 equivalent polymeric material. It may, however, comprise other suitable media having desired physical and aesthetic properties. If sheath 34 and medium 26 comprise the same flexible material, the cables of FIGS. 2 and 4 are in effect identical except for the presence
20 of reinforcing braid 32.

As is apparent from the above description, the failure-resistant electrical ignition system cable of the present invention copes with shortcomings of prior art cables and provides greater reliability and performance
25 without necessitating the use of costly or experimental materials or manufacturing techniques. It achieves various objects of the present invention as previously set forth.

Actual viewing of the resulting spark produced by
30 the cable of the present invention under laboratory conditions also reveals a superior-appearing spark as compared with prior-art single-conductor cables. Such apparent superiority is presently unexplained and whether it results in superior ignition performance of systems
35 activated or controlled thereby under actual operating conditions is being determined.

12

It is to be understood that any allowed claims based on this application are to be accorded a range of equivalents commensurate in scope with the advance over the prior art.

5

Having described in the invention, what is claimed is:

1. A failure-resistant electrical ignition system
5 cable comprising:

(a) a first terminal contact for electrically-
contacting a source of ignition pulses;

(b) a second terminal contact for electrically
contacting the predetermined destination of said
10 ignition pulses;

(c) a plurality of flexible ignition
conductors connected between said first and said
second terminal contacts,

(i) each of said ignition conductors
15 being individually capable of electrically-
communicating said ignition pulses between said
first and said second terminal contacts and
having electromagnetic-radiation-suppression
characteristics,

(ii) each of said ignition conductors
20 comprising an electrically-inert center and an
elongated conductive wire spirally and
interstitially wound around said center for
substantially the full length thereof so as to
25 provide a continuous electrical path for
electrically-communicating said ignition pulses
between said first and said second terminal
contacts,

(iii) each of said ignition conductors
30 being generally-helically twisted about each
other so as to provide at least repeated
electrical contacts of the elongated conductive
wire of each with each other along the
respective lengths of each, whereby electrical
35 continuity between said terminal contacts may
be maintained despite the occurrence of one or

more electrical discontinuities along the elongated conductive wire of one or more of said ignition conductors; and

(d) a flexible insulating medium electrically
5 insulating the outer exposed surfaces of the twisted ignition conductors substantially the full length thereof between said first and said second terminal contacts to form a unitary ignition system cable.

10 2. The ignition system cable of claim 1, wherein the elongated conductive wire of at least one of said ignition conductors is at least partially coated with an electrically-conductible coating.

15 3. The ignition system cable of claim 2, wherein said electrically-conductible coating comprises a conductive latex.

20 4. The ignition system cable of claim 1, wherein the electrically-inert centers of said ignition conductors comprises elongated strands of glass fibers and Kevlar fibers.

25 5. The ignition system cable of claim 1, wherein said elongated conductive wire comprises stainless steel wire.

30 6. The ignition system cable of claim 1, wherein said flexible insulating medium comprises EPDM.

7. The ignition system cable of claim 1, wherein said flexible insulating medium comprises silicon rubber.

35 8. The ignition system cable of claim 1, wherein said flexible insulating medium has sufficient light

15

transmissibility to reveal the helically-twisted ignition conductors to the viewer.

9. The ignition system cable of claim 1 including
5 a concentric reenforcing braid intermediate said ignition conductors and the exposed surface of said ignition system cable.

10. The ignition system cable of claim 9 wherein
10 said reenforcing braid comprises braided fiberglass.

11. The ignition system cable of claim 9 including an annular sheath of flexible insulation exterior to said reenforcing braid.

15

12. The ignition system cable of claim 11 wherein said annular sheath and said flexible insulating medium have the same composition.

20 13. A failure-resistant electrical ignition system cable comprising:

(a) a first terminal contact for electrically-contacting a source of ignition pulses;

(b) a second terminal contact for electrically
25 contacting the predetermined destination of said ignition pulses;

(c) a plurality of flexible ignition conductors connected between said first and said second terminal contacts,

30 (i) each of said ignition conductors being individually capable of electrically-communicating said ignition pulses between said first and said second terminal contacts and having electromagnetic-radiation-suppression
35 characteristics,

5 (ii) each of said ignition conductors comprising an electrically-inert center and an elongated conductive wire spirally and interstitially wound around said center for substantially the full length thereof so as to provide a continuous electrical path for electrically-communicating said ignition pulses between said first and said second terminal contacts,

10 (iii) each of said ignition conductors being generally-helically twisted about each other so as to provide at least repeated electrical contacts of the elongated conductive wire of each with each other along the
15 respective lengths of each, whereby electrical continuity between said terminal contacts may be maintained despite the occurrence of one or more electrical discontinuities along the elongated conductive wire of one or more of
20 said ignition conductors,

(iv) at least one of said ignition conductors being at least partially coated with an electrically-conductible coating; and

25 (d) a translucent flexible insulating medium electrically insulating the outer exposed surfaces of the twisted ignition conductors substantially the full length thereof between said first and said second terminal contacts to form a unitary ignition system cable.

30

14. The ignition system cable of claim 13, wherein said electrically-conductible coating comprises a conductive latex.

35 15. The ignition system cable of claim 13, wherein the electrically-inert centers of said ignition

17

conductors comprises elongated strands of glass fibers and Kevlar fibers.

16. The ignition system cable of claim 13, wherein
5 said elongated conductive wire comprises stainless steel wire.



17. The ignition system cable of claim 13, wherein
said flexible insulating medium comprises EPDM.
10

18. The ignition system cable of claim 13, wherein
said flexible insulating medium comprises silicon rubber.

19. The ignition system of claim 13, including a
15 concentric reenforcing braid intermediate said ignition
conductors and the exposed surface of said ignition
system cable.


20. The ignition system of claim 13 wherein said
20 reenforcing braid comprises braided fiberglass.

1/2

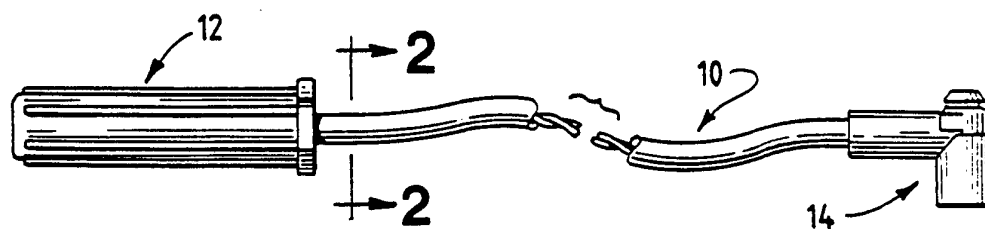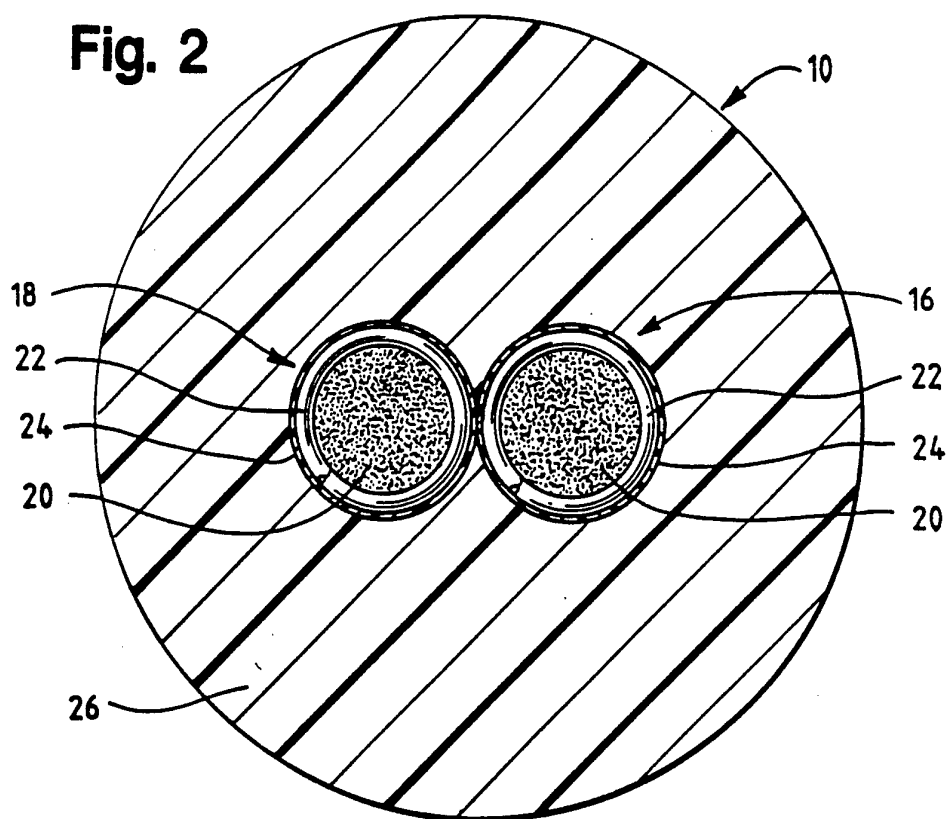Fig. 1**Fig. 2****Fig. 3**

2/2

Fig. 4

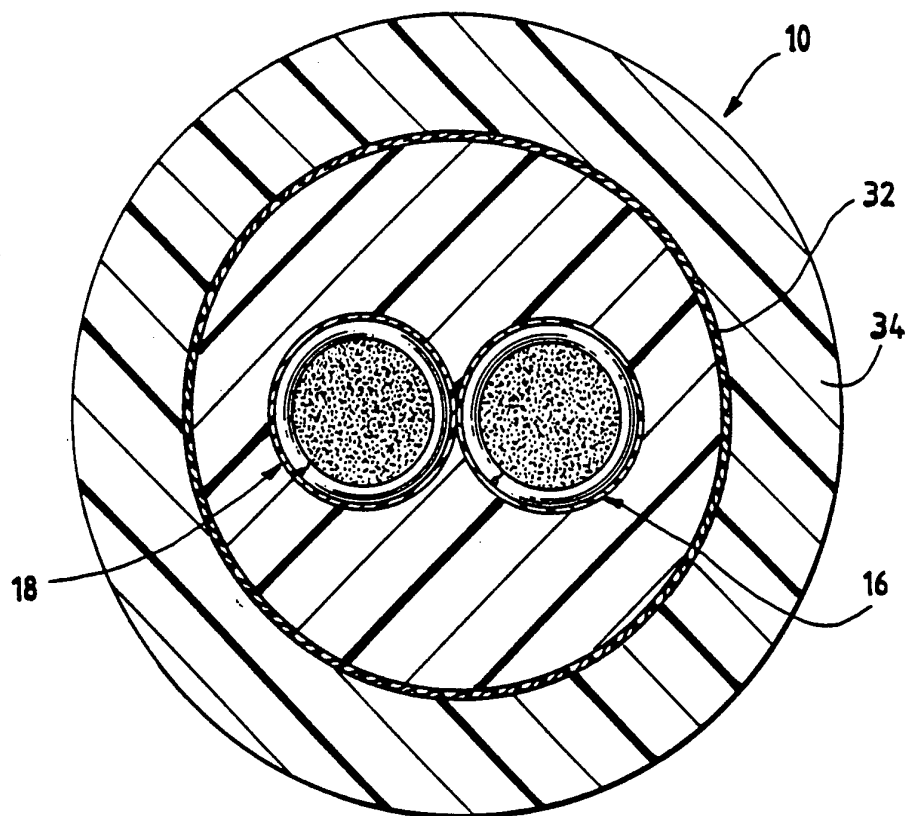

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/12275**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) :HO1C 3/06; HO1B 7/00

US CL :174/113C

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 174/355M, 120R, 120SC, 131A; 338/214

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 5,061,821 (NERCESSIAN) 29 October 1991, see entire document.	
A	US, A, 4,894,490 (FUJIMOTO) 16 January 1990, see entire document.	
A	US, A, 4,700,171 (COFFEY ET AL.) 13 October 1987, see entire document.	
A	US, A, 4,683,349 (TAKEBE) 28 July 1987, see entire document.	
A	US, A, 4,514,712 (MCDUGAL) 30 April 1985, see entire document.	
A	US, A, 3,680,027 (VITALE) 25 July 1972, see entire document.	

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance		
"E" earlier document published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search

08 DECEMBER 1994

Date of mailing of the international search report

JAN 20 1995

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

MORRIS NIMMO

Telephone No. (703) 308-3113

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US94/12275

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 2,577,077 (FORSBERG) 04 December 1951, see entire document.	
A	US, A, 2,438,006 (GUSTAFSON) 16 March 1948, see entire document.	
A	US, A, 534,596 (ATWOOD ET AL.) 19 February 1895, see entire document.	
A	GB, A, 2,023,328 (FISCHER ET AL) 28 December 1979, see entire document.	