

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 March 2006 (02.03.2006)


PCT

(10) International Publication Number
WO 2006/022879 A1

- (51) International Patent Classification: ⁷ **G01C 15/00**, G01S 5/14, 1/00
- (21) International Application Number: PCT/US2005/012139
- (22) International Filing Date: 11 April 2005 (11.04.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 10/898,156 23 July 2004 (23.07.2004) US
- (71) Applicant (for all designated States except US): **TRIMBLE NAVIGATION LIMITED** [US/US]; 749 North Mary Avenue, Sunnyvale, CA 94086 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **NICHOLS, Mark, E.** [NZ/NZ]; 279 Woolridge Road, Christchurch (NZ). **CAIN, Gary, L.** [US/US]; 4498 Hollywood Road, Springfield, OH 45502 (US). **JANKY, James, M.** [US/US]; 894 Lockhaven Drive, Los Altos, CA 94024 (US).
- (74) Agents: **JIVIDEN, William, A.** et al.; Dinsmore & Shohl LLP, Suite 1300, One Dayton Centre, One South Main Street, Dayton, OH 45402-2023 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: COMBINATION LASER DETECTOR AND GLOBAL NAVIGATINO SATELLITE RECEIVER SYSTEM

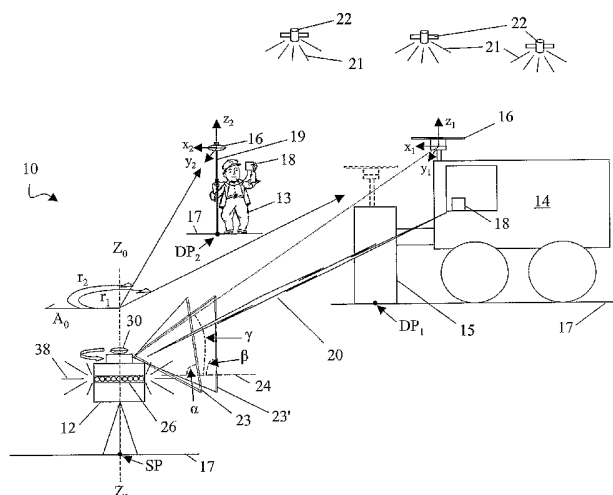

(57) Abstract: A position tracking and control system for determining and providing an improved position estimate using signals from a global navigation satellite system, comprising a rotary laser system emitting two or more fan shaped laser beams which rotate about a vertical axis, and the inclination angles of the beams differs from each other; a combination laser detector and global navigation satellite antenna having an antenna element with a nominal phase center orientated along a first axis, said antenna element receives the signals from the global navigation satellite system and provides a first position estimate; and having at least one optical sensor provided at a predetermined and fixed spatial separation from said nominal phase center, said optical sensor provides data correlating to the detection of the fan-shaped lasers beams; and a processing unit processing said first position estimate and said data to provide the improved position estimate.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

POSITION TRACKING AND CONTROL SYSTEM WITH COMBINATION LASER DETECTOR AND GLOBAL NAVIGATION SATELLITE RECEIVER SYSTEM

The current invention relates generally to position tracking and machine control systems, and in particular to a combination laser detector and global navigation satellite antenna useful in position tracking and machine control systems.

In prior art related to position tracking and machine control systems, global navigation satellite systems, like GPS and GLONASS have been used extensively to determine position coordinates facilitating automated control of a mobile unit. In the future, the European GALILEO system will have similar capabilities. An autonomous navigational system that includes a satellite receiver and a navigational computer can achieve a 10-meter level of accuracy in the position determination of a mobile unit using solely the satellite signals. Differential navigational systems that utilize differential corrections in addition to the satellite signals can determine the positional information to within a meter range of accuracy. Real-time kinematic (RTK) navigational systems that are capable of utilizing in real time not only code but also carrier information transmitted from the satellites can achieve centimeter level accuracy in the position determination of a mobile unit.

However, a level of accuracy under a centimeter is still beyond the reach of typical satellite-based navigational systems. In an attempt to achieve very high accuracy, prior art solutions have been to use rotating laser-based systems to define the plane level (Z-plane) to millimeter level accuracy. However, these prior art laser-based systems cannot be used for the purposes of three dimensional navigation of mobile objects because they are configured to determine only one (Z) coordinate of the mobile object with great accuracy. Improvements are therefore still needed in the art.

Complicating the effort to achieve millimeter level accuracy for all three coordinate positions (x, y, z) of a mobile unit is that a global navigation satellite receiver is typically designed to compute the location of its antenna. This means that in order to capture the location of an object of interest, an offset from the antenna's location must be applied to determine the horizontal (x, y) coordinates of the object of interest. An additional offset must also be applied to the location of the object of interest if a laser receiver is used to

-2-

determine its vertical (z) coordinate. Typically, these offsets are manually entered into the control system and are based on manually measuring the locations of the antenna and laser receivers relative to the object of interest. For example, operators must manually measure the locations of the satellite antenna and laser receivers mounted separately on an excavator, to the excavator's bucket tip and enter those offsets into the excavator's control system. However, knowing precisely the offsets to be used for the satellite antenna and the laser receivers is an essential part of doing the most precise surveying possible. Manually taking and entering such measurements may introduce significant errors in the positional (x, y, z) computations performed by the control system in order to determine the location of an object of interest.

Additional errors may further creep into the positional (x, y, z) computation as global navigation satellite antennas are calibrated under somewhat ideal conditions. Typically, *in situ* calibrations are performed at a consistent height, and on flat terrain with no reflectors, other than the ground, that may cause unwanted multipath reflections leading to azimuthal asymmetries. Accordingly, for use at a construction site, the conditions under which these calibrations were determined are a somewhat unreasonable approximation of the actual conditions under which antennas are used at a construction site. Under ideal circumstances, every antenna would be individually calibrated at its own site. While this is possible and might be accomplished for permanent global navigation satellite tracking sites, it is impractical for sites that are only infrequently and briefly occupied, such as a plot of land being worked.

It is against the above mentioned background, that the present invention provides a number of unobvious advantages and advances over the prior art. In particular, the present invention discloses a combination laser detector and global navigation satellite antenna which is provided in a single package that allows a user to realize high precision control of mobile units, including high precision machine control.

With the combination laser detector and global navigation satellite antenna, the laser height reference detected by the laser detector is provided in a known and fixed relationship with the nominal phase center of the global navigation satellite antenna. In one embodiment, the phase center of the GPS antenna and an optical sensor of the laser detector are provided on the same plane, and in another embodiment, within a known and

-3-

prescribed vertical and horizontal separation distance. Accordingly, the offsets for these elements are set by the manufacturer, alleviating users from setting up, measuring (and guessing), and entering the offset data between separate laser detectors and satellite antennas. Each mobile unit equipped with a combination laser detector and global navigation satellite antenna can use the fixed and known offset data to improve its position determination capabilities. An inclinometer may also be incorporated into the combination laser detector and global navigation satellite antenna to provide additional error correcting associated with any pitch and slope of the mobile unit or tool carried by the mobile unit. A heading indicating device may also be included for similar purposes.

The aforementioned advantages of the present invention, as well as additional advantages thereof, will be more clearly understood hereinafter as a result of a detailed description of a preferred embodiment of the invention when taken in conjunction with the following drawings, wherein like elements are indicated by like symbols.

FIG. 1 shows a position tracking and control (PTC) system according to one embodiment of the present invention wherein the PTC system comprises a laser system, one or more mobile units, each having a combination laser detector and global navigation satellite (CLDGNS) antenna and an associated control system, and a communication link.

FIGS. 2-5 depict various embodiments of combination laser detector and global navigation satellite antennas according to the present invention.

The present invention can be best understood by focusing on FIG. 1 that depicts a position tracking and control (PTC) system **10**. The PTC system **10** comprises a laser transmitter system **12**, one or more mobile units, such as a surveyor **13** or a machine **14**, each having a combination laser detector and global navigation satellite (CLDGNS) antenna **16** and an associated processing unit **18**, and having a transmitter for establishing a communication link **20**, preferably a radio link. Signals **21** from a plurality of global navigation satellites **22** orbiting overhead, such as GPS, GLONASS, GALILEO, and combinations thereof, are received by the CLDGNS antenna **16** so that the coordinates of dynamic points in a plot of land **17**, such as points indicated as **DP₁** and **DP₂**, can be determined to a centimeter level of accuracy by the processing unit **18**. As illustrated and for example, dynamic point **DP₁** may be a working element **15** on the machine **14**, such as a grader blade, while dynamic point **DP₂** may be a point at the bottom of a manually

-4-

positioned support **19**, such as a pole, mast, tripod, and the like, being moved about by the surveyor **13**.

In one embodiment, the CLDGNS antenna **16** and the associated processing unit **18** is provided as a man portable integrated positioning system (IPS). In such a man portable integrated positioning system embodiment, the CLDGNS antenna **16** is releasably mountable to the support **19** and interfaces with the processing unit **18** via a cable connection or a wireless connection. In such an embodiment, the processing unit **18** includes a microprocessor or other computing hardware configured to process data from the antenna **16** and to provide an estimate of the position of the antenna **16**. In other embodiments, the processing unit **18**, in addition to providing the features and advantages described herein, may either provide the capabilities of or interface with a conventional survey data collector, such as for example, but not limited to, Trimble's ACU Controller unit, Trimble's TSCe Controller unit, and Trimble's Recon Controller unit. Additionally, in another embodiment, the processing unit **18**, in addition to providing the features and advantages described herein, may either provide the capabilities of or interface with a conventional GPS receiver. As such capabilities of a GPS receiver are well known to those skilled in the art, no further discussion is provided.

In other embodiments, the CLDGNS antenna **16** and the associated processing unit **18** may either provide the capabilities of or interface with a position tracking and machine control system for determining a three dimensional position of the machine **14** and/or the tool **15** carried by the machine. In one illustrative embodiment, the CLDGNS antenna **16** is mounted to the machine **14** and interfaces with the processing unit **18**, being the position tracking and machine control system, via a cable connection or a wireless connection. In other embodiments, the processing unit **18**, in addition to providing the features and advantages described herein, may either provide the capabilities of or interface with a conventional machine guidance and grade control unit, such as for example, but not limited to, Trimble's Sitevision GPS Grade Control System, and Trimble's BladePro 3D Machine Control System.

Millimeter level of accuracy in determining the position of the dynamic points **DP₁** and **DP₂** relative to each CLDGNS antenna **16** is provided by the processing unit **18** which uses information provided by the laser system **12** in its coordinate (x, y, z) position

computation in addition to that from satellites **22**. In one embodiment, the laser system **12** provides at least two diverging or fan-shaped beams **23** and **23'** that rotate about a vertical axis Z_0 above a known stationary point **SP** in the plot of land **17**. The fan-shaped beams **23** and **23'** project from the laser system **12** in non-vertical planes, such that the first fan beam **23** will intersect an arbitrary horizontal reference plane **24** at an angle α , and the second fan shaped beam **23'** will intersect the horizontal reference plane at an angle β .

It is to be appreciated that the fan-shaped beams **23** and **23'**, if rotated at a constant speed about a vertical axis, will activate one after another (with some delay of time therebetween) at least one optical sensor **44** (FIGS. 2-4) of each CLDGNS antenna **16**. Further, it is to be appreciated that in the shown embodiment of FIG. 1, the time delay between activating the optical sensor **44** by each fan-shaped beam **23** and **23'** will increase or decrease as the relative position of a CLDGNS antenna **16** increases above or below the horizontal reference plane **24**, respectively. It is to be appreciated that the CLDGNS antenna **16** can be initialized to any arbitrary horizontal reference plane **24** simply by selecting and entering into the processing unit **18** a detection time delay. Additionally, it is to be appreciated that any detected change by the CLDGNS antenna **16** in the detection time delay is related to an angle γ , which is the angle at which a straight line passing through the optical sensor **44** (FIGS. 2-4) of the CLDGNS antenna **16** and the point of emanation of the fan-shaped beams **23** and **23'** meets the selected arbitrary horizontal reference plane **24**.

As mentioned above, angles α and β are constants. Angle γ is determined by sensing the timing between the illumination of the sensor **44** by the beams **23** and **23'**. The higher the sensor **44**, the greater the delay. It will be apparent that fluctuation in the rotation speed of the fan-shaped beams **23** and **23'** will introduce short term, transient errors. To minimize such errors, the processing unit **18** may be provided with the rotation speed of the laser system **12** via the communication link **20**. The rotation speed may, however, be phase locked to a crystal oscillator, providing sufficient accuracy. Accordingly, knowing the rotation speed, the processing unit **18** can compute the value of angle γ arithmetically from the detected time delay between illumination by the beams **23** and **23'**, and thus the elevation angle of the optical sensor in the CLDGNS antenna **16** above the reference horizontal plane **24** is determined.

-6-

In another embodiment, the laser system **12** is further provided with a plurality of light sources which are strobed at the same point in time during each rotation of the beams **23** and **23'**. Beacon **26** provides a simultaneous 360° flash **38** at a different wavelength than the fan shaped beams **23** and **23'**. By orientating the laser system **12** such that the beacon **26** flashes as the mid point between the fan-shaped beams **23** and **23'** passes a known true heading **A₀**, the processing unit **18** can also compute a relative bearing to the laser system **12** from the time delay between detecting the signal **38** of the beacon and detecting the fan-shaped beams **23** and **23'**.

In still another embodiment, the laser system **12** is provided with a global navigation satellite system (GNSS) receiver **30**. The GNSS receiver **30** can receive and compute its position from the signals **21** provided by the global navigation satellites **22**. A detailed discussion of how to determine a location from such signals is disclosed by U.S. Patent No. 6,433,866, also assigned to Trimble Navigation, LTD, the disclosure of which is herein incorporated fully by reference.

The processing unit **18** in addition to knowing its own position (as computed from the detected satellite signals received and provided by the CLDGNS antenna **16**), is provided also with the known and fixed position of the laser system **12** via the communication link **20**. Using the information provided by the laser system **12** for correlation and error correcting, the processing unit **18** can then computer the coordinate (x, y, z) position of any dynamic point relative to the CLDGNS antenna **16** to a degree of accuracy under a centimeter. A more detail discussion of the computations performed by the processing unit **18** is disclosed by co-pending U.S. Application Serial No. 10/890,037 entitled "COMBINATION LASER SYSTEM AND GLOBAL NAVIGATION SATELLITE SYSTEM", also assigned to Trimble Navigation Limited, the disclosure of which is herein incorporated fully by reference.

It is to be appreciated that the PTC system **10** provides a number of benefits to a potential mobile user by integrating a laser detector and a global navigation satellite antenna. For example, the CLDGNS antenna **16** costs less than separate laser detectors and global navigation satellite antennas because the integrated CLDGNS antenna requires only one set of packaging, and can utilize shared circuitry and wiring, computer memory

-7-

and processing, and a common power supply. Other benefits are disclosed with reference made to FIGS. 2-5 which illustrate various embodiments of the combination laser detector and global navigation satellite antenna according to the present invention.

FIG. 2 illustrates diagrammatically one embodiment of a CLDGNS antenna 16 which provides an antenna element 32 mounted to an electronic housing 34, which in turn is mounted to an end of an elongated support 36, such as a mast. Within the housing 34, the antenna element 32 is coupled to a low noise amplifier (LNA) 38, and a laser detector 40 is coupled to a laser signal processor 42. The laser detector 40 may include a number of optical sensors 44 placed around the periphery of the housing 34. In one embodiment, the optical sensors 44 face generally downward and outward. In this orientation, at least one of the optical sensors 44 will detect the fan-shaped beams 23 and 23' from the laser system 12, and two or more optical sensors 44 will detect the fan-shaped beam some of the time. Each optical sensor 44 can be read independently and its position calculated by the processing unit 18.

In the illustrated embodiment of FIG. 2, the relative positions X_0 , Y_0 , and Z_0 of each optical sensor 44 to the nominal phase center x of the antenna element 32 is known and fixed. Accordingly, transposing the detected laser position of each optical sensor 44 to the nominal phase center x of the antenna element 32 is easily computed arithmetically by the processing unit 18.

The difference in the detected elevation between the three optical sensors 44 provides an indication of tilt, which in turn may be used by the processing unit 18 to compensate for errors that would otherwise result in the calculated position of DP_1 and DP_2 . Additionally, although the antenna tilt angle is important for adjusting the detected laser heights of each optical sensor 44 to the nominal phase center x of the associated antenna element 32, these changes in detected laser heights can also be used to help determine the orientation of the device (such as a grader/bulldozer blade) to which the CLDGNS antenna 16 may be connected. However, if desired, a tilt/heading sensor 46 may be further included in the packaging of the CLDGNS antenna 16 to simplify further the compensation for tilt, error correcting, and device orientation determination.

-8-

In another embodiment of the CLDGNS antenna 16, illustrated by FIG. 3, the electronic housing 34 and the antenna element 32 are protected by a housing or radome 47. A fiber optic pick-up 48 of the laser detector is positioned on the top of the radome 47. The fiber-optic pick-up 48 is small, about 0.25 inches (6 mm) in diameter, as it only needs to collect enough energy to activate the optical sensor 44. The non-metallic fiber optic pick-up 48 is orientated along the Z axis, aligned vertically with the nominal phase center x of the antenna element 32. The laser detector also includes optical fiber 50 coupling the fiber optic pick-up 48 to the optical sensor 44. In this embodiment, the optical sensor 44 is positioned below the antenna element 32. A filter 52 may be optionally provided to filter out light noise received by the fiber optic pick-up 48. This improves the sensitivity of the optical sensor 44 to the energy of the fan-shaped beams 23 and 23' (FIG. 1).

In one embodiment, the fiber optic pick-up 48 comprises a circularly symmetric hyperbolic mirrored surface 54 (FIG. 3a) that catches light from 360 degrees, and reflects it to the optical sensor 44, via the optical fibers 50. In another embodiment, the fiber optic pick-up 48 may comprises a TIR prism 56 (FIG. 3b) which redirects the laser energy to the optical sensor 44, via optical fiber 50. The use of a total internal reflection (TIR) prism 56 requires no metallic coatings to ensure reflectivity, thereby removing all metal from above the antenna element 32. Since the metallic and semi-metallic portions of the optical sensor 44 are located below the antenna element 32, they will not adversely affect the ability of the antenna 16 to pick up the relatively weak satellite signals 21. Cabling 58 is provided through the support 36 to connect the output of the CLDGNS antenna 16 to the processing unit 18 (FIG. 1).

In yet another embodiment, illustrated by FIG. 4, one or more sensors 60 are located below the electronics housing 34, spaced along the support 36. This arrangement for the sensors 60 has the advantage of not interfering whatsoever with the antenna's reception, and also does not affect the location of the nominal phase center x of the antenna element 32. Each sensor 60 may comprise a circularly symmetric hyperbolic mirrored surface or a prism. Because each sensor 60 is below the antenna element 32, fiber optics may not be required since the sensors may be integrated closely with the detectors. A filter 52 may be provided to filter out extraneous energy to improve

-9-

sensitivity to laser light. The output signals from the detectors in all the above disclosed embodiments are coupled to associated processors **42**. The output of processor **42** is included in the output of the CLDGNS antenna **16** and provided to the processing unit **18** for further use and evaluation.

In the embodiment of FIG. 4, the sensors **60** may be provided at precisely known positions along the support **36**. Information provided by the sensors **60** can be used by the processing unit **18** to determine the distance from the transmitter **12** to the sensors **60**. Since computation is well known to those skilled in the art, no further discussion is provided. This coaxial alignment simplifies implementation though non-coaxial implementations are also possible.

In the above disclosed embodiments of the CLDGNS antenna **16** (FIGS. 1-4), each of the laser detectors and the nominal phase center **x** of the antenna element are separated by a known and fixed spatial difference. In one embodiment, the laser detectors and the nominal phase center **x** of the antenna element are aligned generally in the same plane, and in another embodiment, are aligned either co-axially or within a known and prescribed vertical and horizontal separation. In particular, the Z_0 distance (and the X_0 , Y_0 distances, if necessary) of each optical sensor **44** relative to the nominal phase center **x** of the antenna element **32** are factory set. Accordingly, the CLDGNS antenna **16** improves the accuracy of the PTC system **10** by preventing an operator from manually entering a positional error into processing unit **18** due to a miscalculated measurement between the optical sensors of the laser detector and the nominal phase center **x** of the antenna element, which have been separately placed and mounted relative to each other by the operator. For further convenience, the offset data can be automatically entered into the control system as part of the control system's set-up procedure, if desired.

In all the above embodiments, the CLDGNS antenna **16** is illustrated as having either a geodesic or generally flat disc shape. However, it is to be appreciated that other satellite antennas may also be used advantageously with the concepts of the present invention.

Finally, with reference to FIGS. 5a and 5b, embodiments of an improved position estimating system provided by the CLDGNS antenna **16** are illustrated and showing the interface of data streams provided by the CLDGNS antenna **16** to the processing unit **18**.

-10-

In one embodiment, the processor unit or processor **18** is provided separately from the laser receiver **40**, GNSS receiver **45**, and optional tilt and/or heading sensor **46**, wherein their associated data streams **62**, **64**, and **66**, respectively, are inputted remotely (wired or wireless) to the processor **18** as depicted by FIG. 5a. In the embodiment depicted by FIG. 5b, the processor **18** is part of the GNSS receiver **45**, wherein the data streams from the laser receiver **40**, and optional tilt and/or heading sensor **46** are inputted remotely to the processor **18**. Accordingly, it is to be appreciated that the processor or processing unit **18** can be part of a GPS receiver, or other device **68** such as for example, a position tracking and machine control system, a machine guidance and grade control unit, or it can be a separate unit either providing the capabilities of or interfacing with such devices, units, and systems.

Generally, the GNSS receiver **45** is configured to provide a first data element in the data stream **62** relating to a first position estimate of the antenna phase center X of antenna element **32** (FIG. 2-4). The laser receiver **40** provides a second data element in the second data stream **64** from an optical sensor, which is provided at a known position fixed relative to the antenna phase center, and which is associated with the first position estimate. With the first and second data elements the processor **18** can compute and provide a second position estimate. As such computations are explained in greater detail in the above mentioned co-pending application, no further discussion is provided.

Although the present invention has been described in terms of the presently preferred embodiments, it is to be understood that the disclosure is not to be interpreted as limiting. Various alterations, modifications, and combinations thereof will no doubt become apparent to those skilled in the art after having read the above disclosure. Accordingly, it is intended that the appended claims be interpreted as covering all alterations and modifications as fall within the true spirit and scope of the invention.

CLAIMS

1. A combination laser detector and global navigation satellite antenna useful for determining an improved position estimated of an object of interest by detecting at least two fan-shaped beams oriented at differing angles and rotated about a common axis and by detecting signals from a global navigation satellite system (GNSS), said combination laser detector and global navigation satellite antenna comprising:

an antenna element having a nominal phase center and adapted to receive and provide the signals from the GNSS for deriving a global coordinate position estimate of said antenna phase center; and

at least one optical sensor having a predetermined and fixed spatial separation from said antenna phase center, said at least one optical sensor being adapted to produce a signal based on reception the fan shaped beams, wherein said signal is processed with said global coordinate position estimate to derive the improved position estimate.

2. A combination laser detector and global navigation satellite antenna according to claim 1, further comprising a low noise amplifier coupled to said antenna element.

3. A combination laser detector and global navigation satellite antenna according to claim 1, further comprising a GNSS receiver for receiving the signals from the antenna element.

4. A combination laser detector and global navigation satellite antenna according to claim 1, further comprising a tilt sensor.

5. A combination laser detector and global navigation satellite antenna according to claim 1, further comprising a heading sensor.

6. A combination laser detector and global navigation satellite antenna according to claim 1, further comprising a housing supporting said antenna element and said at least one optical sensor.

-12-

7. A combination laser detector and global navigation satellite antenna according to claim 1, further comprising a support supporting said antenna element, and said at least one optical sensor is mounted on said support below said antenna element.
8. A combination laser detector and global navigation satellite antenna according to claim 1, comprising three optical sensors.
9. A combination laser detector and global navigation satellite antenna according to claim 1, further comprising an optical fiber coupling a non-metallic fiber optic pick-up to the optical sensor.
10. A combination laser detector and global navigation satellite antenna according to claim 1, further comprising a filter to improve the sensitivity of the optical sensor to the energy of the fan-shaped beams.
11. A combination laser detector and global navigation satellite antenna according to claim 1, further comprising an optical fiber coupling a non-metallic fiber optic pick-up to said optical sensor, and wherein said optical pick-up comprises a circularly symmetric hyperbolic mirrored surface.
12. A combination laser detector and global navigation satellite antenna according to claim 1, further comprising an optical fiber coupling a non-metallic fiber optic pick-up to said optical sensor, and wherein the optical pick-up comprises a total internal reflective prism.
13. A position tracking and control system for determining and providing an improved position estimate using signals from a global navigation satellite system (GNSS), comprising:
 - a rotary laser system adapted to emit two or more fan shaped laser beams which rotate about a generally vertical axis, said beams being oriented in planes other than a horizontal plane, and the angles of inclination of the two beams differing from each other;

-13-

a combination laser detector and global navigation satellite antenna having an antenna element with a nominal phase center orientated along a first axis, said antenna element being adapted to receive the signals from the global navigation satellite system (GNSS) and provide a first position estimate, and having at least one optical sensor provided at a predetermined and fixed spatial separation from said nominal phase center, said at least one optical sensor is configured to provide data correlating to detection of the fan-shaped lasers beams; and

a processing unit configured to process said first position estimate and said data to provide the improved position estimate.

14. A position tracking and control system according to claim 13 wherein said combination laser detector and global navigation satellite antenna further comprises a low noise amplifier coupled to said antenna element for processing received signals.

15. A position tracking and control system according to claim 13 wherein said combination laser detector and global navigation satellite antenna further comprises a processor coupled to said at least one optical sensor for processing output signals from said optical sensor produced in response to illumination by said fan-shaped beams.

16. A position tracking and control system according to claim 13 wherein said combination laser detector and global navigation satellite antenna further comprises a tilt sensor.

17. A position tracking and control system according to claim 13 wherein said combination laser detector and global navigation satellite antenna further comprises a heading sensor.

18. A position tracking and control system according to claim 13 wherein said at least one optical sensor is located below said antenna element.

-14-

19. A position tracking and control system according to claim 13 wherein said combination laser detector and global navigation satellite antenna further comprises a support supporting said antenna element, and said at least one optical sensor is mounted on said support below said antenna element.

20. A position tracking and control system according to claim 13 wherein said combination laser detector and global navigation satellite antenna comprises three optical sensors.

21. A position tracking and control system according to claim 13 wherein said combination laser detector and global navigation satellite antenna further comprises an optical fiber coupling a non-metallic fiber optic pick-up to said optical sensor.

22. A position tracking and control system according to claim 13 wherein said combination laser detector and global navigation satellite antenna further comprises a filter to improve the sensitivity of said optical sensor to energy of said fan-shaped beams.

23. A position tracking and control system according to claim 13 wherein said combination laser detector and global navigation satellite antenna further comprises an optical fiber coupling a non-metallic fiber optic pick-up to said optical sensor, and wherein said optical pick-up comprises a circularly symmetric hyperbolic mirrored surface.

24. A position tracking and control system according to claim 13 wherein said combination laser detector and global navigation satellite antenna further comprises an optical fiber coupling a non-metallic fiber optic pick-up to said optical sensor, and wherein said optical pick-up comprises a total internal reflective prism.

25. A position tracking and control system according to claim 13 wherein said combination laser detector and global navigation satellite antenna and said processing unit provides guidance and control to a machine.

-15-

26. A position tracking and control system according to claim 13 further comprising a mast mountable on a machine, wherein said combination laser detector and global navigation satellite antenna is supported by said mast and said processing unit provides guidance and control to said machine.

27. A man portable integrated system for determining a three dimensional position of an object of interest by detecting at least two fan-shaped beams oriented at differing angles and rotated about a common axis and by detecting signals from a global navigation satellite system, comprising:

a combination laser detector and global navigation satellite antenna having an antenna element with a nominal phase center orientated along a first axis, said antenna element being adapted to receive signals from a global navigation satellite system, and having at least one optical sensor also oriented along said first axis a predetermined distance from said antenna element, said optical sensor being adapted to respond to the fan-shaped lasers beams;

a support for supporting said combination laser detector and global satellite antenna; and

a processing unit adapted to use information provided by said combination laser detector and global navigation satellite antenna to determine the three dimensional position of the object of interest.

28. A man portable integrated system according to claim 27 wherein said processing unit is adapted to provide capabilities of a survey data collector.

29. A man portable integrated system according to claim 27 wherein said processing unit is adapted to interface with a survey data collector.

30. A man portable integrated system according to claim 27, further comprising a low noise amplifier coupled to said antenna element for processing received signals.

-16-

31. A man portable integrated system according to claim 27, further comprising a processor coupled to said at least one optical sensor for processing output signals from said optical sensor produced in response to illumination by the fan-shaped beams.

32. A man portable integrated system according to claim 27, further comprising a tilt sensor associated with said combination laser detector and global navigation satellite antenna.

33. A man portable integrated system according to claim 27, further comprising a heading sensor associated with said combination laser detector and global navigation satellite antenna.

34. A man portable integrated system according to claim 27, wherein said at least one optical sensor is located below said antenna element.

35. A man portable integrated system according to claim 27, wherein said at least one optical sensor is mounted on said support below said antenna element.

36. A man portable integrated system according to claim 27, comprising three optical sensors.

37. A man portable integrated system according to claim 27, further comprising an optical fiber coupling a non-metallic fiber optic pick-up to said optical sensor.

38. A man portable integrated system according to claim 27, further comprising a filter to improve the sensitivity of said optical sensor to the energy of the fan-shaped beams.

39. A man portable integrated system according to claim 27, further comprising an optical fiber coupling a non-metallic fiber optic pick-up to said optical sensor, and wherein said optical pick-up comprises a circularly symmetric hyperbolic mirrored surface.

-17-

40. A man portable integrated system according to claim 27, further comprising an optical fiber coupling a non-metallic fiber optic pick-up to said optical sensor, and wherein said optical pick-up comprises a total internal reflective prism.

41. A combination laser detector and global navigation satellite system (GNSS) receiver configured to provide an improved position estimate based on fan shaped beams from a laser beam system and signals from global navigation satellites, said combination laser detector and GNSS receiver comprising:

an antenna element having a nominal phase center and adapted to receive and provide the signals to the GNSS receiver for deriving a global coordinate position estimate of said antenna phase center; and

at least one optical sensor having a predetermined and fixed spatial separation from said antenna phase center, said at least one optical sensor being adapted to produce a signal based on reception the fan shaped beams, wherein said signal is processed with said global coordinate position estimate to derive the improved position estimate.

42. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, wherein said at least one optical sensor is located below said antenna phase center.

43. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, wherein said at least one optical sensor is located above said antenna phase center.

44. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, wherein said at least one optical sensor is located in proximity along an axis common with said antenna phase center.

45. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, further comprising a housing, and wherein said at least one optical sensor is located on a periphery of housing.

46. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, further comprising a housing accommodating said antenna element, and wherein said at least one optical sensor is located on a periphery of housing.

47. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, further comprising a processing unit adapted to process said signal with said global coordinate position estimate to derive the improved position estimate.

48. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, further comprising a processing unit adapted to process said signal with said global coordinate position estimate to derive the improved position estimate, and a housing accommodating said processing unit, and wherein said at least one optical sensor is located on a periphery of housing.

49. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, further comprising a processing unit adapted to process said signal with said global coordinate position estimate to derive the improved position estimate, and a housing accommodating said processing unit and said antenna element, and wherein said at least one optical sensor is located on a periphery of housing.

50. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, further comprising a low noise amplifier coupled to said antenna element for processing the signals.

51. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, further comprising a tilt sensor.

52. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, further comprising a heading sensor.

53. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, further comprising a support supporting said antenna element, and said at least one optical sensor is mounted on said support below said antenna element.

54. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, comprising three optical sensors.

55. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, further comprising an optical fiber coupling a non-metallic fiber optic pick-up to the optical sensor.

56. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, further comprising a filter to improve the sensitivity of the optical sensor to the energy of the fan-shaped beams.

57. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, further comprising an optical fiber coupling a non-metallic fiber optic pick-up to said optical sensor, and wherein said optical pick-up comprises a circularly symmetric hyperbolic mirrored surface.

58. A combination laser detector and global navigation satellite system (GNSS) receiver according to claim 41, further comprising an optical fiber coupling a non-metallic fiber optic pick-up to said optical sensor, and wherein the optical pick-up comprises a total internal reflective prism.

-20-

59. An improved position estimating system comprising:
a global navigation satellite system (GNSS) receiver having an antenna having a phase center, configured to provide a first data element relating to a first position estimate;
at least one optical sensor provided at a known position fixed relative to said antenna phase center, and an associated processing system configured to provide a second data element associated with the first position estimate; and
a processor configured to process said first data element and said second data element to provide a second position estimate.
60. An improved position estimating system according to claim 59, wherein said at least one optical sensor is located below said antenna phase center.
61. An improved position estimating system according to claim 59, wherein said at least one optical sensor is located above said antenna phase center.
62. An improved position estimating system according to claim 59, wherein said at least one optical sensor is located in proximity along an axis common with said antenna phase center.
63. An improved position estimating system according to claim 59, further comprising a housing, and wherein said at least one optical sensor is located on a periphery of housing.
64. An improved position estimating system according to claim 59, further comprising a housing accommodating said antenna element, and wherein said at least one optical sensor is located on a periphery of housing.
65. An improved position estimating system according to claim 59, further comprising a low noise amplifier coupled to said antenna element for processing the signals.

-21-

66. An improved position estimating system according to claim 59, further comprising a tilt and/or heading sensor providing a third signal to the processor for inclusion in the computing said second position estimate .

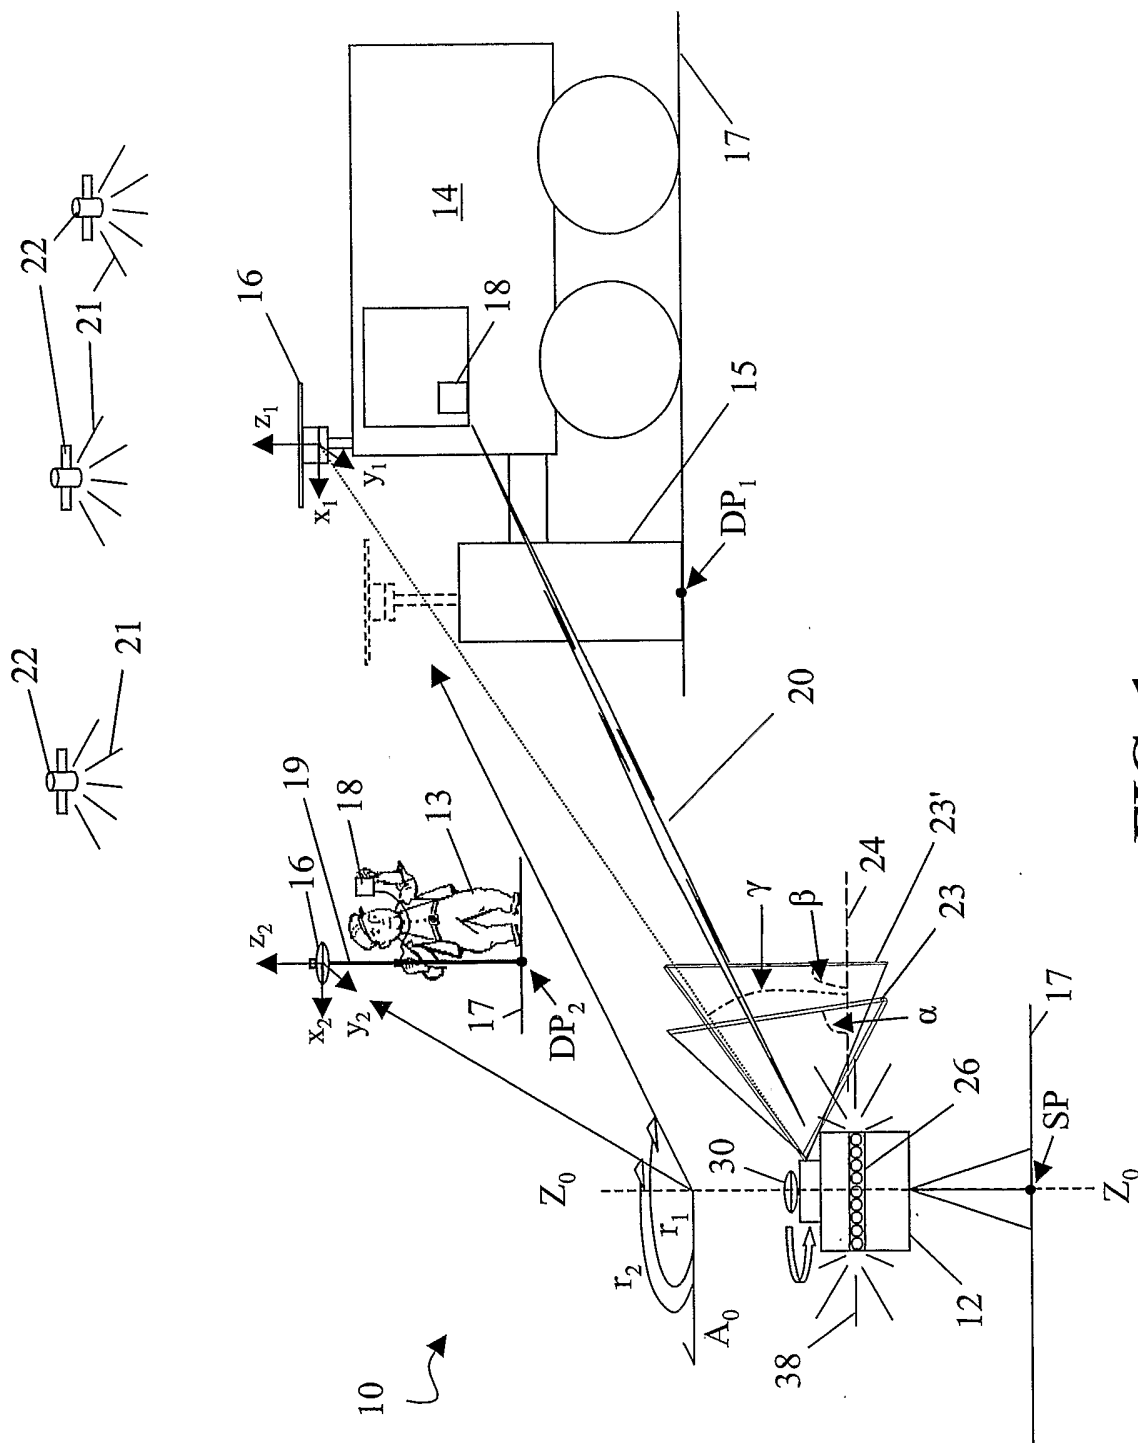


FIG. 1

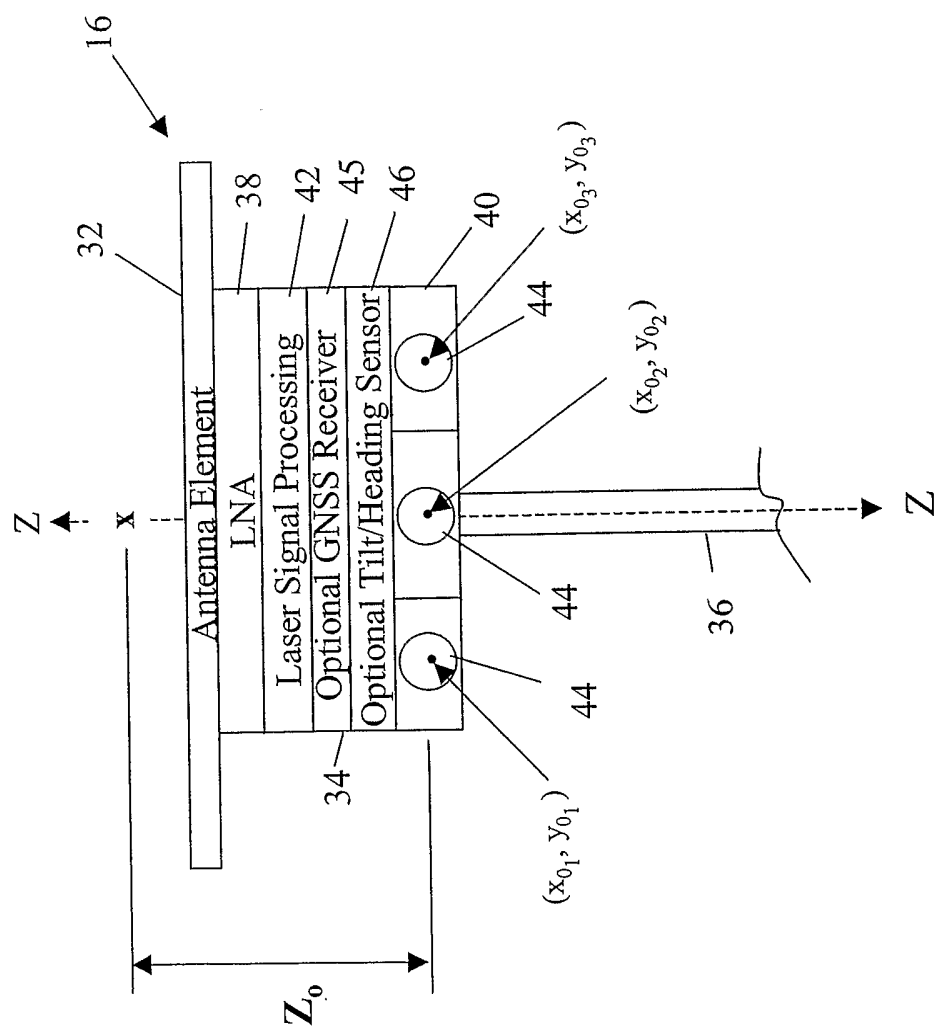


FIG. 2

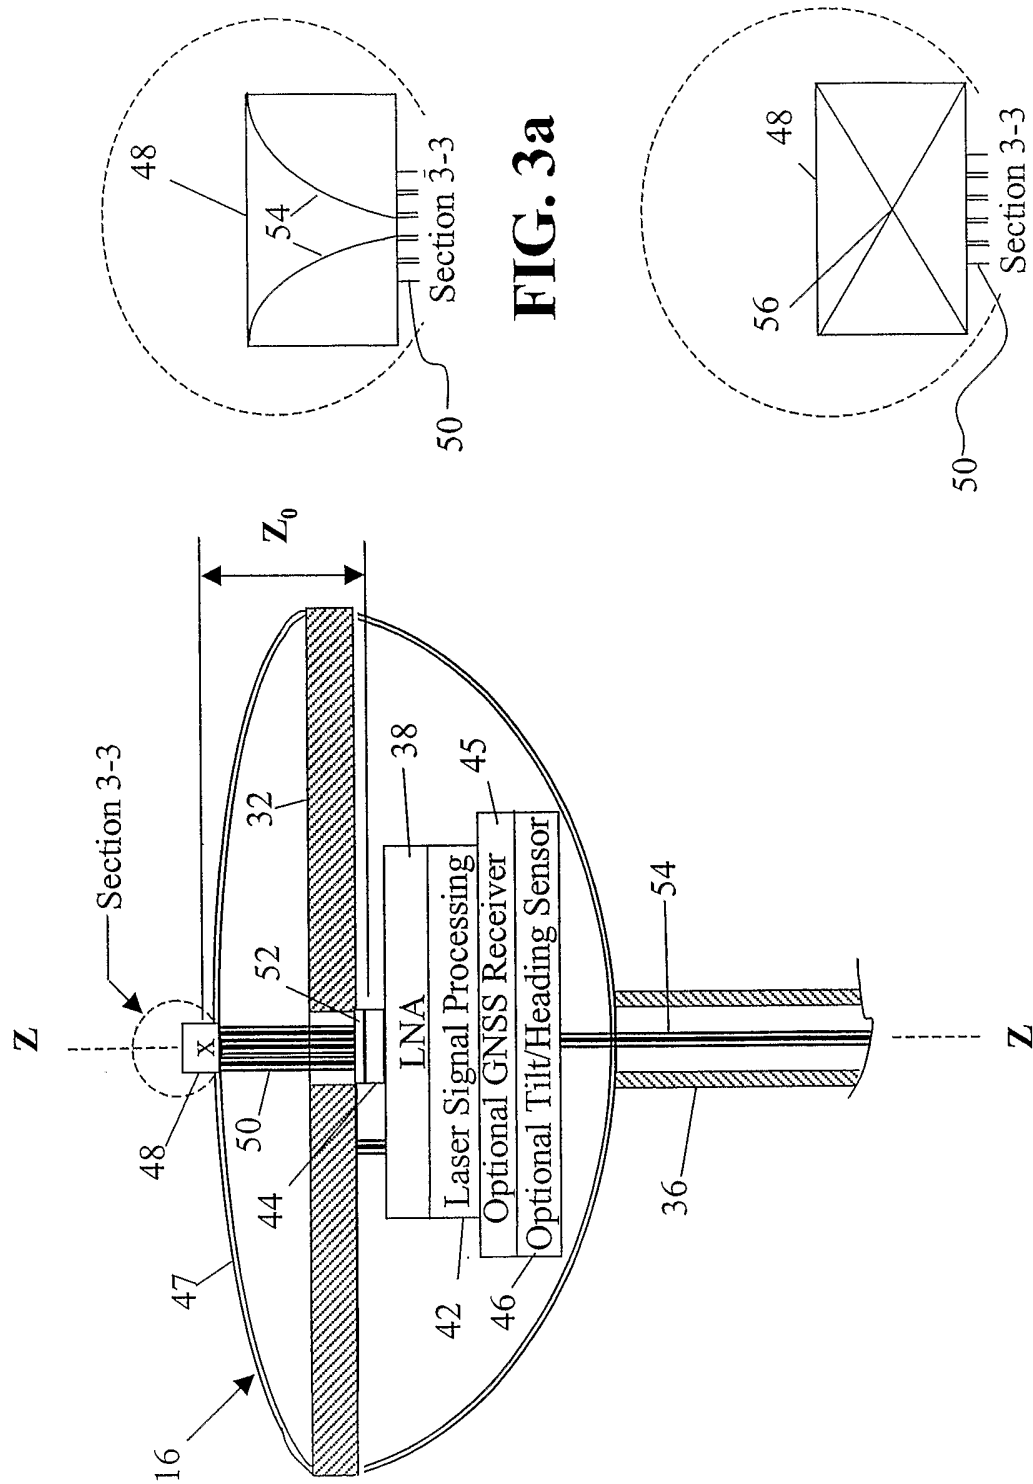


FIG. 3b

FIG. 3

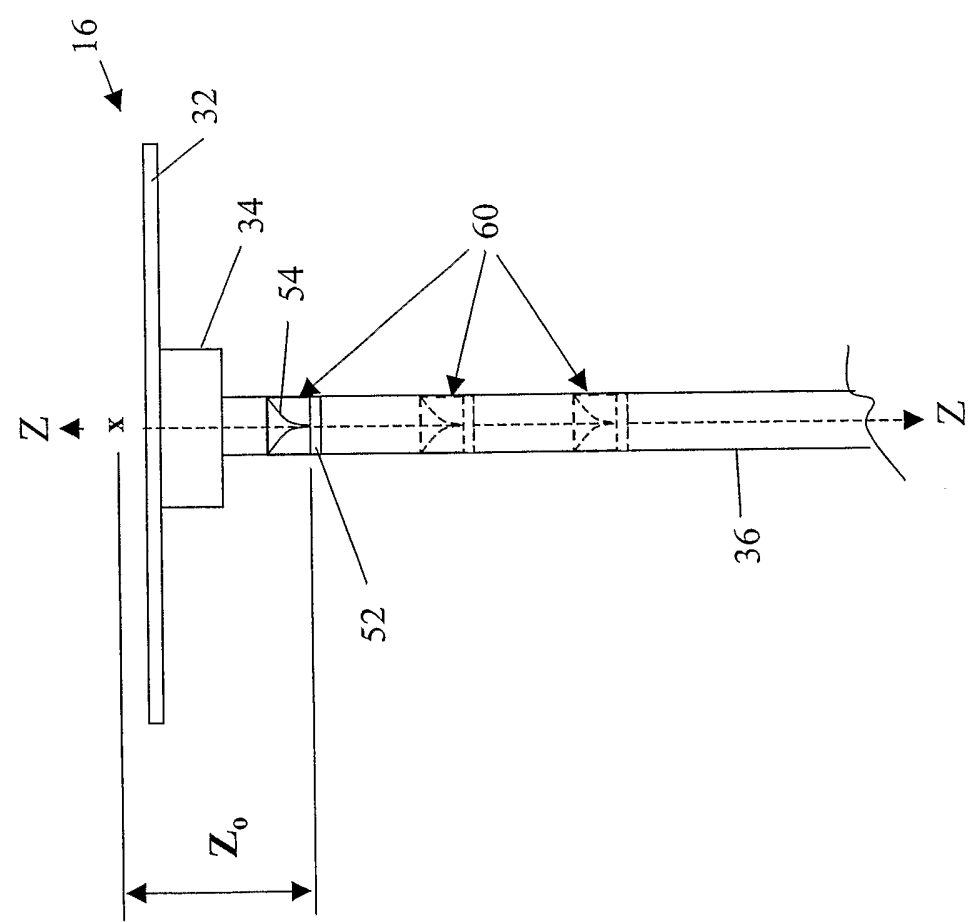


FIG. 4

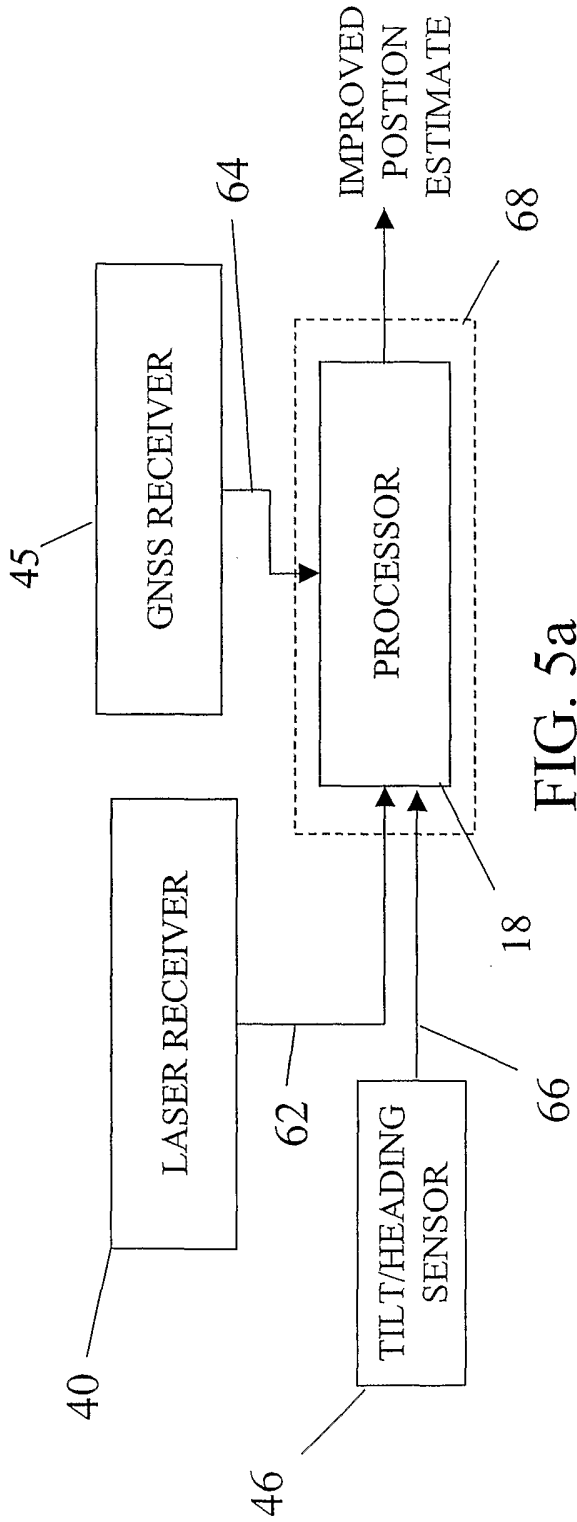


FIG. 5a

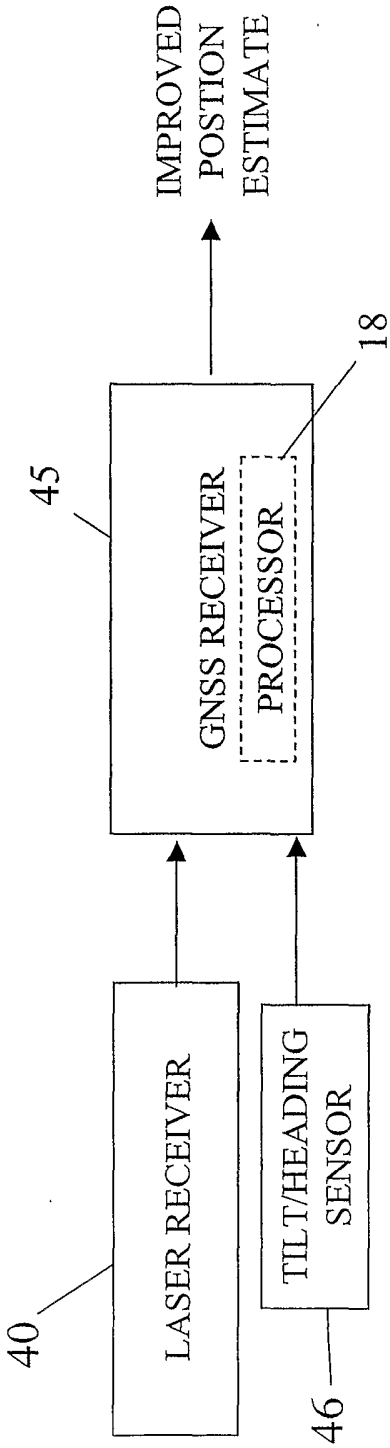


FIG. 5b

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/JP2005/012139

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01C15/00 G01S5/14 G01S1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G01C G01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 434 029 A (KABUSHIKI KAISHA TOPCON) 30 June 2004 (2004-06-30) column 6, paragraph 36 - column 12, paragraph 80; figures 1-5,11	1-66
E	EP 1 524 497 A (KABUSHIKI KAISHA TOPCON) 20 April 2005 (2005-04-20) column 7, paragraph 20 - column 15, paragraph 55; figures 1,2,10 ----- -/-	1,3,4,6, 7,13,15, 16,18, 19,27, 31,32, 34,35, 41,42, 44-49, 51,53, 59,60, 62-64,66

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

18 August 2005

Date of mailing of the international search report

30/08/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Springer, O

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/012139

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2003/137658 A1 (OHTOMO FUMIO ET AL) 24 July 2003 (2003-07-24) page 4, paragraph 80 - page 5, paragraph 102 page 11, paragraph 170 - page 13, paragraph 197; figures 1,2 -----	1-66
A	US 6 433 866 B1 (NICHOLS MARK EDWARD) 13 August 2002 (2002-08-13) the whole document -----	1-66

INTERNATIONAL SEARCH REPORT

ation on patent family members

Intern I Application No
PCT/US2005/012139

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1434029	A	30-06-2004	JP 2004212058 A	29-07-2004
			CN 1512137 A	14-07-2004
			EP 1434029 A2	30-06-2004
			US 2004125365 A1	01-07-2004
EP 1524497	A	20-04-2005	JP 2005121393 A	12-05-2005
			EP 1524497 A1	20-04-2005
			US 2005099617 A1	12-05-2005
US 2003137658	A1	24-07-2003	JP 2003214850 A	30-07-2003
			CN 1434177 A	06-08-2003
US 6433866	B1	13-08-2002	NONE	