



(51) International Patent Classification:

H01H 9/00 (2006.01) H01H 3/42 (2006.01)
H01H 33/666 (2006.01)

(21) International Application Number:

PCT/EP2021/073380

(22) International Filing Date:

24 August 2021 (24.08.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20203858.4 26 October 2020 (26.10.2020) EP

(71) Applicant: HITACHI ENERGY SWITZERLAND AG
[CH/CH]; Brüggerstrasse 72, 5400 Baden (CH).

(72) Inventors: MANEV, Georgi; Oborishte str. 1A, 1504 Sofia
(BG). VASILEV, Borislav; Gergina str. 1, 1271 Sofia
(BG). KOKEV, Todor; 243 Gotse Delchev en.V, ap.33,
1404 Sofia (BG).

(74) Agent: EPPING HERMANN FISCHER PATENTAN-
WALTSGESELLSCHAFT MBH; Schloßschmidstr. 5,
80639 München (DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SYSTEM FOR CONTROLLING A VACUUM INTERRUPTER FOR A POWER DIVERTER SWITCH, A POWER DIVERTER SWITCH AND AN ON-LOAD TAP CHANGER

FIG 1

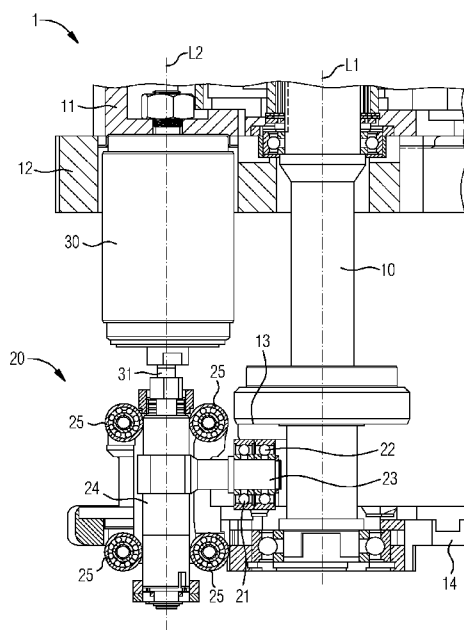

(57) Abstract: A system (1) for controlling a vacuum interrupter (30) for a power diverter switch comprises a main driving shaft (10) which is configured to drive the control cam (13). The system (1) further comprises the vacuum interrupter (30) which is configured to separate electrical contacts in a vacuum by use of a contact rod (31), and a transmission unit (20) which is configured to transmit the force generated by the main driving shaft (10) to the contact rod (31). The transmission unit (20) comprises a plurality of reliable guiding elements (25) and a lever mechanism (21, 22, 23, 24) which is coupled to both the control cam (13) and the contact rod (31) of the vacuum interrupter (30) such that a rotation of the control cam (13) generated by the main driving shaft (10) causes a movement of the contact rod (31) due to a guided movement of the lever mechanism (21, 22, 23, 24) by means of rolling of the guiding elements (25).

SYSTEM FOR CONTROLLING A VACUUM INTERRUPTER FOR A POWER
DIVERTER SWITCH, A POWER DIVERTER SWITCH AND AN ON-LOAD TAP
CHANGER

- 5 The present disclosure is related to a system for controlling
a vacuum interrupter for a power diverter switch. The present
disclosure is further related to a corresponding power
diverter switch and an on-load tap changer.
- 10 Vacuum interrupters are widely used in utility power
transmission systems, power generation units and power-
distribution systems for railways, for example. Document US
2015/008104 A1 discloses an on-load tap changer having at
least two vacuum interrupters. The on-loader tap changer
15 comprises a selector for selecting a respective winding tap
of a tapped transformer, a load changeover switch for
changing over from the connected winding tap to the
respectively preselected winding tap, a rotatable drive shaft
which is mechanically coupled to the selector, and a gear
20 mechanism for operating a moving contact of a respective
vacuum interrupter.

Document EP 2261935 A1 discloses a selector switch for
switching taps of a transformer comprises a switching shaft
25 insert including two switch contacts and a network terminal
contact. Fixed step contacts are circumferentially arranged
on a cylinder provided around the switching shaft insert, the
fixed step contacts being connected to taps of the
transformer.

30

The documents CN 101807469 B discloses a lever systems for
driving a vacuum bubble. The system comprises a molded
plastic baseplate on which the vacuum bubble is arranged

through a connecting rod device. A lever device comprises a lever, a connecting rod, a supporting seat and a return spring, wherein the connecting rod is in threaded connection with a lower link rod of the vacuum bubble. The lever is
5 hinged with the supporting seat.

The document CN 110189937 A discloses a double-fracture vacuum on-load tap-changer comprising a mounting flange at the upper end of the tap-changer for conveniently mounting
10 the tap-changer. A tap-changer cylindrical body is disposed under the mounting flange and a change-over switch and a vacuum tube synchronous operating mechanism are installed in the tap-changer cylindrical body.

15 Therein, the vacuum interrupter realizes a switch of a medium-voltage circuit-breaker, generator circuit-breaker, or high-voltage circuit-breaker which uses electrical contacts in a vacuum to reliably separate the electrical contacts resulting in a metal vapour arc, which is quickly
20 extinguished. In this respect, it is a challenge to provide stable and reliable mechanisms to transmit the motion from a driving cam to a contact rod of the vacuum interrupter to securely switch the electrical contacts.

25 It is an object to provide a system for controlling a vacuum interrupter for a power diverter switch that enables secure and reliable switching of electrical contacts of the vacuum interrupter. It is a further object to provide a corresponding power diverter switch and an on-load tap
30 changer including such a system.

These objects are achieved by the subject-matter of the independent claim. Further developments and embodiments are described in the dependent claims.

- 5 According to an embodiment, a system for controlling a vacuum interrupter for a power diverter switch comprises a main driving shaft which is coupled to a control cam and which is configured to drive the control cam. The system further comprises the vacuum interrupter which is configured to
- 10 separate electrical contacts in a vacuum by use of a contact rod, and a transmission unit which is configured to transmit the force generated by the main driving shaft to the contact rod. The transmission unit comprises a plurality of rollable guiding elements and a lever mechanism which is in contact
- 15 with the rollable guiding elements and which is coupled to both the control cam and the contact rod of the vacuum interrupter. The guiding elements each are configured to be rollable around a respective axis of rotation that is perpendicular to a longitudinal center axis of the vacuum
- 20 interrupter such that a rotation of the control cam generated by the main driving shaft causes a movement of the contact rod due to a guided movement of the lever mechanism by means of rolling of the guiding elements.
- 25 By use of the described system a compact and simple design of mechanism for controlling of a vacuum interrupters (VI) in a diverter switch of an on-load tap-changer is feasible. Due to the rollable guiding elements the system enables a reliably directed movement of the contact rod and thus a secure
- 30 separation of the electrical contacts of the VI.

It is a recognition of the present invention that usual designs for control of a VI, used in diverter switches

include various types of sliding guiders and auxiliary levers with hinges, which are driven by means of a cam. Such mechanisms requires the presence of a plurality of elements involved in the propulsion of the VI which reduces the reliability of such mechanisms in relation to the wear of these elements due to the sliding friction, in particular. Moreover, a dimensional chain of elements between the cam and the contact rod of the VI, with the presence of a plurality of elements lead to a complicated structure, which imposes high requirements for accuracy in their manufacture. In addition, more space is need to assemble and locate all elements and further there are dependencies due to hinges implemented in such mechanisms which deteriorate their performance at low temperatures.

The described system enables to counteract the aforementioned effects and contributes to a space-saving design of a mechanism with a clear structure and a small number of elements. Thus, it further contributes to ease the requirements for manufacturing accuracy and to reduce loss due to friction. For example, the plurality of rollable guiding elements includes guiding elements formed as rolling bearings, rolls and/or bushings. Thus, there is only rolling friction instead of sliding-friction in the described system.

According to an embodiment of the system the lever mechanism is configured to be hingeless comprising a t-shaped bushing including a cylindrical element and a lever connected thereto. The hingeless lever mechanism further comprises an upper and a lower guiding unit each comprising at least one guiding element arranged at an upper portion or a lower portion of the cylindrical element respectively with respect to a longitudinal axis of the cylindrical element. The lever

mechanism further comprises a first lever driving element arranged between the control cam and the lever, wherein the cylindrical element is arranged to be in contact to the contact rod of the VI.

5

With respect to an operating state, the main driving shaft drives the control cam by means of pushing it towards the first lever driving element and the lever. Thus, the t-shaped bushing is moved and separation of the electrical contacts of the VI can be initiated. For instances, the first lever driving element is formed as a rolling bearing, a roller or a bushing realizing a driving element to move the lever, which is connected perpendicularly to the cylindrical element forming the t-shaped bushing.

15

According to a further embodiment of the system the upper and lower guiding unit each comprises at least two rollable guiding elements arranged at opposite sides of the cylindrical element with respect to the longitudinal axis of the cylindrical element and with respect to a plane spanned by the longitudinal axis of the cylindrical element and a longitudinal axis of the main driving shaft. Such a configuration enables a stable and reliable guidance of the cylindrical element in the aforementioned plane, in particular. Thus, a movement of the contact rod and separation of the electrical contacts of the VI can initiated securely.

According to a further embodiment of the system the upper and lower guiding unit each comprising four guiding elements arranged perpendicularly to adjacent ones with respect to the longitudinal axis of the cylindrical element. Such a configuration contributes to a very reliable and safe

30

guidance of the cylindrical element and movement of the contact rod.

According to a further embodiment of the system the lever
5 mechanism further comprises guiding pins and a second lever
driving element formed as a rolling bearing, a roller or a
bushing arranged between the control cam and the lever and
between the guiding pins respectively. Thus, the developed
lever mechanism is configured to further prevent unwanted
10 rotation of the contact rod around its axis.

According to an embodiment a power diverter switch for an on-
load tap changer comprises an insulating plate, a supporting
plate, and an embodiment of the described system, which is
15 coupled to both the insulating plate and the supporting
plate, in between for example. Such a configuration indicates
an exemplary possibility to arrange the system inside a power
diverter switch. However, there are also alternative
possibilities to arrange the system in the power diverter
20 switch. For instances the system can also be arranged outside
the insulating plate and/or the supporting plate. The power
diverter switch for an on-load tap changer comprises an
insulating plate, a supporting plate and an embodiment of the
described system, respectively.

25

According to an embodiment an on-load tap changer for setting
a gear ratio comprises an embodiment of the aforementioned
power diverter switch.

30 Such a configuration of a power diverter switch and an on-
load tap changer using an embodiment of the described system
for controlling a VI enables secure and reliable switching of
electrical contacts of the VI. As a result of that the power

diverter switch and the on-load tap changer comprises an embodiment of the system as described above, described features and characteristics of the system are also disclosed with respect to the power diverter switch and the on-load tap
5 changer and vice versa.

The described system and the corresponding power diverter switch and on-load tap changer include a simple driving mechanism for the VI and for example without any hinges, in
10 which the contact rod of the VI is guided straight between the rollable guiding elements which are formed as two sets of four rolling bearings or rollers, for instances. Such a configuration makes it possible for the point of application of the force needed to open the VI to be displaced away from
15 its longitudinal axis. The control cam acts on a bearing or roll or bushing that is mounted on or around the cylindrical element which realizes a guided part on which the lever is arranged perpendicularly, for example.

20 The described system and the mechanism of the transmission unit contributes to an advantageous structure due to a simple way of actuating the contact rod - directly, without any additional elements and corresponding unwanted gaps and unwanted wear in hinges, for example. There is only rolling
25 friction in such a mechanism and such a configuration is suitable in particular when a distance between the longitudinal axis of the VI and the longitudinal axis of the main driving shaft should be kept small. Furthermore, due to the fact that the lever mechanism can be configured hingeless
30 an adverse influence of low temperatures can be reduced as well. Thus, using the described system with a hingeless lever mechanism enables reliable functioning even at temperatures

of -40°C up to 105°C of oil used inside the system, for example.

Exemplary embodiments of the invention are explained in the following with the aid of schematic drawings and reference numbers. The figures show:

Figure 1 an exemplary embodiment of a system for controlling a vacuum interrupter for a power diverter switch in a side view;

Figure 2 the system of figure 1 in another side view; and

Figure 3 components of the system of the figures 1 and 2 in a perspective view.

Identical reference numbers designate elements or components with identical functions. In so far as elements or components correspond to one another in terms of their function in different figures, the description thereof is not repeated for each of the following figures. For the sake of clarity elements might not appear with corresponding reference symbols in all figures possibly.

Figure 1 illustrates a side view of an embodiment of a system 1 for controlling a vacuum interrupter 30 of a power diverter switch. Figure 2 illustrates another side view of the system 1 and Figure 3 shows a perspective view of some components of the system 1.

The system 1 includes a main driving shaft 10 which is coupled to a control cam 13 and which is configured to drive the control cam 13. The vacuum interrupter (VI) 30 which is

configured to separate electrical contacts in a vacuum by use of a contact rod 31. A transmission unit 20 which is configured to transmit the force generated by the main driving shaft 10 to the contact rod 31. The transmission unit 5 20 comprises a plurality of rollable guiding elements and a lever mechanism 21, 22, 23, 24 which is coupled to both the control cam 13 and the contact rod 31 of the vacuum interrupter 30. The guiding elements are formed as rolling bearings 25. Thus, a rotation of the control cam 13 generated 10 by the main driving shaft 10 causes a movement of the contact rod 31 due to a guided movement of the lever mechanism 21, 22, 23, 24 by means of rolling of the bearings 25.

The system 1 realizes a component of a power diverter switch 15 for an on-load tap changer. The diverter switch further comprises a lower supporting steel plate 14 and an upper insulating plate 12 on which is mounted a stationary contact board 11, carrying the VI 30. The control cam 13 is fastened to the main driving shaft 10.

20

The lever mechanism of the transmission unit 20 comprises a cylindrical element 24 and a lever 23 perpendicularly connected thereto. The cylindrical element 24 is further connected to the contact rod 31 of the VI 30. The cylindrical 25 element 24 is guided by two groups of rolling bearings 25 distanced one above the other forming an upper and a lower guiding unit of guiding elements. According to the illustrated embodiment, each group consists of four bearings 25 located at an angle of approximately 90° relative to each 30 other with respect to a central axis L2 of the cylindrical element 24 and/or the VI 30. Thus, the illustrated embodiment of the system 1 comprises eight rolling bearings 25 to provide stable and reliable guidance. Thus, with respect to

the central axis L2 the transmission unit 20 counteracts an unwanted tilt of the cylindrical element 24 and contributes to a secure and reliable movement of the contact rod 31 and separation of the electrical contacts of the VI 30.

5

The bearings 25 are mounted on a stationary hollow holder 29 with a slot on one side, in which the perpendicular lever 23 can move. The system 1 comprises two further bearings which are mounted on the lever 23 and which realize a first lever bearing 21 and a second lever bearing 22. The control cam 13 is a specially shaped cylindrical cam and is configured to act on the first lever bearing 21 by applying a force parallel to the central axis L2 of the VI 30. The second lever bearing 22 is configured to move between two guiding pins 28 with a relative small gap such that the second lever bearing 22 touches only one guiding pin 28 or the other (see Figure 3). Alternatively, the guiding pins 28 and the second lever bearing 22 can be arranged at the opposite side of the cylindrical element 24, for example, with respect to the central axis L2 interacting with an elongated lever 23. Such a mechanism respectively enables to prevent unwanted rotation of the contact rod 31 around its axis which corresponds to the central axis L2.

Moreover, in order to contribute to a space-saving design of the system 1 two contact springs 27 are placed on both sides of the stationary holder 29 with the bearings 25. These contact springs 27 are driven by the contact rod 31 using a common strap (see Figure 2).

30

The described system 1 provides a reliable mechanism for direct control of the vacuum interrupter 30 in the power diverter switch for an on-load tap changer. The structure of

the system 1 is clear and enables a simple driving mechanism for the VI 30 without any hinges, due to the described structure of the transmission unit 20. The contact rod 31 of the VI 30 is guided straight between the two sets of four
5 rolling bearings 25, which can be formed as rollers and/or bushings alternatively. Thus, it is possible for the point of application of the force needed to open the VI 30 to be displaced away from its longitudinal axis L2.

10 The main driving shaft drives the control cam 13 which acts on the first lever bearing 21 that is mounted on the cylindrical guided part realized by the cylindrical element 24 with perpendicular lever 23. Such a mechanism enables a simple but reliable way of actuating the contact rod 31 -
15 directly, without any additional elements with the corresponding unwanted gaps and unwanted wear in hinges, for example. There is only rolling friction and no friction in sliding present in this mechanism due to the rollable guiding elements and the hingeless lever mechanism. The described
20 rollable bearings 25 beneficially operate using a small predetermined gap between the bearings 25 and the cylindrical element 24 such that there is a slight guiding contact to one of the upper and/or lower bearings 25, at least.

25 In particular, such a system 1 is suitable when an interaxial distance between the central axis L2 of the VI 30 and a central axis L1 of the main driving shaft 10 must be minimal or relatively small. Moreover, due to the possibility of saving hinges the influence of low temperatures is reduced as
30 well because hinges deteriorate their performance at low temperatures around -20°C to -40°C, for example.

Reference Numerals

- 1 system for controlling a vacuum interrupter
- 10 main driving shaft
- 5 11 stationary contact board
- 12 insulating plate
- 13 control cam
- 14 supporting plate
- 20 transmission unit
- 10 21 first lever bearing
- 22 second lever bearing
- 23 lever
- 24 cylindrical element
- 25 rolling bearing
- 15 26 stationary holder
- 27 contact spring
- 28 guiding pin
- 29 stationary holder
- 30 vacuum interrupter
- 20 31 contact rod
- L1 longitudinal axis of the main driving shaft
- L2 longitudinal axis of the cylindrical element / vacuum interrupter

Claims

1. System (1) for controlling a vacuum interrupter (30) for a power diverter switch, comprising:

- 5 - a main driving shaft (10) which is coupled to a control cam (13) and which is configured to drive the control cam (13),
- the vacuum interrupter (30) which is configured to separate electrical contacts in a vacuum by use of a contact
- 10 rod (31), and
- a transmission unit (20) which is configured to transmit the force generated by the main driving shaft (10) to the contact rod (31), wherein the transmission unit (20) comprises a plurality of rollable guiding elements (25) and a
- 15 lever mechanism (21, 22, 23, 24) which is in contact with the rollable guiding elements (25) and which is coupled to both the control cam (13) and the contact rod (31) of the vacuum interrupter (30), wherein the guiding elements (25, 26) each are configured to be rollable around a respective axis of
- 20 rotation that is perpendicular to a longitudinal center axis (L2) of the vacuum interrupter (30), such that a rotation of the control cam (13) generated by the main driving shaft (10) causes a movement of the contact rod (31) due to a guided movement of the lever mechanism (21, 22, 23, 24) by means of
- 25 rolling of the guiding elements (25).

2. System (1) according to claim 1, wherein the plurality of rollable guiding elements (25) includes guiding elements formed as rolling bearings, rolls and/or bushings.

30

3. System (1) according to claim 1 or 2, wherein the lever mechanism is configured to be hingeless comprising:

- a t-shaped bushing including a cylindrical element (24) and a lever (23) connected to the cylindrical element (24), wherein the cylindrical element (24) is arranged to be in contact to the contact rod (31),

5 - an upper and a lower guiding unit each comprising at least one guiding element (25) arranged at an upper portion or a lower portion of the cylindrical element (24) respectively with respect to the longitudinal axis (L2) of the cylindrical element (24), and

10 - a first lever driving element (21) arranged between the control cam (13) and the lever (23).

4. System (1) according to claim 3, wherein the first lever driving element (21) is formed as a rolling bearing, a roller
15 or a bushing.

5. System (1) according to claim 3 or 4, wherein the upper and lower guiding unit each comprising two guiding elements (25) arranged at opposite sides of the cylindrical element
20 (24) with respect to the longitudinal axis (L2) of the cylindrical element (24) and with respect to a plane spanned by the longitudinal axis (L2) of the cylindrical element (24) and a longitudinal axis (L1) of the main driving shaft (10).

25 6. System (1) according to one of the claims 3 to 5, wherein the upper and lower guiding unit each comprising four guiding elements (25) arranged perpendicularly to adjacent ones with respect to the longitudinal axis (L2) of the cylindrical element (24).

30 7. System (1) according to one of the claims 1 to 6, wherein the lever mechanism further comprises guiding pins (28) and a second lever driving element (22) formed as a

rolling bearing, a roller or a bushing arranged between the control cam (13) and the lever (23) and between the guiding pins (28) respectively.

- 5 8. Power diverter switch for an on-load tap changer,
comprising:
- an insulating plate (12),
 - a supporting plate (14), and
 - a system (1) according to one of the claims 1 to 7,
- 10 which is coupled to both the insulating plate (12) and the supporting plate (14).

9. On-load tap changer for setting a gear ratio,
comprising:
- 15 a power diverter switch according to claim 8.

FIG 1

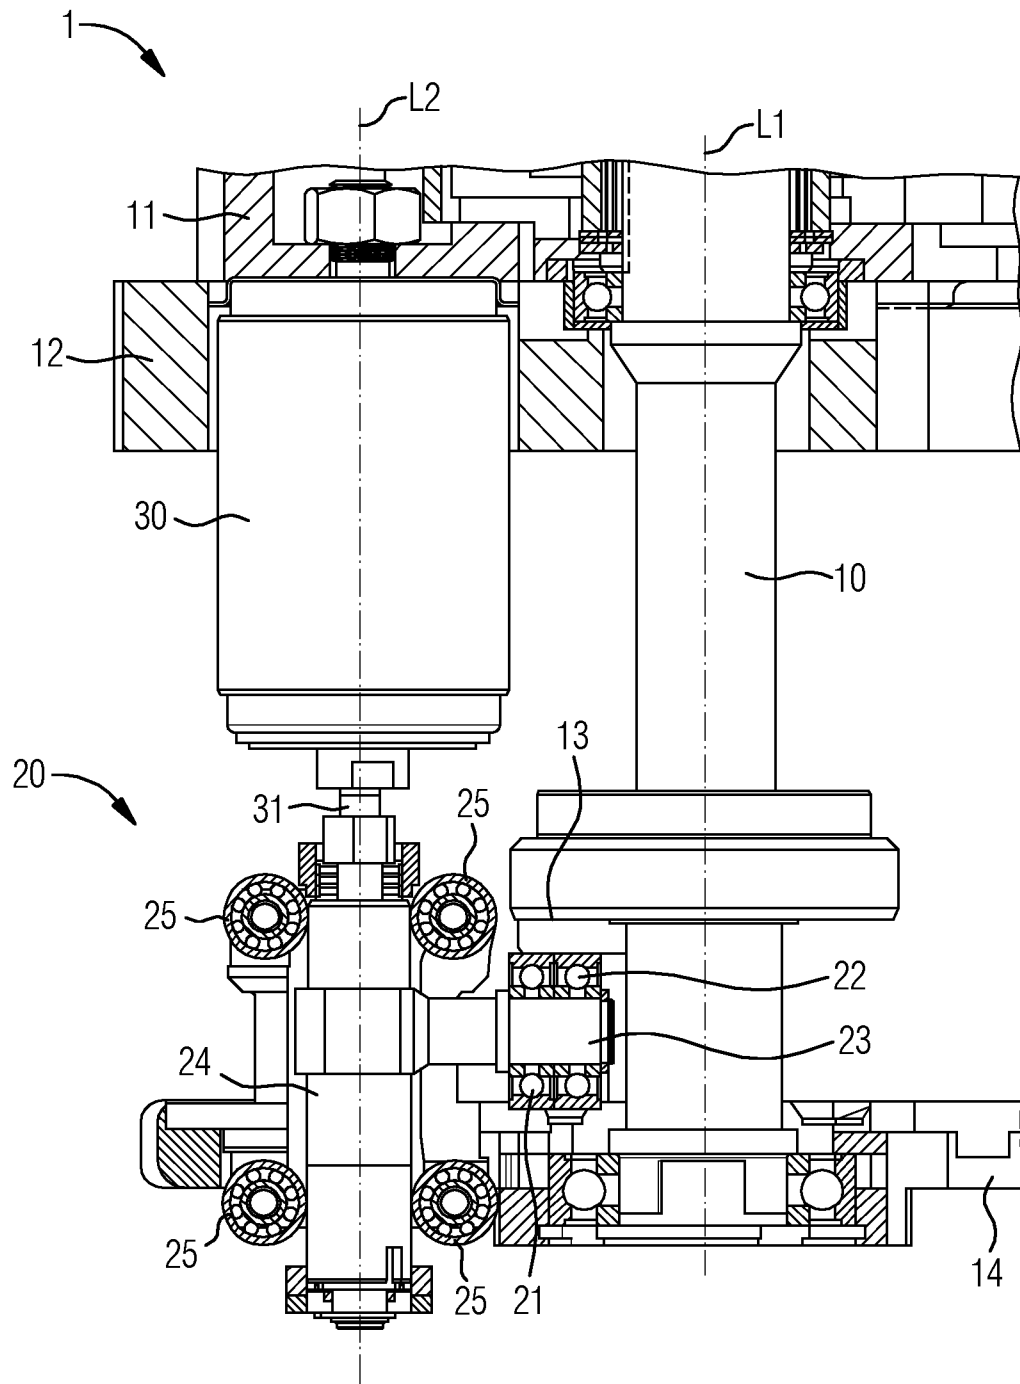


FIG 2


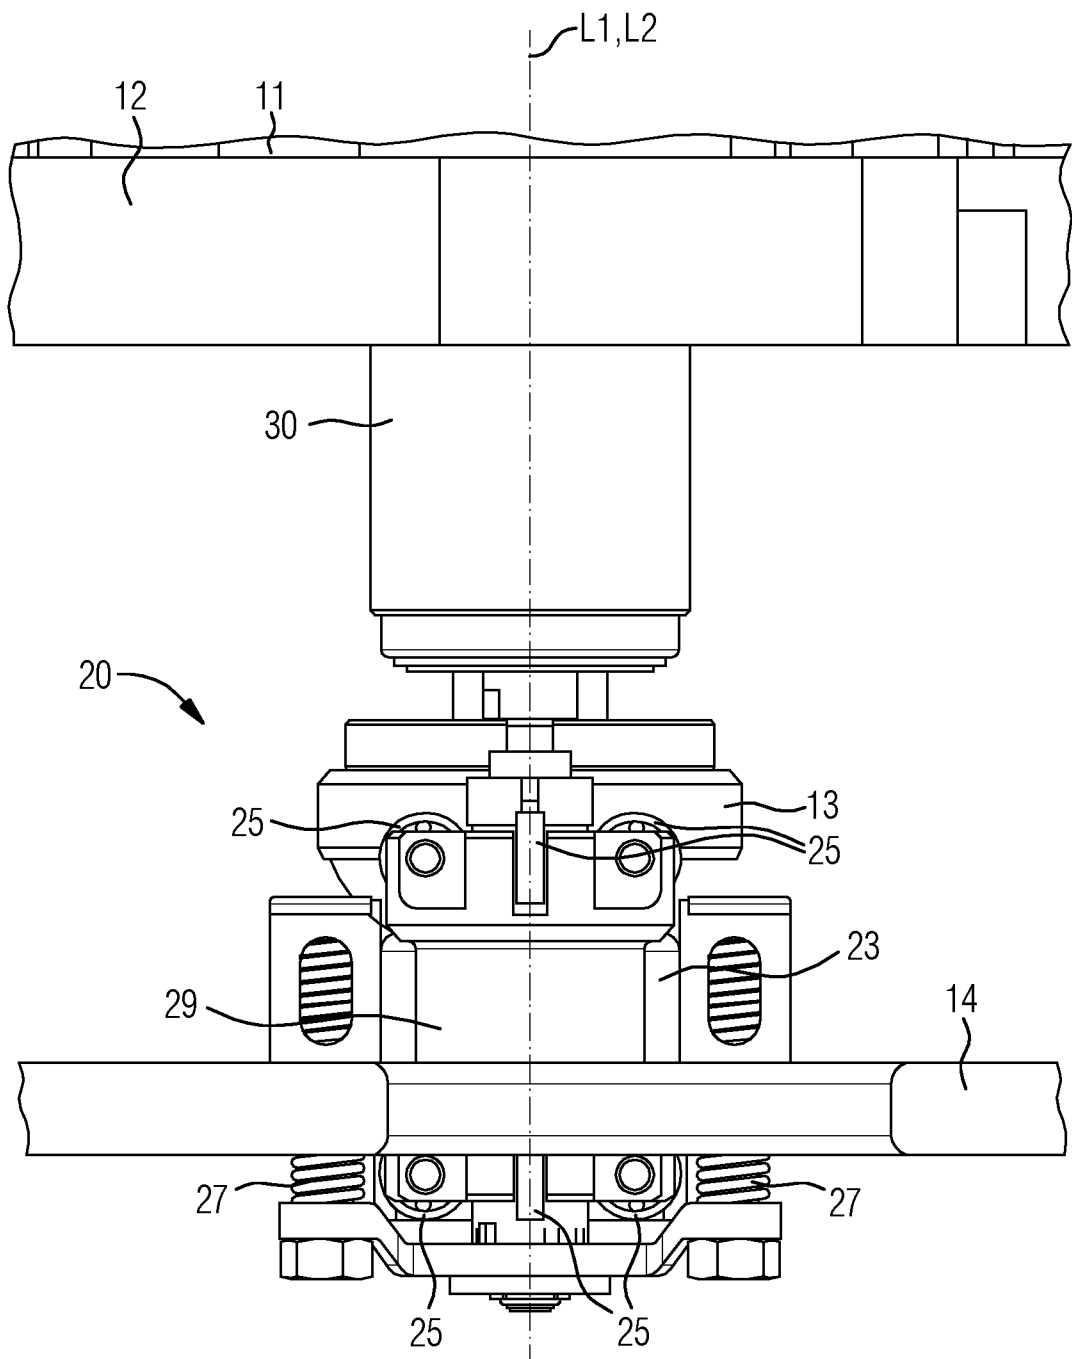


FIG 3

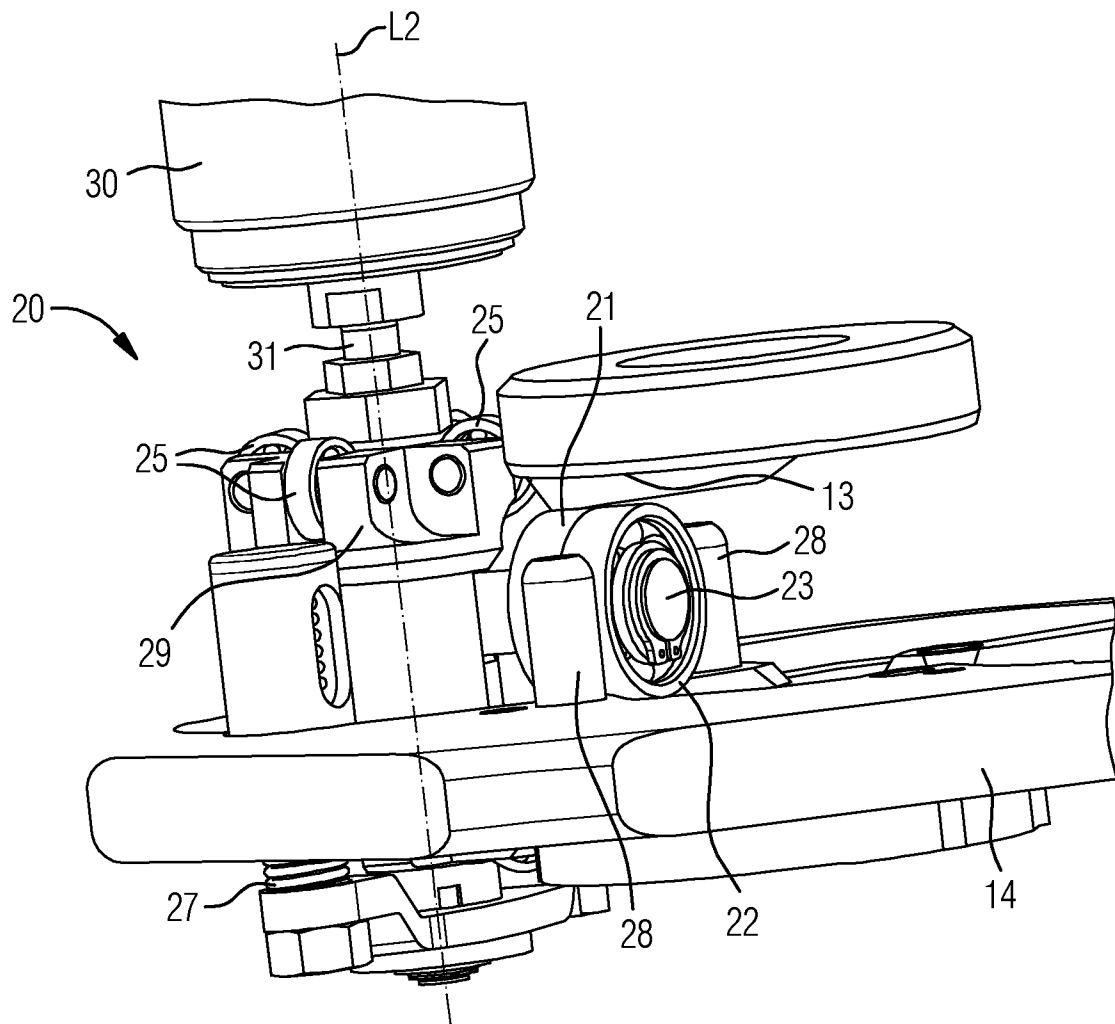

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2021/073380

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01H9/00 H01H33/666
ADD. H01H3/42

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2015/008104 A1 (HOEPFL KLAUS [DE] ET AL) 8 January 2015 (2015-01-08) page 2, paragraph 0030 - page 3, paragraph 0043; figures 1-4 -----	1-9
A	EP 2 261 935 A1 (ABB RESEARCH LTD [CH]) 15 December 2010 (2010-12-15) page 3, paragraph 0022 - page 4, paragraph 0037; figure 2 -----	1-9
A	CN 101 807 469 B (HUAMING POWER EQUIPMENT MFG CO ET AL.) 25 January 2012 (2012-01-25) page 4, paragraph 0022 - page 3, paragraph 0026; figure 1 ----- -/-	1-9



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 October 2021

Date of mailing of the international search report

05/11/2021

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Pavlov, Valeri

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2021/073380

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 110 189 937 A (STATE GRID CORP CHINA ET AL.) 30 August 2019 (2019-08-30) page 6, paragraph 0029 - page 7, paragraph 0044; figures 1-4 -----	1-9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2021/073380

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2015008104	A1	08-01-2015	
		CN 104205273 A	10-12-2014
		DE 102012202327 A1	22-08-2013
		EP 2815413 A1	24-12-2014
		HK 1201635 A1	04-09-2015
		US 2015008104 A1	08-01-2015
		WO 2013120641 A1	22-08-2013

EP 2261935	A1	15-12-2010	
		BR PI1012952 A2	16-01-2018
		CN 102460623 A	16-05-2012
		EP 2261935 A1	15-12-2010
		EP 2441079 A1	18-04-2012
		WO 2010142680 A1	16-12-2010

CN 101807469	B	25-01-2012	NONE

CN 110189937	A	30-08-2019	NONE
