United States Patent [19]

Brown

[11] **3,711,903**

[45] **Jan. 23, 1973**

[54] **SLIDE FASTENER**

[76] Inventor: **Alexander M. Brown**, 715 S. Beach St., 309-D, Daytona Beach, Fla. 32014

[22] Filed: **Dec. 11, 1968**

[21] Appl. No.: **782,973**

[52] **U.S. Cl.** **24/205.1**, 24/205.13, 24/205.16

[51] **Int. Cl.**.....**A44b 19/32**, A44b 19/10

[58] **Field of Search**.....24/205.1, 205.13–205.15, 24/205.1 C, 205.16 C

[56] **References Cited**

UNITED STATES PATENTS

2,061,680	11/1936	Sipe	24/205.13 UX
2,651,091	9/1953	Priestley	24/205.1
2,910,754	11/1959	Morin	24/205.1
3,141,217	7/1964	Jones	24/205.13 UX
3,389,441	6/1968	Heimberger	24/205.1 C UX

FOREIGN PATENTS OR APPLICATIONS

1,519,912	2/1968	France	24/205.13
741,033	11/1943	Germany	24/205.1
952,073	11/1956	Germany	24/205.13


Primary Examiner—Bernard A. Gelak

Attorney—Hofgren, Wegner, Allen, Stellman & McCord

[57] **ABSTRACT**

An interdigitating fastener having an extruded slit core strip embedded in an extruded slit carrier strip. The core strip is slit in a serpentine manner to define interdigitating exposed portions and includes mechanical interlocking means for retaining each half of the slit core strip in the corresponding carrier strip portion to define a pair of separable assemblies adapted to be connected together and separated selectively by means of an associated slider. In one form the slider is provided with a wedging diamond which extends sufficiently to engage the carrier above and below the core strip and in a second form the slider includes a diamond which engages only the carrier strip outwardly of one face of the core strip. The fastener is economically manufactured by extruding the core strip, slitting the extruded core strip to define the serpentine interdigitating portions, extruding a carrier strip about the slit core strip and slitting the carrier strip to define a pair of core and carrier strip assemblies.

22 Claims, 15 Drawing Figures

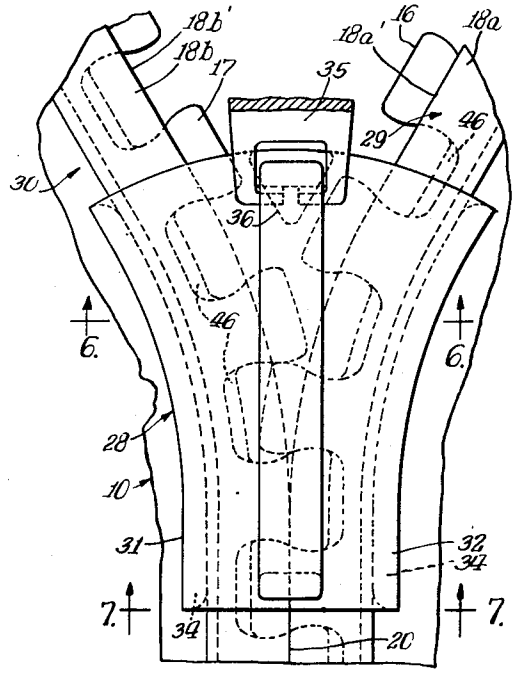

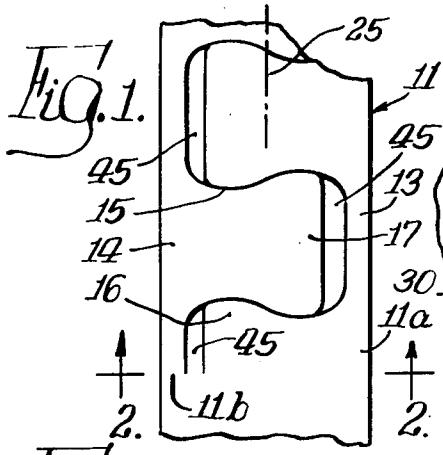


Fig. 1.

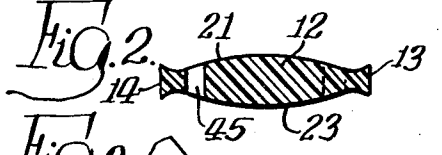


Fig. 2.

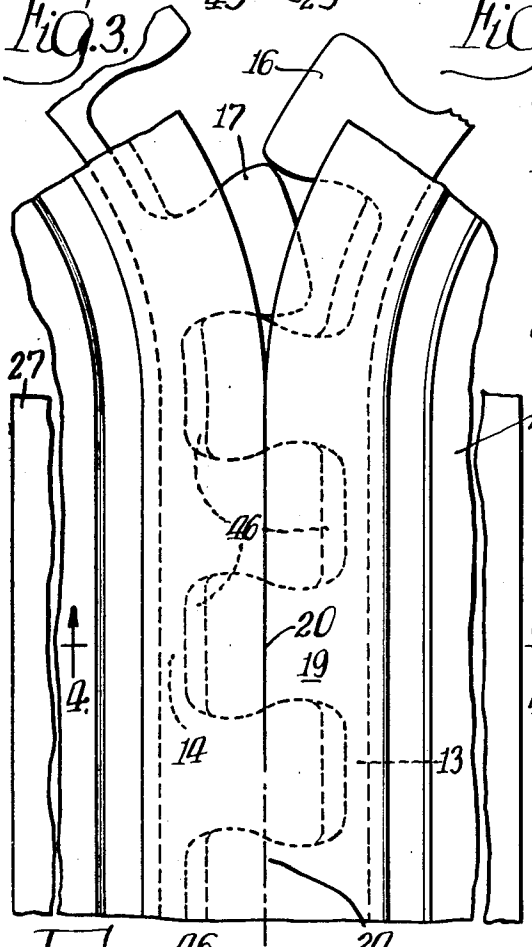


Fig. 3.

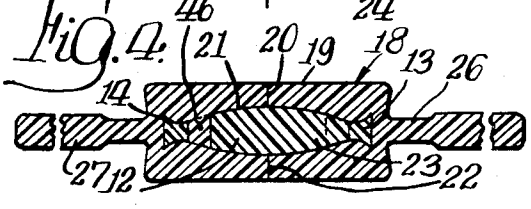


Fig. 4.

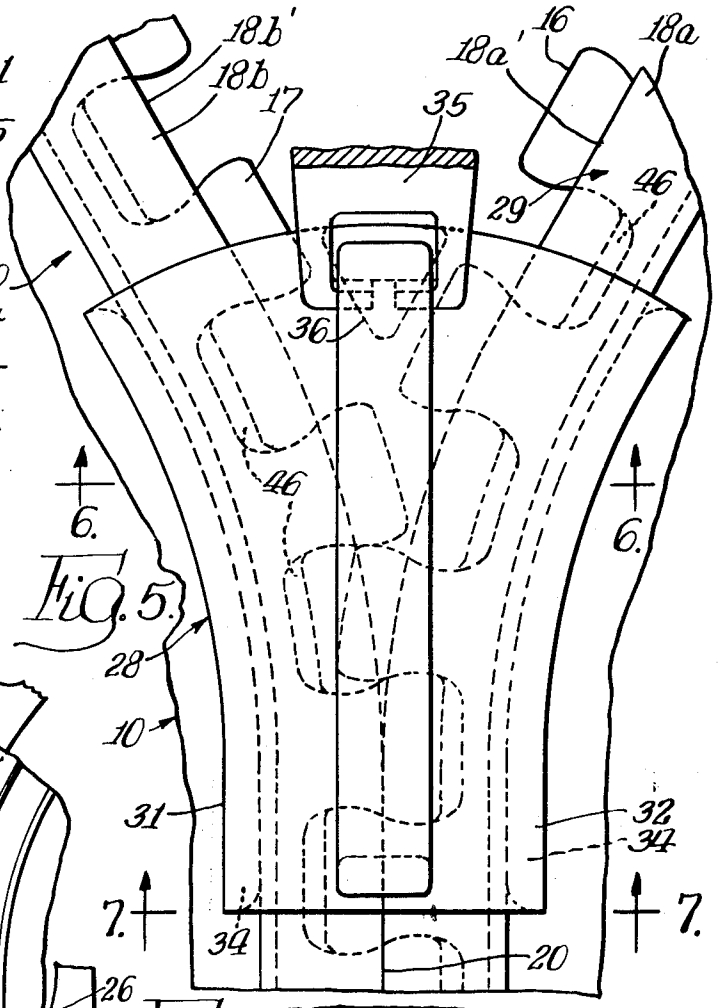


Fig. 5.

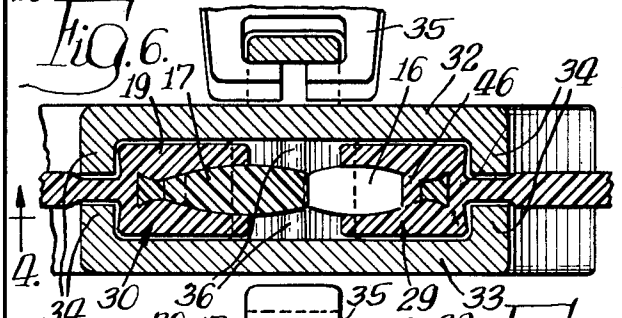


Fig. 6.

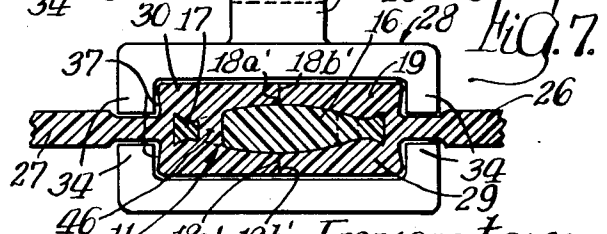


Fig. 7.

Inventor:—
Alexander M. Brown.
By Hofgren, Wegner, Allen,
Stellman & McCord Attys.

Fig. 8.

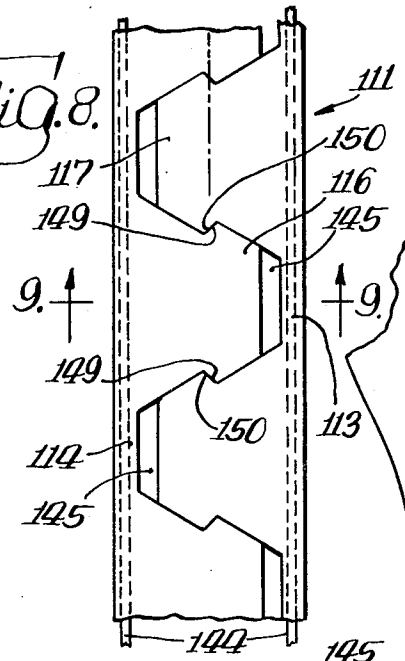


Fig. 9.




Fig. 10.

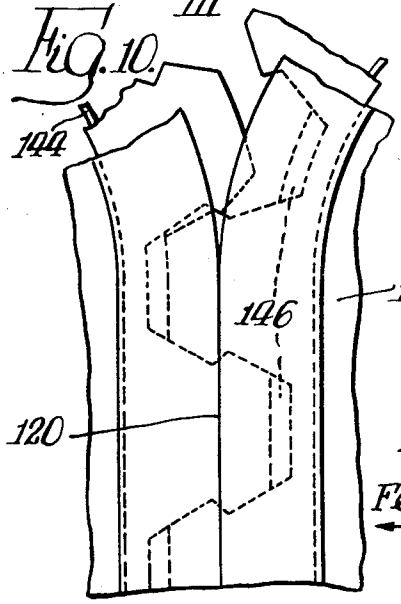


Fig. 11.

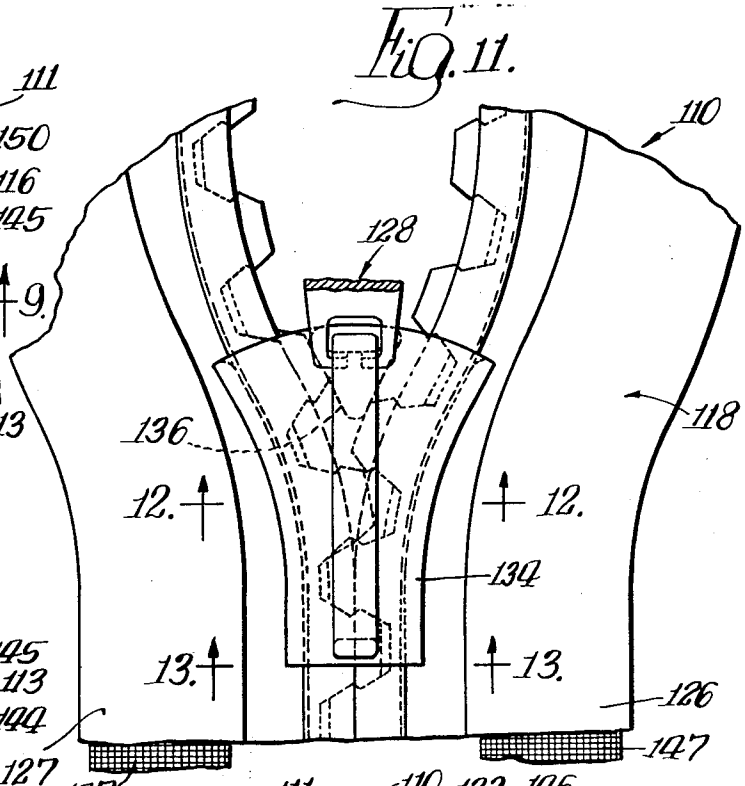


Fig. 12.

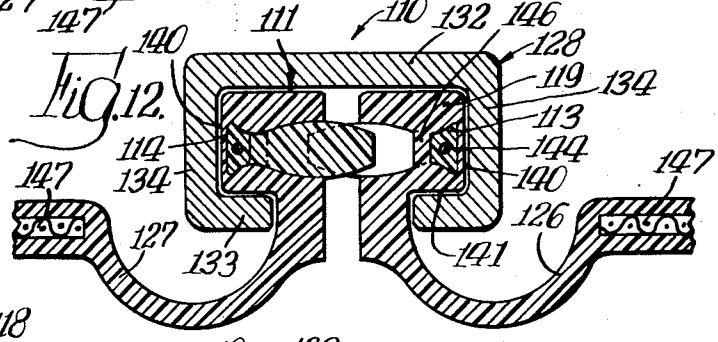


Fig. 13.

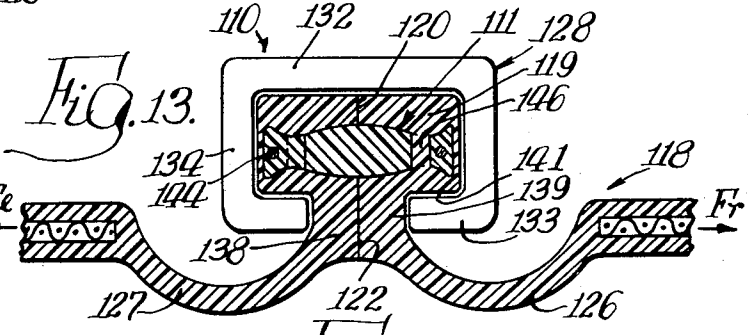


Fig. 14.


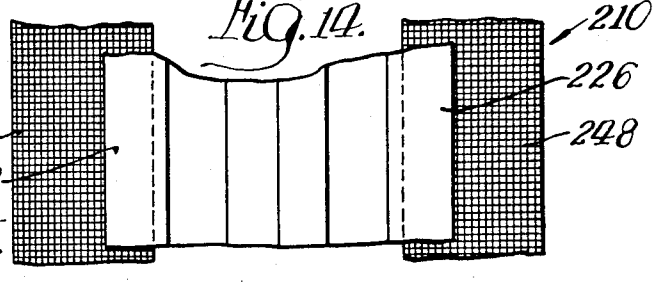


Fig. 15.

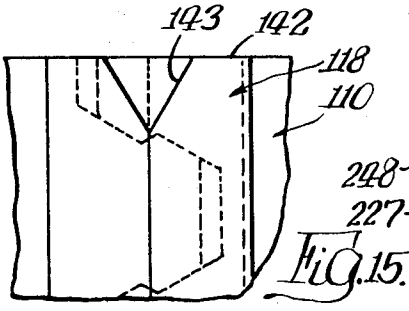

SLIDE FASTENER

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to fasteners and in particular to slide fasteners of the interdigitating type.

2. Description of the Prior Art

A large number of interdigitating slide fasteners of the zipper type are known in the art. The known interdigitating fasteners, however, have the disadvantages of relatively expensive construction, impositive securing and difficulty of effecting desired interdigitation and separation. Further, the known interdigitating slide fasteners do not provide a fully satisfactory seal.

SUMMARY OF THE INVENTION

The present invention comprehends an improved interdigitating fastener eliminating the disadvantages of the above discussed prior art fasteners in a novel and simple manner. The invention comprehends forming such an interdigitating fastener by extruding a core strip. The core strip is subsequently slit longitudinally in a serpentine manner to define interdigitated portions. The slit core strip is then embedded in an extruded carrier which further defines outwardly extending attaching portions. The carrier is then slit longitudinally. The core portions are each provided with means interlocking with the two carrier portions resulting from the slitting thereof permitting the slit core portions to be separated and to be retained one each in association with the separated respective carrier portions. Separation and joining together of the assembled core and carrier portions is effected by a slider having a diamond wedging portion which may extend sufficiently to engage the carrier outwardly at the outer face of the slit core or may be provided with a diamond which engages the carrier only outwardly of one face of the core. The confronting edges of the slit carrier effectively abut in the assembled condition of the fastener above and below the core to provide an improved double seal.

More specifically, the invention comprehends the provision of an interdigitating fastener including a core strip formed of relatively rigid material and having a substantially constant external cross-section. The core strip is provided with a longitudinally extending serpentine through-slit, defining a pair of separably interdigitated core portions. A carrier strip formed of a relatively resilient material is extruded about the core strip to extend substantially the length of the core strip, the carrier strip being provided with a pair of longitudinally extending through-slits one each at opposite faces of the core strip in overlying relationship to the serpentine through-slit of the core strip, the carrier strip defining a pair of separable carrier portions retained one each with the core portions to define a pair of separable core and carrier portion assemblies. The core portions further define complementary distal parts exposed outwardly of the carrier portions when one core and carrier portion assembly is separated from the other core and carrier portion assembly. The carrier portions sealingly abut each other along the carrier slits when the core and carrier portion assemblies are joined with the core portions interdigitated. The fastener further includes a slider having means for selectively urging the assemblies together to interdigitate the distal core parts and juxtapose the carrier portions along the slits to define effectively a sealed fastener, and means for urging the assemblies apart.

Further, more specifically, the invention comprehends the provision in such a fastener of means mechanically interlocking the core portions to the respective carrier portions. The core portions may extend substantially fully to the laterally outer portions of the carrier to provide a relatively rigid support for the slider thereon. The invention further more specifically comprehends providing attaching portions which may extend outwardly from the opposite sides of the fastener at the flatwise centerline plane of the core strip. Alternatively, the attaching portions may be spaced from one face of the core portion whereby the carrier may define a cross-section adapted for mounting of a C-shaped slider thereon.

Further more specifically, the invention comprehends a new and improved method of forming an interdigitating fastener including the steps of extruding a core strip of relatively hard material, slitting the core to define a longitudinally extending serpentine slit fully therethrough defining interdigitated core strip portions, extruding a carrier about the slit core strip, slitting the carrier strip at opposite faces of the core strip to define a longitudinally extending slit fully therethrough and crossing in overlying relationship the serpentine core strip slit, and separating the carrier strip along the slit to concurrently separate the core strip portions.

Still further, the invention comprehends the provision of complementary mechanical interlocking means on each core strip portion and the carrier whereby the fastener defines a pair of sealingly joined core portion and carrier strip portion assemblies, the assemblies being selectively separable. The interlocking means may comprise an enlargement at the outer edges of the core strip portions. Further, the mechanical interlocking means may comprise an arrangement of the core strip portions to define an opening between a base portion of one core strip and the interdigitating teeth of the other portion in which opening a portion of the carrier extends to provide an enclosure of a portion of the base by the carrier.

The invention further comprehends the forming of the core strip of a plastic material as by extrusion thereof with a substantially inextensible reinforcement extending longitudinally of the core strip. The reinforcement may comprise a textile cord or the like and may be disposed within the enlarged interlocking portion.

The interlocking of the core strip portions to the carrier may further be effected by a fusing of the materials of the core strip and carrier strip at the interfaces therebetween. The portions of the core strip projecting from the carrier defining the interlocking teeth may have mold release material applied thereto prior to the fusing operation thereby to assure a maintained separation of these portions for subsequent selective interdigitation.

BRIEF DESCRIPTION OF THE DRAWINGS

Other features and advantages of the invention will be apparent from the following description taken in connection with the accompanying drawings wherein:

FIG. 1 is a fragmentary top view of a slit core strip for use in an interdigitating fastener embodying the invention;

FIG. 2 is a transverse section thereof taken substantially along the line 2—2 of FIG. 1;

FIG. 3 is a fragmentary top plan view of the slit core strip having a slit carrier strip associated therewith;

FIG. 4 is a fragmentary transverse section taken substantially along the line 4—4 of FIG. 3;

FIG. 5 is a fragmentary top plan view of an interdigitating fastener embodying the invention utilizing the core strip and carrier strip assembly of FIG. 3;

FIG. 6 is a fragmentary transverse section taken substantially along the line 6—6 of FIG. 5;

FIG. 7 is a fragmentary transverse section taken substantially along line 7—7 of FIG. 5;

FIG. 8 is a top plan view of a modified form of interdigitating fastener embodying the invention;

FIG. 9 is a fragmentary transverse section taken substantially along the line 9—9 of FIG. 8;

FIG. 10 is a fragmentary top plan view of the slit core strip having a slit carrier strip associated therewith;

FIG. 11 is a fragmentary top plan view of an interdigitating fastener embodying the invention utilizing the core strip and carrier strip assembly of FIG. 10;

FIG. 12 is a fragmentary transverse section taken substantially along line 12—12 of FIG. 11;

FIG. 13 is a fragmentary transverse section taken substantially along line 13—13 of FIG. 11;

FIG. 14 is a fragmentary plan view of a modified form of interdigitating fastener embodying the invention; and

FIG. 15 is a fragmentary top plan view of one end of the assembled core strip and carrier strip of a further modified form of fastener embodying the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the exemplary embodiment of the invention as shown in FIGS. 1—7 of the drawings, an interdigitating fastener generally designated **10** is shown to comprise a core strip **11** formed of relatively hard material such as a plastic. The core strip **11** may be extruded to have a transverse cross-sectional configuration, as shown in FIG. **2**, wherein the mid-portion **12** is enlarged and the opposite base portions **13** and **14** are enlarged to define relatively rigid projections comprising effectively turned edge flanges. The core strip **11** is provided with a serpentine through-slit **15**, as shown in FIG. **1**, to divide the strip **11** into two portions **11***a* and **11***b* having interdigitated distal portions, or interlocking teeth, **16** and **17** respectively. As shown, the portions **16** and **17** interlock as a result of the distally enlarging configuration thereof to define interdigitated coupling means.

The core strip **11** is embedded in a carrier strip generally designated **18** which, as shown in FIGS. **3** and **4**, includes a body portion **19** provided with a first through-slit **20** extending upwardly from the upper face **21** of the core strip mid-portion **12** and a second through-slit **22** extending downwardly from the opposite core strip face **23**. In the illustrated embodiment, slits **20** and **22** are rectilinear and extend along the longitudinal centerline **24** of the carrier strip **18** in overlying crossing relationship to the serpentine slit **15** of the core strip **11**. As shown in FIG. **1**, the slit **15** is symmetrically related to the longitudinal centerline **25** of the core strip **11**.

As further shown in FIG. **4**, the carrier **18** is further provided with laterally outwardly projecting web portions **26** and **27** defining attaching means.

The enlarged edge portions **13** and **14** of the core strip **11** cooperatively define, with the carrier strip **18**, mechanical interlock means. Thus, as shown in FIG. **5**, when the fastener **10** is separated along the longitudinal centerline thereof, as by means of a slider **28**, the carrier strip **18** is divided into a pair of carrier strip portions **18***a* and **18***b* with the enlarged distal portions **16** and **17** of the core strip portions **11**a and **11**b projecting inwardly therefrom to be exposed inwardly of the edges **18***a'* and **18***b'* defined by slit **20** of the carrier strip **18**. The interlocking portions **13** and **14** effectively positively retain the respective core strip portions **11***a* and **11***b* in the respective carrier strip portions **18***a* and **18***b* thereby to define separable core strip and carrier strip portion assemblies **29** and **30**.

As best seen in FIGS. **1** and **6**, the core strip **11** defines a plurality of openings **45** disposed between the longitudinally extending base portions **13** and **14** and the confronting distal portions **16** and **17** of the interdigitating teeth. The carrier includes portions **46** as best seen in FIG. **6** which extends through the openings **45** thereby completely enclosing the base portions **13** and **14** outwardly of the respective openings **45** and thereby providing further positive mechanical interlocking means maintaining the core strips in positive retained association with the carrier strip portions **18***a* and **18***b*.

The slider **28** includes a conventional flared guide portion **31** defined by an upper section **32** and a lower section **33** embracing the carrier body portion **19**, as shown in FIG. **6**. Slider portions **32** and **33** are provided with inturned legs **34** for urging the assemblies **29** and **30** forcibly together to effect interdigitation of the core strip portions **16** and **17**, as shown in FIG. **6**. For facilitated manipulation of the slider, a pull **35** is connected thereto in the conventional manner to effect such interdigitation as by upward movement of the slider, as seen in FIG. **5**.

To effect separation or opening of the fastener **10**, the slider is manipulated in an opposite manner to move the slider downwardly, as seen in FIG. **5**. The slider includes a diamond wedge **36** which enters between the core portions **16** and **17** to effect a separation thereof, as shown in FIG. **5**, as a result of a downward movement therebetween. As seen in FIG. **6**, the diamond **36** extends the full height of the assemblies **29** and **30** between the upper and lower portions **32** and **33** of the slider whereby the diamond acts on all slit portions of the fastener concurrently to effect the desired opening of the fastener.

Illustratively, the carrier strip **18** may be formed of a soft resilient plastic, such as vinyl plastic, which is preferably thermally resistant to maintain the physical characteristics thereof under a wide range of temperature conditions. In one excellent example of the fastener, the carrier strip was formed of a polyvinyl chloride having an A-scale durometer hardness of approximately 75. The invention comprehends a further interlocking of the core and carrier strips as by fusing of the plastic material of the core strip portions to the

plastic material of the carrier strip portions during an extrusion of the carrier strip onto the core strip. To preclude fusing of the interdigitating tooth portions **16** and **17** of the core strip to the carrier strip, a mold release agent may be applied to portions **16** and **17** prior to the forming of the carrier strip thereto.

Thus, the fastener **10** may be extremely economically formed. The extrusion of core strip **11** may be continuously effected with the slitting being effected therein by a suitable shear of proper serpentine configuration. The carrier strip **18** may be extruded onto the core strip **11** substantially continuously and the slits **20** and **22** effected therein substantially continuously by a suitable slitting knife. As the edges **18***a'* and **18***b'* of the slit carrier **18** are in abutting relationship in the assembled condition of the fastener **10**, a seal across the fastener is obtained both above and below the core strip **11**, as seen in FIG. **7**. The attaching portions **26** and **27** may be secured to suitable adjacent portions of the structure to be fastened as by stitching, stapling, etc. As best seen in FIGS. **4** and **7**, the body **19** of the carrier strip **18** may be slightly undercut, as at **37**, adjacent the attaching portions to provide low friction in the movement of the slider **28** thereover.

Fastener **10** is extremely simple and economical of construction, while yet providing an improved sealing fastening means. Forming of the core from a relatively hard material provides high strength in the fastener while yet the relatively softer carrier may have improved sealing effect and provides facilitated attachment of the fastener. The slitting of the relatively rigid hard core strip causes the core strip to become relatively flexible in a direction perpendicular to the flatwise extent of the fastener.

In illustrating fastener **10**, the slits **20** and **22** are illustrated in the closed arrangement of the fastener as being sealingly closed by the abutting edges of the carrier strip portions. The improved rigid core strip means maintains this desirable positive sealed association. However, as will be obvious to those skilled in the art, where a sealed fastener is not required, the slit edges may be spaced apart as desired. Because of the extreme simplicity and economy of construction, however, fastener **10** may provide the desirable feature of a sealed carrier while yet being lower in cost than the conventional nonsealing fastener.

The invention comprehends the forming of the core strip and carrier strip by many suitable materials. In the preferred form, the strips are extruded for minimized cost. As will be obvious to those skilled in the art, suitable formulations to provide desirable characteristics such as increased strength, hardness, flexibility, and the like, may be used as desired. Further, the fastener may be formed in different colors as desired and may be made in a wide range of sizes including large sizes for use in heavy duty applications, such as with tarpaulins, boat covers, fumigating and pressurized enclosure means, etc. By forming the fastener completely out of plastic materials, maintenance problems such as mildew, corrosion, and the like, are effectively eliminated. Further, as the carrier strip may be formed of a suitable plastic, the carrier strip may be attached to the structure to be interconnected by the fastener by heat sealing, or the like, eliminating the relatively costly conventional sewing operation.

Turning now to the embodiment of the invention illustrated in FIGS. **8–13**, a modified form of fastener embodying the invention generally designated **110** is shown to comprise a fastener generally similar to fastener **10** but having a core strip **111** and a carrier strip **118** which are modified in cross-section to provide further improved sealing in the installed fastener. The core strip **111** is generally similar to core strip **11** of fastener **10** and functions to provide an interdigitating releasable closure of the fastener in a substantially similar manner. However, as shown in FIGS. **8** and **9**, the core strip **111** is provided with a longitudinal, substantially inextensible reinforcing means herein comprising a pair of textile cords **144** for precluding stretching of the core strip. As shown in FIG. **9**, the reinforcing cords **144** may be disposed within the enlargements **113** and **114** at the opposite sides of the core strip **111**. Within the scope of the invention, the reinforcing means **144** may be similarly provided in the core strip **11** as desired. The reinforcing means provides the additional feature of preventing stretching of the core strip during the forming of the carrier strip thereon as may occur where the core strip is formed of a heat stretchable material and the core strip is applied in a heated form such as by extrusion. As shown in FIG. **8**, the distal portions, or interdigitating teeth, **116** and **117**, may be provided with offset shoulders **149** and **150** providing a positive interdigitated engagement between the teeth. The teeth extend only partially to the base potions **113** and **114** thereby defining openings **145** through which a portion **146** of the carrier strip may extend to provide the desirable encircling interlocked relationship of the carrier strip to the base portions as discussed above relative to fastener **10**. The openings **145** may be formed by concurrent removal of the material during the slitting of the core strip. Alternatively, the core strip may be slit to define teeth corresponding directly with the recess of the opposite strip portion and after separation of the core strip portions, the distal end of the teeth may be removed so that upon subsequent interdigitation the openings **145** result.

As best seen in FIGS. **10** and **11**, carrier strip **118** is provided with attaching webs **126** and **127** extending from a lower portion **138** of the carrier strip **118** which is spaced from the body portion **119** thereof by a thin spacer portions **139**. Lower portion **138** and spacer portion **139** are provided with a slit **122** along the longitudinal centerline thereof and body portion **119** is provided with a slit **120** along the longitudinal centerline thereof, as shown in FIG. **13**.

Body portion **119** may be somewhat thinner than body portion **19** of fastener **10** whereby the interlocking portions **113** and **114** of the core strip **111** are disposed closely adjacent the laterally outer surfaces **140** of the carrier strip body **119**, thereby providing a relatively rigid guiding surface for the slider legs **134**.

The slider diamond **136** may extend only above the upper surface of the core strip. The slider legs **134** connect the upper portion **132** to the lower inturned flange portion **133** underlying the carrier strip body portion **119**. The inturned legs **133** extend to closely adjacent the narrow spacer portion **139** whereby the slider effectively is mounted on the carrier strip body portion **119**. As shown in FIGS. **12** and **13**, the spacing of the attaching portions **126** from the lower face **141** of the

carrier strip body portion **119**, and thus below the core strip **111**, is substantially greater than the thickness of the legs **133** to permit free sliding movement of the slider on the core strip body.

As shown in FIG. **15**, the upper end **142** of the carrier strip **118** is provided with a triangular shaped recess **143** which is complementary to the diamond **136** so that when the slider **128** is brought fully to the upper end of the fastener **110**, the diamond may be received in the recess **143** permitting the carrier strip edges at **120** and **122** to be sealingly closed along their entire longitudinal extent.

A highly desirable advantage of the construction of fastener **110** is the improved sealing thereof as the result of forces tending to pull the attaching portions **126** and **127** apart, as may occur in the conventional fastening functioning. Thus, as best seen in FIG. **13**, forces Fr and Fl acting concurrently to the right on attaching portion **126** and to the left on attaching portion **127** tend to pivot the carrier body about the relatively rigid core strip **111** whereby more forceful abutment of the carrier strip portions along slit **120** is effected. While such pivoting may tend to urge the lowermost portion of the carrier body **119** slightly outwardly, the slider may be moved relatively easily on body **119** as a result of the relatively rigid mounting means defined by the hard core portions **113** and **114** adjacent the outer surface of the carrier strip body. Thus, fastener **110** provides improved sealing while yet assuring facilitated simple operation thereof by selective opening and closing movements of the slider **128**.

As shown in FIGS. **12** and **13**, the attaching portions **126** and **127** may be somewhat rounded to provide improved resiliency in the fastener **110** relative to the forces Fr and Fl. The attaching portions **126** and **127** may be provided with fabric reinforcements **147** for improved strength in joining the fastener to the structures to be connected thereby. Referring to FIG. **14**, a further modified form of fastener generally designated **210** is shown to comprise a fastener similar to fastener **110** but having fastening portions **226** and **227** provided with fabric reinforcements **248** which extend laterally outwardly from the portions **226** and **227** for use in joining the fastener to fabric and the like.

The elements of fasteners **110** and **210** may be formed similarly to the elements of fastener **10** by simple and economical extrusion and shearing operations. Thus, the fasteners **110** and **210** may be similarly made by continuous manufacturing steps effectively minimizing the cost thereof. Elements of fasteners **110** and **210** corresponding to similar elements of fastener **10** are identified by similar reference numerals but **100** or **200** higher. Fasteners **110** and **210** function similarly to fastener **10**, except as otherwise noted above.

While I have shown and described certain embodiments of my invention, it is to be understood that it is capable of many modifications. Changes, therefore, in the construction and arrangement may be made within the spirit and scope of the invention as defined in the appended claims.

I claim:

1. An interdigitating fastener comprising: a core strip formed of relatively rigid material and having a substantially constant external cross-section along the length thereof and provided with a longitudinally extending serpentine through-slit, said strip defining a pair of separably interdigitated core portions; a carrier strip formed of a relatively resilient material positioned about said core strip and extending substantially the length of said core strip, said carrier strip being slit longitudinally to define a pair of separable carrier portions forming a pair of separable core and carrier portion assemblies having slit, accurately corresponding edges in overlying and underlying relationship to the longitudinal centerline of said serpentine through-slit of said core strip, said core portions further defining longitudinal edge portions secured in said carrier portions and complementary distal parts exposed outwardly of said carrier slit edges when one core and carrier portion assembly is separated from the other core and carrier portion assembly, said carrier slit edges being juxtaposed when said core and carrier portion assemblies are joined with said core portions interdigitated, cooperating aperture portions of said core strip and integral projecting portions of said carrier strip positioned therein and defining interlock means mechanically locking the paired core and carrier strip portions together; and means for selectively urging said assemblies together to interdigitate said core portions and juxtapose said carrier slit edges.

2. The interdigitating fastener of claim **1** wherein said core strip defines a plurality of through openings and said carrier strip includes portions formed as one piece with the carrier strip and extending through said through openings to define said interlock means.

3. The interdigitating fastener of claim **1** wherein said interlock means further comprises a rigid enlargement unitary with said respective core portions.

4. The interdigitating fastener of claim **1** wherein said interlock means further comprises a turned flange unitary with said respective core portions.

5. The interdigitating fastener of claim **1** wherein said carrier strip slit extends along the longitudinal centerline of the carrier strip.

6. The interdigitating fastener of claim **1** wherein said core strip slit is substantially symmetrically disposed relative to the longitudinal centerline of said core strip.

7. The interdigitating fastener of claim **1** wherein said core strip has a transverse cross-section widening to the longitudinal centerline of said core strip.

8. The interdigitating fastener of claim **1** wherein said core strip is formed of a relatively hard plastic.

9. The interdigitating fastener of claim **1** wherein said carrier strip includes opposite web portions projecting laterally outwardly to define attachment means.

10. The interdigitating fastener of claim **9** wherein said web portions are disposed at the transverse centerline plane of the fastener.

11. The interdigitating fastener of claim **9** wherein said web portions are disposed in flatwise alignment spaced from one face of said core strip.

12. The interdigitating fastener of claim **9** wherein said web portions are disposed in flatwise alignment and spacer means is provided on one carrier strip portion at said slit thereof supporting said web portions in spaced relationship to said core strip.

13. The interdigitating fastener of claim **1** further including substantially inextensible reinforcing means extending longitudinally of the core strip portion.

14. The interdigitating fastener of claim 1 wherein said core strip portions extend to adjacent the laterally outer surfaces of said carrier portions.

15. The interdigitating fastener of claim 1 wherein said assemblies are sealingly abutted along said carrier strip slit edges.

16. The interdigitating fastener of claim 1 wherein a slit of said carrier strip is provided with a V-shaped recess at one end of the fastener, and said means for urging said assemblies together comprises a slider including a diamond complementary to said recess, said diamond being received in said recess when said slider is disposed at said one end of the fastener permitting said assemblies to be sealed together fully to said one end by the abutment of the carrier strip portions at the carrier strip slit.

17. The interdigitating fastener of claim 1 wherein each of said carrier strips includes a portion extending about a portion of the associated core strip portion to positively lock the core strip portion in the assembly.

18. An interdigitating fastener comprising:

a core strip including a pair of separable interlocked portions each defining an elongated base, and a series of spaced teeth projecting from and integral with said base portion, the teeth of one portion being spaced from the base of the other portion when said portions are interlocked to define a plurality of openings therebetween; and

a carrier strip of material softer than the core strip material supporting said core strip, said carrier strip including integral portions extending through said openings and portions outwardly of said core strip base interlocking the core strip portion to the carrier strip.

19. The interdigitating fastener of claim 18 wherein said base is provided with a substantially inextensible longitudinal reinforcement effectively precluding undesirable elongation of the core strip portion.

20. The interdigitating fastener of claim 19 wherein said reinforcement comprises a textile cord.

21. The interdigitating fastener of claim 19 wherein said core strip is formed of a thermoplastic material.

22. An interdigitating fastener comprising: a core strip formed of relatively rigid material and having a substantially constant external cross-section along the length thereof and provided with a longitudinally extending serpentine through-slit, said strip defining a pair of separably interdigitated core portions; a carrier strip formed of a relatively resilient material positioned about said core strip and extending substantially the length of said core strip, said carrier strip being slit longitudinally to define a pair of separable carrier portions forming a pair of separable core and carrier portion assemblies having slit, accurately corresponding edges in overlying and underlying relationship to the longitudinal centerline of said serpentine through-slit of said core strip, said core portions further defining complementary distal parts exposed outwardly of said carrier slit edges when one core and carrier portion assembly is separated from the other core and carrier portion assembly, said carrier slit edges being juxtaposed when said core and carrier portion assemblies are joined with said core portions interdigitated; and means for selectively urging said assemblies together to interdigitate said core portions and juxtapose said carrier slit edges, said core strip having a thick mid-portion with said distal parts narrowing outwardly to preclude facial engagement of the distal parts with the overlying and underlying surfaces of the carrier strip until said distal parts are fully received in the opposing core portion in the interdigitated arrangement thereof.

* * * * *