




(86) Date de dépôt PCT/PCT Filing Date: 2002/01/30
(87) Date publication PCT/PCT Publication Date: 2002/08/08
(45) Date de délivrance/Issue Date: 2009/03/24
(85) Entrée phase nationale/National Entry: 2003/07/30
(86) N° demande PCT/PCT Application No.: US 2002/002735
(87) N° publication PCT/PCT Publication No.: 2002/061235
(30) Priorité/Priority: 2001/01/31 (US60/265,652)

(51) Cl.Int./Int.Cl. *E21B 17/10* (2006.01),
E21B 23/00 (2006.01), *E21B 43/119* (2006.01)
(72) Inventeurs/Inventors:
SMITH, DAVID RANDOLPH, US;
HARKINS, GARY O., US
(73) Propriétaire/Owner:
SENSOR HIGHWAY, LTD., GB
(74) Agent: SMART & BIGGAR

(54) Titre : APPAREIL ET PROCEDE D'ORIENTATION MECANIQUE DE SYSTEMES DE PERFORATION DANS UN
PUITS

(54) Title: APPARATUS AND METHOD TO MECHANICALLY ORIENT PERFORATING SYSTEMS IN A WELL

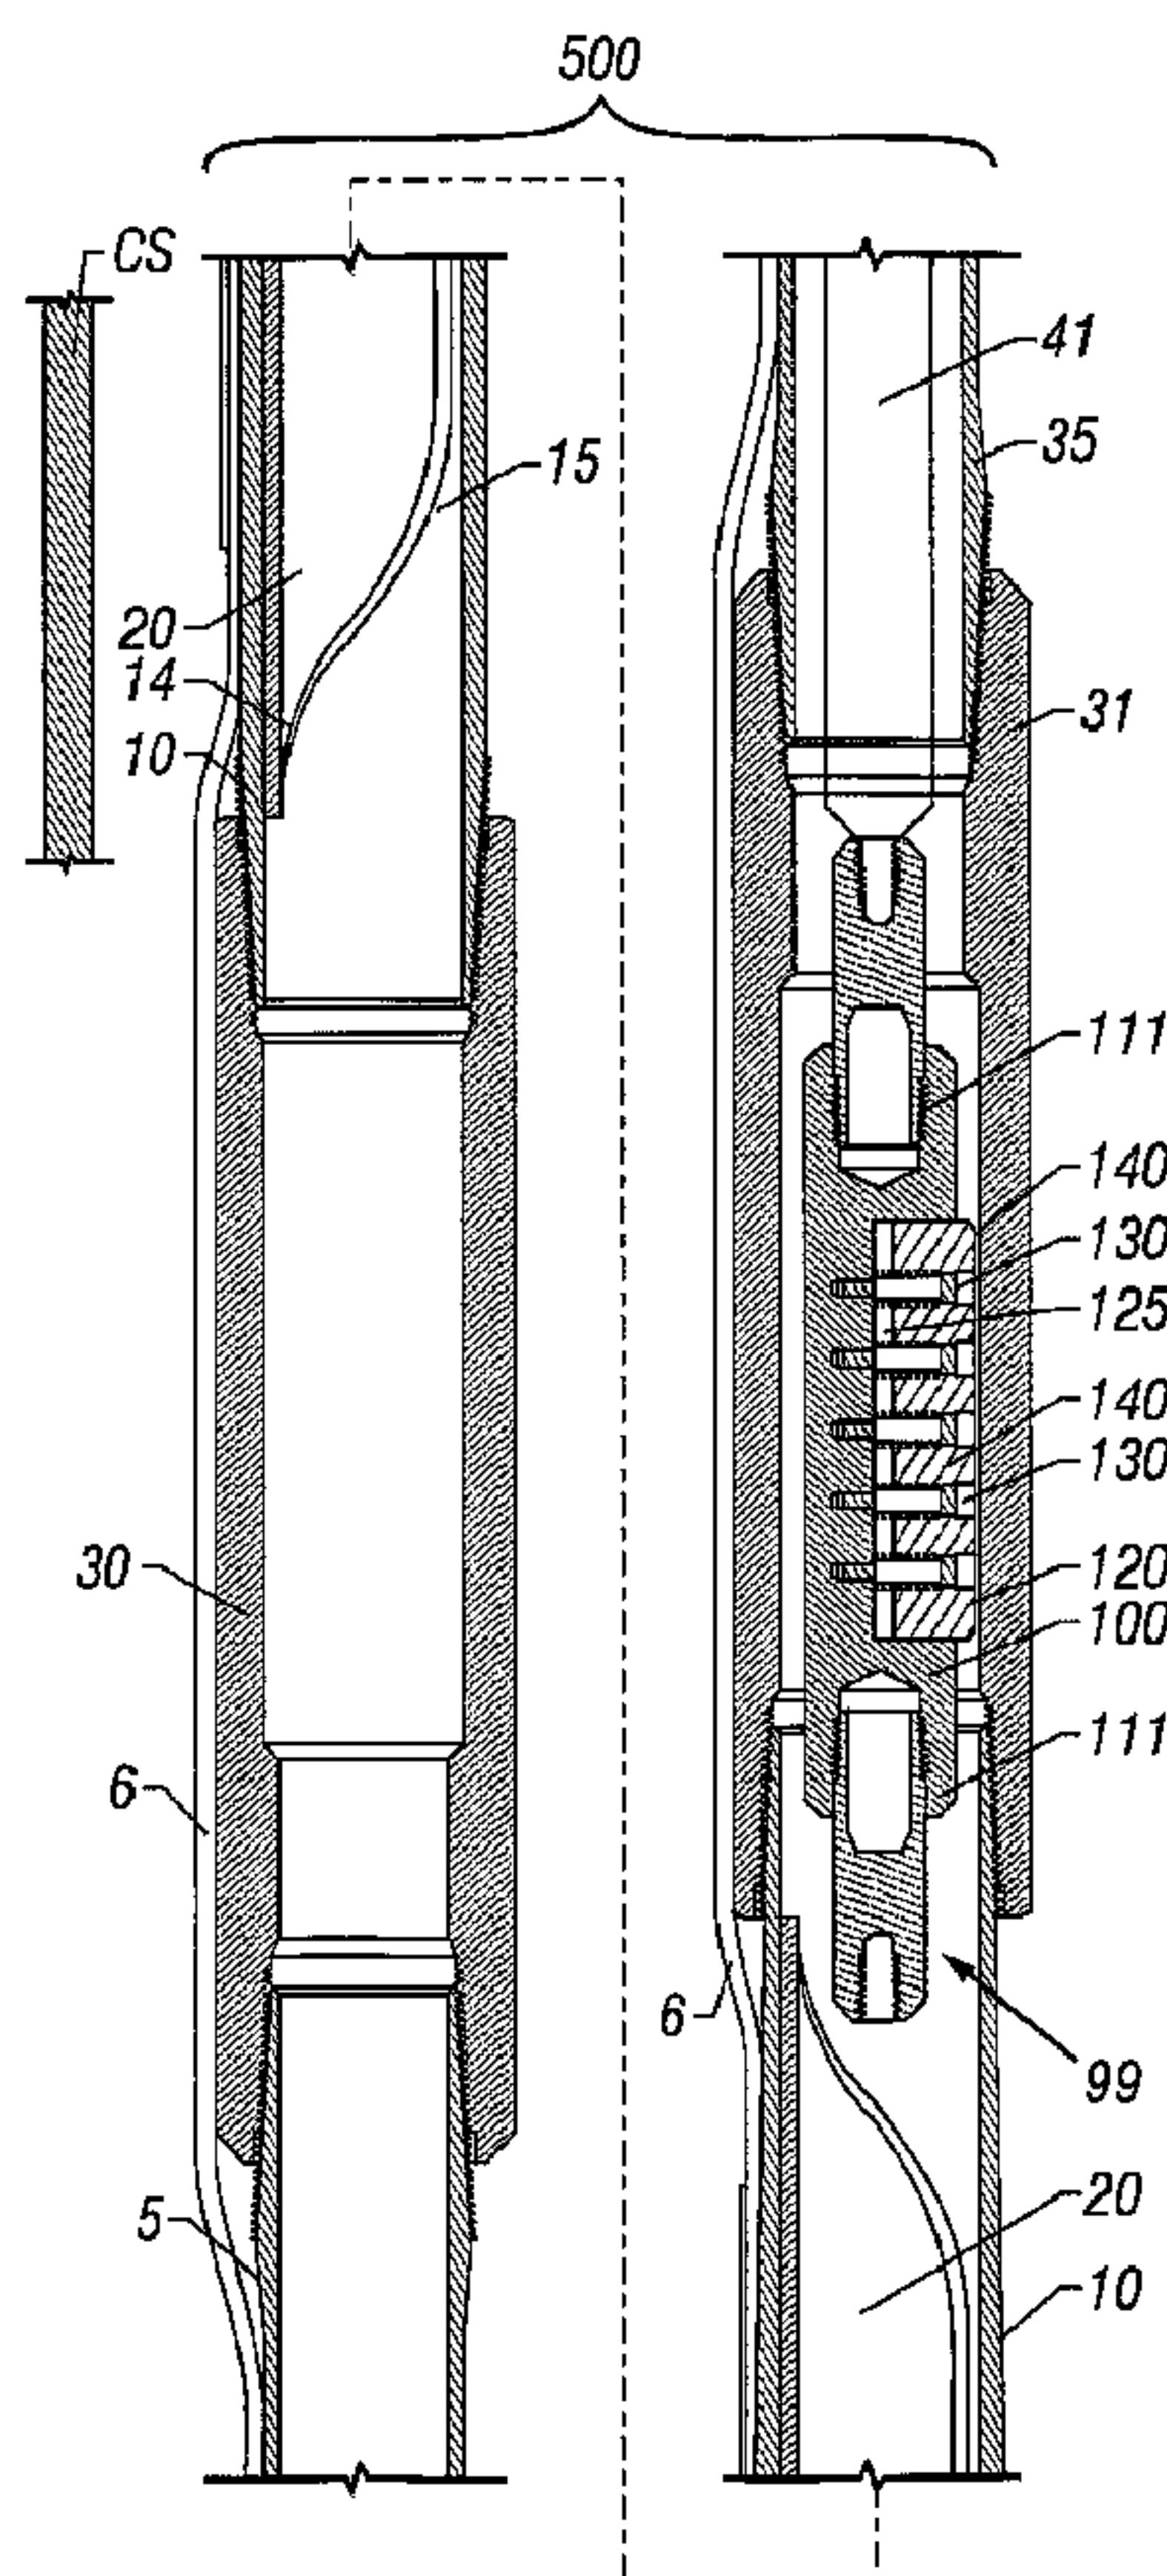

(57) Abrégé/Abstract:

The present invention relates to an apparatus and method for using that apparatus to orient a perforating gun (41) or system to minimize or eliminate the damage that may be caused to exterior control conduits, conductors, devices or to adjacent interior well



(57) **Abrégé(suite)/Abstract(continued):**

control lines. The perforating gun (41) or system is attached to a orienting mandrel (99), which has a resilient cam (120) or guide that engages an orienting channel (15) formed on the interior of a specially fabricated tubular member (10). The tubular member (10) is appropriately spaced and properly oriented in relation to the perforating system (41) blast thereby allowing attachment of lines, conduits or devices (6) in the opposite radial direction from the blast of the perforating system (41).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 August 2002 (08.08.2002)

PCT

(10) International Publication Number
WO 02/061235 A1

(51) International Patent Classification⁷: **E21B 17/10**,
23/00, 43/119

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **SMITH, David Randolph** [US/US]; 1121 Mission Hills, College Station, TX 77845 (US). **HARKINS, Gary O.** [US/US]; 10500 Salisbury Drive, Bakersfield, CA 93311 (US).

(21) International Application Number: PCT/US02/02735

(22) International Filing Date: 30 January 2002 (30.01.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/265,652 31 January 2001 (31.01.2001) US


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **SENSOR HIGHWAY, LTD.** [GB/GB]; Roman House, North Way, Walworth Industrial Estate, Andover, Hampshire SP10 5AT (GB).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,

[Continued on next page]

(54) Title: APPARATUS AND METHOD TO MECHANICALLY ORIENT PERFORATING SYSTEMS IN A WELL

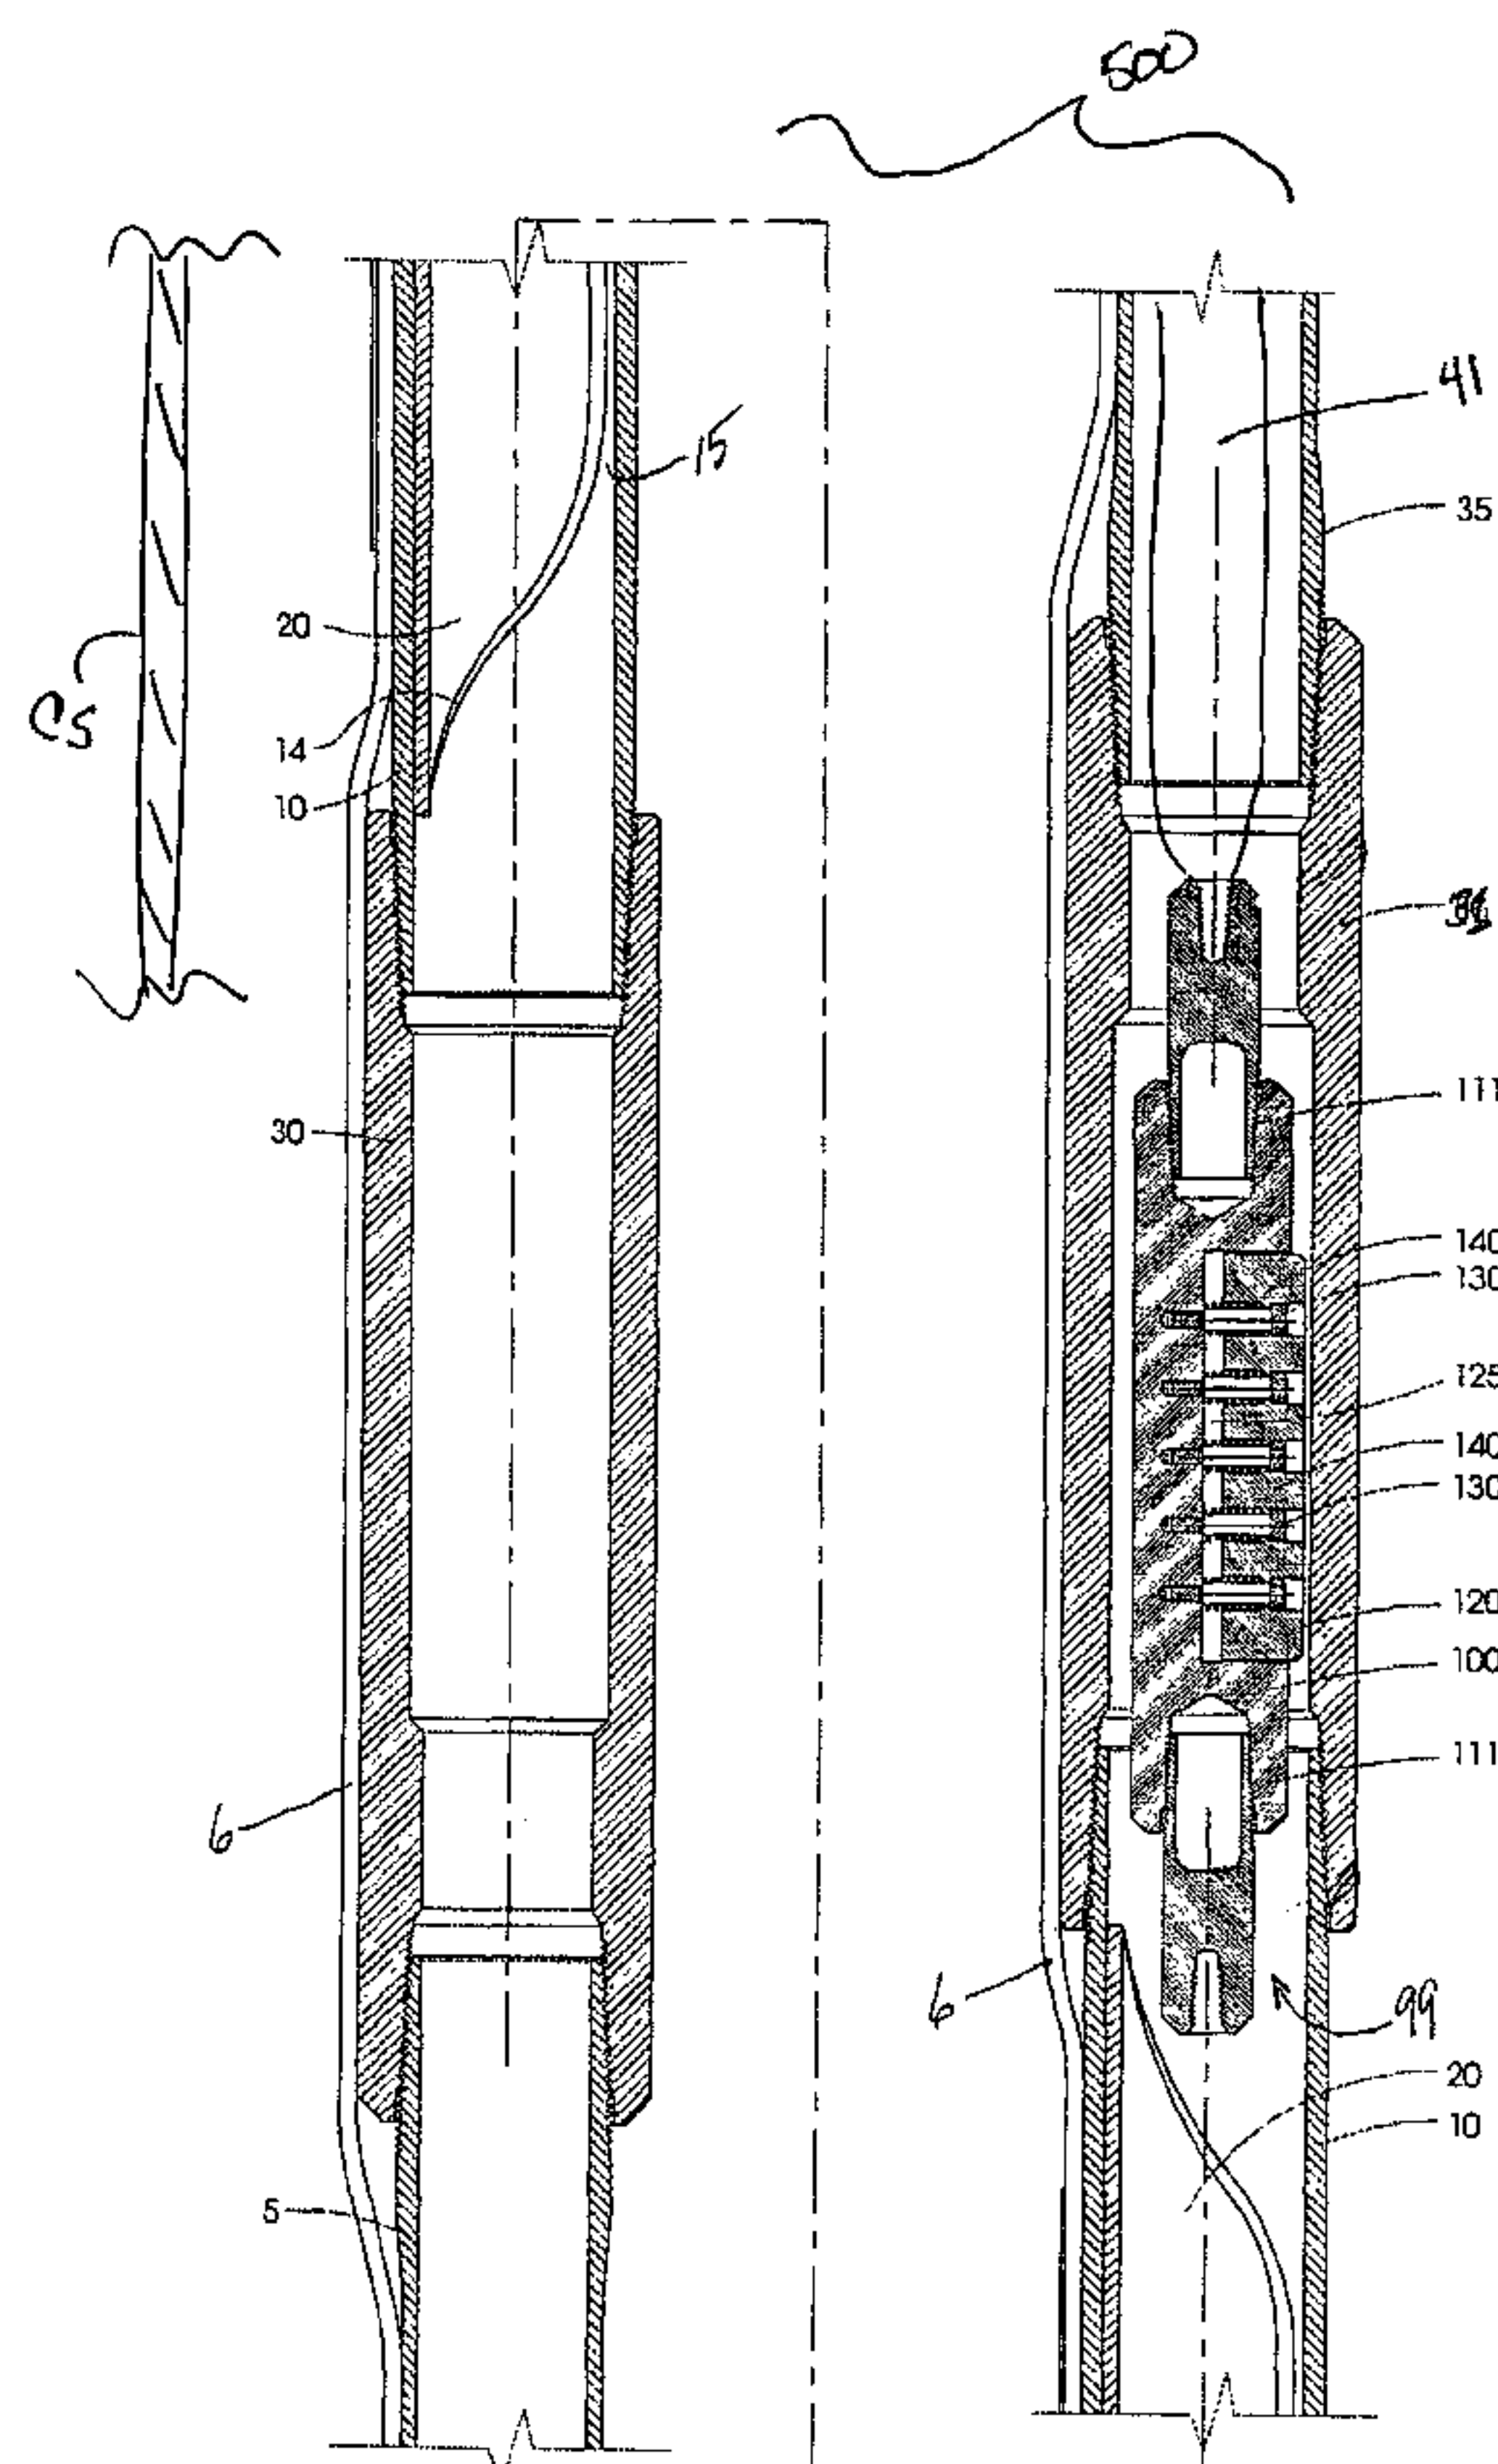

(57) Abstract: The present invention relates to an apparatus and method for using that apparatus to orient a perforating gun (41) or system to minimize or eliminate the damage that may be caused to exterior control conduits, conductors, devices or to adjacent interior well control lines. The perforating gun (41) or system is attached to an orienting mandrel (99), which has a resilient cam (120) or guide that engages an orienting channel (15) formed on the interior of a specially fabricated tubular member (10). The tubular member (10) is appropriately spaced and properly oriented in relation to the perforating system (41) blast thereby allowing attachment of lines, conduits or devices (6) in the opposite radial direction from the blast of the perforating system (41).

WO 02/061235 A1

WO 02/061235 A1



GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Published:

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

APPARATUS AND METHOD TO MECHANICALLY ORIENT PERFORATING SYSTEMS IN A WELL

BACKGROUND OF THE INVENTION

5 **Field of Invention**

This invention presents an apparatus and method to mechanically orient perforating systems in a well relative to other devices, conduits, wave-guides, and electrical cable disposed in a well.

State of the Art

10 Typically to extract fluids from below the earth's surface, a casing is run into a penetration made in the earth, referred to herein as a well bore, and a length of casing is disposed concentrically inside the well bore. This casing is grouted into the well by placing a cement grout in the annular space between the casing outer surface and the well bore forming a bond between the casing's outer diameter and the well
15 bore. Production tubing or drill pipe may also be deployed within the casing. Subsequently the casing (or tubing or pipe, if applicable), the cement, and at least one subterranean formation are penetrated by the use of a variety of perforating systems known to those familiar with oil and gas production, typically consisting of explosive charges disposed inside a tubular housing connected to a surface detonation device by
20 an electrical conductor. The perforating systems when actuated form high-pressure exhaust jets and their resulting shock waves penetrate the casing (or tubing or pipe, if applicable), cement and subterranean formation. Other types of perforating systems utilize high pressure fluids and or abrasives to cut through the casing (or tubing or pipe, if applicable), the cement, and the formation to create the required perforation or
25 slot, and thereby allow communication of subterranean fluids into the casing, pipe, or

tubing being perforated. In any case (the explosive charge method, or the hydraulic penetration or other penetration methods), the objective is to allow for a pressure or hydraulic communication path to be formed from the inner diameter of the casing, pipe, or tubing into the subterranean formation and each is collectively referred to
5 herein as a perforating gun.

In certain cases, the casing, pipe, or tubing to be penetrated is positioned in the well adjacent other devices or conduits which may be disposed parallel to the outer diameter of the casing, pipe, or tubing at the depth to be penetrated. When perforating the casing, pipe, or tubing in these situations, the resulting penetration
10 operation may also inadvertently penetrate or otherwise damage the adjacent device or conduit. Hence, in the situation involving any parallel conduits or devices disposed in well at the depth where the penetration is to be made as in some dual string completion systems, or when other devices are located outside the casing, pipe, or tubing to be perforated at the same depth, it is possible to inadvertently penetrate
15 these other conduits or devices. These devices and conduits can be control lines, dual production tubing, casing strings, pressure gauge carriers, geophones, hydrophones, wave guides, sensing devices, and many other tools and instruments disposed in subterranean environments.

The device and method described herein aligns the perforating systems such
20 that, when they are energized, they penetrate a predetermined radial direction relative to this inventions apparatus, and by fixing other devices and conduits in a position that is known relative to the apparatus of this invention a method is presented to avoid damaging or penetrating devices and conduits upon perforation. An orientation method and apparatus disclosed also accomodates perforating systems to purposely

78543-129

penetrate, ignite, or excite devices and apparatus connected to the casing or tubing in which the perforating system is disposed concentrically inside, such that the device, explosive charge, or conduit connected to the pipe is
5 disposed in a known radial position relative to this invention's orientation device.

Thus, in one aspect, the invention provides a well casing system useful for mechanically orienting a perforating system comprising a guide member oriented in a
10 fixed radial relationship with respect to a perforator gun, comprising: at least one orienting tubular positioned in a casing string cemented in a wellbore; a protected member disposed along the casing string; a guide receiving member on an interior surface of the orienting tubular, the guide
15 receiving member oriented in a fixed radial relationship with respect to the protected member; a cam mounted in the guide member, the cam being movable in a radial direction; and wherein the guide receiving member cooperates with the cam to orient the perforator gun away from the protected
20 member, further wherein a section of the casing string above and below the guide receiving member has an internal diameter larger than the internal diameter of the remainder of the casing string.

In another aspect, the invention provides a
25 perforating system useful for perforating a well casing system having a protected member secured to a casing string including spaced orienting tubulars having a guide receiving member on an interior surface thereof for orienting the perforation system to perforate away from the protected
30 member, comprising: a perforator gun attached to a conveyance device for passing the perforator gun through the casing string to a predetermined depth; a guide mandrel secured to the perforator gun in fixed radial relationship

78543-129

therewith; a guide member fixed on an exterior surface of the guide mandrel passable through the orienting tubulars in cooperation with the guide receiving members to orient the perforator gun to perforate away from the protected member; and wherein the protected member is affixed against the casing string along a length of the casing string.

In another aspect, the invention provides a system useful for mechanically orienting a perforating system, comprising: a perforating gun including a guide member having a cam; at least one orienting tubular positioned in a string of tubulars in a wellbore; a protected member located along the string and attached to the string by a plurality of clamps; a guide receiving member on an interior surface of the orienting tubular comprising an orienting path; the orienting path oriented in a fixed radial relationship with respect to the protected member; wherein the cam is biased to move linearly into cooperation with the orienting path to orient the perforating gun away from the protected member.

In another aspect, the invention provides a method for casing a well, comprising: connecting casing joints together end-to-end to form a casing string; inserting at least one orienting tubular in the casing string; wherein a guide receiving member is fixed on an interior surface of the orienting tubular; securing a protected member along the casing string in a radially oriented position with respect to the guide receiving member; cementing the string in a well bore; suspending a perforator gun attached to a conveyance device, a guide mandrel secured to the perforator gun in fixed radial relationship therewith and a guide member fixed to the guide mandrel; passing the perforator gun through the casing string to a depth below a surface of the well; radially orienting the perforator gun with respect to the protected member by interengagement of the guide

78543-129

member with the guide receiving member as the perforator gun is passed through the orienting tubular; activating the perforator gun to perforate the casing string away from the protected member.

78543-129

5

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a cross-sectional view of the apparatus and orienting guide in a casing.

Fig. 2 is a cross-sectional view of the device before movement into the preferred orientation.

10

Fig. 3 is a cross-sectional view of the device after movement into the preferred orientation.

Fig. 4 is a schematic representation of the apparatus in a well bore orienting the perforating tool away from the conduits or conductors on the opposite side of the tubular body.

15

Fig. 5 is a schematic representation of the apparatus including multiple orienting tubulars 10 in the same wellbore.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

Fig. 1 of the present invention is a cross sectional view of the apparatus in the guiding profile section of the tubular member. Tubulars **5** and **35** are connected in the well bore to couplings **30** and **31** in a manner well known in the industry. Couplings **30** and **31** join a specially fabricated tubular **10** that provides an inner raceway orienting surface **14**. A cooperating profile of the tubular **10** is formed by the insertion of the raceway orienting surface **14**, which forms a tang at each end of the longitudinal passage of the tubular **10** which gradually slopes around the periphery to

fill the tubular **10** except for an orienting channel **15** formed on the interior of **10** by the proximate adjacent longitudinal walls of the member **20**. Member **20** may comprise a sleeve with the appropriate shape incorporating orienting surface **14** and orienting channel **15**. Other methods of fabricating the tubular **10** with a cooperating
5 groove **15** can be readily substituted without departing from the disclosure. For example, the tubular **10** could be milled with a grooved surface in a manner well known to those in this art. Likewise, a resilient grooved mechanism could be formed on the orienting mandrel and a ridge formed on the interior surface of the orienting tubular to be used in the same manner and with the same result. It is noted that
10 tubular **10** may include an orienting surface **14** on each of its ends so as to facilitate orientation of devices moving in the downhole direction as well as devices moving in the uphole direction.

Tubular **10** along with tubulars **5** and **35** and other similar tubulars comprise a tubular well string **500** which can be a casing string (to be cemented within a wellbore
15 as shown in Figure 4), a drill pipe string, a production or completion string, or other similar types of strings disposed in wellbores.

An orienting mandrel **99** cooperates with the tubular **10**. The orienting mandrel **99** consists of a cylindrical body **100** formed with a longitudinal slot **125** and is configured at each end **111** to be connected to a perforating gun **41** and/or a
20 conveyance device **40**. The conveyance device **40** can comprise any of the known methods of conveyance, including wireline (see Figure 4), slickline, coiled tubing, tubing string, or drill pipe, among others.

An orienting guide or cam **120** is fashioned to slidably fit inside the slot **125** of the cylindrical body **100** and is retained therein by cap head screws **130**. Springs or

other resilient members **140** are positioned between the orienting guide **120** and the interior surface of the slot **125** on the body **100** to urge the orienting guide or cam **120** into engagement with orienting surface **14** and slot **15** formed on the inside surface of tubular **10**. Tubular **10** is placed or coupled or set in the tubular string **500** by
5 couplings **30** and **31** at the location desired, so that the orienting guide is a known distance from the zone to be perforated. The provision of the orienting guide in a spaced relationship with the perforating system permits the perforation to proceed with the greatest amount of protection for the adjacent conduit or device. Although the orienting mandrel **99** and perforating gun **41** are shown in the Figures to be
10 separate connected pieces, it is understood that the mandrel **99** (and guide **120**) can be integral with the perforating gun body. In addition, the perforating gun **41** can be located above or below the orienting mandrel **99** and guide **120**. Moreover, each perforating gun **41** or mandrel **99** can have more than one guide **120**.

The conduit or device, hereinafter referred to as “protected member” **6**, which
15 is to be protected from the blast of the perforating gun is aligned on the string **500** and attached in a manner well known to those in the art so that it runs opposite the slotted interior **15** and therefore opposite the radial direction of the perforating gun.

Although shown in the Figures as a control or fiber optic line, protected member **6** can comprise any of a number of conduits or devices, including electrical cables, fibre
20 optic cables, fluid conduits, gauge carriers, geophones, hydrophones, wave guides, sensors, other tubing, valves as well as other instruments known to those familiar with the art which are from time to time disposed in a well. This configuration of the slot **15**, the downhole member **6** and the positioning of the perforating gun may be altered, so long as it is done consistently, without departing from the spirit of this disclosure.

Fig. 2 shows the orienting assembly after it has entered the tubular **10**, but before it has been turned by cooperating surface **14** to seat in the groove **15** on the interior surface of the tubular **10**. Protected member **6** is positioned and attached, such as by one or more clamps or tabs **7** placed on the exterior surface of tubular **10**, before insertion of the tubular **10** in the wellbore. In another embodiment, the protected member **6** is attached to the interior surface of the tubular **10**.

Fig. 3 shows the orienting assembly after it has been turned by the cooperating surface **14** so that the orienting guide **120** follows slot **15**. Due to their relative attachment, the perforating gun **41** turns along with the orienting mandrel **99**. This then results in the guns being oriented and perforating in a predetermined radial direction relative to and away from the protected member **6** (see Fig. 4). It is understood that a swivel may be located above the perforating gun in order to allow the joint rotation of the perforating gun and orienting mandrel **99** and guide **120** in relation to the conveyance device **40**.

In one embodiment, the internal diameter of the string **500** above and below the orienting surface **14** is larger than the internal diameter of the remainder of the well string **500**. The section of larger internal diameter, which on each end of orienting surface **14** can be approximately 1 foot long, functions to ensure that the orienting guide **120** "catches" and is turned by cooperating surface **14** and follows slot **15**.

Fig. 1 shows the well string **500** (including tubular **10**) within a casing string **CS** in a wellbore. In this embodiment wherein well string **500** does not comprise the casing string **CS**, the protected member **6** (shown to be a control or fiber optic line) is disposed in the annulus between the casing string **CS** and the well string **500**. Once

the orienting guide **120** engages the orienting tubular **10**, the perforating gun **41** would be oriented away from protected member **6** as described below and shown with respect to Fig. 4.

Fig. 4 shows the embodiment wherein the well string **500** comprises the casing string **CS**. In this embodiment, the well string **500** is grouted or cemented in the annulus **43** of a borehole **BH**. The perforating gun **41** and orienting mandrel **99** are lowered within the well string **500** by a conveyance device **40**. As previously disclosed, the orienting guide **120** engages the orienting tubular **10** to rotate the perforating gun **41** and orienting mandrel **99**. As may be readily appreciated, the protected member **6** has been attached to the exterior surface of the tubular member **10** adjacent the interior slot **15** and the perforating gun **41** is oriented to fire away from the protected member **6**.

In one embodiment as shown in Fig. 5, multiple orienting tubulars **10** may be included in the same well string **500**. Each tubular **10** may correspond to a particular zone or region **502**. An operator may perforate a zone or region **502** per run by running the perforating gun **41** and mandrel **99** to depth (using depth correlation) wherein the mandrel **99** engages the relevant tubular **10**. Engagement between the mandrel **99** and tubular **10** as previously disclosed ensures that the protected member **6** is not damaged during perforation. Subsequent runs would have the mandrel **99** engage a different tubular **10** in order to perforate a different zone or region **502**, also without damaging protected member **6**. The spacing between the tubulars **10** may be varied or regular.

In another embodiment, well string **500** may include multiple orienting tubulars **10** and a plurality of perforating guns and guide mandrels may be deployed at

one time. In this embodiment, the elements are spaced out so that each guide mandrel cooperatively engages (as previously disclosed) its relevant tubular **10** at the same time. Thus, each of the perforating guns is properly oriented so as to not damage protected member **6**. This embodiment may necessitate the use of swivels between
5 each perforating gun to allow the independent orientation of each perforating gun.

This apparatus relates to the method and apparatus to orient perforating systems disposed in a well string in such a manner as to avoid penetrating other protected members disposed in said wells by placing and fixing a mechanical orienting device to the well string to be perforated in the well. This apparatus places a
10 device integral in the well string to be perforated, which forces the perforating system, which is disposed concentrically inside the well string to be penetrated to rotate to a predetermined direction relative to this device connected to the well string to be perforated. The method disclosed for using this apparatus also connects other protected members to the well string to be penetrated by the perforating system, such
15 that they are fixed to the well string to be penetrated and hence are located in a predetermined radial position relative to the well string to be penetrated.

In use, at least one protected member is attached to the well string to be perforated, opposite to the orientation of the perforating gun. This disclosure further teaches the placement of an orienting guide attached to a perforating system to couple
20 or guide the perforating system into the orientation device previously disposed in the well string to be perforated. When the perforating device and the orienting guide attached to the perforating device encounter the predisposed orientation device, the perforating gun system rotates to the predetermined radial position relative to the

perforating device. This disclosure then teaches the energizing of the perforating system while the orienting guide is engaged in the orientation device.

It will be understood that the foregoing description is of preferred exemplary embodiments of this invention, and that the invention is not limited to the specific
5 forms shown. These and other modifications may be made in the design and arrangement of the elements without departing from the scope of the invention as expressed in the appended claims.

78543-129

CLAIMS:

1. A well casing system useful for mechanically orienting a perforating system comprising a guide member oriented in a fixed radial relationship with respect to a
5 perforator gun, comprising:

at least one orienting tubular positioned in a casing string cemented in a wellbore;

a protected member disposed along the casing string;

10 a guide receiving member on an interior surface of the orienting tubular, the guide receiving member oriented in a fixed radial relationship with respect to the protected member;

a cam mounted in the guide member, the cam being
15 movable in a radial direction; and

wherein the guide receiving member cooperates with the cam to orient the perforator gun away from the protected member, further wherein a section of the casing string above and below the guide receiving member has an internal
20 diameter larger than the internal diameter of the remainder of the casing string.

2. The well casing system of claim 1 comprising a plurality of orienting tubulars spaced apart from each other in the string.

25 3. The well casing system of claim 1 wherein the orienting tubular is one of the segments of the casing string.

78543-129

4. The well casing system of claim 1 further comprising a mechanism for attaching the protected member to the casing string.

5. The well casing system of claim 1 wherein the protected member is attached to an exterior surface of the string.

6. The well casing system of claim 1 wherein the guide receiving member comprises a slotted guide path.

7. The well casing system of claim 6 wherein the slotted guide path is formed by a sleeve fixed in the orienting tubular comprising tangs at opposite longitudinal ends and opposing peripheral surfaces sloping from the tangs to opposite ends of a channel defined between the opposing peripheral surfaces.

8. The well casing system of claim 1 wherein the guide receiving member comprises an orienting surface.

9. The well casing system of claim 1, wherein the guide receiving member comprises an orienting surface on its uphole end and an orienting surface on its downhole end.

10. The well casing system of claim 1 wherein the protected member comprises a fiber optic cable, an electrical cable, a hydraulic line or a combination thereof.

11. A perforating system useful for perforating a well casing system having a protected member secured to a casing string including spaced orienting tubulars having a guide receiving member on an interior surface thereof for orienting the perforation system to perforate away from the protected member, comprising:

78543-129

a perforator gun attached to a conveyance device for passing the perforator gun through the casing string to a predetermined depth;

a guide mandrel secured to the perforator gun in
5 fixed radial relationship therewith;

a guide member fixed on an exterior surface of the guide mandrel passable through the orienting tubulars in cooperation with the guide receiving members to orient the perforator gun to perforate away from the protected member;
10 and

wherein the protected member is affixed against the casing string along a length of the casing string.

78543-129

12. The perforating system of claim 11 wherein the guide member comprises a cam.
13. The perforating system of claim 12 wherein the cam is resiliently outwardly biased.
14. The perforating system of claim 12 wherein the guide member comprises a plurality of cams.
15. The perforating system of claim 11 wherein the guide receiving members comprise a slotted guide path and the guide member comprises a cam passable through the slotted guide paths.
16. The perforating system of claim 15 wherein the slotted guide paths are formed by a sleeve fixed in the orienting tubular comprising tangs at opposite longitudinal ends and opposing peripheral surfaces sloping from the tangs to opposite ends of a channel defined between the opposing peripheral surfaces.
17. The perforating system of claim 15 wherein the cam is resiliently outwardly biased.
18. The perforating system of claim 17 wherein the guide member comprises a plurality of cams.
19. The perforating system of claim 11 wherein the protected member comprises a fiber optic cable, an electrical cable, a hydraulic line or a combination thereof.

78543-129

20. A system useful for mechanically orienting a perforating system, comprising:

a perforating gun including a guide member having a cam;

5 at least one orienting tubular positioned in a string of tubulars in a wellbore;

a protected member located along the string and attached to the string by a plurality of clamps;

10 a guide receiving member on an interior surface of the orienting tubular comprising an orienting path;

the orienting path oriented in a fixed radial relationship with respect to the protected member;

15 wherein the cam is biased to move linearly into cooperation with the orienting path to orient the perforating gun away from the protected member.

21. The system of claim 20 wherein the string is a casing string cemented in the wellbore.

22. The system of claim 20 wherein the string is a tubular string located within a casing string cemented in 20 the wellbore.

23. A method for casing a well, comprising:

connecting casing joints together end-to-end to form a casing string;

25 inserting at least one orienting tubular in the casing string;

wherein a guide receiving member is fixed on an interior surface of the orienting tubular;

78543-129

securing a protected member along the casing string in a radially oriented position with respect to the guide receiving member;

cementing the string in a well bore;

5 suspending a perforator gun attached to a conveyance device, a guide mandrel secured to the perforator gun in fixed radial relationship therewith and a guide member fixed to the guide mandrel;

 passing the perforator gun through the casing
10 string to a depth below a surface of the well;

78543-129

radially orienting the perforator gun with respect to the protected member by interengagement of the guide member with the guide receiving member as the perforator gun is passed through the orienting tubular;

activating the perforator gun to perforate the casing string away from the protected member.

24. The method of claim 23 further comprising spacing a plurality of the orienting tubulars along the casing string.

25. The method of claim 23 further comprising attaching the protected member on an exterior surface of the casing string.

26. The method of claim 23 wherein a section of the string above and below the guide receiving member has an internal diameter larger than the internal diameter of the remainder of the string.

27. The method of claim 23 wherein the guide receiving member comprises a
5 slotted guide path and the guide member comprises a cam passable through the slotted guide paths.

28. The method of claim 27 wherein the slotted guide path is formed by a sleeve fixed in the orienting tubular comprising tangs at opposite longitudinal ends and opposing peripheral surfaces sloping from the tangs to opposite ends of a channel
10 defined between the opposing peripheral surfaces.

29. The method of claim 27 wherein the cam is resiliently outwardly biased.

30. The method of claim 29 wherein the guide member comprises a plurality of cams.

31. The method of claim 23, wherein the protected member comprises a fiber
15 optic cable, an electrical cable, a hydraulic line or a combination thereof.

1/3

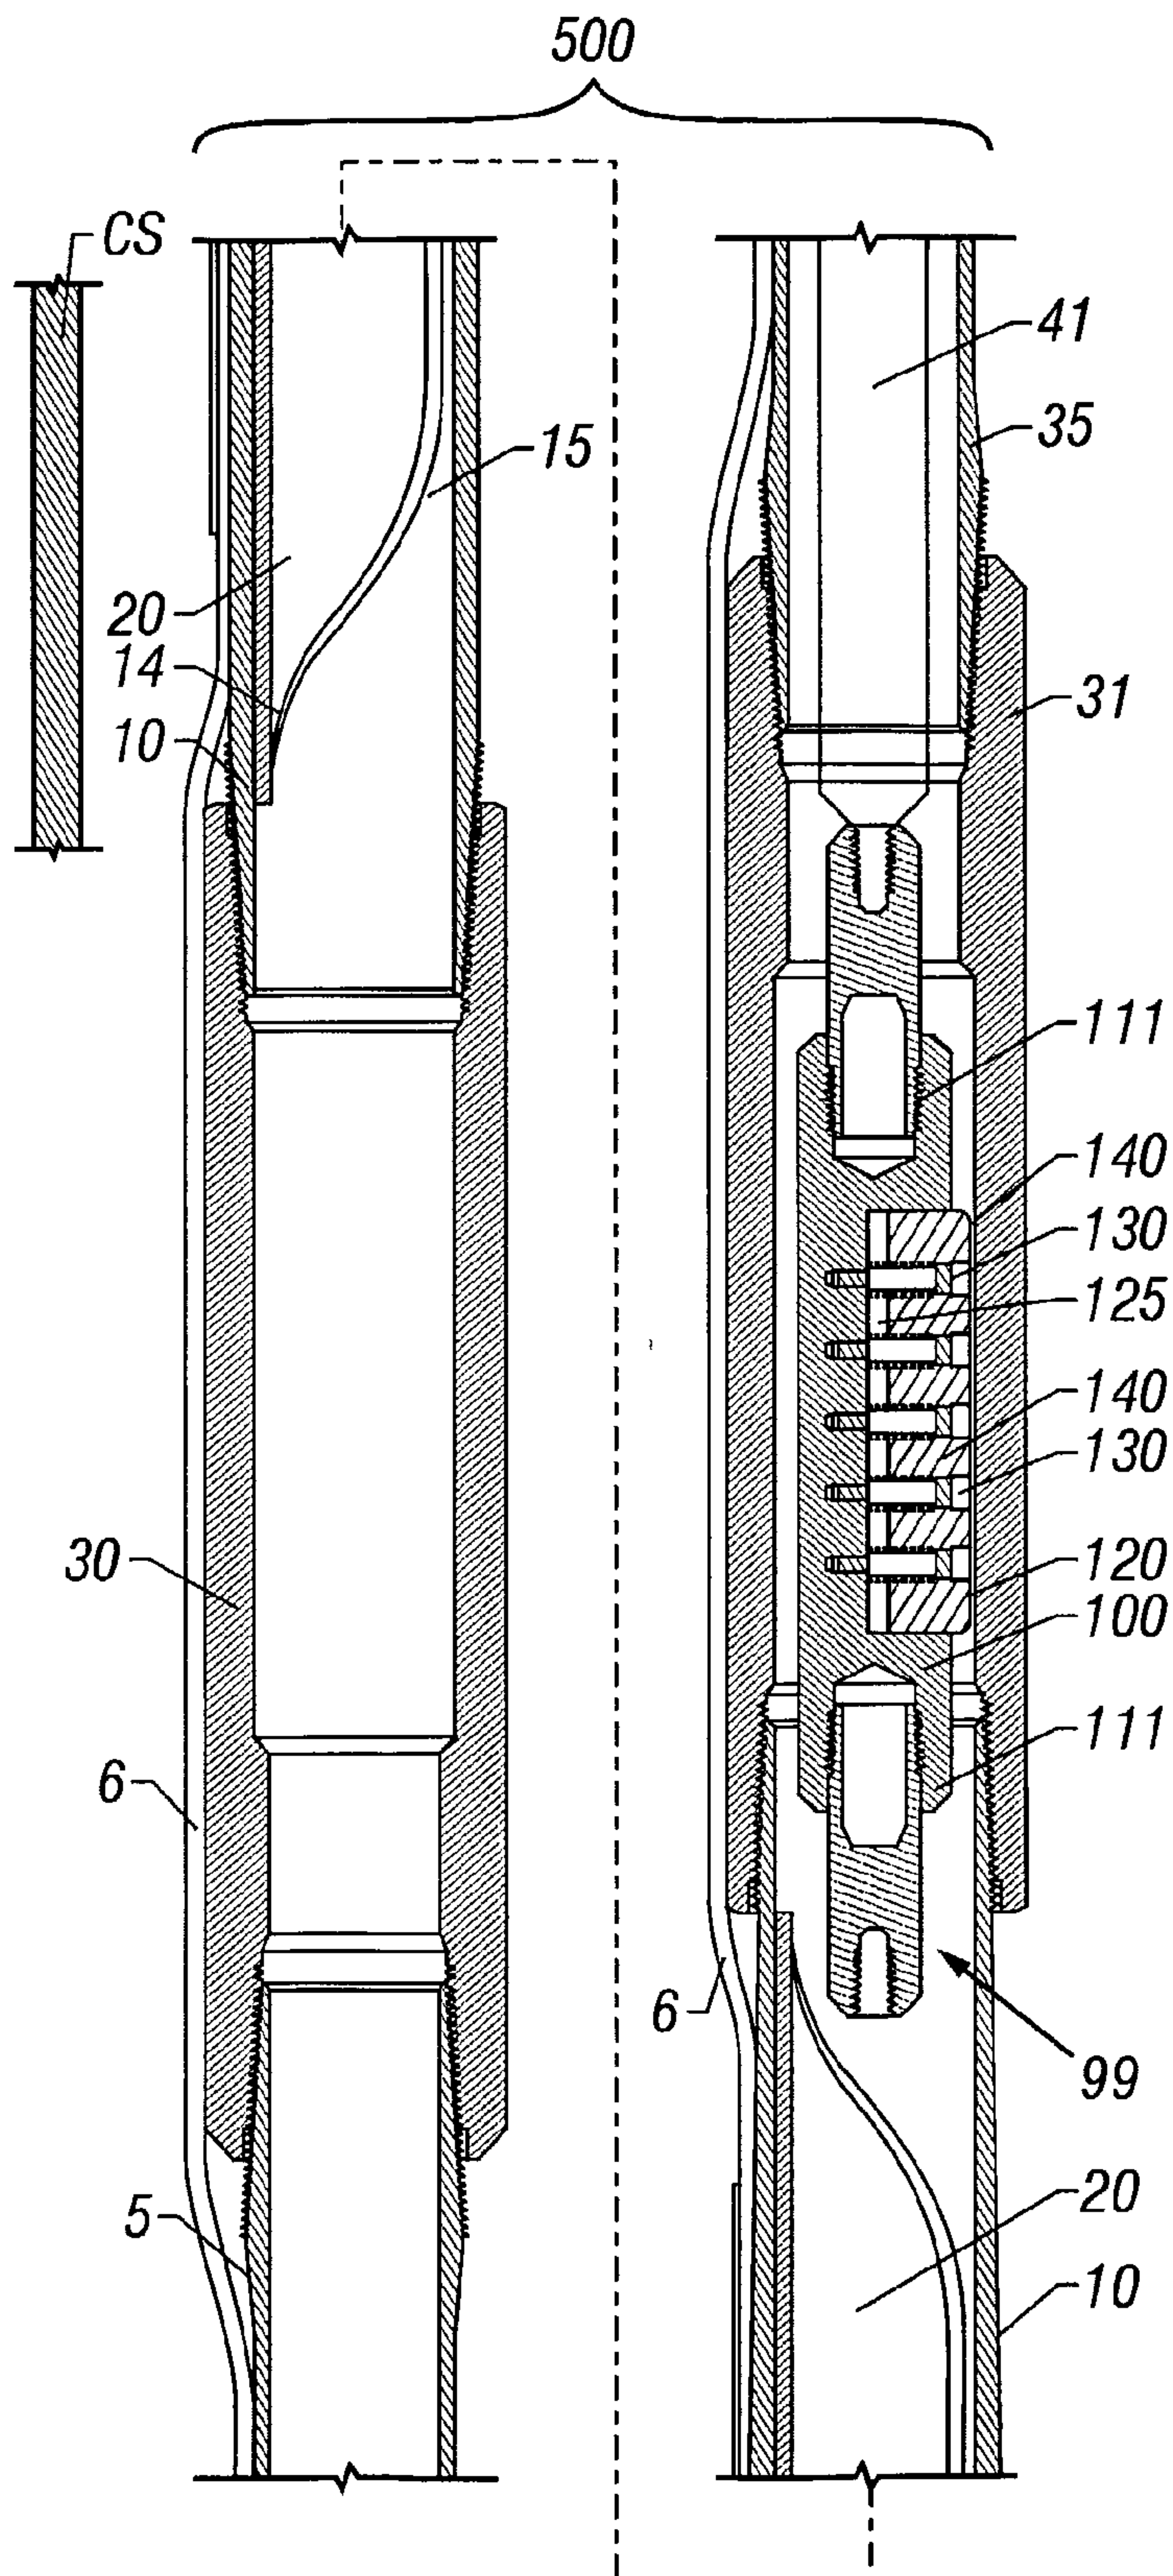


FIG. 1

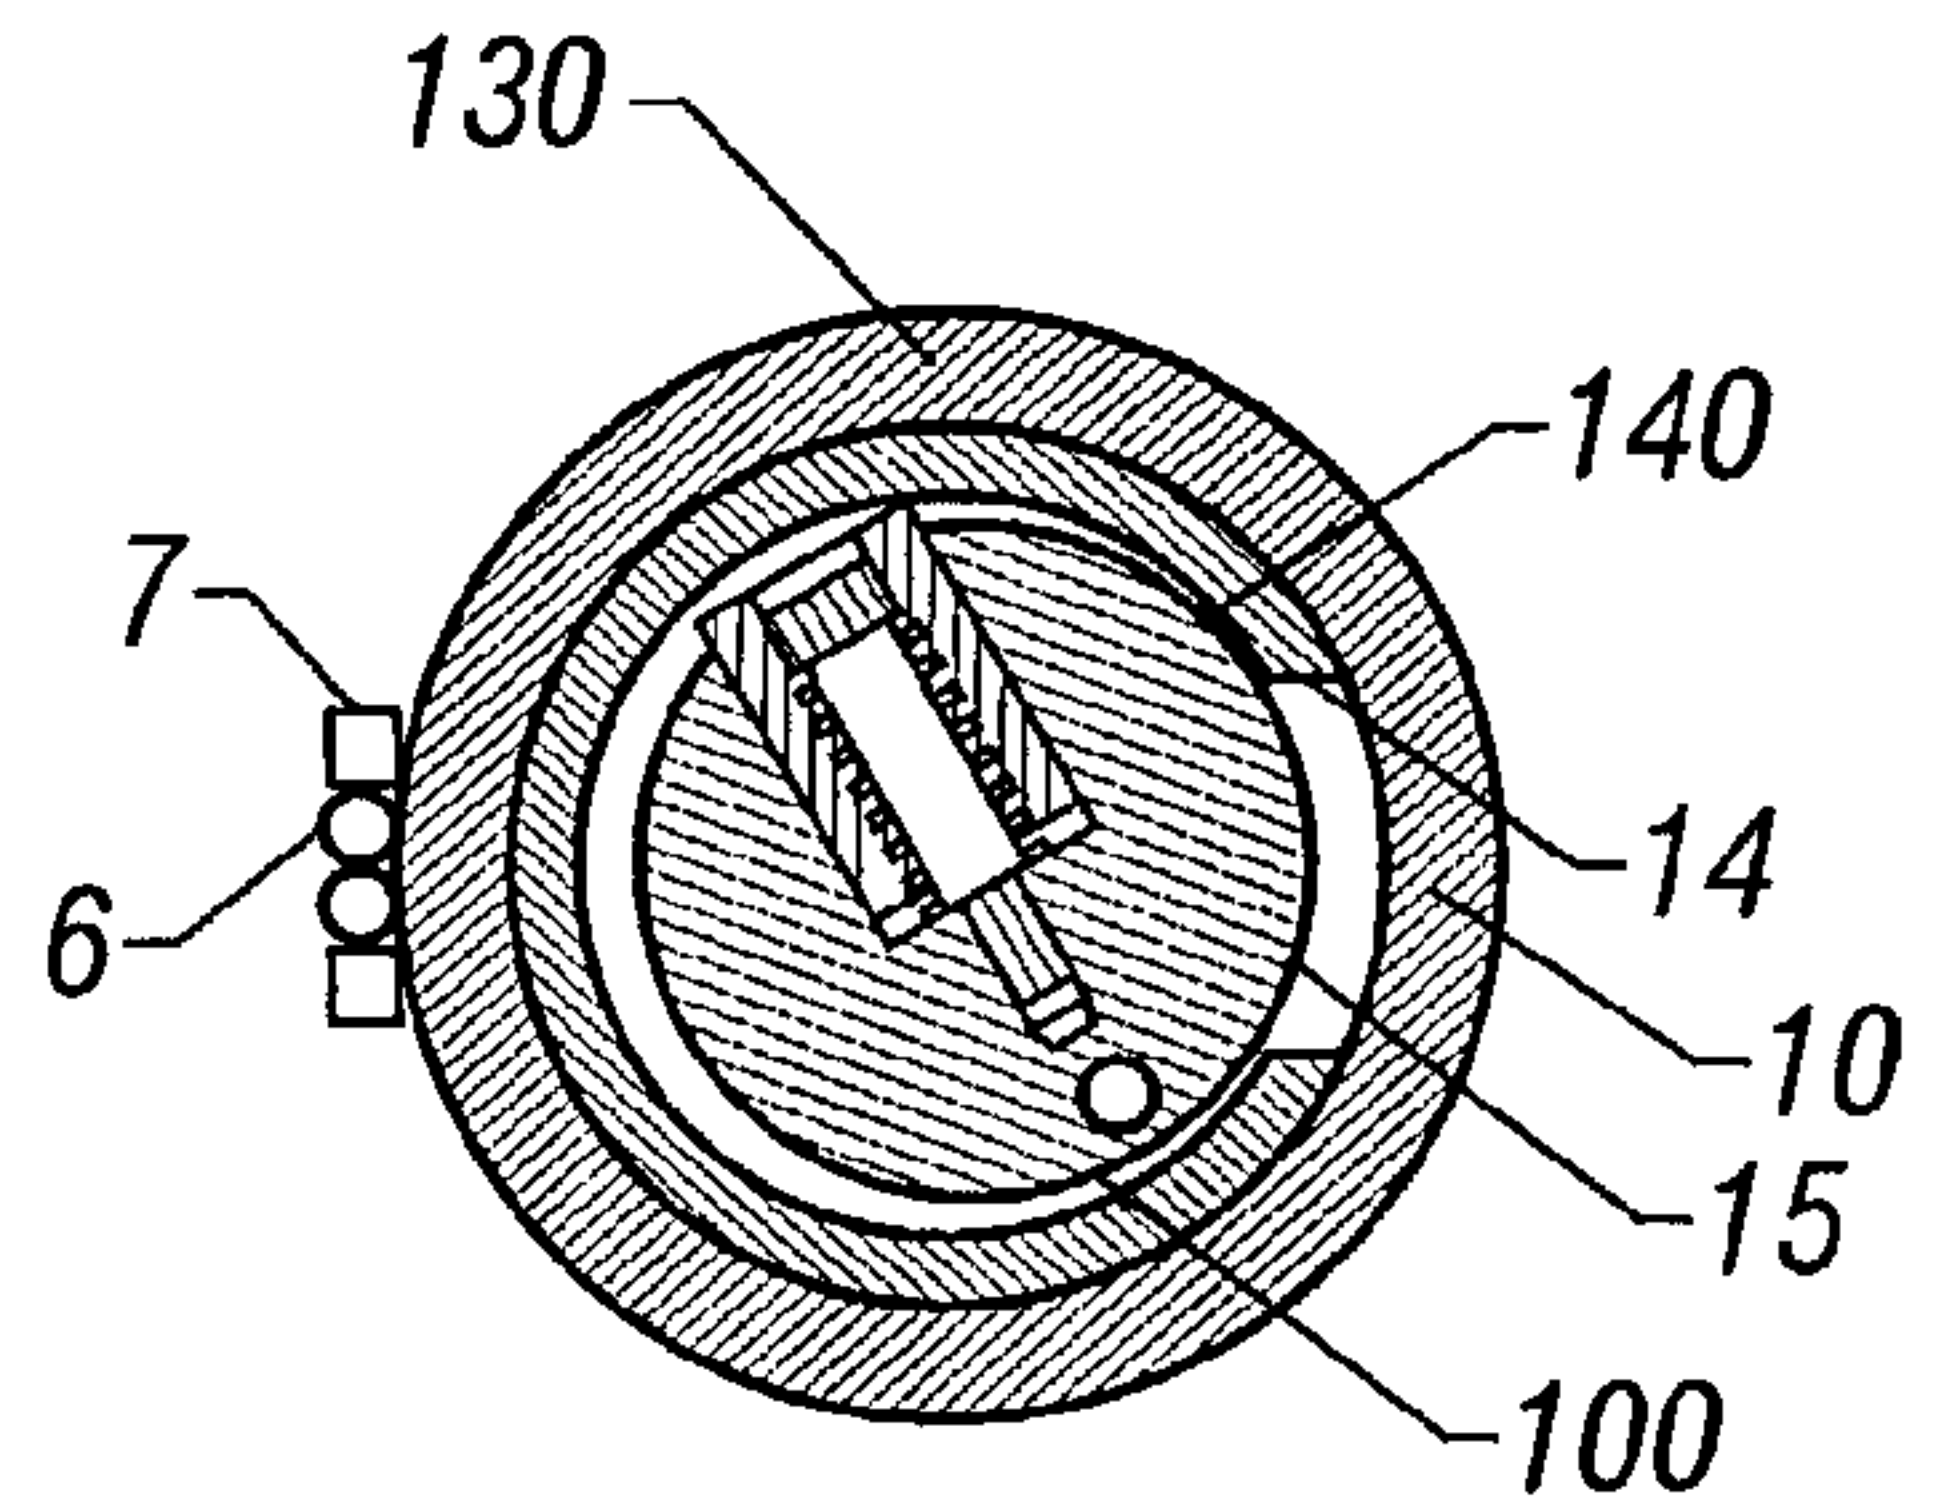


FIG. 2

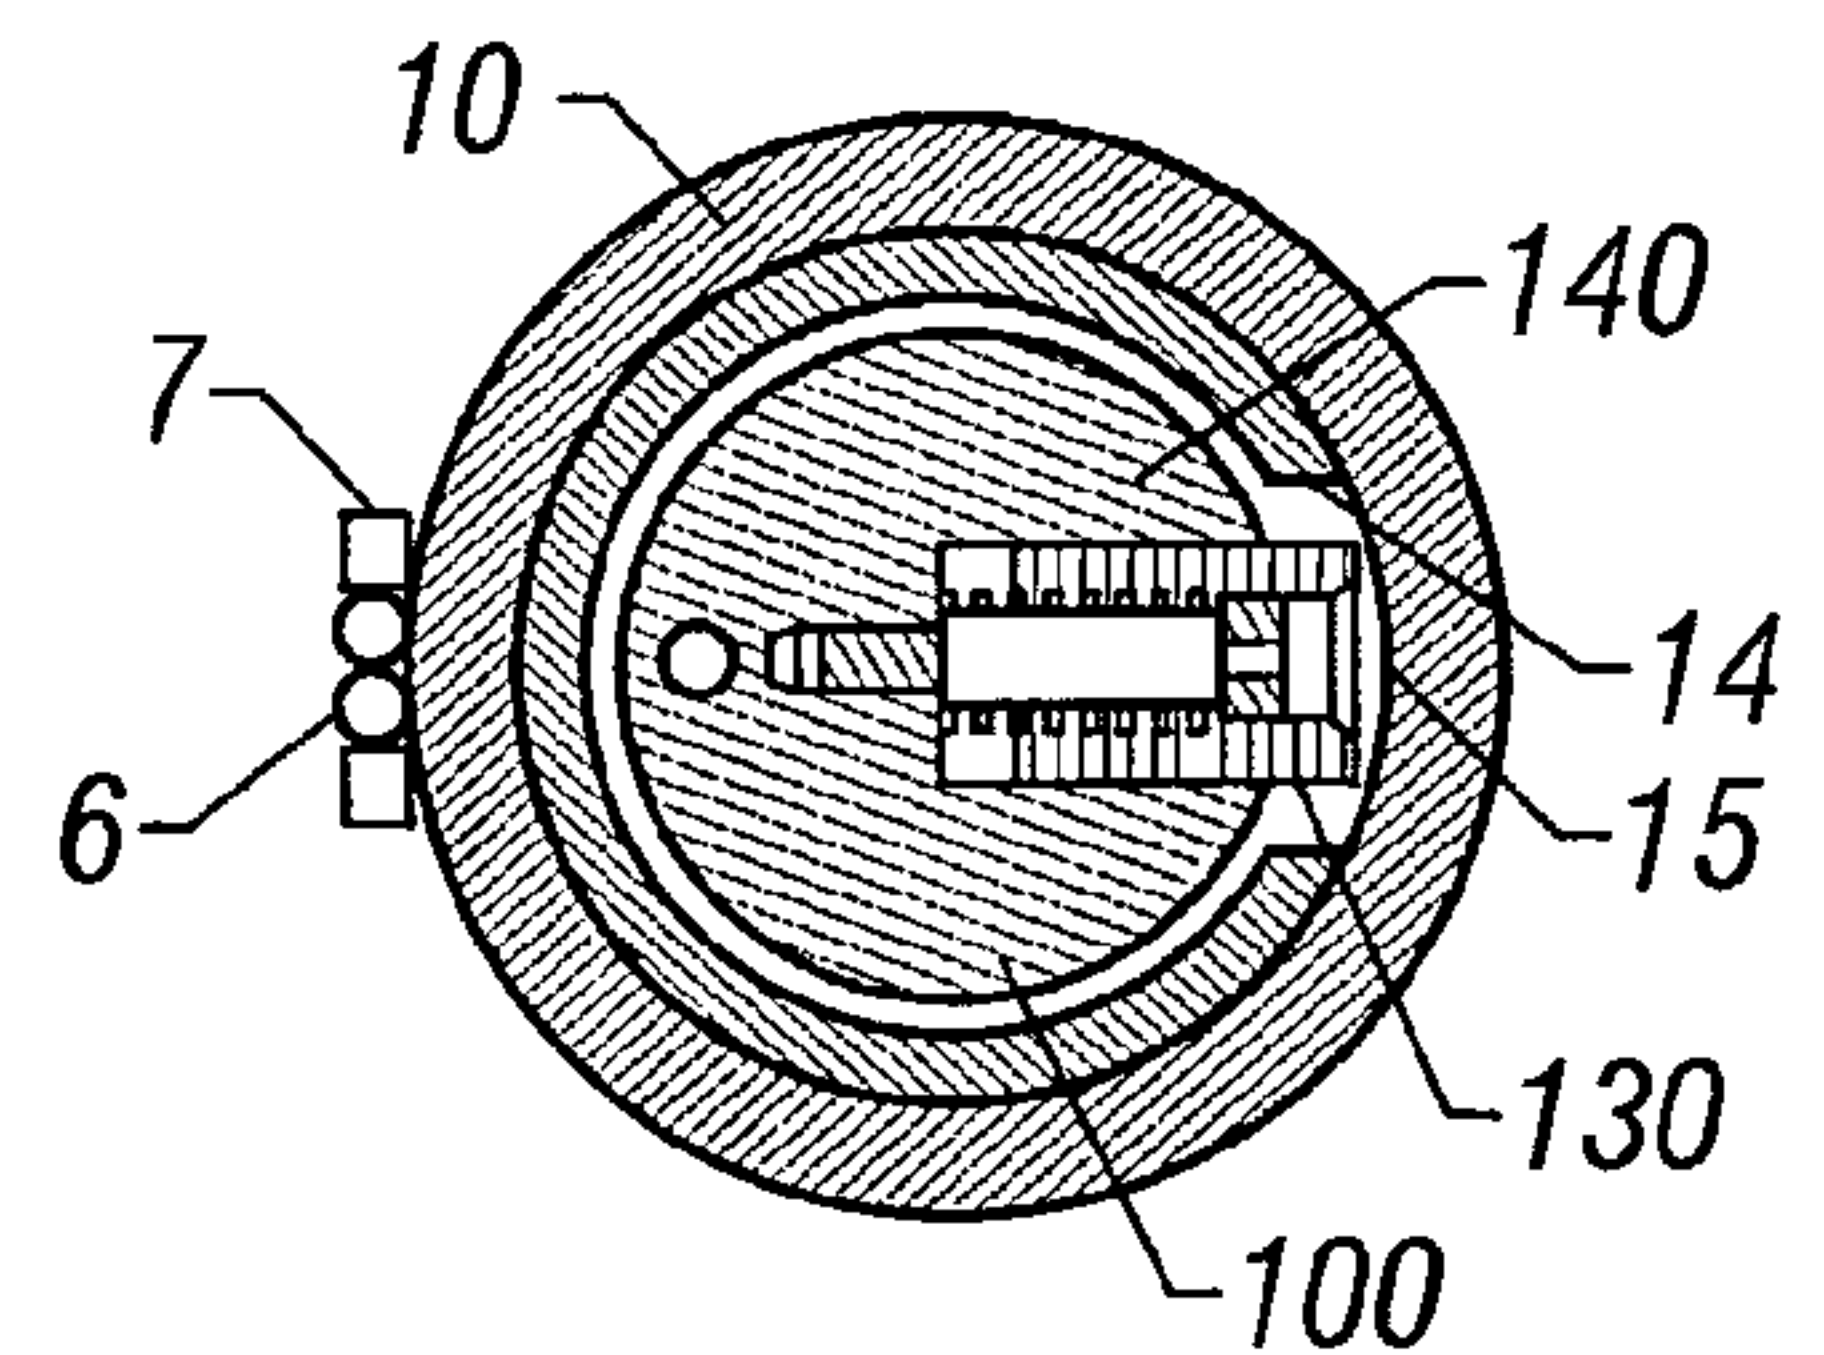


FIG. 3

2/3


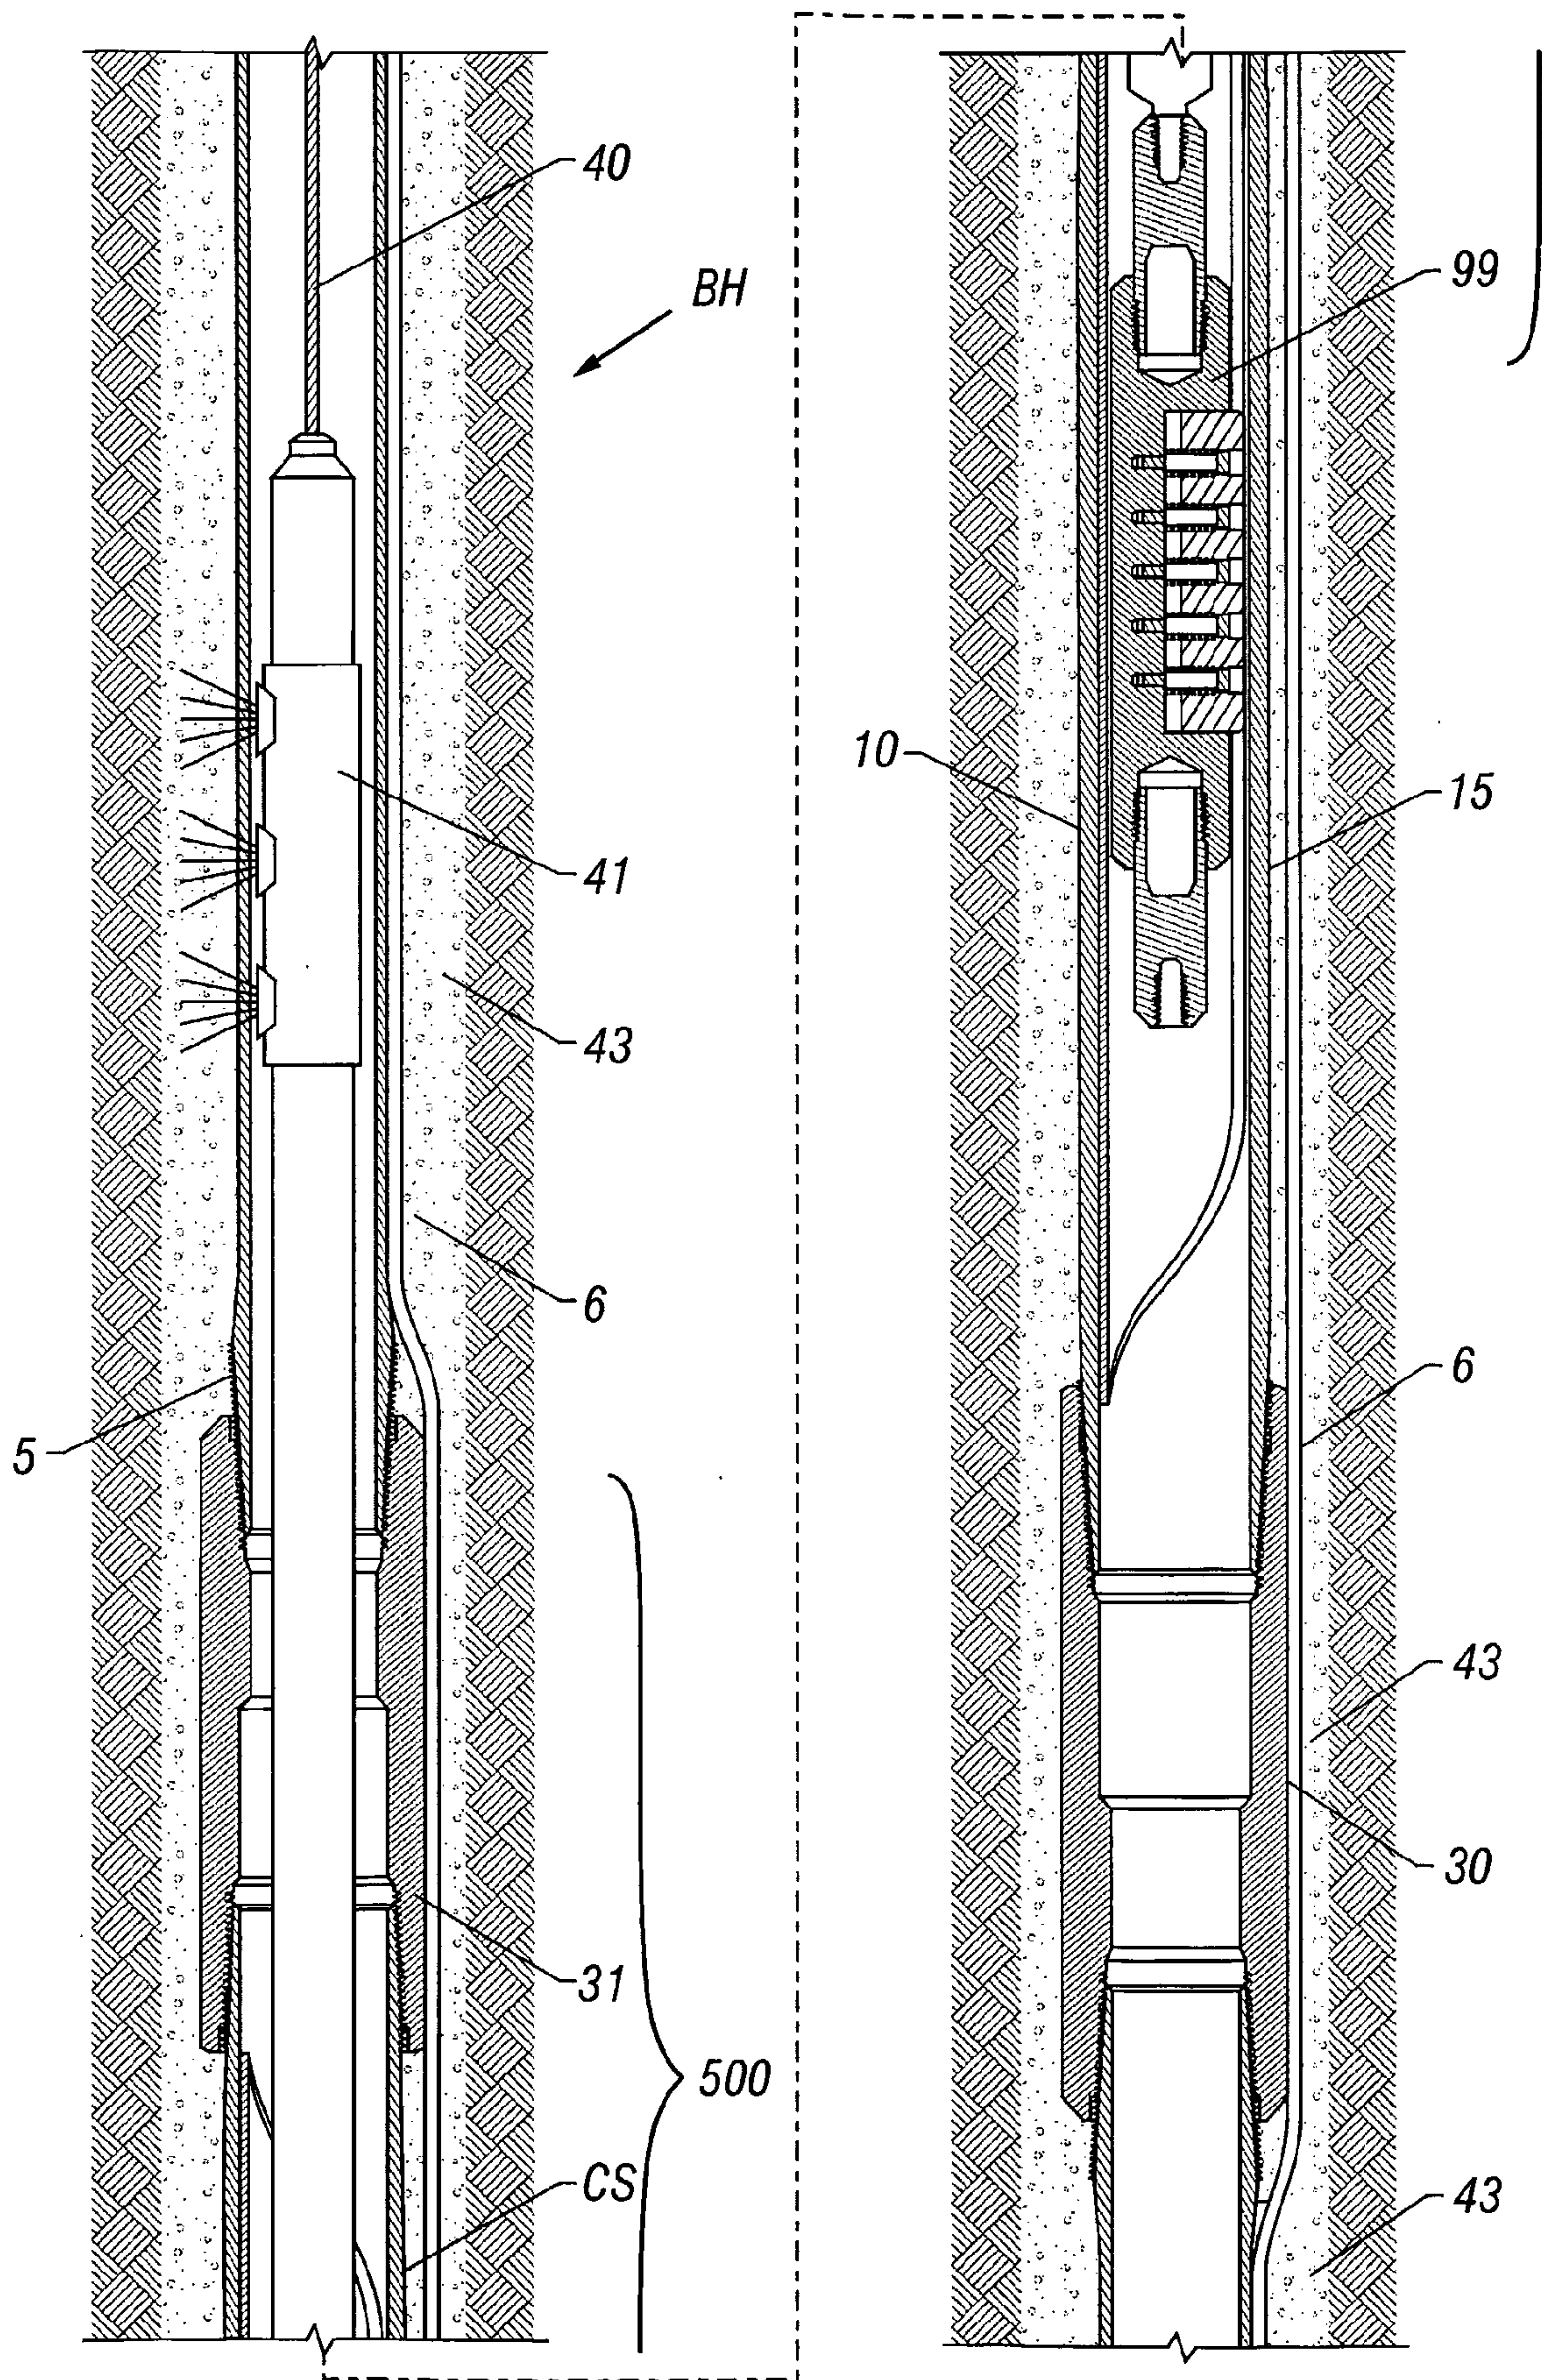


FIG. 4



500

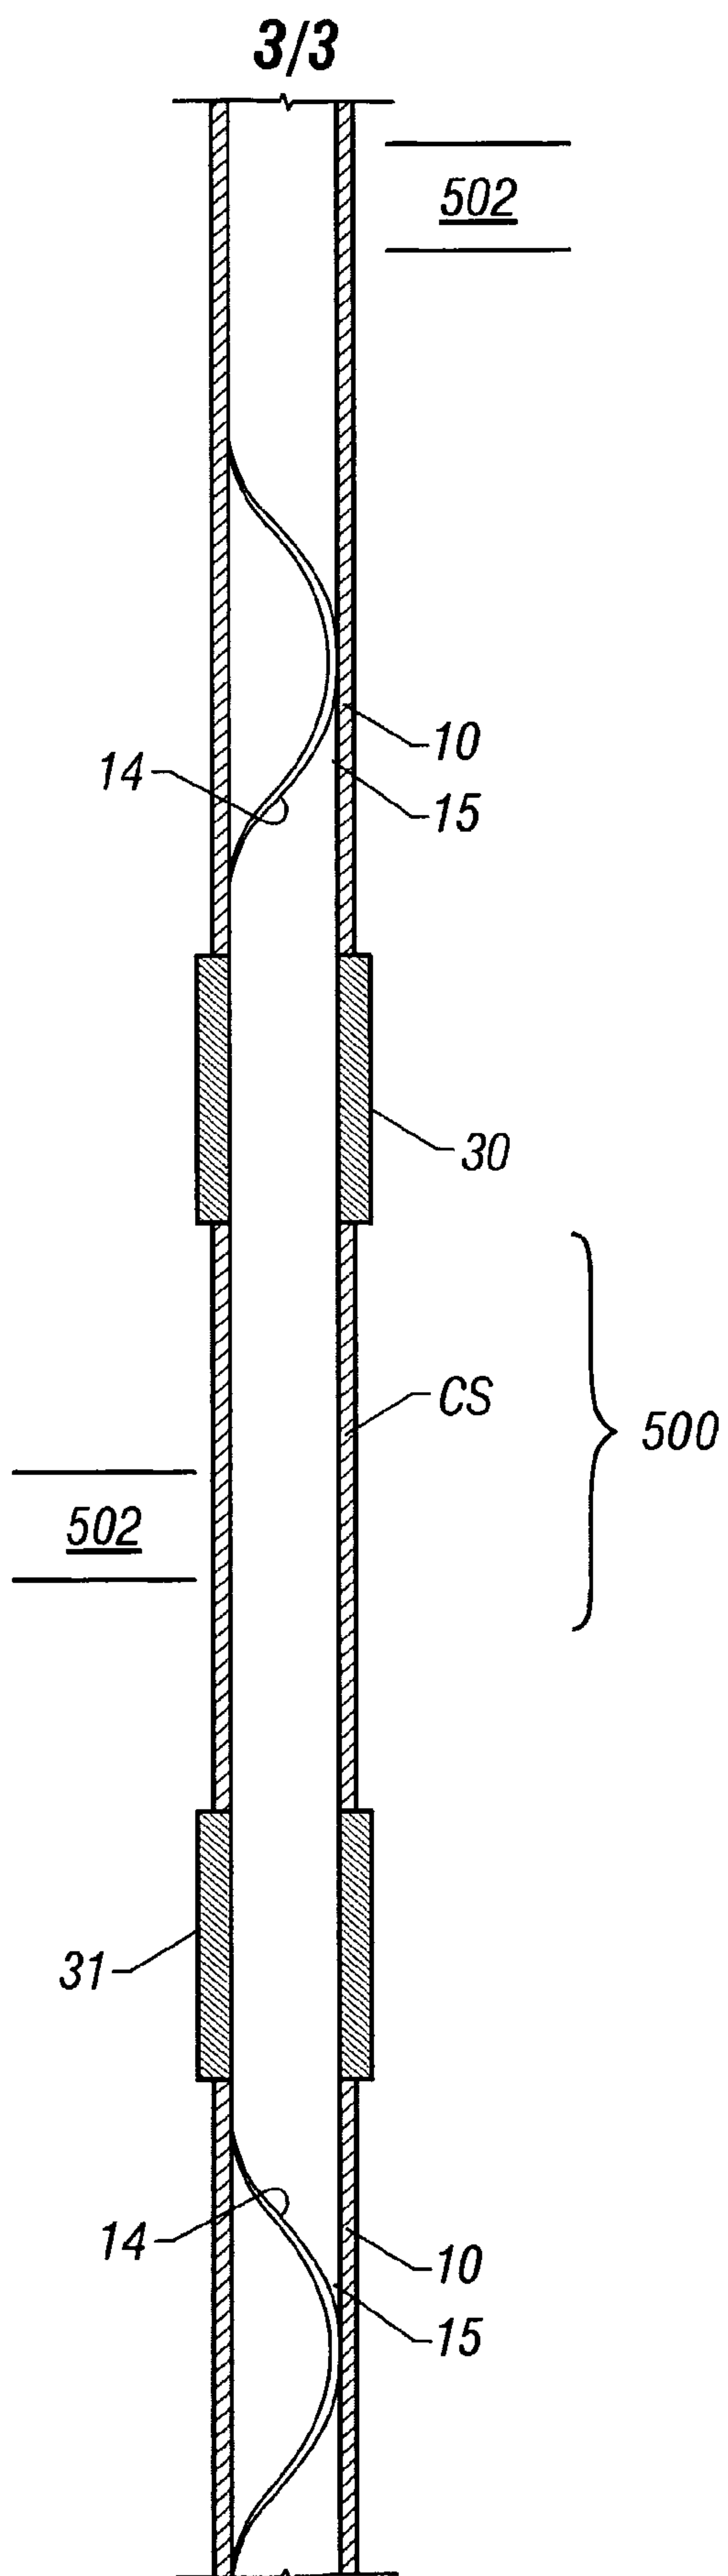