



US00557782A

United States Patent [19]

[11] Patent Number: **5,577,782**

Johnson et al.

[45] Date of Patent: **Nov. 26, 1996**

[54] **DOOR LATCH WITH DOUBLE LOCKING ANTITHEFT FEATURE**

Primary Examiner—Rodney M. Lindsey
Attorney, Agent, or Firm—MacMillan, Sobanski & Todd

[75] Inventors: **James B. Johnson**, Gregory; **Andrew J. Barta**, Westland; **Michael A. Petik**, Brighton, all of Mich.

[57] **ABSTRACT**

[73] Assignee: **Stoneridge, Inc.**, Warren, Ohio

A vehicle door latch assembly including a pivotal rotor engagable with a striker pin. A pawl is moveable between a blocking position retaining the rotor in engagement with the striker pin, and a release position permitting the rotor to disengage the striker pin. A link is moveable, manually or by means of an electric motor, between a coupled position engaging the pawl and an uncoupled position disengaged from the pawl. The link also engages an actuator member when the link is in the coupled position and is disengaged from the actuator member in the uncoupled position. The actuator member may be operated, when the link is in the coupled position, to move the pawl to the release position by means of the link. A Bowden cable may be connected to an interior operating handle, the link, and the actuator member to permit locking, unlocking, and unlatching from a single operating handle. A lost motion connection may be provided which cooperates with an over-center spring to improve the feel of the operation of the lock of the latch assembly from the interior operating handle. In another embodiment, a single lever is connected to the Bowden cable to be pivoted thereby to selectively cause the link to rotate between the coupled and uncoupled positions, and to axially drive the link to place the latch assembly in the unlatched condition.

[21] Appl. No.: **570,537**

[22] Filed: **Dec. 11, 1995**

Related U.S. Application Data

[63] Continuation-in-part of Ser. No. 137,448, Oct. 15, 1993, Pat. No. 5,474,339.

[51] Int. Cl.⁶ **E05C 3/16**

[52] U.S. Cl. **292/216**; 292/201; 292/DIG. 23; 292/DIG. 27


[58] Field of Search 292/216, DIG. 27, 292/DIG. 23, 201, 336.3

[56] References Cited

U.S. PATENT DOCUMENTS

4,342,209	8/1982	Kleefeldt	70/264
5,078,436	1/1992	Kleefeldt et al.	292/201
5,100,185	3/1992	Menke et al. .	

13 Claims, 23 Drawing Sheets

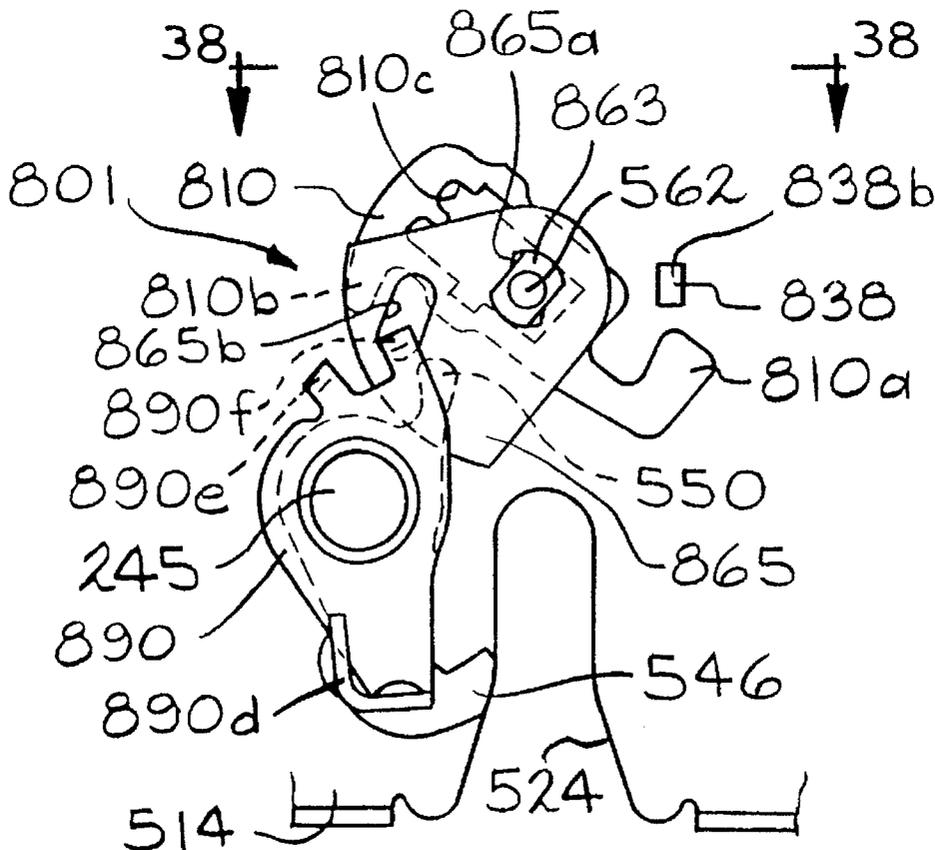

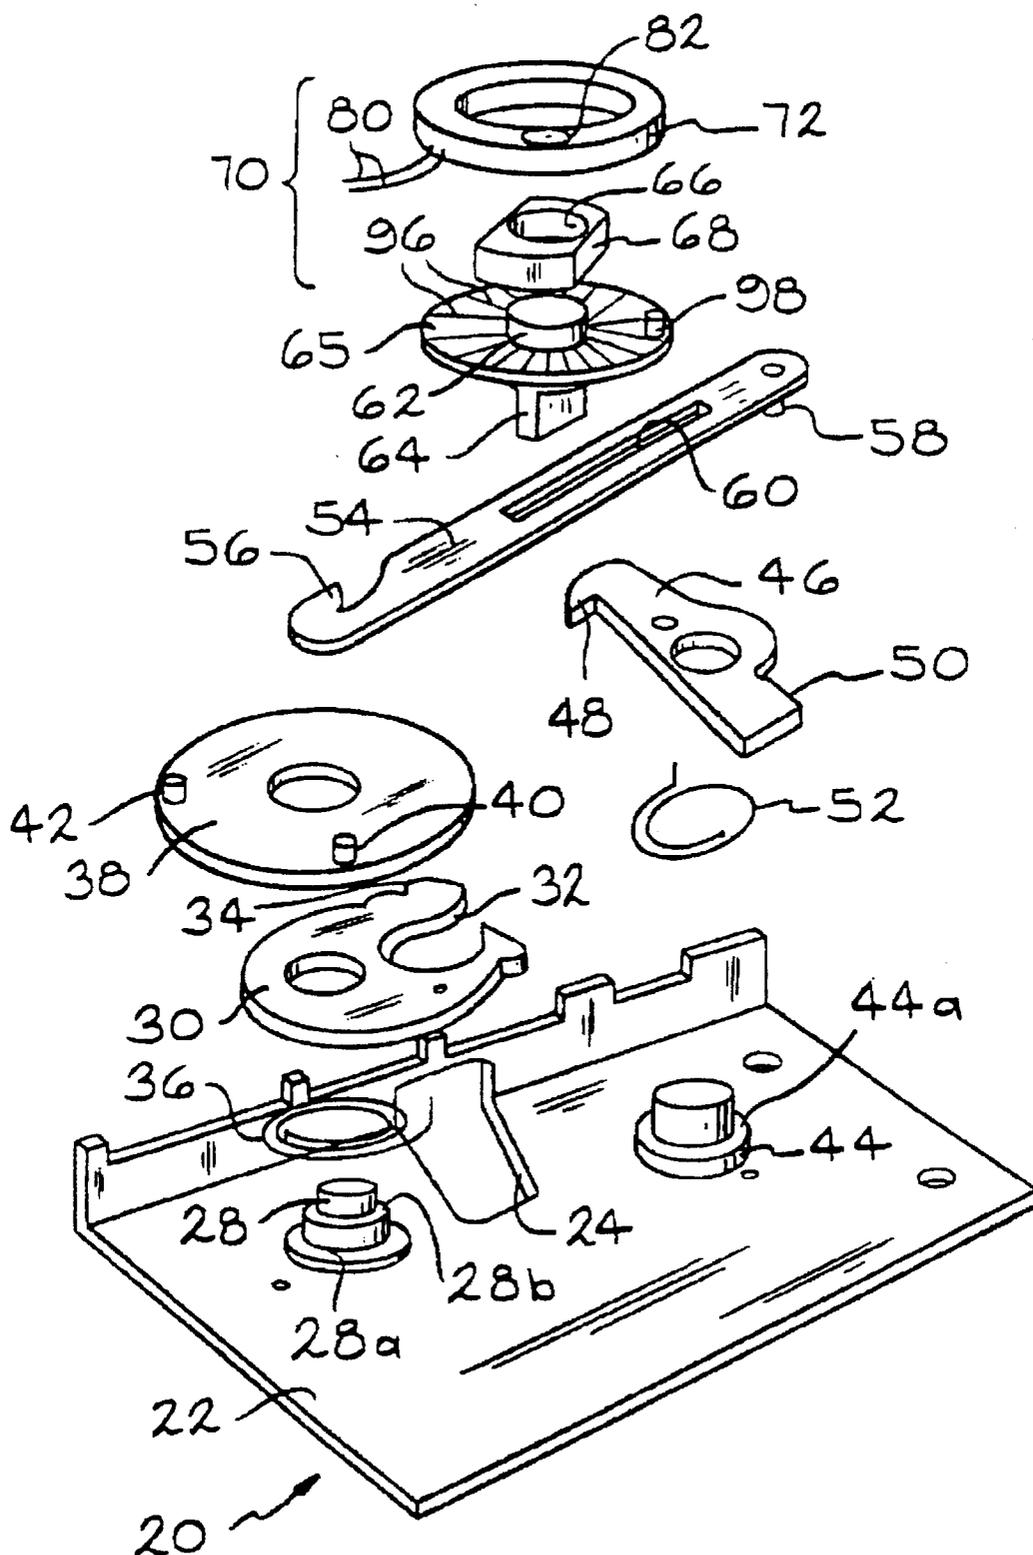


FIG.1

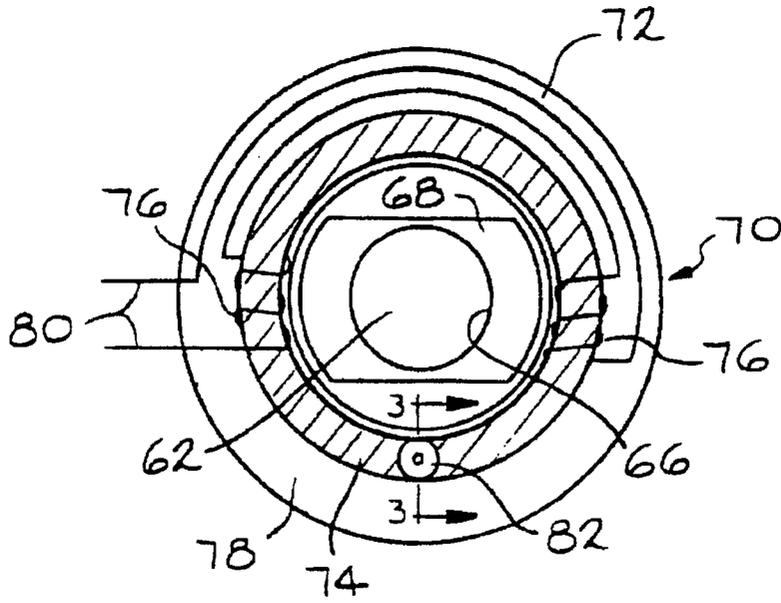


FIG. 2

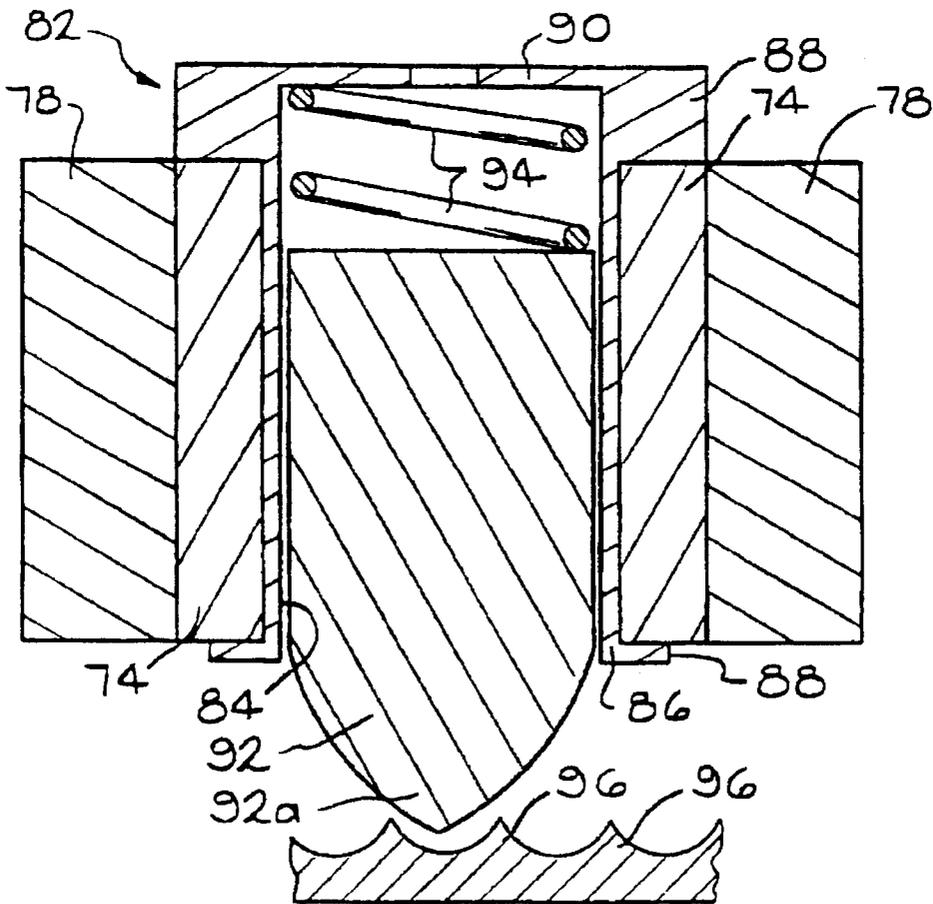


FIG. 3



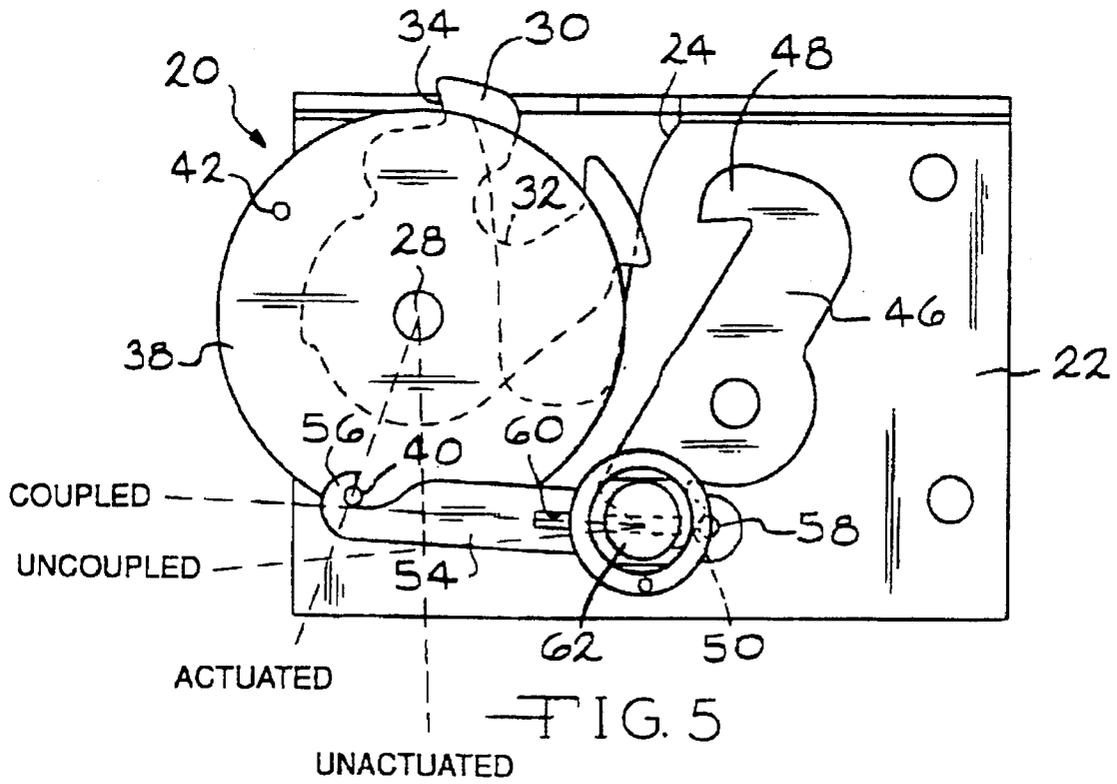


FIG. 6

RELEASE

BLOCKING

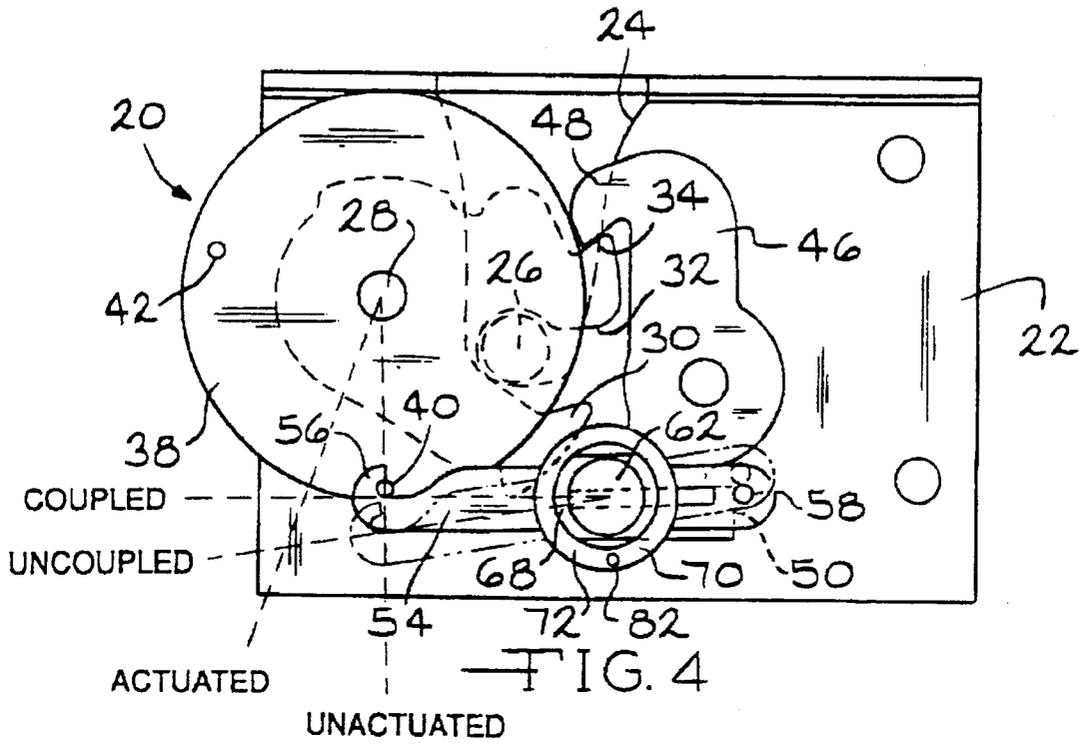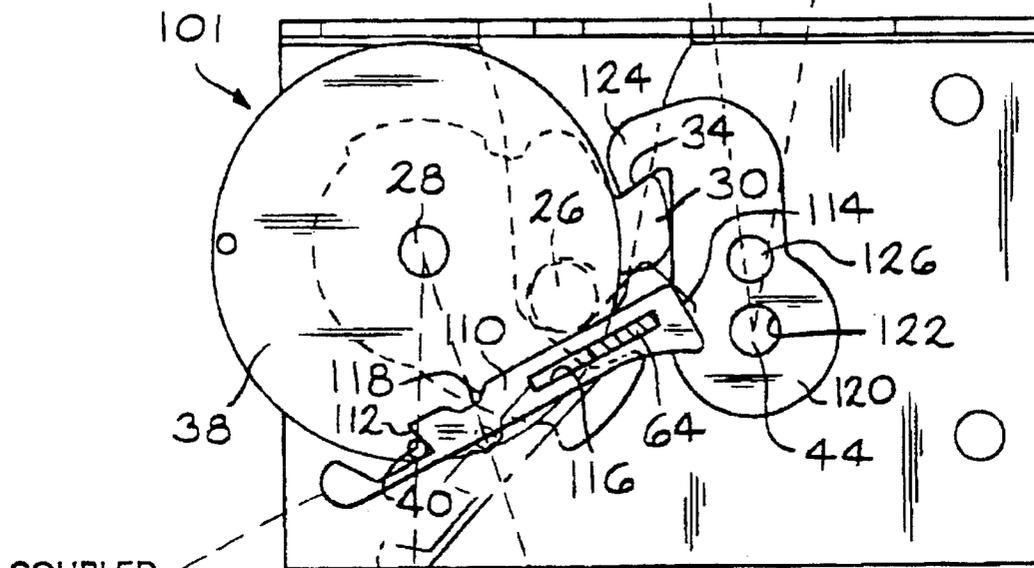

COUPLED


ACTUATED

UNCOUPLED

UNACTUATED

RELEASE

BLOCKING

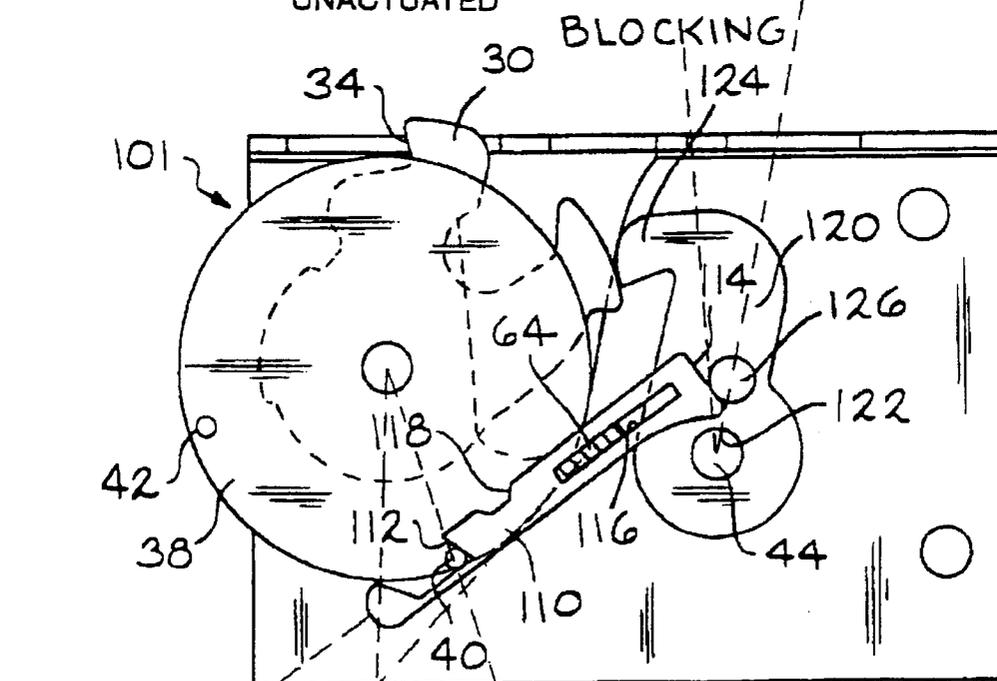

COUPLED


ACTUATED

UNCOUPLED

UNACTUATED

FIG. 7

FIG. 8

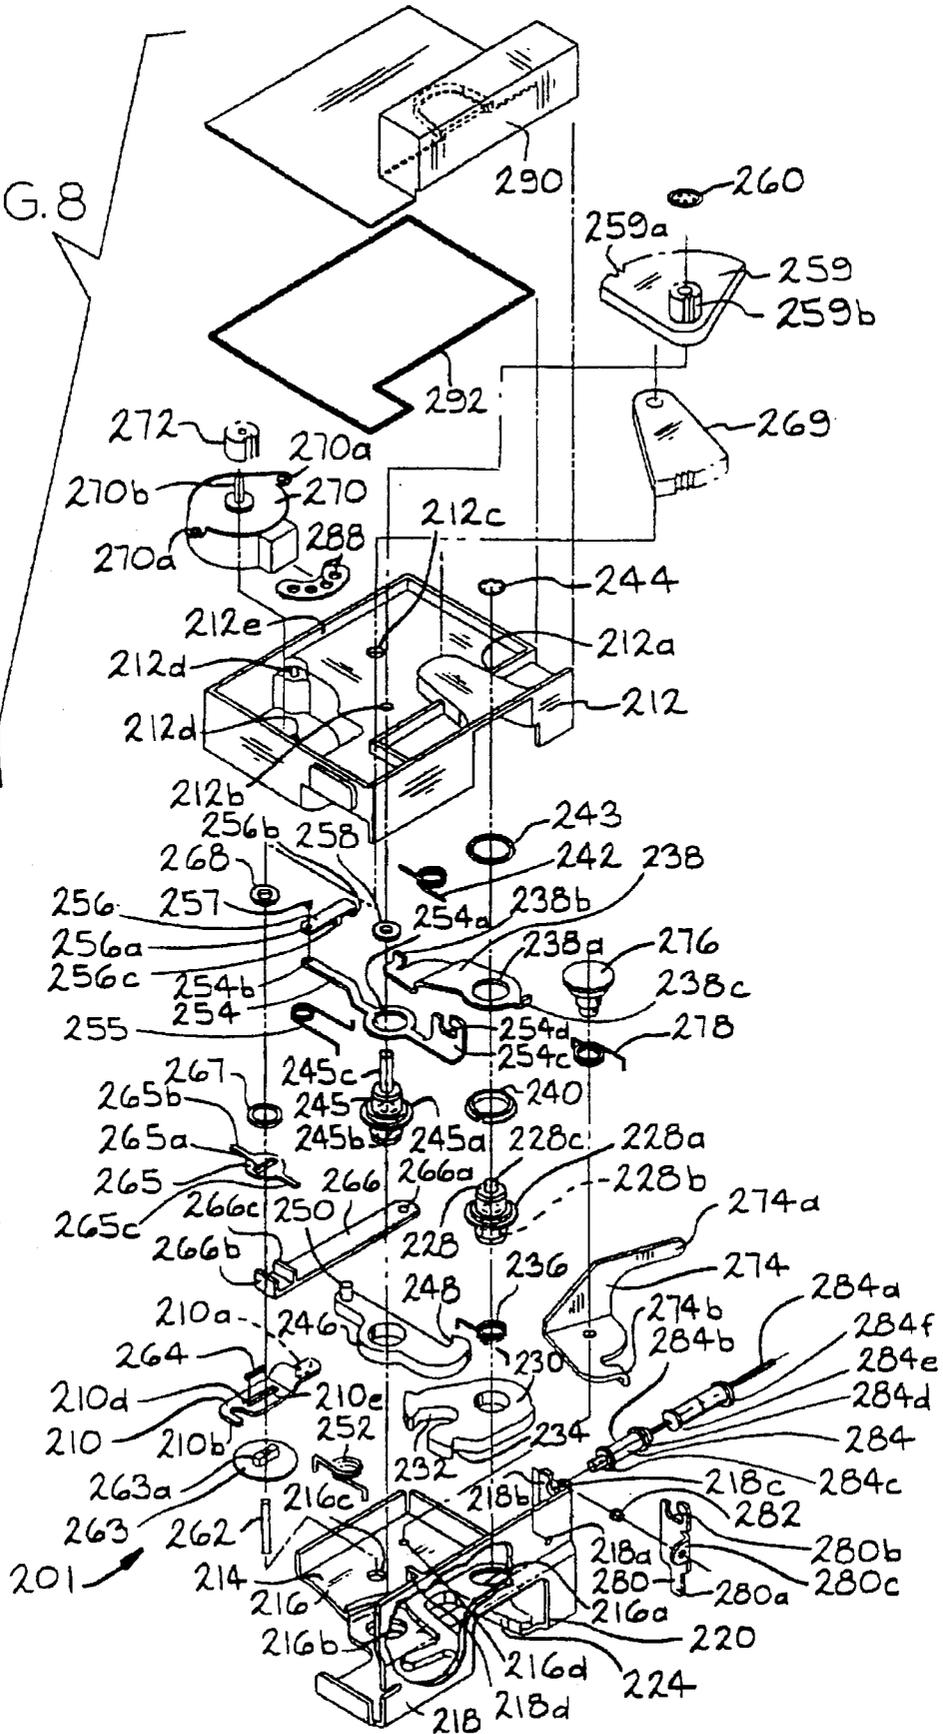

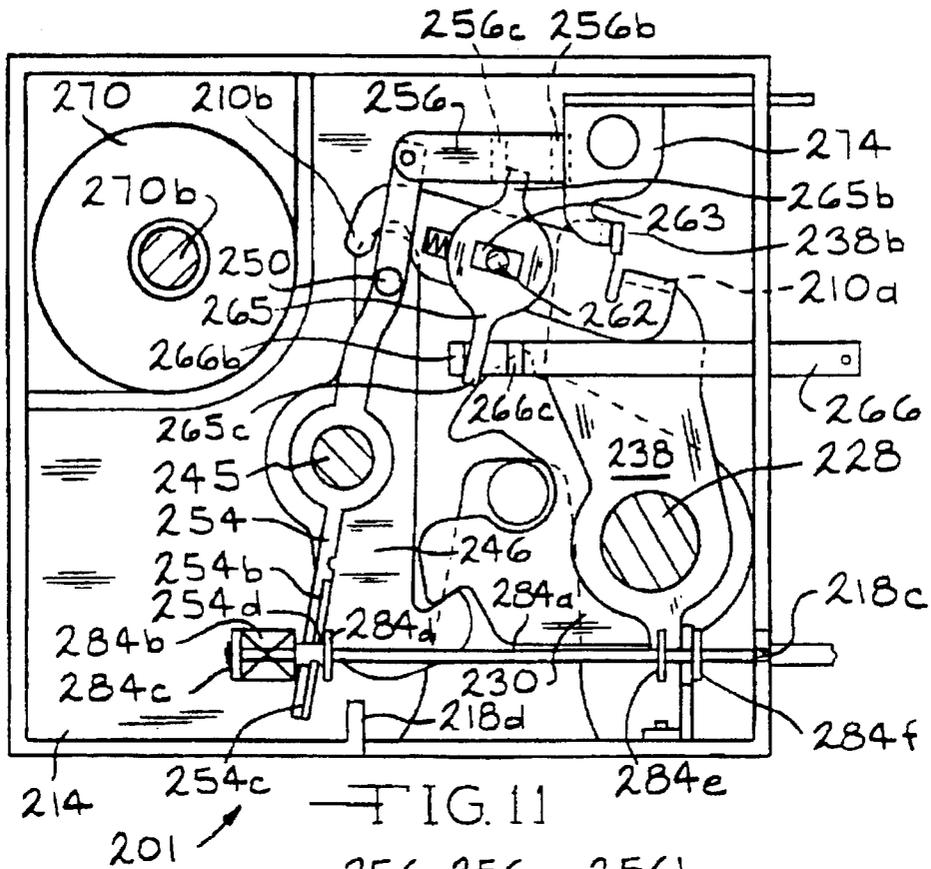


FIG. 11

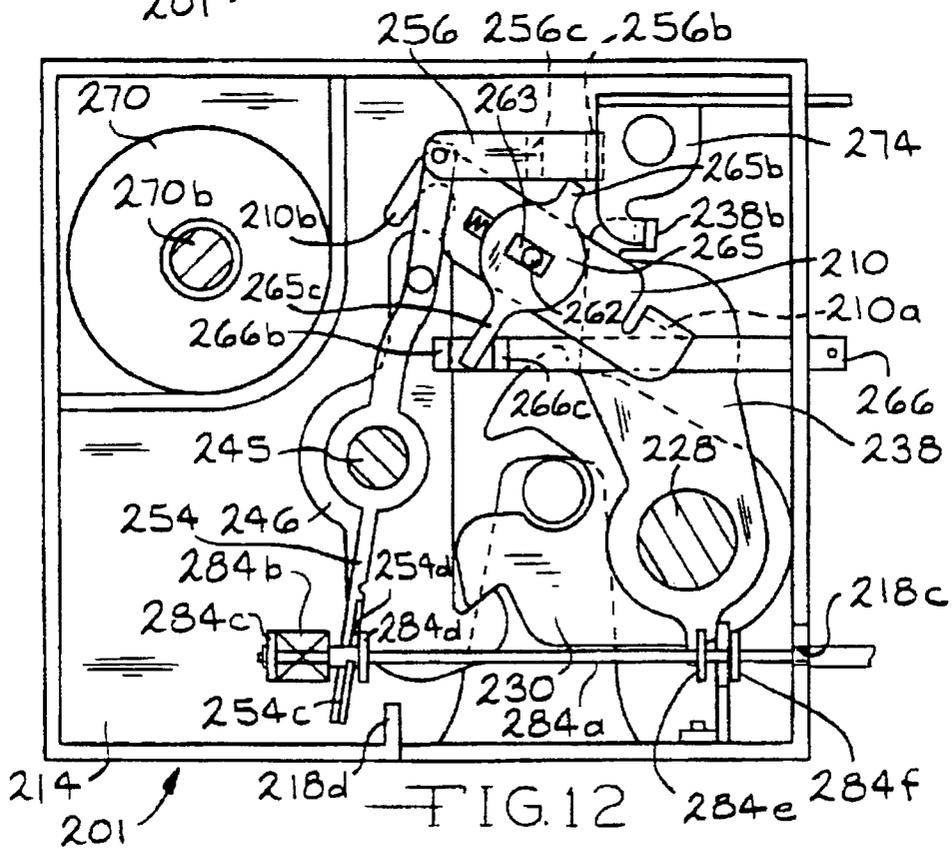


FIG. 12

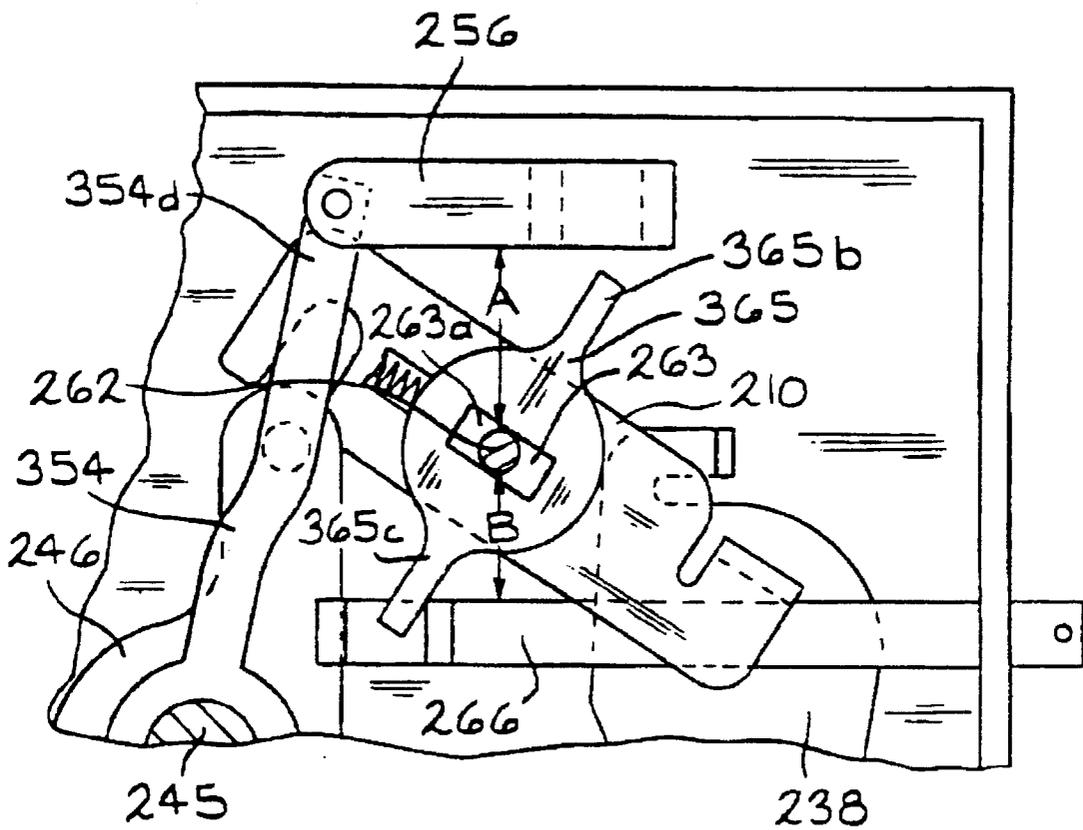
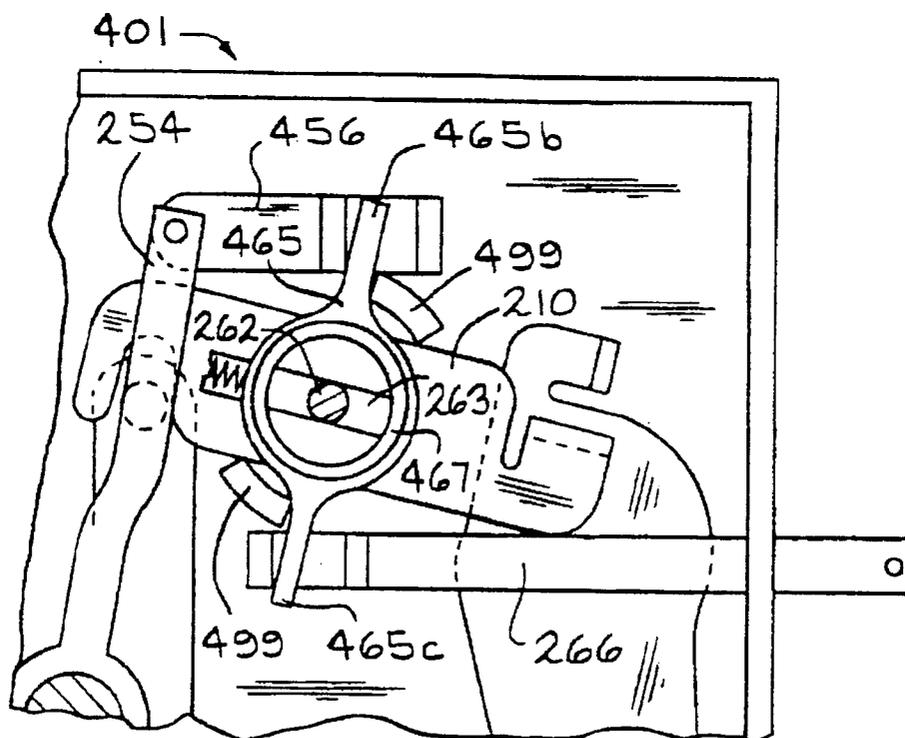
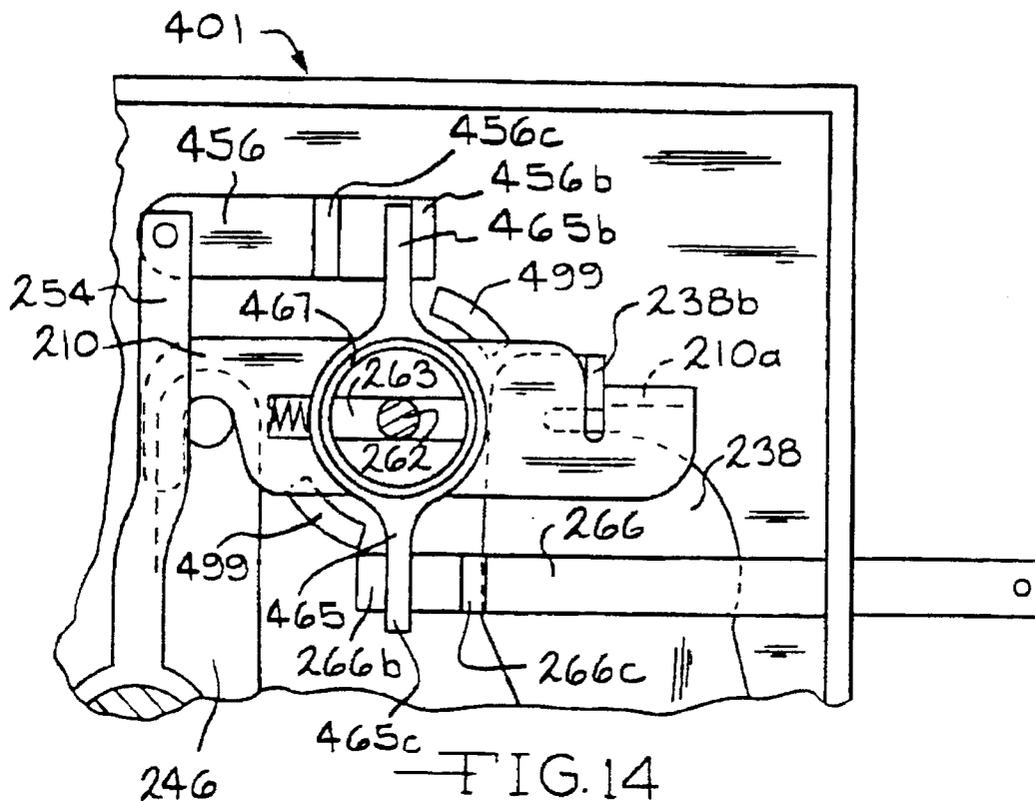


FIG. 13



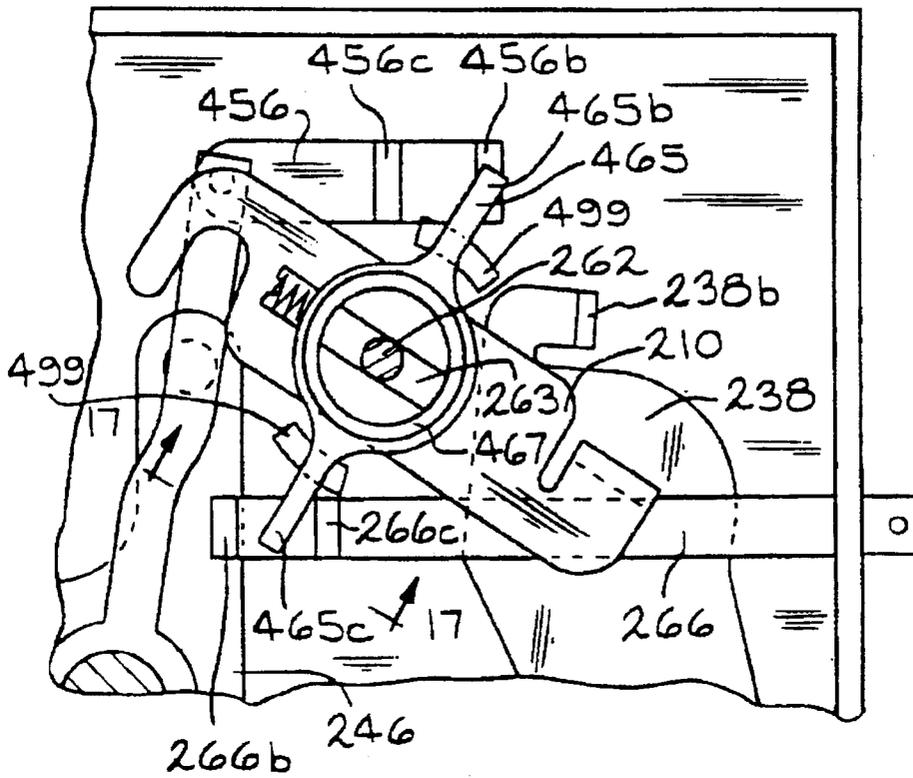


FIG. 16

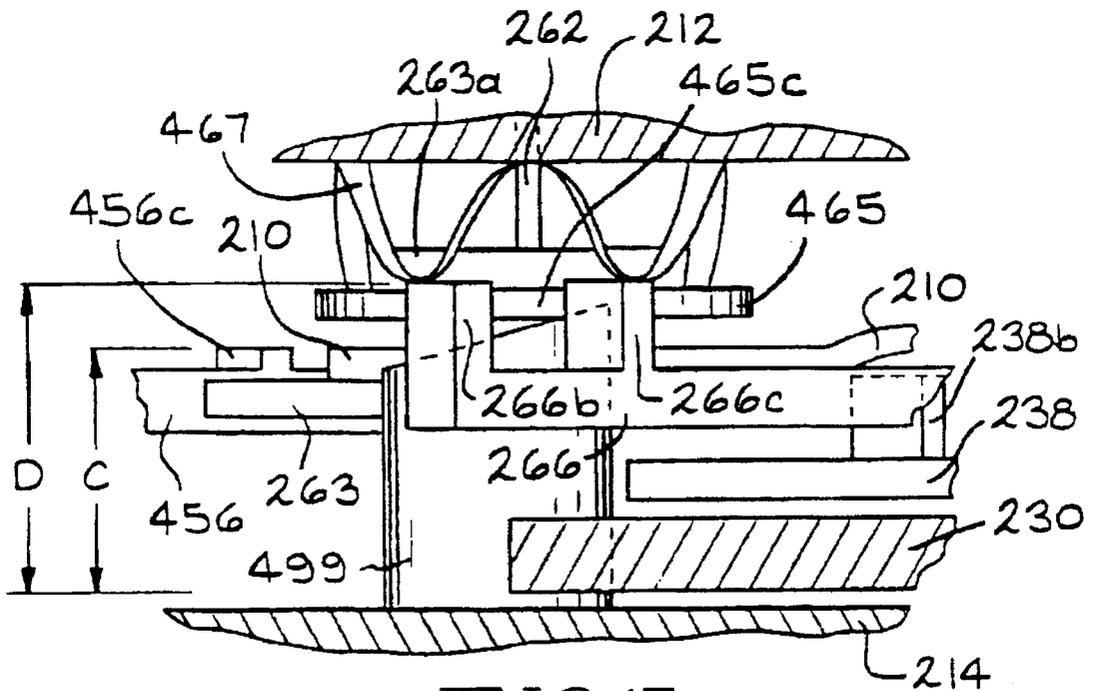


FIG. 17

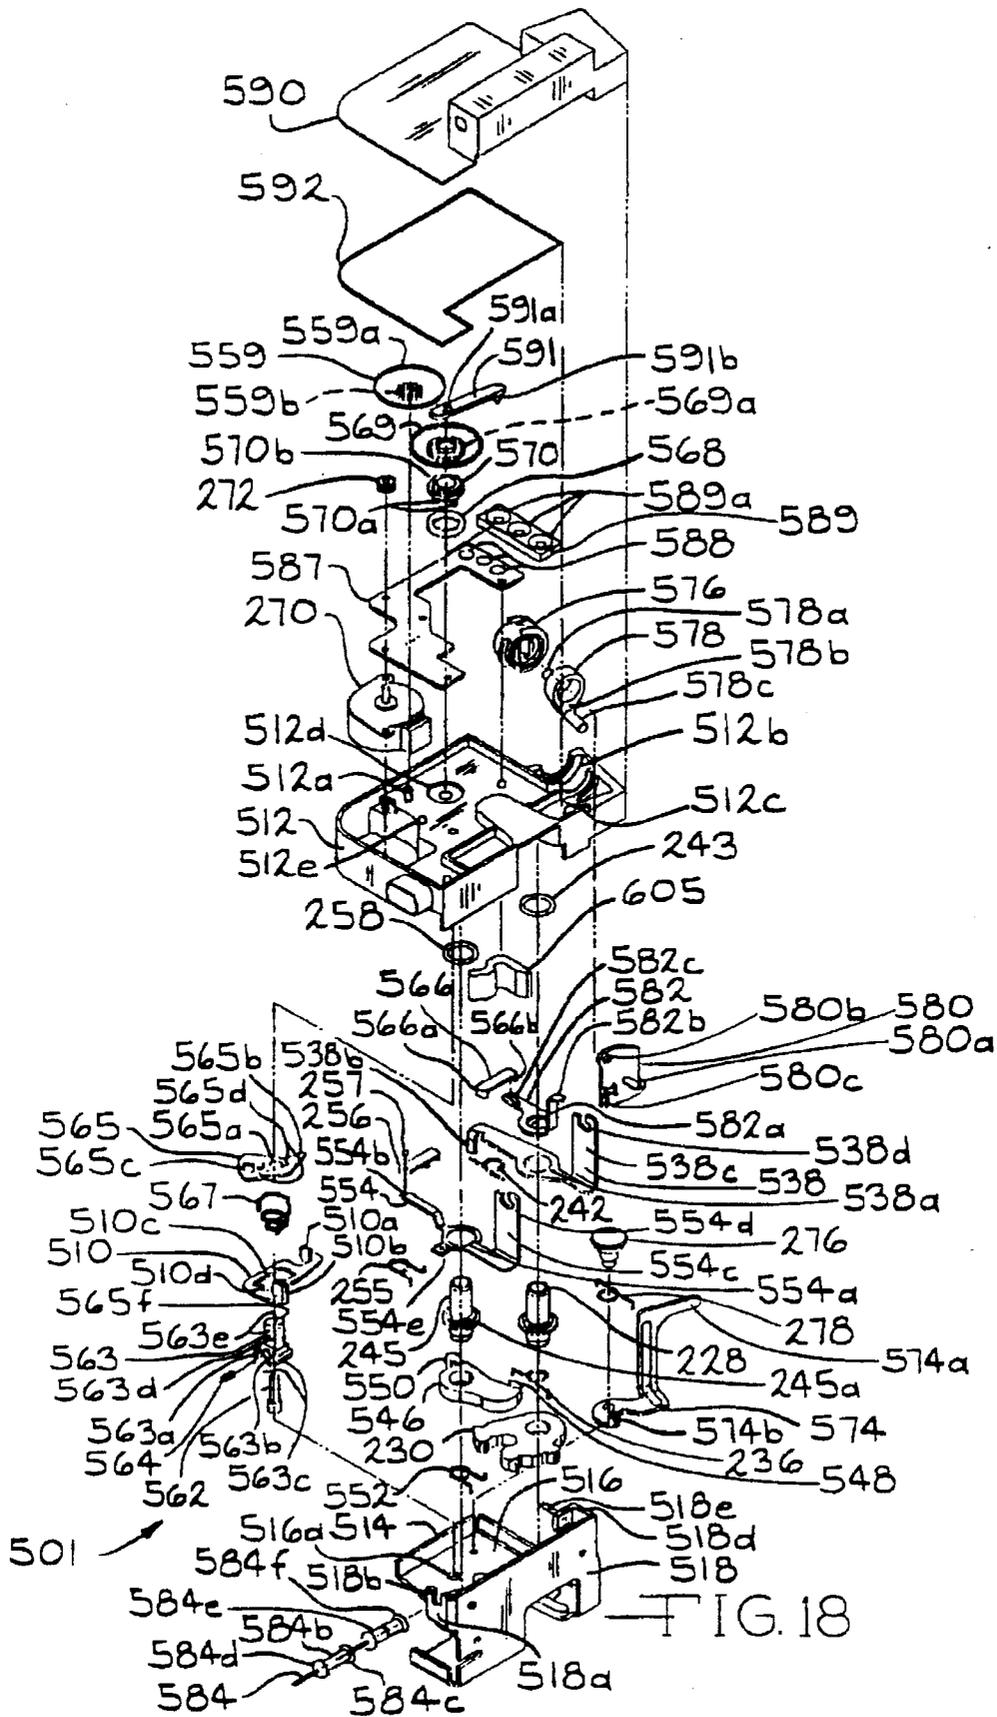


FIG. 18

FIG. 21

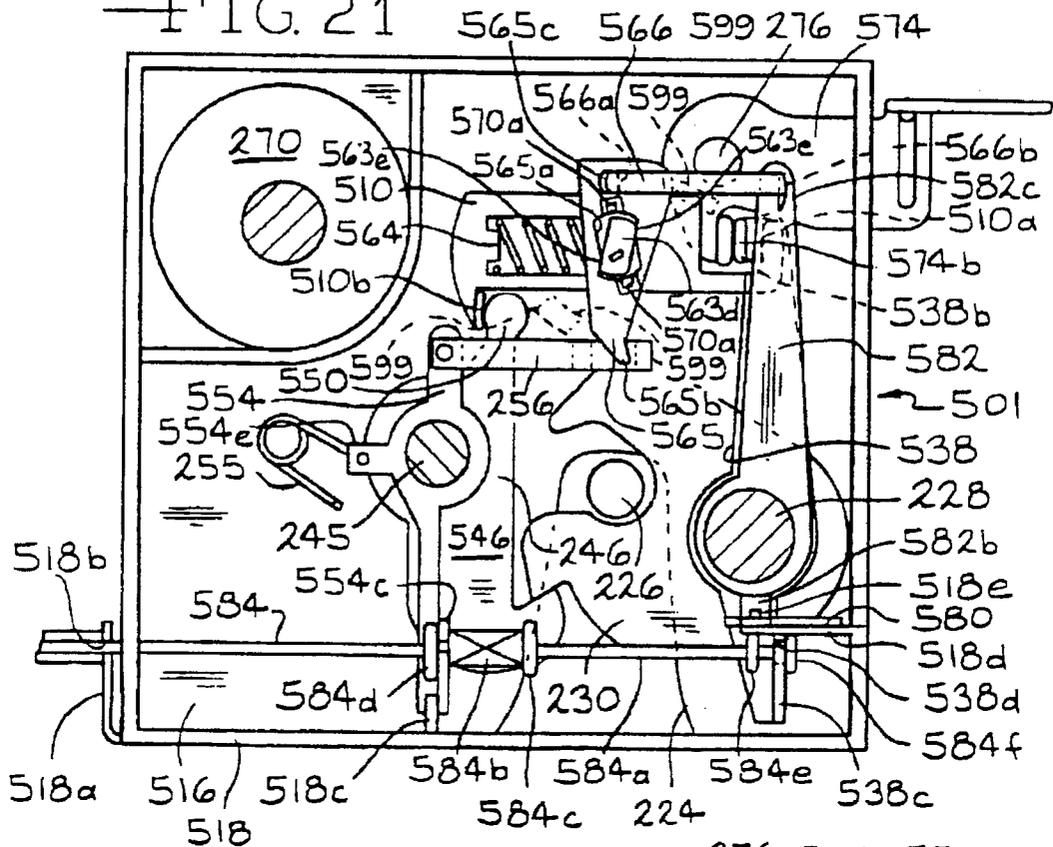
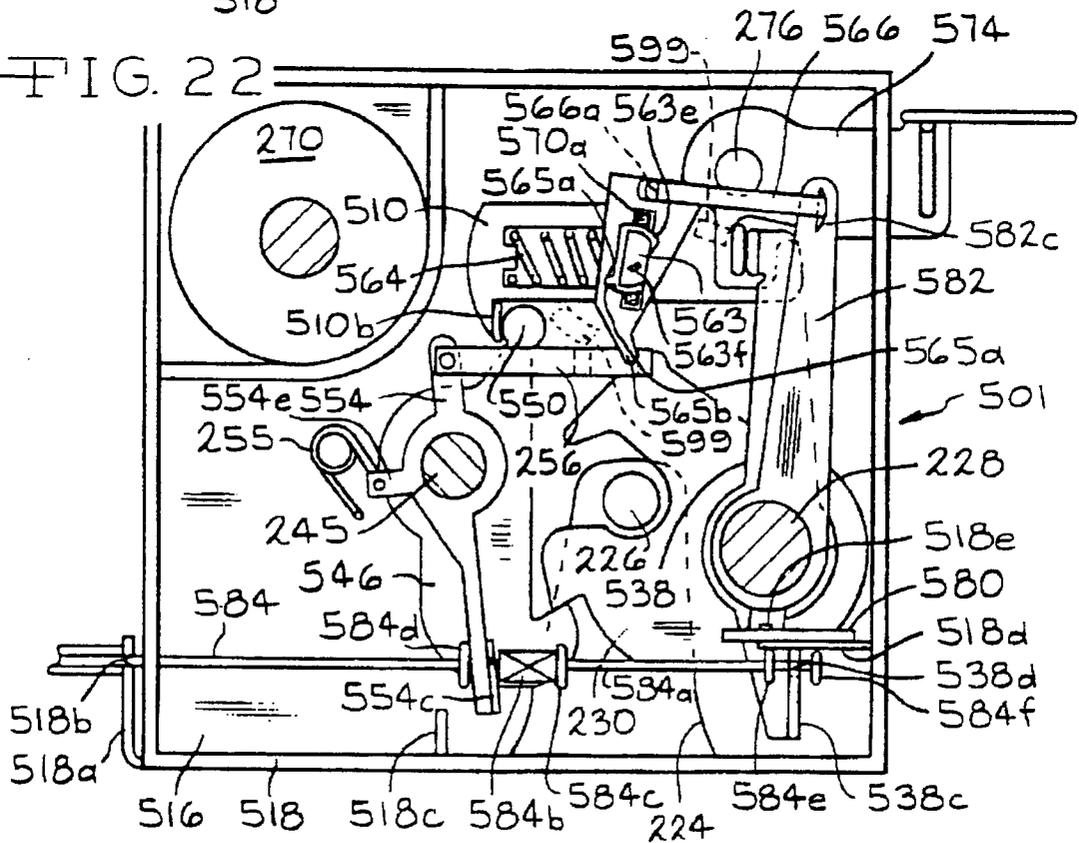


FIG. 22



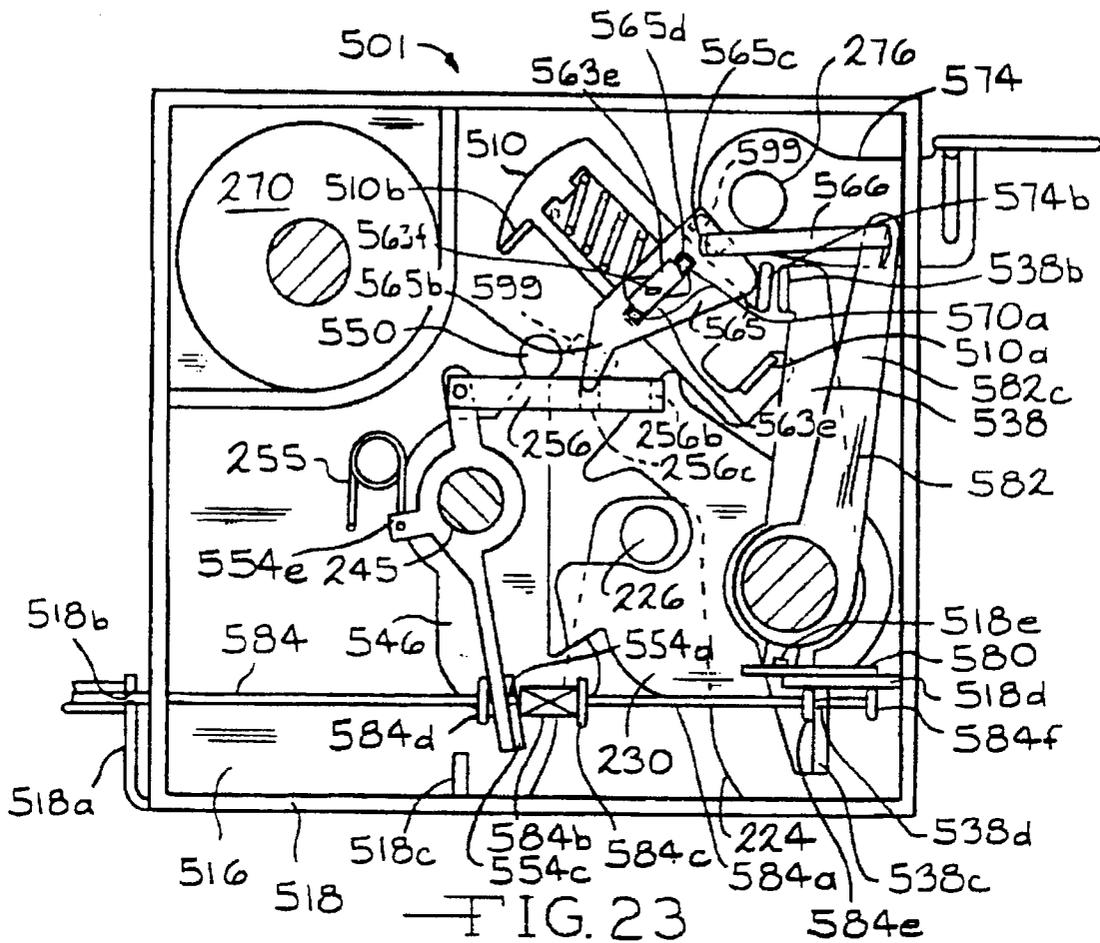


FIG. 23

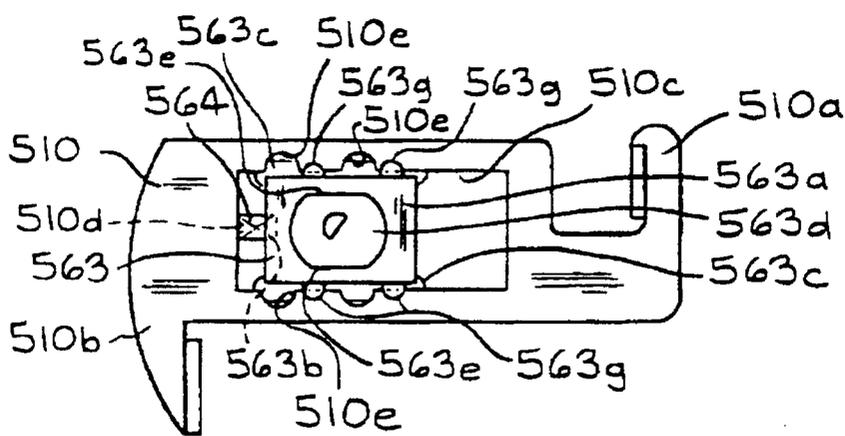
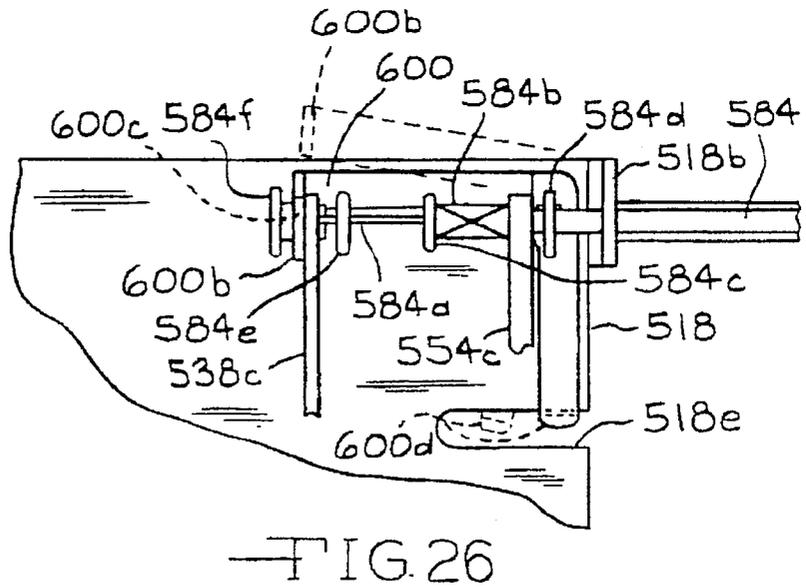
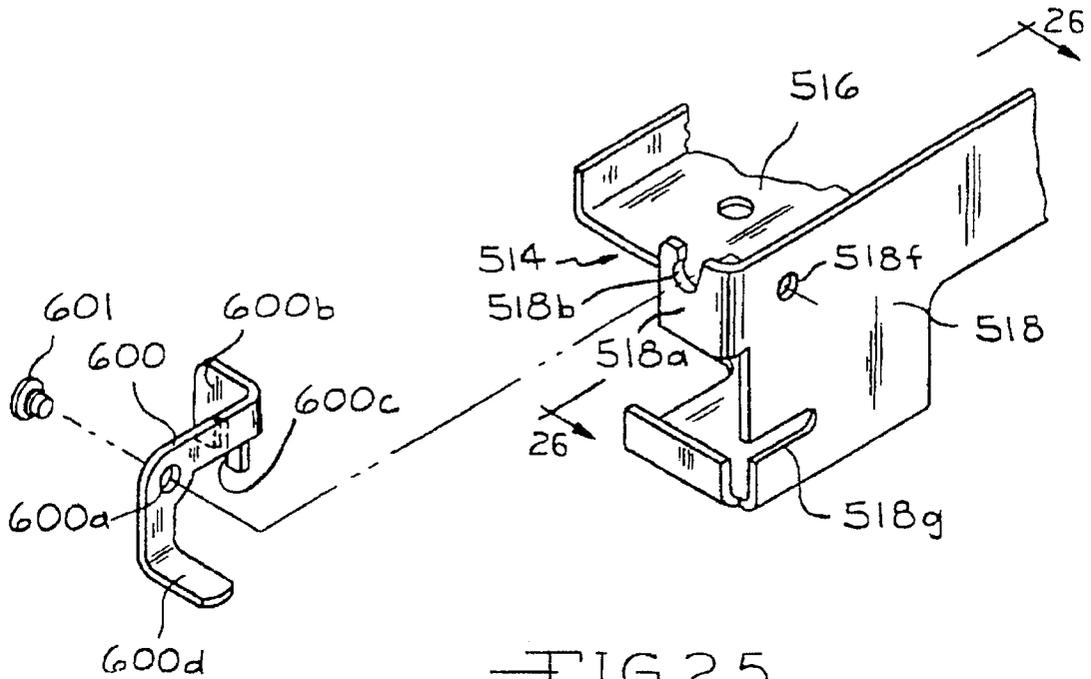


FIG. 24





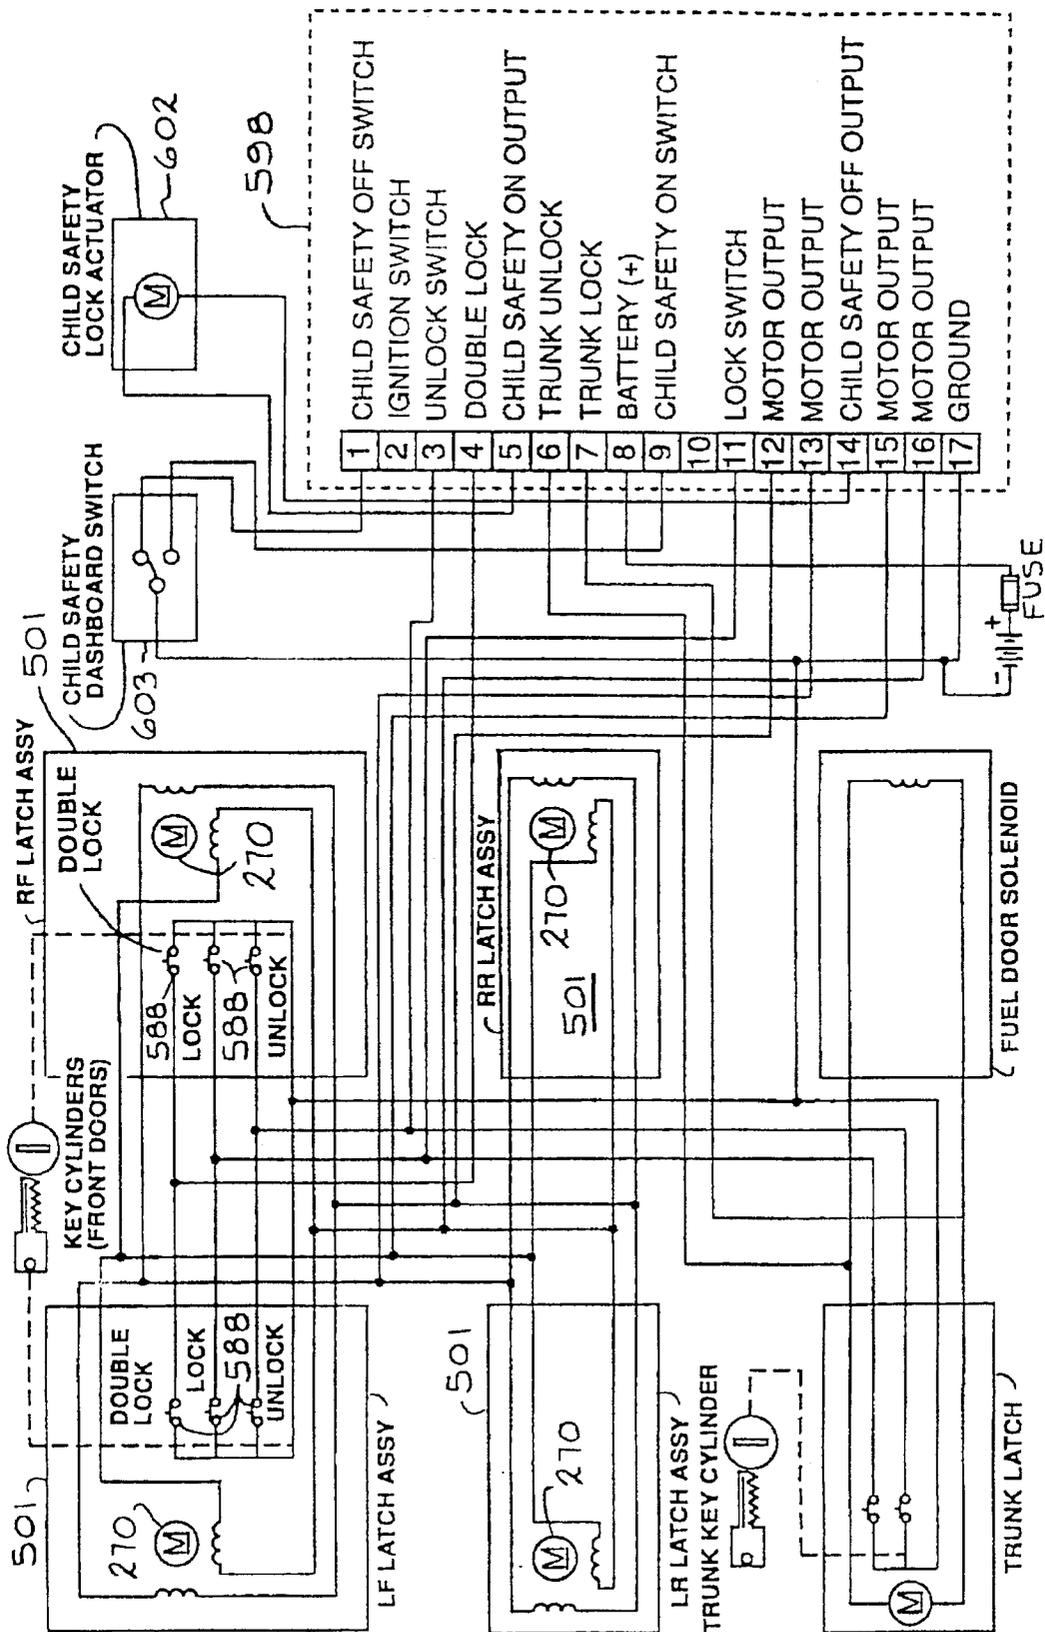


FIG. 27

FIG. 28

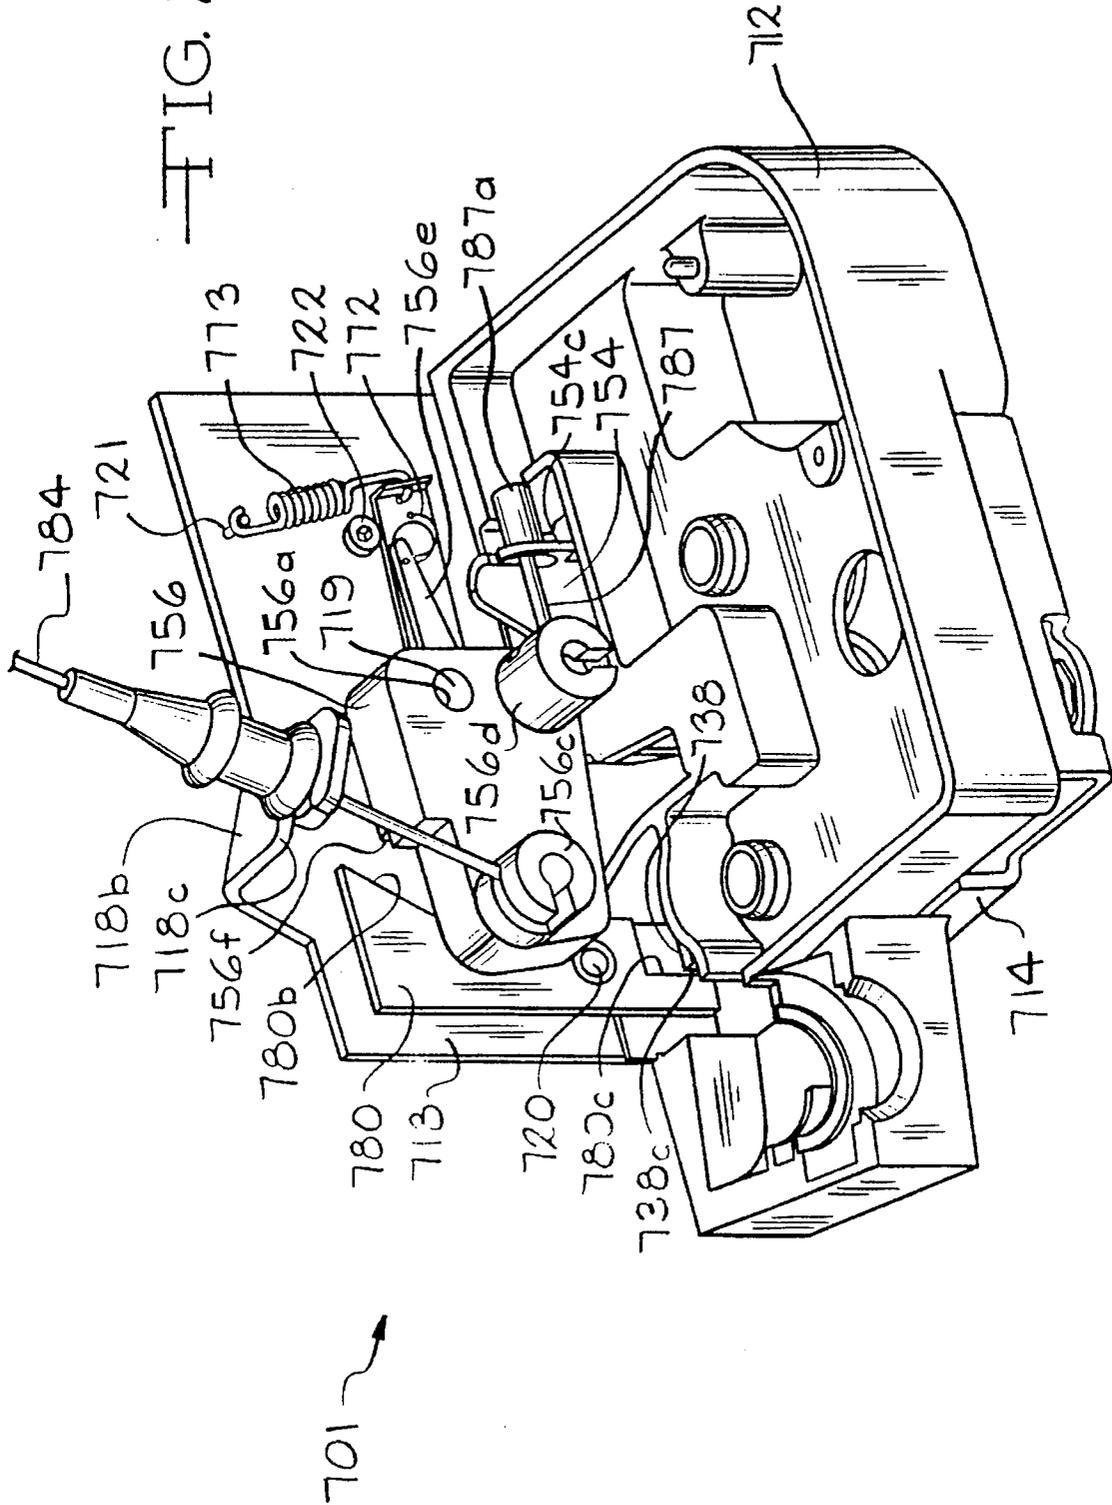

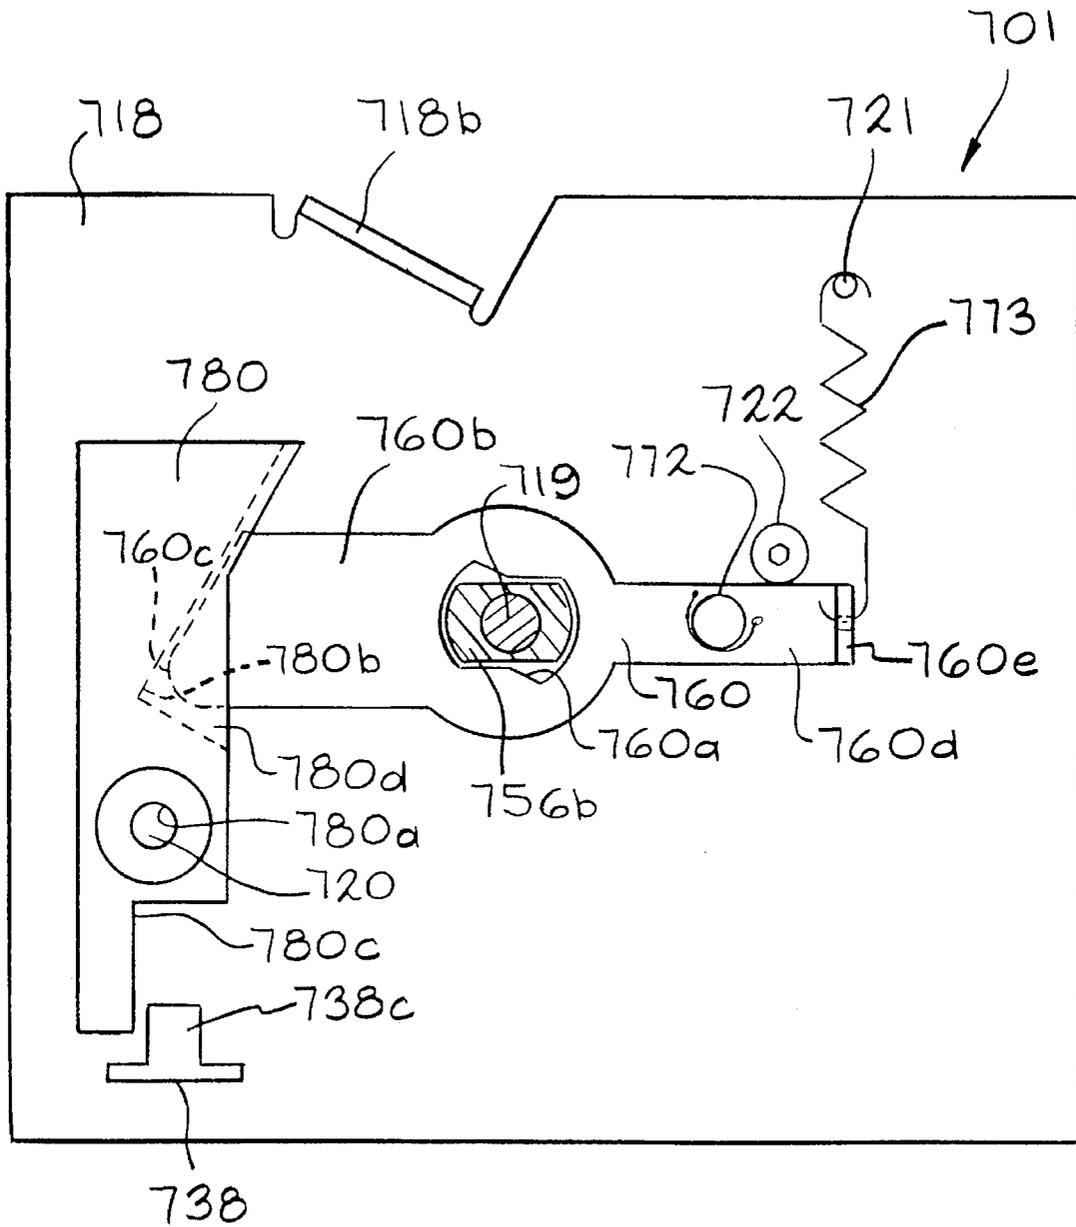

—FIG. 29


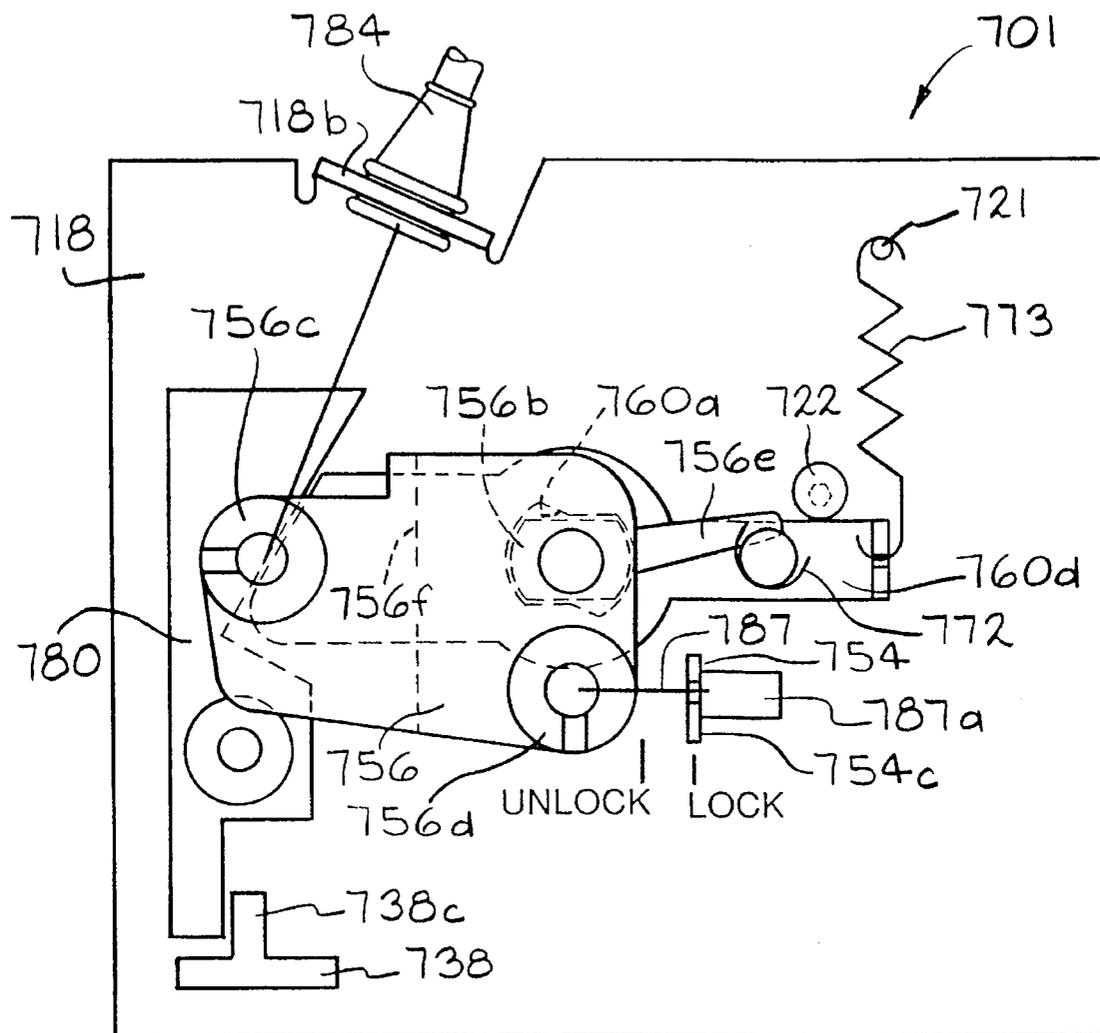


FIG. 30

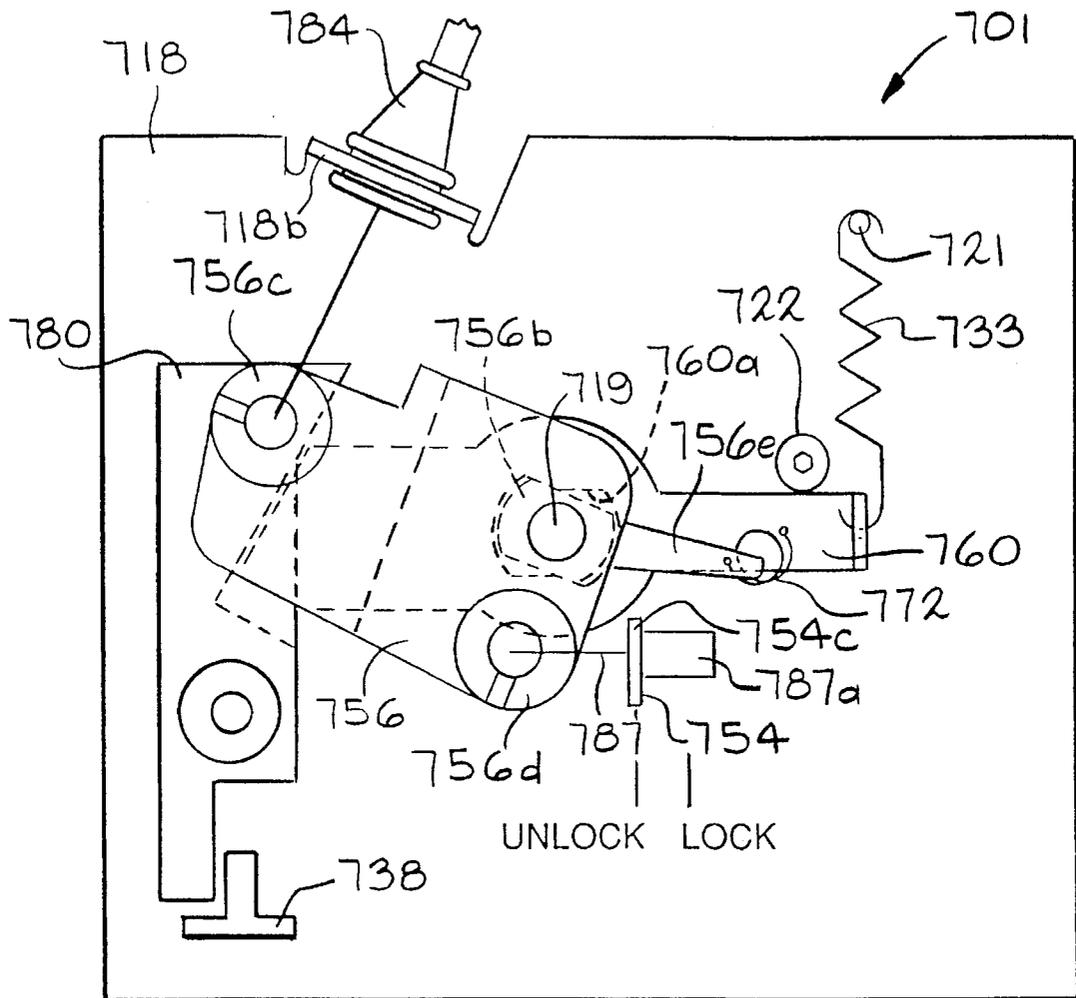

—FIG. 31

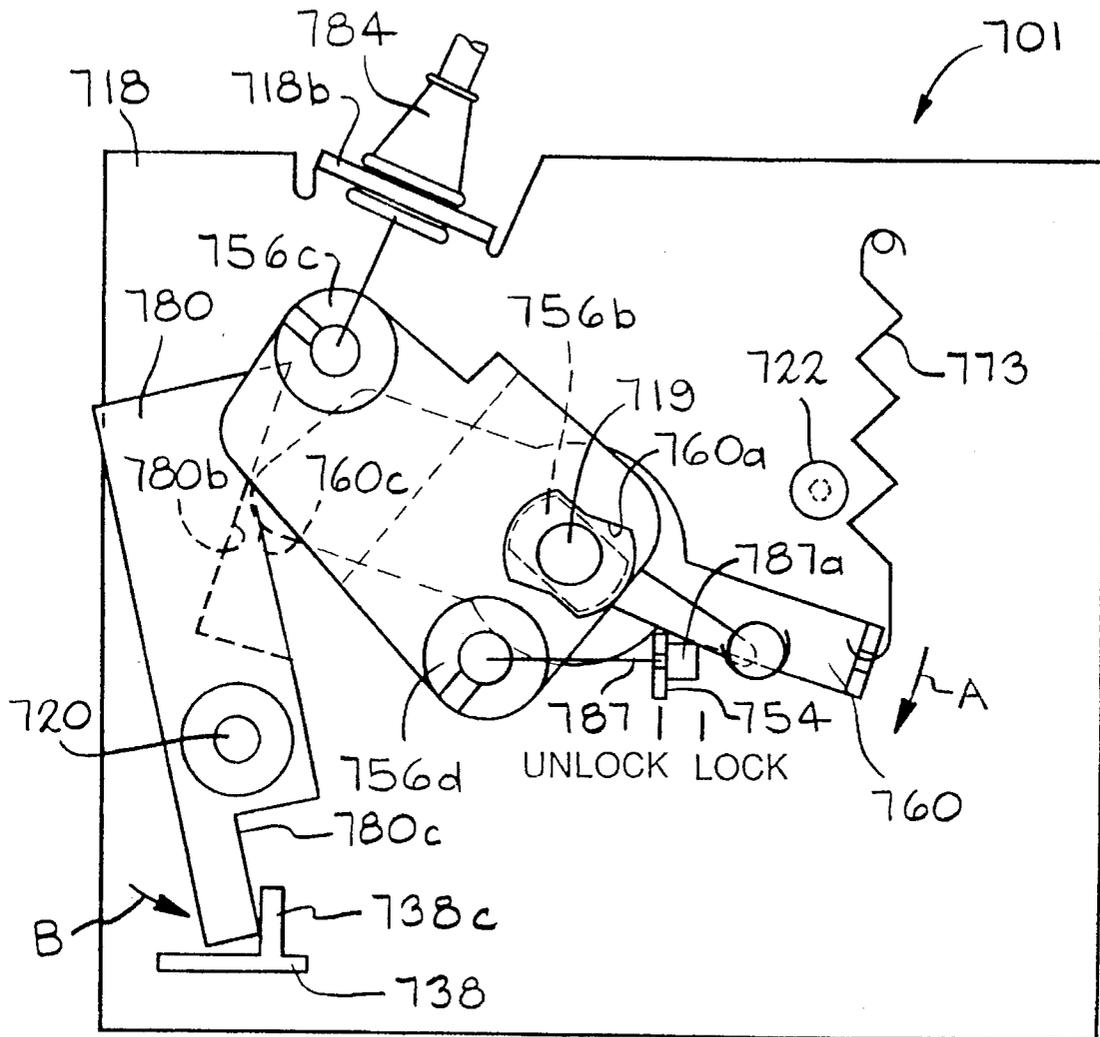
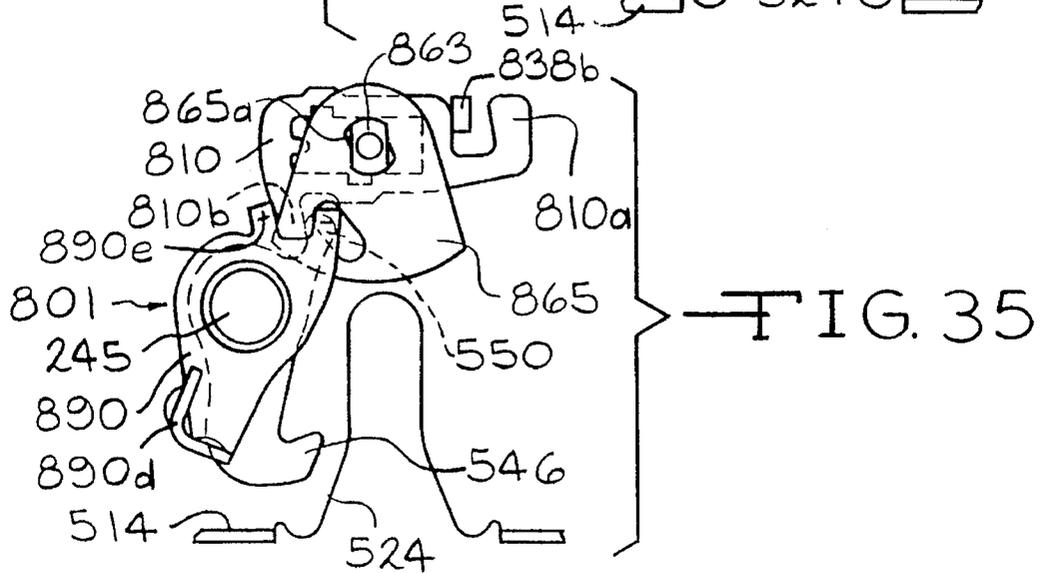
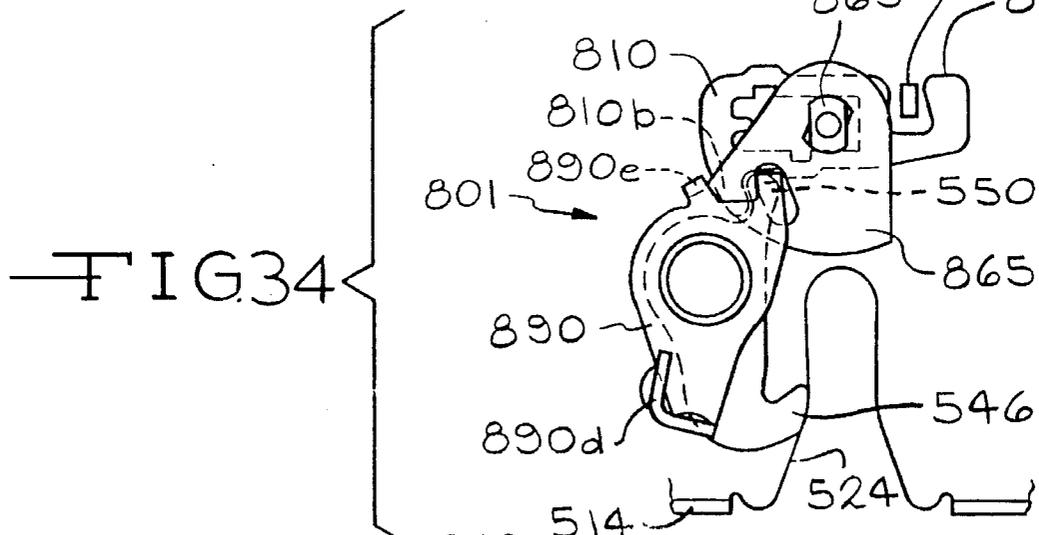
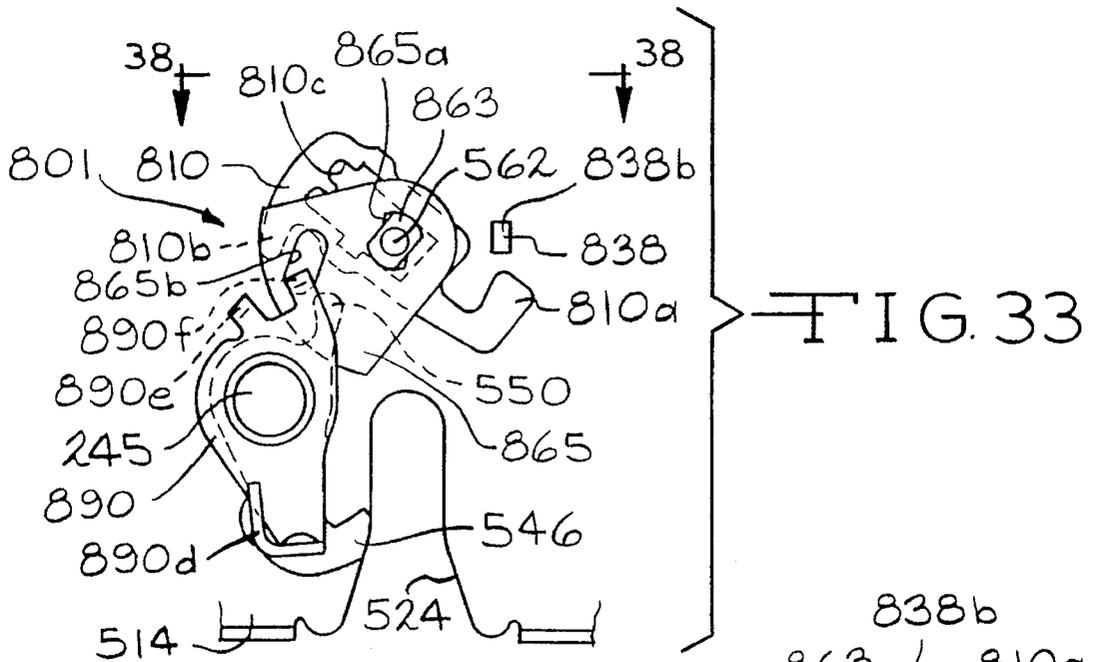


FIG. 32



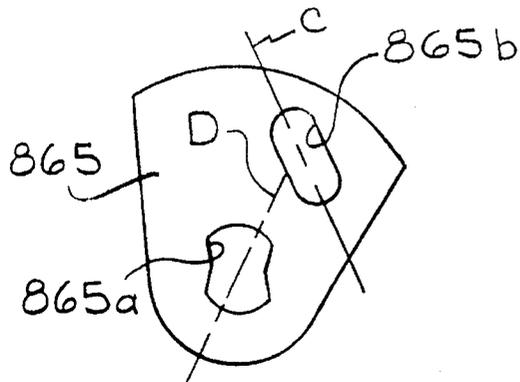


FIG. 36

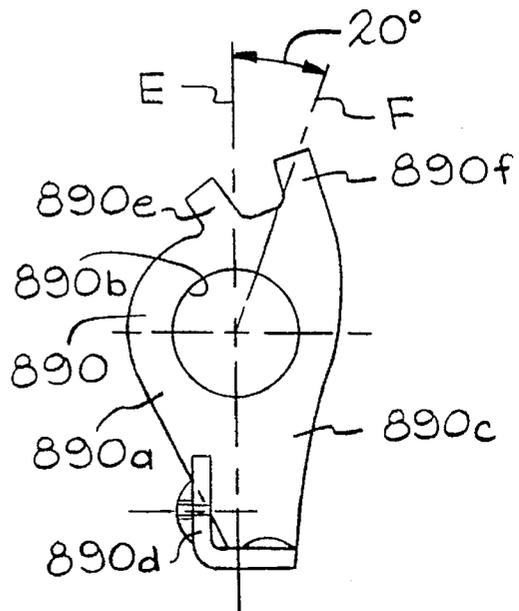


FIG. 37

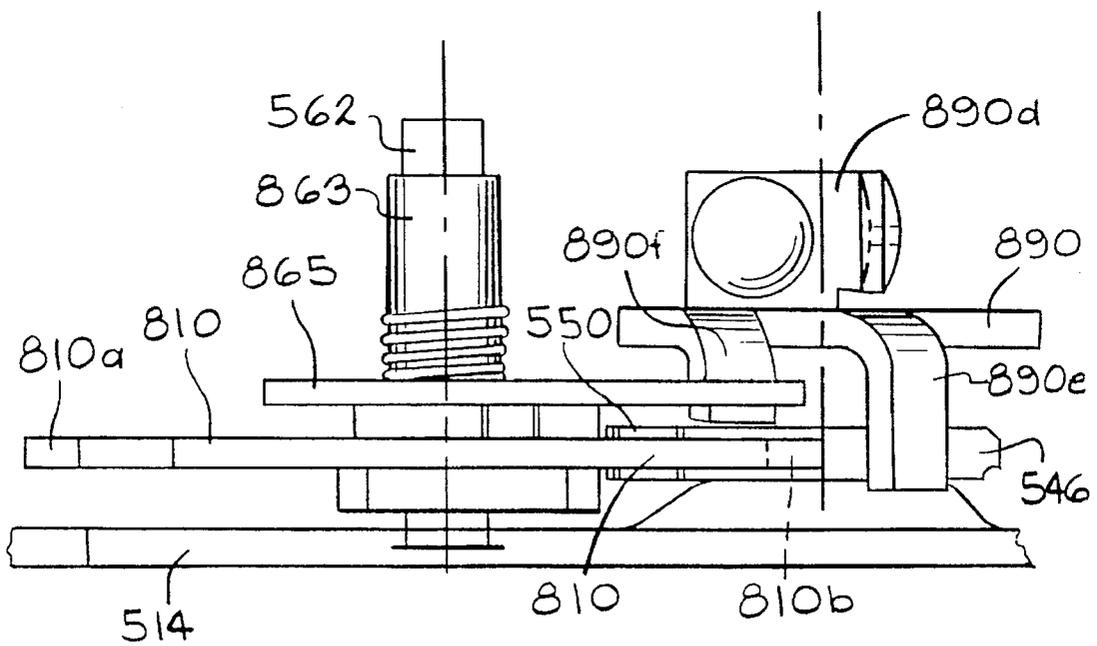


FIG. 38

DOOR LATCH WITH DOUBLE LOCKING ANTITHEFT FEATURE

CROSS REFERENCE TO RELATED APPLICATION

This application is a continuation-in-part of application Ser. No. 08/137,448 filed on Oct. 15, 1993, now U.S. Pat. No. 5,474,339 and assigned to the assignee of this application.

BACKGROUND OF THE INVENTION

This invention relates in general to electrically actuated latch assemblies and, in particular, to an improved structure for an electrically actuated vehicle door latch having a double locking antitheft feature.

Vehicles such as passenger cars are commonly equipped with individual latch assemblies which secure respective passenger and driver doors. Each latch assembly is typically provided with manual latch actuating mechanisms for unlatching the latch assembly from outside and inside the vehicle, e.g., respective outer and inner door handles. Each latch assembly is also typically provided with an individual mechanical lock which may be provided with a key operated locking mechanism for operating the lock from the exterior of the vehicle and provided with manual locking mechanism for operating inside the vehicle, e.g., a respective sill button. Further, these locks are commonly provided with a locking mechanism for remote operation, such as an electrically operated mechanism for actuating the lock.

As is commonly known, the lock may be actuated to prevent release of the latch assembly. On vehicles with an interior manual locking mechanism, a thief may break a window of the vehicle and reach inside to manually unlock the latch assembly. It has therefore been proposed to provide a latch assembly having a "double lock" feature by which the interior manual locking mechanism may be selectively disabled when the occupant exits the vehicle. A vehicle having latch assemblies thus equipped with a double lock feature would be a less attractive target for thieves.

Generally, such a double lock feature has been provided by blocking latch assembly components from moving from a locked position to an unlocked position when the latch assembly is double locked. As described in U.S. Pat. No. 4,342,209 to Kleefeldt and U.S. Pat. No. 4,669,283 to Ingehoven, the double lock position is set by an electric motor actuator having a motor whose output shaft is a spindle on which is threaded a nut that acts to block the inside lock element in the locked position. Thus the structure must be strong enough to withstand whatever force a would-be thief is willing to apply. Hence, the elements must be made fairly robust and, therefore, are expensive to manufacture. Additionally, the latch mechanism can only be reset out of the double lock position by the electric motor. Thus if the vehicle's electric power fails while the latch assembly is double locked, even an authorized operator with the correct key will be locked out.

A second method for providing a double lock feature is described in U.S. Pat. No. 5,078,436 to Kleefeldt et al. As described therein, in the locked condition a coupling pin is moved to an uncoupled position. This uncouples an operating arm of the latch operating mechanism from an actuating lever which must be operated to unlatch the assembly. Double locking of the latch assembly is accomplished by an electric motor actuator having a motor whose output shaft is a spindle on which is threaded a nut that acts to move a

two-part antitheft lever into a double lock position which blocks the coupling pin in the uncoupled position. If the vehicle's electric power fails, an outside key cylinder may be operated to move the blocking part of the antitheft lever into an unblocking position, allowing the latch assembly to be unblocked. However, only the electric motor actuator can move the two-part antitheft lever into the double lock position. Additionally, the assembly relies on a blocking action to keep the antitheft lever in the double lock position. Thus, again, the structure must be strong enough to withstand whatever force a would-be thief is willing to apply. Hence, the elements must be made fairly robust and, therefore, are more expensive to manufacture.

SUMMARY OF THE INVENTION

This invention relates to an improved structure for a vehicle door latch assembly wherein locking and double locking are accomplished by uncoupling components thereof. In particular, the latch assembly includes a lock mechanism which may be actuated between a locked and unlocked condition. The latch assembly is adapted to be mounted to a motor vehicle structure to engage a striker pin fixed to the motor vehicle. The latch assembly includes a pivotal rotor engagable with the striker pin to secure the vehicle door shut. A pawl is operatively coupled to the rotor and moveable between a blocking position retaining the rotor in engagement with the striker pin, and a release position permitting the rotor to disengage the striker pin. A link is operatively coupled to the pawl. The link engages the pawl in a coupled position, and is selectively moveable between the coupled position and an uncoupled position in which the link is disengaged from the pawl. An actuator member is operatively coupled to the link and engages the link when the link is in the coupled position. The actuator member is disengaged from the link when the link is in the uncoupled position. The actuator member is selectively moveable between an unactuated position and an actuated position in which the actuator member causes, when the link is in the coupled position, the link to move the pawl to the release position.

In one embodiment, a double lock feature is provided for the latch assembly. A lock/unlock lever is operatively coupled to the link, to a first fork, and to a second fork. When engaged with the lock/unlock lever, the first fork and the second fork may be selectively moved to drive the lock/unlock lever to urge the link between the coupled and the uncoupled positions. The first fork may be operated to move the lock/unlock lever into a double lock position in which the lock/unlock lever is disengaged from the second fork, and the link is disengaged from the pawl and the actuator member.

Various objects and advantages of this invention will become apparent to those skilled in the art from the following detailed description of the preferred embodiment, when read in light of the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded perspective view of one embodiment of the latch assembly of this invention and which does not include a double lock feature.

FIG. 2 is a diagrammatic plan view of the limited rotation torque motor illustrated in FIG. 1.

FIG. 3 is an enlarged sectional view taken along the line 3—3 of FIG. 2, illustrating an electrically actuated detent.

FIG. 4 is a plan view of the assembled latch assembly of FIG. 1 in a latched condition.

FIG. 5 is a view similar to that of FIG. 4 illustrating the latch assembly in an unlatched position.

FIG. 6 is a view similar to that of FIG. 4 illustrating a second embodiment of the latch assembly in a latched condition.

FIG. 7 is a view similar to that of FIG. 6 illustrating the latch assembly in an unlatched position.

FIG. 8 is an exploded perspective view of a third embodiment of the latch assembly which is similar to the embodiment shown in FIG. 1 but has been modified to include a double lock feature.

FIG. 9 is a plan view of the assembled latch assembly of FIG. 8 below the actuator housing in a latched and unlocked condition.

FIG. 10 is a view similar to that of FIG. 9 illustrating the latch assembly in an unlatched condition.

FIG. 11 is a view similar to that of FIGS. 9 and 10 illustrating the latch assembly in a locked condition.

FIG. 12 is a view similar to that of FIGS. 9, 10 and 11 illustrating the latch assembly in a double locked condition.

FIG. 13 is a partial plan view of a fourth embodiment of the latch assembly which is similar to the embodiment shown in FIGS. 8 through 12, but which has been modified to include a second type of double lock feature.

FIG. 14 is a partial plan view of a fifth embodiment of the latch assembly which is similar to the embodiment shown in FIGS. 8 through 12, but which has been modified to include a third type of double lock feature utilizing axial movement to provide double locking.

FIG. 15 is a view similar to that of FIG. 14 illustrating the latch assembly in a latched condition.

FIG. 16 is a view similar to that of FIGS. 14 and 15, illustrating the latch assembly in a double locked condition.

FIG. 17 is a view taken along the line 17—17 of FIG. 16.

FIG. 18 is an exploded perspective view of a sixth embodiment of the latch assembly which is similar to the embodiment shown in FIG. 14 but has been modified to include a fourth type of double lock feature.

FIG. 19 is a bottom plan view of the actuator housing of FIG. 18 showing a pair of opposed ramps thereon.

FIG. 20 is a side elevation view similar to that of FIG. 17 illustrating the latch assembly in a double lock condition.

FIG. 21 is a top plan view illustrating the latch assembly in an unlocked condition.

FIG. 22 is a view similar to that of FIG. 21 illustrating the latch assembly in an unlocked condition with no remaining lost motion in moving toward a locked condition.

FIG. 23 is a view similar to that of FIGS. 21 and 22 illustrating the latch assembly in a double locked condition.

FIG. 24 is a plan view of an embodiment of the link and index member of the latch assembly illustrating the means by which the index member retains the link.

FIG. 25 is a partial exploded perspective view of the latch assembly illustrating a child safety lock lever.

FIG. 26 is a view taken along the line 26—26 of the FIG. 25.

FIG. 27 is a schematic diagram of a central locking system utilizing latch assemblies of the invention

FIG. 28 is a perspective view of an embodiment of a latch assembly of this invention having a lost motion connection with a Bowden cable.

FIG. 29 is a schematic view of the components providing the lost motion connection in FIG. 28, with a cross sectional view of the lug on the bell crank lever shown in FIG. 28.

FIG. 30 is a schematic view of a portion of the latch assembly shown in FIG. 28, with the latch assembly in a locked condition.

FIG. 31 is a view similar to FIG. 30, except showing the latch assembly in an unlocked condition.

FIG. 32 is a view similar to FIGS. 30 and 31, except showing the latch assembly in an unlocked and released condition.

FIG. 33 is a partial plan view of another embodiment of a latch assembly according to this invention in which a cable-operated lock/unlock lever can be selectively coupled to operate the pawl, shown in a locked condition.

FIG. 34 is a view similar to FIG. 33, except showing the latch assembly in an unlocked condition.

FIG. 35 is a view similar to FIGS. 33 and 34, except showing the latch assembly in an unlocked and released condition.

FIG. 36 is an enlarged view of the path lever shown in FIGS. 33 through 35.

FIG. 37 is an enlarged view of the lock/unlock lever shown in FIGS. 33 through 35.

FIG. 38 is an elevational view of the latch assembly taken along the line 38—38 of FIG. 33.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

In the following description of the invention, certain terms will be utilized for the purpose of reference only and are not intended to be limiting. The terms "upward", "downward", "above", "below", "rightward", "leftward", "clockwise", and "counterclockwise" refer to directions in the drawings to which reference is made. The terms "inward" and "outward", refer to directions toward and away from, respectively, the geometric center of the device described. Such terminology will include the words specifically mentioned above, derivatives thereof, and words of similar import.

Referring now to the drawings, there is illustrated in FIG. 1 a latch assembly, indicated generally at 20, which has a frame 22. The frame 22 is adapted to be secured to a first structure, for example, the edge of a vehicle door (not shown). The frame 22 is formed with a laterally extending notch 24, the inner edges of which converge inwardly and diverge outwardly. The notch 24 is adapted to receive a striker bolt 26 (FIG. 4) secured to a second structure, such as a doorpost (not shown) of a vehicle when the vehicle door is closed. Those of ordinary skill in the art will appreciate that the latch assembly 20 may be arranged other than as described above. For example, the latch assembly 20 may be mounted on a doorpost and mate with a striker bolt 26 mounted to move with a door.

The frame includes a first upright stepped pin 28 fixed thereto, spaced apart from the notch 24. The stepped pin 28 is provided with at least a first step 28a and a second step 28b. A rotor 30 is pivotally mounted on the pin 28, and bears against the step 28a. The step 28a acts to space the rotor 30 apart from the frame 22. The rotor 30 includes a notch 32, and a retaining step 34. As will be further described below with reference to FIG. 3, the rotor 30 (in a latched position) receives the striker bolt 26 within the notch 32, which cooperates with the notch 24 formed in the frame 22 to retain

the striker bolt 26. In unlatching the latch assembly 20 (FIG. 4), the rotor 30 rotates counterclockwise to an unlatched position in which the notch 32 is aligned with the notch 24 to permit the striker bolt 26 to be released.

The rotor is biased in a counterclockwise direction (toward the unlatched position) by a spring 36. One end of the spring 36 engages the frame 22, while an opposite end engages the rotor 30. The spring 36 may be conventionally formed of a suitable material such as music wire.

An actuator member 38 is pivotally mounted on the pin 28, and is provided to adapt the motion of the vehicle's latch actuating mechanism (not shown) to the latch assembly. The actuator member 38 bears against the step 28b, which acts to space the actuator member 38 from the rotor 30. The actuator member 38 includes a pin or tab 40 extending upwardly from the upper surface thereof, the purpose of which will be explained below. The actuator member 38 is also provided with a second upwardly extending tab 42 or other feature for connecting the actuator member 38 to the latch actuating mechanism. As will be further explained below, the latch actuating mechanism may be selectively operated to drive against the tab 42 so as to cause the actuator member 38 to pivot about the pin 28. The actuator member 38 can be formed of a stamped steel. The tabs 40 and 42 are preferably integrally formed with the actuator member 38.

The frame is provided with a second upright stepped pin 44, spaced apart from the notch 24 and the first stepped pin 28. The stepped pin 44 is provided with at least a first step 44a. A pawl 46 is pivotally mounted on the pin 44. The pawl 46 bears against the step 44a, which acts to space the pawl 46 from the frame 22. The pawl 46 includes a hook 48 formed on one end thereof extending toward the rotor 30. A bearing surface 50 is formed on the opposite end of the pawl 46 from the hook 48.

As will be further explained below, the pawl 46 is adapted to be pivoted between a blocking position (shown in FIG. 4) and a release position (shown in FIG. 5). In the blocking position, the hook 48 is adapted to engage the retaining step 34 on the rotor 30 to retain the rotor 30 in the latched position. When the pawl 46 is in the release position, the hook 48 is disengaged from the retaining step 34, permitting the rotor 30 to rotate to the unlatched position.

The load bearing components described above (i.e., all the above describe components except the spring 36 and the actuator 38) may be subjected to impact stresses during a vehicle collision. As is well known, an occupant of a vehicle is normally safer during a collision inside the vehicle than if ejected from the vehicle. Thus, the load bearing components of the latch assembly 20 should be designed to withstand these impact stresses to keep the vehicle door latched closed during a collision. Therefore, the frame 22, the stepped pins 28 and 44, the rotor 30, the pawl 46, and the striker bolt 26 are formed of suitable materials selected for strength and toughness as well as low cost, preferably a metal such steel.

One end of a spring 52 engages the frame 22. A second end of the spring 52 engages the pawl 46. Thus engaged, the spring 52 acts to urge the pawl 46 to pivot counterclockwise from the release position to the blocking position. The spring 52 may be conventionally formed of a suitable material such as music wire.

An elongate link 54 is provided with a tab or hook 56 at one end thereof and a depending tab 58 at the other end thereof. An axially extending slot 60 is formed in the link 54 intermediate the hook 56 and the tab 58. The link 54 is operatively coupled to both the pawl 46 and the actuator

member 38. In a manner to be described below, the link 54 is adapted to be pivoted between a coupled position and an uncoupled position. When the actuator 38 is in its unactuated position, the link 54 may be rotated clockwise to a coupled position to cause the hook 56 to engage the tab 40 on the upper surface of the actuator 38. The tab 58 on the opposite end of the link 54 engages the bearing surface 50 on the pawl 46, the tab 58 being positioned abutting or slightly spaced apart from the bearing surface 50. The link 54 can be formed of stamped steel.

A shaft 62 includes a depending tongue 64 which is received in the slot 60 of the link 54 with a slip fit. The link 54 is thus keyed to the shaft 62, such that rotation of the shaft 62 about its axis causes the link 54 to rotate therewith between the coupled and uncoupled positions. The link 54 may be moved radially relative to the shaft 62. As the link 54 is moved relative to the axis of the shaft 62, the pivot point of the link 54 moves correspondingly along the slot 60. A circumferential flange 65 is fixed to the shaft 62 for a purpose which will be explained later.

Referring now additionally to FIG. 2, the shaft 62 is fixed in an aperture 66 of a rotor 68 of a limited rotation torque motor, shown generally at 70. Limited rotation torque motors are known devices providing a controlled rotation of a predetermined angular magnitude. Limited rotation torque motors are available commercially from Globe Motors, a Division of Labinal Components and Systems, Inc., of Dayton, Ohio. The rotor 68 forms a permanent magnet, having a magnetic field (not shown). The rotor 68 is rotatably mounted within a stator 72 of the motor 70. The stator 72 is conventionally mounted so as to be fixed relative to the frame 22, for example by mechanical fasteners (not shown). The stator 72 has a core 74 (FIG. 2) which formed of a paramagnetic material which will have little residual magnetism. Electrical windings 76 are wrapped about the core 74 so as to form electromagnetic coils. The core 74 and the windings 76 are typically encapsulated within a housing 78.

Upon electrical energization of the windings 76 with a direct current (D.C.) flowing in a first direction through electrical leads 80, the windings 76 produce a magnetic field (not shown). The interaction of the magnetic field of the windings 76 and magnetic field of the rotor 68 causes the rotor 68 to be aligned in a first position, which causes the shaft 62 and consequently the link 54 to be aligned in the uncoupled position. The windings 76 may then be deenergized.

When the windings are energized by a D.C. current flowing in a second direction, opposite to the first direction, the magnetic field produced by the windings 76 having the opposite polarity from that described above. Consequently, the rotor 68 rotates from the first position to a second position. The shaft 62 rotates therewith, pivoting the link 54 to the coupled position. The windings 76 may then be deenergized.

In the illustrated embodiment, an electrically actuated, spring loaded detent 82 is formed in the stator 72. A bore 84 is formed through the stator 72, including the core 74. A plastic sleeve 86 lines the bore 84. The sleeve 86 has outwardly extending flanges 88 at either end thereof to retain and axially position the sleeve 86 in the aperture 84. The upper end of the sleeve 86 also includes an inwardly extending flange 90. An armature 92 is slidably disposed within the sleeve 86. The lower end 92a of the armature 92 may be tapered into a point.

A compression spring 94 is interposed between the armature 92 and the flange 90. The spring 94 urges the armature

92 downwardly in the sleeve 86. The lower end 92a is thus urged into contact with the upper surface of the flange 65 on the shaft 62. Radially extending ridges 96 formed on the upper surface of the flange 65 cooperate with the spring loaded armature 92 to prevent relative rotation between the stator 72 and the shaft 62. Those in the art will appreciate that features other than the ridges 96, such as slots or apertures formed in the flange 92, may be used to permit the armature 92 to securely engage the flange 92 to prevent rotation thereof relative to the stator 72. The link 54 is keyed to the shaft 62 by the slot 60, and is thus prevented from rotation by the action of the detent 82.

A manual locking mechanism (not shown), such as an inside door sill button or an exterior key cylinder, may be directly coupled to the link 54 to permit operation thereof to selectively move the link 54 to the coupled and uncoupled positions. Preferably, however, such a manual locking mechanism will be coupled to cause the shaft 62 to rotate. A feature such as a pin or tab 98 is provided on the flange 65, by means of which the manual locking mechanism is operatively coupled to rotate the shaft 62, and thus the link 54.

Referring now to FIG. 4, the operation of the latch assembly 20 will now be explained. The latch assembly 20 is illustrated therein in a latched and unlocked condition. The rotor 30 is oriented such that the notch 32 is generally perpendicular to the notch 24 in the frame 22. The rotor 30 thus cooperates with the frame 22 to capture the striker bolt 26 at the inner end of the notch 24.

The hook 48 on the pawl 46 engages the retaining step 34 on the rotor 30, thereby preventing the rotor 30 from pivoting to release the striker bolt 26. The spring 52 (FIG. 1) urges the pawl 46 to remain in the illustrated blocking position, engaged with the rotor 30. The actuator member 38 is illustrated in the unactuated position. The link 54 is illustrated in the coupled position, with the hook 56 on one end thereof engaging the tab 40 of the actuator member 38, and the tab 58 on the other end thereof engaging the bearing surface 50 of the pawl 46.

To unlatch the latch assembly 20, the vehicle's latch actuating mechanism (for example, a door handle) coupled to the tab 42 of the actuator member 38 is operated to cause the actuator member 38 to rotate to the actuated position, as illustrated in FIG. 5. The tab 40 of the actuator member 38 urges the link 54 leftward, the link 54 moving relative to the shaft 62 by means of the slot 60 formed in the link 54. With the link 54 under tension, the tab 58 thereon bears against the bearing surface 50 to urge the pawl 46 to rotate clockwise to the release position, in which the pawl 46 is disengaged from the rotor 30. The rotor 30 is thus free to rotate to substantially align the notch 32 thereof with the notch 24 of the frame 22, releasing the striker bolt 26. The spring 36 causes the rotor 30 to remain positioned with the notch 32 aligned with the notch 24.

The latch actuating mechanism may then be released by the operator to permit the actuator member 38 to be rotated back to the unactuated position under the urging of the spring 36. This permits the link 54 to reposition as the pawl 46, acting under the urging of the spring 52, rotates to engage the periphery of the rotor 30. If the striker bolt 26 and the latch assembly 20 are subsequently brought relatively together again, the striker bolt 26 will enter the notch 24 in the frame 22 and engage the notch 32 in the rotor 30. The rotor 30 is rotated by the striker bolt 26 until the striker bolt reaches the inner end of the notch 24 in the frame 22. The rotor 30 is thus positioned with the retaining step 34 aligned

with the hook 48 of the pawl 46, permitting the pawl 46 to be moved to the blocking position by the spring 52, placing the latch assembly 20 back in a latched condition.

To lock the latch assembly 20 in the latched condition, the link 54 is rotated to the uncoupled position. This may be accomplished either manually by operation of the manual locking mechanism or electrically by the motor 70. To manually lock the latch assembly 20, the manual locking mechanism operates through the tab 98 on the flange 65 to urge the shaft 62 to rotate. Sufficient force can be exerted through the manual locking mechanism to cause the armature 92 of the detent 82 to ride upwardly over the ridges 96 on the flange 65, compressing the spring 94 urging the armature 92 downwardly. The tongue 64 on the shaft 62 drives the link 54 to the uncoupled position. The armature 92 engages the ridges 96 on the flange 65 to prevent the shaft 62 and the link 54 from inadvertently moving from the uncoupled position due to, for example, vibrations transmitted from the vehicle.

The latch assembly may be electrically locked by energizing the motor 70 to cause current flow in the first direction. The magnetic field generated by the windings 76 preferentially pass through the core 74. The magnetic field is distorted at the bore 84 through the core 74. The magnetic field therefore acts to retract the armature 92 of the detent 82 into the sleeve 86, compressing the spring 96, and disengaging the armature 92 of the detent 82 from the ridges 96 of the flange 65. The detent 82 may thus be described as being electrically actuated, since the armature 92 is retracted by the magnetic field developed by electrically energizing the windings 76.

With the armature 92 thus retracted, the motor 70 may easily rotate the link 54, by means of the tongue 64 of the shaft 62, to the uncoupled position illustrated by the dashed line in FIG. 2. As the detent 82 is electrically actuated during the rotation of the shaft 62, the motor 70 need not be designed to develop as high a torque as was required to manually rotate the shaft 62 with the armature 92 camming over the ridges 96.

In referring to FIG. 4, it is apparent that, with the link 54 thus placed in the uncoupled position indicated by the broken line, the link 54 is disengaged from the tab 40 on the actuator member 38. The tab 58 on the link 54 is also disengaged from the pawl 46. Rotation of the actuator member 38 to the actuated position will not cause the tab 40 to engage or drive the link 54, and thus the pawl 46 will remain in the blocking position.

To unlock the latch assembly 20, the link 54 is rotated back to the coupled position. This may be accomplished manually by actuating the manual locking mechanism to rotate the flange 65, the shaft 62, and thus the link 54 clockwise to the coupled position. As the flange 65 rotates, the ridges 96 thereon bear against the armature 92 of the detent 82, causing the armature 92 to move upwardly, compressing the spring 94. Alternatively, the motor 70 may be energized with current flowing in the second direction through the leads 80 and the windings 76. This will cause the detent 82 to disengage the armature 92 from the ridges 96. The motor 70 will then rotate the link to the coupled position. Deenergizing the motor 70 then permits the spring 94 to urge the armature 92 into engagement with the flange 65. The ridges 96 cooperate with the spring loaded armature 92 to prevent the shaft 62 from inadvertently rotating, thus retaining the link 54 in the coupled position.

It will be noted that the actuator member 38 is mounted on the same stepped pin 28 as the rotor 30. This advanta-

geously provides a more compact design, thus permitting the latch assembly 20 to be installed within smaller volumes in a vehicle. It also eliminates the need to have separate mounting pins for each of the actuator member 38 and the rotor 30.

Another embodiment the latch assembly of this invention is illustrated in FIGS. 6 and 7, and indicated generally at 101. The latch assembly 101 is similar to the latch assembly 20 illustrated in FIGS. 1 through 4, and those components which are identical in each of the embodiments are denoted by identical reference numbers. The main difference between the two embodiments is that while unlatching the latch assembly 20 the link 54 acts under tension, whereas in the latch assembly 101, a link 110 acts under compression during unlatching.

As best seen in FIG. 7, the elongate link 110 is provided with a first notch 112 at one end thereof, opening toward the actuator member 38. A bearing surface 114 is provided at the other end of the link 110 from the notch 112. An axially extending slot 116 receives the tongue 64 with a slip fit. For clarity of illustration, the latch assembly 101 is shown with the motor 70 removed along with the shaft 62 above a section line through the tongue 64. A second notch 118 is formed in the link 110 intermediate the first notch 112 and the slot 116, and opens toward the actuator member 38.

A pawl 120 is provided with an aperture 122 by means of which the pawl 120 is rotatably mounted on the stepped pin 44. The pawl 120 bearing against the step 44a. The pawl 120 includes a hook 124 formed on one end thereof extending toward the rotor 30. A tab or pin 126 is fixed to the pawl 120 between the hook 48 and the aperture 122.

Like the pawl 46, the pawl 120 is adapted to be pivoted between a blocking position (shown in FIG. 6) and a release position (shown in FIG. 7). The spring 52 urges the pawl 46 to rotate counterclockwise into engagement with the rotor 30. In the blocking position, the hook 124 is adapted to engage the retaining step 34 on the rotor 30 to retain the rotor 30 in the latched position. When the pawl 120 is in the release position, the hook 124 is disengaged from the retaining step 34, permitting the rotor 30 to rotate to the unlatched position.

The actuator member 38 is operatively coupled to the link 110 and the pawl 120. When the actuator member 38 is in an unactuated position and the link 110 is in a coupled position, as illustrated in FIG. 6, the tab 40 on the actuator 38 engages the notch 112 in the link 110. The pin 126 on the pawl 120 is aligned with the axis of the slot 116 in the link 110.

To unlatch the latch assembly 101, the latch actuating mechanism (not shown) which engages the tab 42 on the actuator member 38 may be operated to cause the actuator member 38 to rotate to the actuated position illustrated in FIG. 7. The tab 40 on the actuator member 38 bears against the notch 112 in the link 110, pushing the link bearing surface 114 of the link 110 into engagement with the pin 126 on the pawl 120. The link 110, acting under compression, urges the pawl 120 to rotate clockwise to the release position illustrated in FIG. 7. The tongue 64 cooperates with the slot 116 to keep the link 110 axially aligned with the tongue 64 such that the bearing surface 114 remains engaged with the pin 126 as the link 110 moves radially relative to the shaft 62 to rotate the pawl 120 to the release position. In the release position, the pawl is disengaged from the rotor 30, and the rotor 30 is free to rotate counterclockwise to release the striker bolt 26.

To lock the latch assembly 101 in the latched position, the link 110 is rotated to the uncoupled position illustrated in

broken line in FIG. 6. When the link 110 is in the uncoupled position, the tab 40 cannot engage the notch 112 in the link 110. The actuator member 38 may be rotated to the actuated position, however, the notch 118 in the link 110 provides a relief preventing the tab 40 from touching the adjacent edge of the link 110. Therefore, if the actuator member 38 is moved to the actuated position the tab 40 cannot engage the notch 112 or frictionally engage the edge of the link 110, and thus cannot actuate the link 110. Furthermore, in the uncoupled position the tongue 64 holds the link 110 out of alignment with the pin 126 on the pawl 120. Therefore, even if the link 110 were to move radially from the shaft 62, for example due to inertia effects during a collision, the link 110 would not engage the pin 126, and thus the latch assembly 101 will remain latched.

As indicated above, it is desirable to provide a double lock feature for a vehicle door latch assembly. FIGS. 8 through 12 illustrate a latch assembly, indicated generally at 201, which is an embodiment of this invention having a double lock feature. The latch assembly 201 is similar to the latch assembly 20 illustrated in FIGS. 1 through 5 in that the link 210 is under tension during unlatching of the latch assembly 201. It will be apparent to those in the art that the components which are similar in function among the various embodiments disclosed herein will suitably be constructed of similar materials.

The latch assembly 201 includes an actuator housing 212 which is mounted on a frame 214. The actuator housing 212 is formed of any suitable material, preferably a molded polymeric material. The frame 214 is adapted to be secured to a vehicle structure, for example, the edge of a vehicle door (not shown). The frame 214 includes a base portion 216 and a wall portion 218 extending upwardly from one edge of the base portion 216. The wall portion 218 is shown with a portion broken away for clarity.

An opening 220 in the frame 214 extends into both the wall portion 218 and the base portion 216 (best seen in FIG. 8). The opening 220 forms a laterally extending notch 224 in the base portion 216, the inner edges of which converge inwardly and diverge outwardly. The notch 224 is adapted to receive a striker bolt 226 (FIGS. 10 through 12) secured to another vehicle structure, such as a doorpost (not shown) when the vehicle door is closed.

Apertures 216a and 216b are formed through the base portion 216 on opposite sides of the notch 224. Apertures 216c and 216d are formed through the base portion 216 and spaced apart from the apertures 216a and 216b. An aperture 218a is formed through the wall portion 218 of the frame 214, adjacent the opening 220. A flange 218b extends perpendicularly to the wall portion 218, over the base portion 216 of the frame 214. A notch 218c is formed in the upper edge of the flange 218b. A second flange 218d extends perpendicularly to the wall portion 218 adjacent the notch 224. The purpose of the apertures 216a, 216b, 216c, 216d, and 218a, and of the notch 218c will become clear in the discussion below.

A stepped pivot pin 228 is fixed in the aperture 216a. A rotor 230 is pivotally mounted between a circumferential flange 228a on the pin 228 and the base portion 216. The pin 228 may advantageously be provided with a threaded recess or bore 228b. A threaded fastener (not shown) may be threaded into the bore 228b to secure the latch assembly 201 to the vehicle. A shaft 228c formed on the upper surface of the pin 228 extends axially upwardly therefrom.

The rotor 230 includes a notch 232, and a retaining step 234. The rotor 230 rotates counterclockwise to an unlatched

position (FIG. 9) in which the notch 232 is aligned with the notch 224 to permit the striker bolt 226 to be released during unlatching. The rotor 230 is formed of a suitable material, such as steel, which is preferably case hardened. Additionally, the rotor 230 is preferably coated with a suitable material to prevent rattling and wear due to metal-to-metal contact, such as a wear resistant polymeric material overmolded onto the rotor 230. A spring 236 engages the frame 214 and the rotor 230 to urge the rotor 230 to rotate counterclockwise direction from the latched position to the unlatched position.

An actuator member 238 is formed with an aperture 238a, by means of which the actuator member 238 is pivotally mounted on the pin 228, above the flange 228a. The actuator member 238 further includes a tab 238b extending upwardly from the upper surface thereof by means of which the actuator member 238 is coupled to the link 210. The actuator member 238 is provided with a second upwardly extending tab 238c on the other side of the aperture 238a from the first tab 238b.

As will be further explained below, the actuator member 238 may be selectively pivoted about the pin 228 between an unactuated and an actuated position. To help prevent rattling and wear due to metal-to-metal contact between the pin 228 and the actuator member 238, an annular bearing 240 is fitted in the aperture 238a. The bearing 240 is preferably formed of a plastic such as nylon. A spring 242 engages the frame 214 and the actuator member 238 to urge the actuator member to rotate counterclockwise toward the unactuated position.

The shaft 228c of the pin 228 extends upwardly through an aperture 212a in the actuator housing 212. An elastomeric o-ring 243 interposed between the actuator housing 212 and the shaft 228c provides a leak resistant seal therebetween. A retaining clip 244 is removeably fixed about the upper end of the shaft 228c of the pin 228, thereby utilizing the pin 228 to secure the actuator housing 212 to the frame 214.

A stepped pivot pin 245 is fixed in the aperture 216b in the frame 214. The pin 245 is similar to the pin 228, and includes a circumferential flange 245a, a threaded bore 245b, and an axial shaft 245c extending upwardly from the upper surface thereof. The threaded bore 245b may be utilized with a threaded fastener to assist in securing the latch assembly 201 to the vehicle.

A pawl 246 is pivotally mounted on the pin 228 between the flange 245a and the base portion 216 of the frame 214. The pawl 246 includes a hook 248 formed on one end thereof extending toward the rotor 230. An upwardly extending pin 250 is formed on the opposite end of the pawl 246 from the hook 248. The pawl 246 is adapted to be pivoted between a blocking position (shown in FIGS. 10, 11, and 12), in which the hook 248 engages the retaining step 234 of the rotor 230, and a release position (shown in FIG. 9), in which the hook 248 is disengaged from the retaining step 234. Like the rotor 230, the pawl 246 is preferably formed of a material such as case hardened steel, and is preferably overmolded with a wear resistant polymeric material. A spring 252 engages the pawl 246 and the frame 214 to urge the pawl 246 to pivot counterclockwise from the release position to the blocking position.

An elongate interior lock lever 254 includes a central aperture 254a therethrough by means of which the interior lock lever 254 is pivotally mounted on the pin 245. A first end of the interior lock lever 254 is provided with a second aperture 254b, while the other end thereof is provided with an upwardly extending tab or flange 254c. The flange 254c

extends longitudinally along the interior lock lever 254. A generally L-shaped notch 254d is formed in the upper edge of the flange 254c. The interior lock lever 254 may be selectively moved between an unlock position in which the flange 254c abuts the flange 218d of the wall portion 218 of the frame 214 (illustrated in FIGS. 9 and 10), and a lock position in which the flange 254c is spaced apart from the flange 218d (FIGS. 11 and 12). An over-center spring 255 engages the frame 214 and the interior lock lever 254, urging the interior lock lever 254 from any position intermediate the lock and unlock positions toward the closer of the lock and unlock positions.

A first end of an interior lock fork 256 is provided with an aperture 256a. A mechanical fastener 257, such as a rivet, is rotatably received in the aperture 256a in the interior lock fork 256 and the aperture 254b in the interior lock lever 254 to pivotally join the interior lock fork 256 to the interior lock lever 254. A second end of the interior lock fork 256 is provided with two spaced apart, depending tines 256b and 256c.

The shaft 254c of the pin 245 extends upwardly through an aperture 212b formed in the actuator housing 212. An elastomeric o-ring 258 interposed between the actuator housing 212 and the shaft 254c provides a leak resistant seal therebetween.

A compound sector gear 259 is rotatably mounted on the shaft 254c above the actuator housing 212. The compound sector gear 259 includes a sector gear portion 259a and a spur gear portion 259b above the sector gear portion 259a. The compound sector gear 259 is formed of a suitable material, and is preferably molded of a polymeric material. A retainer clip 260 is removeably fixed about the upper end of the shaft 245c of the pin 245, thereby retaining the compound sector gear 259 on the shaft 245c. Additionally, the retainer clip 260 and the compound sector gear 259 cooperate with the pin 245 to secure the actuator housing 212 to the frame 214.

A shaft 262 is rotatably received in the aperture 216c, and extends upwardly from the base portion 216 of the frame 214. A disc-shaped index member 263 is rotatably mounted on the shaft 262. The index member 263 includes a rectangular boss 263a on the upper surface thereof. The index member 263 may be formed of any suitable material, such as a powdered metal.

The elongate link 210 is provided with a depending tab 210a at one end thereof and a hook 210b, opening toward the pawl 246, at the other end thereof. An axially extending, rectangular slot 210c is formed in the link 210 intermediate the tab 210a and the hook 210b. The link 210 is operatively coupled to both the pawl 246 and the actuator member 238. The link 210 may be selectively moved to a coupled and an uncoupled position. When the actuator 238 is in its unactuated position, and the link 210 is in the coupled position, the tab 210a engages a portion of the tab 238b on the upper surface of the actuator 238. The hook 210b on the opposite end of the link 210 engages the pin 250 on the pawl 246, the hook 210b being positioned abutting or slightly spaced apart from the pin 250.

The link 210 is coupled to the index member 263 with the boss 263a of the index member 263 being slidably received in the slot 210c of the link 210. The link 210 is thus keyed to the shaft 262, such that rotation of the shaft 262 about the axis thereof causes the link 210 to rotate therewith between the coupled and uncoupled positions. The link 210 may be moved radially relative to the shaft 262, and thus moved radially relative to the boss 263a of the index member 263.

An axially extending tab **210d** is formed at the end of the slot **210c** closest to the hook **210b**. A coil spring **264** is retained on the tab **210d** and compressed between the link **210** and the boss **263a** on the index member **263**. The spring **264** biases the link **210** to move the hook **210b** thereof away from the index member **263**.

The index member **263** is also coupled to a lock/unlock lever **265**. The boss **263a** of the index member **263** extends upwardly through the slot **210c** of the link **210** to be received in a rectangular aperture **265a** formed in the lock/unlock lever **265**. Thus rotation of the lock/unlock lever **265** will cause concurrent rotation of the index member **263** and the link **210**.

The lock/unlock lever **265** has two operating arms, **265b** and **265c**, extending outwardly from a central body portion containing the aperture **265a**. The arm **265b** is operatively coupled to the interior lock fork **256**. The arm **265b** may be selectively captured between the tines **256b** and **256c** formed on the interior lock fork **256**. When the arm **265b** is captured between the tines **256b** and **256c**, axial movement of the interior lock fork **256** against the arm **265b** will cause the lock/unlock lever **265** to rotate, causing the link **210** to rotate therewith.

The operating arm **265c** is similarly operatively coupled to an exterior lock fork **266**. A first end of the exterior lock fork **266** is provided with an aperture **266a**. The exterior lock actuating mechanism (such as a key cylinder, not shown) is operatively coupled to the exterior lock fork by means of the aperture **266a**. A second end of the exterior lock fork **266** is provided with two spaced apart, upright tines **266b** and **266c**. The operating arm **265c** is captured between the tines **266b** and **266c** such that axial movement of the exterior lock fork **266** will cause rotation of the lock/unlock lever **265**. Unlike the operating arm **265b**, which is selectively captured by the interior lock fork **256**, the operating arm **265c** remains captured by the exterior lock fork **266** in all operating positions of the lock/unlock lever **265**. The interior lock fork **256** and the exterior lock fork **266** are preferably formed of powdered metal.

A wave washer **267** coaxial with the shaft **262** is compressed between the upper surface of the lock/unlock lever **265** and the lower surface of the actuator housing **212**. The wave washer **267** urges the lock/unlock lever **265** and the link **210** downwardly on the index member **263**. The wave washer is preferably formed of a stainless steel.

The shaft **262** extends upwardly through an aperture **212c** in the actuator housing **212**. A seal **268** is provided to form a leak resistant seal between the shaft **262** and the actuator housing **212**. The seal **268** is preferably formed of an elastomeric material.

A generally wedge shaped output gear **269** is fixed to the upper end of the shaft **262** so as to be rotatable therewith. Thus the output gear **269** is coupled through the shaft **262** to the index member **263** and thus to the link **210**. The output gear **269** meshes with and is driven by the spur gear portion **259b** of the compound sector gear **259**.

A stepper motor **270** includes an output shaft **270a**. The motor **270** selectively rotates the shaft **270** to drive a pinion gear **272** fixed to the shaft **270a**. The pinion gear **272** meshes with and drives the sector gear portion **259a** of the compound sector gear **259**, and, through the compound sector gear **259**, drives the output gear **269** and the shaft **262** coupled thereto. Thus, the motor **270** is provided with a gear train which includes the pinion gear **272**, the compound sector gear **259** and the output gear **269**, by means of which the motor **270** may lock, unlock, and double lock the latch

assembly **201**. Stepper motors are available commercially from Johnson Electric North America, Inc., of Fairfield, Connecticut.

Stepper motors such as the motor **270** have a relatively high torque output compared to the small DC motors traditionally used in electrically operated lock mechanisms for latches, and therefore require less gear train torque amplification. With a reduction in the required gear train torque amplification, fewer gears may be needed to achieve the required torque for actuating the lock mechanism of the latch assembly **201**. This allows the latch assembly **201** to be made relatively more compactly. Additionally, with low gear train torque amplification, little effort is required to manually operate the lock mechanism because little effort is required to back drive the gear train and motor **270**.

The motor **270** is provided with a pair of mounting ears **270a** having apertures formed therethrough. The ears **270a** mate with a pair of mounting pins **212d** formed on the actuator housing **212**. The motor **270** is secured in position by heat staking, that is, heating and deforming the free ends of the mounting pins **212d** to form an enlarged head thereon, thereby securing the mounting ears **270a** of the motor **270** on the mounting pins **212d**.

An exterior release lever **274** is rotatably mounted on a pivot pin **276**, the pin **276** being fixed in the aperture **216d** of the frame **214**. The exterior release lever **274** is provided with an operating arm **274a**, which is adapted to be engaged by an exterior latch actuating mechanism (not shown) such as an exterior door handle. The exterior release lever **274** is also provided with a depending tab **274b**, which is operatively coupled with the actuator member **238**. The exterior release lever **274** may be selectively rotated from an unactuated position to an actuated position, thereby causing the tab **274b** thereon to engage the tab **238b** of the actuator member **238** and rotate the actuator member **238** from its unactuated position to its actuated position. A spring **278** engages both the exterior release lever **274** and the frame **214** to urge the exterior release lever **274** to rotate out of engagement with the actuator member **238**. The spring **278** is compressed when the exterior release lever **274** is rotated to drive the actuator member **238** to the actuated position.

The latch assembly **201** also includes an interior release lever **280**. The elongate interior release lever **280** includes a depending arm **280a** formed on the lower end of the lever body, a generally L-shaped notch **280b** formed in the upper edge of the lever body, and a mounting flange **280c** extending at right angles to the lever body. The mounting flange **280c** includes an aperture formed therethrough. A mounting pin **282** is rotatably fitted in the aperture through the mounting flange and fixed in the aperture **218a** in the wall portion **218** of the frame **214**. The interior release lever **280** is thereby pivotally mounted to the wall portion **218** of the frame **214**. The depending arm **280a** is adapted to engage the tab **238c** of the actuator member **238**. The interior release lever **280** may be selectively pivoted between an unactuated position and an actuated position to cause the actuator member **238** to correspondingly rotate between its unactuated and actuated positions.

The interior latch actuating mechanism may advantageously be embodied as a Bowden cable **284**, although those in the art will recognize that other conventional operating devices such as pivoting lever arms, operating rods, and wire cables may be used in place thereof. Indeed, those in the art will recognize that in certain applications, the exterior latch actuating mechanism and the interior latch actuating mechanism may advantageously be directly fixed to the actuator

member **238** without the intermediate levers **274** or **280**, respectively. The Bowden cable includes an outer sheath which terminates in and is fixed to the notch **218c** formed in the tab **218b** of the wall portion **218** of the frame **214**. The Bowden cable **284** includes a cable core **284a** which is slidable within the outer sheath, and which extends into the latch assembly **201**. A plurality of barrels are fixed to the cable core **284a** to operably couple the Bowden cable **284** to the interior lock lever **254** and the interior release lever **280** in a manner which will be described below. Each barrel includes a tubular portion having an outwardly extending circumferential flange at one end thereof.

A first barrel **284c** and a second barrel **284d** are fixed to cable core **284a** with the tubular portion thereof abutting. The tubular portions of the barrels **284c** and **284d** are slidably received in the slot **254d** in the flange **254c** of the interior lock lever **254**. A spring pack **284b** is disposed about the tubular portions of the barrels **284c** and **284d**, and interposed between the flange **254c** and the flange portion of the barrel **284c**.

A third barrel **284e** and a fourth barrel **284f** are similarly fixed to the cable core **284a** with abutting tubular portions. The tubular portions of the barrels **284e** and **284f** are slidably received in the slot **280b** in the interior release lever **280**. The flange portions of the barrels **284e** and **284f** thus cooperate to form a lost motion connection between the cable core **284a** and the interior release lever **280**.

A plurality of conventional dome switches **288** may be provided to provide indication of the position of the link **210**. Advantageously, the switches **288** will be mounted on the upper surface of the actuator housing **212**, and actuated by a conventional position arm (not shown) driven through the gear train between the motor **270** and the shaft **262** in a manner well known in the art. The motor **270** may be controlled utilizing the position indication provided by the switches **288**.

The motor **270** may be energized to drive the components of the latch assembly **201** to the unlocked, locked, and double locked conditions thereof, and the motor **270** deenergized when actuation of a switch **288** indicates that the latch assembly is unlocked, locked, or double locked, respectively. The motor **270** may be controlled in a manner well known for stepper motors to accelerate to a high speed in a first portion of operation, operate at a sustained high speed in a second portion of operation, and then decelerated to a stop at a desired position. It is believed that operation of the motor **270** in this manner reduces stress and wear in various components of the latch assembly **201**.

A cover **290** is provided to protect the motor **270**, the gear train driven thereby, and the other components mounted above the upper surface of the actuator housing **212**. An elastomeric seal **292** is compressed between the cover **290** and a peripheral wall **212e** extending upwardly from the actuator housing **212**. The seal **292** provides a leak-tight seal between the actuator housing **212** and the cover **290**. The cover **290** is secured to the actuator housing **212** by conventional means such as sonic welding, adhesive materials, or mechanical fasteners (not shown).

Referring now to FIGS. 9 through 12, the operation of the latch assembly **201** will now be explained. The operation of the latch assembly **201** is similar to that of the latch assembly **20** illustrated in FIGS. 1 through 5. FIG. 9 illustrates the latch assembly **201** in a latched and unlocked condition. The rotor **230** is oriented such that the notch **232** is generally perpendicular to the notch **224** in the frame **214**. The rotor **230** thus cooperates with the frame **214** to capture the striker bolt **226** at the inner end of the notch **224**.

The hook **248** on the pawl **246** is engaged with the retaining step **234** on the rotor **230**, thereby preventing the rotor **230** from pivoting to release the striker bolt **226**. The link **210** is illustrated in the coupled position, with the tab **210a** thereof engaging the tab **238b** of the actuator member **238**, and the hook **210b** on the other end of the link **210** engaging the pin **250** of the pawl **246**.

To unlatch the latch assembly **201**, the actuator member **238** must be rotated to the actuated position thereof (illustrated in FIG. 10). As the actuator member **238** is rotated to the actuated position, the actuator member **238** moves the link **210** rightward (radially relative to the shaft **262**), rotating the pawl **246** clockwise to the release position. Thus, the rotor **230** is freed to rotate to release the striker bolt **226** in a manner similar to that described for the latch assembly **20**. To rotate the actuator member **238** to the actuated position, the exterior release lever **274** may be rotated (utilizing the exterior latch actuating mechanism, which is not shown). Rotating the exterior release lever **274** to the actuated position causes the tab **274b** thereof to drive against the upwardly extending tab **238b** of the actuator member **238**. The tab **274b** thus urges the actuator member **238** to rotate to the actuated position thereof.

Alternatively, the latch assembly **201** may be unlatched from the interior of the vehicle by actuating an interior release handle (not shown) to operate the Bowden cable **284**, drawing the cable core **284a** to the right. Drawing the cable core **284a** to the right causes the flange of the barrel **284c** to urge the spring pack **284b** against the flange **254c** on the interior lock lever **254**. The flange **254c** bears against the flange **218d**, and further rightward motion of the cable core **284a** compresses the spring pack **284b**. As the spring pack **284b** is compressed, the flange of the barrel **284e** bears against the interior release lever **280**, causing the interior release lever **280** to pivot about the pin **282** to a release position. As the interior release lever **280** pivots to the release position thereof, the arm **280a** bears against the tab **238c** of the actuator member **238**, thereby causing the actuator member **238** to rotate to the actuated position thereof.

When the interior operating handle (not shown) is released, the spring pack **284b** expands, drawing the cable core **284a** to the left. The barrel **284f** bears against the interior release lever **280a**, returning the interior release lever **280a** to the unactuated position thereof, and permitting the actuator member **238** to return to the unactuated position thereof.

The latch assembly **201** may be locked from the interior of the vehicle, from the exterior of the vehicle, or electrically. As in the previously described embodiments, locking is accomplished by rotating the link **210** out of the unlocked position thereof, such that the tab **210a** thereof cannot be engaged by the tab **238b** of the actuator member **238**. Additionally, the hook **210b** is preferably disengaged from the pin **250** of the pawl **246** in the unlock position.

To lock the latch assembly **201** from the interior of the vehicle, interior locking mechanism (such as a sill button—not shown) is operated to cause the cable core **284a** of the Bowden cable **284** to move leftward. The movement of the cable core **284a** causes the barrel **284d** to urge the interior lock lever **254** to rotate from the unlock position thereof (FIG. 9) clockwise toward the lock position thereof (illustrated in FIGS. 11 and 12). During the first half of the movement of the interior lock lever **254**, the overcenter spring **255** (FIG. 8) is compressed, and opposes the motion of the interior lock lever **254**. As the interior lock lever **254**

passes the midpoint of travel between the unlock and the lock positions thereof, the overcenter spring 255 switches from opposing the motion of the interior lock lever 254 to aiding the motion as the overcenter spring 255 expands.

Movement of the interior lock lever 254 to the lock position causes the interior lock fork 256 to move axially, with the tine 256c engaging the arm 265b of the lock/unlock lever 265. The tine 256c thus urges the lock/unlock lever 265 to rotate to the lock position. As indicated above, the lock/unlock lever 265 is coupled to the link 210 for concurrent rotation therewith through the boss 263a of the index member 263. Movement of the lock/unlock lever 265 to the lock position thus causes the link 210 to rotate to the lock position. Additionally, the movement of the lock/unlock lever 265 causes the exterior lock fork 266 to reposition from the unlock position to the lock position thereof (FIG. 11).

To lock the latch assembly 201 from the exterior of the vehicle, the exterior lock mechanism (not shown) is operated to move the exterior lock fork 266 from the unlocked position to the locked position thereof. The tine 266c of the exterior lock fork 266 bears against the arm 265a of the lock/unlock lever 265 for the first portion of travel to the lock position. As the lock/unlock lever 265 is thereby rotated toward the lock position, the arm 265b bears against the tine 256b of the interior lock fork 256, thereby driving the interior lock lever 254 toward the lock position. At the midpoint of travel, the overcenter spring 255 begins to drive the latch assembly components toward the lock position as described above. Thus, in the locked position, the arms 265a and 265b of the lock/unlock lever 265 will be spaced apart from the respective tines 266c and 256b which the lock/unlock lever 265 engaged during the first portion of travel from the unlock to lock positions.

Finally, to lock the latch assembly 201 electrically, the motor 270 may be energized to rotate the output gear 269 to the lock position by driving the output gear 269 through the pinion gear 272 and the compound sector gear 259. Rotating the output gear 269 to the lock position drives the shaft 262, the index member 263, the link 210 and the lock/unlock lever 265 to the lock position. The arms 265b and 265c of the lock/unlock lever 265 bear against the tines of the interior and exterior lock forks, 256 and 266, respectively, moving the interior and exterior lock mechanism to their respective lock positions. Note that the action of the overcenter spring 255, acting through the interior lock fork 256, will hold the lock/unlock lever in the lock position. The overcenter spring 255 thus acts to prevent the latch assembly 201 from inadvertently moving to the unlock position, which might otherwise occur, for example, due to vibrations experienced by the latch assembly 201.

To unlock the latch assembly 201 from the interior of the vehicle, the Bowden cable 284 is operated to cause the cable core 284a to move rightward. The stop 284c drives the spring pack 284b against the flange 254c of the interior lock lever 254. The spring pack 284b does not significantly compress, but rather drives the interior lock lever 254 from the lock position toward the unlock position. The overcenter spring 255 will act to drive the interior lock lever 254 toward the unlock position during the last portion of movement toward the unlock position. The interior lock fork 256 in turn causes the lock/unlock lever 265 and the index member 263, and thus the link 210, to return to the unlock positions thereof. Additionally, the arm 265b of the lock/unlock lever 265 drives against the tine 266c of the exterior lock fork 266 to reposition the exterior lock fork 266 to the unlock position (FIGS. 9 and 10).

Unlocking may be accomplished from the exterior of the vehicle by operating the exterior lock mechanism to move the exterior lock fork 266 to the unlock position. The tine 266 thereof will engage the arm 265b of the lock/unlock lever 265, thus urging the lock/unlock lever 265 toward the unlock position. The lock/unlock lever 265 will in turn drive the interior lock lever 254 and the link 210 to their respective unlock positions. The overcenter spring 255 will act to drive the latch assembly 201 components toward the unlock position during the last portion of travel thereof.

Electrical unlocking of the latch assembly 201 may be accomplished by energizing the motor 270 to operate in the opposite direction from that during locking. The gear train of the motor 270 operates to rotate the shaft 262 counterclockwise to move the index member 263, the link 210 and the lock/unlock lever 265 to the unlock position. The motor 270 is then deenergized.

The latch assembly 201 may be placed in the double lock condition illustrated in FIG. 12 either electrically, by energizing the motor 270, or manually, by operating the exterior locking mechanism. To electrically move the link 210 to the double lock position, the motor 270 is energized to move in the same direction as that during locking, but the motor 270 is not deenergized in the lock position, but is rather allowed to drive gear train until the double lock position is reached. Similarly, when the exterior locking mechanism is used, the exterior lock fork 266 is moved axially in the same direction as that for locking, but is moved further. This causes the tine 266c, bearing against the arm 265a, to drive the lock/unlock lever 265 to the double lock position.

The double lock position is similar to the lock position, in that the tab 210a of the link 210 is disengaged from the tab 238b of the actuator member 238 such that rotation of the actuator member 238 to the actuated position will not move the link 210. The double lock position is unlike the lock position in that the arm 265b of the lock/unlock lever 265 is no longer captured between the tines 256b and 256c of the interior lock fork 256. The distance the exterior lock fork 266 is spaced from the shaft 262 is equal to the distance the interior lock fork 256 is spaced from the shaft 262. However, as indicated above, the lock/unlock lever 265, which pivots about the axis of the shaft 262, is provided with arms 265b and 265c of unequal length. This arrangement permits the longer arm 265a to remain engaged by the exterior lock fork 266 when the lock/unlock lever 265 is rotated to an angle in which the shorter arm 265b is disengaged from the interior lock fork 256. With the lock/unlock lever 265 thus disengaged from the interior lock fork 256, the interior lock mechanism cannot unlock the latch assembly 201. Either the motor 270 or the exterior lock mechanism, acting through the exterior lock fork 266, must be operated to place the latch assembly back into either the locked or unlocked conditions. In the locked and unlocked conditions, the lock/unlock lever 265 is again engaged by the interior lock fork 256.

Other methods are contemplated for placing the latch assembly of this invention into the double lock condition. For example, FIG. 13 illustrates a fourth embodiment of the latch assembly of this invention. Most of the structure of the latch assembly 301 is identical to that of the latch assembly 201 illustrated in FIGS. 8 through 12. Accordingly, like reference numbers are used to indicate similar components.

One of the components which differ between the two embodiments is an interior lock lever 354. The interior lock lever 354 is generally similar to the interior lock lever 254. However the arm 354d to which the interior lock fork 256

is coupled is longer on the interior lock lever 354 than the corresponding arm on the interior lock lever 254. Thus, the interior lock fork 256 will be spaced further from the shaft 262 in the latch assembly 301 than in the latch assembly 201. Furthermore, in the latch assembly 301, the interior lock fork 256 defines a first distance "A" from the shaft 262 which is greater than a second distance "B" defined between the exterior lock fork 366 and the shaft 262.

A lock/unlock lever 365, coupled to the index member 263 by the boss 263a, pivots with the shaft 262 about the axis of the shaft 262. The lock/unlock lever 365 has arms 365b and 365c of equal length, unlike the lock/unlock lever 265. The arm 365b may be selectively captured between the tines 256b and 256c of the interior lock fork 256. The arm 365c is captured between the tines 266b and 266c of the exterior lock fork 266 in all operating states of the latch assembly 301.

The exterior lock fork 266 may be operated to rotate the lock/unlock lever 365 to the double lock position illustrated in FIG. 13. While the exterior lock fork 266 remains engaged with the lock/unlock lever 365, the interior lock fork 256, being spaced further from the axis of rotation of the lock/unlock lever 365, is disengaged from the lock/unlock lever 365. Only the exterior lock fork 266 (and the motor 270 illustrated in FIGS. 8 through 12, operating through the shaft 262) can rotate the lock/unlock lever 365 to a position in which the arm 365b will be engaged by the interior lock fork 256. Thus, the interior lock mechanism is disabled in the double lock position.

FIGS. 14 through 17 illustrate a fifth embodiment of the latch assembly of this invention. As with the latch assembly 301 illustrated in FIG. 13, most of the structure of the latch assembly 401 illustrated in FIGS. 14 through 17 is identical to that of the latch assembly 201 illustrated in FIGS. 8 through 12, and like reference numbers are used to indicate similar components. In this embodiment, axial movement of a lock/unlock lever 465 relative to the shaft 262 provides a means for selectively uncoupling one of a pair of lock forks. The latch assembly 401 depicted therein is similar to the latch assembly 201 illustrated in FIGS. 8 through 12, and identical parts will be depicted utilizing the same reference numbers.

A first end of an interior lock fork 456 is provided with an aperture 456a. The mechanical fastener 257 is rotatably received in the aperture 456a in the interior lock fork 456 and the aperture 254b in the interior lock lever 254 to pivotally join the interior lock fork 456 to the interior lock lever 254. A second end of the interior lock fork 456 is provided with two spaced apart tines 456b and 456c. The tines 456b and 456c of the interior lock fork 456 extend upwardly, unlike the downwardly extending tines 256b and 256c of the interior lock fork 256 in the latch assembly 201. The tines 456b and 456c extend upwardly a distance "C" above the frame 214 within the latch assembly 401. As illustrated in FIG. 17, the tines 266b and 266c of the exterior lock fork 266 extend a distance "D" above the frame 214, the distance "D" being greater than the distance "C".

The lock/unlock lever 465, being coupled to the index member 263 by the boss 263a, pivots with the shaft 262 about the axis of the shaft 262. The lock/unlock lever 465 has arms 465b and 465c of equal length. As will be further explained below, the arm 465b may be selectively captured between the tines 456b and 456c of the interior lock fork 456. The arm 465c is captured between the tines 266b and 266c of the exterior lock fork 266 in all operating states of the latch assembly 401.

A spring or wave washer 467 is compressed between the lock/unlock lever 465 and the actuator housing 212, urging the lock/unlock lever 465 downwardly. Thus, the wave washer 467 tends to seat the arm 465b of the lock/unlock lever 465 between the tines 456b and 456c of the interior lock fork 456, and to seat the arm 465c of the lock/unlock lever 465 between the tines 266b and 266c of the exterior lock fork 266.

A pair of ramps 499 are fixed to the frame 214 on opposite sides of the shaft 262. The ramps 499 are inclined upwardly in a clockwise direction. The ramps 499 are spaced outwardly from the shaft 262 to engage the arms 465b and 465c of the lock/unlock lever 465 when the arms 465b and 465c are rotated over the ramps 499. Preferably the inclined surfaces of the ramps 499 describe a helix to permit maximum contact with the arms 465b and 465c, thereby spreading the load thereon and minimizing wear of the ramps 499.

In the unlocked condition illustrated in FIG. 14, the link 210 is positioned by the index member 263 in a coupled position. When the link 210 is in the coupled position, movement of the actuator member 238 to the actuated position will cause the link 210 to move the pawl 246 to its release position, unlatching the latch assembly 401. The arms 465b and 465c of the lock/unlock lever 465 are not aligned to engage the ramps 499. The arms 465b and 465c are engaged by their respective lock forks, 456 and 266. Therefore, the latch assembly 401 may be locked by operating the interior lock mechanism, through the interior lock fork 456, the exterior lock mechanism, through the exterior lock fork 266, or the motor 270, operating through the shaft 262 and the index member 263.

When the latch assembly 401 is in the lock condition, illustrated in FIG. 15, the link 210 is rotated to an uncoupled position in which the link 210 is disengaged from the actuator member 238. The arms 465b and 465c of the lock/unlock lever 465 abut the low end of the respective ramp 499. However, the arms 465b and 465c remain captured between the tines of the interior lock fork 456 and the exterior lock fork 266, respectively. Thus, any of the motor 270, the exterior locking mechanism, or the interior locking mechanism may be operated to unlock the latch assembly 401, returning the latch assembly to the unlock condition illustrated in FIG. 14.

The exterior lock mechanism, acting through the exterior lock fork 266, or the motor 270, acting through the shaft 262 and the index member 263, may be operated to place the latch assembly 401 in the double lock condition illustrated in FIGS. 16 and 17. As the lock/unlock lever 465 is thereby rotated clockwise from the lock position illustrated in FIG. 15 to the double lock position, the arms 465b and 465c engage the inclined upper surface of the respective ramp 499, and are cammed upwardly thereby. The lock/unlock lever 465 is driven upwardly relative to the interior lock fork 456 and the exterior lock fork 266 as the lock/unlock lever 465 is rotated clockwise. Thus the lock/unlock lever 465 is moved axially upwardly on the shaft 262, compressing the wave washer 467. The link 210 remains disengaged from the actuator member 238 when the latch assembly 401 is placed in the double lock condition.

In the double lock position, the lock/unlock lever 465 is positioned greater than the distance "C" from the frame 214, and the arm 465b of the lock/unlock lever 465 is positioned above the upper end of the tine 456b of the interior lock fork 456, as shown in FIG. 16. Thus, the lock/unlock lever 465 is disengaged from the interior lock fork 456, preventing the interior lock mechanism from repositioning the latch assem-

bly **401** to the lock or unlock positions. The overcenter spring **255** (FIG. **8**) will act to keep the interior lock lever **254** against the flange **218d** (FIGS. **9** and **10**). Thus, the interior lock fork **456** is maintained in the lock position while the lock/unlock lever **465** is in the double lock position.

The lock/unlock lever **465** is not positioned greater than the distance "D" from the frame **214**, and therefore the arm **465c** remains captured between the tines **266b** and **266c** of the exterior lock fork **266**. Either the exterior lock mechanism, operating through the exterior lock fork **266**, or the motor **270**, operating through the shaft **262** and the index member **263**, may be operated to rotate the lock/unlock lever **465** counterclockwise back to the lock position. As the lock/unlock lever **465** is thus rotated, the arm **465b** thereof will be moved from a position above the tine **456b** to a position in which the arm **465b** is captured between the tine **456b** and the tine **456c** of the interior lock fork **456**.

FIGS. **18** through **27** illustrate a sixth embodiment of the latch assembly of this invention, indicated generally at **501**. The latch assembly **501** is similar to the latch assembly **401** illustrated in FIGS. **14** through **17** in that a lock/unlock lever **465** moves axially relative to an index member **563** to selectively uncouple an interior lock fork **456**. In the sixth embodiment, however, movement of the lock/unlock lever **565** is downward to disengage the interior lock fork **556**, as opposed to the upward movement required in the fifth embodiment. Most of the structure of the latch assembly **501** is identical to that of the latch assembly **201** illustrated in FIGS. **8** through **12**, and like reference numbers are used to indicate similar components.

Among the components of the latch assembly **501** which are not identical to that of the latch assembly **201** is the frame **514** thereof. The frame **514** includes a base portion **516** and a wall portion **518** extending upwardly from one edge of the base portion **516**. The base portion **516** includes apertures to mount the stepped pins **228** and **245**, as well as an aperture **516a** to mount a pivot **562**. The frame **514** also includes the notch **224** for receiving the striker bolt **226**.

A first flange **518a** extends perpendicular to the wall portion **518**, over an edge of the base portion **516** of the frame **514**. A notch **518b** is formed in the upper edge of the flange **518a** which receives a Bowden cable **584**. Note that in this embodiment, the Bowden cable **584** is routed to act in the opposite direction from that of the Bowden cable **284** in the embodiment of the latch assembly **201** illustrated in FIGS. **8** through **12**. A second flange **518c** (illustrated in FIGS. **21** through **23**) extends perpendicular from the wall portion **518** toward the pin **245**. An L-shaped flange **518d** extends outwardly from the wall portion **518** over the base portion **516** of the frame **514**. A pivot **518e** fixed thereto pivotally mounts a key disk **580** of the exterior lock actuating mechanism, which will be further described below.

The actuator member **538** of the latch assembly **501** is formed with an aperture **538a**, by means of which the actuator member **538** is pivotally mounted on the pin **228**, above the flange **228a**. The actuator member **538** further includes a tab **538b** extending downwardly therefrom, by means of which the actuator member **538** is coupled to the link **510**. The actuator member **538** is provided with an upwardly extending second tab **538c** on the other side of the aperture **538a** from the first tab **538b**. A notch **538d** is formed in the upper edge of the second tab **538c** to receive the Bowden cable **584**.

A pawl **546** is pivotally mounted on the pin **228** between the flange **245a** and the base portion **516** of the frame **514**.

The pawl **546** includes a hook **548** formed on one end thereof extending toward the rotor **230**. An outwardly extending spur **550** is formed on the opposite end of the pawl **546** from the hook **548**. The pawl **546** is adapted to be pivoted between a blocking position, in which the hook **248** engages the retaining step **234** of the rotor **230**, and a release position, in which the hook **548** is disengaged from the retaining step **234**. A spring **552** engages the pawl **546** and the frame **514** to urge the pawl **546** to pivot counterclockwise from the release position to the blocking position.

It should be noted that the pawl **546** can also hold the rotor **230** in a secondary latch position. In the secondary latch position, the hook **548** engages the notch **232** rather than the retaining step **234**. The rotor **230** is held with the notch **232** generally out of alignment with the notch **224** in the frame **514**. Thus, with the latch assembly **501** in the secondary latch condition, the release of the striker bolt **226** is prevented even though the hook **548** of the pawl **546** does not engage the retaining step **234**. It will be appreciated that the other embodiments of the latch assembly of this invention are similarly provided with a secondary latch capability.

An elongate interior lock lever **554** includes a central aperture **554a** therethrough by means of which the interior lock lever **554** is pivotally mounted on the pin **245**. A first end of the interior lock lever **554** is provided with a second aperture **554b**, while the other end thereof is provided with an upwardly extending tab or flange **554c**. The flange **554c** extends longitudinally along the interior lock lever **554**. A generally L-shaped notch **554d** is formed in the upper edge of the flange **554c**. The interior lock lever **554** may be selectively moved between an unlock position in which the flange **554c** abuts the flange **518c** of the wall portion **518** of the frame **514**, and a lock position in which the flange **554c** is spaced apart from the flange **518c**. A tab **554e** extends laterally outward from the interior lock lever and is provided with an aperture. An over-center spring **555** engages the frame **514** and the aperture in the tab **554e** of the interior lock lever **554**, urging the interior lock lever **554** from any position intermediate the lock and unlock positions toward the closer of the lock and unlock positions.

The mechanical fastener **257** is rotatably received in the aperture **256a** in the interior lock fork **256** and the aperture **554b** in the interior lock lever **554** to pivotally join the interior lock fork **256** to the interior lock lever **554**. The tines **256b** and **256c** of the interior lock fork **256** are oriented to face downwardly.

As described above the pivot **562** is fixed in the aperture **516a**, and extends upwardly from the base portion **516** of the frame **514**. An elongate index member **563** includes an axially extending recess in the bottom portion thereof (not shown) into which the pivot **562** is received to rotatably mount the index member **563** on the pivot **562**. The index member **563** includes a rectangular body **563a** having a recess **563b** formed in a first lateral face thereof. A pair of flanges **563c** extend from the bottom of opposed second and third faces of the body **563a**. A shaft **563d** extends upwardly from the body **563a**. The shaft **563d** is generally cylindrical, but has a pair of flattened axially extending faces **563e** which are parallel with the second and third faces of the body **563a**. A semicircular boss **563f** is formed on the upper surface of the shaft **563d**. The index member **563** may be formed of any suitable material, such as a powdered metal.

The elongate link **510** has a first hook **510a** at one end thereof and a second hook **510b** at the other end thereof. The first hook is disposed to engage the depending tab **538b** of the actuator member **538**. The second hook is disposed to

engage the spur **550** on the pawl **546**. The hooks **510a** and **510b** preferably include respective upwardly extending tabs thereon to increase the contact area of the respective hook. An axially extending, rectangular slot **510c** is formed in the link **510** intermediate the hook **510a** and the hook **510b**. The link **510** is operatively coupled to both the pawl **546** and the actuator member **538** by the hooks **510b** and **510a**, respectively. The link **510** may be selectively moved to a coupled and an uncoupled position. When the actuator member **538** is in its unactuated position, and the link **510** is in the coupled position, the hook **510a** engages a portion of the tab **538b** of the actuator **538**. The hook **510b** on the opposite end of the link **510** engages the spur **550** on the pawl **546**, the hook **510b** being positioned abutting or slightly spaced apart from the spur **550**.

The shaft **563d** of the index member **563** is slidably received in the slot **510c** of the link **510**, with the flattened sides **563d** of the shaft **563** engaging the edges of the slot **510c** to key the rotation of the link **510** to the index member **563**. Thus the index member **563** may be selectively rotated about the longitudinal axis defined by the shaft **563d** to cause the link **510** to rotate therewith between the coupled and uncoupled positions. The link **510** may be moved radially relative to the shaft **563d**.

An axially extending tab **510d** is formed at the end of the slot **510c** closest to the hook **510b**. A coil spring **564** is retained on the tab **510d** and extends into the recess **563b** in the index member **563**. The spring **564** is compressed between the link **510** and the body **563a** of the index member **563**. The spring **564** biases the link **510** to move the hook **510b** thereof away from the index member **563**.

The corners of upper surface of the body **563a** may be staked or otherwise outwardly deformed to enable them to cooperate with the flanges **563c** to retain the link **510** therebetween. Another method for retaining the link **510** in position on the index member **563** is illustrated in FIG. 24. The index member **563** may be provided with a plurality of tabs **563g** extending outwardly from the second and third faces thereof, spaced upwardly from the flanges **563c**. A corresponding set of recesses **510e** are formed in the edges of the slot **510c**. By vertically aligning the tabs **563g** with the recesses **510e**, the link **510** can be lowered into operating position abutting the flanges **563c**. The link **510** can move radially relative to the index member, and when the recesses **510e** are not vertically aligned with the tabs **563g**, is retained between the tabs **563g** and the flanges **510c**. After the link **510** is placed in position against the flanges **510c** during assembly, the link **510** is moved radially to cause the tab **510d** at the end of the slot **510c** to move away from the index member **563**. The spring **564** can then be installed in the recess **563b** and over the tab **510d**. As illustrated in FIG. 24, when the link **510** is moved rightward relative to the index member **563**, the spring **564** will be fully compressed, blocking further movement, before the tabs **563g** and the recesses **510e** are vertically aligned. Thus inadvertent disengagement of the link **510** from the index member **563** during operation is prevented.

The index member **563** is also coupled to the lock/unlock lever **565**. The lock/unlock lever **565** is generally triangular in outline, and is provided with a generally hourglass shaped central opening **565a**. The shaft **563d** of the index member **563** extends upwardly through the opening **565a** in the lock/unlock lever **565**. As will be further explained below, the hour glass shape of the opening **565a** cooperates with the flattened faces **563e** of the shaft **563d** of the index member **563** to provide a lost motion connection between the index member **563** and the lock/unlock lever **565**. After lost

motion, rotation of the lock/unlock lever **565** will cause concurrent rotation of the index member **563** and the link **510**.

The lock/unlock lever **565** includes a first operating arm **565b**, which is operatively coupled to the interior lock fork **256**. The arm **565b** may be selectively captured between the tines **256b** and **256c** formed on the interior lock fork **256**. When the arm **565b** is captured between the tines **256b** and **256c**, axial movement of the interior lock fork **256** against the arm **565b** will cause the lock/unlock lever **565** to rotate, causing the link **510** to rotate therewith.

The lock/unlock lever **565** includes a second operating arm **565c** which is provided with an aperture therethrough. An exterior lock link **566** is pivotally received in the aperture in the arm **565c** to couple the lock/unlock lever **565** to the exterior lock actuating mechanism as will be described below. Axial movement of the exterior lock link **566** will cause rotation of the lock/unlock lever **565**. Unlike the interior lock fork **256**, which may be selectively disengaged from the arm **565b**, the exterior lock link **566** remains engaged with the arm **565c** in all operating positions of the lock/unlock lever **565**.

The opening **565a** is provided with a pair of opposed recesses **565d** extending into respective operating arms of the lock/unlock lever **565**. As will be further described below, the recesses **565d** allow the lock/unlock lever **565** to be remotely (electrically) positioned. The lock/unlock lever **565** may be suitably formed of stamped steel, while the interior lock fork **256** and the exterior lock link **566** are preferably formed of powdered metal.

A compression spring **567** extends about the shaft **563d** and is interposed between the body **563a** of the index member **563** and the lock/unlock lever **565**. The spring **567** urges the lock/unlock lever **565** upwardly toward an actuator housing **512**. The spring **567** is preferably formed of galvanized music wire, and wound as a volute or conical spring to prevent stacking of the coils thereof as the spring **567** is compressed.

The actuator housing **512** is formed of any suitable material, preferably a molded polymeric material. Among the differences between the actuator housing **512** and the actuator housing **212** is that the actuator housing **512** includes a vertically extending pivot **512a** fixed thereto for mounting a portion of the gear train of the latch assembly **501**. The pivot **512a** is preferably integrally molded with the actuator housing **512**.

The actuator housing **512** also has a cavity **512b** formed therein for rotatably mounting a key cylinder nut **576** of the external key cylinder. The key cylinder nut **576** is coupled to a first key lever **578** for rotation therewith by a pin **578a** extending outwardly from the first key lever **578** to engage the key cylinder nut **576**. The first key lever **578** has a crank arm **578b** which extends downwardly through an opening **512c** formed through the actuator housing **512**. A pin **578c** on the end of the crank arm **578b** engages a slot **580a** formed through the key disk **580**. As previously discussed, the key disk **580** is pivotally mounted on the pivot **518e** extending from the tab **518d** on the wall portion **518** of the frame **514**. The pivot **518e** extends through an aperture **580b** formed through the key disk **580** to pivotally mount the key disk **580**. The key disk **580** further includes a bow-tie-shaped aperture **580c**.

A second key lever **582** is pivotally mounted on the pin **228** above the actuator member **538**. The second key lever **582** includes a central aperture **582a** through which the pin **228** extends, a first arm **582b** on one end of the second key

lever **582** and a second arm **582c** on the other end thereof. The first arm **582b** initially extends upwardly, then outwardly to engage the aperture **580c** in the key disk **580**. The second arm **582c** is provided with an arcuate slot to which is pivotally engaged by the exterior lock link **566**. Rotary movement of the exterior key cylinder is transmitted through the exterior key cylinder nut **576** and the first key lever **578** to pivot the key disk **580** about the pivot **518e**. This movement of the key disk **580** causes pivotal movement of the second key lever **582**, which in turn causes axial movement of the exterior lock link **566**.

The shaft **563d** of the index member **563** extends upwardly through an aperture **512d** in the actuator housing **12**. As illustrated in FIGS. **19** and **20**, a pair of ramps **599** are formed on the bottom of the actuator housing **512** on opposite sides of the aperture **512d**. The ramps **599** include respective inclined portions **599a** and flat portions **599b**. The relative position of the ramps **599** above the plane of the lock/unlock lever **565** is illustrated in broken lines in FIGS. **21** through **23**. As will be further described below, the lock/unlock lever **565** may be selectively rotated toward the double lock position, causing it to engage the ramps **599**, forcing the lock/unlock lever **565** downward on the index member **563**, and disengaging the lock/unlock lever **565** from the interior lock fork **256**, as illustrated in FIG. **20**.

Above the actuator housing **512**, the shaft **563d** of the index member **563** extends upwardly through the central bore in a disk-shaped lock lever sleeve **570**. The circular central bore of the lock lever sleeve **570** permits the lock lever sleeve **570** to rotate freely about the shaft **563d**. A pair of opposed legs **570a**, spaced inwardly from the outer circumference of the lock lever sleeve **570**, depend from the lock lever sleeve **570** to engage the recesses **565d** formed in the lock/unlock lever **565**. The legs **570a** thus couple the lock/unlock lever **565** for rotation with the lock lever sleeve **570**. A seal **568** is provided to form a leak resistant seal between the outer circumference of the lower surface of the lock lever sleeve **570** and the actuator housing **512**. The seal **568** is preferably formed of an elastomeric material.

The lock lever sleeve **570** has a boss **570b** formed on the upper surface thereof. The boss **570b** serves to key the lock lever sleeve **570** to an output gear **569**. The output gear **569** has a recess **569a** formed in the lower surface thereof which mates with the boss **570b** to key the two components of the latch assembly **501** together. The boss **570b** and the recess **569a** preferably have mating pentagonal shapes, but those in the art will appreciate that other shapes will serve to key the lock lever sleeve **570** to the output gear **569** for rotation therewith. The boss **570b** is preferably press fit into the recess **569a** to fix the gear **569** to the lock lever sleeve **570**, but the gear **569** and the lock lever sleeve **570** may be jointed by other suitable methods, such as by an adhesive.

A compound gear **559** is rotatably mounted on the pivot **512a** fixed to the actuator housing **512**. The compound gear **559** includes a first gear portion **559a** and a second gear portion **559b** integrally formed with the first gear portion **559a**. The pinion gear **272** mounted on the output shaft **270a** of the motor **270** meshes with and drives the first gear portion **559a** of the compound gear **559**. The second gear portion **559b** of the compound gear **559** meshes with and drives the output gear **569**. The output gear **569** drives the lock lever sleeve **570** coupled thereto. Rotation of the lock lever sleeve **570** causes a corresponding rotation of the lock/unlock lever **565**, and, through a lost motion connection, cause the link **510** to be moved. Thus, the motor **270** is provided with a gear train which includes the pinion gear **272**, the compound gear **559** and the output gear **569**, by

means of which the motor **270** may lock, unlock, and double lock the latch assembly **501**.

An exterior release lever **574** is rotatably mounted on the pivot pin **276** which is fixed in an aperture in the frame **514**. The exterior release lever **574** is provided with an operating arm **574a**, which is adapted to be engaged by an exterior latch actuating mechanism (not shown) such as an exterior door handle. The exterior release lever **574** is also provided with a hook having an upright tab **574b**, which is operatively coupled with the actuator member **538**. The exterior release lever **574** may be selectively rotated from an unactuated position to an actuated position, thereby causing the tab **574b** thereon to engage the tab **538b** of the actuator member **538** and rotate the actuator member **538** from its unactuated position to its actuated position. The spring **278** engages both the exterior release lever **574** and the frame **514** to urge the exterior release lever **574** to rotate out of engagement with the actuator member **538**. The spring **278** is compressed when the exterior release lever **574** is rotated to drive the actuator member **538** to the actuated position.

The Bowden cable **584** of the interior latch actuating mechanism includes a cable core **584a** which is slidable within the outer sheath, and which extends into the latch assembly **501**. A plurality of barrels are fixed to the cable core **584a** to operably couple the Bowden cable **584** to the interior lock lever **554** and the interior release lever **580** in a manner which will be described below. Each barrel includes a tubular portion having an outwardly extending circumferential flange at one end thereof.

A first barrel **584c** and a second barrel **584d** are fixed to cable core **584a** with the tubular portion thereof abutting. The tubular portions of the barrels **584c** and **584d** are slidably received in the slot **584d** in the flange **554c** of the interior lock lever **554**. A spring back **584b** is disposed about the tubular portions of the barrels **584c** and **584d**, and interposed between the flange **554c** and the flange portion of the barrel **584c**.

A third barrel **584e** and a fourth barrel **584f** are similarly fixed to the cable core **584a** with abutting tubular portions. The tubular portions of the barrels **584e** and **584f** are slidably received in the notch **538d** formed in the tab **538c** of the actuator member **538**. The flange portions of the barrels **584e** and **584f** thus cooperate to form a lost motion connection between the cable core **584a** and the actuator member **538**.

A plurality of conventional dome switches **588** may be provided to provide indication of the position of the link **510**. Advantageously, the switches **588** will be mounted on a circuit board **587** which is secured to the upper surface of the actuator housing **512** by heat staked pins **512e**. The dome switches **588** are actuated by a position arm **591**. The position arm **591** is provided with a semicircular aperture at one end which is secured onto the boss **563f** on the upper end of the index member **563**. Since the index member **563** is in turn keyed to the link **510**, the position of the position arm **591** reflects the position of the link **510**. Note that the lost motion connection between the lock/unlock lever **565** and the lock lever sleeve **570** prevents the gears **559**, **569** or **272** from accurately reflecting the position of the link **510**.

The position arm **591** further includes a depending finger **591b** which bears against the switches **588** to actuate the switches **588**. Preferably, the position arm **591** is formed of a spring material to urge the finger **591b** downward against the switches **588**. A detent mask **589** is preferably fitted over the dome switches **588**. Conical apertures **589a** are formed through the detent mask **589** over respective ones of each of

the switches 588. The conical apertures 589a diverge upwardly to cam the finger 591b upwardly over the detent mask 589 as the finger 591b of the position arm 591 is moved from a position over one of the switches 588. The finger 591b is tapered downwardly to permit it to extend through an aperture 589a to actuate the respective switch 588. The finger 591b will engage the periphery of an aperture 589a to resist movement out of the aperture 589a. Thus a detent action is provided which will tend to hold the position arm 591, the index member 563 fixed thereto, and the link 510 keyed to the index member 563 in a desired position.

As illustrated in FIG. 27, the switches 588 are electrically connected to a central locking control module 598, as are the motors 270 in each of the latch assemblies 501 of the vehicle. The respective motor 270 of each latch assembly 501 may be controlled by the central locking control module 598 based on the position indication provided by the switches 588.

A cover 590 is provided to protect the motor 270, the gear train driven thereby, and the other components mounted above the upper surface of the actuator housing 512. An elastomeric seal 592 is compressed between the cover 590 and the actuator housing 512. The seal 592 provides a leak-tight seal between the actuator housing 512 and the cover 590. The cover 590 is secured to the actuator housing 512 by conventional means such as sonic welding, adhesive materials, or mechanical fasteners (not shown).

In the unlocked condition illustrated in FIG. 21, the link 510 is positioned by the index member 563 in a coupled position. When the link 510 is in the coupled position, movement of the actuator member 538 to the actuated position will cause the link 510 to move the pawl 546 to its release position, unlatching the latch assembly 501. The arms 565b and 565c of the lock/unlock lever 565 are not aligned to engage the ramps 599. The arms 565b and 565c are respectively engaged by the interior lock fork 256 and the exterior lock link 566. Therefore, the latch assembly 501 may be locked by operating the interior lock mechanism, through the interior lock fork 256, the exterior lock mechanism, through the exterior lock link 566, or the motor 270, operating through the index member 563.

When in the unlocked position illustrated in FIG. 21, the latch assembly 501 may be unlatched from the interior of the vehicle by actuating an interior release handle (not shown) to operate the Bowden cable 584, drawing the cable core 584a to the left. Drawing the cable core 284a to the left causes the barrel 584c to compress the spring pack 584b against the flange 554c on the interior lock lever 554. The flange 554c bears against the flange 518c, and further rightward motion of the cable core 584a compresses the spring pack 584b. As the spring pack 584b is compressed, the flange on the barrel 584f bears against the tab 538c of the actuator member 538, thereby causing the actuator member 538 to rotate to the actuated position thereof. When the interior operating handle (not shown) is released, the spring pack 584b expands, bearing against the flange of the barrel 584c and urging the cable core 584a to the right. The flange of the barrel 584e bears against the tab 538c of the actuator member 538 and cooperates with the spring 242 to return the actuator member 538 to the unactuated position thereof.

Alternatively, the latch assembly 501 may be unlatched from the exterior of the vehicle by actuating an exterior release handle (not shown) to operate the exterior release lever 574. Rotating the exterior release lever 574 counterclockwise causes the tab 574b to engage the tab 538b and

urge the actuator member 538 to rotate to the actuated position thereof.

To lock the latch assembly 501 from the interior of the vehicle, the interior locking mechanism (such as a sill button—not shown) may operated to cause the cable core 584a of the Bowden cable 284 to move rightward. The movement of the cable core 584a causes the barrel 584d to urge the interior lock lever 554 to rotate from the unlock position thereof, illustrated in FIG. 21, counterclockwise toward the lock position thereof (not illustrated). As the interior lock lever 554 moves, the interior lock fork urges the lock/unlock lever 565 to rotate clockwise.

Alternatively, the motor 270 may be energized to rotate clockwise. The pinion gear 272 will cause the compound gear 559 to rotate counterclockwise, which in turn will drive the output gear 559 clockwise. The clockwise motion of the output gear 559 will be transmitted to the lock lever sleeve 570, and the legs 570a thereof, engaging the recesses 565d of the lock/unlock lever 565, will cause the lock/unlock lever 565 to rotate clockwise.

The latch assembly 501 may also be locked from the exterior of the vehicle by actuating the key cylinder (only the key cylinder nut 576 thereof is shown) of the exterior lock actuating mechanism. As previously described, the key cylinder may be rotated to cause axial movement of the exterior lock link 566, and thus cause the lock/unlock lever 565 to rotate clockwise.

During the first portion of the clockwise motion of the lock/unlock lever 565, however caused, the rotary motion of the lock/unlock lever 565 is not transmitted to the index member 563. The rotary motion is therefore not transmitted to the link 510. When the edges of the aperture 565a of the lock/unlock lever 565 contact the flattened faces 563e of the index member 563, as illustrated in FIG. 22, the index member 563 and the link 510 begin to rotate with the lock/unlock lever 565. During the first portion of the movement of the interior lock lever 554, the overcenter spring 255 is compressed, and opposes the motion of the interior lock lever 554. After this first portion of movement of the interior lock lever 554, the overcenter spring 255 switches from opposing the motion of the interior lock lever 554 to aiding the motion as the overcenter spring 255 expands. The lost motion connection between the lock/unlock lever 565 and the index member 563 ensures that the overcenter spring 255 is urging the interior lock lever 554 toward the lock position thereof when the link 510 is in the lock position.

When the latch assembly 501 is in the lock condition, which is not illustrated, the link 510 is rotated to an uncoupled position in which the link 510 is disengaged from the actuator member 538. The arms 565b and 565c of the lock/unlock lever 565 lever about the low end of the respective ramp 599. However, the arm 565b remains captured by the tines of the interior lock fork 256 and the arm remains 565c coupled to the exterior lock link 566. Thus, any of the motor 270, the exterior lock actuating mechanism, or the interior lock actuating mechanism may be operated to unlock the latch assembly 501, returning the latch assembly to the unlock condition illustrated in FIG. 14.

To unlock the latch assembly 501 from the interior of the vehicle, the Bowden cable 584 may be operated to cause the cable core 584a to move rightward. The barrel 584c drives the spring pack 584b against the flange 554c of the interior lock lever 554. The spring pack 584b does not significantly compress, but rather drives the interior lock lever 554 from the lock position toward the unlock position. The overcenter spring 255 will act to drive the interior lock lever 554 toward

the unlock position during the last portion of movement toward the unlock position. The interior lock fork **256** in turn causes the lock/unlock lever **565** and the index member **563**, and thus the link **510**, to return to the unlock positions thereof. Additionally, the arm **565b** of the lock/unlock lever **565** drives the exterior lock link **566** to the unlock position.

The exterior lock mechanism, acting through the exterior lock link **566**, or the motor **270**, acting through the index member **563**, may be operated to place the latch assembly **501** in the double lock condition illustrated in FIGS. **20** and **23**. As the lock/unlock lever **565** is thereby rotated clockwise from the lock position to the double lock position, the arms **565b** and **565c** engage the inclined upper surface of the respective ramp **599**, and are cammed downwardly thereby. The lock/unlock lever **565** is driven downwardly relative to the interior lock fork **256** as the lock/unlock lever **465** is rotated clockwise, causing the arm **465b** thereof to move out from between the tines **256b** and **256c** thereof. As the lock/unlock lever **565** is moved axially downwardly on the shaft **563d** of the index member **563**, compressing the spring **567**. The exterior lock link **566** tilts to remain engaged with both the lock/unlock lever **465** and the second key lever **582**. The link **510** remains disengaged from the actuator member **538** when the latch assembly **501** is placed in the double lock condition.

Thus, the lock/unlock lever **565** is disengaged from the interior lock fork **256**, preventing the interior lock mechanism from repositioning the latch assembly **501** to the lock or unlock positions. The overcenter spring **255** will act to keep the interior lock lever **554**, and thus the interior lock fork **256**, in the lock position while the lock/unlock lever **565** is in the double lock position. The arm **565c** remains coupled to the second key lever **582** through the exterior lock link **566**. Either the exterior lock mechanism, operating through the exterior lock link **566**, or the motor **270**, operating through the index member **563**, may be operated to rotate the lock/unlock lever **565** counterclockwise back to the lock position. As the lock/unlock lever **565** is thus rotated, the arm **565b** thereof will be moved from a position below the tine **256c** to a position in which the arm **565b** is captured between the tine **256b** and the tine **256c** of the interior lock fork **256**.

The latch assembly **501** may be provided with a child safety lock feature, as illustrated in FIGS. **25** through **27**. A child safety lock feature prevents a vehicle door from being unlocked from the inside of the vehicle when the safety lock feature is activated. The frame **514** can be provided with an aperture **518f** and a laterally extending notch **518g** in the wall portion **518** thereof. A child safety lock lever **600** includes an aperture **600a** therethrough. A pivot **601** extends through the aperture **600a** and is fixed in the aperture **518f** through the wall portion **518** to rotatably mount the lever **600**. The lever **600** includes a tab **600b** extending over the base portion **516** of the frame **514**. A notch **600c** is formed in the lower edge of the tab **600b**. The lever **600** also includes a second tab **600d** which extends horizontally through the notch **518g** in the wall portion **518**.

As shown in FIG. **26**, the lever **600** may be selectively moved between a blocking position shown in solid lines, and a non-blocking position, shown in broken lines. In the blocking position, the notch **600c** is fitted over the Bowden cable **584** so that the tab **600b** is interposed between the flange of the barrel **584f** and the tab **538c** on the actuator member **538**. Thus, unlatching is prevented from the interior of the vehicle, since the barrel **584f** is prevented by the lever **600** from urging the actuator member **538** to the actuated position thereof. In the non-blocking position, the tab **600b**

is removed from between the flange of the barrel **584f** and the actuator member **538**, allowing normal unlatching of the latch assembly **501** from inside the vehicle.

The lever **600** may be moved by manually positioning the tab **600d**. Remote operation of the lever **600** may be provided as illustrated in FIG. **27**. A child safety lock actuator **602** may be coupled to the tab **600d** or other portion of the lever **600** and operated to selectively move the lever **600** between the blocking position and the non-blocking position. The actuator **602** may be any suitable remote actuator, such as an electric motor or solenoid. Preferably, the actuator **602** will be controlled by manipulating a child safety dashboard switch **603**. The switch **603** operates through the central locking control module **598** to control the actuator **602**.

Referring again to FIG. **18**, the latch assembly **501** is preferably provided with a deceleration bumper **605**. The bumper **605** extends between the actuator housing **512** and the frame **514**. The bumper **605** extends about the inner end of the notch **224** in the base portion **516** of the frame **514**. The striker bolt **226** will engage the bumper **605** when it reaches the inner end of the notch **224** and be relatively gently slowed to a stop thereby. The bumper **605** thus limits the stress and wear which might otherwise result if the striker bolt **226** were to directly strike stationary parts of the latch assembly **501**.

The preferred embodiment of the present invention, and exemplary alternate embodiments have been discussed in this application. However, various modifications of the present invention, and applications therefor, will be apparent to those of ordinary skill in the art after studying this application. Accordingly, such modifications and changes in application can be carried out without departing from the scope of the invention. For example, in the fifth embodiment, the latch assembly **401** may be modified such that the tines **456b** and **456c** of the interior lock fork **456** extend upwardly the distance "D" above the frame **214**. A portion of the arm **465b** of the lock/unlock lever **456** may be bent upwardly relative to the arm **465c**, thus causing the arm **465b** to disengage the interior lock fork **456** while the arm **456c** remains engaged with the exterior lock link **566** as the lock/unlock lever **465** is moved axially upwardly relative to the shaft **262**. Thus the latch assembly **401** may be modified to provide yet another method of selectively uncoupling the exterior locking mechanism from the lock of the latch assembly **401** in the double lock condition thereof.

FIGS. **28** through **32** illustrate another embodiment of the latch assembly of this invention. The latch assembly indicated generally at **701** is generally identical in structure to the latch assembly **201** illustrated in FIGS. **8** through **12**. The latch assembly **701** has a frame **714** which has an upstanding wall portion **718**. Formed on the wall portion **718** is an inwardly extending flange **718b** which has a notch **718c** formed therein, the purpose of which will be described below. Also formed on the upstanding wall portion **718** is an inwardly extending pivot pin **719**, a second inwardly extending pivot pin **720**, inwardly extending anchor pin **721**, and an inwardly extending stop **722**.

The latch assembly **701** also includes a housing **712** which fits over the frame **714** and the components mounted therein in a manner similar to the housing **212** in the latch assembly **201** described above. As seen in FIG. **28**, an actuator member **738** similar to actuator member **238** has a tab **738c** which extends upwardly through the housing **712**. Similarly, the latch assembly **701** has an interior lock lever **754** which is similar to the interior lock lever **254** described

above. A tab **754c** formed on the interior lock lever **754** extends upwardly through the housing **712**.

A bell crank lever **756** is pivotally mounted on the pivot pin **719** by means of a central bore **756a**. The bell crank lever **756**, has an axially extending lug **756b** shown in FIGS. **29** through **32**, which has a pair of opposed flattened sides. The lug **756b** extends toward the wall **718**. The bell crank lever **756** also is provided with a first retaining boss **756c**, a second retaining boss **756d**, and a radially outwardly extending arm **756e**, opposite the first retaining boss **756c**. The surface of the bell crank lever **756** most adjacent the wall **718** has a step **756f** formed therein such that the retaining boss **756c** is on a relatively thin portion of the bell crank lever **756** and the retaining boss **756d** is on a relatively thick portion of the bell crank lever **756**.

FIG. **29** is a view taken as a cross section through the lug **756** and the pivot pin **719**. As shown therein, a lost motion lever **760** is mounted for restricted pivotal movement about the lug **756b** of the bell crank lever **756**. The lost motion lever **760** has a central opening **760a** which is a generally hour glass shape opening. The constricted "waist" portion of the opening **760a** prevents continuous rotation of the lost motion lever about the flattened lug **756b**, such that the opening **760a** cooperates with the lug **756b** to form a lost motion connection between the lost motion lever **760** and the bell crank lever **756**. The lost motion lever **760** has a first arm **760b** which terminates in a cam surface **760c**. The lost motion lever **760** has a second arm **760d** which terminates in an inwardly extending tab **760e**.

An over-center spring **772** is fixed at one end to the second arm **760d** of the lost motion lever and at the other end thereof to the arm **756e** of the bell crank lever **756**. The over-center spring **772** acts under compression at all times.

The second arm **760d** of the lost motion lever **760** is urged against the stop **722** by a return spring **773**. The return spring **773** is fixed at one end to the tab **760e** of the lost motion lever **760**. The other end of the return spring **773** is fixed to the anchor pin **721**.

The latch assembly **701** has an interior release lever **780** pivotally mounted upon the wall **718**. The interior release lever **780** has a central opening **780a** through which the pivot pin **720** extends to pivotally mount the interior release lever **780** on the upstanding wall **718**. The interior release lever **780** has a first cam surface **780b** disposed adjacent the cam surface **760c** of the lost motion lever **760**. The interior release lever **780** has a second cam surface **780c** formed at the opposite end of the interior release lever **780** from the first cam surface **780b**. As shown in FIG. **29**, the cam surface **780** forms the bottom of a pocket **780d** which receives the first arm **760b** of the lost motion lever **760**. The two opposed sides of the pocket **780d** retain the first arm **760b** of the lost motion lever **760** therebetween, ensuring alignment of the cam surface **760c** of the lost motion lever **760** with the cam surface **780b** of the interior release lever **780**. For clarity of illustration, the pocket **780d** is not depicted in FIGS. **30** through **32**.

The second cam surface **780c** of the interior release lever **780** is disposed adjacent a tab **738c** on an actuator member **738**. The actuator member **738** is similar in function and operation to the actuator member **238**, and the tab **738c** corresponds with the second tab **238c**.

Referring to FIG. **30**, a Bowden cable **784** is fixed by the outer sheath thereof to the notch **718c** in the flange **718b** on the wall **718**. The inner cable of the Bowden cable **784** is fixed to the bell crank **756** by the retaining boss **756c**. The bell crank lever **756** is operatively coupled to the interior

lock lever **754** by a cable **787** which extends from the retaining boss **756d** on the bell crank **756** to the tab **754c** on the interior lock lever **754**. A spring pack **787a** is fixed to the cable **787** on the opposite side of the tab **754c** from the retaining boss **756d**.

FIG. **30** illustrates the latch assembly **701** in a locked condition. The inner cable of the Bowden cable **784** is fully extended causing the retaining boss **756c** to be in its lowermost position. The arm **756e** of the bell crank lever **756** is disposed above the centerline of the lost motion lever **760**. The return spring **773** holds the second arm **760d** of the lost motion lever **760** against the stop **722**. The spring pack **787a** is uncompressed and the interior lock lever **754** is in the lock position of the lost motion lever **760** against the stop **722**. With the interior lock lever **754** in the locked position the link (not shown) of the latch assembly **701** is moved to the uncoupled position, thereby locking the latch assembly **701**.

Referring now to FIG. **31**, the latch assembly **701** is shown therein in an unlocked position. The inner cable of the Bowden cable **784** is retracted slightly causing the retaining boss **756c** of the bell crank lever **756** to be urged upwardly, to rotate the bell crank lever **756** about the pivot pin **719**. Rotation of the bell crank lever **756** causes the retaining boss **756d** to pull the cable **787**, urging the spring pack **787a** against the tab **754c** of the interior lock lever **754**. The interior lock lever **754** is thereby urged to the unlocked position thereof. Rotation of the bell crank lever does not cause the lost motion lever **760** to rotate, owing to the hour glass shape of the central opening **760a** in the lost motion lever, which provides a lost motion connection between the interior operating handle (not shown) connected to the Bowden cable **784**, and the power operated components of the latch assembly **701**. This lost motion connection limits the force needed to manually operate the latch assembly **701**. During rotation of the bell crank lever **756**, the arm **756e** of the bell crank lever moves the centerline of the lost motion lever **760**. As the arm **756e** moves toward the centerline during the first part of this motion, the over-center spring **772** is compressed. After the arm **756e** passes over the centerline of the lost motion lever **760**, the over-center spring **772** acts to urge the arm **756e** to continue rotating in the same direction. This change in resistance to movement of the bell crank lever **756** is felt by the operator at the other end of the Bowden cable **784** as a distinct "snap", thereby letting the user know that the latch assembly **701** is now in an unlocked position. The lost motion lever **760** does not rotate, as stated above, and continues to be held against the stop **722** by the return spring **773**.

Referring now to FIG. **32**, the latch assembly **701** is shown in the unlocked/release position thereof. The inner cable of the Bowden cable **784** is fully retracted by the operator using the interior operating handle (not shown). The bell crank lever **756** is fully rotated with the retaining boss **756c** urging the cable spring pack **787a** against the tab **754c**, compressing the spring pack **787a**. The interior lock lever **754** remains in the unlocked position, with the spring pack **787** accommodating the additional movement of the cable **787**.

The continued rotation of the bell crank lever **756** from the unlocked position to the unlocked/release position causes the flat sides of the lug **756b** of the bell crank lever **756** to engage the constricted waist portions of the lost central opening **760a** of the lost motion lever **760**. This engagement of the lost motion lever **760** by the lug **756b** causes the lost motion lever **760** to rotate with the bell crank lever **756** in the direction of the arrow A. Rotation of the lost

motion lever **760** causes the second arm **760d** of the lost motion lever **760** to move away from the stop **722**, stretching the return spring **773**. The cam surface **760c** of the lost motion lever **760** engages the cam surface **780b** of the interior release lever **780**, and thereby urges the interior release lever **780** to pivot about the pivot pin **720** in the direction of the arrow B. The second cam surface **780c** of the interior release lever **780** consequently drives against the tab **738c** of the actuator member **738**, causing the actuator member **738** to rotate. Rotation of the actuator member **738**, moves the associated coupling link (not shown) of the latch assembly **701**, which was rotated into the coupled position thereof by movement of the interior lock lever **754** to the unlock position as described above. As with the previous embodiments, movement of the coupling link in the coupled position causes the pawl (not shown) to disengage the rotor (not shown), allowing the rotor to release the striker bolt (not shown).

When the operator releases the interior operating handle (not shown) at the other end of the Bowden cable **784**, the return spring **773** will act to rotate the lost motion lever back against the stop **722**. The lost motion lever will engage the lug **756b** of the bell crank lever **756** to rotate the bell crank lever back to the unlocked position illustrated in FIG. **31**, causing the interior cable of the Bowden cable **784** to extend partially outwardly. The interior release lever **780** is returned to its unpivoted position shown in FIG. **31** under the urging of the actuator member **738**, which is spring returned to an unactuated position.

Another embodiment of the latch assembly of this invention is indicated generally at **801**, and is illustrated in FIGS. **33** through **38**. The latch assembly **801** is generally similar to the latch assembly **501** described above, and like reference numbers are used to indicate similar components. For example, as shown in FIGS. **33** through **35**, and FIG. **38**, the latch assembly **801** is constructed on the frame **514**. The stepped pin **245** is fixed to the frame **514**. The pawl **546** is pivotally mounted on the pivot pin **245**, and is provided with a spur **550**.

In the latch assembly **801**, however, the link **510** is replaced with a generally similar link **810**, and the index member **563** is replaced by a generally similar index member **863**. The index member **863** is pivotally mounted on the pivot **562**. The link **810** can be rotated by the index member **863** between an uncoupled position, shown in FIG. **33**, and a coupled position, shown in FIGS. **34** and **35**, as in the previously described embodiments. The generally rectangular link **810** has a first hook **810a** at one end thereof, and a second hook **810b** at the other end thereof. The hook **810b** can engage the spur **550** on the pawl **546** when the link **810** is in the coupled position thereof. The link **810** has a central slot **810c** through which the index member **863** extends. The spring **564** (not shown for clarity) is disposed in the slot to urge the end of the link **810** with the hook **810b** away from the index member **863**.

The hook **810a** of the link **810** can be selectively coupled to an actuator member **838**. The actuator member **838** is coupled to the exterior latch actuating mechanism for selective operation thereby.

A path lever **865**, shown in detail in FIG. **36**, is mounted on the index member **863** above the link **810**, as seen in FIGS. **33** through **36**, and **38**. The path lever **865** has a first, hour glass-shaped opening **865a** formed through one end thereof. The index member **863** extends through the opening **865a**. The flattened sides of the index member **863** and the hour glass-shaped opening **865** cooperate to form a lost

motion connection between the index member **863** and the path lever **865**, the purpose of which is the same as the lost motion connection between the index member **563** and the lock/unlock lever **565** described above. The path lever **865** has a second, elongated oval opening **865b** at the other end of the path lever **865** from the opening **865a**. As shown in FIG. **36**, the major axis C of the oval opening **865b** extends at an angle to the axis D between the centers of the openings **865a** and **865b**, the purpose of which will be made clear below.

In the latch assembly **810**, the interior latch and lock operating mechanisms are coupled to the latch assembly through a lock/unlock lever **890**, shown in detail in FIG. **37**. The lock/unlock lever **890** has an annular body **890a** with a central opening **890b** there through. The lock/unlock lever **890** has a first arm **890c** with an upwardly (as viewed in FIG. **38**) extending tab **890d**. The tab **890d** is adapted to be connected to a Bowden cable (not shown) or other suitable operating member, so that the lock/unlock lever **890** can be selectively rotated thereby. The lock/unlock lever **890** has a central axis E extending along the arm **890c**.

Extending from the body **890a** is a first downwardly curved arm **890e**. The arm **890e** extends outwardly from the body **890a** at an angle to the axis E. As seen in FIG. **38**, the arm **890e** extends downwardly through the opening **865b** of the path lever **865** so as to couple the path lever **865** and the lock/unlock lever **890**. However, the arm **890e** does not extend down so far as to reach the plane of rotation of the pawl **546**. Thus, the lock/unlock lever **890** can pivot without the arm **890e** directly engaging the pawl **546**.

A second downwardly curved arm **890f** extends outwardly from the body **890a**. In one suitable arrangement, the downwardly extending portion of the arm **890f** cooperates with the center of the opening **890b** to define an axis F which extends at about a **20** degree angle to the axis E. The arm **890f** is longer than the arm **890e**, and extends downwardly to the plane of rotation of the link **810** and the pawl **546**, for a purpose which will be described below. The lock/unlock lever **890** is pivotally mounted on the pivot pin **245**, above the pawl **546**, with the pivot pin **245** extending through the central opening **890b**.

The latch assembly **801** is illustrated in a locked condition in FIG. **33**. The lock unlock lever **890** is in the locked position thereof. The arm **890f** of the lock/unlock lever **890** holds the path lever **865** in the lock position. The path lever **865**, acting through the index member **863**, holds the link **810** in the uncoupled position thereof. Of course, the index member **863** may be positioned to the lock position thereof to hold the link **810** in the uncoupled position thereof by other means such as an electric motor remote operator (not shown), such as that described above with respect to other similar embodiments of latch assemblies.

In FIG. **34**, the lock/unlock lever **890** has been rotated to the unlock position, and has driven the path lever **865** to the unlock position thereof. Note that the arm **890e** of the lock/unlock lever **890** moves from the radially outer end of the opening **865b** (as seen in FIG. **33**) to the radially inner end of the opening **865**. Thus the opening **865b** accommodates relative movement between the lock/unlock lever **890** and the path lever **865** during rotation thereof. As the path lever **865** rotates, the link **810** is urged thereby to the coupled position (after the initial lost motion of the connection between the index member **863** and the path lever **865**). In the coupled position the hook **810a** of the link **810** engages the actuator member **838**, and the hook **810b** of the link **801** engages the spur **550** of the pawl **545**. The long arm **890e** is

disposed adjacent the other side of the hook **810b**, such that the lock/unlock lever **890** is coupled to the spur **550** of the pawl **546** thereof through the hook **810b** of the link **810**. In this condition, the latch assembly **801** has been unlocked but the striker bolt (not shown) has not been released from the rotor (not shown).

In FIG. **35**, the Bowden cable or other operating member connected to the lock/unlock lever **890** is operated further to cause the lock/unlock lever **890** to rotate to the release position thereof. This causes the long arm **890e** of the lock/unlock lever **890** to press against the spur **550** of the pawl **546**, causing the pawl **546** to release the rotor (not shown) and allow the striker bolt (not shown) to move out of the slot **524** of the frame **514**. The components of the latch assembly **801** are returned from the position shown in FIG. **35** to the position shown in FIG. **34** by springs (not shown)

Of course the actuator member **838** could be operated in FIGS. **34** and **35** instead of the lock/unlock lever **890**. Operation of the actuator member **838** pulls the hook **810** link such that the hook **810b** drives into the spur **550** of the pawl **546**, unlatching the latch assembly **801**.

While the principle and mode of operation of the present invention have been explained and illustrated in its preferred embodiment, it must be understood that the present invention may be practiced otherwise than as specifically explained and illustrated without departing from its spirit or scope.

What is claimed is:

1. A vehicle door latch assembly adapted to be mounted to a vehicle structure to engage a striker bolt, comprising:
 - a pivotal rotor adapted in a first position to engage the striker bolt;
 - a pawl operatively coupled to said rotor and moveable between a blocking position retaining said rotor in said first position, and a release position permitting said rotor to move from said first position;
 - a link operatively coupled to said pawl and engaging said pawl in a coupled position, said link being selectively moveable between said coupled position and an uncoupled position in which said link is disengaged from said pawl;
 - a lever operatively coupled to said link to selectively move said link between said uncoupled position and said coupled position, said lever being further operatively coupled to said link such that, when said link is in said coupled position, said lever can be selectively operated to cause said link to move said pawl to said release position; and
 - an actuator member operatively coupled to said link and engaging said link when said link is in said coupled position, said actuator member being disengaged from said link when said link is in said uncoupled position, said actuator member being selectively moveable between an unactuated position and an actuated position in which said actuator member causes, when said link is in said coupled position, said link to move said pawl to said release position.
2. The latch assembly of claim **1**, including a detent operatively coupled to said link for selectively preventing movement of said link.
3. The latch assembly of claim **1**, including a motor operatively coupled to said link for moving said link between said coupled position and said uncoupled position.
4. The latch assembly of claim **1**, including a first lock operating mechanism coupled to said link to selectively

move said link between said uncoupled position, said coupled position, and a double lock position in which said actuator member and said pawl are uncoupled, the latch assembly further including a second lock operating mechanism which may be selectively coupled to said link to selectively move said link between said uncoupled position and said coupled position, said link being uncoupled from said second lock operating mechanism in said double lock position.

5. The latch assembly of claim **4**, including an index member coupled to said link for rotation therewith, said link being adapted to selectively move radially relative to said index member to move said pawl between said blocking position and said release position.

6. The latch assembly of claim **5** wherein said first lock operating mechanism and said second lock operating mechanism are coupled to said link through said index member.

7. The latch assembly of claim **1**, wherein said lever is a first lever, the latch assembly further including a second lever operatively coupling said first lever to said link with a lost motion connection.

8. The latch assembly of claim **7** wherein said lost motion connection is between said first lever and said second lever, said second lever being selectively driven by said first lever to move said link between said coupled position and said uncoupled position, said lost motion connection allowing said first lever to move between a first position relative to said second lever and a second position relative to said second lever, said latch assembly further including an over-center spring coupling said first lever and said second lever, said over-center spring urging said first lever to one of said first position and said second position relative to said second lever.

9. The latch assembly of claim **8** wherein said first lever is a bell crank lever having an attachment to an operating cable for selectively rotating said first lever.

10. The latch assembly of claim **9** wherein said first lever pivots about a generally cylindrical boss having a pair of flattened opposed sides, said boss extending through an hour glass-shaped opening in said second lever to provide a lost motion connection between said first lever and said second lever.

11. The latch assembly of claim **7** wherein said first lever includes a first arm engaging said second lever to provide a driving connection between said first lever and said second lever, said first lever further having a second arm, said first lever being selectively moveable to urge said second arm into contact with said link when said link is in said coupled position, thereby urging said link to move said pawl to said release position.

12. The latch assembly of claim **11** wherein said first lever is provided with an attachment to an operating cable for selectively rotating said first lever in a plane of rotation of said first lever, said second lever rotating to define a first plane of rotation, said pawl rotating to define a second plane of rotation, said first arm extending from said plane of rotation of said first lever to said first plane of rotation, said second arm extending from said plane of rotation of said first lever to said second plane of rotation.

13. The latch assembly of claim **1** wherein said lever is a first lever, said first lever including an arm, said first lever being selectively moveable to urge said arm into contact with said link when said link is in said coupled position, thereby urging said link to move said pawl to said release position.