



(22) Date de dépôt/Filing Date: 2015/08/28

(41) Mise à la disp. pub./Open to Public Insp.: 2016/03/03

(45) Date de délivrance/Issue Date: 2018/01/16

(30) Priorité/Priority: 2014/09/03 (ATA 676/2014)

(51) Cl.Int./Int.Cl. *F02N 11/08* (2006.01),
F02D 41/06 (2006.01), *F02N 11/10* (2006.01)


(72) Inventeurs/Inventors:
SCHAUMBERGER, HERBERT, AT;
SPYRA, NIKOLAUS, AT;
LOPEZ, FRANCISCO, AT

(73) Propriétaire/Owner:
GE JENBACHER GMBH & CO OG, AT

(74) Agent: CRAIG WILSON AND COMPANY

(54) Titre : METHODE DE DEMARRAGE D'UN MOTEUR A COMBUSTION INTERNE

(54) Title: METHOD OF STARTING AN INTERNAL COMBUSTION ENGINE

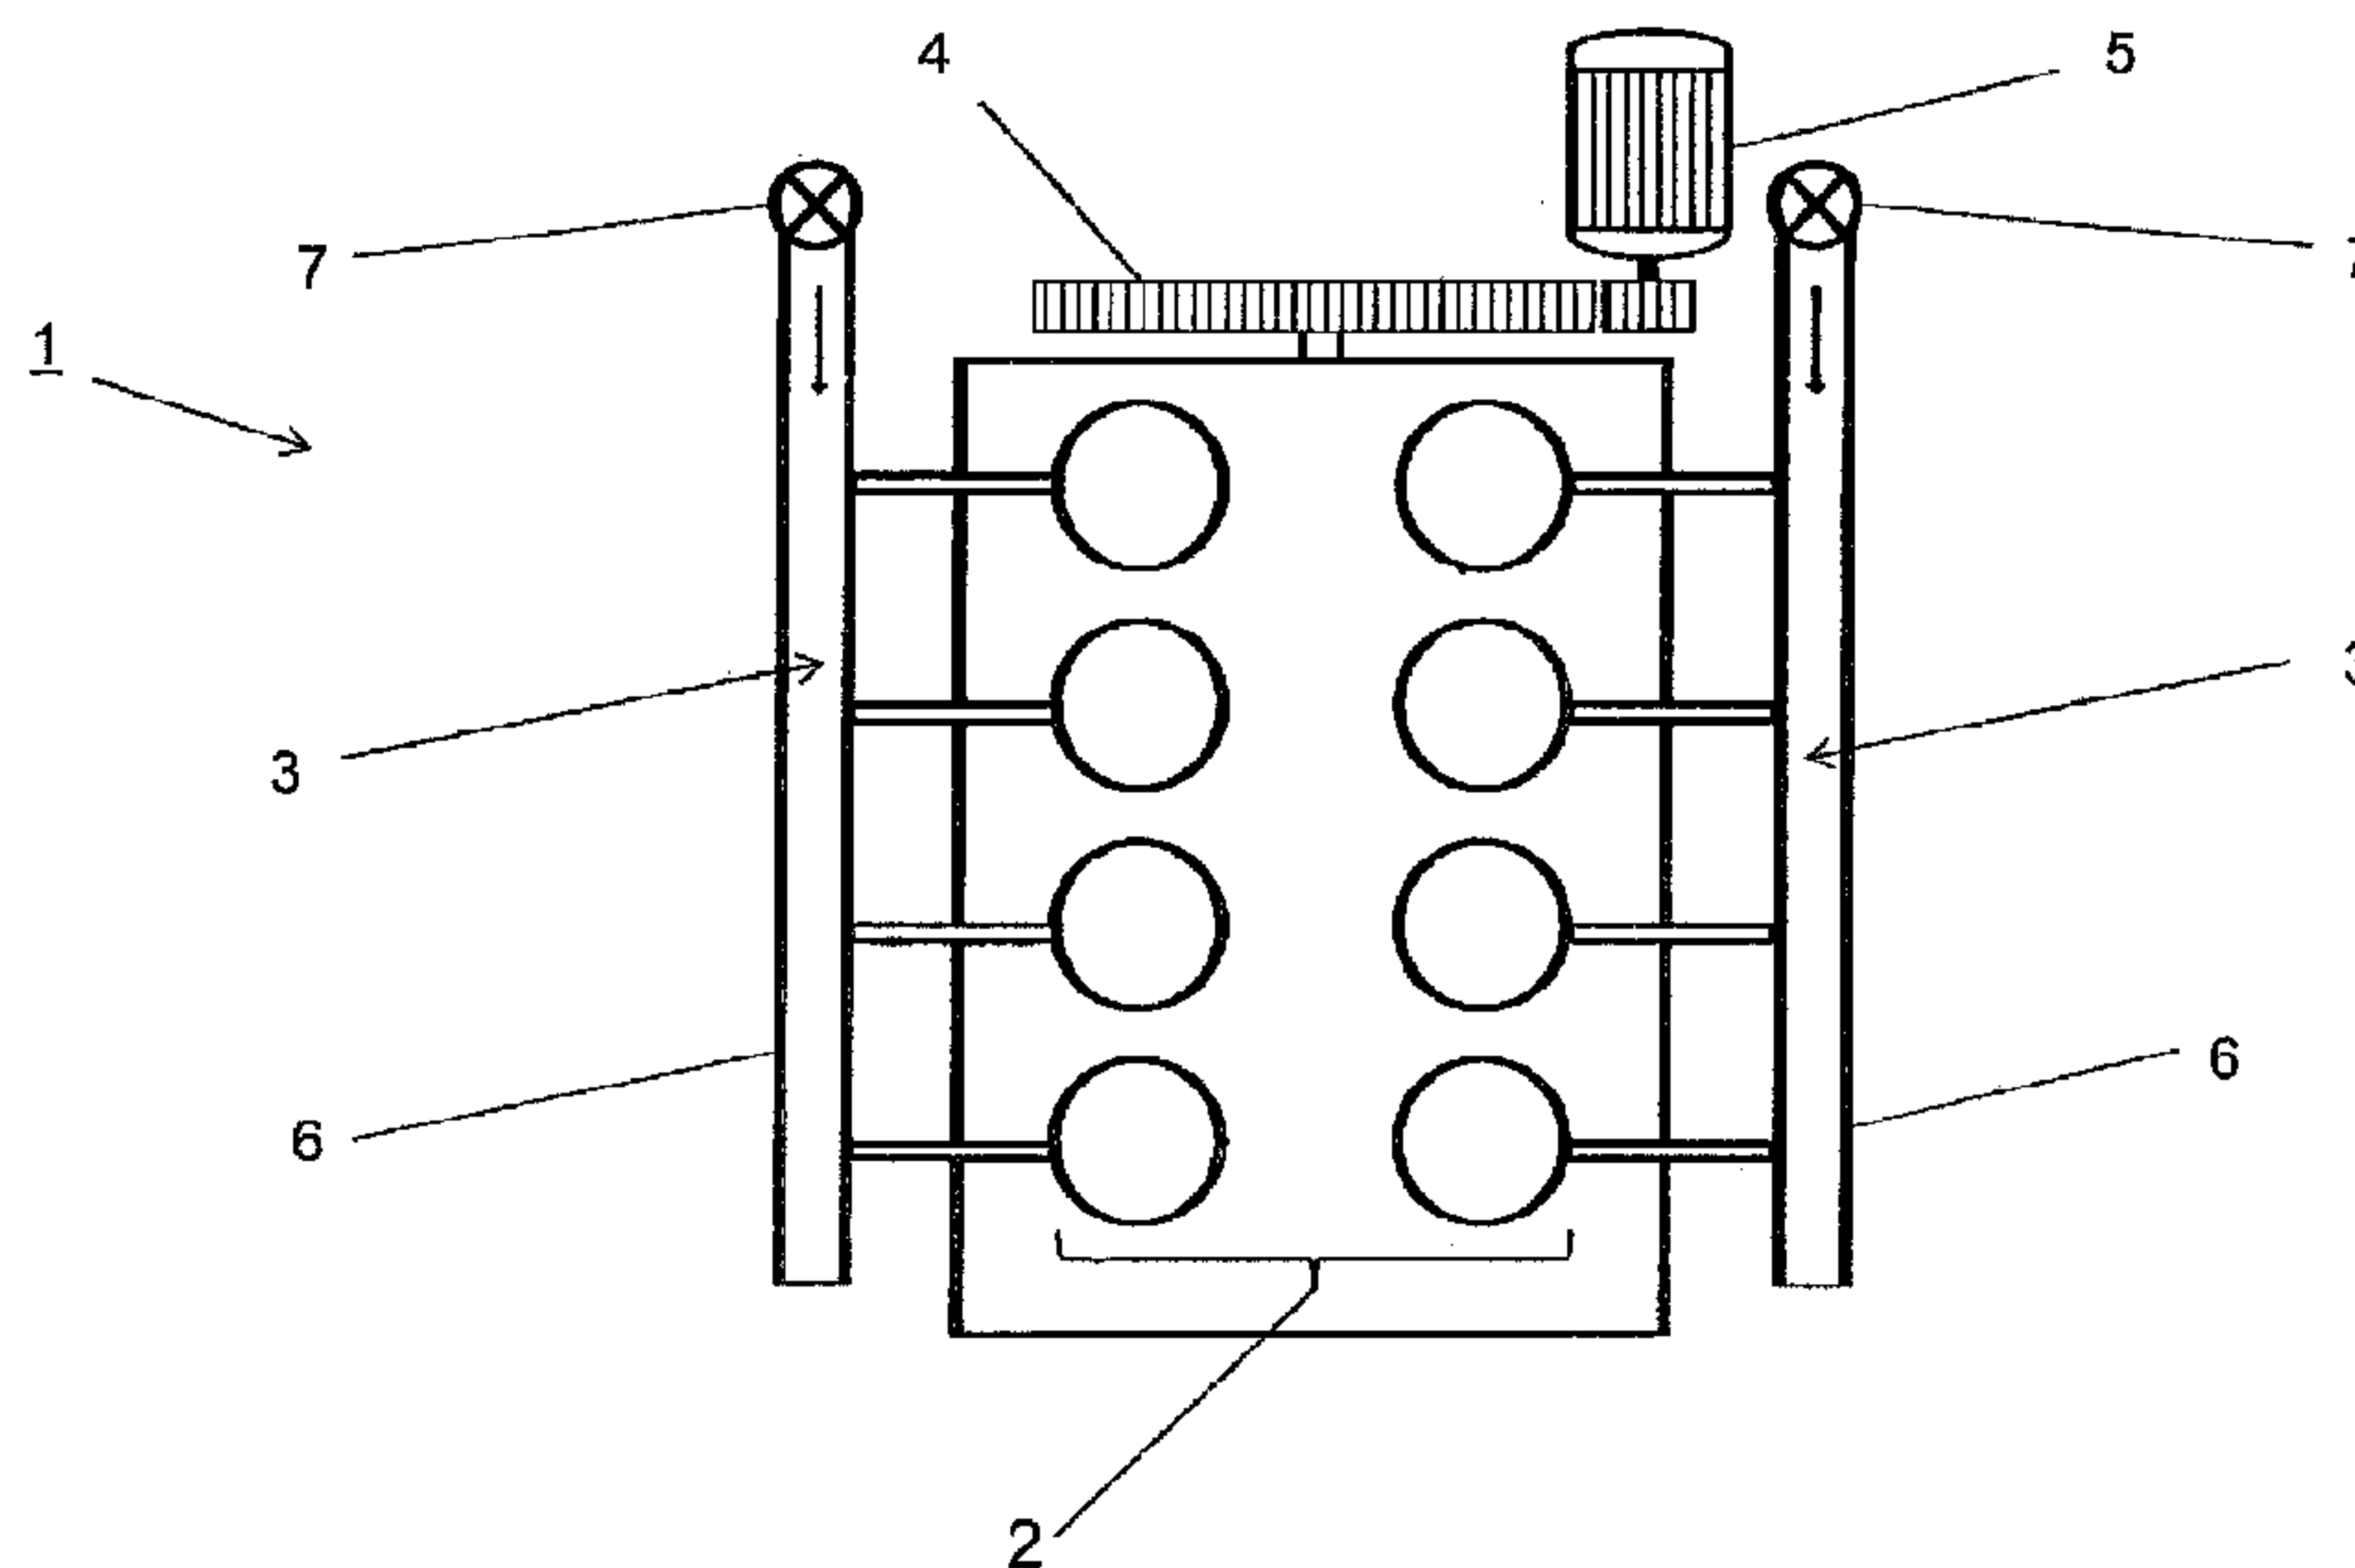

(57) Abrégé/Abstract:

A method of starting an internal combustion engine (1) which has a plurality of piston-cylinder units (2) wherein there are dead volumes (3) upstream of the piston-cylinder units (2), wherein upon an attempt at starting the internal combustion engine (1) the pistons are driven in the cylinders by an auxiliary motor (5), and wherein the maximum permissible duration of a starting attempt is restricted by a predetermined starting time (t s) of the internal combustion engine (1), wherein the starting time (t s) is calculated and predetermined prior to or at the beginning of a starting attempt of the internal combustion engine (1) in dependence on a state of the internal combustion engine (1) and/or the auxiliary motor (5).



Abstract

A method of starting an internal combustion engine (1) which has a
5 plurality of piston-cylinder units (2) wherein there are dead volumes (3)
upstream of the piston-cylinder units (2), wherein upon an attempt at
starting the internal combustion engine (1) the pistons are driven in the
cylinders by an auxiliary motor (5), and wherein the maximum permissible
duration of a starting attempt is restricted by a predetermined starting time
10 (t_s) of the internal combustion engine (1), wherein the starting time (t_s) is
calculated and predetermined prior to or at the beginning of a starting
attempt of the internal combustion engine (1) in dependence on a state of
the internal combustion engine (1) and/or the auxiliary motor (5).

15

(Figure 1)

Method of starting an internal combustion engine

Description

The invention concerns a method of starting an internal combustion engine.

5 Starting internal combustion engines, in particular stationary internal combustion engines, represents a high stress on the components involved. When starting an internal combustion engine generally a gear, the starter pinion, driven by an auxiliary motor, engages into a gear ring connected to the crankshaft of the internal combustion engine and accelerates the
10 internal combustion engine to a speed of revolution thereof, at which the engine can automatically run. The loading involved concerns the mechanical components and in particular the auxiliary motor. In the case of electric auxiliary motors these are the electric windings and the starter battery.

15 An aspect which is relevant to safety is that, during the starting procedure, combustible mixture is pumped into the exhaust manifold and thus the risk of flash fires increases with the duration of the starting procedure.

It is therefore usual for the above-indicated reasons for the maximum
20 permissible duration of a starting procedure to be restricted by a predetermined time.

A disadvantage with starting procedures according to the state of the art is that unsuccessful attempts at starting are frequent, that is to say attempts at starting which do not lead to the internal combustion engine
25 automatically running.

Some embodiments of the present invention provide a starting method by which the probability of succeeding with an attempt at starting is increased in comparison with the state of the art.

According to an aspect of the invention, the starting time is
30 calculated and predetermined prior to or at the beginning of a starting attempt of the internal combustion engine in dependence on a state of the internal combustion engine and/or the auxiliary motor provides that the probability of succeeding with an attempt at starting is markedly increased.

The expression success with an attempt at starting is used to mean that the internal combustion engine begins to run automatically due to the starting attempt.

5 In that way the mechanical and electrical components involved in the starting process may be less heavily stressed and achieve a longer service life than with starting methods in accordance with the state of the art as in the state of the art unsuccessful starting attempts occur more frequently than with the method according to the invention.

10 Therefore, taking account of a state of the internal combustion engine and/or the auxiliary motor for establishing the starting time provides for establishing a starting time which is adapted to the state of the internal combustion engine and/or the auxiliary motor.

15 The starting time corresponds to that time required until a combustible mixture is present in all cylinders. An excessively long starting time signifies an increased risk of flash fires as unburnt mixture escapes into the exhaust manifold. An excessively short starting time would have the consequence that not all cylinders are reached by ignitable mixture. In some embodiments, there may be a reduction of the flash fire risk, enhanced probability of success with the starting process and the reduced
20 loading on the auxiliary motor and possibly the batteries, which may increase the service life thereof.

It can preferably be provided that if the rotary speed of the internal combustion engine has not reached or exceeded the starting rotary speed after expiry of the starting time the starting attempt is broken off.

25 The starting rotary speed of the internal combustion engine is that speed at which the internal combustion engine begins at the earliest to run on its own.

A check is therefore made to ascertain whether, after the predetermined starting time is reached, the speed of the internal
30 combustion engine has also actually reached the starting speed. If the starting speed is not reached in the starting attempt being considered then that starting attempt is broken off. Breaking off the starting attempt signifies at least switching off the auxiliary motor. A further sensible

23739-654

3

measure when breaking off the starting attempt is to shut down the fuel feed devices like for example gas valves so that fuel does not continue to be sucked in and discharged unburnt.

5 It is preferably provided that the starting time is predetermined in dependence on the size of the dead volumes. The term dead volumes is used to mean those volumes which are present between the combustion chambers and a fuel metering device or mixing device arranged upstream of the combustion chambers.

10 During a starting process the dead volumes must be emptied by the pump action of the piston-cylinder units of the internal combustion engine until the cylinders are filled with combustible mixture. Before the majority of the piston-cylinder units are not filled with combustible mixture a starting process cannot be successful. Thus taking account of the size of the dead volumes in determining the starting time is a contribution to increasing the probability of succeeding with a starting attempt.

15 It can particularly preferably be provided that the starting time is predetermined

- in dependence on a rotary speed of the auxiliary motor and/or
- in dependence on the number of cylinders of the internal combustion engine and/or
- in dependence on the swept volume of the piston-cylinder units and/or
- in dependence on the volumetric efficiency of the internal combustion engine.

20 According to one aspect of the invention, there is provided a method of starting an internal combustion engine, which has a plurality of piston-cylinder units wherein there are dead volumes between a combustion chamber of the piston-cylinder units and a fuel metering device or a mixing device arranged upstream of the combustion chambers, wherein upon an attempt at starting the internal combustion engine the

25 pistons are driven in the cylinders by an auxiliary motor, and wherein a maximum

23739-654

3a

permissible duration of a starting attempt is restricted by a predetermined starting time (t_s) of the internal combustion engine, wherein the starting time (t_s) is calculated and predetermined prior to or at the beginning of the starting attempt of the internal combustion engine in dependence on at least one of a state of the internal

- 5 combustion engine, depending to the size of the dead volumes and the auxiliary motor and that if the rotary speed (n) of the internal combustion engine has not reached or exceeded the starting rotary speed (n_s) after expiry of the starting time (t_s) the starting attempt is broken off.

The invention is described in greater detail hereinafter with reference to the
10 Figures in which:

Figure 1 shows a diagrammatic view of an internal combustion engine with auxiliary motor,

Figure 2 shows a diagrammatic graph of rotary speed in relation to time during a starting process, and

15 Figure 3 shows the graphic representation of calculation of the starting time.

Figure 1 is a diagrammatic view showing an internal combustion engine 1 having a plurality of piston-cylinder units 2. The piston-cylinder units 2 of the internal combustion engine 1 are supplied with fuel-air mixture by way of the induction manifold 6. The flow of fuel-air mixture into the induction manifold 6 is symbolically indicated by arrows. The fuel feed device 7 meteredly supplies fuel.

The fuel feed device 7 can be for example a gas mixer, a metering valve or any other usual feed device for fuel.

Also shown is an auxiliary motor 5 (starter motor) connected to the crankshaft of the internal combustion engine 1 by way of the starter ring 4. The auxiliary motor 5 can be driven electrically or pneumatically. In the case of an electric drive starter batteries are usually provided as energy storage means, in the case of a pneumatic starter motor a compressed air storage means serves as the energy supply.

In the starting process a pinion of the auxiliary motor 5 engages into the starter ring 4 and accelerates the internal combustion engine 1 until it begins to run on its own. During the starting process the piston-cylinder units 2 demand gas or mixture from the induction manifold 6.

Those portions of the induction manifold 6, that are between the piston-cylinder units 2 and the fuel feed device 7, are referred in the present application as dead volumes 3. In a starting process, after metering of fuel by the fuel feed device, the dead volumes 3 first have to be flooded with fuel-air mixture before the fuel-air mixture reaches the piston-cylinder units 2.

The dead volumes 3 together with the throughput per revolution of the internal combustion engine 1 cause a delay in transport of the fuel-air mixture into the piston-cylinder units 2. The consequence of this is that, during a starting process, there is combustible mixture in the piston-cylinder units 2 only after a certain time. That time derives from the throughput of the piston-cylinder units 2, the rotary speed of the internal combustion engine 1, that is determined by the speed of the auxiliary motor 5, and the size of the dead volumes 3. A suitable measure in terms of describing the pump effect (throughput) of the piston-cylinder units is the

volumetric efficiency which specifies how much fresh charge is available in relation to the theoretically maximum possible filling after the conclusion of a charge exchange in the cylinder.

The higher the starting speed, the correspondingly more quickly are the dead volumes 3 pumped out. The greater the number of cylinders then the correspondingly quicker are the dead volumes 3 pumped out – with a given starting rotary speed. A larger swept volume of the piston-cylinder units 2 – with a given starting speed and a given number of cylinders – provides for the dead volumes 3 to be more quickly pumped out.

Figure 2 shows a graph of the rotary speed n of the internal combustion engine 1 on the Y-axis, plotted against time t on the X-axis. The graph shows a typical variation in rotary speed of the internal combustion engine 1 during a starting process. It will be seen therefore that, after acceleration of the internal combustion engine 1 by the auxiliary motor 5 to the maximum starter speed $n_{\max}$ (here for example 180 revolutions per minute) the starting process is performed until the starting speed n_s of the internal combustion engine 1 is reached.

The maximum starter speed $n_{\max}$ is determined by the power of the auxiliary motor 5, the charge condition of starter batteries (in the case of an electrical auxiliary motor), oil temperature and frictional conditions.

The starting speed n_s of the internal combustion engine 1 is that rotary speed at which the internal combustion engine 1 begins at the earliest to run on its own.

At time t_0 the auxiliary motor 5 has accelerated the internal combustion engine 1 to the maximum starter speed $n_{\max}$. The starting time t_s specifies how long the internal combustion engine 1 is held at $n_{\max}$ before it begins to run on its own and reaches the starting speed n_s .

The maximum starter speed $n_{\max}$ is that rotary speed of the internal combustion engine 1, at which the auxiliary motor 5 holds the internal combustion engine 1 during the starting process. As soon as the internal combustion engine 1 produces power of its own by combustion in the piston-cylinder units 2 the internal combustion engine 1 further accelerates.

When the internal combustion engine 1 reaches the starting speed n_s by virtue of combustion in the piston-cylinder units 2 the starter disengages.

Figures 3a and 3b show a graphic illustration of calculation of the starting time t_s in accordance with an embodiment.

5 For the purposes of terminology clarification it is emphasized that an internal combustion engine 1 is the generic term. That embraces different engine series which differ for example by virtue of different capacities of the piston-cylinder units 2. Within the engine series there are in turn various types which differ by the number of piston-cylinder units 2. An engine
10 series can therefore include engines with different numbers of cylinders, but the size (volume) of the individual piston-cylinder units 2 within an engine series is substantially the same.

Now firstly for an engine series which can include types with different numbers of cylinders, a reference starting time t_{ref} is ascertained for a type
15 with a given number of cylinders.

In the present example the reference starting time t_{ref} is determined for a type with 20 cylinders. In addition a starting time is determined for a type with a different number of cylinders, for example 12 cylinders. The starting time for the type with 12 cylinders is divided by the reference
20 starting time t_{ref} . The result of that division is the factor for taking account of the number of cylinders, being the factor $factor_{cyl}$.

That relationship is shown in graph form in Figure 3a. The graph of Figure 3a plots the number of cylinders N_{cyl} in relation to the starting time t_s . It will be seen that the engine with 20 cylinders has a shorter starting
25 time, t_{s_20} , than the engine with 12 cylinders, t_{s_12} .

The factor $factor_{cyl}$ therefore reproduces the above-discussed relationship, that with the same rotary speed the dead volumes 3 are pumped out more quickly with a larger number of cylinders.

In the illustrated example, the starting time ascertained for the type
30 with 12 cylinders was 1.27 times as long as for the type with 20 cylinders, that is to say in this specific example the $factor_{cyl}$ is 1.27. The factor $factor_{cyl}$ can naturally assume a different value for other engine series.

Furthermore the influence of the starting speed is taken into consideration, by way of a second factor. That is shown in graph form in Figure 3b. To determine the factor for taking account of the starting rotary speed two starting procedures are performed on the same engine with a different starting speed. With a higher starting speed a shorter starting time is achieved.

In Figure 3b the maximum starter speed $n_{\max}$ is plotted in relation to the starting time t_s . It will be seen that, with a higher starter speed n_1 a shorter starting time t_{s_n1} is achieved, than for the lower starter speed s_2 with which the starting time is t_{s_n2} .

The ratio of the starting time for the lower starting speed by the starting time for the higher starting speed gives the factor for taking account of the starting speed, $\text{factor}_{n_{\max}}$. That reproduces the above-discussed relationship whereby the dead volumes 3 are more rapidly pumped out at a higher speed of revolution.

The maximum permissible required starting time $t_{\max}$ for a selected internal combustion engine 1 is now calculated with the following formula:

$$t_{\max} = t_{\text{ref}} \cdot \text{factor}_{\text{cyl}} \cdot \text{factor}_{n_{\max}}$$

Once the relationship between the number of cylinders or the maximum starter speed is known by a reference measurement it is possible to calculate for any number of cylinders and starting speeds with the factors $\text{factor}_{\text{cyl}}$ and $\text{factor}_{n_{\max}}$ within an engine series.

In accordance with a variant the starting time can be calculated by way of the following formula.

The volume flow from the induction manifold 6 to the piston-cylinder units 2 is identified by V'_{zyl} and has m^3/s as its unit. The volume flow V'_{zyl} results as the product from:

$$V'_{\text{zyl}} = 1/2 * n_{\max} * N_{\text{zyl}} * \lambda_L$$

with $n_{\max}$ as the maximum starter speed, N_{zyl} as the number of cylinders, V_{zyl} as the swept volume of a cylinder and λ_L as the ratio of the real and theoretical gas exchange of a cylinder (volumetric efficiency). The formula therefore reproduces the volume flow that the piston-cylinder units

2 require at a speed of revolution of $n_{\max}$ from the induction manifold. These are parameters which are known for a type of engine.

The volumetric efficiency λ_L specifies how much fresh charge is available in relation to the theoretically maximum possible filling after the
5 conclusion of a charge exchange in the cylinder. It will be appreciated that a larger swept volume provides a greater pump action and thus a greater volume flow V'_{zyl} .

The starting time t_s can now be calculated as follows:

$$t_s = V_{\text{intake}} / V'_{\text{zyl}}$$

10 with V_{intake} being the spatial content of the dead volumes 3 in m^3 .

List of references used:

	1	internal combustion engine
	2	piston-cylinder units
5	3	dead volumes
	4	starter ring
	5	auxiliary motor
	6	induction manifold
	7	fuel feed device
10	$\text{factor}_{n_{\max}}$	factor for taking account of the starting speed
	$\text{factor}_{\text{cyl}}$	factor for taking account of the number of cylinders
	$t_{\max}$	maximum permissible required starting time
	t_s	starting time
	$n_{\max}$	maximum starter speed
15	n_s	starting speed
	N_{zyl}	number of cylinders
	V_{intake}	spatial content of the dead volumes 3 in m^3
	λ_L	ratio of real and theoretical gas exchange of a cylinder (volumetric efficiency)

23739-654

10

CLAIMS:

1. A method of starting an internal combustion engine, which has a plurality of piston-cylinder units wherein there are dead volumes between a combustion chamber of the piston-cylinder units and a fuel metering device or a
5 mixing device arranged upstream of the combustion chambers,

wherein upon an attempt at starting the internal combustion engine the pistons are driven in the cylinders by an auxiliary motor, and

wherein a maximum permissible duration of a starting attempt is restricted by a predetermined starting time (t_s) of the internal combustion engine,
10 wherein the starting time (t_s) is calculated and predetermined prior to or at the beginning of the starting attempt of the internal combustion engine in dependence on at least one of a state of the internal combustion engine, depending to the size of the dead volumes and the auxiliary motor and that if the rotary speed (n) of the internal combustion engine has not reached or exceeded the starting rotary
15 speed (n_s) after expiry of the starting time (t_s) the starting attempt is broken off.
2. A method as set forth in claim 1 wherein a starting time (t_s) is predetermined in dependence on a rotary speed of the auxiliary motor.
3. A method as set forth in claim 1 or 2 wherein the starting time (t_s) is predetermined in dependence on a number of cylinders (N_{zyl}) of the internal
20 combustion engine.
4. A method as set forth in any one of claims 1 to 3 wherein the starting time (t_s) is predetermined in dependence on a swept volume (V_{zyl}) of the piston-cylinder units of the internal combustion engine.

23739-654

11

5. A method as set forth in any one of claims 1 to 4 wherein the starting time (t_s) is predetermined in dependence on a volumetric efficiency (λ_L) of the internal combustion engine.

Fig. 1

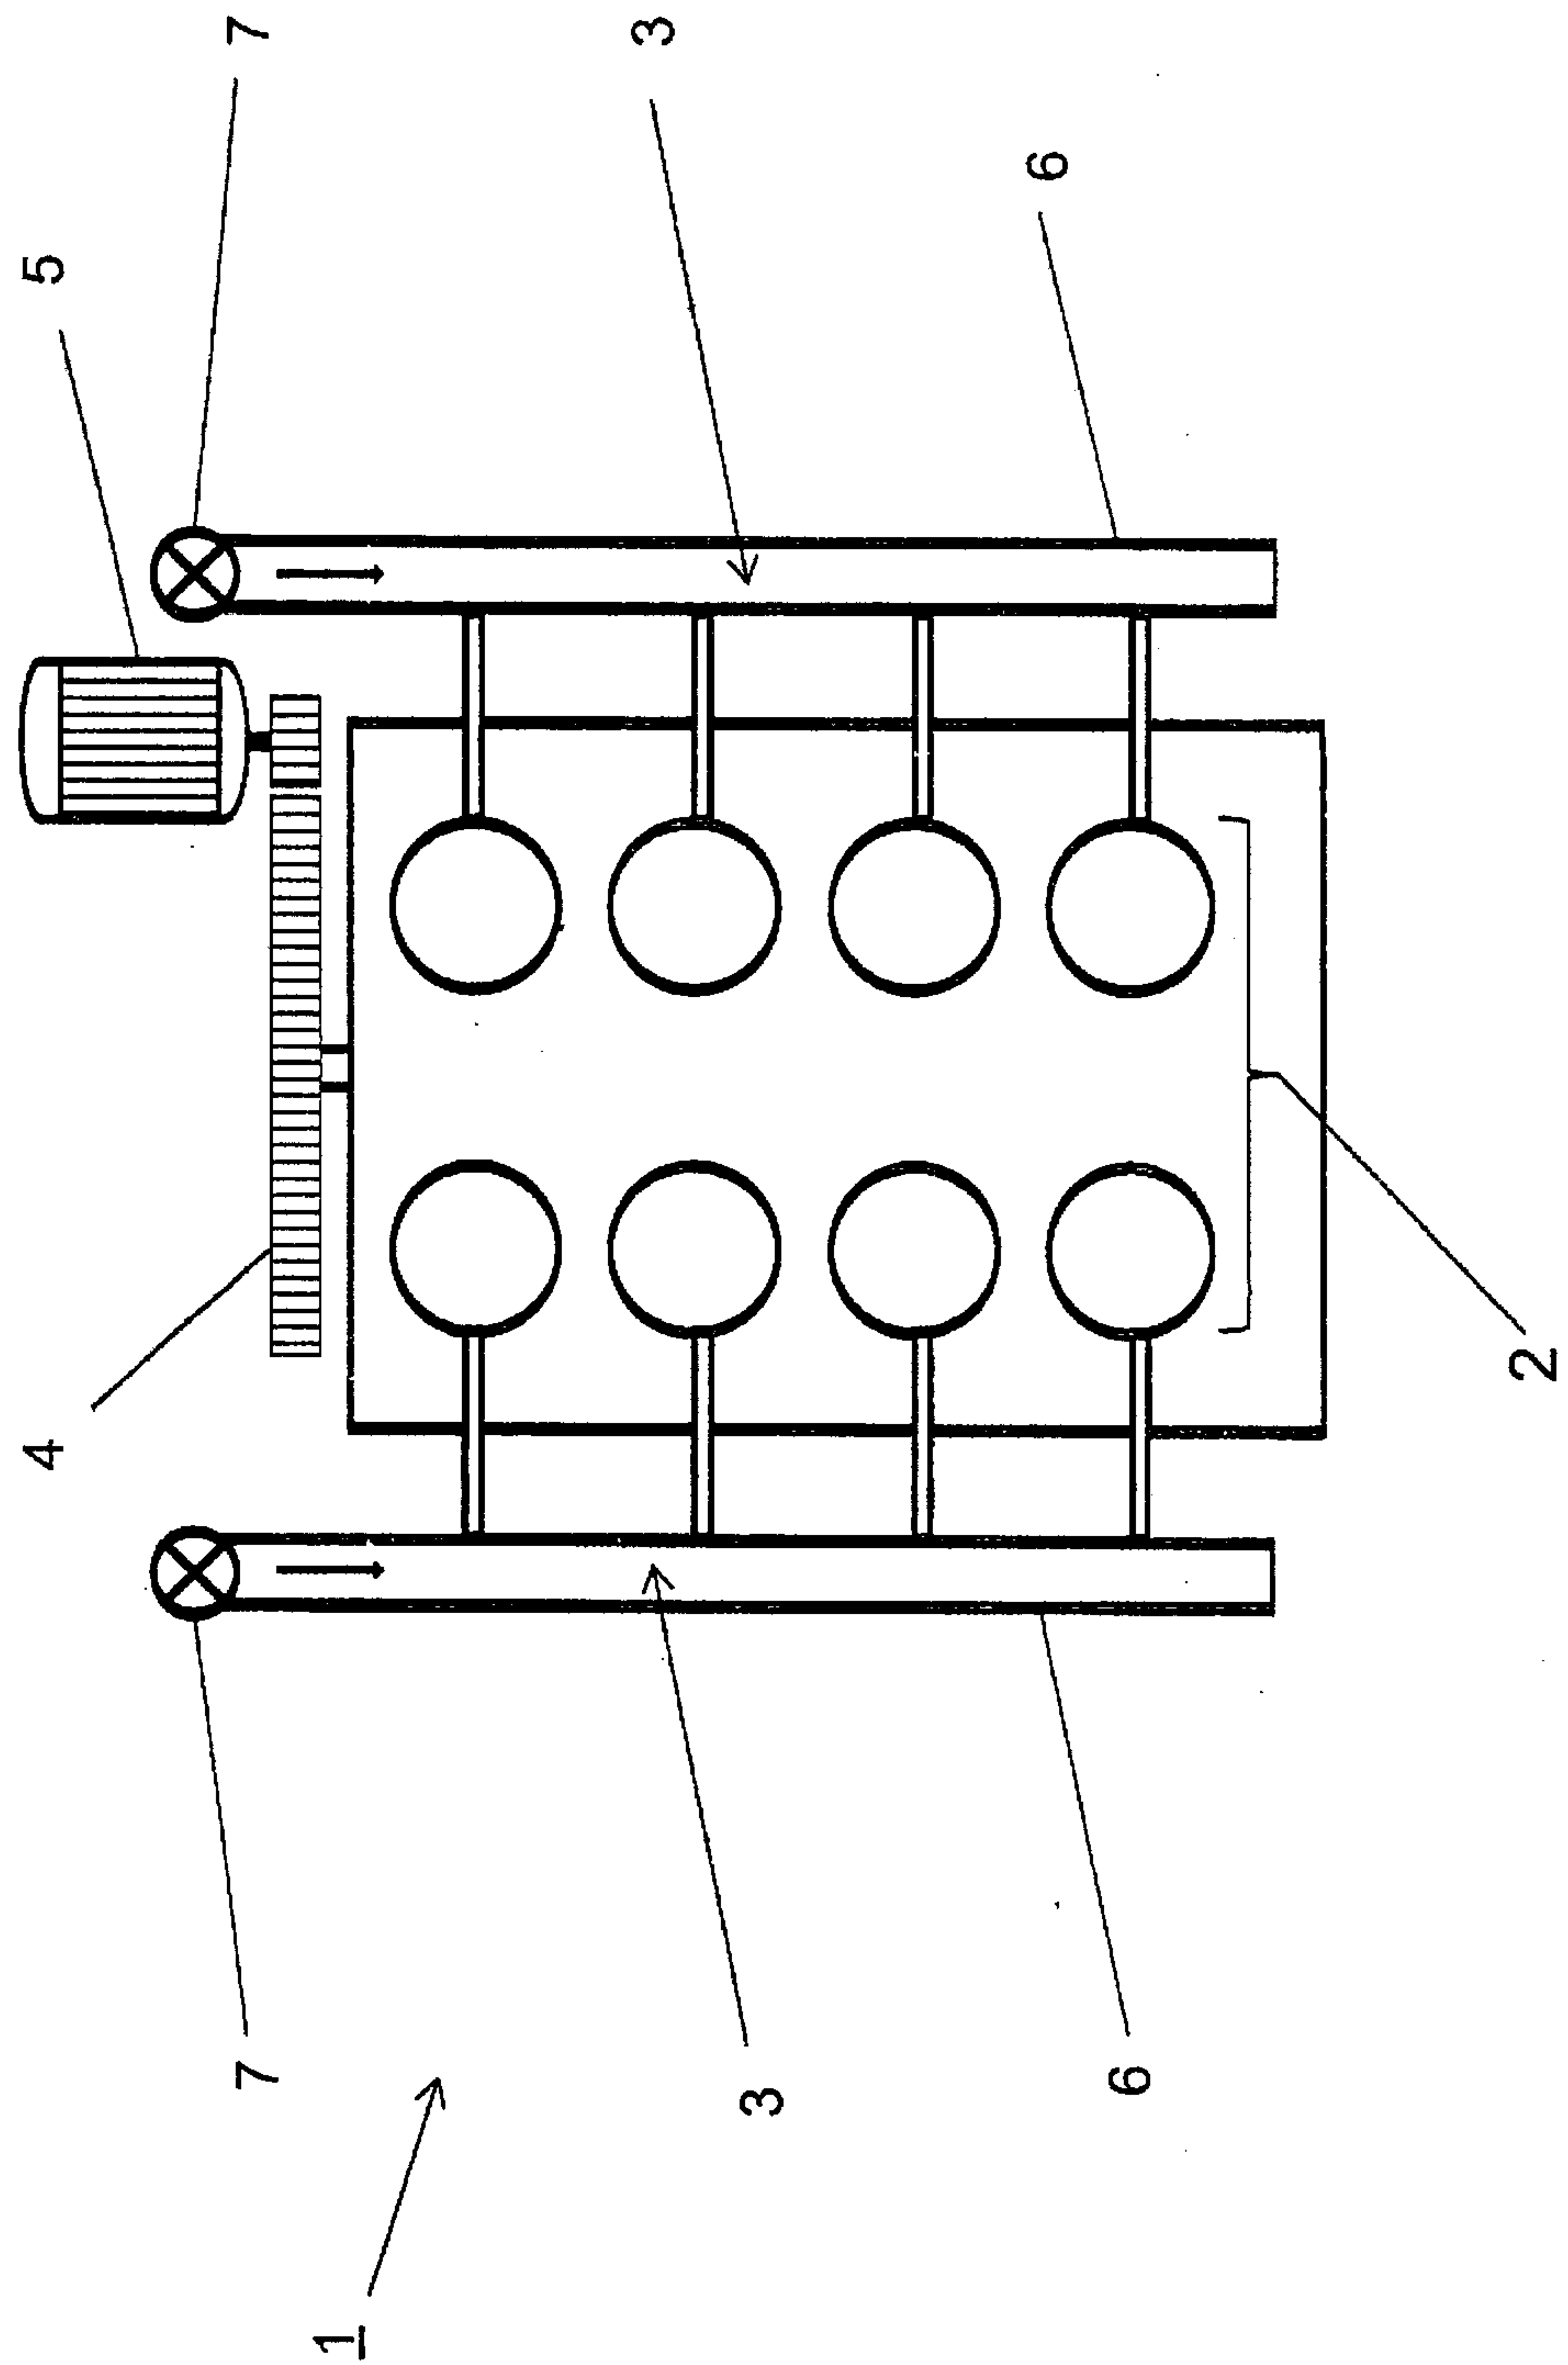


Fig. 2

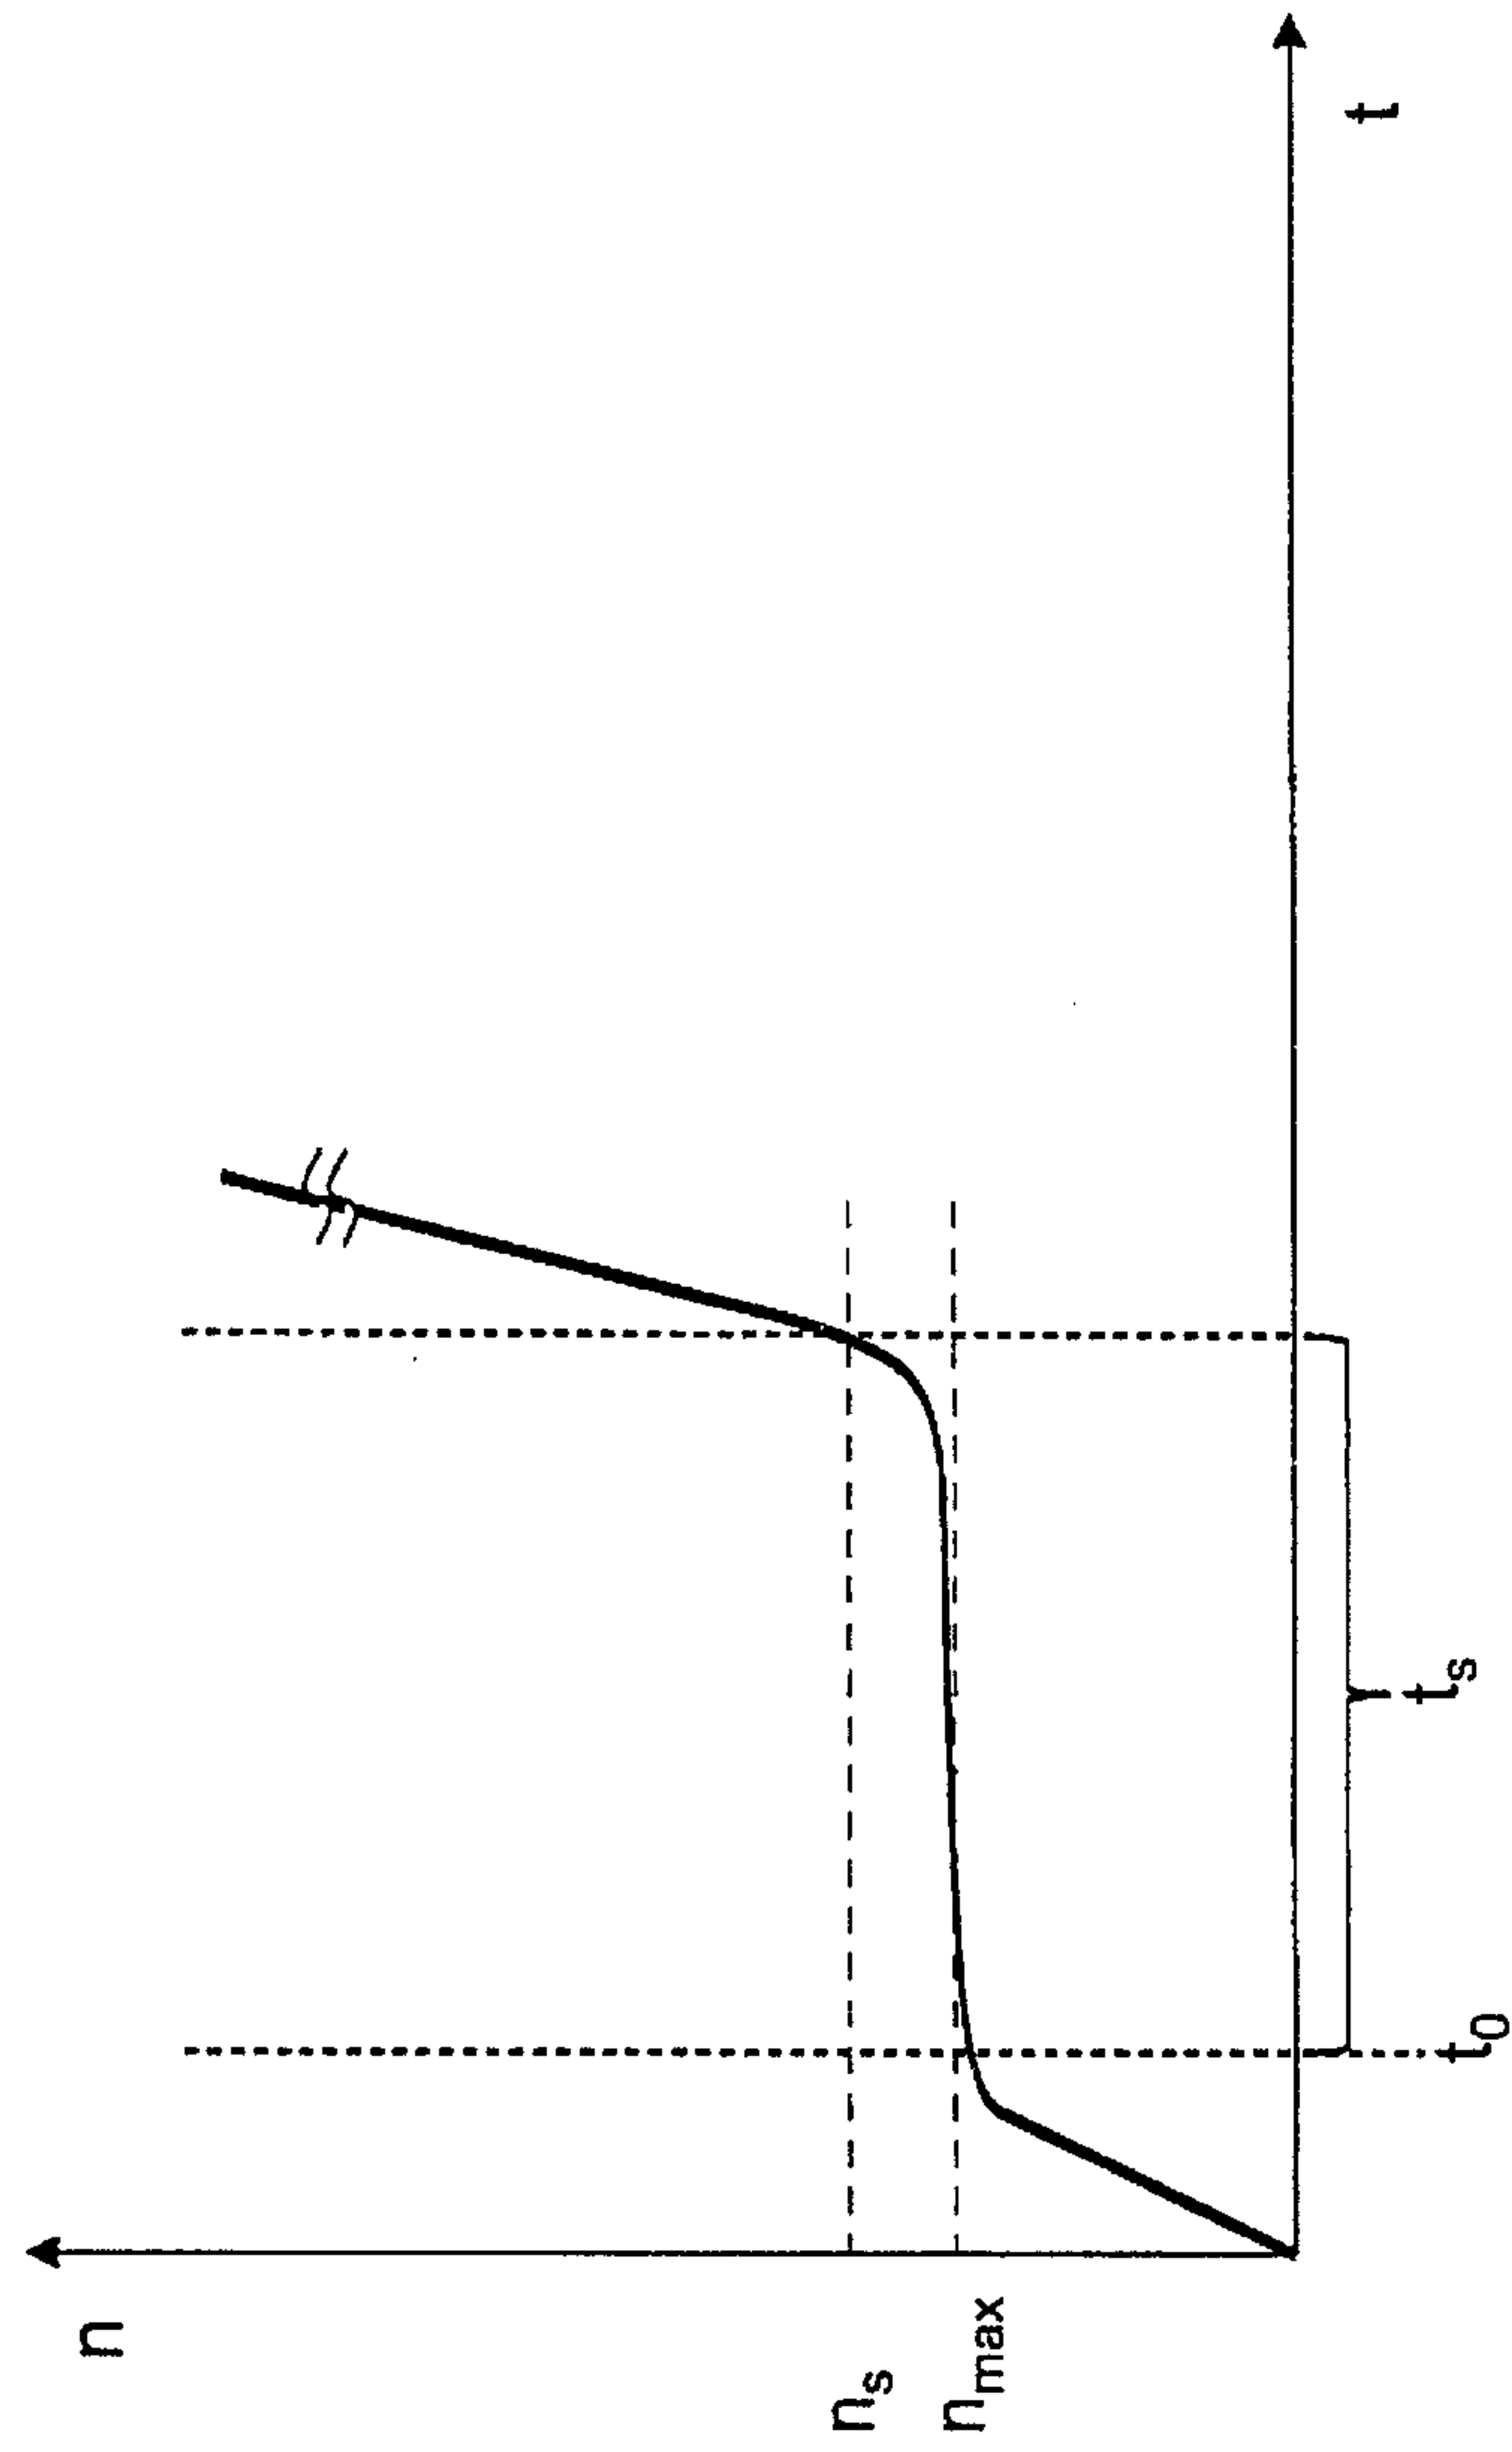


Fig. 3a

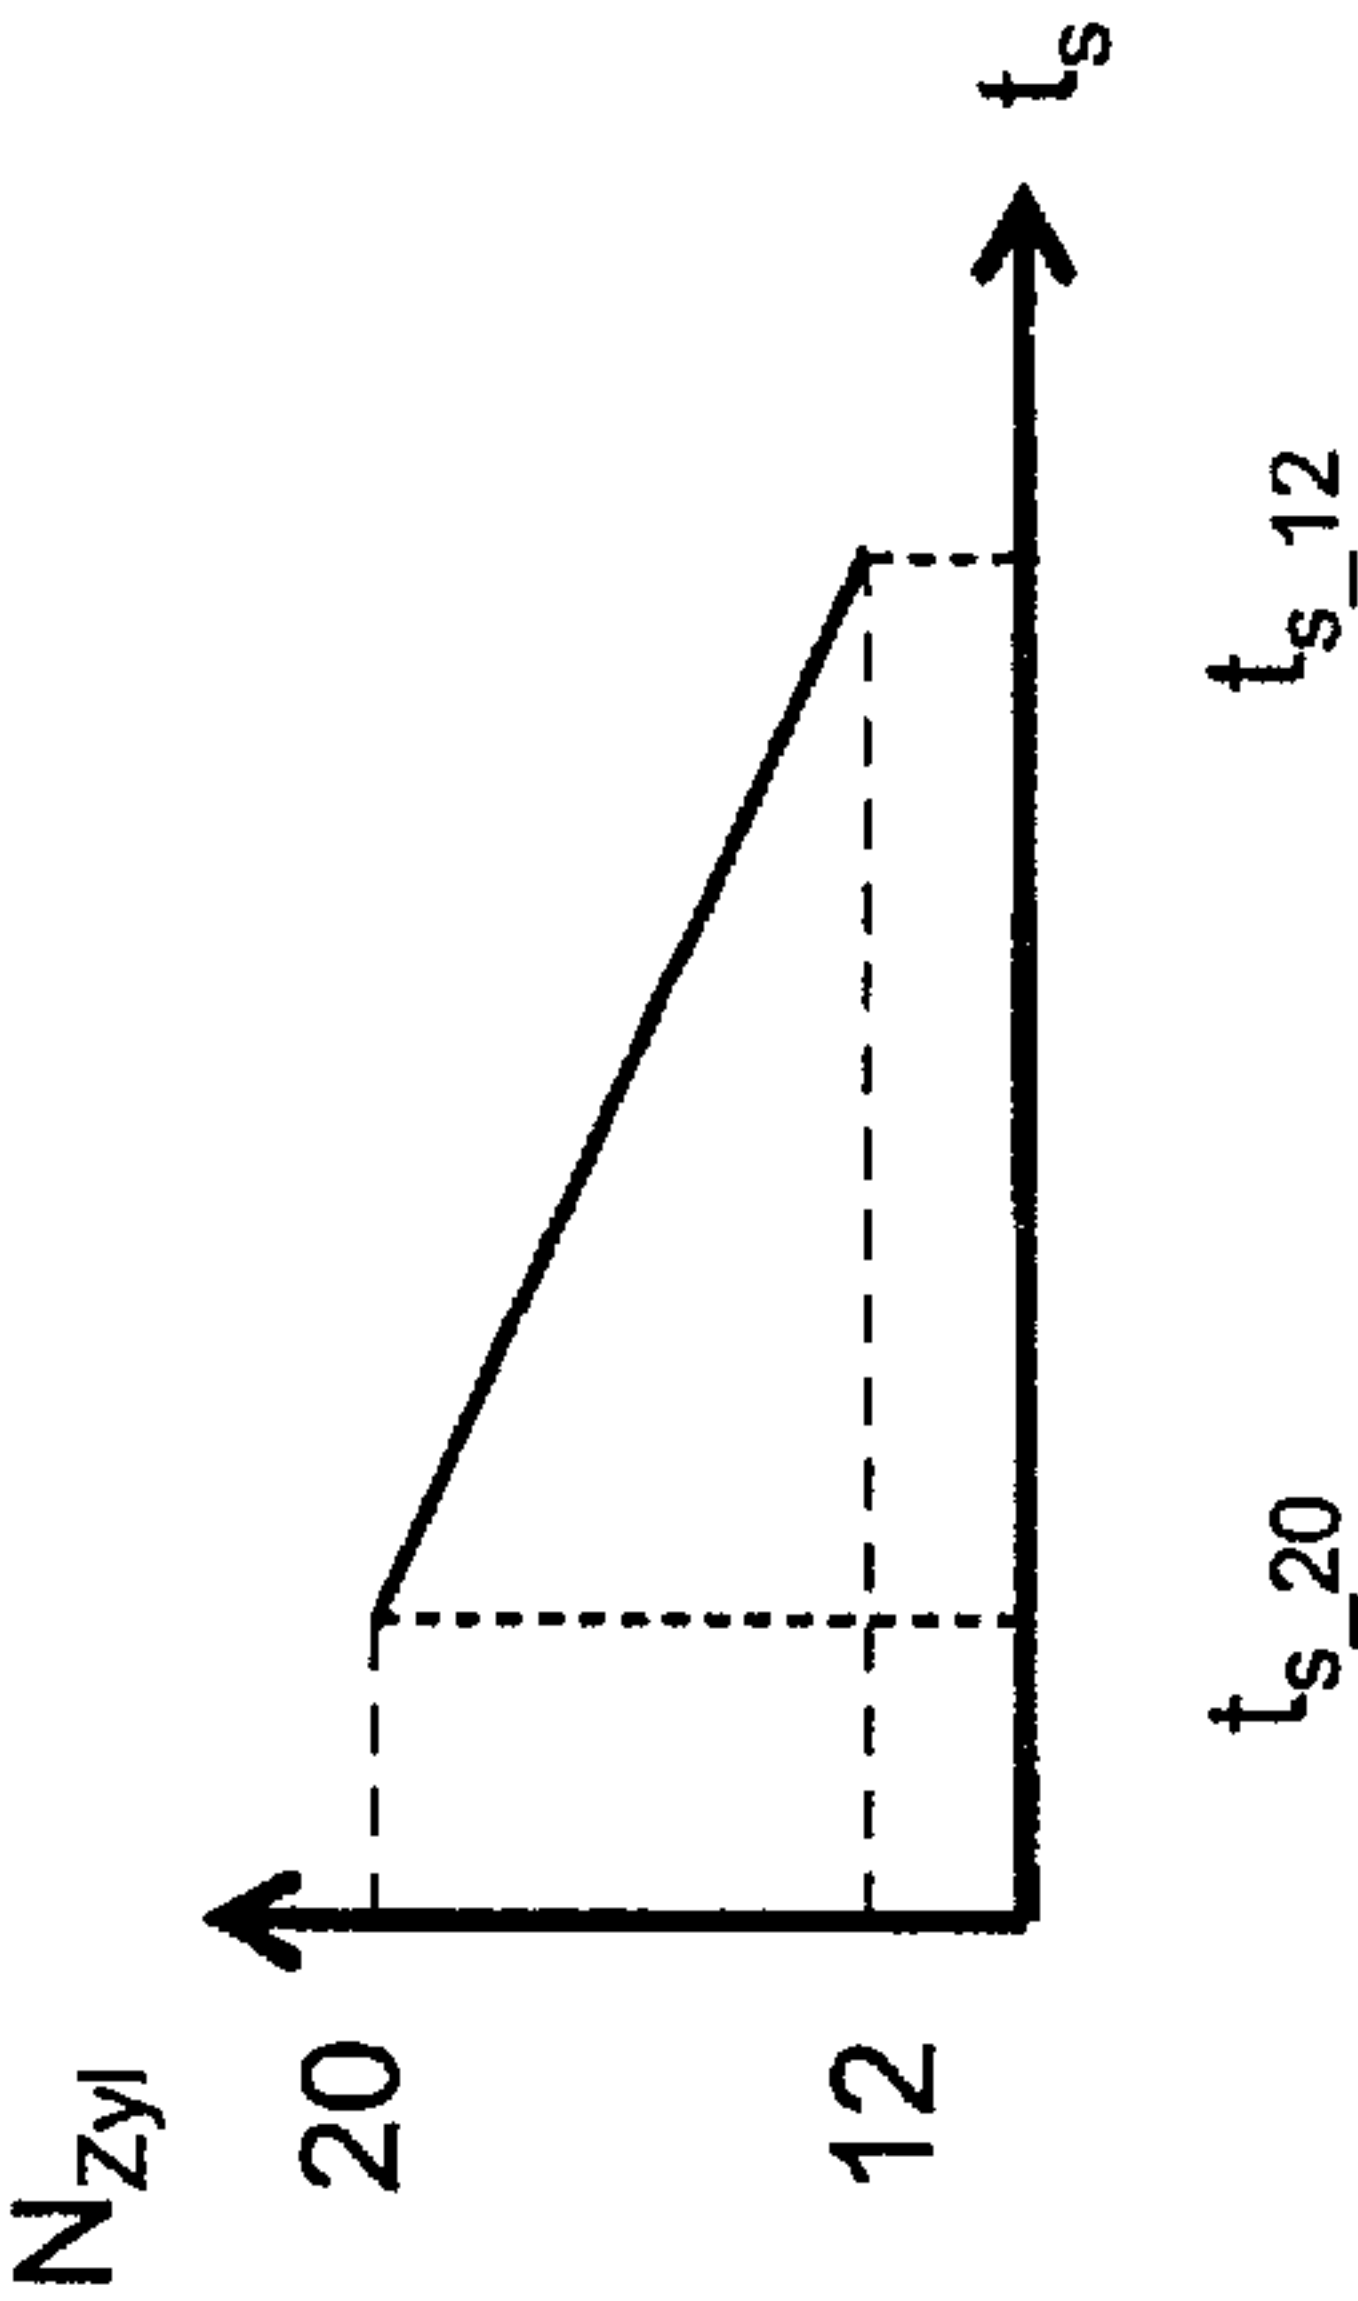


Fig. 3b

