

PJ 2965

015121

COMMONWEALTH OF AUSTRALIA

Patents Act 1952

APPLICATION FOR A STANDARD PATENT
OR A STANDARD PATENT OF ADDITION

We, FLUID TECHNOLOGY (AUST) LTD, a Company incorporated according to the State of Western Australia, of 21 Pearson Way, Osborne Park, in the State of Western Australia, Commonwealth of Australia, hereby apply for the grant of a standard patent for an invention entitled "LINE PRESSURE REGULATOR", which is described in the accompanying provisional specification.

Our address for service is WEAY & ASSOCIATES, Primary Industry House, 239 Adelaide Terrace, Perth, Western Australia, 6000.

Attorney code: WR

Dated this TWENTY-SEVENTH day of FEBRUARY 1989.

FLUID TECHNOLOGY (AUST) LTD
By its Patent Attorney

To the Commissioner of Patents,
Commonwealth of Australia.

REPRINT OF RECEIPT
P001445 27/02/89

AUSTRALIA
Patents Act 1952

DECLARATION IN SUPPORT OF AN APPLICATION FOR A PATENT

In support of the Application made by FLUID TECHNOLOGY (AUST) LIMITED for a patent for an invention entitled LINE PRESSURE REGULATOR.

I, KENNETH JOHN DAVEY of 15 Mann Way, Bassendean, in the State of Western Australia, Commonwealth of Australia, do solemnly and sincerely declare as follows:

1. I am authorised by FLUID TECHNOLOGY (AUST) LIMITED, the applicant for the patent to make this declaration on its behalf.
2. I am the actual inventor of the invention and the facts upon which the applicant is entitled to make the application are as follows:

The applicant is the Assignee of the actual inventor.

Declared at *BASSENDEAN* this *25TH* day of *FEBRUARY* 1989.

.....*K J Davey*.....
(Signature of Declarant)
KENNETH JOHN DAVEY

TO: THE COMMISSIONER OF PATENTS

(12) PATENT ABRIDGMENT (11) Document No. AU-B-45433/89
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 615121

(54) Title
LINE PRESSURE REGULATOR

International Patent Classification(s)
(51)⁴ G05D 016/06

(21) Application No. : 45433/89

(22) Application Date : 21.11.89

(30) Priority Data

(31) Number	(32) Date	(33) Country
PJ2965	27.02.89	AU AUSTRALIA

(43) Publication Date : 30.08.90

(44) Publication Date of Accepted Application : 19.09.91

(71) Applicant(s)
FLUID TECHNOLOGY (AUST) LTD

(72) Inventor(s)
KENNETH JOHN DAVEY

(74) Attorney or Agent
WRAY & ASSOCIATES, PO Box 6292, Hay Street, EAST PERTH WA 6004

(57) Claim

1. An in-line pressure regulator comprising a housing having an inlet and an outlet, said housing providing a first chamber open to the inlet, the first chamber being provided with a pair of substantially opposed ports which open to a second chamber, the second chamber having a third port opening to the outlet, an axial support element movable through the pair of ports and received within the first and second chambers, the support element supporting a pair of valve members wherein a valve member is associated with each of the pair of ports, the support element being movable within the first and second chambers to vary the extent of engagement of the pair of valve members with the pair of ports, said support element further supporting a third valve member which is associated with the third port, said support element being biased to an end position at which the pair of ports are open, and the third port is closed, said support element further supporting a pressure surface which is in the second chamber, whereby the force exerted by fluid pressure in the second chamber on the support element counteracts the biasing force applied thereto to rapidly move the support element from its end position to a regulating position where the third port is opened and the pair of valve members are moved proximate their respective ports to vary the degree of opening of the ports in accordance with the fluid pressure applied at the inlet.

615121

COMMONWEALTH OF AUSTRALIA

Patents Act 1952

COMPLETE SPECIFICATION
(Original)

FOR OFFICE USE

Application Number: PJ2965 Class Int. Class
Lodged: 27/02/89

Complete Specification - Lodged:
Accepted:
Published:

Priority:

Related Art:

TO BE COMPLETED BY APPLICANT

Name of Applicant: FLUID TECHNOLOGY (AUST) LIMITED

Address of Applicant: 21 Pearson Way, Osborne Park,
in the State of Western Australia,
Commonwealth of Australia.

Actual Inventor: KENNETH JOHN DAVEY

P 003073 211189

Address for Service:- C/- Wray & Associates.
Primary Industry House
239 Adelaide Terrace
Perth
Western Australia 6000.

Complete Specification for the invention entitled:

"LINE PRESSURE REGULATOR"

The following statement is a full description of this invention, including the best method of performing it known to me:-

THIS INVENTION relates to a line pressure regulator for use in fluid lines whereby fluid from a high pressure source can be delivered at a controlled reduced pressure to provide a substantially constant output pressure irrespective of the input pressure.

In one form the invention resides in an in-line pressure regulator comprising a housing having an inlet and an outlet, said housing providing a first chamber open to the inlet, the first chamber being provided with a pair of substantially opposed ports which open to a second chamber, the second chamber having a third port opening to the outlet, an axial support element movable through the pair of ports and received within the first and second chambers, the support element supporting a pair of valve members wherein a valve member is associated with each of the pair of ports, the support element being movable within the first and second chambers to vary the extent of engagement of the pair of valve members with the pair of ports, said support element further supporting a third valve member which is associated with the third port, said support element being biased to an end position at which the pair of ports are open, and the third port is closed, said support element further supporting a pressure surface which is in the second chamber, whereby the force exerted by fluid pressure in the second chamber on the support element counteracts the biasing force applied thereto to rapidly move the support element from its end position to a regulating position where the third port is opened and the pair of valve members are moved proximate their respective ports to vary the degree of opening of the ports in accordance with the fluid pressure applied at the inlet.

The invention will be more fully understood in the light of the following description of two specific embodiments. The description is made with reference to the accompanying drawings of which;



Figure 1 is a sectional elevation of a line pressure regulator according to the first embodiment in a closed position;

Figure 2 is a sectional elevation of the pressure regulator of Figure 1 in the partially open position;

Figure 3 is an enlarged view of the support element in position within the housing of the pressure regulator as shown at Figure 2; and

Figure 4 is a sectional elevation of a pressure regulator according to the second embodiment.

Figure 5 is a schematic representation of each of the embodiments.

The line pressure regulator 11 as shown at Figures 1, 2 and 3 is intended to be utilised to deliver fluid at a substantially constant pressure to a spray nozzle 10 from a high pressure fluid source that may vary in its feed pressure. The line regulator 11 comprises a substantially tubular housing 11 having an inlet 13 provided in its side wall at an intermediate location thereof and which opens into a first chamber 14 accommodated within the tubular body 12. The opposed walls of the first chamber 14 which are in opposed relation to the ends of the tubular body 12 are each formed with a first and second port 15 and 16 respectively. The first port 15 opens to one side of a second chamber 18 to one side of the first chamber 14 which further opens to an outlet 17 provided at one end of the tubular body 12 while the second port 16 opens the other side of the second chamber provided to the other side of the first chamber 14. Both sides of the second chamber 18 communicate through a fluid passageway 19 which provides a relatively unrestricted communication between the sides of the second chamber 18. The second chamber communicates with the outlet 17 through a third port 24.



A spindle like support element 20 is received within the tubular housing 12 such that it is axially slidable through the ports 15 and 16. The support element 20 supports a set of three valve members 21, 22 and 23 which are associated with the first, second and third port 15, 16 and 24 respectively. The first and second valves are dimensioned such that they are slidably receivable through the respective first and second ports 15 and 16 with a very close tolerance therebetween.

The faces of the first and second ports 15 and 16 are fluted as shown at Figure 3 and the depths of the flutes 31 increase as the distance from the first chamber 14 increases. In the case of the first port 15 the flutes commence at a position spaced axially from the first chamber 14 while in the case of the second port 16 the flutes commence at the entry of the second port 16 into the first chamber 14. The flutes are relieved to minimise flow resistance, but most importantly, to guide the support element 20. The end of the support element 20 adjacent the outlet 17 supports the third valve member 23 which is sealingly engagable with a valve seat provided at the third port 24 when the support element 20 is located at an end position at which position the line regulator is closed.

The other end of the support element 20 extends into the other side of the second chamber 18 and is provided with an enlarged disc-like head which is connected to a collapsible closure 26 extending between the periphery of the head 25 and a stop member 27 provided at the other end of the tubular body 12. A pressure spring 28 is accommodated within the collapsible closure 26 between the face of the enlarged head 25 remote from the other port 16 and the stop member 27. The stop member 27 is provided

with a threaded stud 29 which bears against the end of the compression spring adjacent the stop 27. The extent of penetration of the stud 29 into the stop 27 serves to vary the extent of biasing force applied to the support element 20 by the spring 28. A portion of the support element adjacent the enlarged head 25 is formed with an increased diameter shank 30 which is snugly and slidably received by the flutes 31 in the other port 16 when the support element 20 is in its end position at which position the third valve member 23 is in engagement with the third port. When at the closed position the first valve member 21 is adjacent but clear of the outlet side of the one port 15 while the second valve member 22 is located within the first chamber 14 and is clear of the other port 16. The engagement of the valve members 21 and 22 and the enlarged diameter shank 30 with the respective ports 15 and 16 is not a sealing engagement at least due to the presence of the flutes 31, and as a result there is the capacity for some fluid flow therebetween when fully engaged with the respective port.

When no fluid pressure is applied to the inlet 13 and the pressure is insufficient to overcome the biasing force provided by the spring 28 as shown at Figure 1 the biasing force provided by the spring 28 ensures engagement of the third valve member 23 with the third port 24 to close the line regulator and prevent any reverse fluid flow through the line regulator. On the application of sufficient fluid pressure to the inlet 13 as shown at Figure 2 fluid pressure is admitted to the secondary chamber 18 through the one port 15 and passageway 19 by free passage through 15 and 19 which in turn exerts a force upon the axial face of the enlarged head member 25 adjacent the one port 16 in opposition to the biasing force provided by the spring 28. On that counteracting pressure exceeding the

biasing force applied by the spring 28 the support element 20 is caused to move axially within the tubular body 12 in the direction of the stop member 27 and as a result the third valve member 23 is disengaged from the third port 24 and fluid flows into the outlet to create a higher back pressure at the outlet than that which existed at the outlet before the third member valve 23 disengaged from the third port 24. The resultant net increase in force on the support element in a direction away from the outlet due to the balancing pressure either side of the third valve member 23 causes the support element 20 to move quickly away from the end position, to a second pressure regulating position, such that the valve members 21 and 22 are brought into engagement with ports 15 and 16 respectively to restrict the flow from the first chamber 14 to second chamber 18. The passageway 19 ensures that there is little pressure differential between each side of the second chamber 18. The pressure at the outlet side of the first and second ports in the second chamber 18 is throttled by the degree of engagement of the first and second valve 21 and 22 with the first and second ports 15 and 16. Should there be a rise in the outlet pressure, the degree of engagement increases thereby increasing throttling. Thus outlet pressure is regulated to remain substantially constant irrespective of supply pressure.

Once flow commences, the first and the second valve members 21 and 22 are brought into engagement with the ports 15 and 16 respectively to reduce the degree of communication of the fluid pressure applied to the inlet to the second chamber 18. On the application of maximum fluid pressure to the inlet 13 both the first and second valve members 21 and 22 become fully engaged with the respective ports 15 and 16 whereby the only fluid flow through the ports is accommodated by the flutes and the

clearance between the respective valve members and the respective ports.

The value of the first embodiment may be schematically represented as shown at Figure 5. When the line regulator is closed as shown at Figure 2 the force (F_s) applied by the spring 28 may be represented as:

$$\begin{aligned} F_s &= F_2 - F_3 + F_1 - F_1 \\ &= F_2 - F_3 \\ &= (P_2 - P_A).A_2 - (P_2 - P_3).A_3 \\ &= P_2.A_2 - (P_2 - P_3).A_3 \end{aligned}$$

Where F = force
P = pressure
A = area

($P_A = 0$ pressure of P_1 , P_2 and P_3
measured above atmospheric pressure).

The supply pressure P_1 produces balancing forces F_1 on the first and second valves marked 21 and 22 where they are the same area A. The area A_2 of the enlarged head 25 is greater than the area A_3 of the third valve members 23. The differential force between the forces F_2 and F_3 applied to the enlarged head 25 and the third valve member 23 respectively is balanced by the force F_s applied by the spring.

Under no flow conditions the third valve member 23 closes the third port 24 and thus there is no throttling by the first and second valve members 21 and 22 and therefore

$$\begin{aligned} P_1 &= P_2. \\ P_3 &= 0 \end{aligned}$$

Under such pressure conditions the valve member is closed and the opening and spring pressure forces are balanced.



$$F_s = P_2 \cdot (A_2 - A_3) \text{ and}$$

$$F_s = k \cdot x$$

k is spring constant

x is initial deflection.

When the force differential ($F_2 - F_3$) applied to the enlarged head 25 just exceeds the resisting force F_s of the spring 28 the third valve member 23 disengages from the third port 24.

Thus it can be seen that the strength of the spring 28 determines the value of inlet pressure P_1 required to open the line regulator.

When the line regulator opens and there is flow to the outlet 17 such flow generates a back pressure P_3 greater than atmospheric pressure

$$\begin{aligned} \text{i.e. } F_s &= P_2 \cdot A_2 - (P_2 - P_3) \cdot A_3 \\ &= P_2 \cdot A_2 - P_2 \cdot A_3 + P_3 \cdot A_3. \end{aligned}$$

Assuming the losses past the third valve member 22 are small and decrease as the third valve member lifts from the third port 24 it can be assumed

$$P_3 = P_2$$

Therefore opening and pressure forces are in balance.

$$F_s = P_2 \cdot A_2.$$



Therefore as soon as flow commences and produces a back pressure P_3 and the outlet 17 above atmospheric the net force lifting the third valve member from the valve seat increases rapidly resulting in a rapid movement of the support element 20 to its regulating position where the first and second valve members 21 and 22 engage the first and second ports 15 and 16 where flow between the inlet 14 and the second chamber is throttled to produce a differential in pressures P_1 and P_2 thereat. As a result chatter or valve flutter is at least reduced if not eliminated. The slight increase in the force F_s applied by the spring 28 due to compression of the spring 28 by movement of the support element 20 is small compared with the force F_3 generated the back pressure P_3 .

In addition the pressure required to maintain the third valve member in the open is less than the pressure required to move the third valve member from the closed position.

The new balance position of the support element is one at which the pressure in the second chamber is held at a level at which the force F_s applied by the spring is just balanced. If the pressure P_2 in the second chamber continues to increase the support element is moved to bring the first and second valve members 21 and 22 into closer engagement with the first and second ports 15 and 16 respectively to further throttle the flow between the inlet chamber 14 and second chamber 18 so as to reduce P_2 with respect to P_1 .

If the inlet pressure P_1 is low (i.e. nearly equal to P_2) the extent of throttling by the first and second valve member 15 and 16 is low and resistance to flow is low. If the inlet pressure P_1 is much greater than the pressure



P_2 in the second chamber 18 the throttling by the first and second valve members 15 and 16 is greater. The minimal extent of movement of the spindle required to vary the extent of throttling to control the pressure P_2 in the second chamber results in only a slight difference on the force F_s applied by the spring 28. This implies a higher regulation of pressure for instances of a high inlet pressure than for low inlet pressures however in practice the difference in the degree of regulation has been found to be negligible.

As the inlet pressure P_1 falls to 0 below the minimal regulating pressure P_2 in the second chamber the outlet back pressure P_3 decreases correspondingly.

Therefore $F_s = P_2 \cdot A_3$.

At this point in time there is no significant throttling of flow through the first and second ports and the third valve member 23 is caused to be moved towards the third port 24 resulting in the throttling of fluid flow through the third port 24

i.e. $F_s = P_2 \cdot A_2 - P_2 \cdot A_3 + P_3 \cdot A_3$.

The change in the force F_s applied by the spring 28 as it relaxes is minimal compared to the force differential ($F_2 - F_3$) applied to the enlarged head 25 as the back pressure P_3 produced at the outlet is reduced as the throttling applied to the third port 24 by the third valve member 23 is increased which results in a positive rapid closure of the line regulator.

Since

$$F_s = k \cdot x$$



the lower the value of the of k the lower the variation in the force F_s applied by the spring 28 in the travel of the support element between the regulation position and the end position.

$$F_s = P_2 \cdot A_2 \quad \text{regulating}$$

$$F_s = P_2 \cdot A_2 - P_2 A_3 + P_3 \cdot A_3 \quad \text{near closure position}$$

The difference between these two positions may be expressed as

$$\Delta F_s = (P_2 - P_3) \cdot A_3.$$

If the variation in the force F_s applied by the spring through its movement is small a small amount of throttling produced by the third valve member 23 results in a rapid and positive closure of the third port 24 as the pressure P_2 in the second chamber falls slightly below the regulating pressure.

The second embodiment as shown at Figure 4 is of a similar form to that of the first embodiment except that the enlarged head of the collapsible closure 26 and the support element 20 of the first embodiment is replaced by a flexible diaphragm 125 which may be formed of an elastomeric material which is supported by a central boss 132 receivable over the end of the support 20 element adjacent the other end of the tubular body and which receives the innermost end of the spring 28. In addition the tubular body is formed as a two part body. The ports 15 and 16 are accommodated within the tubular element 133 axially supported between a pair of axially opposed apertures provided in the walls of the chamber 13 and the tubular element 133 is formed with axial extensions



134 and 135 which slidably support the support element to each side of the ports. The relief flutes 31 of the first embodiment are substituted by ports 136 in tubular element 133.

It should be appreciated that the scope of the present invention need not be limited to the particular scope of the embodiment described above.

6 9 10 11
2 3 4 5
6 7 8 9
10 11 12 13
14 15 16 17
18 19 20 21
22 23 24 25
26 27 28 29
30 31 32 33
34 35 36 37
38 39 40 41
42 43 44 45
46 47 48 49
50 51 52 53
54 55 56 57
58 59 60 61
62 63 64 65
66 67 68 69
70 71 72 73
74 75 76 77
78 79 80 81
82 83 84 85
86 87 88 89
90 91 92 93
94 95 96 97
98 99 100 101
102 103 104 105
106 107 108 109
110 111 112 113
114 115 116 117
118 119 120 121
122 123 124 125
126 127 128 129
130 131 132 133
134 135 136 137
138 139 140 141
142 143 144 145
146 147 148 149
150 151 152 153
154 155 156 157
158 159 160 161
162 163 164 165
166 167 168 169
170 171 172 173
174 175 176 177
178 179 180 181
182 183 184 185
186 187 188 189
190 191 192 193
194 195 196 197
198 199 200 201
202 203 204 205
206 207 208 209
210 211 212 213
214 215 216 217
218 219 220 221
222 223 224 225
226 227 228 229
230 231 232 233
234 235 236 237
238 239 240 241
242 243 244 245
246 247 248 249
250 251 252 253
254 255 256 257
258 259 260 261
262 263 264 265
266 267 268 269
270 271 272 273
274 275 276 277
278 279 280 281
282 283 284 285
286 287 288 289
290 291 292 293
294 295 296 297
298 299 300 301
302 303 304 305
306 307 308 309
310 311 312 313
314 315 316 317
318 319 320 321
322 323 324 325
326 327 328 329
330 331 332 333
334 335 336 337
338 339 340 341
342 343 344 345
346 347 348 349
350 351 352 353
354 355 356 357
358 359 360 361
362 363 364 365
366 367 368 369
370 371 372 373
374 375 376 377
378 379 380 381
382 383 384 385
386 387 388 389
390 391 392 393
394 395 396 397
398 399 400 401
402 403 404 405
406 407 408 409
410 411 412 413
414 415 416 417
418 419 420 421
422 423 424 425
426 427 428 429
430 431 432 433
434 435 436 437
438 439 440 441
442 443 444 445
446 447 448 449
450 451 452 453
454 455 456 457
458 459 460 461
462 463 464 465
466 467 468 469
470 471 472 473
474 475 476 477
478 479 480 481
482 483 484 485
486 487 488 489
490 491 492 493
494 495 496 497
498 499 500 501
502 503 504 505
506 507 508 509
510 511 512 513
514 515 516 517
518 519 520 521
522 523 524 525
526 527 528 529
530 531 532 533
534 535 536 537
538 539 540 541
542 543 544 545
546 547 548 549
550 551 552 553
554 555 556 557
558 559 560 561
562 563 564 565
566 567 568 569
570 571 572 573
574 575 576 577
578 579 580 581
582 583 584 585
586 587 588 589
590 591 592 593
594 595 596 597
598 599 600 601
602 603 604 605
606 607 608 609
610 611 612 613
614 615 616 617
618 619 620 621
622 623 624 625
626 627 628 629
630 631 632 633
634 635 636 637
638 639 640 641
642 643 644 645
646 647 648 649
650 651 652 653
654 655 656 657
658 659 660 661
662 663 664 665
666 667 668 669
670 671 672 673
674 675 676 677
678 679 680 681
682 683 684 685
686 687 688 689
690 691 692 693
694 695 696 697
698 699 700 701
702 703 704 705
706 707 708 709
710 711 712 713
714 715 716 717
718 719 720 721
722 723 724 725
726 727 728 729
730 731 732 733
734 735 736 737
738 739 740 741
742 743 744 745
746 747 748 749
750 751 752 753
754 755 756 757
758 759 760 761
762 763 764 765
766 767 768 769
770 771 772 773
774 775 776 777
778 779 780 781
782 783 784 785
786 787 788 789
790 791 792 793
794 795 796 797
798 799 800 801
802 803 804 805
806 807 808 809
810 811 812 813
814 815 816 817
818 819 820 821
822 823 824 825
826 827 828 829
830 831 832 833
834 835 836 837
838 839 840 841
842 843 844 845
846 847 848 849
850 851 852 853
854 855 856 857
858 859 860 861
862 863 864 865
866 867 868 869
870 871 872 873
874 875 876 877
878 879 880 881
882 883 884 885
886 887 888 889
890 891 892 893
894 895 896 897
898 899 900 901
902 903 904 905
906 907 908 909
910 911 912 913
914 915 916 917
918 919 920 921
922 923 924 925
926 927 928 929
930 931 932 933
934 935 936 937
938 939 940 941
942 943 944 945
946 947 948 949
950 951 952 953
954 955 956 957
958 959 960 961
962 963 964 965
966 967 968 969
970 971 972 973
974 975 976 977
978 979 980 981
982 983 984 985
986 987 988 989
990 991 992 993
994 995 996 997
998 999 1000 1001
1002 1003 1004 1005
1006 1007 1008 1009
1010 1011 1012 1013
1014 1015 1016 1017
1018 1019 1020 1021
1022 1023 1024 1025
1026 1027 1028 1029
1030 1031 1032 1033
1034 1035 1036 1037
1038 1039 1040 1041
1042 1043 1044 1045
1046 1047 1048 1049
1050 1051 1052 1053
1054 1055 1056 1057
1058 1059 1060 1061
1062 1063 1064 1065
1066 1067 1068 1069
1070 1071 1072 1073
1074 1075 1076 1077
1078 1079 1080 1081
1082 1083 1084 1085
1086 1087 1088 1089
1090 1091 1092 1093
1094 1095 1096 1097
1098 1099 1100 1101
1102 1103 1104 1105
1106 1107 1108 1109
1110 1111 1112 1113
1114 1115 1116 1117
1118 1119 1120 1121
1122 1123 1124 1125
1126 1127 1128 1129
1130 1131 1132 1133
1134 1135 1136 1137
1138 1139 1140 1141
1142 1143 1144 1145
1146 1147 1148 1149
1150 1151 1152 1153
1154 1155 1156 1157
1158 1159 1160 1161
1162 1163 1164 1165
1166 1167 1168 1169
1170 1171 1172 1173
1174 1175 1176 1177
1178 1179 1180 1181
1182 1183 1184 1185
1186 1187 1188 1189
1190 1191 1192 1193
1194 1195 1196 1197
1198 1199 1200 1201
1202 1203 1204 1205
1206 1207 1208 1209
1210 1211 1212 1213
1214 1215 1216 1217
1218 1219 1220 1221
1222 1223 1224 1225
1226 1227 1228 1229
1230 1231 1232 1233
1234 1235 1236 1237
1238 1239 1240 1241
1242 1243 1244 1245
1246 1247 1248 1249
1250 1251 1252 1253
1254 1255 1256 1257
1258 1259 1260 1261
1262 1263 1264 1265
1266 1267 1268 1269
1270 1271 1272 1273
1274 1275 1276 1277
1278 1279 1280 1281
1282 1283 1284 1285
1286 1287 1288 1289
1290 1291 1292 1293
1294 1295 1296 1297
1298 1299 1300 1301
1302 1303 1304 1305
1306 1307 1308 1309
1310 1311 1312 1313
1314 1315 1316 1317
1318 1319 1320 1321
1322 1323 1324 1325
1326 1327 1328 1329
1330 1331 1332 1333
1334 1335 1336 1337
1338 1339 1340 1341
1342 1343 1344 1345
1346 1347 1348 1349
1350 1351 1352 1353
1354 1355 1356 1357
1358 1359 1360 1361
1362 1363 1364 1365
1366 1367 1368 1369
1370 1371 1372 1373
1374 1375 1376 1377
1378 1379 1380 1381
1382 1383 1384 1385
1386 1387 1388 1389
1390 1391 1392 1393
1394 1395 1396 1397
1398 1399 1400 1401
1402 1403 1404 1405
1406 1407 1408 1409
1410 1411 1412 1413
1414 1415 1416 1417
1418 1419 1420 1421
1422 1423 1424 1425
1426 1427 1428 1429
1430 1431 1432 1433
1434 1435 1436 1437
1438 1439 1440 1441
1442 1443 1444 1445
1446 1447 1448 1449
1450 1451 1452 1453
1454 1455 1456 1457
1458 1459 1460 1461
1462 1463 1464 1465
1466 1467 1468 1469
1470 1471 1472 1473
1474 1475 1476 1477
1478 1479 1480 1481
1482 1483 1484 1485
1486 1487 1488 1489
1490 1491 1492 1493
1494 1495 1496 1497
1498 1499 1500 1501
1502 1503 1504 1505
1506 1507 1508 1509
1510 1511 1512 1513
1514 1515 1516 1517
1518 1519 1520 1521
1522 1523 1524 1525
1526 1527 1528 1529
1530 1531 1532 1533
1534 1535 1536 1537
1538 1539 1540 1541
1542 1543 1544 1545
1546 1547 1548 1549
1550 1551 1552 1553
1554 1555 1556 1557
1558 1559 1560 1561
1562 1563 1564 1565
1566 1567 1568 1569
1570 1571 1572 1573
1574 1575 1576 1577
1578 1579 1580 1581
1582 1583 1584 1585
1586 1587 1588 1589
1590 1591 1592 1593
1594 1595 1596 1597
1598 1599 1600 1601
1602 1603 1604 1605
1606 1607 1608 1609
1610 1611 1612 1613
1614 1615 1616 1617
1618 1619 1620 1621
1622 1623 1624 1625
1626 1627 1628 1629
1630 1631 1632 1633
1634 1635 1636 1637
1638 1639 1640 1641
1642 1643 1644 1645
1646 1647 1648 1649
1650 1651 1652 1653
1654 1655 1656 1657
1658 1659 1660 1661
1662 1663 1664 1665
1666 1667 1668 1669
1670 1671 1672 1673
1674 1675 1676 1677
1678 1679 1680 1681
1682 1683 1684 1685
1686 1687 1688 1689
1690 1691 1692 1693
1694 1695 1696 1697
1698 1699 1700 1701
1702 1703 1704 1705
1706 1707 1708 1709
1710 1711 1712 1713
1714 1715 1716 1717
1718 1719 1720 1721
1722 1723 1724 1725
1726 1727 1728 1729
1730 1731 1732 1733
1734 1735 1736 1737
1738 1739 1740 1741
1742 1743 1744 1745
1746 1747 1748 1749
1750 1751 1752 1753
1754 1755 1756 1757
1758 1759 1760 1761
1762 1763 1764 1765
1766 1767 1768 1769
1770 1771 1772 1773
1774 1775 1776 1777
1778 1779 1780 1781
1782 1783 1784 1785
1786 1787 1788 1789
1790 1791 1792 1793
1794 1795 1796 1797
1798 1799 1800 1801
1802 1803 1804 1805
1806 1807 1808 1809
1810 1811 1812 1813
1814 1815 1816 1817
1818 1819 1820 1821
1822 1823 1824 1825
1826 1827 1828 1829
1830 1831 1832 1833
1834 1835 1836 1837
1838 1839 1840 1841
1842 1843 1844 1845
1846 1847 1848 1849
1850 1851 1852 1853
1854 1855 1856 1857
1858 1859 1860 1861
1862 1863 1864 1865
1866 1867 1868 1869
1870 1871 1872 1873
1874 1875 1876 1877
1878 1879 1880 1881
1882 1883 1884 1885
1886 1887 1888 1889
1890 1891 1892 1893
1894 1895 1896 1897
1898 1899 1900 1901
1902 1903 1904 1905
1906 1907 1908 1909
1910 1911 1912 1913
1914 1915 1916 1917
1918 1919 1920 1921
1922 1923 1924 1925
1926 1927 1928 1929
1930 1931 1932 1933
1934 1935 1936 1937
1938 1939 1940 1941
1942 1943 1944 1945
1946 1947 1948 1949
1950 1951 1952 1953
1954 1955 1956 1957
1958 1959 1960 1961
1962 1963 1964 1965
1966 1967 1968 1969
1970 1971 1972 1973
1974 1975 1976 1977
1978 1979 1980 1981
1982 1983 1984 1985
1986 1987 1988 1989
1990 1991 1992 1993
1994 1995 1996 1997
1998 1999 2000 2001
2002 2003 2004 2005
2006 2007 2008 2009
2010 2011 2012 2013
2014 2015 2016 2017
2018 2019 2020 2021
2022 2023 2024 2025
2026 2027 2028 2029
2030 2031 2032 2033
2034 2035 2036 2037
2038 2039 2040 2041
2042 2043 2044 2045
2046 2047 2048 2049
2050 2051 2052 2053
2054 2055 2056 2057
2058 2059 2060 2061
2062 2063 2064 2065
2066 2067 2068 2069
2070 2071 2072 2073
2074 2075 2076 2077
2078 2079 2080 2081
2082 2083 2084 2085
2086 2087 2088 2089
2090 2091 2092 2093
2094 2095 2096 2097
2098 2099 2100 2101
2102 2103 2104 2105
2106 2107 2108 2109
2110 2111 2112 2113
2114 2115 2116 2117
2118 2119 2120 2121
2122 2123 2124 2125
2126 2127 2128 2129
2130 2131 2132 2133
2134 2135 2136 2137
2138 2139 2140 2141
2142 2143 2144 2145
2146 2147 2148 2149
2150 2151 2152 2153
2154 2155 2156 2157
2158 2159 2160 2161
2162 2163 2164 2165
2166 2167 2168 2169
2170 2171 2172 2173
2174 2175 2176 2177
2178 2179 2180 2181
2182 2183 2184 2185
2186 2187 2188 2189
2190 2191 2192 2193
2194 2195 2196 2197
2198 2199 2200 2201
2202 2203 2204 2205
2206 2207 2208 2209
2210 2211 2212 2213
2214 2215 2216 2217
2218 2219 2220 2221
2222 2223 2224 2225
2226 2227 2228 2229
2230 2231 2232 2233
2234 2235 2236 2237
2238 2239 2240 2241
2242 2243 2244 2245
2246 2247 2248 2249
2250 2251 2252 2253
2254 2255 2256 2257
2258 2259 2260 2261
2262 2263 2264 2265
2266 2267 2268 2269
2270 2271 2272 2273
2274 2275 2276 2277
2278 2279 2280 2281
2282 2283 2284 2285
2286 2287 2288 2289
2290 2291 2292 2293
2294 2295 2296 2297
2298 2299 2300 2301
2302 2303 2304 2305
2306 2307 2308 2309
2310 2311 2312 2313
2314 2315 2316 2317
2318 2319 2320 2321
2322 2323 2324 2325
2326 2327 2328 2329
2330 2331 2332 2333
2334 2335 2336 2337
2338 2339 2340 2341
2342 2343 2344 2345
2346 2347 2348 2349
2350 2351 2352 2353
2354 2355 2356 2357
2358 2359 2360 2361
2362 2363 2364 2365
2366 2367 2368 2369
2370 2371 2372 2373
2374 2375 2376 2377
2378 2379 2380 2381
2382 2383 2384 2385
2386 2387 2388 2389
2390 2391 2392 2393
2394 2395 2396 2397
2398 2399 2400 2401
2402 2403 2404 2405
2406 2407 2408 2409
2410 2411 2412 2413
2414 2415 2416 2417
2418 2419 2420 2421
2422 2423 2424 2425
2426 2427 2428 2429
2430 2431 2432 2433
2434 2435 2436 2437
2438 2439 2440 2441
2442 2443 2444 2445
2446 2447 2448 2449
2450 2451 2452 2453
2454 2455 2456 2457
2458 2459 2460 2461
2462 2463 2464 2465
2466 2467 2468 2469
2470 2471 2472 2473
2474 2475 2476 2477
2478 2479 2480 2481
2482 2483 2484 2485
2486 2487 2488 2489
2490 2491 2492 2493
2494 2495 2496 2497
2498 2499 2500 2501
2502 2503 2504 2505
2506 2507 2508 2509
2510 2511 2512 2513
2514 2515 2516 2517
2518 2519 2520 2521
2522 2523 2524 2525
2526 2527 2528 2529
25

THE CLAIMS defining the invention are as follows:-

1. An in-line pressure regulator comprising a housing having an inlet and an outlet, said housing providing a first chamber open to the inlet, the first chamber being provided with a pair of substantially opposed ports which open to a second chamber, the second chamber having a third port opening to the outlet, an axial support element movable through the pair of ports and received within the first and second chambers, the support element supporting a pair of valve members wherein a valve member is associated with each of the pair of ports, the support element being movable within the first and second chambers to vary the extent of engagement of the pair of valve members with the pair of ports, said support element further supporting a third valve member which is associated with the third port, said support element being biased to an end position at which the pair of ports are open, and the third port is closed, said support element further supporting a pressure surface which is in the second chamber, whereby the force exerted by fluid pressure in the second chamber on the support element counteracts the biasing force applied thereto to rapidly move the support element from its end position to a regulating position where the third port is opened and the pair of valve members are moved proximate their respective ports to vary the degree of opening of the ports in accordance with the fluid pressure applied at the inlet.

2. An in-line pressure regulator as claimed at claim 1 wherein locations of the support element when at its end position and regulating position are axially spaced such that when the support element is at its regulating position the third valve member is spaced clear of the third port such that there is substantially no throttling of the fluid flow through the third port.



3. An in-line pressure regulator as claimed at claim 1 or 2 wherein the biasing force is capable of being varied.

4. An in-line pressure regulator substantially as herein described.

DATED this 21st day of NOVEMBER 1989.

FLUID TECHNOLOGY (AUST) LIMITED

Applicant.

Wray & Associates
Perth, Western Australia
Patent Attorneys for Applicant.

45433/89

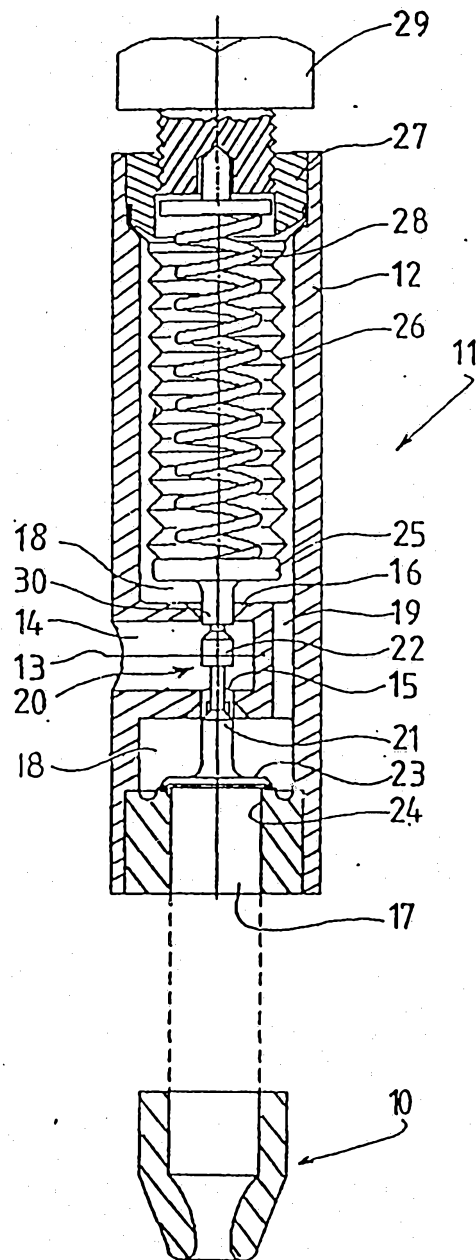


Fig. 1.

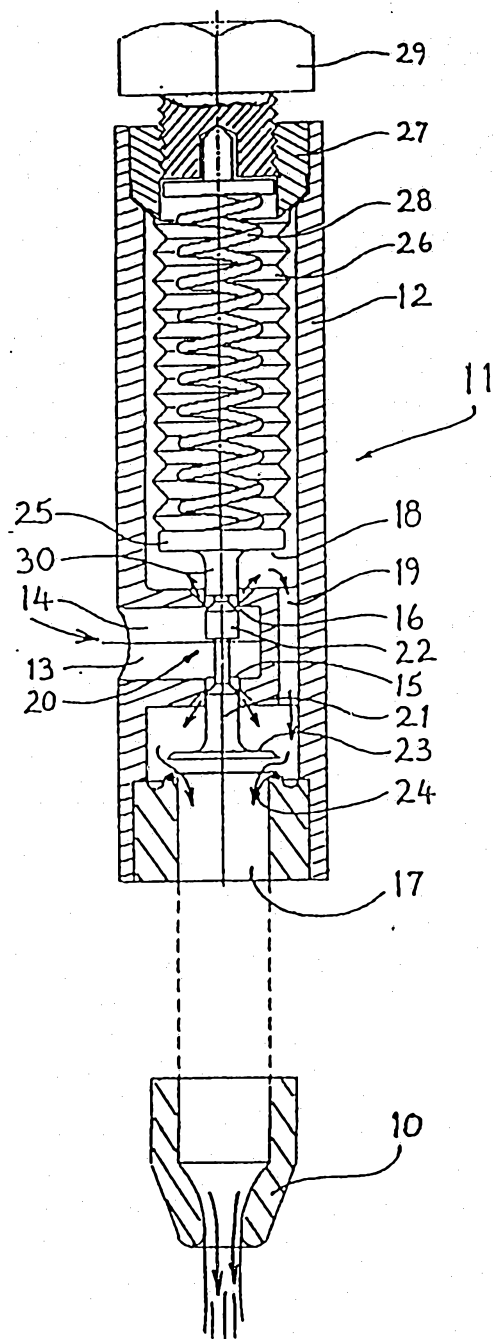


Fig. 2.

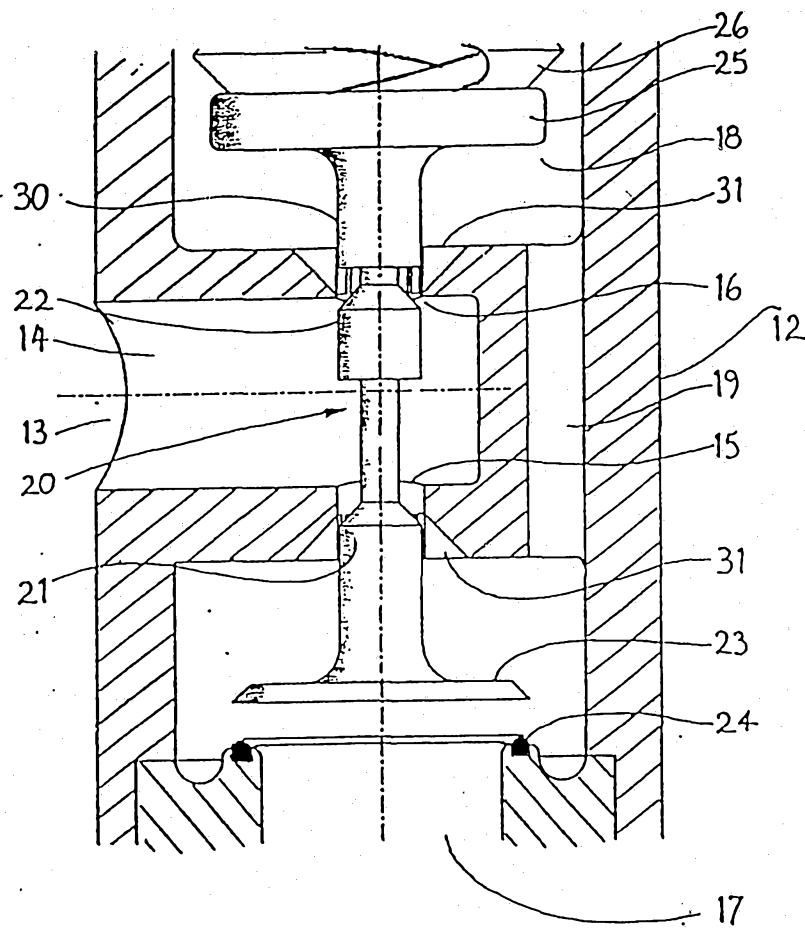


Fig. 3.

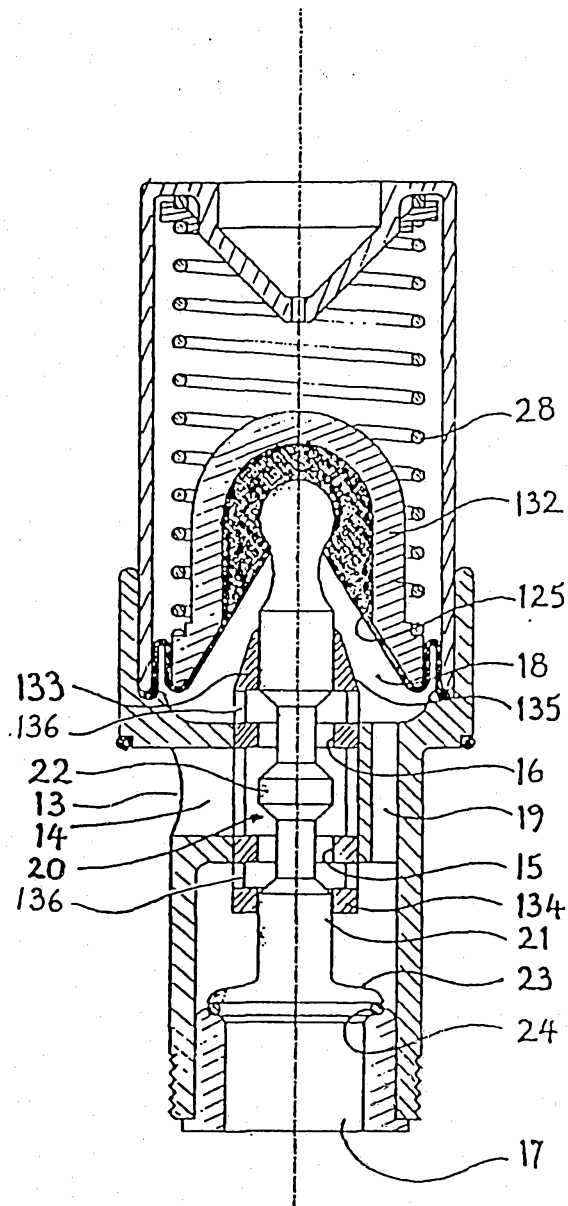


Fig. 4.

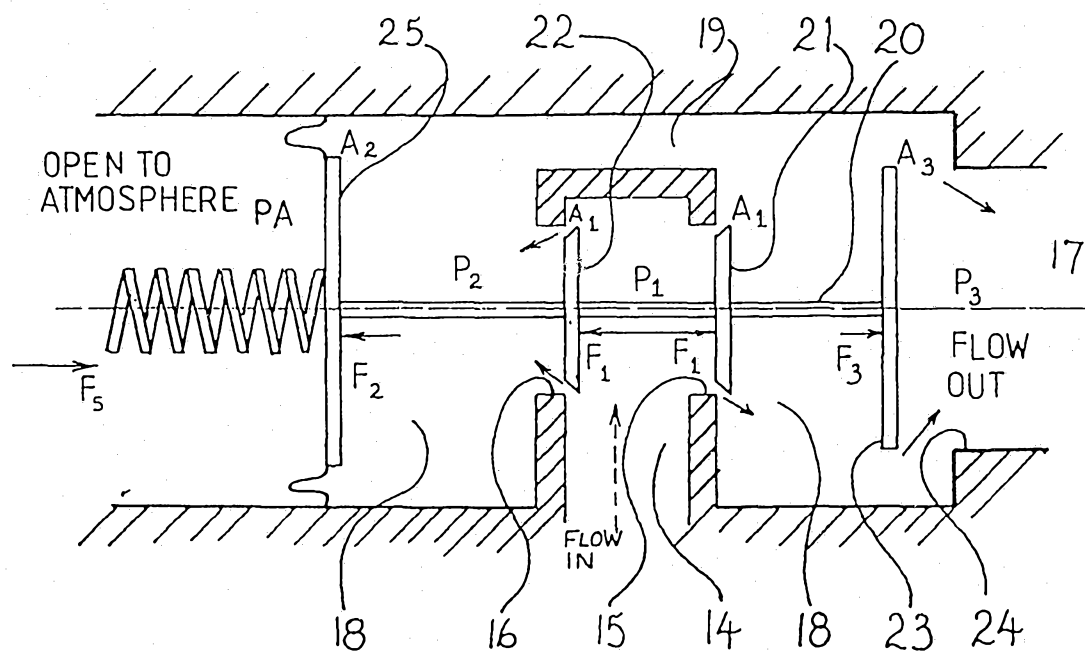


Fig. 5