

(19)



(11)

EP 1 880 767 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
23.01.2008 Bulletin 2008/04

(51) Int Cl.:
B02C 17/18 (2006.01) **B02C 21/00** (2006.01)

(21) Application number: **07110302.2**

(22) Date of filing: **14.06.2007**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK YU

(72) Inventors:
• **Casadio, Simone**
40026 Imola (Bologna) (IT)
• **Poli, Piero**
40026 Imola (Bologna) (IT)

(30) Priority: **20.07.2006 IT RE20060089**

(74) Representative: **Corradini, Corrado et al**
Ing. C. Corradini & C. S.R.L.
Via Dante Alighieri 4
42100 Reggio Emilia (IT)

(71) Applicant: **SACMI COOPERATIVA MECCANICI IMOLA SOCIETA' COOPERATIVA**
40026 Imola (BO) (IT)

(54) A connecting system between continous mills in series in a grinding plant

(57) A grinding plant (1), comprising a plurality of continuous mills (2) each provided with a loading mouth (6) of raw material and an unloading mouth (8) of slip, which loading mouth (6) and unloading mouth (8) are placed in series by means of a connecting element (19), which connecting element (19) is associated to an in-loading

device (20, 21) and connects the unloading mouth (8) of a mill to the loading mouth (6) of a contiguous mill. Associated to the connecting element (19) are means for preventing exiting of the material from the connecting element (19) during advancing of the material from a mill which is upstream to a mill which is downstream.

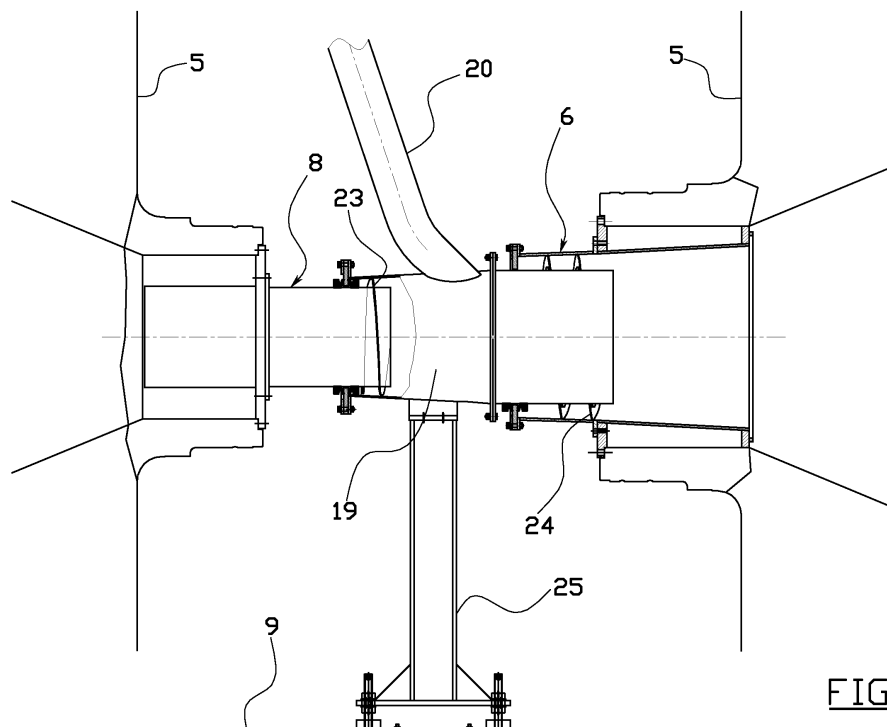


FIG.2

EP 1 880 767 A1

Description

[0001] The invention relates in a general sense to a grinding plant destined in particular, though not exclusively, to be used in the preparation of ceramic mixtures. These mixtures are generally prepared by damp comminution of the raw materials (silicon, feldspars, clay) and the addition of specific additives, up until a homogeneous slip is obtained, having the desired granulometry of the suspended powders.

[0002] As is known, a plant of this type usually comprises at least a grinding mill, which is provided with a rotating drum, internally of which the comminution process of the raw materials takes place by impact, and in any case by reciprocal action, between the raw materials themselves and a number of generally spherical grinding bodies.

[0003] Known grinding mills are subdivided into continuous mills and discontinuous mills, depending on whether the raw material loading stage into the drum and the slip unloading stage are done continuously during mill operation, or discontinuously, requiring temporary interruption of the production process and the halting of the rotating drum.

[0004] The present invention relates in particular to a grinding plant comprising continuous mills.

[0005] In the prior art in the ceramics sector, the comminution of the raw materials comprises a process in successive stages, starting from a breaking stage and terminating with a refining stage. In the various stages, the grinding bodies exhibit different sizes, progressively diminishing in order of stages from breaking to refining; consequently, for each of the stages there is a rotating drum rotation speed such as to optimise the work operation, work times and energy consumption of the grinding mill.

[0006] For these reasons, the prior art describes plants comprising a plurality of continuous grinding mills located in series, in which the rotating drum of each mill contains grinding bodies and rotates at an independent velocity from the others, in order to carry out one of above-described stages of the comminution process optimally.

[0007] A similar plant is described in detail in Italian patent application RE2003A000013, by the present applicant, to which patent application reference should be made for further details.

[0008] In particular, each rotating drum of the above-described plant is provided with a loading mouth for the material to be worked and an unloading mouth for the slip, which mouths are located on opposite sides of the drum and are arranged along the rotation axis thereof, and which mouths rotate solidly with the drum, facilitating continuous advancing of the loading raw material and the unloading slip.

[0009] Further, the unloading mouth of an intermediate rotating drum is connected to the loading mouth of the next drum, by means of a tubular connecting element, which is also associated to an in-loading device for intro-

ducing grinding bodies and special additives (for example, dyes) directly internally of the downstream drum.

[0010] A drawback of these known plants is that the tubular connecting element, differently to the unloading and loading conduits which rotate solidly with the respective rotating drums, must be solidly connected to the in-loading device and, consequently, must be fixed.

[0011] In fact the free end of the unloading mouth inserts axially for a tract thereof internally of the tubular connection, which in turn is inserted for a tract thereof internally of the free end of the loading mouth of the next mill.

[0012] With this configuration the material advancing between a rotating drum and a next rotating drum exhibits the tendency to fall accidentally from the side of the interface between the rotating drum upstream and the tubular connection and from the side of the interface between the tubular connection and the rotating drum located downstream.

[0013] This is due to the fact that the granular and abrasive nature of the slip makes the realisation of appropriate sealing devices difficult.

[0014] The aim of the present invention is to obviate the above-mentioned drawback, by providing a solution which is simple, rational and inexpensive.

[0015] The aim is attained by a continuous grinding plant comprising a plurality of continuous mills located in series, in which the unloading mouth of a mill and the loading mouth of the following mill are connected by a connecting element, means being provided for preventing exit of the above-mentioned material between the connecting element (19) and the loading mouth and the unloading mouth during advancing of the material from the upstream mill to the downstream mill.

[0016] In a preferred embodiment of the invention, the means comprise a first helical body fixed to the free end of the unloading mouth of the upstream mill, such that the above-mentioned first helical body inserts internally of the connecting element, realising, in collaboration with a part of the internal surface of the connecting element, a first screw device which, during the advancing of the material, maintains the material internally of the connecting element.

[0017] The means preferably further comprise a second helical body located at the downstream mill loading mouth and fixed internally thereto, the second helical body inserting internally of the loading mouth of the downstream mill and realising, in collaboration with the downstream mill loading mouth, a second screw device which prevents exit of the material from the downstream end of the connecting element.

[0018] Further characteristics and advantages of the invention will emerge from a reading of the following description, provided purely by way of non-limiting example with the aid of the enclosed figures of the drawings, in which:

- figure 1 is a schematic view of the continuous grind-

ing plant of the invention;

- figure 2 is a detail of the connecting system between the mills of the invention.

[0019] With reference to the figures of the drawings, the grinding plant of the present invention, denoted in its entirety by 1, comprises a plurality of continuous mills 2 located in series.

[0020] Each mill 2 comprises a rotating drum 3, which is formed by a cylindrical body 4 having a horizontal axis, which body 4 is closed, at an end thereof, by a first bottom 5 provided with an axial mouth 6 for loading the material, and at an opposite end thereof, by a bottom 7 provided with an axial mouth 8 for unloading the slip.

[0021] The rotating drum 3 is supported at each end by a suitable structure 9 and is activated by a special control system 10 by means of a belt system 11.

[0022] Internally of the rotating drum 3 there is a grinding chamber, internally of which both the grinding bodies and the raw materials constituting the slip, i.e. essentially water, silicon, feldspars, clay are supplied. The grinding bodies are typically made of silicon or aluminium and during plant operation get worn, to the point that they mix in with the slip under processing.

[0023] Figure 1 shows that the upstream first mill 2 is provided with a usual loading system 18 of the raw materials, which is in itself known, and that the loading mouth 6 of the second mill, and any further mills, is connected both to the unloading mouth 8 of the preceding mill and to a in-loading conduit 20 which is associated to a further loading device 21.

[0024] The in-loading conduit 20 advantageously enables the grinding bodies to be added separately for each of the continuous mills 2, and also enables materials or water to be introduced separately, thus constantly allowing the mixture to be corrected and ensuring an optimal composition.

[0025] Each of the continuous mills 2 of the grinding plant 1, being operatively independent of the others, is of optimum size and is also optimised in terms of the geometry thereof, the dimensions of the grinding bodies and the rotation velocity, for the specific stage of comminution it is to perform, and the slip under process passes continuously from a rotatable drum 3 to a following rotatable drum 3 with no process interruption, up until the desired granulometry of the suspended powders is obtained.

[0026] The evacuation of the refined slip from the operating chamber of a rotating drum 3 is done by usual means, of known type which are not further described herein. However, for the purposes of understanding the present invention, it is stressed that although the means for evacuating advance the slip towards the rotating drum 3 located downstream, this advancing is also performed, and made efficient, by the rotation of the unloading mouth 8 and the loading mouth 6, which are solidly constrained to the respective rotating drums 3.

[0027] As previously mentioned, a fixed tubular con-

necting element 19 is interposed between the unloading mouths 8 and the loading mouths 6, which connecting element 19 is substantially constituted by a tube fixed to the support structure 9 by means of a rigid support 25.

[0028] The following are rotatably associated to the fixed tubular connecting element 19: on one side thereof, the unloading mouth 8, and on the other side thereof, the loading mouth 6. In detail, the free end of the unloading mouth 8 inserts axially, for a tract thereof, internally of the tubular connecting element 19, which in turn is inserted, for a tract thereof, internally of the free end of the loading mouth 6.

[0029] The unloading mouth 8 is thus smaller than the fixed connecting element 19, while the connecting element 19 is smaller than the loading mouth 6.

[0030] Suitable means for sealing can be interposed between the unloading mouth 8 and the loading mouth 6 and the tubular connecting element 19, which means for sealing can advantageously contribute to preventing leakage of material from the plant 1.

[0031] In particular, as can be seen in figure 2, a first helical body 23 is fixed to the free end of the unloading mouth 8 and to the external surface thereof, realising a first screw device according to the invention.

[0032] In this way the first helical body 23 is turned by the rotation of the continuous mill 2, to which the unloading mouth 8 is associated.

[0033] Further, a second helical body 24 is fixed internally of the downstream loading mouth 6 of the mill, realising a second screw device of the invention.

[0034] Similarly to the first helical body 23, the second helical body 24 is turned by the rotation of the continuous mill 2, to which the loading mouth 6 is associated.

[0035] During plant 1 operation, the rotating drums 3 rotate independently of one another and, consequently, draw the unloading mouth 8 and the loading mouth 6 in rotation, while the tubular connecting element 19 remains fixed.

[0036] In this way the first helical body 23, which is joined to the unloading mouth 8, rotates internally of a first portion of the connecting element 19.

[0037] The first helical body 23, during advancement of the material, collaborates with the internal surface of the connecting element 19 and forms a first screw device which has the function of maintaining the material itself internally of the connecting element 19, also preventing the material from accidentally exiting from the upstream end of the tubular connecting element 19.

[0038] Further, the second helical body 24, which is connected to the loading mouth 6, rotates internally of the loading mouth 6 and, collaborating with the external surface of the connecting element 19, forms a second screw device which effectively contributes to preventing exit of the material from the downstream end of the tubular connecting element 19.

[0039] The properties of the present invention are advantageous also in consideration of the fact that other material flows internally of the connecting element 19

through the in-loading conduit 19.

[0040] Obviously modifications or improvements, dictated by contingent requirements or details, can be made to the plant as described without its forsaking the ambit of the invention as it is claimed herein below.

Claims

1. A grinding plant (1), comprising a plurality of continuous mills (2) each provided with a loading mouth (6) of raw material and an unloading mouth (8) of slip, which loading mouth (6) and unloading mouth (8) are placed in series by means of a connecting element (19), which connecting element (19) is associated to an in-loading device (20, 21) and connects the unloading mouth (8) of a mill to the loading mouth (6) of a contiguous mill, **characterised in that** associated to the connecting element (19) are means for preventing exiting of the material from the connecting element (19) at the unloading mouth (8) and the loading mouth (6) during advancing of the material from a mill which is upstream to a mill which is downstream.

10
15
20
25
2. The plant (1) of claim 1, **characterised in that** the means for preventing exiting of the material comprise at least a first helical body (23) associated to a free end of the unloading mouth (8) of the upstream mill, in which the first helical body (23) inserts into the connecting element (19), realising, in collaboration with the connecting element (19), a first screw device which during the advancing of the material keeps the material inside the connecting element (19).

30
35
3. The plant (1) of claim 1 or 2, **characterised in that** the means for preventing exiting of the material comprise a second helical body (24) which is associated to a free end of the loading mouth (6) of the downstream mill, in which the second helical body (24) inserts internally of the loading mouth (6) of the downstream mill, realising, in collaboration with the loading mouth (6), a second screw device which prevents exiting of the material from the downstream end of the connecting element (19).

40
45
4. The plant (1) of claim 2, **characterised in that** the first helical body (23) is fixed externally on the unloading mouth (8), such as to be turned by the rotation of the continuous mill (2) to which the unloading mouth (8) is associated.


50
5. The plant (1) of claim 3, **characterised in that** the second helical body (24) is fixed internally on the loading mouth (6), such as to be turned by the rotation of the continuous mill (2) to which the loading mouth (6) is associated.

55

6. The plant (1) of claim 1, **characterised in that** the in-loading device comprises a device (21) for loading the material, and an in-loading conduit (20) which connects the in-loading device (21) to the connecting element (19).

5
7. The plant (1) of claim 1, **characterised in that** means for sealing are interposed between each of the unloading mouths (8) and the loading mouths (6) and the connecting element (19).

10

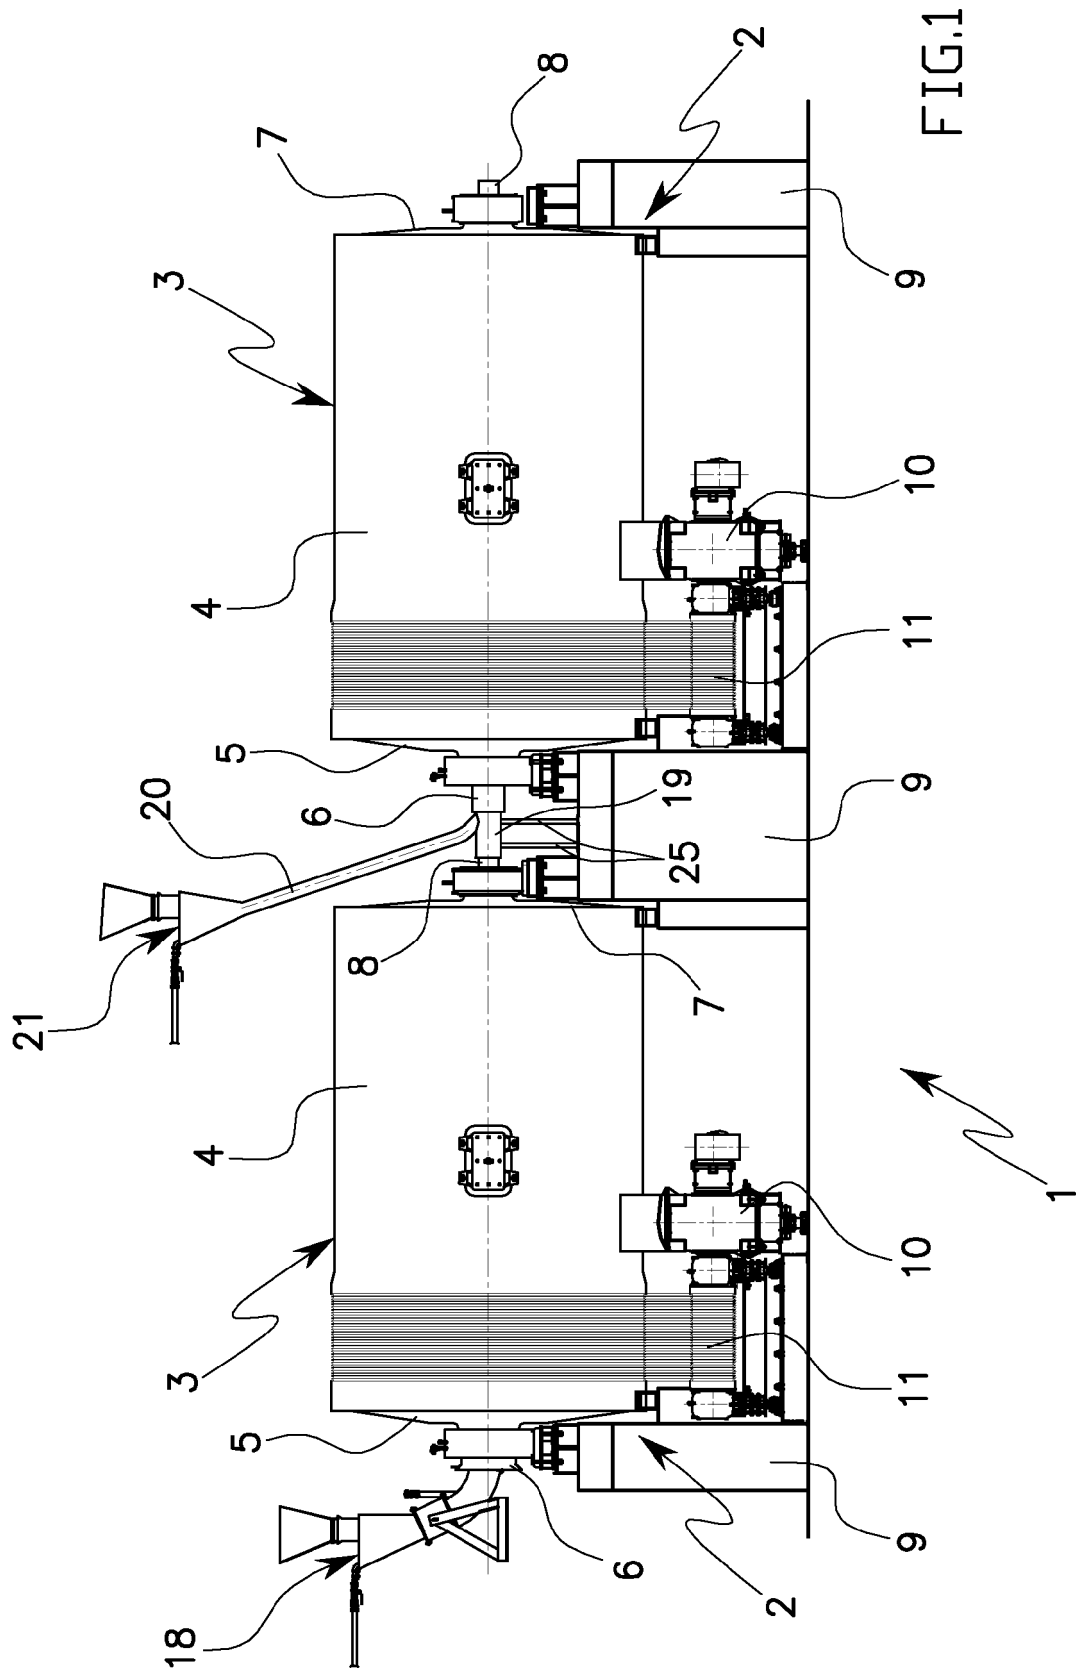

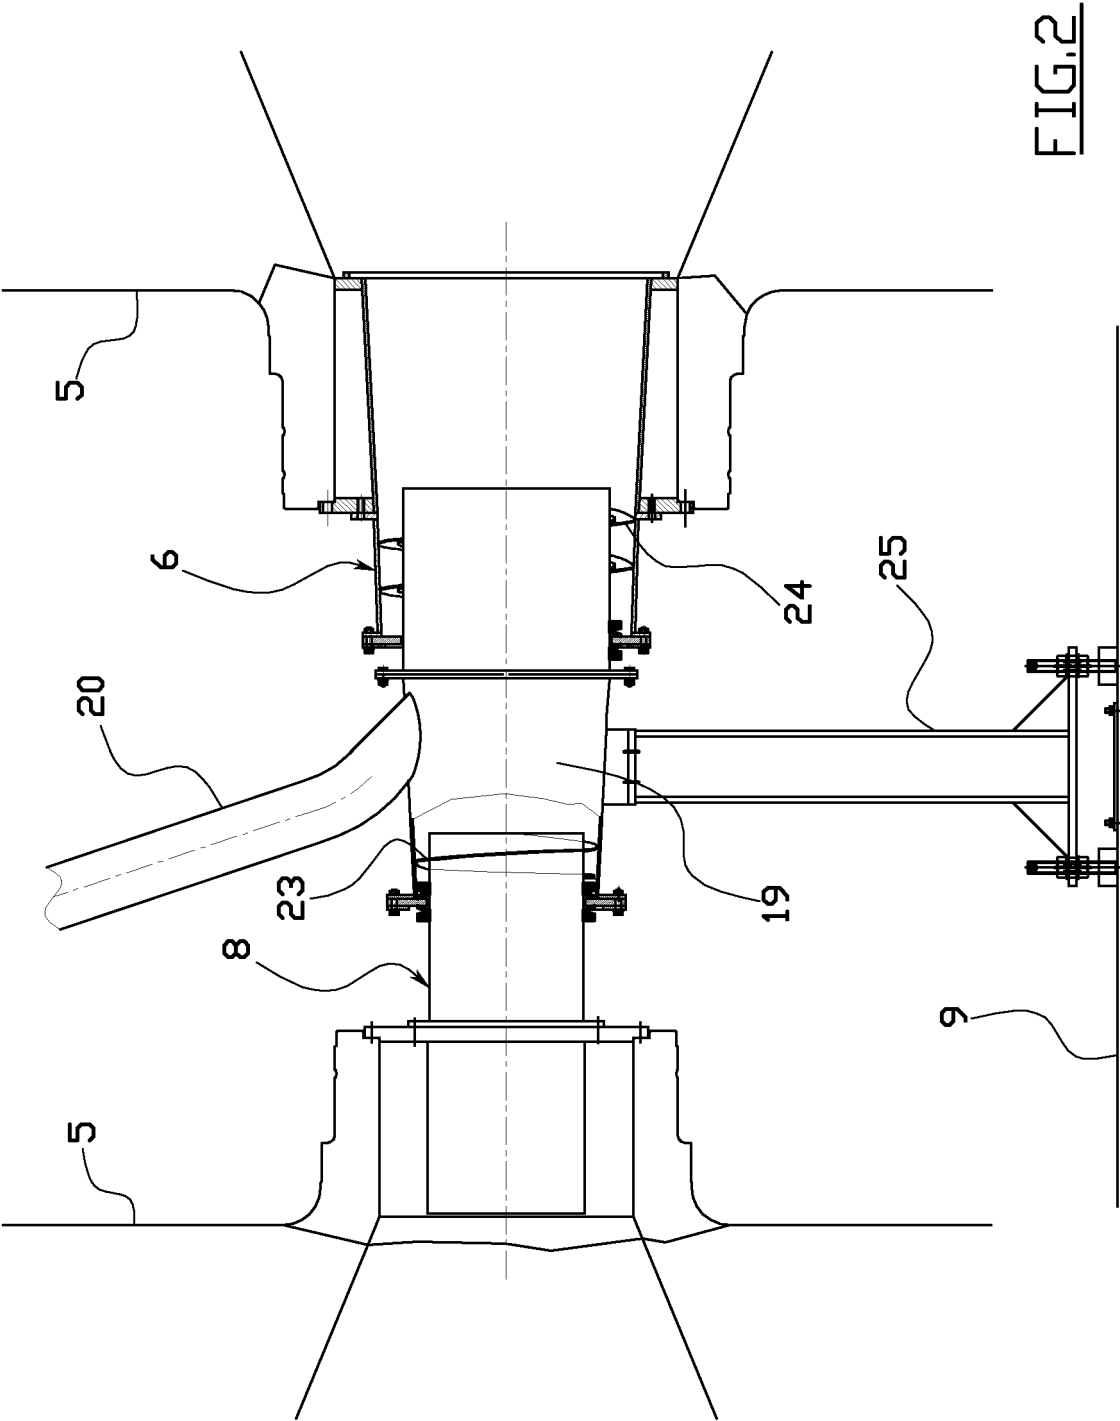


FIG. 2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 07 11 0302

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X A	US 3 942 727 A (FAHLSTROM PER ANDERS HERMAN HE ET AL) 9 March 1976 (1976-03-09) * column 4, line 67 - column 5, line 32; figure 1 *	1 2-7	INV. B02C17/18 B02C21/00
P,X	EP 1 690 598 A (SACMI [IT]) 16 August 2006 (2006-08-16) * claims 1-7; figures 1,2 *	1,6	
P,X	EP 1 690 597 A (SACMI [IT]) 16 August 2006 (2006-08-16) * claims 1-6; figures 1,2 *	1,6	
A	US 6 547 171 B1 (FONTANILLE DANIEL [FR]) 15 April 2003 (2003-04-15) * abstract; figures 1,3 *	1,4,5	
			TECHNICAL FIELDS SEARCHED (IPC)
			B02C
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 2 November 2007	Examiner Strodel, Karl-Heinz
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

2
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 07 11 0302

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-11-2007

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3942727	A	09-03-1976	AU 6776274 A	16-10-1975
			CA 1021306 A1	22-11-1977
			DE 2417537 A1	31-10-1974
			ES 425278 A1	16-05-1976
			FI 60140 B	31-08-1981
			GB 1434434 A	05-05-1976
			JP 1113339 C	16-09-1982
			JP 50007153 A	24-01-1975
			JP 57006381 B	04-02-1982
			NO 136953 B	29-08-1977
			SE 410561 B	22-10-1979
			ZA 7402167 A	30-04-1975

EP 1690598	A	16-08-2006	CN 1817601 A	16-08-2006

EP 1690597	A	16-08-2006	CN 1817600 A	16-08-2006

US 6547171	B1	15-04-2003	AT 244071 T	15-07-2003
			AU 756235 B2	09-01-2003
			AU 4412800 A	21-11-2000
			CA 2368066 A1	16-11-2000
			CN 1350478 A	22-05-2002
			CZ 20014014 A3	13-03-2002
			DE 60003678 D1	07-08-2003
			EP 1181101 A1	27-02-2002
			ES 2202116 T3	01-04-2004
			WO 0067910 A1	16-11-2000
			FR 2793168 A1	10-11-2000
			JP 2002543966 T	24-12-2002
			PL 352405 A1	25-08-2003
			ZA 200108760 A	24-10-2002

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- IT RE20030013 A [0007]