




- (51) International Patent Classification:
G06Q 10/06 (2012.01) *G06Q 10/00* (2012.01)
- (21) International Application Number:
PCT/EP2012/062968
- (22) International Filing Date:
4 July 2012 (04.07.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
11306008.1 3 August 2011 (03.08.2011) EP
- (71) Applicant (for all designated States except US): **ALCATEL LUCENT** [FR/FR]; 3, avenue Octave Gréard, F-75007 Paris (FR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **KOPP, Dieter** [DE/DE]; Brandstraße 1, 75428 Illingen (DE). **TEMPL, Wolfgang** [DE/DE]; Vaihinger Straße 46, 74372 Sersheim (DE). **STOCKER, Klaus** [DE/DE]; Zwergenweg 11, 70567 Stuttgart (DE).
- (74) Agents: **KLEINBUB, Oliver** et al.; Alcatel Lucent Intellectual Property & Standards, Lorenzstrasse 10, 70435 Stuttgart (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A METHOD, A SYSTEM, A SERVER FOR OPERATING A POWER GRID

Fig. 1

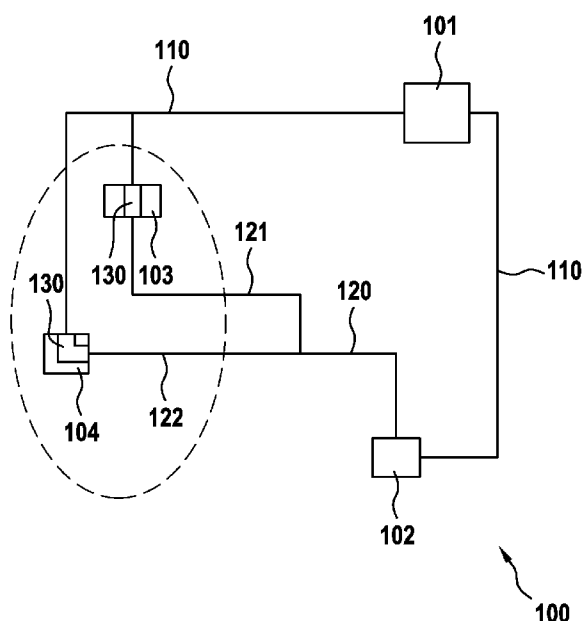

(57) Abstract: The invention concerns a method for operating a power grid (100), wherein devices (103, 104) forming part of said power grid (100) are represented as virtual resources, said method comprising the steps of - Receiving a request to access at least one virtual resource, and - Providing access to a device (103, 104) of said power grid (100) embodying the requested virtual resource.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*

A method, a system, a server for
operating a power grid

5 **Field of the invention**

The invention relates to a method, a system, a server for
operating a power grid.

Background

10 In an implementation capable of operating a power grid
individual elements, such as power plants or stations are
controlled individually. The devices controlled are known in
detail; hence changes to devices, e.g. due to temporary or
permanent outages or an exchange of devices need to be updated
consequently throughout the network.

15 **Summary**

The object of the invention is thus to provide a more
flexible control of a power grid.

20 The main idea of the invention is to operate a power grid,
wherein devices forming part of said power grid are represented
as virtual resources, with the steps of

- Receiving a request to access at least one virtual
resource, and
- Providing access to a device of said power grid embodying
the requested virtual resource.

25 Virtual resources may be accessed from outside without
detailed knowledge of their characteristic hence making

access or changes to the devices embodying the virtual resource more flexible.

Advantageously multiple devices forming part of said power grid are represented as one virtual resource, in particular as
5 a cluster. The abstraction layer of the virtual resource facilitates access.

Advantageously at least two of said devices are electrically connectable to embody a single virtual resource. Combinations increases flexibility further.

10 Advantageously multiple devices are adapted to represent the same virtual resource, wherein one of said multiple devices is selected to be made accessible to embody requested virtual resource. Redundancy increases fault tolerance.

Advantageously the steps of

15 - Determining information about a virtual resource representing at least one device of said power grid, and
- Sending information about said virtual resource are executed. This way the information about the virtual resources available is distributed.

20 Advantageously a characteristic of a first resource of said power grid, in particular if the load on a power transmission line of said power grid is below a predetermined threshold, is determined and power is transferred from a second resource, in particular a first power storage, to a third resource, in
25 particular a second power storage, via said first resource, in particular said power transmission line, depending on the characteristic, in particular in case said load is below said predetermined threshold. The individual resources are used optimally this way.

30 Further developments of the invention can be gathered from

dependent claims and the following description.

Brief description of the figures

In the following the invention will be explained further making reference to the attached drawings.

- 5 Fig. 1 schematically shows a first part of power grid
 Fig. 2 schematically shows a flow chart.

Description of the embodiments

Figure 1 shows a first part of power grid 100.

- 10 Said power grid 100 comprises a server 101 for operating said power grid 100. Said server 101 comprises a processor, a storage, an actuator, a sender and a receiver.

- Information about said power grid 100 is stored on said storage. In said information particular devices forming part of
15 said power grid 100 are represented as virtual resources

 Said processor is adapted to determine information about a virtual resource representing at least one device of said power grid.

- Said sender is adapted to send information about said virtual
20 resources, for example information about available virtual resources. In particular said sender is adapted to send said information in response to a request received. Alternatively or additionally said sender may be adapted to send said
 information frequently, e.g. in a broadcast message repeated
25 every minute. Hence available virtual resources are advertised to any interested user.

 Said receiver is adapted to receive a request to access at least one virtual resource. Said request is for example received from a client 102 via a data link 110 connecting said

client 102 with said server 101.

Said client 102 is for example a home automation computer installed in a resilient home. Said request is for example sent by said client 102 upon detection of electrical power demand
5 required by an appliance installed in said resilient home and connected to said power grid 100 via said home automation computer. Alternatively or additionally said request may be sent upon any other relevant event. For example upon detection
10 of a power supply by a solar or wind power generator installed in said resilient home and connected to said power grid 100 via said home automation computer.

Said home automation computer is for example executing a computer program adapted to determine the request to be sent to said server 101. For example in case of a power demand, a
15 request to access power is sent to said server 101. Likewise in case of a power supply a request to supply power to said power grid 100 may be sent.

Said processor is adapted to determine a device of said power grid 100 embodying the requested virtual resource to be made
20 accessible, in particular upon receipt of said request to access at least one virtual resource.

Said virtual resource may be a power generator or a power storage. In the example depicted in Figure 1, a first power storage 103 and a second power storage 104 are accessible as
25 the virtual resource "power demand". The name of the virtual resource may be chosen arbitrarily. It may be an identifier instead of a name, e.g. a number. The devices forming one virtual resource may be accessible as another virtual resource. For example a virtual resource "power supply" comprising the
30 same first power storage 103 and second power storage 104 may be defined.

According to this example, said processor is adapted to select said first power storage 103, said second power storage 104 or both to embody said virtual resource.

5 In case of a request for the virtual resource "power demand" the power storage having stored the most electrical power may be selected. Likewise in case of a request for the virtual resource "power supply" the power storage having stored the least electrical power may be selected. To that end said server 101 and said devices are for example adapted to exchange
10 information about the load status of individual devices. In the example said server 101 and said first power storage 103 or said second power storage 104 are adapted to exchange said information via said data link 110. Alternatively mathematical power grid models may be used instead of the data transfer.

15 Any other type of selection criteria may apply, e.g. distance to the requesting client 102 or cost of transport.

Said actuator is adapted to provide access to any of said devices embodying the requested virtual resource. To that end said devices comprise a remote actuator 130. Said remote
20 actuator 130 is for example a switch that is mounted to individual devices for electrically connecting individual devices to said power grid 100 upon receipt of a command from said actuator of said server 101. In this case said actuator in said server 101 and said remote actuator 130 are for example
25 adapted to communicate via a data link 110.

Providing access to a device of said power grid embodying the requested virtual resource in this context refers to the aforementioned steps of selecting and actuating.

As describe above, multiple devices forming part of said
30 power grid 100 are represented as one virtual resource, e.g. "power demand" or "power supply", in particular as a cluster.

This is depicted in figure 1 as dashed circle around said first power storage 103 and said second power storage 104.

This means that on the one hand from the multiple devices adapted to represent the same virtual resource, one of said
5 multiple devices may be selected to be made accessible to embody requested virtual resource.

On the other hand said devices may be electrically connectable to embody a single virtual resource. As depicted in figure 1, said client 102 is connected via a first power line
10 120 to one end of a second power line 121 and one end of a third power line 122. The other end of said second power line 121 is connected to said first power storage 103 and the other end of said third power line 122 is connected to said second power storage 104. This also means that said first power
15 storage 103 and said second power storage 104 are electrically connectable, e.g. by connecting both devices to said power grid 100 at the same time. This means that a single virtual resource may in fact comprise of multiple devices. The devices in the example are of the same kind, i.e. power storages. However the
20 invention extends to any mix of electrical devices selectable to form a virtual resource. In particular power generators or or a battery, e.g. of a electrical vehicle, may be within the same virtual resource of "power demand" together with
aforementioned power storages 103, 104. Furthermore any type of
25 power sinks, such a pump for pumping up water in a storage of a hydro-electrical power plant or a battery, e.g. of a electrical vehicle, may be part of the virtual resource "power supply".

Furthermore said processor may be adapted to determine a characteristic of a first resource of said power grid 100, in
30 particular a power transmission line of said power grid 100 is below a predetermined threshold. In the example depicted in figure one, said power transmission line for example comprises

said second power line 121 and said third power line 122. For example the power transfer load on said second power transmission line 121 and said third power transmission line 122 is said characteristic and is compared to said

5 predetermined threshold.

Furthermore said server 101 is in this case adapted to cause transfer power from a second resource, in particular said first power storage 103, to a third resource, in particular said second power storage 104, via said first resource, in particular said power transmission line, depending on the characteristic, in particular in case said load is below said predetermined threshold.

A method for operating said power grid 100 is described below making reference to figure 2. Said method starts for example upon trigger by a user starting a program on said server 101.

Afterwards a step 200 is executed.

In said step 200, information about available virtual resources is read from storage. Said information may have been stored by an operator or may be updated frequently from input received via said data link 110. Afterwards a step 201 is executed.

In said step 201 a message comprising information about said available virtual resources is broadcasted. Afterwards a step 202 is executed.

25 Said steps 200 and 201 are optional and may be performed only once at program start or omitted in case said information about said virtual resources is static.

In said step 202 a test is performed to determine whether a request for a virtual resource has been received. In case said request has been received, a step 203 is executed. Otherwise said step 200 is executed. Alternatively said step 201 may be

executed, when the information about virtual resources is static. Optionally a fix or adjustable time delay, e.g. of 1 minute may be introduced before executing said step 200 or 201 again.

5 In said step 203 a device appropriate for embodying the requested virtual resource is selected. For example, in case a request for said virtual resource "power demand" is received, either said first power storage 103 or said second power storage 104 are selected depending on their respective load
10 status, requested or received by said server 101 via said data link 110. Afterwards a step 204 is executed.

In said step 204 the virtual resource is provided by providing access to the selected device. For example said actuator is triggering said remote actuator to electrically
15 connect said first power storage 103 or said second power storage 104 to said power grid 100.

Afterwards a step 205 is executed.

In said step 205 a test is performed to determine if a request to stop accessing a previously requested virtual
20 resource has been received. In case such request has been received, a step 206 is executed. Otherwise said step 200 is executed.

In said step 206 the device embodying the previously requested virtual resource is reset to the state from before
25 the request to start accessing. For example said device is disconnected from the power grid 100 via said actuator, remote actuator 130. Afterwards said step 200 is executed.

Said method ends for example upon receipt of a trigger by a
30 user terminating said program on said server 101.

To use the individual virtual resources optimally, the characteristic of a first resource of said power grid 100 may be determined. In this case power is transferred from a second resource, in particular said first power storage 103, to a
5 third resource, in particular said second power storage 104, via said first resource, in particular said power transmission line, depending on the characteristic. For example if the load on the power transmission line of said power grid 100 is below
10 said predetermined threshold said power transmission line may carry more load. In this case said power may be transferred in order to make said power available to said client 102 faster upon a later demand. This is particularly effective in case
15 said first power storage 103 is far from said client 102 and said second power storage 104 is close to said client 102. In this case the selection process described above may consider
said second power storage 104 as preferred device for embodying said virtual resource "power demand" and select it. With the additional step of transferring power from said first power
20 storage 103 to said second power storage 104, the power available in said second power storage 104 is kept at the appropriate level without overloading the power transmission line.

Said data link 110 is for example a local area network (LAN), wireless local area network (WLAN, 802.11n) or wide area
25 network (WAN). Said connection is for example according to the well known internet protocol (IP), user datagram protocol (UDP), transmission control protocol (TCP) or stream control
transmission protocol (SCTP). Signaling is for example according to the well known Simple Object Access Protocol
30 (SOAP), Representational State Transfer (REST) or session initiation protocol (SIP) or Internet Protocol Multimedia Subsystem (IMS). Addressing may be done using the well known

uniform resource locators (URL), uniform resource identifiers (URI).

The connection can but must not be directly between the devices. The typical use is on wide area networks with multiple
5 intermediate devices.

The description and drawings merely illustrate the principles of the invention. It will thus be appreciated that those skilled in the art will be able to devise various arrangements that, although not explicitly described or shown herein, embody
10 the principles of the invention and are included within its spirit and scope. Furthermore, all examples recited herein are principally intended expressly to be only for pedagogical purposes to aid the reader in understanding the principles of the invention and the concepts contributed by the inventor(s)
15 to furthering the art, and are to be construed as being without limitation to such specifically recited examples and conditions. Moreover, all statements herein reciting principles, aspects, and embodiments of the invention, as well as specific examples thereof, are intended to encompass
20 equivalents thereof.

The functions of the various elements shown in the figures, including any functional blocks labeled as 'processors', may be provided through the use of dedicated hardware as well as hardware capable of executing software in association with
25 appropriate software. When provided by a processor, the functions may be provided by a single dedicated processor, by a single shared processor, or by a plurality of individual processors, some of which may be shared. Moreover, explicit use of the term 'processor' or 'controller' should not be construed
30 to refer exclusively to hardware capable of executing software, and may implicitly include, without limitation, digital signal processor (DSP) hardware, network processor, application

specific integrated circuit (ASIC), field programmable gate array (FPGA), read only memory (ROM) for storing software, random access memory (RAM), and non volatile storage. Other hardware, conventional and/or custom, may also be included.

5 Similarly, any switches shown in the figures are conceptual only. Their function may be carried out through the operation of program logic, through dedicated logic, through the interaction of program control and dedicated logic, or even manually, the particular technique being selectable by the
10 implementer as more specifically understood from the context.

It should be appreciated by those skilled in the art that any block diagrams herein represent conceptual views of illustrative circuitry embodying the principles of the invention. Similarly, it will be appreciated that any flow
15 charts and the like represent various processes which may be substantially represented in computer readable medium and so executed by a computer or processor, whether or not such computer or processor is explicitly shown.

A person of skill in the art would readily recognize that
20 steps of various above-described methods can be performed by programmed computers. Herein, some embodiments are also intended to cover program storage devices, e.g., digital data storage media, which are machine or computer readable and encode machine-executable or computer-executable programs of
25 instructions, wherein said instructions perform some or all of the steps of said above-described methods. The program storage devices may be, e.g., digital memories, magnetic storage media such as a magnetic disks and magnetic tapes, hard drives, or optically readable digital data storage media. The embodiments
30 are also intended to cover computers programmed to perform said steps of the above-described methods.

Claims

1. A method for operating a power grid (100), **wherein** devices
5 (103, 104, 121, 122) forming part of said power grid (100)
are represented as virtual resources, said method
comprising the steps of
 - Receiving (202) a request to access at least one
virtual resource, and
 - 10 - Providing (204) access to a device (103, 104) of said
power grid (100) embodying the requested virtual
resource.
2. The method according to claim 1, wherein multiple devices
(103, 104, 121, 122) forming part of said power grid (100)
15 are represented as one virtual resource, in particular as
a cluster.
3. The method according to claim 1, wherein at least two of
said devices (103, 104, 121, 122) are electrically
connectable to embody a single virtual resource.
- 20 4. The method according to claim 1, wherein multiple devices
(103, 104, 121, 122) are adapted to represent the same
virtual resource, wherein at least one of said multiple
devices (103, 104, 121, 122) is selected (203) to be made
accessible to embody requested virtual resource.
- 25 5. The method according to claim 1, further comprising the
steps of
 - Determining (200) information about a virtual resource
representing at least one device (103, 104, 121, 122)
of said power grid (100), and
 - 30 - Sending (201) information about said virtual resource.

6. The method according to claim 1, further comprising the step of determining a characteristic of a first resource (121, 122) of said power grid (100), in particular if the load on a power transmission line of said power grid (100) is below a predetermined threshold, and to transfer power from a second resource (103), in particular a first power storage, to a third resource (104), in particular a second power storage, via said first resource (121, 122), in particular said power transmission line, depending on the characteristic, in particular in case said load is below said predetermined threshold.
7. A server for operating a power grid (100), **wherein** devices (103, 104, 121, 122) forming part of said power grid (100) are represented as virtual resources, comprising
- A receiver adapted to receive (202) a request to access at least one virtual resource, and
 - A processor adapted to determine (203) a device (103, 104) of said power grid (100) embodying the requested virtual resource to be made accessible.
8. The server according to claim 7, comprising
- A sender adapted to send (201) information about said virtual resources.
9. The server according to claim 7, comprising
- An actuator adapted to provide access (204) to said device (103, 104, 121, 122) embodying the requested virtual resource.
10. The server according to claim 7, comprising
- A processor adapted to determine (200) information about a virtual resource representing at least on

device (103, 104, 121, 122) of said power grid (100),
and

- A sender adapted to send (201) information about said virtual resource.

5 11. A system for operating a power grid (100), **wherein**
devices (103, 104, 121, 122) forming part of said power
grid (100) are represented as virtual resources,
comprising

- 10 - A receiver adapted to receive (202) a request to
access at least one virtual resource,
- A processor adapted to determine (203) a device (103,
104, 121, 122) of said power grid (100) embodying the
requested virtual resource to be made accessible, and
- 15 - An actuator adapted to make said device (103, 104,
121, 122) of said power grid (100) embodying the
requested virtual resource accessible (204).


12. A computer program, **wherein** said computer program, when
executed on a computer, causes the computer to perform the
steps of the method according to claim 1.

20 13. A computer program product comprising a computer usable
medium having a computer readable program, **wherein** said
computer readable program, when executed on a computer,
causes the computer to perform the steps of the method
according to claim 1.

25


1 / 2

Fig. 1

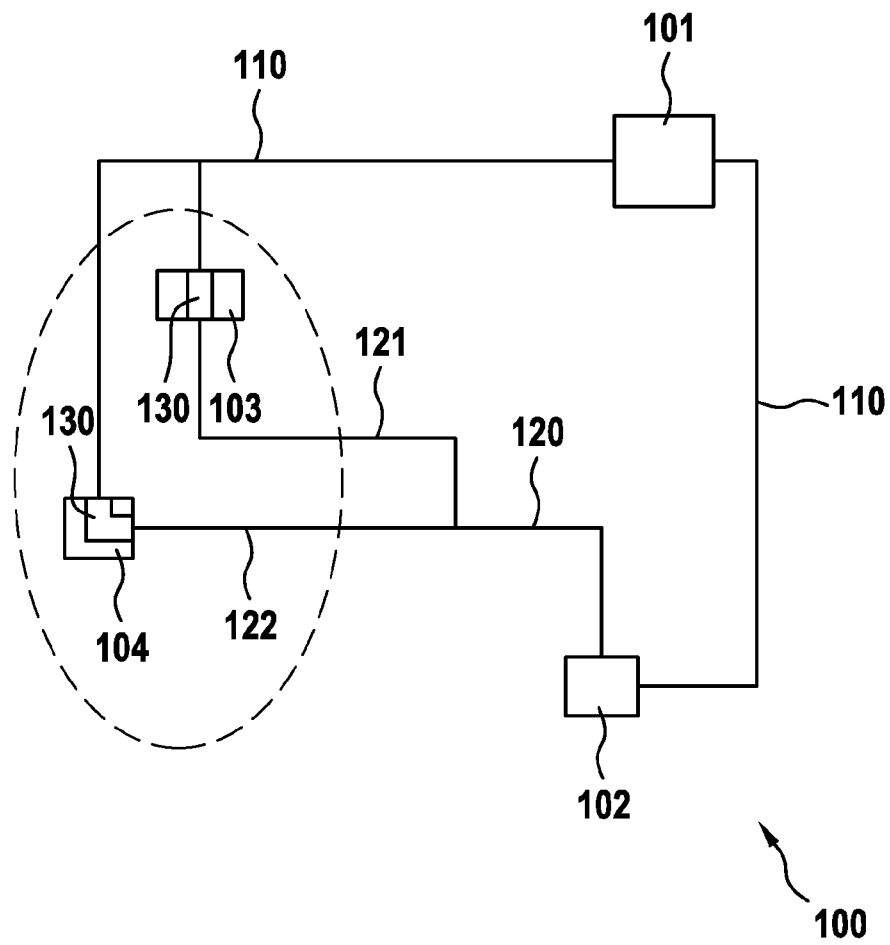

2 / 2

Fig. 2

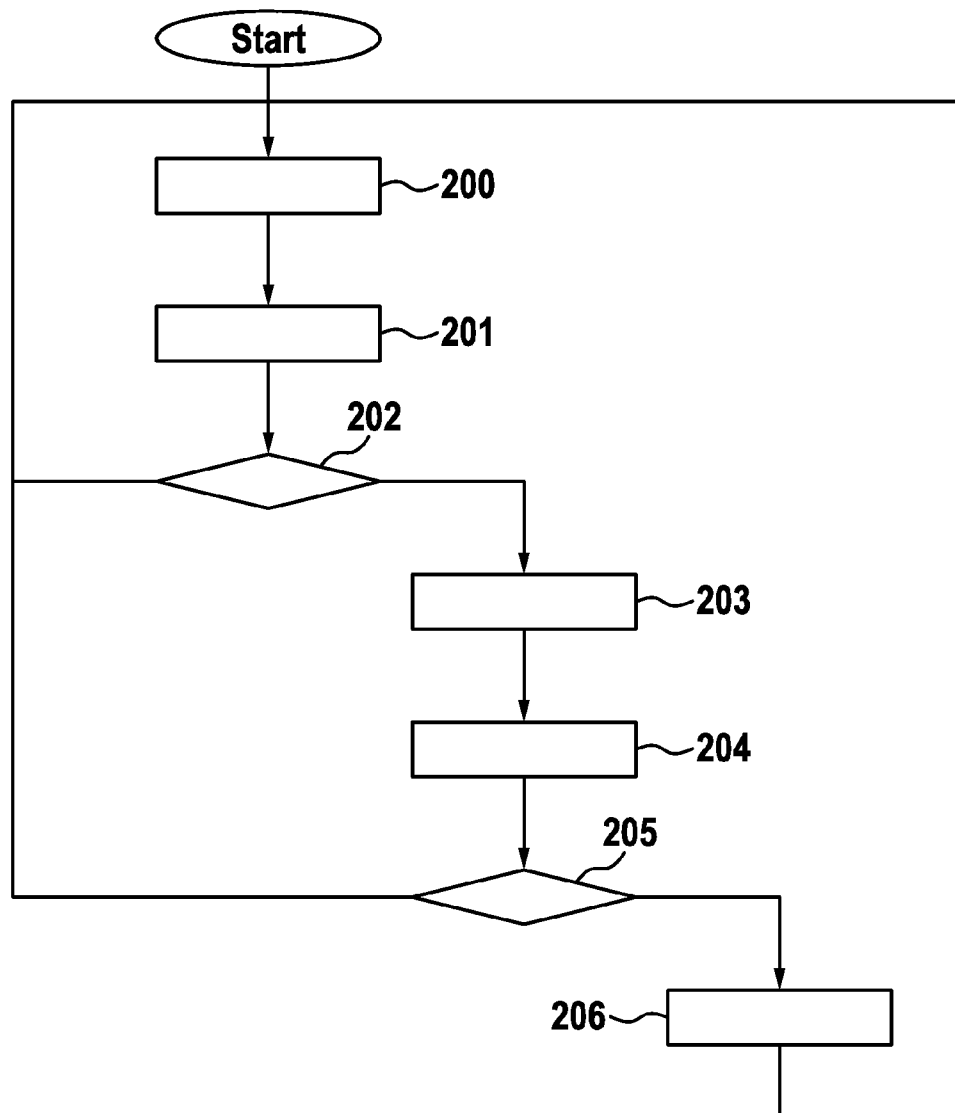

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/062968

A. CLASSIFICATION OF SUBJECT MATTER

INV. G06Q10/06 G06Q10/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06Q H04L G06F H02J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010/050173 A1 (HENSBERGEN ERIC VAN [US]) 25 February 2010 (2010-02-25) abstract paragraph [0004] paragraph [0019] paragraph [0021] - paragraph [0022] paragraph [0024] paragraph [0027] - paragraph [0031] claim 1 ----- -/--	1-13



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 July 2012

Date of mailing of the international search report

01/08/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Moltenbrey, Michael

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/062968

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010/198972 A1 (UMBEHOCKER STEVEN MICHAEL [US]) 5 August 2010 (2010-08-05) abstract paragraph [0004] - paragraph [0006] paragraph [0034] paragraph [0051] - paragraph [0054] paragraph [0058] paragraph [0061] - paragraph [0066] paragraph [0104] paragraph [0177] - paragraph [0180] -----	1-13
A	US 2003/063723 A1 (BOOTH DEREK [US] ET AL) 3 April 2003 (2003-04-03) abstract paragraph [0007] - paragraph [0009] paragraph [0037] - paragraph [0038] paragraph [0041] - paragraph [0042] paragraph [0045] paragraph [0047] paragraph [0050] paragraph [0054] paragraph [0059] - paragraph [0064] -----	1-13
A	EP 2 159 749 A1 (ALCATEL LUCENT [FR]) 3 March 2010 (2010-03-03) the whole document -----	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/062968

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010050173 A1	25-02-2010	CA 2734069 A1 CN 102132256 A EP 2344953 A1 JP 2012501021 A KR 20110052714 A TW 201019132 A US 2010050173 A1 WO 2010023139 A1	04-03-2010 20-07-2011 20-07-2011 12-01-2012 18-05-2011 16-05-2010 25-02-2010 04-03-2010
US 2010198972 A1	05-08-2010	CN 102292698 A CN 102292699 A EP 2394212 A1 EP 2394213 A1 US 2010198972 A1 US 2010199037 A1 US 2010199276 A1 WO 2010090883 A1 WO 2010090899 A1	21-12-2011 21-12-2011 14-12-2011 14-12-2011 05-08-2010 05-08-2010 05-08-2010 12-08-2010 12-08-2010
US 2003063723 A1	03-04-2003	CA 2465941 A1 EP 1446937 A1 MX PA04003987 A US 2003063723 A1 US 2005240315 A1 WO 03030509 A1	10-04-2003 18-08-2004 26-07-2005 03-04-2003 27-10-2005 10-04-2003
EP 2159749 A1	03-03-2010	NONE	