



(51) International Patent Classification:

G08G 1/01 (2006.01) G08G 1/0968 (2006.01)

(21) International Application Number:

PCT/US2018/055754

(22) International Filing Date:

13 October 2018 (13.10.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/789,843 20 October 2017 (20.10.2017) US

(71) Applicant: **MICROSOFT TECHNOLOGY LICENSING, LLC** [US/US]; One Microsoft Way, Redmond, Washington 98052-6399 (US).

(72) Inventors: **SCHLESINGER, Benny**; Microsoft Technology Licensing, LLC, One Microsoft Way, Redmond, Washington 98052-6399 (US). **WEINBERG, Shira**; Microsoft Technology Licensing, LLC, One Microsoft Way, Redmond, Washington 98052-6399 (US).

(74) Agent: **MINHAS, Sandip S.** et al.; Microsoft Technology Licensing, LLC, One Microsoft Way, Redmond, Washington 98052-6399 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: TRAFFIC DATA RECONCILIATION AND BROKERING

(57) Abstract: Traffic data reconciliation and brokering are provided. A traffic data brokering system ingests traffic-related data provided from a plurality of data sources, analyzes the data, and reconciles the data for identifying accurate, up-to-date, and comprehensive traffic data. The system identifies current traffic conditions based on identified relationships between pieces of received data, calculates confidence scores, and determines which pieces of data are accurate based on the calculated confidence scores. The traffic data brokering system provides the reconciled traffic data to various users of traffic data, such as individuals or third-party services. One aspect includes a route generation engine that determines and provides recommended route(s) to clients. Another aspect includes a forecast engine that predicts traffic conditions based on past traffic data. The forecasted data can be used to determine recommended routes. The system provides APIs for enabling sources and clients to provide and receive traffic data.

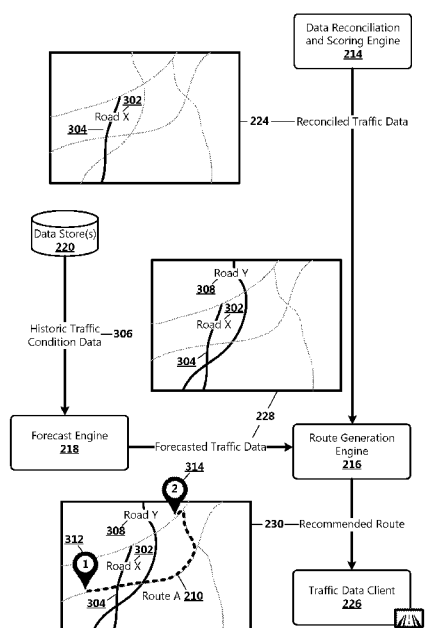


FIG. 3

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

TRAFFIC DATA RECONCILIATION AND BROKERING

BACKGROUND

[0001] A variety of mapping or navigation services exist that provide applications for helping users to navigate to their destinations. Each existing service typically comprises a backend service for collecting and reconciling traffic data for its own use. Accordingly, existing navigation services use traffic data that may be incomplete and prone to errors. Further, because each service is collecting its own traffic data, it can take longer for a service to collect enough information to confidently identify a traffic condition. Therefore, users may not receive information related to road hazards or traffic conditions in time to avoid them.

SUMMARY

[0002] This Summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description section. This Summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended as an aid in determining the scope of the claimed subject matter.

[0003] Aspects are directed to an automated system, method, and computer readable storage device for providing traffic data reconciliation and brokering. For example, a traffic data brokering system is provided that serves as a trusted source of traffic data to multiple consumers of traffic data. The traffic data brokering system is operative or configured to collect traffic-related data from a plurality of sources, reconcile the collected data, and provide reconciled traffic data to various users of traffic data, such as individuals or third-party services. Advantageously, traffic data users are provided with complete and accurate traffic data. Additionally, in some examples, the traffic data brokering system determines and provides recommended route(s) to requesting clients. In other examples, the traffic data brokering system learns traffic condition patterns based on past traffic data and predicts traffic conditions based on the learned patterns. The forecasted data can be used to determine efficient routes and to recommend the routes to requesting clients. The traffic data brokering system provides APIs (Application Programming Interfaces) for enabling sources and clients to provide and receive traffic data.

[0004] Examples are implemented as a computer process, a computing system, or as an article of manufacture such as a device, computer program product, or computer readable medium. According to an aspect, the computer program product is a computer storage medium readable by a computer system and encoding a computer program of

instructions for executing a computer process.

[0005] The details of one or more aspects are set forth in the accompanying drawings and description below. Other features and advantages will be apparent from a reading of the following Detailed Description and a review of the associated drawings. It is to be understood that the following Detailed Description is explanatory only and is not restrictive of the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The accompanying drawings, which are incorporated in and constitute a part of this disclosure, illustrate various aspects. In the drawings:

FIGURE 1 is a block diagram showing an example operating environment for implementing aspects of the present disclosure;

FIGURE 2 is a block diagram showing an example computing architecture for implementing aspects of the present disclosure;

FIGURE 3 shows an example use case scenario;

FIGURE 4 is a flow chart showing general stages involved in an example method for providing traffic data reconciliation and brokering;

FIGURE 5 is a block diagram illustrating example physical components of a computing device;

FIGURES 6A and 6B are simplified block diagrams of a mobile computing device; and

FIGURE 7 is a simplified block diagram of a distributed computing system.

DETAILED DESCRIPTION

[0007] The following Detailed Description refers to the accompanying drawings. Wherever possible, the same reference numbers are used in the drawings and the following description refers to the same or similar elements. While examples may be described, modifications, adaptations, and other implementations are possible. For example, substitutions, additions, or modifications may be made to the elements illustrated in the drawings, and the methods described herein may be modified by substituting, reordering, or adding stages to the disclosed methods. Accordingly, the following Detailed Description is not limiting, but instead, the proper scope is defined by the appended claims. Examples may take the form of a hardware implementation, or an entirely software implementation, or an implementation combining software and hardware aspects. The following Detailed Description is, therefore, not to be taken in a limiting sense.

[0008] Aspects of the present disclosure are directed to a method, system, and

computer readable storage device for providing traffic data reconciliation and brokering. Among other benefits, traffic data reconciliation and brokering enables the generation of reliable, accurate, and timely traffic data based on reconciliation of a variety of data from a plurality of data sources. As used herein, the term “to broker” and terms related to “brokering” shall be understood to include operations as a trusted intermediary between assorted sources of traffic-related data and consumers of traffic-related data to aggregate and provide data that have been reconciled to ensure that the data are reliable, accurate, comprehensive, and relevant. Further, as used herein, the term “to reconcile” and terms related to “reconciling” shall be understood to include operations associated with corroborating a piece of traffic-related data with other received data, analyzing the reliability of data from different services over time, accepting a confidence level for each piece of data it receives, and rating the traffic data from each party based on the safety record of the data provider. With reference now to **FIGURE 1**, a block diagram is provided showing an example operating environment **100** in which aspects of the present disclosure can be employed. It should be understood that this and other arrangements described herein are provided as examples. Other arrangements and elements can be used in addition to or instead of those shown in **FIGURE 1**. Various functions described herein as being performed by one or more elements or components can be carried out by hardware, firmware, and/or software. For example, some functions can be carried out by a processor executing instructions stored in memory.

[0009] As illustrated, the example operating environment **100** includes one or more client computing devices **102a-n** (generally **102**), a plurality of data sources **104a-n** (generally **104**), one or more servers **106a-n** (generally **106**), sensors **108a-n** (generally **108**), and a network **110** or a combination of networks. Each of the components illustrated in **FIGURE 1** can be implemented via any type of computing device, such as the computing devices **500**, **600**, and **705a,b,c** described in reference to **FIGURES 5**, **6A**, **6B**, and **7**. As an example, the one or more computing devices **102** can be one of various types of computing devices, such as tablet computing devices, desktop computers, mobile communication devices, laptop computers, laptop/tablet hybrid computing devices, large screen multi-touch displays, vehicle computing systems, gaming devices, smart televisions, wearable devices, speaker devices, internet of things (IoT) devices, navigation computing devices, etc.

[0010] The components can communicate with each other via a network **110**, which can include, without limitation, one or more local area networks (LANs) or wide area

networks (WANs). In some examples, the network **110** comprises the Internet and/or a cellular network, amongst any of a variety of possible public or private networks. As should be appreciated, any number of computing devices **102**, data sources **104**, and servers **106** can be employed within the example operating environment **100** within the scope of the present disclosure. Each can comprise a single device or a plurality of devices cooperating in a distributed environment. For example, the server **106** can be provided via multiple devices arranged in a distributed environment that collectively provide various functionalities described herein. In some examples, other components not shown can be included within the distributed operating environment **100**.

[0011] According to an aspect, the plurality of data sources **104** can comprise data sources or data systems that are configured to make data available to any of the various components of operating environment **100** or of the example traffic data brokering system **210** described below with reference to **FIGURE 2**. In some examples, the plurality of data sources **104** are discrete from the one or more computing devices **102** and the at least one server **106**. In other examples, the one or more data sources **104** are incorporated or integrated into at least one of the computing devices **102** or servers **106**.

[0012] The example operating environment **100** can be used to implement one or more of the components of the example traffic data brokering system **210** described in **FIGURE 2**, including components for providing traffic data reconciliation and brokering.

For example, aspects of the example traffic data brokering system **210** broker traffic data between sources of traffic data and users of traffic data. That is, the traffic data brokering system **210** serves as a trusted intermediary between traffic-related data sources **222a-n** (generally, **222**) and consumers to provide traffic data that have been reconciled to ensure that the traffic data provided to traffic data consumers are reliable, accurate, and relevant.

Aspects of the traffic data brokering system **210** are operative or configured to collect and aggregate traffic-related data **208** from a plurality of traffic-related data sources **222**, and reconcile the collected data for provision to various traffic data clients **226a-n** (generally, **226**) by one or more of: analyzing the reliability of the data from different services over time and rating the data from the different services based on a safety record of the traffic-related data source **222**, accepting a confidence level for each piece of data it accepts, and corroborating the data with data received from other sources. A block diagram is provided that shows aspects of an example computing system architecture suitable for implementing various aspects of the present disclosure. The traffic data brokering system **210** represents only one example of a suitable computing system architecture. Other arrangements and

elements can be used in addition to or instead of the elements shown. As should be appreciated, elements described herein are functional entities that can be implemented as discrete or distributed components, or in conjunction with other components, and in any suitable combination or location. In some examples, components of the traffic data brokering system **210** are implemented on a client computing device **102**. In other examples components of the traffic data brokering system **210** are implemented on one or a plurality of servers **106**. For example, a server **106** is operative or configured to provide data to and receive data from the client computing device **102** through a network **110** or a combination of networks. In some examples, the traffic data brokering system **210** is a hybrid system that includes the client computing device **102** in conjunction with one or more servers **106**. The hardware of these computing devices is discussed in greater detail in regard to **FIGURES 5, 6A, 6B, and 7.**

[0013] With reference now to **FIGURE 2**, the example traffic data brokering system **210** includes a data collector **212**, a data reconciliation and scoring engine **214**, a route generation engine **216**, a forecast engine **218**, and one or more data stores **220**. The data collector **212** is illustrative of a software module, software package, system, or device operative or configured to receive or collect a variety of traffic-related data **208** from various traffic-related data sources **222**. Examples of traffic-related data sources **222** include such sources as: news sources, weather information sources, social networks, traffic condition sources (e.g., traffic cameras, road sensors), local, state, or federal transportation agencies, navigation services, mobile service providers, event information sources, school schedule sources, etc. Traffic-related data **208** that are collected can include road construction information, road closure information, traffic incident information, traffic condition information, safety and road hazard information, weather-related information, event-related information, schools' schedule information, and the like. According to one aspect, the data shared by a traffic-related data source **222** can be limited, in particular, data shared by competing navigation services. In some examples, the amount or type of data shared by certain traffic-related data sources **222** can be mandated (e.g., road hazard information, safety information) in accordance with laws enacted with the intention to reduce traffic accidents and to save lives.

[0014] In various examples, traffic-related data sources **222** can include a plurality of client computing devices **102** (e.g., mobile devices, vehicle computing systems, navigation computing devices) that are operative or configured to provide traffic-related data **208** collected by various sensors **108** integrated in or communicatively attached to the

computing devices and/or traffic-related data **208** input by users of the computing devices. According to an aspect, the data collector **212** is further operative or configured to receive other data **232** (e.g., map data, points of interest (POI) data, business-related data, contacts data, calendar and schedule data) from one or more other data sources **104** (e.g., map data providers, social networks, business directories, contacts lists, calendars). Other traffic-related data sources **222** and other data sources **104** are possible and are within the scope of the present disclosure.

[0015] The sensors **108** can be embodied as hardware, software, or a combination of hardware and software operative to sense, detect, or otherwise obtain traffic-related data **208**. For example, sensors **108** can include such sensors as global positioning system (GPS) receivers, gyroscopes, accelerometers, speedometers, wireless network receivers, cameras, or other detector component(s) operative or configured to sense or determine traffic-related data **208** (e.g., location, motion, speed, orientation, position, wireless network data, device pairings, gyroscope data, accelerometer data, weather, news (including popular or trending items on search engines or social networks), GPS signals, social network data).

[0016] According to an aspect, the traffic data brokering system **210** is operative or configured to provide one or more APIs (Application Programming Interfaces) **206** for enabling the traffic data brokering system **210** to ingest traffic-related data **208** from the plurality of traffic-related data sources **222** and other data **232** from other data sources **104**. For example, the one or more APIs **206** are configured to enable communication of traffic-related data **208** between a traffic-related data source **222** and the traffic data brokering system **210** and communication of other data **232** between another data source **104** and the traffic data brokering system **210**. According to another aspect, the data collector **212** is operative or configured to stamp received data (i.e., traffic-related data **208** and other data **232**) with a source stamp (e.g., identifying the traffic-related data source **222** or other data source **104** from which the data are received) and a time stamp. According to another aspect, the data collector **212** is further operative or configured to store the collected data **208**, **232** in one or more data stores **220**, where the data can be available to other components of the traffic data brokering system **210**.

[0017] The data reconciliation and scoring engine **214** is illustrative of a software module, software package, system, or device operative or configured to reconcile the traffic-related data **208** collected from various traffic-related data sources **222** for confidently identifying accurate and comprehensive traffic conditions to broker to various traffic data clients **226**. According to an aspect, the data reconciliation and scoring engine **214** applies

machine learning, statistical analysis, behavioral analytics, and data mining techniques to received traffic-related data **208** for understanding the data, for example, to identify particular traffic conditions. In reconciling the received traffic-related data **208**, the data reconciliation and scoring engine **214** identifies particular traffic conditions based on identified relationships between pieces of received traffic-related data, for example, according to one or a combination of location, time, event, school schedule, traffic condition, weather condition, road condition, and news related matter. An example of an identified traffic condition is stand-still traffic along a particular route due to a college football game. Other non-limiting examples of traffic conditions include an icy road (e.g., based on crowd-sourced data received from a plurality of client computing devices **102**), heavy traffic on a particular road due to a wreck, and a road hazard at a particular location.

[0018] According to an aspect, the data reconciliation and scoring engine **214** is further operative or configured to calculate a confidence score for received traffic-related data **208**. In some examples, traffic-related data sources **222** provide a confidence score associated with each piece of traffic-related data **208** that they provide to the traffic data brokering system **210**. In other examples, the data reconciliation and scoring engine **214** calculates a confidence score for a piece of received traffic-related data **208** based on one or a combination of a traffic-related data source-provided confidence score, the traffic-related data source **222**, corroboration of the piece of traffic-related data with other received traffic-related data, the particular traffic condition, and the age of the piece of traffic-related data. For example, a weight can be assigned to a particular traffic-related data source **222** based on a determined reliability of the source (e.g., reports from news sources are less accurate than traffic alerts based on vehicle sensors **108**). As another example, a weight can be assigned to a particular traffic-related data source **222** for a particular traffic condition based on a determined reliability (e.g., a higher weight may be assigned to data from a data source that, based on historic data, is consistently accurate in reporting road hazards, a lower weight may be assigned to data from a data source that, based on historic data, is repeatedly inaccurate in reporting visibility conditions). As can be appreciated, the traffic data brokering system **210** has a full view of the traffic-related data **208** it receives, and thus can associate a credibility coefficient for each traffic-related data source **222** and use the credibility coefficient when calculating the confidence score of traffic-related data provided by particular traffic-related data sources. In some examples, traffic-related data **208** received from trusted traffic-related data sources **222** are confirmed more expeditiously (e.g., via assignment of a higher confidence score) than traffic-related data received from other less-

trusted traffic-related data sources. As can be appreciated, traffic-related data **208** provided from different traffic-related data sources **222** can have some deviation in their properties (e.g., exact location, time of incident, number of automobiles involved). According to an aspect, when combining traffic-related data **208** and corroborating a piece of traffic-related data with other received traffic-related data, the data reconciliation and scoring engine **214** is operative or configured to apply a tolerance level towards a certain level of deviation in such properties. Accordingly, various pieces of traffic-related data **208** received from different traffic-related data sources **222** that are within the certain level of deviation can be determined to be associated with a single traffic condition.

[0019] According to an aspect, the data reconciliation and scoring engine **214** determines which pieces of received traffic-related data **208** are accurate based on the calculated confidence scores (e.g., highest ranking data, data with an associated confidence score that satisfies a threshold), and provides the reconciled traffic data **224** to one or more traffic data clients **226a-n** (generally **226**). In some examples, traffic data clients **226** include various third-party systems (e.g., navigation services, news services, social media services, local, state, or federal transportation agencies, mobile service providers, websites). In other examples, traffic data clients **226** include client computing devices **102**, for example, on which one or more applications or a personal digital assistant operates and exposes the reconciled traffic data **224** to users. According to an aspect, the traffic data brokering system **210** is operative or configured to provide one or more APIs **206** for enabling traffic data clients **226** to access the reconciled traffic data **224**. For example, the one or more APIs **206** are configured to enable a traffic data client **226** to access and utilize the reconciled traffic data **224**, for example, for display to users, for notifying users, for combining with third-party data, for backend processing uses, etc.

[0020] According to some examples, the data reconciliation and scoring engine **214** stores reconciled traffic data **224** in one or more data stores **220** such that the data can be made available to other components of the traffic data brokering system **210**. According to an aspect, the data collector **212** continually updates the one or more data stores **220** with reconciled traffic data **224**. According to another aspect, the data reconciliation and scoring engine **214** is further operative or configured to apply a time decay factor to reconciled traffic data **224**. The time decay factor can be a default factor based on the traffic condition according to historic data (e.g., one hour time decay factor for an automobile accident).

[0021] The route generation engine **216**, illustrative of a software module, software package, system, or device, is operative or configured to determine one or more routes

between locations based on identified traffic conditions **304** in the reconciled traffic data **224**. According to an aspect, the route generation engine **216** retrieves map or navigation data (e.g., other data **232**) from a map or navigation data source (e.g., data source **104**) and merges identified traffic conditions with the map or navigation data to identify routes
5 between two location points, calculate metrics such as distances and estimated travel times based on the reconciled traffic data **224** associated with the identified routes, determines one or more recommended routes **230** based on the calculated metrics, and provides the one or more recommended routes **230** to requesting traffic data clients **226** via an API **206**.

[0022] In some examples, the forecast engine **218**, illustrative of a software module,
10 software package, system, or device, is operative or configured to access reconciled traffic data **224** for forecasting various traffic condition factors based on traffic patterns learned from collected historic traffic condition data. For example, the forecast engine **218** is a machine learning (ML) engine that applies statistical analysis, behavioral analytics, and data mining techniques to historic traffic condition data and other data **232**, such as information
15 collected from social media sources, news sources, user input, etc., for identifying characteristics of traffic conditions and learning and understanding patterns associated with traffic conditions that have shared or similar characteristics. Accordingly, the forecast engine **218** can predict traffic-related issues (i.e., forecasted traffic data **228**) that are likely to occur based on past data.

[0023] According to an aspect, the forecast engine **218** is operative or configured to
20 provide forecasted traffic data **228** to requesting traffic data clients **226** via an API **206**. According to another aspect, the forecast engine **218** is operative or configured to store forecasted traffic data **228** in one or more data stores **220** such that the data can be accessed by other components of the traffic data brokering system **210**, such as the route generation
25 engine **216**. For example, the route generation engine **216** is operative or configured to determine one or more recommended routes **230** based on metric calculations using forecasted traffic data **228**, and provide the one or more recommended routes **230** to requesting traffic data clients **226** via an API **206**.

[0024] An example recommended route **230** based in part on forecasted traffic data
30 **228** is illustrated in **FIGURE 3**. With reference now to **FIGURE 3**, in the illustrated example, the data reconciliation and scoring engine **214** reconciles received and collected traffic-related data **208** and provides reconciled traffic data **224** to the route generation engine **216**. For example, the reconciled traffic data **224** includes information associated with an identified current traffic condition **304** along a particular road: road X **302**. In the

example, road X **302** is blocked (i.e., a traffic condition **304** according to reconciled traffic data **224**).

[0025] Further, the forecast engine **218** identifies characteristics associated with various traffic conditions documented in historic traffic condition data **306** collected and stored in one or more data stores **220**. The forecast engine **218** learns patterns associated with the various traffic conditions, and generates forecast data for various traffic conditions based on various traffic condition characteristics. For example, based on historic traffic condition data **306** associated with the identified current traffic condition **304**, the forecast engine **218** predicts that road Y **308** will become backed up due to drivers trying to avoid road X **302** (forecasted traffic data **228**). In some examples, the forecast engine **218** can predict additional information, such as a length of time the road Y **308** will likely be backed up, an estimated extent (e.g., distance, congestion amount) of the backup.

[0026] The route generation engine **216** accesses the forecasted traffic data **228**, and determines a particular route, route A **210**, as a recommended route **230** from a first location **312** to a second location **314**, such as to avoid road X **302** and road Y **308**. The first location **312** and the second location **314** can be communicated to the route generation engine **216** by a traffic data client **226** via the API **206**. In one example, the first location **312** and the second location **314** are explicitly defined starting and ending points input by a user. In another example, the first location **312** and the second location **314** are inferred based on data collected by various sensors **106**. The route generation engine **216** further provides the recommended route **230** to the traffic data client **226** via the API **206**.

[0027] Advantageously, the disclosed aspects enable the benefit of technical effects that include, but are not limited to, improved efficiency and accuracy of providing traffic data to various traffic data clients **226** while providing an improved user experience. Further, client computing device **102** processing and bandwidth usage associated with traffic-related data queries are reduced by utilizing the traffic data brokering system **210** as a broker between a plurality of sources of traffic data and the users of the traffic data and a provider of accurate real-time or near real-time traffic information including data associated with identified traffic conditions **304**.

[0028] Having described an operating environment **100**, components of the traffic data brokering system **210**, and an example use case scenario with respect to **FIGURES 1-3**, **FIGURE 4** is a flow chart showing general stages involved in an example method **400** for reconciling and brokering traffic data. With reference now to **FIGURE 4**, the method **400** begins at start OPERATION **402**, and proceeds to OPERATION **404**, where the data

collector **212** receives a variety of traffic-related data **208** (e.g., road construction information, road closure information, traffic incident information, traffic condition information, safety and road hazard information, weather-related information, event-related information, schools' schedule information) from a plurality of traffic-related data sources

5 **222** via one or more APIs **206**.

[0029] At OPERATION **406**, the data reconciliation and scoring engine **214** reconciles collected traffic-related data **208**, for example, by identifying current traffic conditions based on identified relationships between pieces of received traffic-related data, calculates confidence scores for received traffic-related data, and determines which pieces
10 of received traffic-related data are accurate based on the calculated confidence scores (e.g., highest ranking data, data with an associated confidence score that satisfies a threshold). Further, the data reconciliation and scoring engine **214** stores the reconciled traffic data **224** in one or more data stores **220**, and continually updates the one or more data stores **220** with reconciled traffic data **204**.

15 [0030] The method **400** optionally proceeds to OPERATION **408**, where the machine learning forecast engine **218** applies statistical analysis, behavioral analytics, and data mining techniques to historic traffic condition data and other data **232**, such as information collected from social media sources, news sources, user input, etc., identifies characteristics of traffic conditions, and learns and understands patterns associated with
20 traffic conditions that have shared or similar characteristics. Further, the forecast engine **218** can predict traffic-related issues (i.e., forecasted traffic data **228**) that are likely to occur for a particular traffic condition **304** based on historic traffic condition data **306**.

[0031] The method **400** optionally proceeds to OPERATION **410**, where the route generation engine **216** determines one or more routes between locations **312**, **314** based on
25 identified traffic conditions **304** included in the reconciled traffic data **224**. For example, the route generation engine **216** merges identified traffic conditions **304** with map or navigation data to identify routes between two location points, calculate metrics (e.g., distances, estimated travel times) based on the reconciled traffic data **224** associated with the identified routes, and determine one or more recommended routes **230** based on the calculated metrics.
30 In some examples, the route generation engine **216** determines one or more routes between locations **312**, **314** based at least in part on forecasted traffic data **228** generated by the forecast engine **218**.

[0032] At OPERATION **412**, the traffic data brokering system **210** provides one or a combination of reconciled traffic data **224**, forecasted traffic data **228**, and recommended

routes **230** data to requesting traffic data clients **226** (e.g., client computing devices **102** executing applications or a digital personal assistant operative to expose the data to users, third-party systems, navigation services, news services, social media services, local, state, or federal transportation agencies, mobile service providers, websites). For example, the traffic data brokering system **210** serves as a trusted broker of traffic data that have been collected from various traffic-related data sources **222** and reconciled for ensuring accuracy and reliability of the data for provisions to various traffic data clients **226**. The method **400** ends at END OPERATION **498**.

[0033] While implementations have been described in the general context of program modules that execute in conjunction with an application program that runs on an operating system on a computer, those skilled in the art will recognize that aspects can also be implemented in combination with other program modules. Generally, program modules include routines, programs, components, data structures, and other types of structures that perform particular tasks or implement particular abstract data types.

[0034] The aspects and functionalities described herein may operate via a multitude of computing systems including, without limitation, desktop computer systems, wired and wireless computing systems, mobile computing systems (e.g., mobile telephones, netbooks, tablet or slate type computers, notebook computers, and laptop computers), hand-held devices, multiprocessor systems, microprocessor-based or programmable consumer electronics, minicomputers, and mainframe computers.

[0035] In addition, according to an aspect, the aspects and functionalities described herein operate over distributed systems (e.g., cloud-based computing systems), where application functionality, memory, data storage and retrieval and various processing functions are operated remotely from each other over a distributed computing network, such as the Internet or an intranet. According to an aspect, user interfaces and information of various types are displayed via on-board computing device displays or via remote display units associated with one or more computing devices. For example, user interfaces and information of various types are displayed and interacted with on a wall surface onto which user interfaces and information of various types are projected. Interaction with the multitude of computing systems with which implementations are practiced include, keystroke entry, touch screen entry, voice or other audio entry, gesture entry where an associated computing device is equipped with detection (e.g., camera) functionality for capturing and interpreting user gestures for controlling the functionality of the computing device, and the like.

[0036] **FIGURES 5-7** and the associated descriptions provide a discussion of a

variety of operating environments in which examples are practiced. However, the devices and systems illustrated and discussed with respect to **FIGURES 5-7** are for purposes of example and illustration and are not limiting of a vast number of computing device configurations that are used for practicing aspects, described herein.

5 **[0037]** **FIGURE 5** is a block diagram illustrating physical components (i.e., hardware) of a computing device **500** with which examples of the present disclosure may be practiced. In a basic configuration, the computing device **500** includes at least one processing unit **502** and a system memory **504**. According to an aspect, depending on the configuration and type of computing device, the system memory **504** comprises, but is not
10 limited to, volatile storage (e.g., random access memory), non-volatile storage (e.g., read-only memory), flash memory, or any combination of such memories. According to an aspect, the system memory **504** includes an operating system **505** and one or more program modules **506** suitable for running software applications **550**. According to an aspect, the system memory **504** includes the one or more components of the traffic data brokering
15 system **210**. The operating system **505**, for example, is suitable for controlling the operation of the computing device **500**. Furthermore, aspects are practiced in conjunction with a graphics library, other operating systems, or any other application program, and is not limited to any particular application or system. This basic configuration is illustrated in **FIGURE 5** by those components within a dashed line **508**. According to an aspect, the
20 computing device **500** has additional features or functionality. For example, according to an aspect, the computing device **500** includes additional data storage devices (removable and/or non-removable) such as, for example, magnetic disks, optical disks, or tape. Such additional storage is illustrated in **FIGURE 5** by a removable storage device **509** and a non-removable storage device **510**.

25 **[0038]** As stated above, according to an aspect, a number of program modules and data files are stored in the system memory **504**. While executing on the processing unit **502**, the program modules **506** (e.g., one or more components of the traffic data brokering system **210**) perform processes including, but not limited to, one or more of the stages of the method **400** illustrated in **FIGURE 4**. According to an aspect, other program modules are used in
30 accordance with examples and include applications such as electronic mail and contacts applications, word processing applications, spreadsheet applications, database applications, slide presentation applications, drawing or computer-aided application programs, etc.

[0039] According to an aspect, aspects are practiced in an electrical circuit comprising discrete electronic elements, packaged or integrated electronic chips containing

logic gates, a circuit using a microprocessor, or on a single chip containing electronic elements or microprocessors. For example, aspects are practiced via a system-on-a-chip (SOC) where each or many of the components illustrated in **FIGURE 5** are integrated onto a single integrated circuit. According to an aspect, such an SOC device includes one or more
5 processing units, graphics units, communications units, system virtualization units and various application functionality all of which are integrated (or “burned”) onto the chip substrate as a single integrated circuit. When operating via an SOC, the functionality, described herein, is operated via application-specific logic integrated with other components of the computing device **500** on the single integrated circuit (chip). According to an aspect,
10 aspects of the present disclosure are practiced using other technologies capable of performing logical operations such as, for example, AND, OR, and NOT, including but not limited to mechanical, optical, fluidic, and quantum technologies. In addition, aspects are practiced within a general purpose computer or in any other circuits or systems.

[0040] According to an aspect, the computing device **500** has one or more input
15 device(s) **512** such as a keyboard, a mouse, a pen, a sound input device, a touch input device, etc. The output device(s) **514** such as a display, speakers, a printer, etc. are also included according to an aspect. The aforementioned devices are examples and others may be used. According to an aspect, the computing device **500** includes one or more communication connections **516** allowing communications with other computing devices **518**. Examples of
20 suitable communication connections **516** include, but are not limited to, radio frequency (RF) transmitter, receiver, and/or transceiver circuitry; universal serial bus (USB), parallel, and/or serial ports.

[0041] The term computer readable media as used herein include computer storage media. Computer storage media include volatile and nonvolatile, removable and non-
25 removable media implemented in any method or technology for storage of information, such as computer readable instructions, data structures, or program modules. The system memory **504**, the removable storage device **509**, and the non-removable storage device **510** are all computer storage media examples (i.e., memory storage.) According to an aspect, computer storage media include RAM, ROM, electrically erasable programmable read-only memory
30 (EEPROM), flash memory or other memory technology, CD-ROM, digital versatile disks (DVD) or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other article of manufacture which can be used to store information and which can be accessed by the computing device **500**. According to an aspect, any such computer storage media is part of the computing device **500**. Computer

storage media do not include a carrier wave or other propagated data signal.

[0042] According to an aspect, communication media are embodied by computer readable instructions, data structures, program modules, or other data in a modulated data signal, such as a carrier wave or other transport mechanism, and includes any information delivery medium. According to an aspect, the term “modulated data signal” describes a signal that has one or more characteristics set or changed in such a manner as to encode information in the signal. By way of example, and not limitation, communication media include wired media such as a wired network or direct-wired connection, and wireless media such as acoustic, radio frequency (RF), infrared, and other wireless media.

[0043] FIGURES 6A and 6B illustrate a mobile computing device 600, for example, a mobile telephone, a smart phone, a tablet personal computer, a laptop computer, and the like, with which aspects may be practiced. With reference to FIGURE 6A, an example of a mobile computing device 600 for implementing the aspects is illustrated. In a basic configuration, the mobile computing device 600 is a handheld computer having both input elements and output elements. The mobile computing device 600 typically includes a display 605 and one or more input buttons 610 that allow the user to enter information into the mobile computing device 600. According to an aspect, the display 605 of the mobile computing device 600 functions as an input device (e.g., a touch screen display). If included, an optional side input element 615 allows further user input. According to an aspect, the side input element 615 is a rotary switch, a button, or any other type of manual input element. In alternative examples, mobile computing device 600 incorporates more or less input elements. For example, the display 605 may not be a touch screen in some examples. In alternative examples, the mobile computing device 600 is a portable phone system, such as a cellular phone. According to an aspect, the mobile computing device 600 includes an optional keypad 635. According to an aspect, the optional keypad 635 is a physical keypad. According to another aspect, the optional keypad 635 is a “soft” keypad generated on the touch screen display. In various aspects, the output elements include the display 605 for showing a graphical user interface (GUI), a visual indicator 620 (e.g., a light emitting diode), and/or an audio transducer 625 (e.g., a speaker). In some examples, the mobile computing device 600 incorporates a vibration transducer for providing the user with tactile feedback. In yet another example, the mobile computing device 600 incorporates input and/or output ports, such as an audio input (e.g., a microphone jack), an audio output (e.g., a headphone jack), and a video output (e.g., a HDMI port) for sending signals to or receiving signals from an external device. In yet another example, the mobile computing device 600 incorporates

peripheral device port **640**, such as an audio input (e.g., a microphone jack), an audio output (e.g., a headphone jack), and a video output (e.g., a HDMI port) for sending signals to or receiving signals from an external device.

[0044] **FIGURE 6B** is a block diagram illustrating the architecture of one example of a mobile computing device. That is, the mobile computing device **600** incorporates a system (i.e., an architecture) **602** to implement some examples. In one example, the system **602** is implemented as a “smart phone” capable of running one or more applications (e.g., browser, e-mail, calendaring, contact managers, messaging clients, games, and media clients/players). In some examples, the system **602** is integrated as a computing device, such as an integrated personal digital assistant (PDA) and wireless phone.

[0045] According to an aspect, one or more application programs **650** are loaded into the memory **662** and run on or in association with the operating system **664**. Examples of the application programs include phone dialer programs, e-mail programs, personal information management (PIM) programs, word processing programs, spreadsheet programs, Internet browser programs, messaging programs, and so forth. According to an aspect, one or more components of the traffic data brokering system **210** are loaded into memory **662**. The system **602** also includes a non-volatile storage area **668** within the memory **662**. The non-volatile storage area **668** is used to store persistent information that should not be lost if the system **602** is powered down. The application programs **650** may use and store information in the non-volatile storage area **668**, such as e-mail or other messages used by an e-mail application, and the like. A synchronization application (not shown) also resides on the system **602** and is programmed to interact with a corresponding synchronization application resident on a host computer to keep the information stored in the non-volatile storage area **668** synchronized with corresponding information stored at the host computer. As should be appreciated, other applications may be loaded into the memory **662** and run on the mobile computing device **600**.

[0046] According to an aspect, the system **602** has a power supply **670**, which is implemented as one or more batteries. According to an aspect, the power supply **670** further includes an external power source, such as an AC adapter or a powered docking cradle that supplements or recharges the batteries.

[0047] According to an aspect, the system **602** includes a radio **672** that performs the function of transmitting and receiving radio frequency communications. The radio **672** facilitates wireless connectivity between the system **602** and the “outside world,” via a communications carrier or service provider. Transmissions to and from the radio **672** are

conducted under control of the operating system **664**. In other words, communications received by the radio **672** may be disseminated to the application programs **650** via the operating system **664**, and vice versa.

[0048] According to an aspect, the visual indicator **620** is used to provide visual notifications and/or an audio interface **674** is used for producing audible notifications via the audio transducer **625**. In the illustrated example, the visual indicator **620** is a light emitting diode (LED) and the audio transducer **625** is a speaker. These devices may be directly coupled to the power supply **670** so that when activated, they remain on for a duration dictated by the notification mechanism even though the processor **660** and other components might shut down for conserving battery power. The LED may be programmed to remain on indefinitely until the user takes action to indicate the powered-on status of the device. The audio interface **674** is used to provide audible signals to and receive audible signals from the user. For example, in addition to being coupled to the audio transducer **625**, the audio interface **674** may also be coupled to a microphone to receive audible input, such as to facilitate a telephone conversation. According to an aspect, the system **602** further includes a video interface **676** that enables an operation of an on-board camera **630** to record still images, video stream, and the like.

[0049] According to an aspect, a mobile computing device **600** implementing the system **602** has additional features or functionality. For example, the mobile computing device **600** includes additional data storage devices (removable and/or non-removable) such as, magnetic disks, optical disks, or tape. Such additional storage is illustrated in **FIGURE 6B** by the non-volatile storage area **668**.

[0050] According to an aspect, data/information generated or captured by the mobile computing device **600** and stored via the system **602** is stored locally on the mobile computing device **600**, as described above. According to another aspect, the data are stored on any number of storage media that are accessible by the device via the radio **672** or via a wired connection between the mobile computing device **600** and a separate computing device associated with the mobile computing device **600**, for example, a server computer in a distributed computing network, such as the Internet. As should be appreciated such data/information is accessible via the mobile computing device **600** via the radio **672** or via a distributed computing network. Similarly, according to an aspect, such data/information is readily transferred between computing devices for storage and use according to well-known data/information transfer and storage means, including electronic mail and collaborative data/information sharing systems.

[0051] **FIGURE 7** illustrates one example of the architecture of a system for reconciling and brokering traffic data as described above. Content developed, interacted with, or edited in association with the one or more components of the traffic data brokering system **210** are enabled to be stored in different communication channels or other storage types. For example, various documents may be stored using a directory service **722**, a web portal **724**, a mailbox service **726**, an instant messaging store **728**, or a social networking site **730**. One or more components of the traffic data brokering system **210** are operative or configured to use any of these types of systems or the like for reconciling and brokering traffic data, as described herein. According to an aspect, a server **720** provides the one or more components of the traffic data brokering system **210** to clients **705a,b,c**. As one example, the server **720** is a web server providing one or more components of the traffic data brokering system **210** over the web. The server **720** provides one or more components of the traffic data brokering system **210** over the web to clients **705** through a network **740**. By way of example, the client computing device is implemented and embodied in a personal computer **705a**, a tablet computing device **705b** or a mobile computing device **705c** (e.g., a smart phone), or other computing device. Any of these examples of the client computing device are operable to obtain content from the store **716**.

[0052] Implementations, for example, are described above with reference to block diagrams and/or operational illustrations of methods, systems, and computer program products according to aspects. The functions/acts noted in the blocks may occur out of the order as shown in any flowchart. For example, two blocks shown in succession may in fact be executed substantially concurrently or the blocks may sometimes be executed in the reverse order, depending upon the functionality/acts involved.

[0053] The description and illustration of one or more examples provided in this application are not intended to limit or restrict the scope as claimed in any way. The aspects, examples, and details provided in this application are considered sufficient to convey possession and enable others to make and use the best mode. Implementations should not be construed as being limited to any aspect, example, or detail provided in this application. Regardless of whether shown and described in combination or separately, the various features (both structural and methodological) are intended to be selectively included or omitted to produce an example with a particular set of features. Having been provided with the description and illustration of the present application, one skilled in the art may envision variations, modifications, and alternate examples falling within the spirit of the broader aspects of the general inventive concept embodied in this application that do not depart from

the broader scope.

CLAIMS

1. A system for providing accurate and up-to-date traffic data, the system comprising:
 - at least one processing device; and
 - at least one computer readable data storage device storing instructions that, when executed by the at least one processing device, cause the system to broker traffic data between traffic data sources and traffic data clients, wherein in brokering traffic data, the system is operative or configured to:
 - receive traffic-related data from a plurality of traffic-related data sources;
 - identify current traffic conditions based on identified relationships between pieces of traffic-related data;
 - calculate confidence scores for pieces of traffic-related data, wherein highly-ranked pieces of traffic-related data are determined to be accurate;
 - update one or more data stores with highly-ranked pieces of traffic-related data;
 - receive a request for traffic data; and
 - provide one or more pieces of highly-ranked pieces of traffic-related data associated with the request.
2. The system of claim 1, wherein the plurality of traffic-related data sources comprises a combination of traffic-related data sources selected from a group comprising:
 - news sources;
 - weather information sources;
 - social networks;
 - traffic cameras;
 - road sensors;
 - local, state, or federal transportation agencies;
 - navigation services;
 - mobile service providers;
 - event information sources;
 - school schedule sources;
 - mobile client computing devices;
 - vehicle computing systems;
 - vehicle sensors; and
 - navigation client computing devices.
3. The system of claim 1, wherein in receiving traffic-related data, the system is

operative or configured to receive a combination of traffic-related data selected from a group comprising:

- road construction information;
- road closure information;
- traffic incident information;
- traffic condition information;
- safety and road hazard information;
- weather-related information;
- event-related information;
- schools' schedule information;
- location data;
- motion data;
- speed data;
- orientation data;
- position data;
- wireless network data; and
- device pairings.

4. The system of claim 1, wherein the system is further operative or configured to apply machine learning, statistical analysis, behavioral analytics, and data mining techniques to the received traffic-related data for identifying current traffic conditions.

5. The system of claim 4, wherein in identifying current traffic conditions, the system is further operative or configured to identify current traffic conditions based at least in part on identified relationships between pieces of the received traffic-related data selected from a group comprising: location, time, event, school schedule, traffic condition, weather condition, road condition, and news related matters.

6. The system of claim 1, wherein in calculating confidence scores for pieces of traffic-related data, the system is operative to:

- receive, from a traffic-related data source, a confidence score associated with a piece of traffic-related data; and

- calculate a confidence score for a piece of received traffic-related data based on one or a combination of the traffic-related data source-provided confidence score, a weight associated with the traffic-related data source, a weight associated with corroboration of the piece of traffic-related data with other received traffic-related data, the identified current traffic conditions, and an age of the piece of traffic-related data.

7. The system of claim 1, wherein the system is further operative or configured to:
 - apply statistical analysis, behavioral analytics, and data mining techniques to historic traffic data;
 - identify characteristics of traffic conditions associated with the historic traffic data;
 - learn and understand patterns associated with the traffic conditions that have shared or similar characteristics; and
 - predict traffic-related issues that are likely to occur for a particular traffic condition based on past data.
8. The system of claim 7, wherein the system is further operative or configured to:
 - retrieve map or navigation data from a map or navigation data;
 - merge identified current traffic conditions with the map or navigation data to identify routes between two location points;
 - calculate distance and estimated travel time metrics based on the identified current traffic conditions;
 - determine one or more recommended routes based on the calculated metrics; and
 - provide the one or more recommended routes to a requesting traffic data client via an API.
9. The system of claim 8, wherein the system is further operative or configured to determine the one or more recommended routes based on predicted traffic-related issues that are likely to occur for the identified current traffic conditions.
10. A computer-implemented method for providing accurate and up-to-date traffic data, comprising:
 - brokering traffic data between traffic data sources and traffic data clients, wherein brokering traffic data comprises:
 - receiving traffic-related data from a plurality of traffic-related data sources;
 - identifying current traffic conditions based on identified relationships between pieces of traffic-related data;
 - calculating confidence scores for pieces of traffic-related data, wherein highly-ranked pieces of traffic-related data are determined to be accurate;
 - updating one or more data stores with highly-ranked pieces of traffic-related data;
 - receiving a request for traffic data; and
 - providing one or more pieces of highly-ranked pieces of traffic-related data associated with the request.

11. The method of claim 10, further comprising:
 - applying statistical analysis, behavioral analytics, and data mining techniques to historic traffic data;
 - identifying characteristics of traffic conditions associated with the historic traffic data;
 - learning and understanding patterns associated with traffic conditions that have shared or similar characteristics; and
 - predicting traffic-related issues that are likely to occur for a particular traffic condition based on past data.
12. The method of claim 11, further comprising:
 - retrieving map or navigation data from a map or navigation data;
 - merging identified current traffic conditions with the map or navigation data to identify routes between two location points;
 - calculating distance and estimated travel time metrics based on the identified current traffic conditions;
 - determining one or more recommended routes based on the calculated metrics; and
 - providing the one or more recommended routes to a requesting traffic data client via an API.
13. The method of claim 12, further comprising determining one or more recommended routes based on predicted traffic-related issues that are likely to occur for the identified current traffic conditions.
14. The method of claim 10, wherein identifying current traffic conditions comprises identifying current traffic conditions based at least in part on identified relationships between pieces of the received traffic-related data selected from a group comprising: location, time, event, school schedule, traffic condition, weather condition, road condition, and news related matters.
15. A computer readable storage device including computer readable instructions, which when executed by a processing unit is operative or configured to broker traffic data between traffic data sources and traffic data clients, wherein in brokering traffic data, the processing unit is operative or configured to:
 - receive traffic-related data from a plurality of traffic-related data sources; identify current traffic conditions based on identified relationships between pieces of traffic-related data;
 - calculate confidence scores for pieces of traffic-related data, wherein highly-

ranked pieces of traffic-related data are determined to be accurate;
update one or more data stores with highly-ranked pieces of traffic-related data;
receive a request for traffic data; and
provide one or more pieces of highly-ranked pieces of traffic-related data
associated with the request.

1/8

100
↙

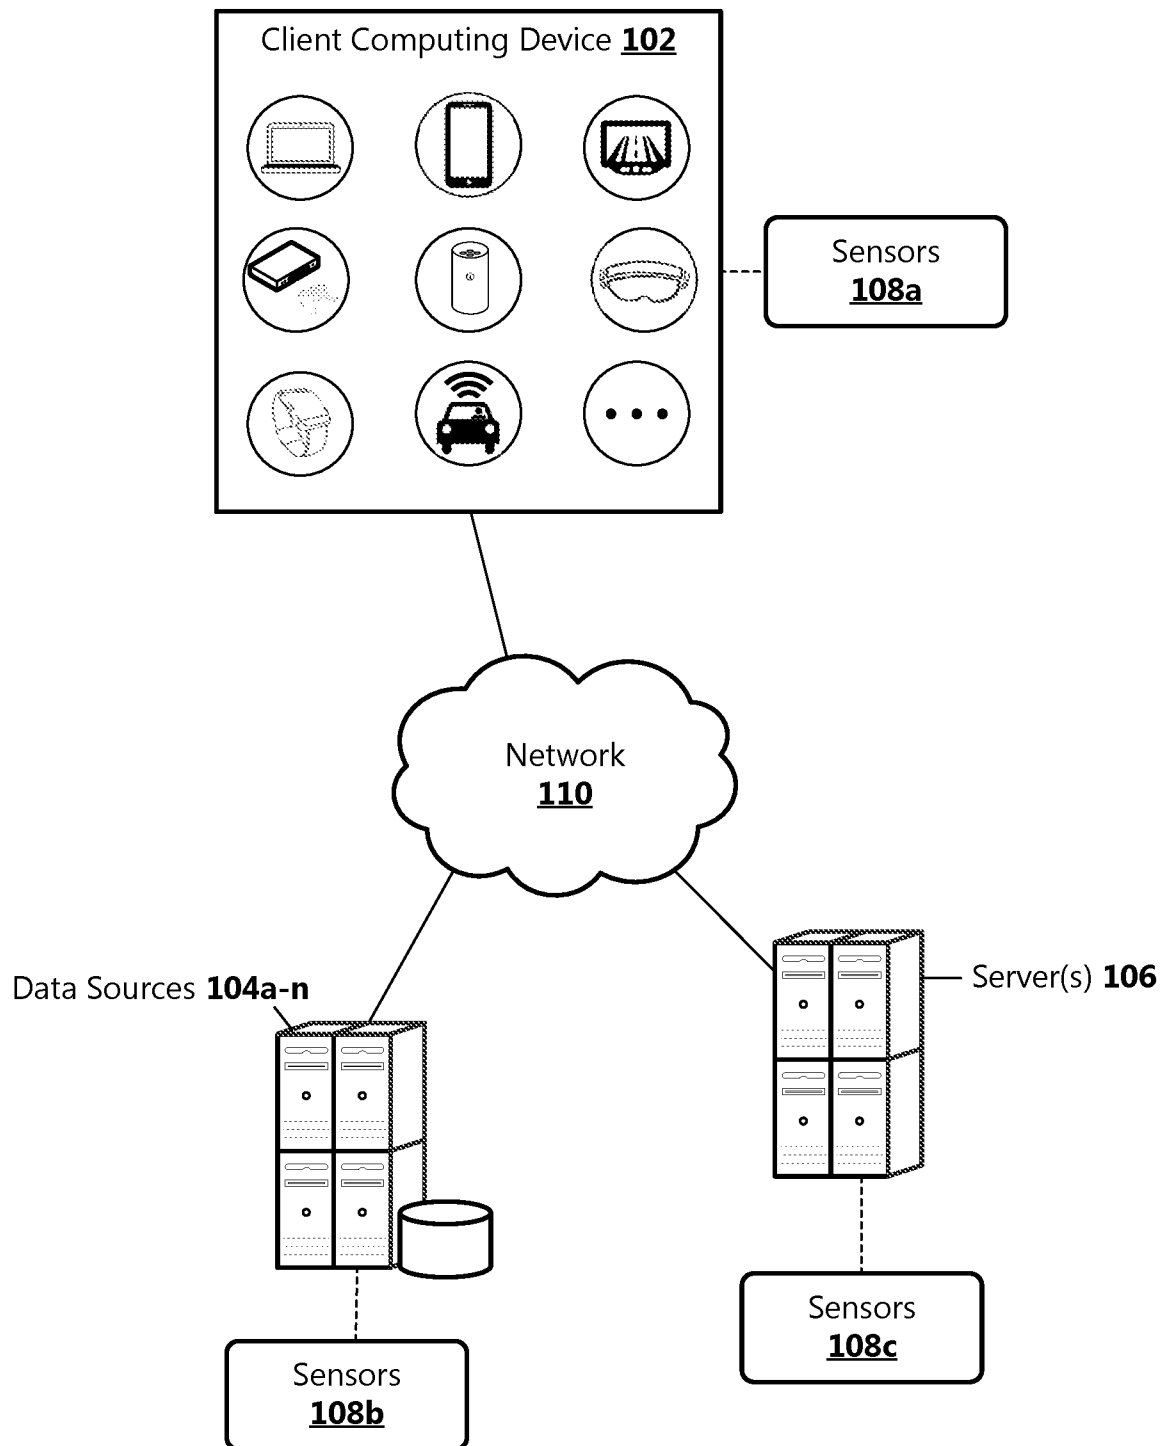
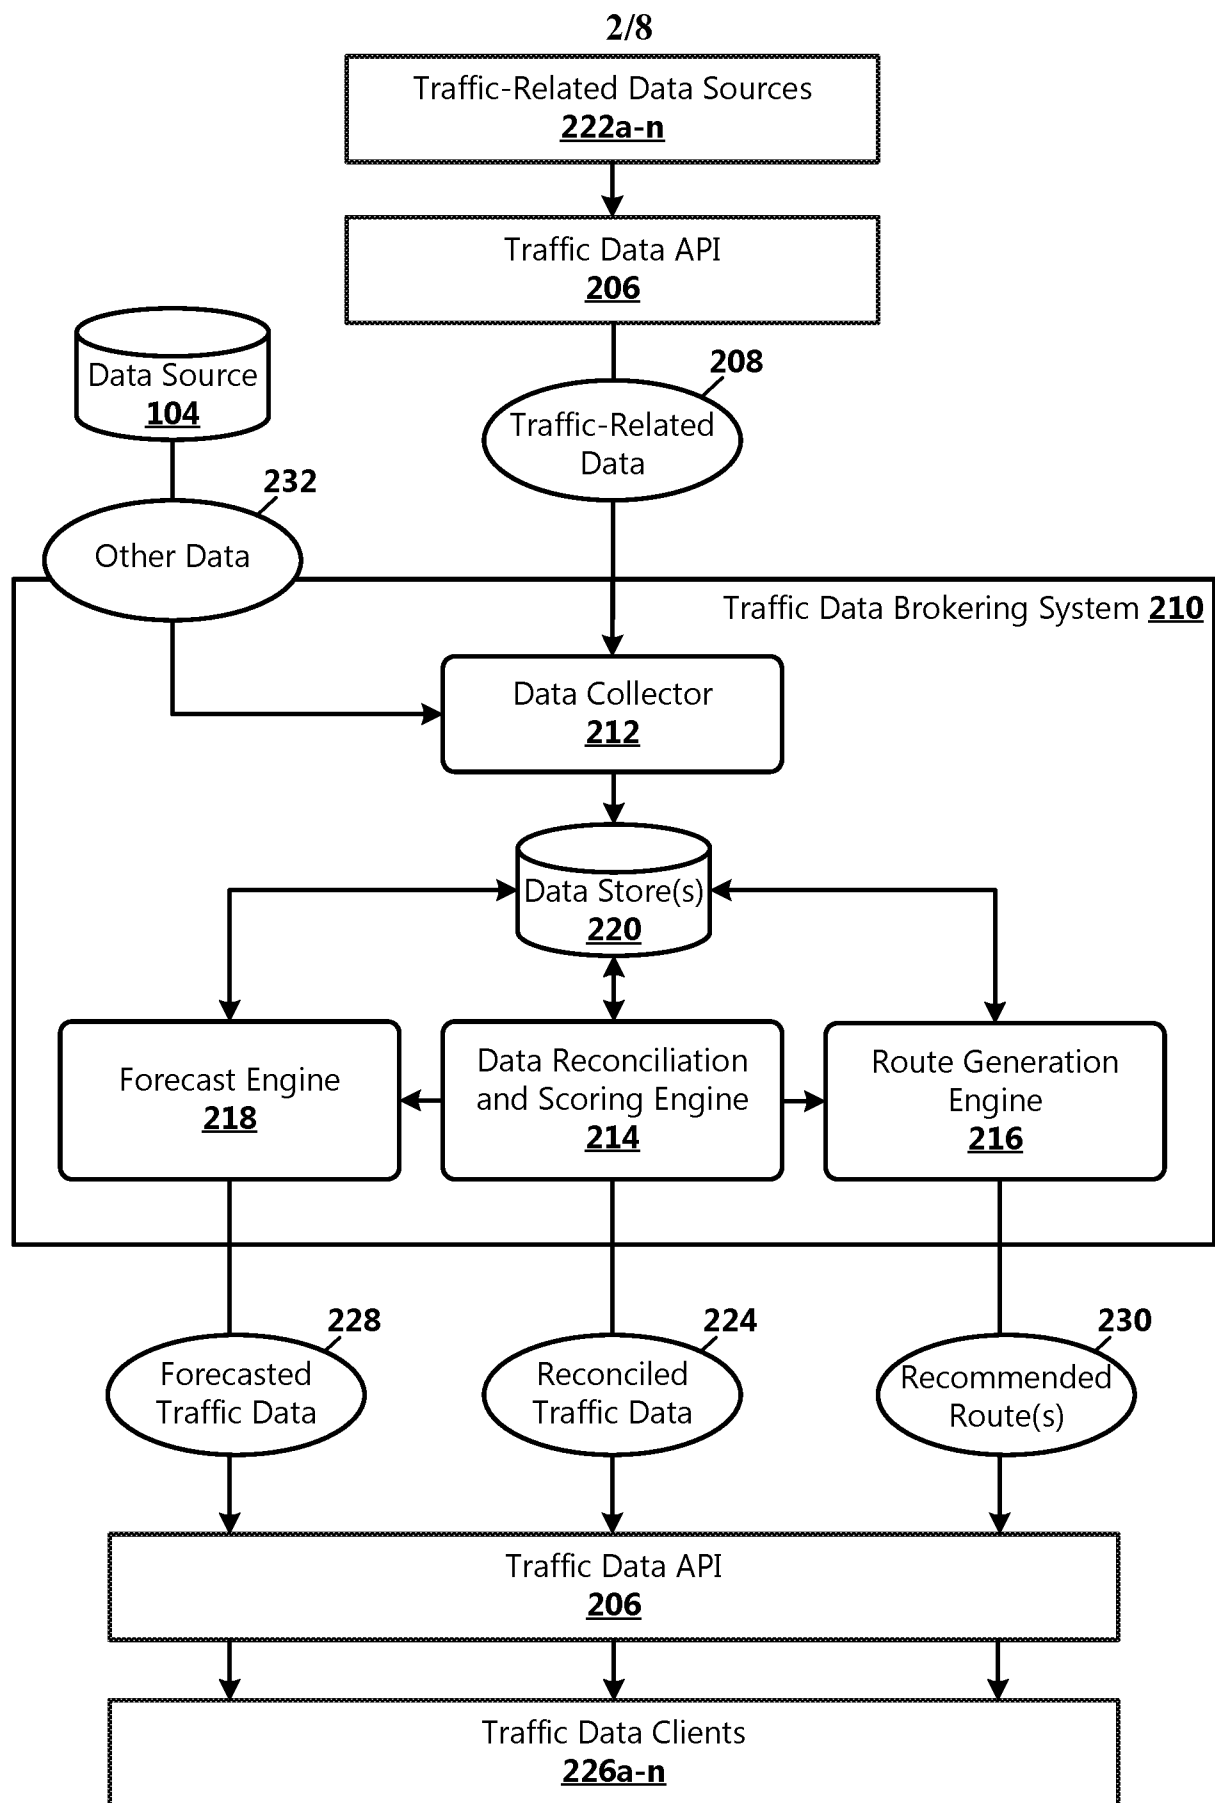


FIG. 1

**FIG. 2**

3/8

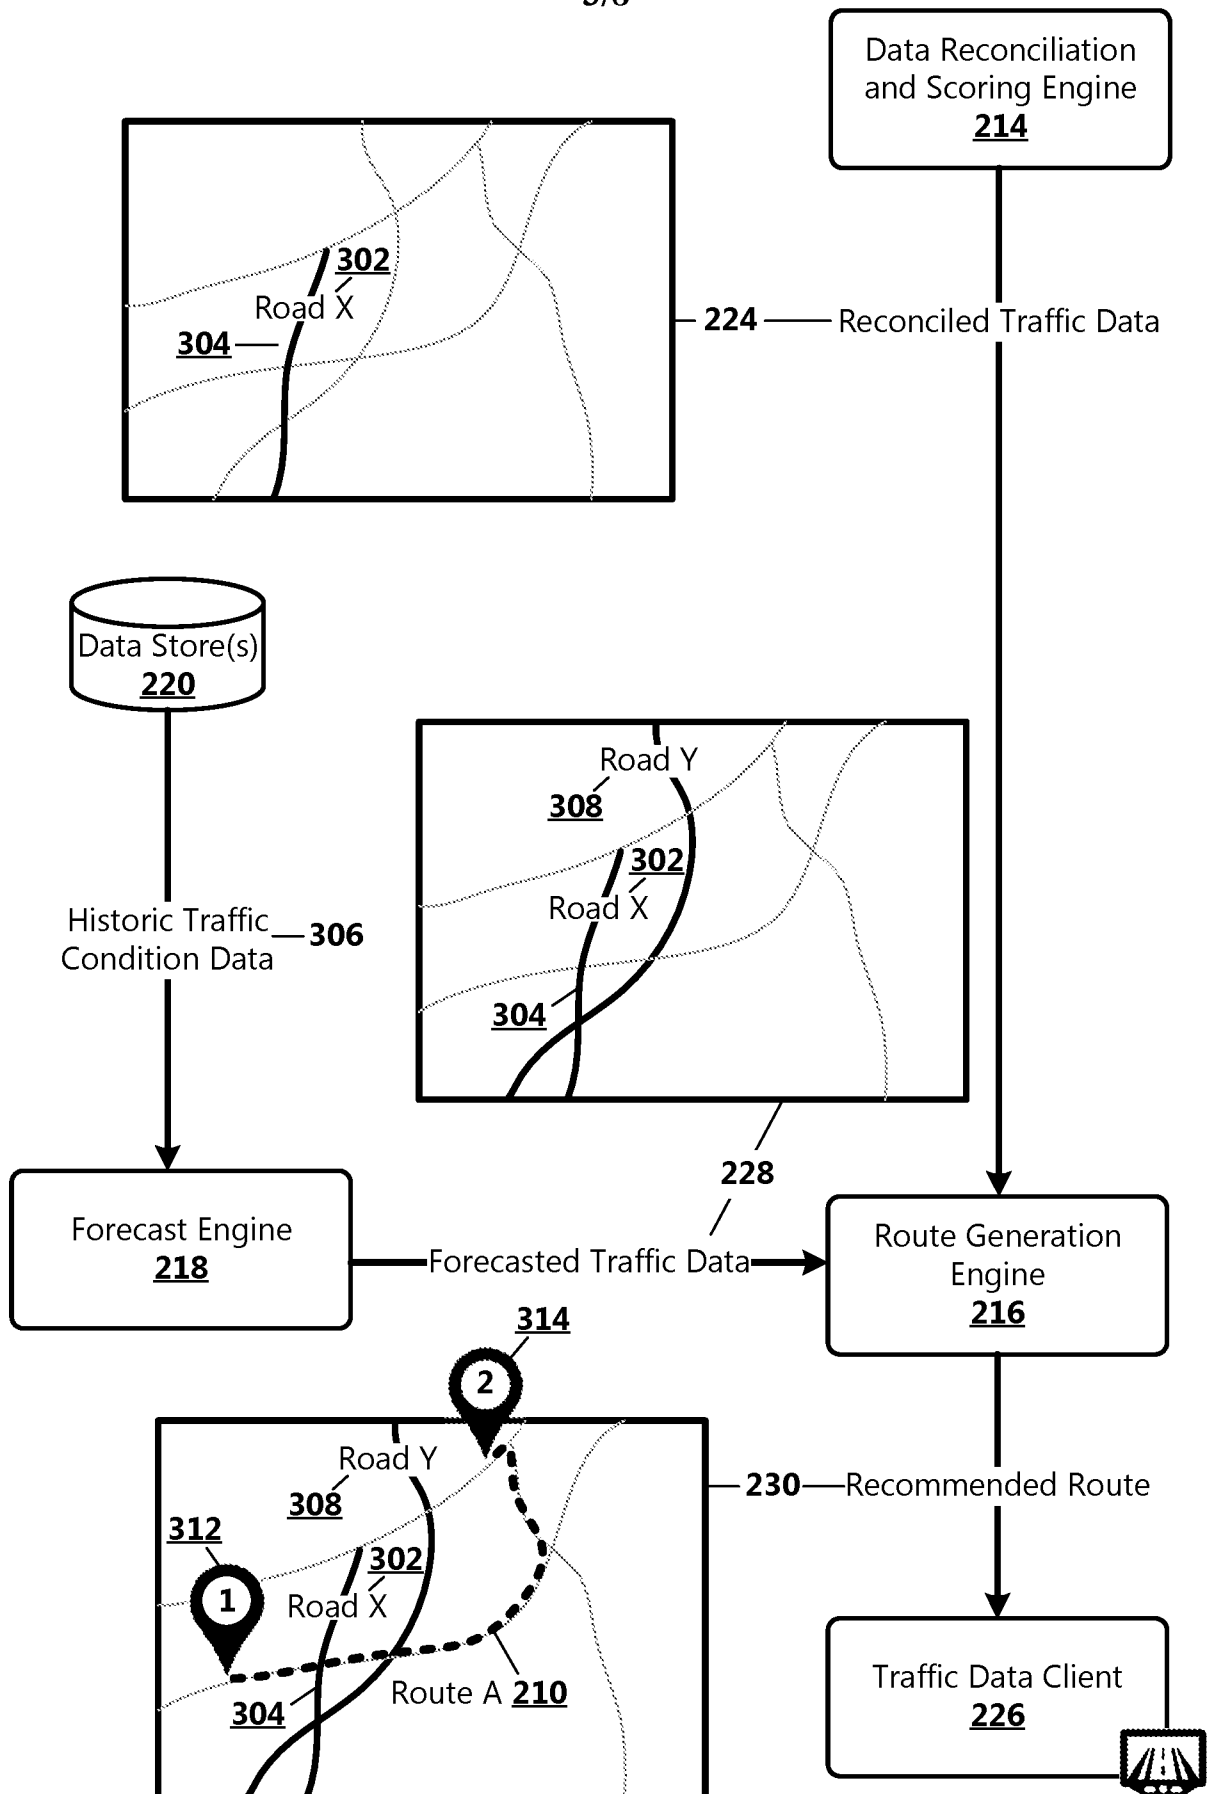
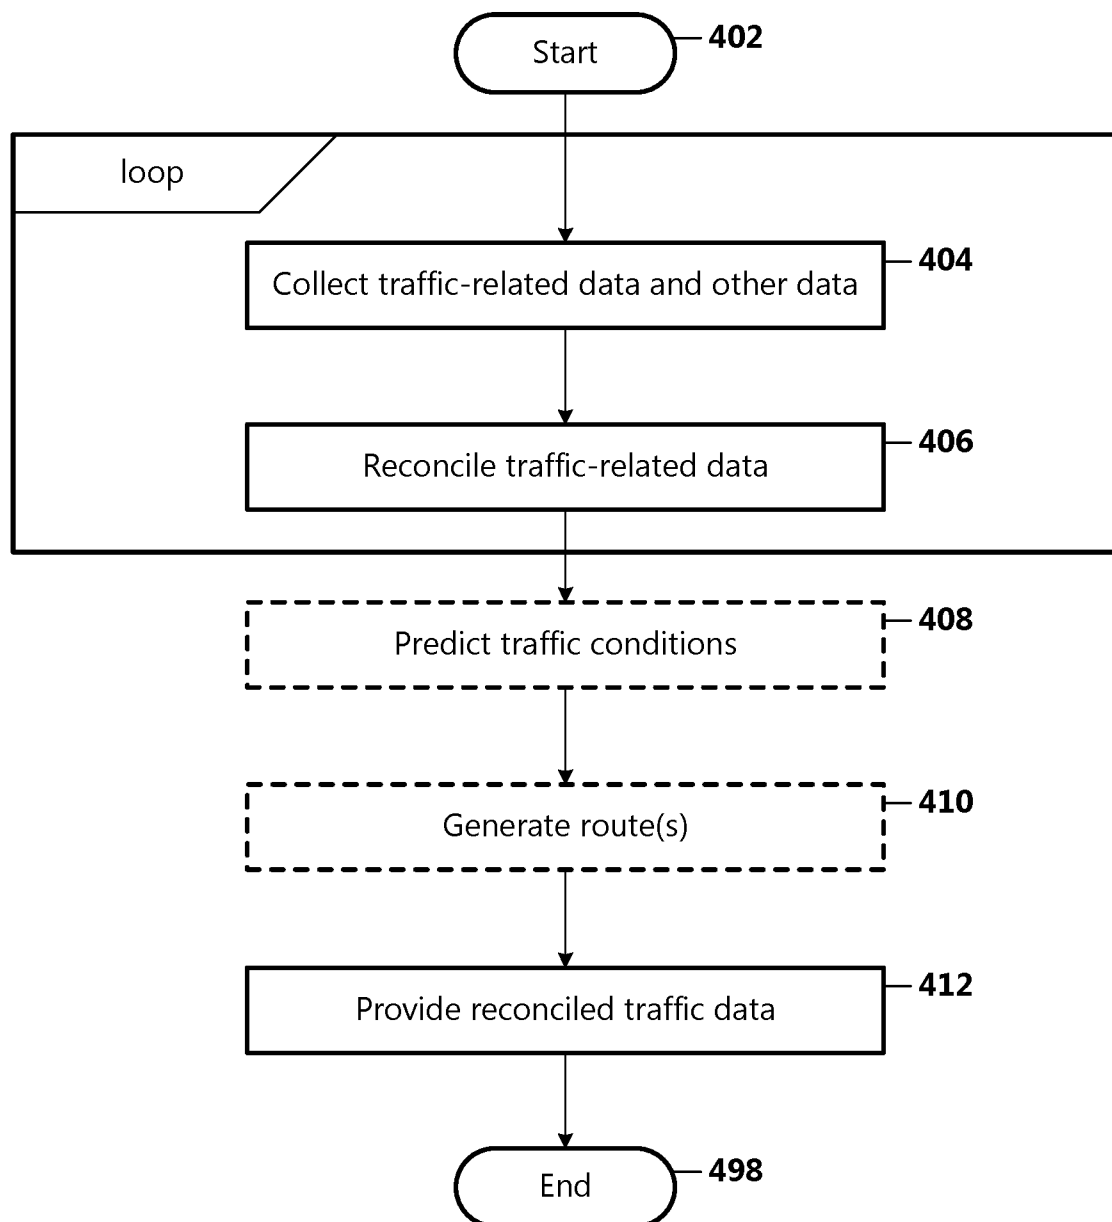



FIG. 3


4/8

400

**FIG. 4**


5/8

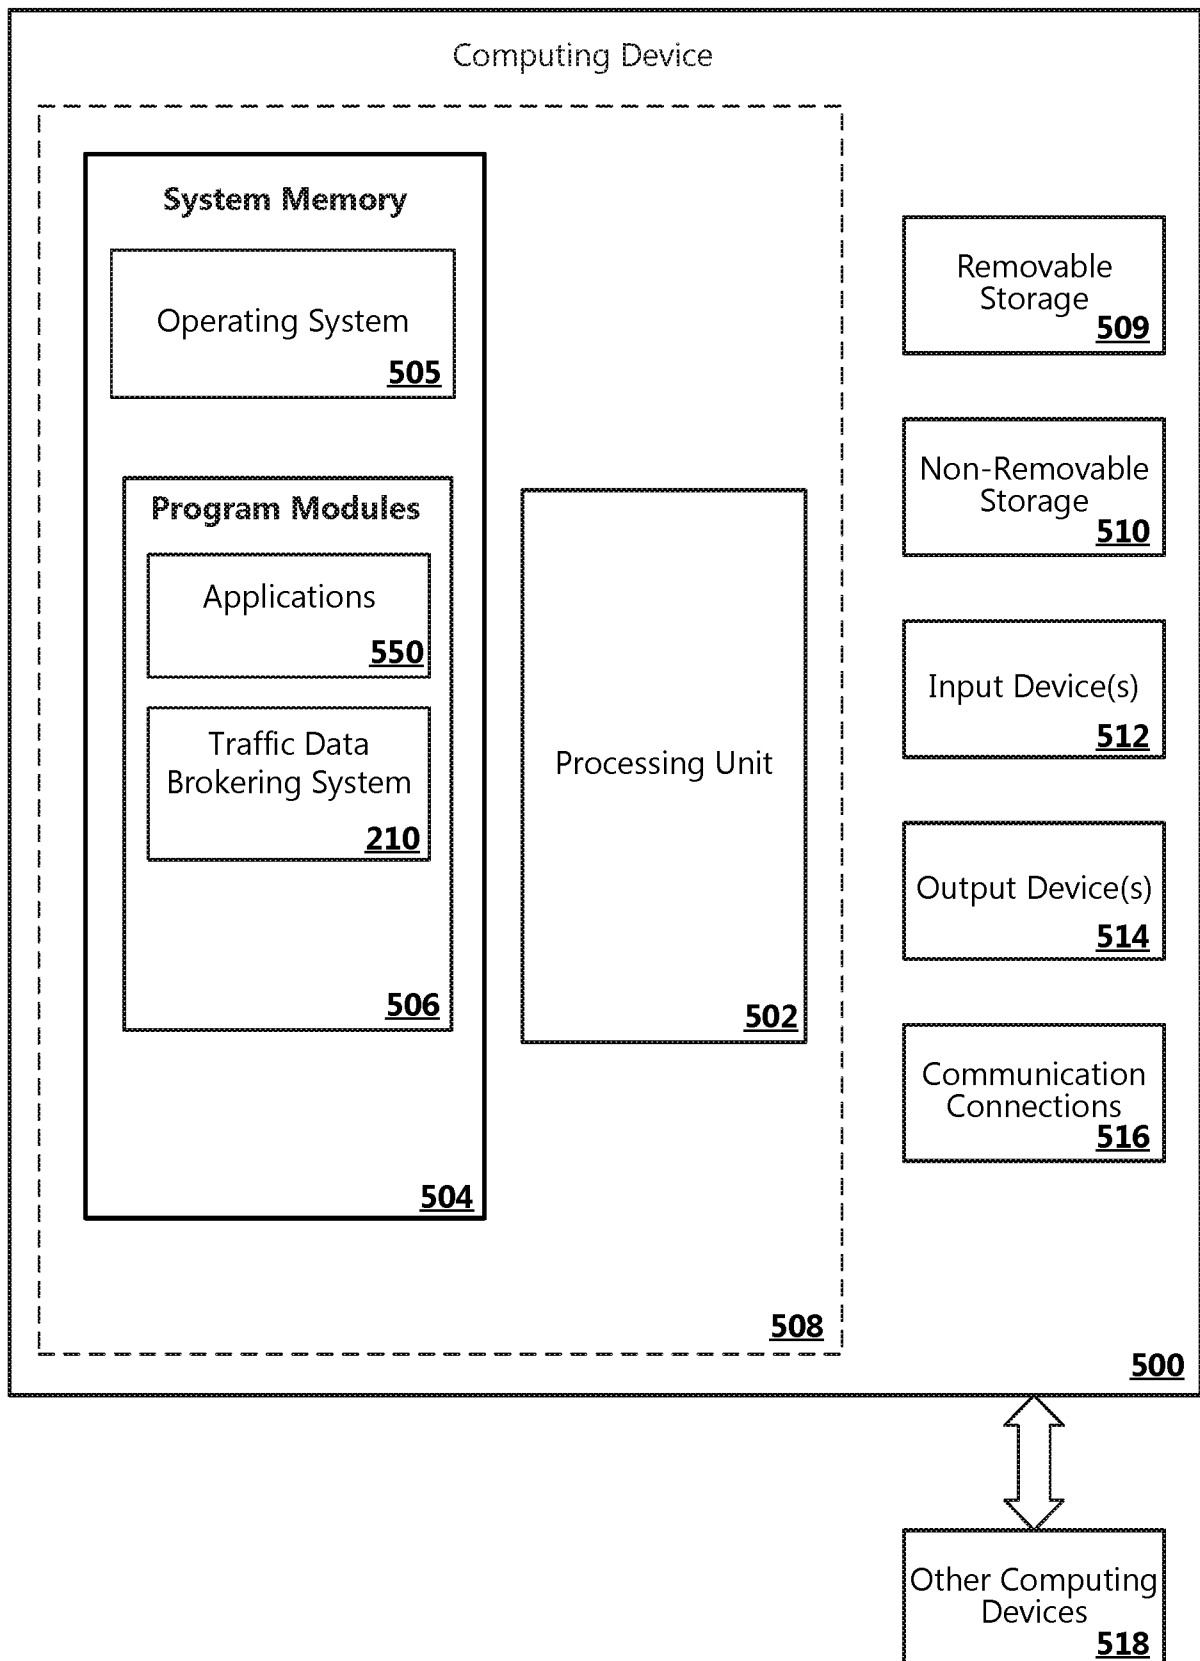**FIG. 5**

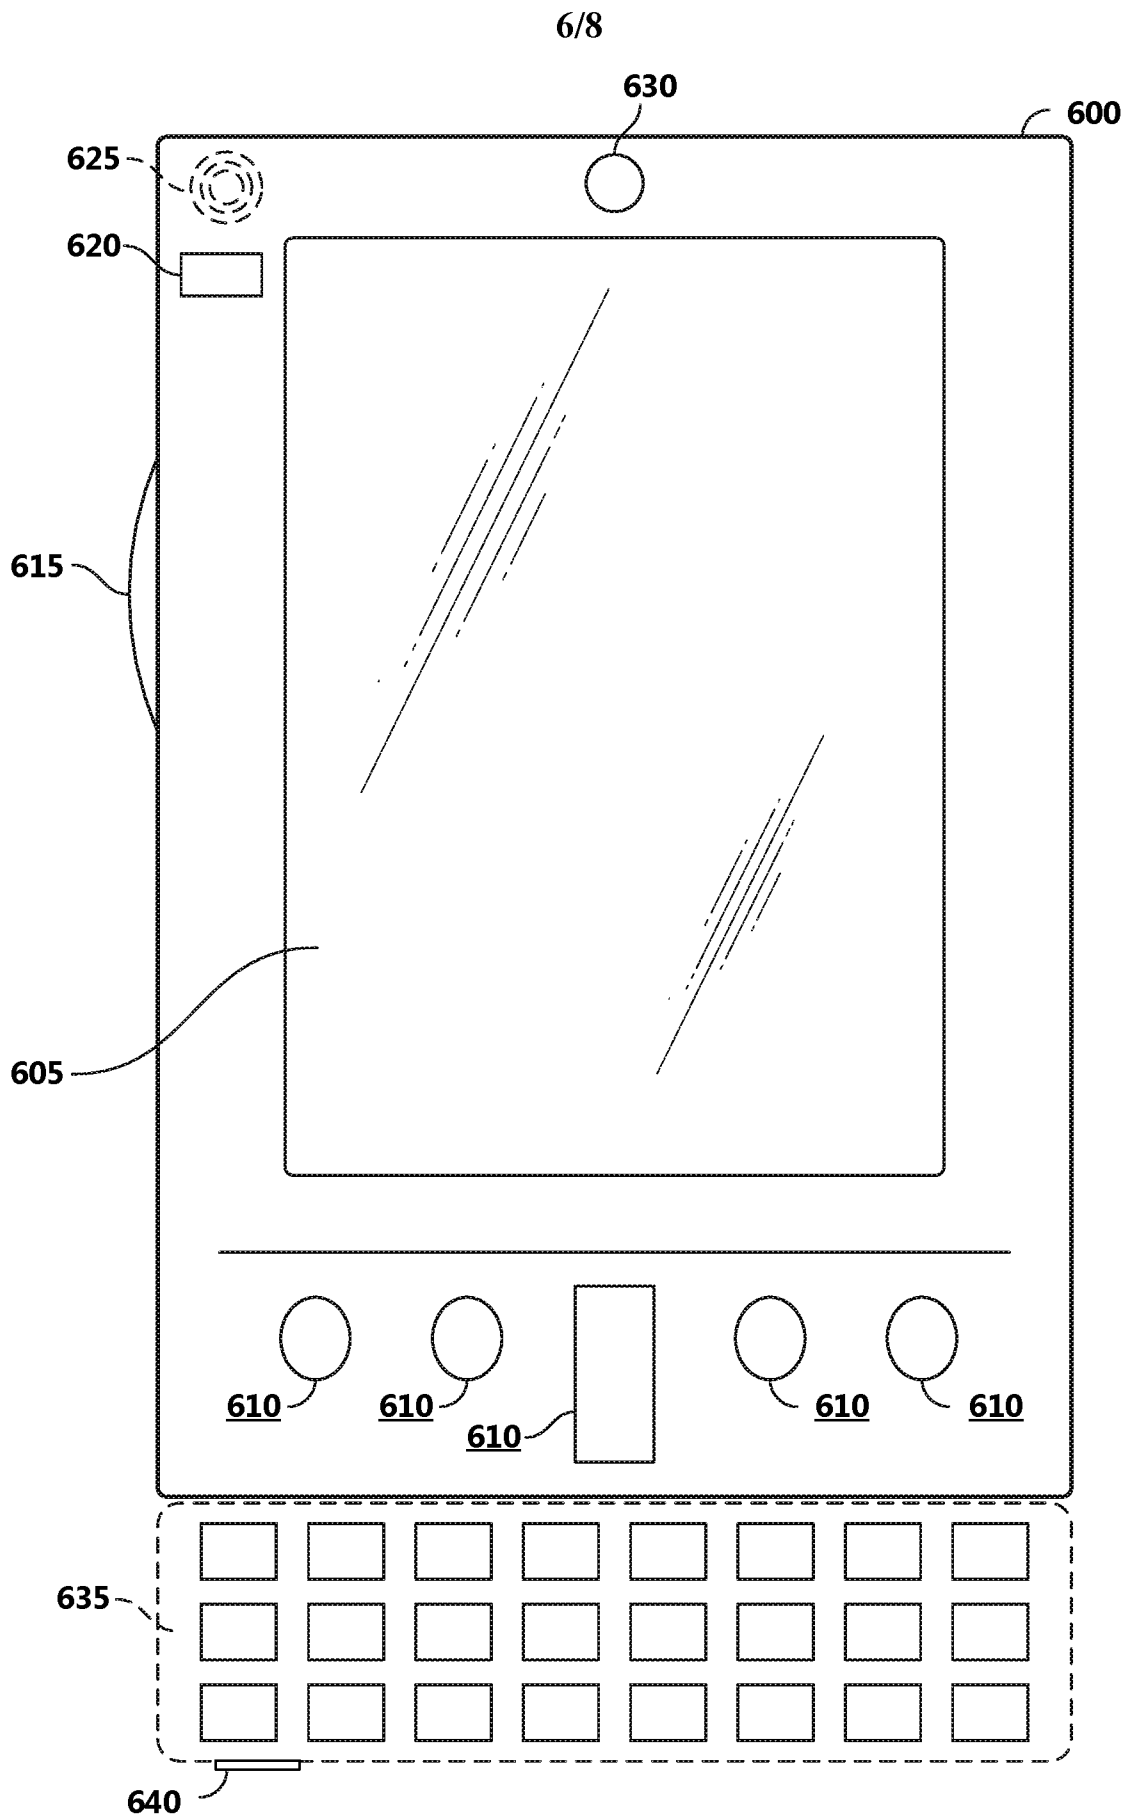


MOBILE COMPUTING DEVICE

FIG. 6A

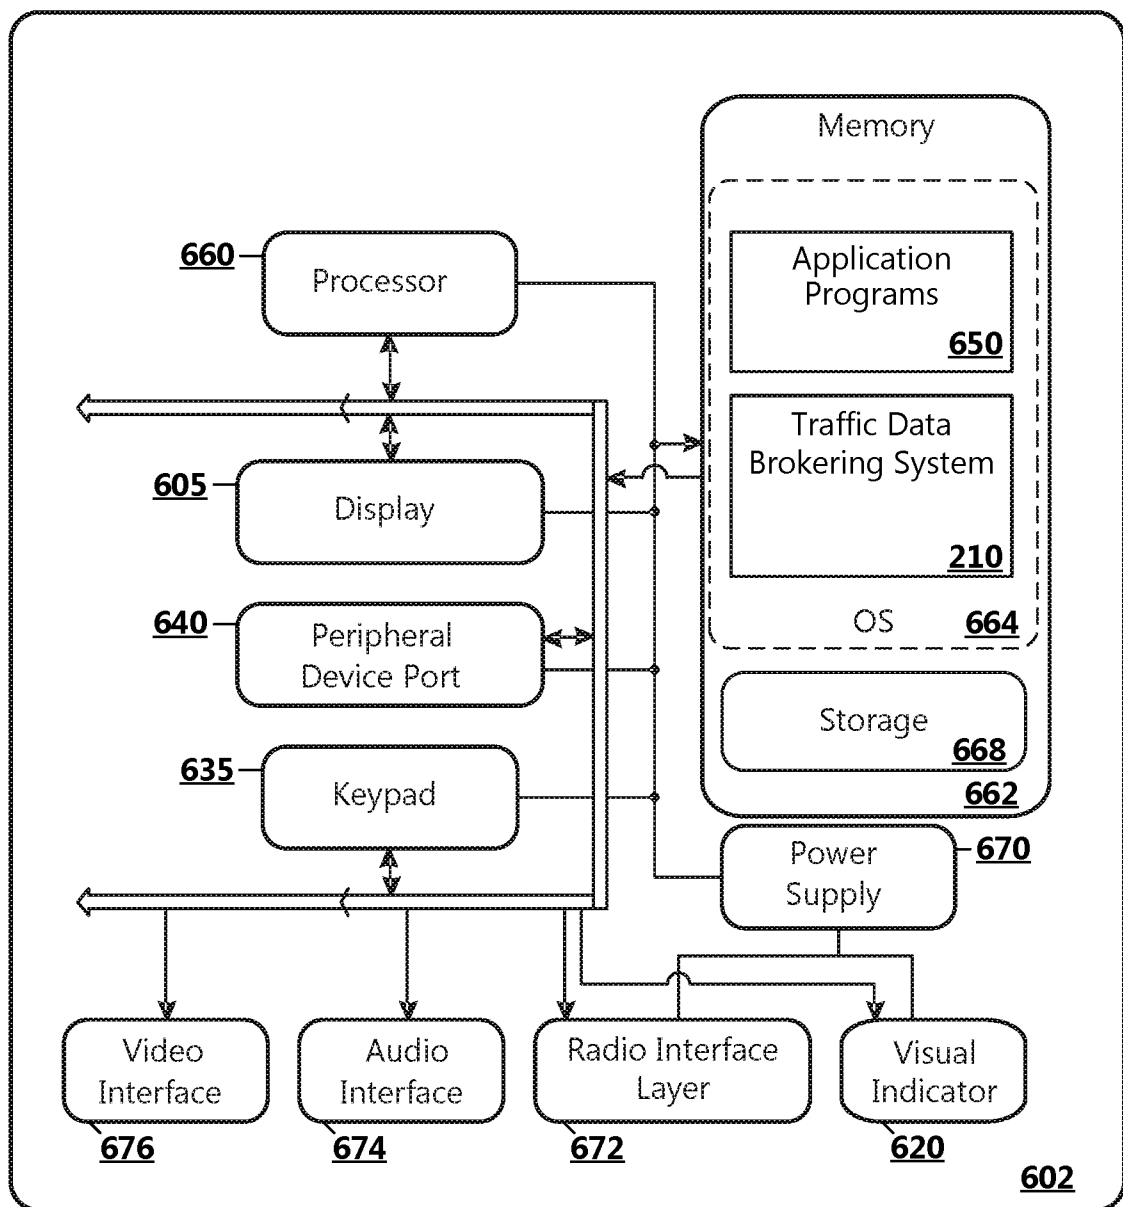**FIG. 6B**

8/8

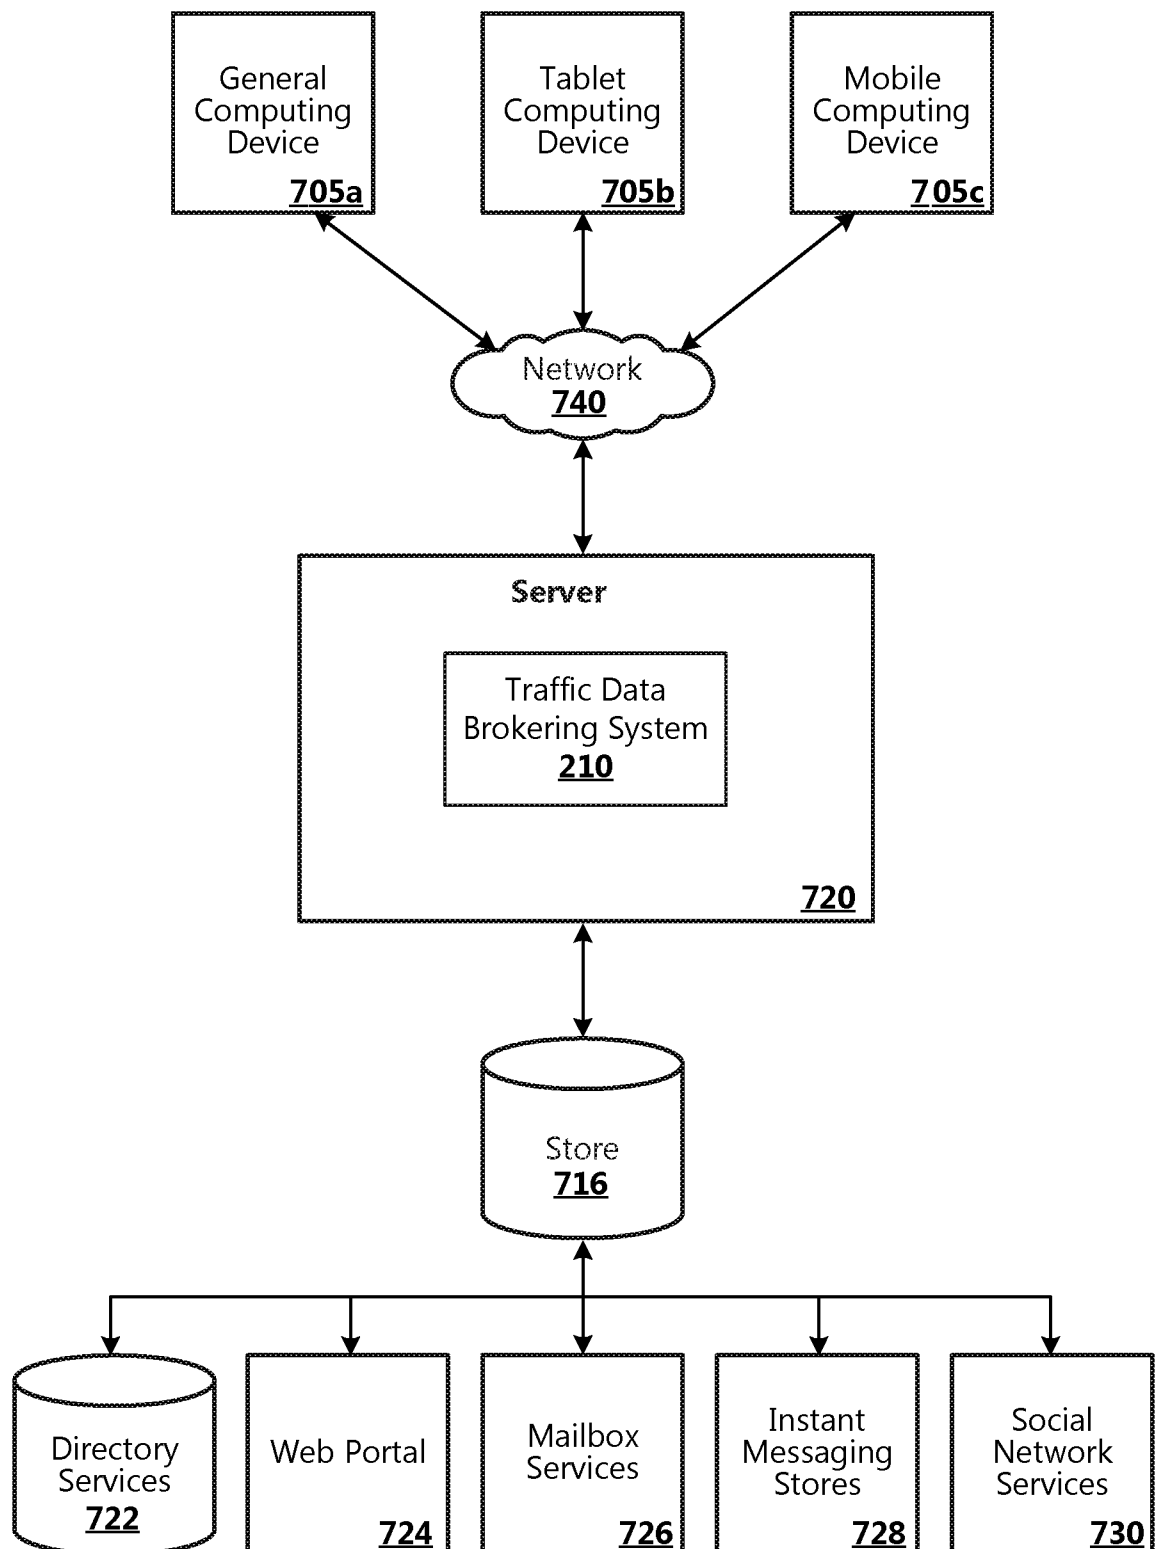**FIG. 7**