



(11) **EP 1 854 563 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
14.11.2007 Bulletin 2007/46

(51) Int Cl.:
B21D 5/02 (2006.01) B21D 37/20 (2006.01)

(21) Application number: **06405206.1**

(22) Date of filing: **12.05.2006**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK YU

(71) Applicant: **YAMAZAKI MAZAK CORPORATION**
Niwa-gun,
Aichi (JP)

(72) Inventors:
• **Yamazaki, Tsunehiko c/o Yamazaki Mazak Corp.**
Niwa gun, Aichi pref. (JP)
• **Miyakawa, Naoomi c/o Yamazaki Mazak Corp.**
Niwa gun, Aichi pref. (JP)

(74) Representative: **Moinas, Michel et al**
Moinas & Savoye S.A.
42 rue Plantamour
1201 Genève (CH)

(54) **Method for producing die for press brake and die**

(57) There are provided a method for producing a die for press brake easily and a die. Three-dimensional models of an upper die 10 and a lower die 20 are prepared based on the data of a work W_{10} . The lower die 20 is divided into plate-shaped die elements 201 to 20n, and each element is subjected to three-dimensional laser beam machining. The die elements are fastened to complete the lower die. The upper die is also produced by the same process.

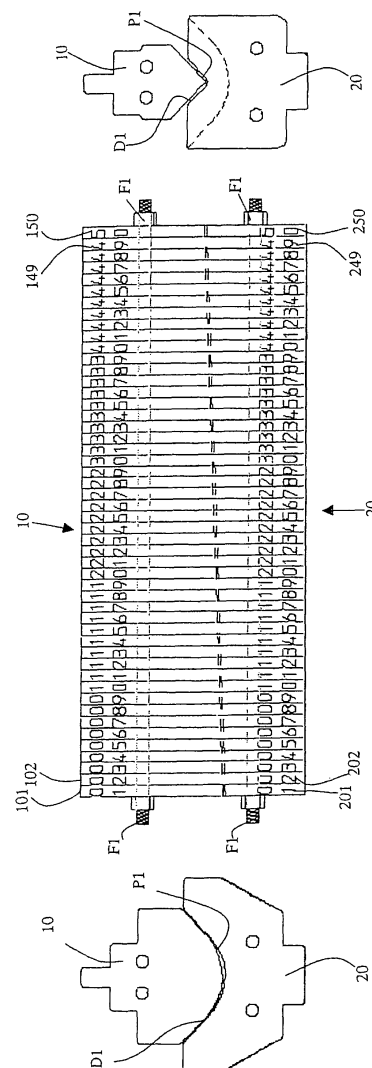


Fig. 3

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to a die for press brake having a construction in which many flat plate-shaped die elements are laminated.

Description of the Related Art

[0002] FIG. 9(A) shows a general die for press brake. The die for press brake generally denoted by reference numeral 1 has an upper die 2 and a lower die 3.

[0003] In the lower line portion of the upper die 2, a bending blade 2a is formed, and in the upper line portion of the lower die 3, a V-groove 3a is formed.

[0004] When a work W_1 , which is a product, is bent, a raw material is held between the upper die 2 and the lower die 3, and pressing is performed, as shown in FIG. 9(B).

[0005] Such a die for press brake has been disclosed, for example, in Japanese Patent Laid-Open Publication No. 2000-140941 (Patent Document 1).

[0006] Also, a construction in which the die for press brake is divided has been disclosed in Japanese Patent Laid-Open Publication No. 2001-205338 (Patent Document 2) and Japanese Patent Laid-Open Publication No. 2001-1048 (Patent Document 3).

[0007] When the above-described conventional die for press brake is used to bend a work having a curved portion B_1 in which the radius of curvature changes continuously from a curved portion R_1 having a small radius of curvature to a curved portion R_2 having a large radius of curvature as in the case of a work W_2 shown in FIG. 10, a plurality of bending operations performed along a plurality of bend lines ML must be repeated.

[0008] However, even if the above-described bending operations are performed a plurality of times, the curved portion B_1 is a collection of straight-line bend portions, and a continuous curved surface cannot be formed.

[0009] An object of the present invention is to provide a die for press brake in which a curved surface having a continuously changing radius of curvature can be formed by one pressing operation.

SUMMARY OF THE INVENTION

[0010] A method for producing a die for press brake which is formed by an upper die and a lower die includes as fundamental means the steps of preparing three-dimensional CAD data for a product to be bent; preparing three-dimensional CAD data corresponding to shapes of the upper die and the lower die for press brake based on the three-dimensional CAD data for the product; dividing the die into plate-shaped die elements having a uniform thickness based on the three-dimensional CAD data for

the die; preparing a laser beam machining program for each divided die element; manufacturing each die element by subjecting a raw material to laser beam machining by using the machining program; and producing the die by assembling the die elements.

[0011] Also, the die for press brake has plate-shaped die elements having a uniform thickness, each die element is fabricated into a predetermined shape by three-dimensional laser beam machining; and a fastening member for fastening all of the die elements is provided.

[0012] According to the present invention, the die is made up of the plate-shaped die elements, and each of the plate-shaped die elements is formed by three-dimensional laser beam machining. Therefore, a die corresponding to a case where the radius of curvature and the shape defined on a plane perpendicular to the lengthwise direction of the die for a press brake, which is a work, change or a case where the radius of curvature and the shape change continuously and linearly in the lengthwise direction of the die can be produced easily.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013]

FIG. 1 is an explanatory view showing the principle of the present invention;

FIG. 2 is an explanatory view showing an assembly of die in accordance with the present invention;

FIG. 3 is an explanatory view showing a configuration of a practical die for press brake utilizing the principle of the present invention;

FIG. 4 is an explanatory view showing another example of the present invention;

FIG. 5 is an explanatory view showing a difference between the case where each element of an upper and lower dies is fabricated by a two-dimensional laser and the case where it is fabricated by a three-dimensional laser;

FIG. 6 is an explanatory view showing laser beam machining of a die portion of a die element;

FIG. 7 is an explanatory view showing laser beam machining of a side portion of a die element;

FIG. 8 is a perspective view showing an example of a work fabricated by the present invention;

FIG. 9 is an explanatory view of a conventional die; and

FIG. 10 is an explanatory view of a bending operation using a conventional die.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0014] FIG. 1 is an explanatory view showing the principle of the present invention. A work W_{10} , which is a product, shown in FIG. 1 (A) has a bend line B_{10} such that the shape in the bending direction L_1 and the shape in the direction perpendicular to the bending direction change successively.

[0015] First, a model of the work W_{10} is prepared by three-dimensional CAD based on the data of the work.

[0016] Next, die models for an upper die (punch) 10 and a lower die (die) 20 are prepared by three-dimensional CAD using the model of the work W_{10} as shown in FIG. 1 (B).

[0017] The upper die 10 and the lower die 20 have a punch portion P_1 and a die portion D_1 , respectively, corresponding to the bend shape of the work W_{10} .

[0018] Subsequently, as shown in FIG. 1(C), the three-dimensional model of the lower die 20 is sliced into many plate-shaped lower die elements 201, 202, 203, ... 20n, and an NC program for three-dimensional machining of each lower die element is prepared from the sliced model. The first lower die element 201, which is formed by a metallic sheet having a thickness T_1 , is cut out of a raw material by a three-dimensional laser beam machine. For this first lower die element 201, a first die portion 201 a is formed by laser beam machining.

[0019] Also, in the first lower die element 201, through holes 201 b that are used at the time of assembly are formed.

[0020] The second lower die element 202 adjacent to the first lower die element 201 has a thickness T_1 likewise, and is formed by laser beam machining. The second lower die element 202 has a second die portion 202a.

[0021] This lower die element 202 is also formed with through holes 202b for assembly.

[0022] Hereunder, a necessary number of lower die elements are fabricated by laser beam machining.

[0023] FIG. 2 shows a state in which the lower die elements fabricated in the above-described process are assembled by using fastening members F_1 such as bolts and nuts to complete the lower die 20.

[0024] This lower die 20 has a required die portion D_1 . The upper die 10 is also fabricated by the same process.

[0025] FIG. 3 shows a configuration of a more practical die for press brake utilizing the principle of the present invention.

[0026] The upper die 10 is made up of, for example, fifty of upper die elements 101, 102, ... 150.

[0027] Each element is formed with a corresponding punch portion, and element numbers "01" to "50" are put on the elements by laser beam machining.

[0028] When the upper die 10 is assembled, the elements are arranged in the order of element number, by which the upper die 10 is assembled exactly and easily. The elements are fixed by the fastening members F_1 such as bolts and nuts.

[0029] In the same way, the lower die 20 is also made up of fifty lower die elements 201, 202, ... 250.

[0030] On the lower die elements, element numbers "01" to "50" are put by laser beam machining.

[0031] The elements are arranged in the order of element number, and are fixed by the fastening members F_1 to complete the lower die 20.

[0032] The upper die 10 and the lower die 20 have required punch portion P_1 and die portion D_1 , respectively.

[0033] FIG. 4 is an explanatory view showing another example of the present invention.

[0034] The upper die of this example is made up of the upper die elements 10n having a relatively small thickness. By decreasing the thicknesses of the upper die elements 10n, the shape of the punch portion of each element can be fabricated more accurately. In the case where such thin elements are used, thick support plates 11 and 12 are disposed especially in both end portions, and the elements are fixed by the fastening members F_1 .

[0035] By this construction, the upper die 10 having high rigidity can be obtained.

[0036] Similarly, the lower die 20 is also made up of the elements 20n having a small thickness. Thick support plates 21 and 22 are disposed in both end portions, and the elements are fixed by the fastening members F_1 .

[0037] FIG. 5 shows a difference between the case where each element of the upper and lower dies is fabricated by a two-dimensional laser and the case where it is fabricated by a three-dimensional laser.

[0038] FIG. 5(A) shows the case where each element 30n of an upper die 30 is fabricated by a two-dimensional laser.

[0039] The surface of a punch portion 30nP of each element is machined into a cross-sectional shape at right angles to the plate surface of element.

[0040] Similarly, an element 40n of a lower die 40 is also fabricated by a two-dimensional laser. A die portion 40nD of the element 40n has a cross-sectional shape at right angles to the plate surface of element.

[0041] When a work W_{20} is pressed by using the upper die 30 and the lower die 40, the work W_{20} is bent along the shape of the die. This fabricated shape is approximate to the required shape. However, since a difference in level is produced between the adjacent elements, there arises a drawback in that a flaw is induced on the surface of the work W_{20} by this difference in level.

[0042] FIG. 5(B) shows the case where an element 50n of an upper die 50 and an element 60n of a lower die 60 each are fabricated by a three-dimensional laser beam machine.

[0043] A punch portion 50nP of the element 50n of the upper die 50 can be machined so as to have a cross-sectional shape with an arbitrary angle with respect to the plate surface of element.

[0044] Therefore, no difference in level is produced in the adjoining portion of the elements 50n. For this reason, the punch portion of the upper die 50 formed by assem-

bling the elements 50n forms a smooth face.

[0045] Similarly, the element 60n of the lower die 60 is subjected to three-dimensional laser beam machining. Therefore, the die portion of the lower die 60 is also formed so as to have a smooth face.

[0046] When a work W_{21} is pressed by using the upper die 50 and the lower die 60, no flaw is induced on the fabricated surface of the work W_{21} .

[0047] FIG. 6 shows a state in which the die portion D_1 of a die element E is fabricated by using a laser beam machining tool TL of a three-dimensional laser beam machining head LH.

[0048] FIG. 7 shows a state in which an element number is put on the side face of the die element E with an opposing laser beam machining head TL of a three-dimensional laser beam machining head LH.

[0049] FIG. 8 is a perspective view showing an example of a work formed by the die for press brake in accordance with the present invention.

[0050] A work W_{30} has a shape such that the radius of curvature changes successively from r_1 to r_n along the bend line.

[0051] In addition, according to the present invention, a work having an intricate shape can be fabricated.

die element by laser beam machining.

4. A die for press brake, which is produced based on three-dimensional CAD data for a product to be bent, wherein

the die has plate-shaped die elements having a uniform thickness;
each die element is fabricated into a predetermined shape by three-dimensional laser beam machining; and
a fastening member for fastening all of the die elements is provided.

5. The die for press brake according to claim 4, wherein a die face of each die element is fabricated into a cross-sectional shape having an arbitrary angle with respect to a plate surface.

6. The die for press brake according to claim 4, wherein each die element has an element number put by laser beam machining.

Claims

1. A method for producing a die for press brake which is formed by an upper die and a lower die, comprising the steps of:

preparing three-dimensional CAD data for a product to be bent;
preparing three-dimensional CAD data corresponding to shapes of the upper die and the lower die for press brake based on the three-dimensional CAD data for the product;
dividing the die into plate-shaped die elements having a uniform thickness based on the three-dimensional CAD data for the die;
preparing a laser beam machining program for each divided die element;
manufacturing each die element by subjecting a raw material to laser beam machining by using the machining program; and
producing the die by assembling the die elements.

2. The method for producing a die for press brake according to claim 1, wherein a die face of each die element is fabricated into a cross-sectional shape having an arbitrary angle with respect to a plate surface.

3. The method for producing a die for press brake according to claim 1, wherein the method further comprises a step of putting an element number on each

25

30

35

40

45

50

55

Fig. 1 (a)

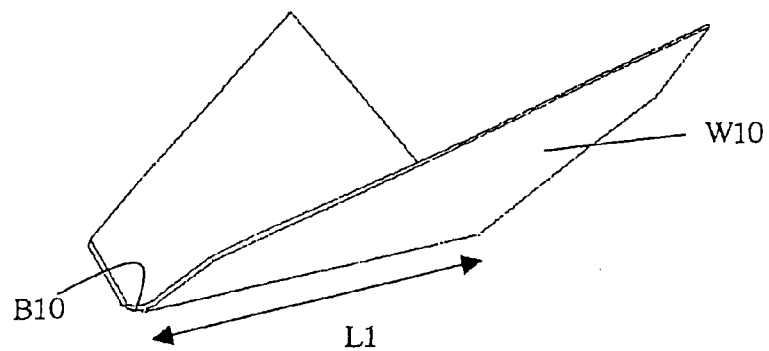


Fig. 1 (b)

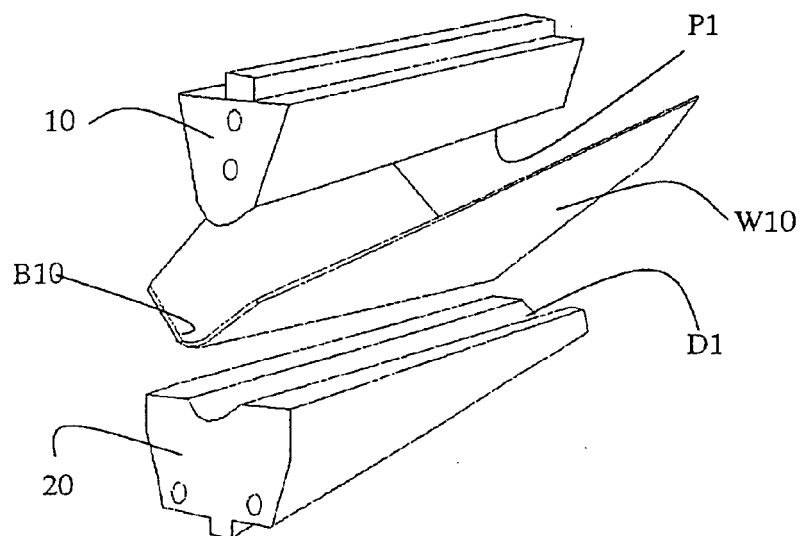
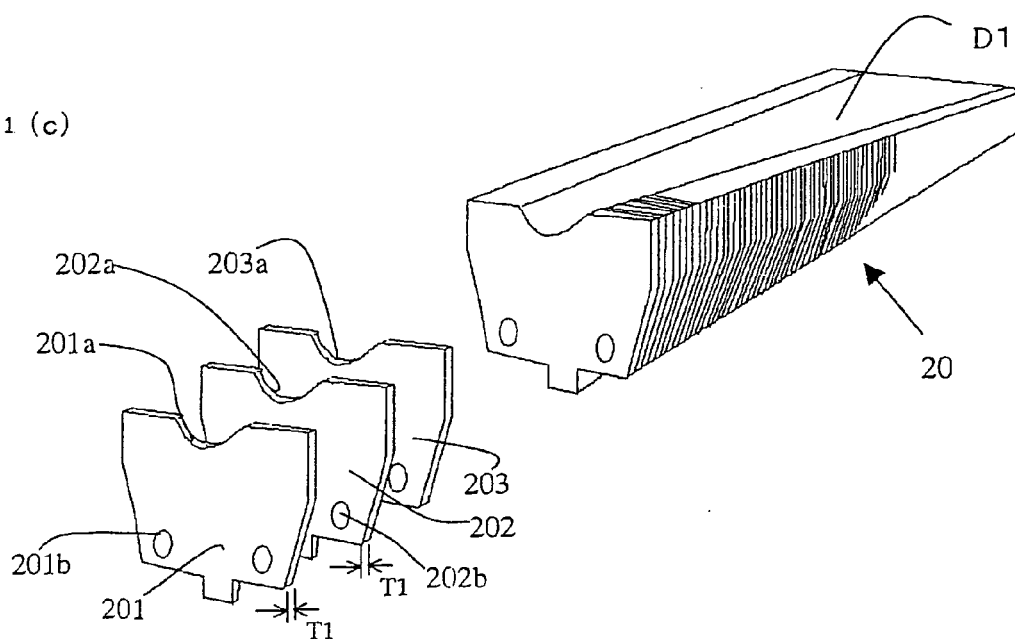


Fig. 1 (c)



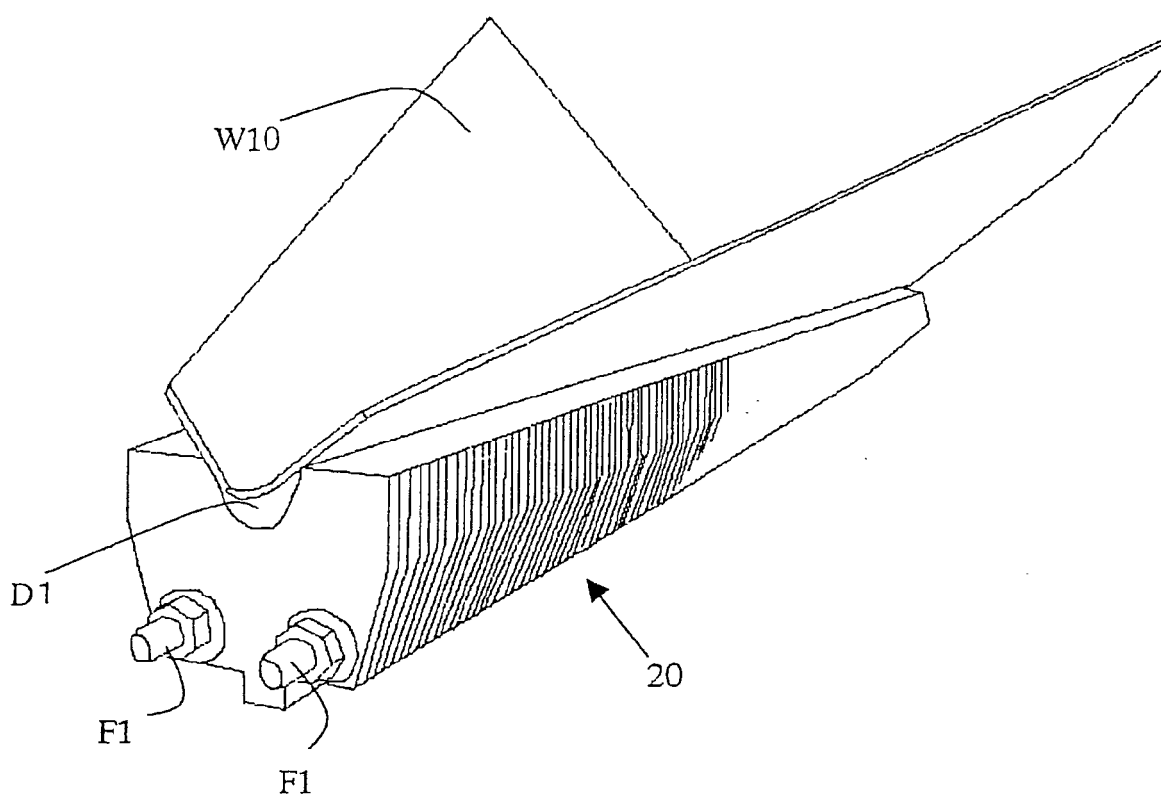


Fig.2

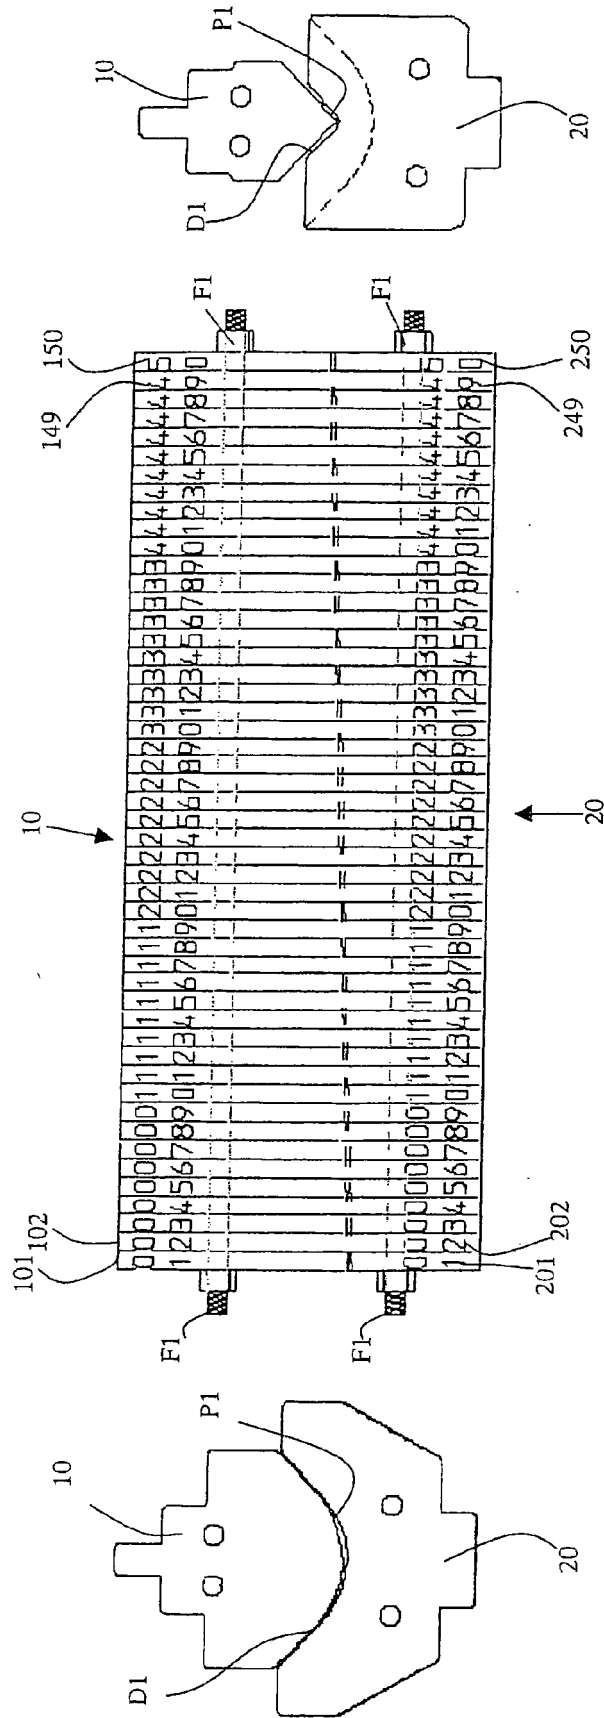


Fig. 3

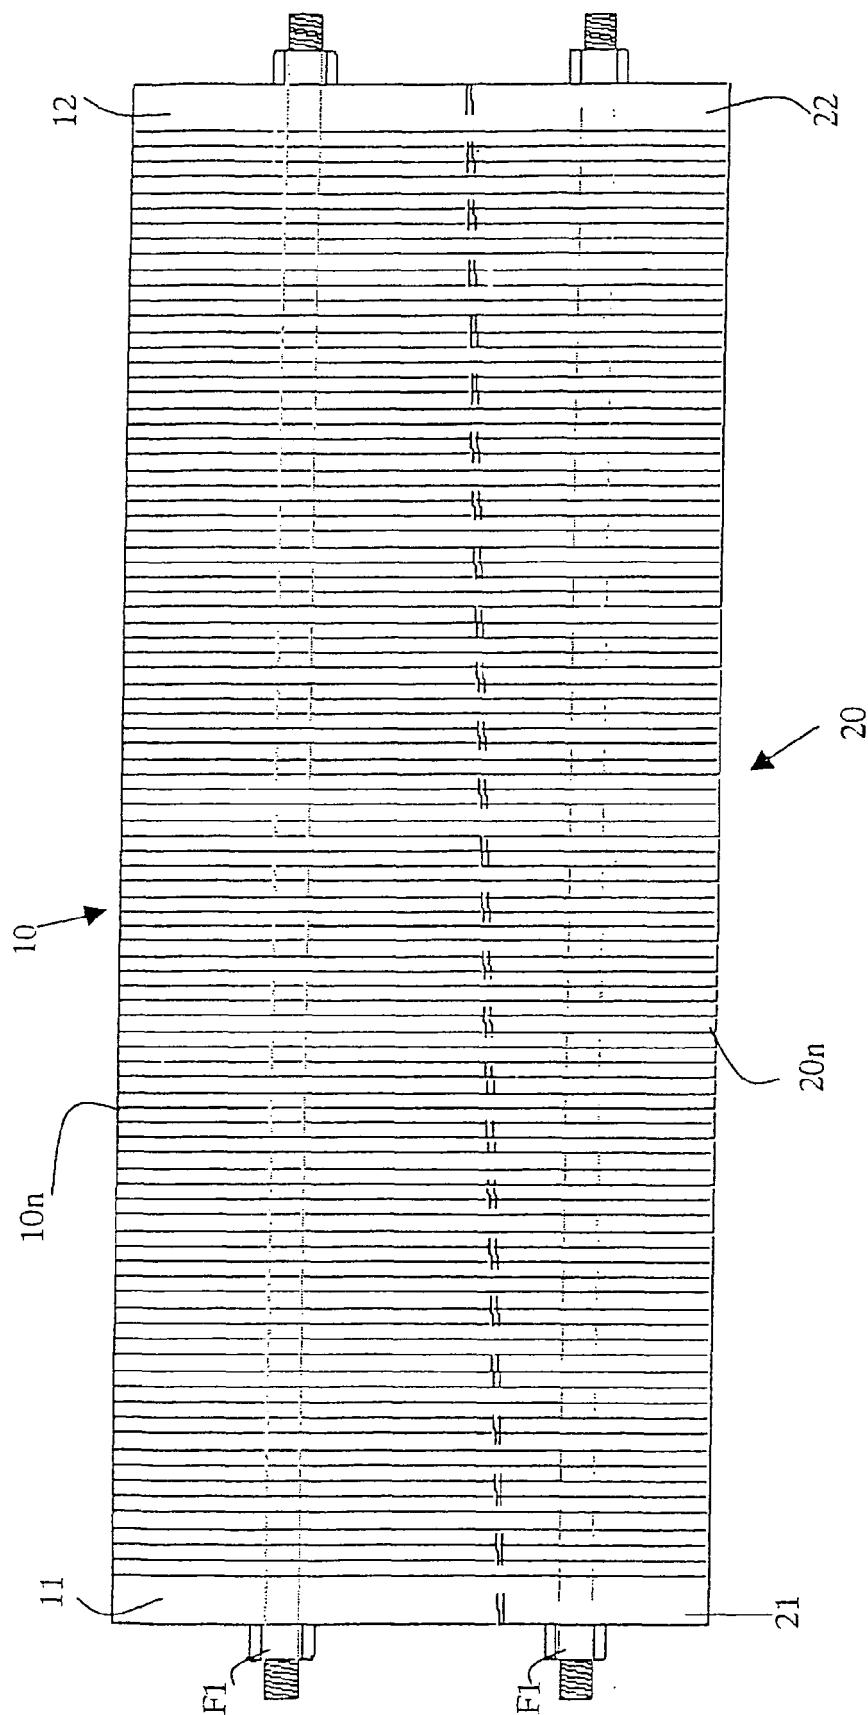


Fig. 5 (a)

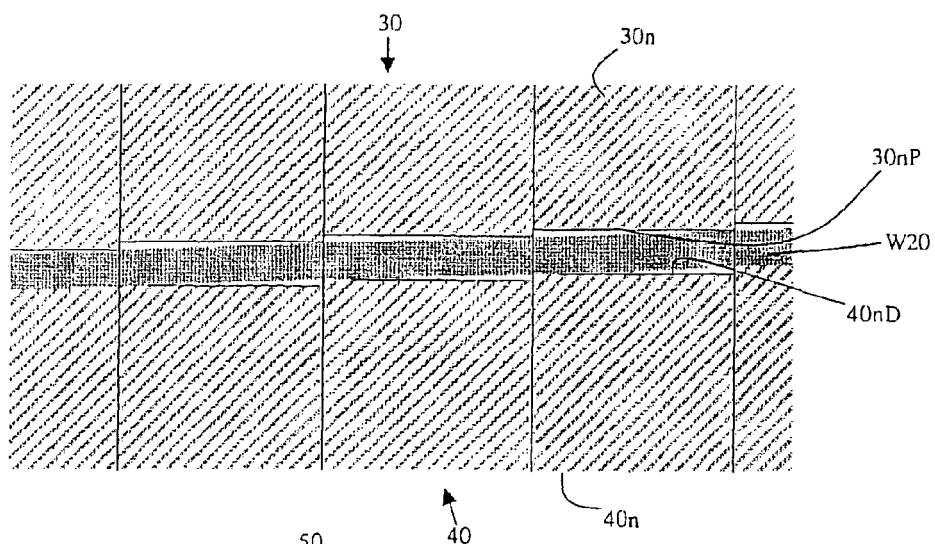


Fig. 5 (b)

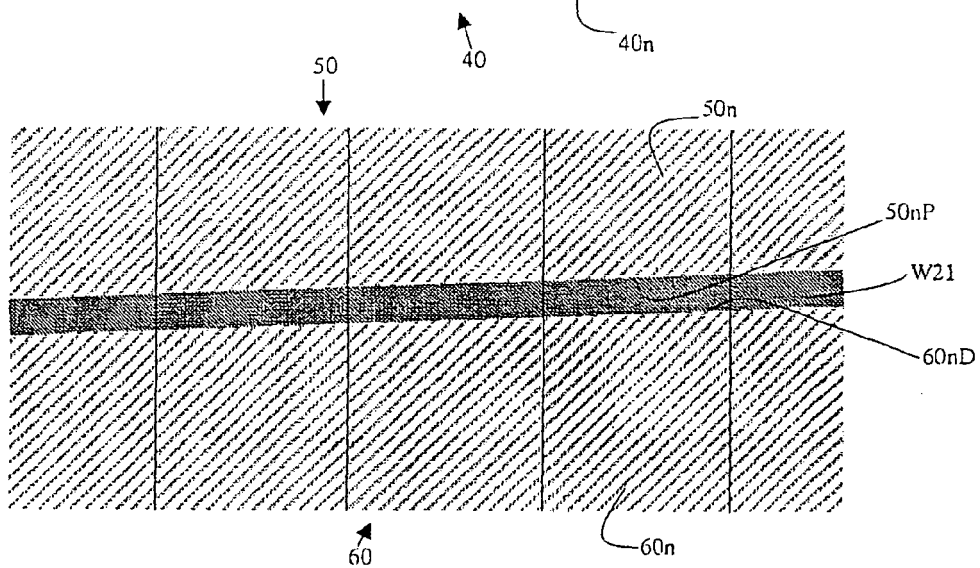


Fig.6

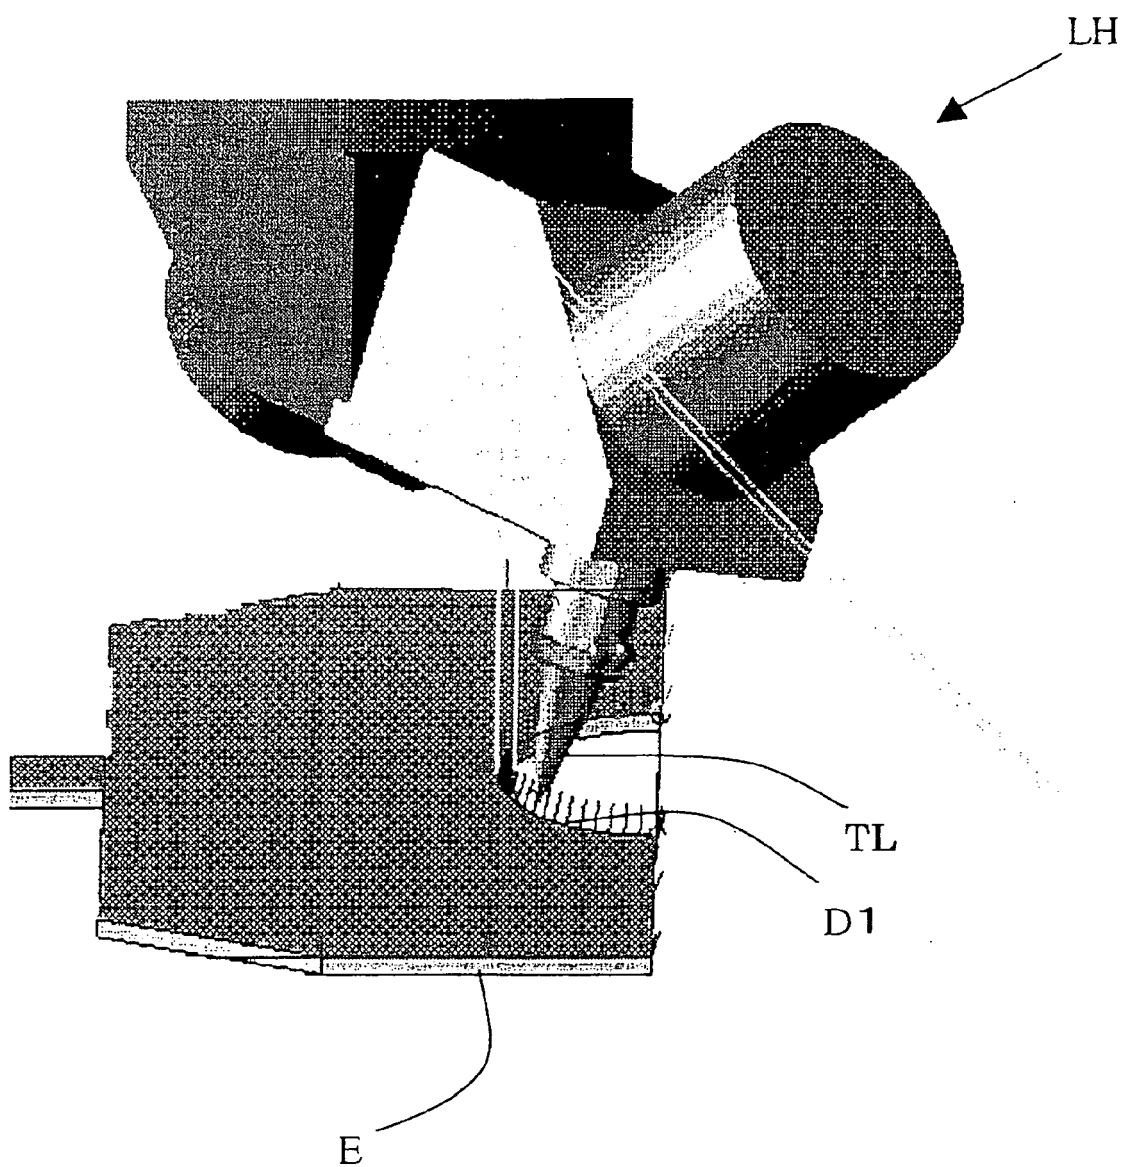


Fig. 7

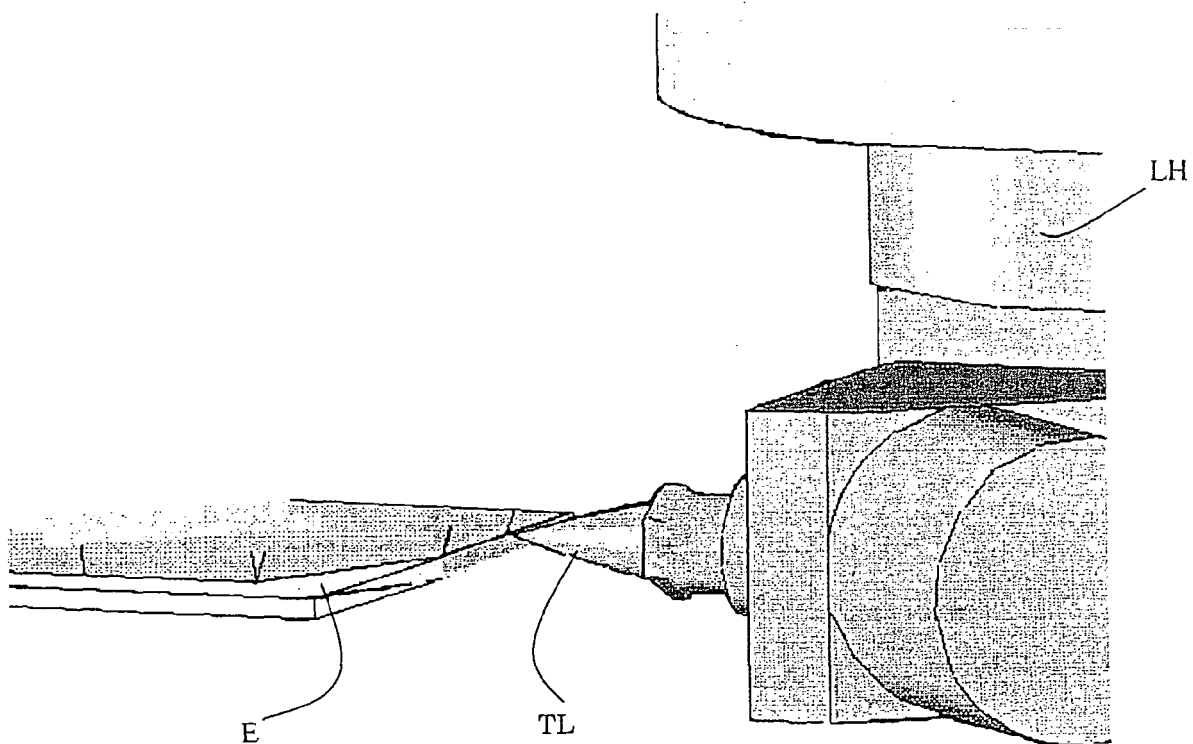
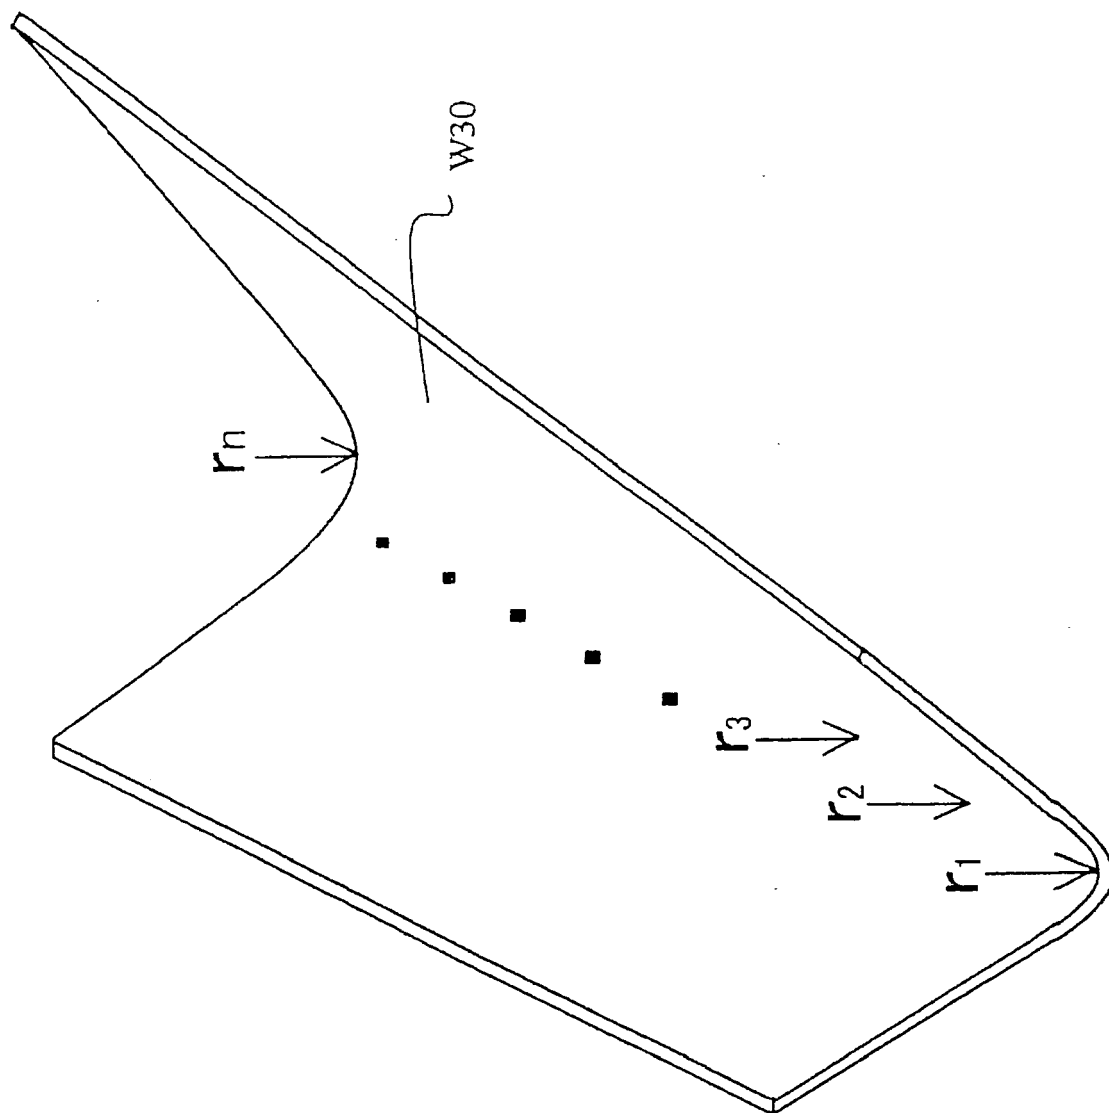


Fig. 8



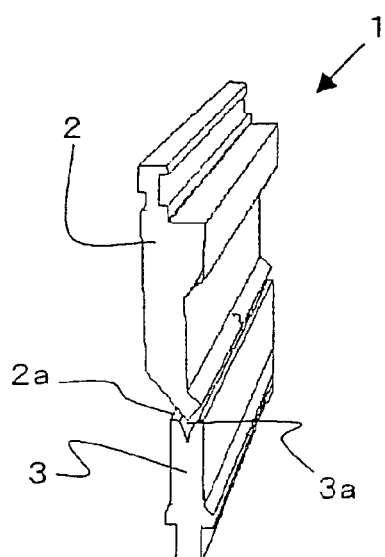


Fig. 9 (a)


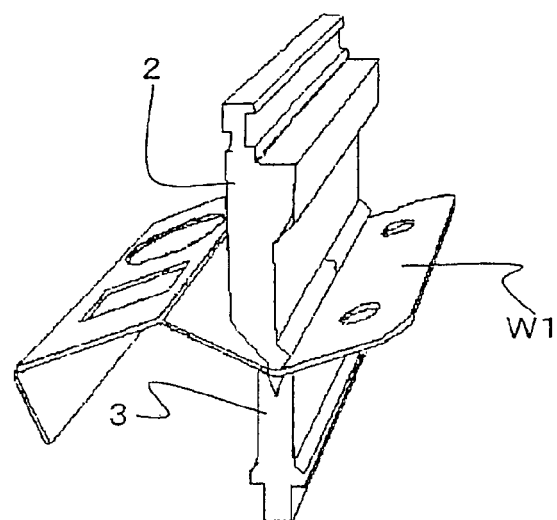


Fig. 9 (b)

Fig.10



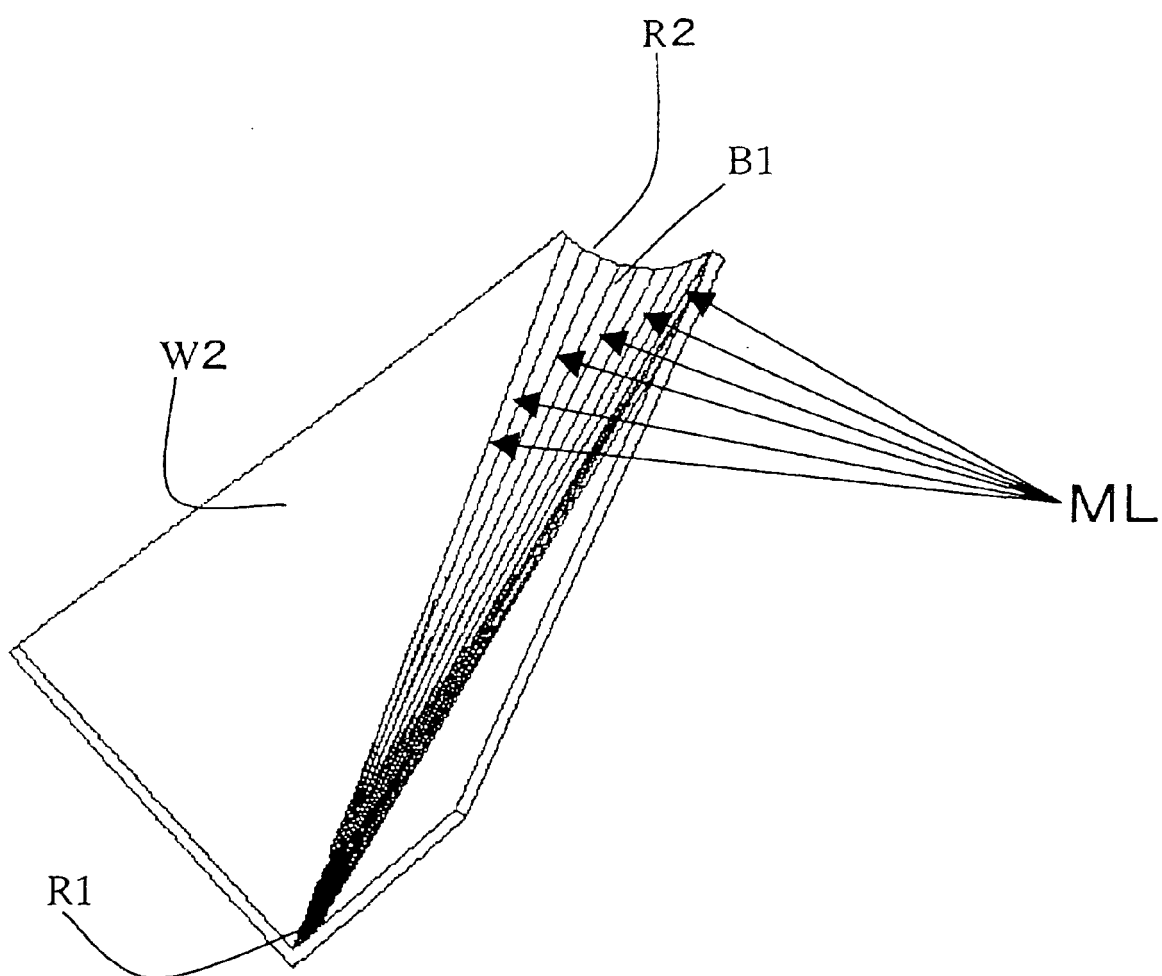

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 40 5206

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	JP 02 229621 A (KYODO KUMIAI F I T) 12 September 1990 (1990-09-12)	1-3	INV. B21D5/02 B21D37/20
X	* figures 1,2 *	4-6	
Y,D	JP 2001 205338 A (AMADA CO LTD) 31 July 2001 (2001-07-31)	1-3	
A	* abstract *	4-6	
A	US 5 878 619 A (WALCZAK KENNETH H [US]) 9 March 1999 (1999-03-09)	1-3	
X	* figure 1 *	4-6	
A	US 3 474 657 A (SPIEGEL RAYMOND J) 28 October 1969 (1969-10-28)	1-3	
X	* figures 1-4 *	4-6	
A	GB 2 392 861 A (TRUFLO AIR MOVEMENT LTD [GB]) 17 March 2004 (2004-03-17)	1-3	
X	* page 4, paragraph 3; figures 1,2 *	4-6	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			B21D G06F
Place of search		Date of completion of the search	Examiner
Munich		22 November 2006	Vinci, Vincenzo
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

6

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 40 5206

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-11-2006

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 2229621	A	12-09-1990	NONE	
JP 2001205338	A	31-07-2001	NONE	
US 5878619	A	09-03-1999	NONE	
US 3474657	A	28-10-1969	NONE	
GB 2392861	A	17-03-2004	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2000140941 A [0005]
- JP 2001205338 A [0006]
- JP 2001001048 A [0006]