



(22) Date de dépôt/Filing Date: 1992/09/28

(41) Mise à la disp. pub./Open to Public Insp.: 1993/05/01

(45) Date de délivrance/Issue Date: 2002/08/20

(30) Priorité/Priority: 1991/10/31 (07/785,519) US

(51) Cl.Int.⁵/Int.Cl.⁵ B23Q 5/56


(72) Inventeur/Inventor:
Gifford, David A., US

(73) Propriétaire/Owner:
Joint Production Technology, Inc., US

(74) Agent: SIM & MCBURNEY

(54) Titre : DISPOSITIF DE REPRISE DE JEU POUR OUTIL DE COUPE

(54) Title: ANTI-BACKLASH DEVICE FOR CUTTING TOOL

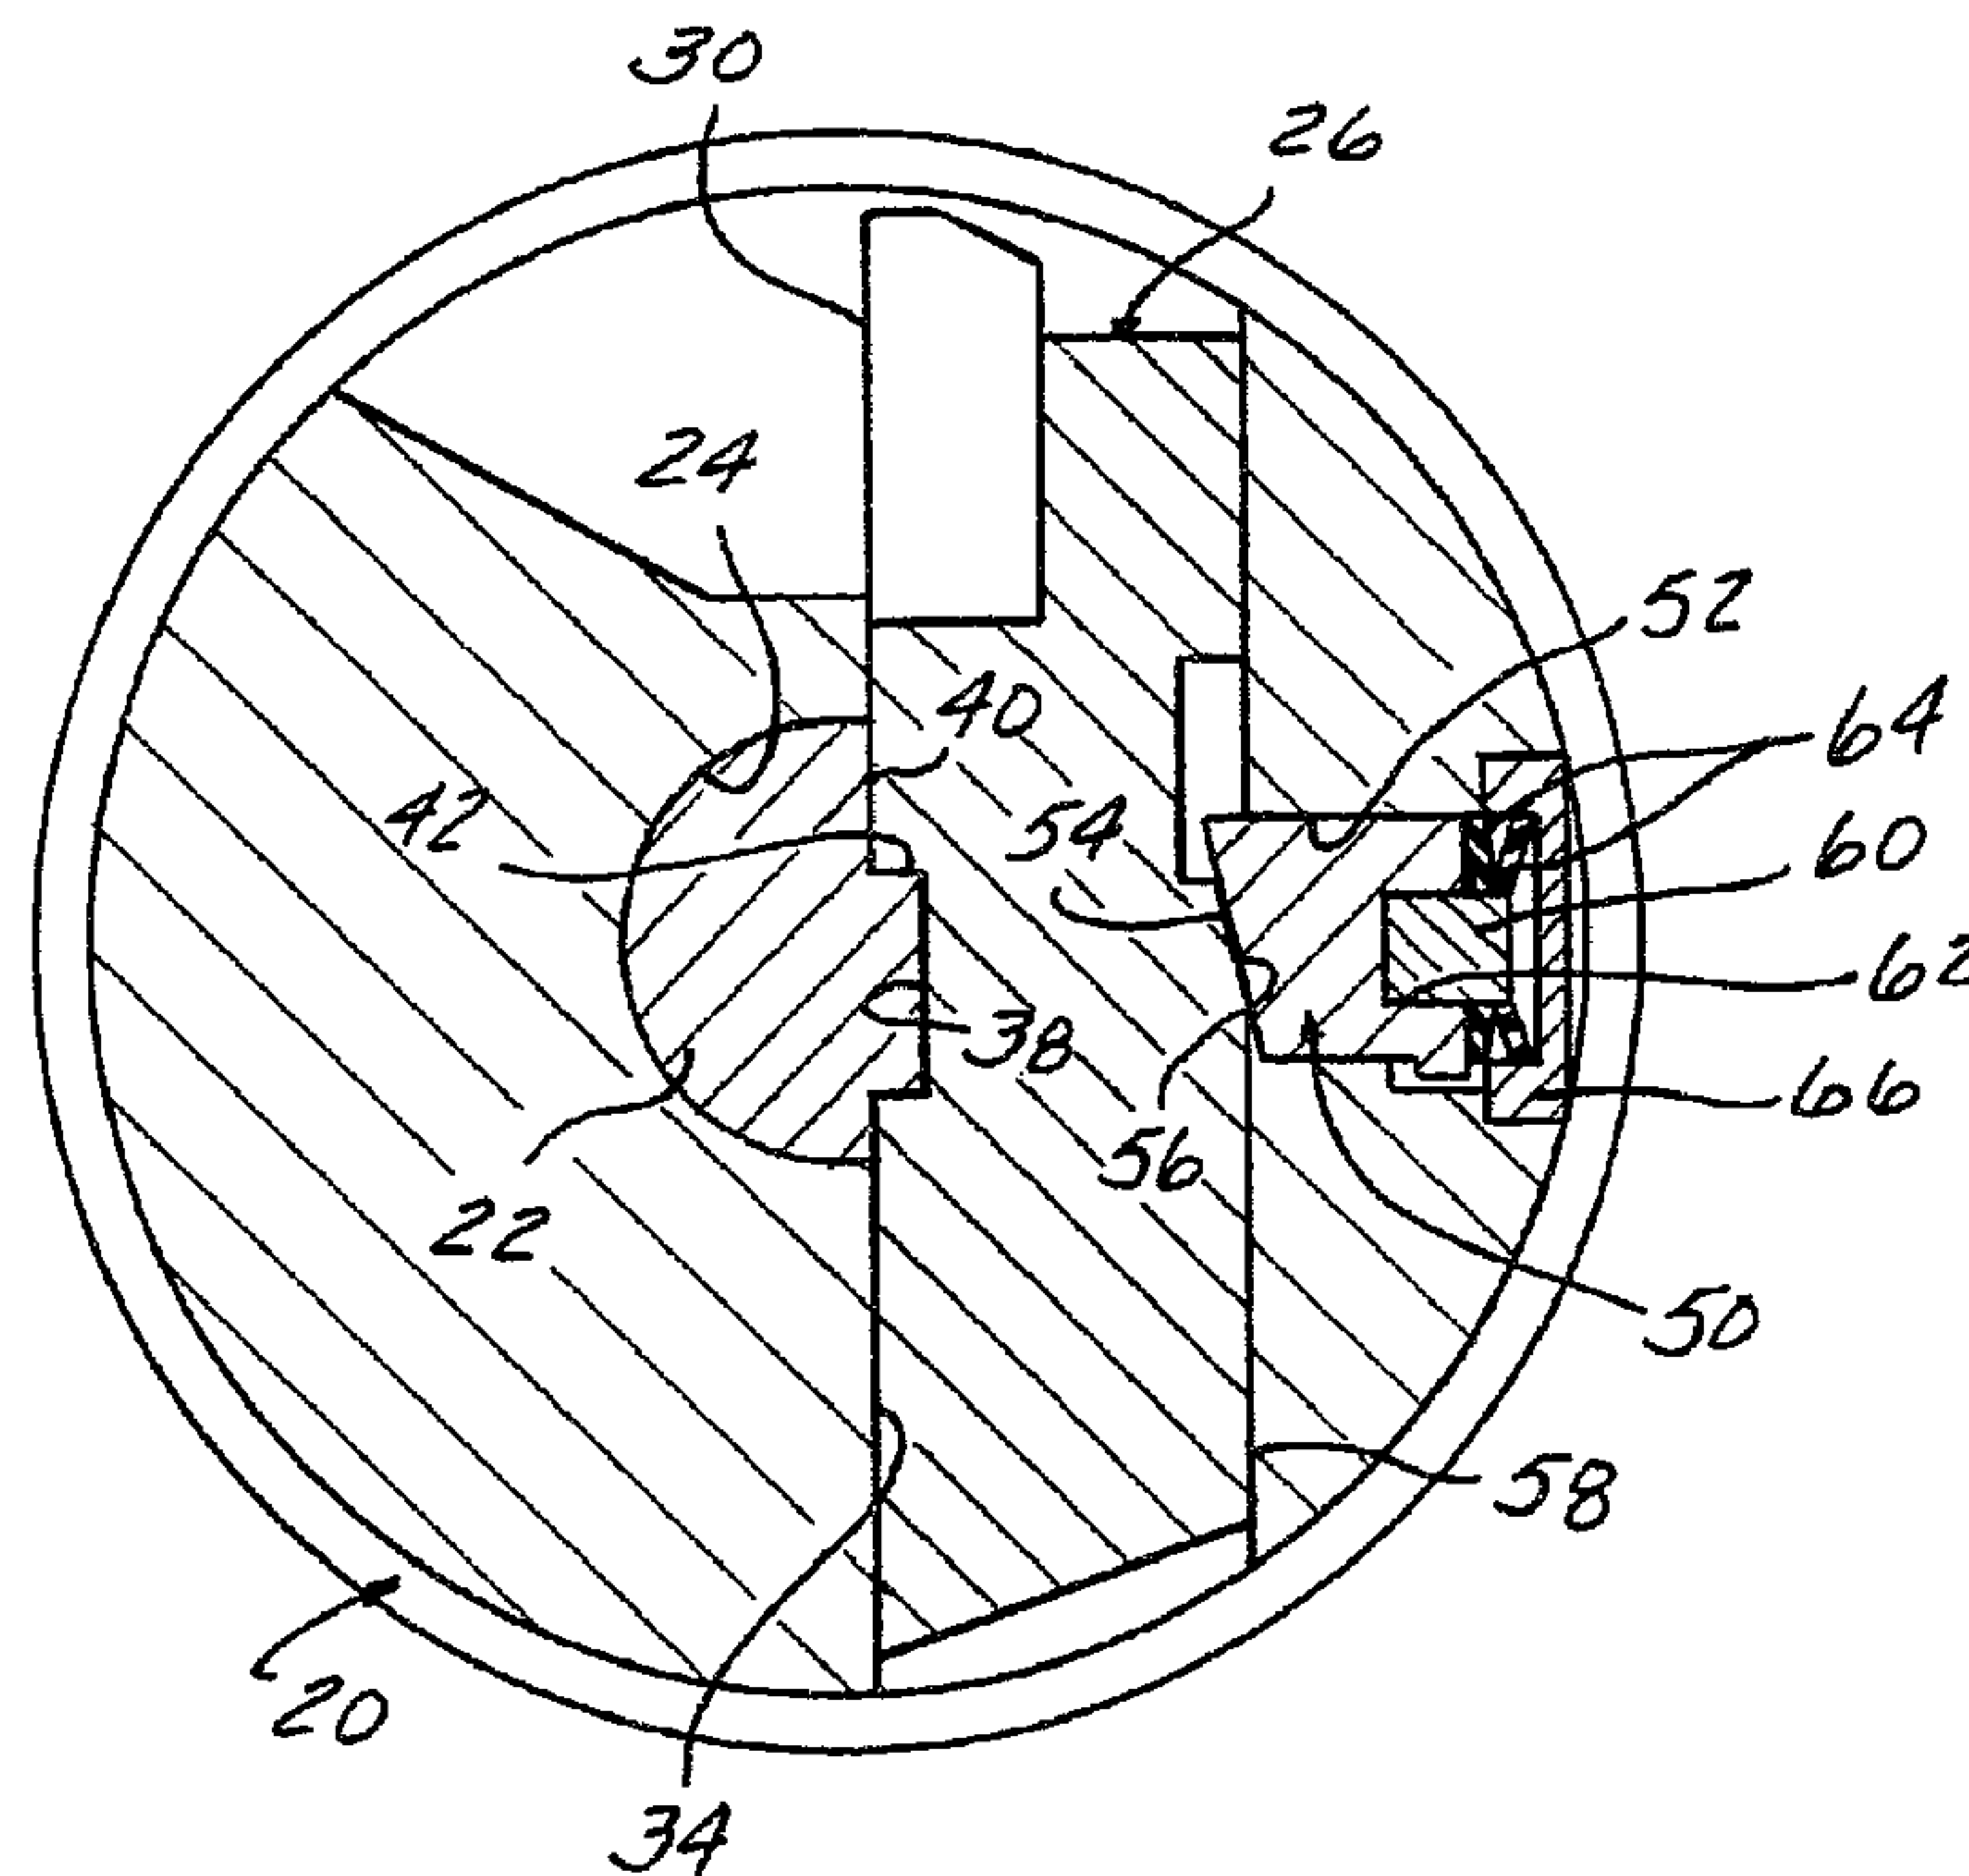

(57) Abrégé/Abstract:

A cutting tool having a main body with a longitudinal axis and one or more slide receiving slots. A cutter carrying slide is slidably received within the slide receiving slot in the body for sliding movement relative to the body along a first slide path extending generally normal to the longitudinal axis. A slide positioning member is provided for shifting the cutter carrying slide along the slide path between a retracted position and a cutting position. An anti-backlash device is also provided for establishing and maintaining firm contact between opposing surfaces of the slide and the slide positioning member during movement of the slide toward the cutting position. The anti-backlash device increases force urging the opposing surfaces into contact with each other as radial displacement increases between the slide and an axis of rotation. The anti-backlash device can include opposing first and second cam surfaces carried by the slide and the main body that engage with one another as the slide moves toward the cutting position. A biasing member can be provided for urging one of the cam surfaces toward the other cam surface.

ANTI-BACKLASH DEVICE FOR CUTTING TOOLABSTRACT

A cutting tool having a main body with a longitudinal axis and one or more slide receiving slots. A cutter carrying slide is slidably received within the slide receiving slot in the body for sliding movement relative to the body along a first slide path extending generally normal to the longitudinal axis. A slide positioning member is provided for shifting the cutter carrying slide along the slide path between a retracted position and a cutting position. An anti-backlash device is also provided for establishing and maintaining firm contact between opposing surfaces of the slide and the slide positioning member during movement of the slide toward the cutting position. The anti-backlash device increases force urging the opposing surfaces into contact with each other as radial displacement increases between the slide and an axis of rotation. The anti-backlash device can include opposing first and second cam surfaces carried by the slide and the main body that engage with one another as the slide moves toward the cutting position. A biasing member can be provided for urging one of the cam surfaces toward the other cam surface.

ANTI-BACKLASH DEVICE FOR CUTTING TOOL

The present invention relates to what will be referred to as an anti-backlash device used to eliminate tool chatter and lost motion within mechanisms employed to position a cutter carrying slide of a cutting tool in an extended cutting position relative to a slide carrying body.

One example of a tool of the type referred to above is disclosed in United States Letters Patent No. 5,086,676 issued February 11, 1992. The tools disclosed in that patent include a rotatable main body having two cutter carrying slides at axially spaced positions along the body. The slides are movable along respective paths extending generally radially of the axis of rotation of the body between retracted positions in which the cutter carrying slides are retracted substantially within the envelope of the rotating main body and extended positions in which cutters carried by the respective slides project from the body to machine bores and end faces in a workpiece which, in U.S. Patent No. 5,086,676, takes the form of an aluminum differential casing. The various slides are shifted between their respective extended and retracted positions by a drawbar mounted for axial reciprocation within a bore through the rotatable main body. Inclined cam surfaces on the drawbar are engageable with complementary inclined cam surfaces on the various slides to shift the slides generally radially of the main body in response to axial movement of the drawbar relative to the body.

Control systems for axially positioning the drawbar of such a tool with a high degree of precision are well-known in the art. A typical arrangement for transforming axial movement of the drawbar into radial movement of the cutter carrying slide finds a flat surface being machined on one side of the drawbar to lie in a plane parallel to the drawbar axis. An elongate key of a rectangular transverse cross-section is fixedly machined on the drawbar to project from this flat surface

with the longitudinal extent of the key being inclined to the drawbar axis. A flat side surface of the slide is slidably engaged in face-to-face relationship with the machined surface on the drawbar and an inclined slot in this surface of the slide slidably receives the key on the drawbar. Thus, axial motion of the drawbar relative to the tool body causes one surface of its key to exert a radial force action on the one wall of the slot of the slider (which is retained against axial movement relative to the body) to drive the slider radially inwardly or outwardly relative to the body axis.

This arrangement requires a slight clearance between the opposite sides of the key on the drawbar and the opposed walls of the slot on the slider. This clearance will increase in usage due to wear. While the drawbar positioning control system is precise enough to compensate and correct for this wear, as well as wear of the cutting tool, the increase in the drawbar key to slide slot clearance reduces the capability of the system to precisely position the cutter.

The increased clearance occasioned by wear between the key and slide slot is of concern primarily with respect to movement of the slide to its cutting position and the locating and maintaining of the slide at a precisely determined cutting position. Movement toward the cutting position is radially outwardly of the axis of rotation of the main body and is induced by the engagement between the radially outermost side of the key on the drawbar with the radially outermost side of the slot on the slide. Essentially, the camming action pushes the slide radially outwardly. However, during this radial outward movement of the slide, the main body of the tool may be rotating at a speed of rotation such that a fairly substantial centrifugal force is applied to the slide urging the slide radially outwardly, tending to disengage the respective radially outer surfaces of the key and slide slot and to permit the surfaces to separate

from each other by a distance determined by the clearance between the key and opposed slot walls. This obviously diminishes the precision of control of the position of the slide during movement toward the cutting position and presents a high probability that chattering will occur.

5 The present invention is directed to an anti-backlash device which will establish and maintain a firm contact between the key and slot wall during movement of the slide toward the cutting position and which will
10 increase the force urging the surfaces into contact with each other as the radial displacement of the slide from the axis of rotation is increased.

A cutter carrying slide typically is mounted within the main body of the tool in a slot or passage in
15 the main body which slidably receives the slider and guides it in movement relative to the body along a straight line path. In accordance with the present invention, the main body is formed with a second passage or bore which extends perpendicular to the path of
20 movement of the slide and opens into one side of the slot or passage which slidably receives the slide. A pin is slidably received in this second passage for movement in a direction normal to the path movement of the slide. That end of the pin adjacent the slide is inclined. A
25 compression spring, which may be constituted by one or more spring washer, such as a Belleville spring, is engaged between a removable cover and that end of the pin remote from the slide. The pin is formed with a tang or projection which engages the main tool body to prevent
30 rotation of the pin and to limit movement of the pin toward the slide under the biasing action of the spring.

That side of the slide adjacent the pin is formed with an inclined surface which is slidably engageable with the inclined surface at the end of the
35 pin as the slide is moved from its retracted position to its cutting position. The inclined surfaces on the slide and pin are in frictional sliding engagement with each

other and are inclined to the path of movement of the slide at an angle such that movement of the slide toward its cutting position wedges the pin outwardly away from the slide against the biasing action of the spring. The biasing force urging the inclined end of the pin against the inclined surface of the slide increases as the pin is moved outwardly by movement of the slide toward its cutting position to exert a maximum frictional or braking force upon the slide as the slide reaches its cutting position. This braking action maintains the radially outer surfaces of the key on the drawbar and slot on the slide in engagement with each other, thus taking up any lost motion in the drawbar positioning means and slide during movement of the slide toward its cutting position. The greater the radial extension of the slide relative to the cutter body, the greater the anti-backlash force applied by the spring biased pin.

According to one aspect of the invention, there is provided a cutting tool comprising a main body having a longitudinal axis, a cutter carrying slide slidably received within a slide receiving slot in the body for sliding movement relative to the body along a first slide path extending generally normal to the axis, and slide positioning means for shifting the cutter carrying slide along the slide path between a retracted position wherein a cutter carried by the slide is retracted into the body and a cutting position wherein a cutter carried by the slide projects outwardly from the body; wherein the cutting tool further comprises means defining a guide passage extending from the slot into the body along a guide path perpendicular to the slide path, a pin slidably received in the guide passage for movement along the guide path, spring means resiliently biasing the pin

4a

toward the slide, and opposed parallel cam surfaces on the slide and on the pin inclined relative to the slide path and the guide path to urge the pin away from the slot into the guide passage against the biasing action of the spring means in response to movement of the slide toward the cutting position, and means engageable between the pin and the body to establish an end limit of movement of the pin toward the slide, wherein the guide passage extends from an outer end opening at the exterior of the body to an inner end opening into the slot, a cover plate detachably mounted on the body in overlying relationship to the outer end of the guide passage, and the spring means includes compression spring means engaged between the cover plate and the adjacent end of the pin.

According to another aspect of the invention, there is provided a cutting tool comprising:

a main body having a longitudinal axis and at least one slide receiving slot;

a cutter carrying slide slidably received within the slide receiving slot in the body for sliding movement relative to the body along a first slide path extending generally normal to the axis;

slide positioning means for shifting the cutter carrying slide along the slide path between a retracted position and a cutting position;

anti-backlash means for establishing and maintaining firm contact between opposing surfaces of the slide and the slide positioning means during movement of the slide toward the cutting position, wherein the anti-backlash means increases a force urging the opposing surfaces into contact with each other as radial displacement of the slide from an axis of rotation

4b

increases, the anti-backlash means including the slide having a first cam surface formed thereon, cam means carried by the main body having a second cam surface for engaging the first cam surface of the slide as the slide moves toward the cutting position, and biasing means for urging the second cam surface toward the first cam surface, wherein the cam means includes the main body having a guide passage extending from the slot into the body along a guide path intersecting the slide path, and a pin slidably received in the guide passage for movement along the guide pat, the pin having the second cam surface, wherein the guide passage extends from an outer end opening at the exterior of the body to an inner end opening into the slot, a cover plate detachably mounted on the body in overlying relationship to the outer end of the guide passage, and the biasing means includes compression spring means engaged between the cover plate and the adjacent end of the pin; and

means engageable between the pin and the body to establish an end limit of movement of the pin toward the slide.

According to another aspect of the invention, there is provided a cutting tool comprising:

a main body having a longitudinal axis and a slide receiving slot defining a first slide path, the main body having a guide passage extending from the slot into the body along a guide path intersecting the slide path, wherein the guide passage extends from an outer end opening at the exterior of the body to an inner end opening into the slot;

a cover plate detachably mounted on the body in overlying relationship to the outer end of the guide passage;

4c

a cutter carrying slide slidably received within the slide receiving slot in the body for sliding movement relative to the body along the first slide path extending generally normal to the axis, the slide having
5 a first cam surface formed thereon;

slide positioning means for shifting the cutter carrying slide along the slide path between a retracted position and a cutting position, wherein the positioning
10 means includes a positioning member mounted within the body for movement axially of the body, means defining a first inclined plane surface on the positioning member slidably engageable with a second complementary inclined plane surface on the slide to drive the slide toward the
15 cutting position in response to axial movement of the positioning member in a first direction; and

anti-backlash means for establishing and maintaining firm contact between opposing surfaces of the slide and the slide positioning means during movement of
20 the slide toward the cutting position, wherein the anti-backlash means increases a force urging the opposing surfaces into contact with each other as radial displacement of the slide from an axis of rotation increases, the anti-backlash means including:

25 cam means carried by the main body having a second cam surface for engaging the first cam surface of the slide as the slide moves toward the cutting position, the cam means being in a sliding frictional engagement with each other to exert a braking force upon movement of
30 the slide toward the cutting position for maintaining the first and the second surfaces engaged with each other, wherein the force increases with an increase in displacement of the slide from the retracted position, the cam means including a pin slidably received in the

4d

guide passage for movement along the guide path, the pin having the second cam surface, wherein the pin includes means defining a reduced diameter section projecting from the adjacent end;

biasing means for urging the second cam surface toward the first cam surface, wherein the biasing means includes compression spring means engaged between the cover plate and the adjacent end of the pin, and wherein the spring means includes at least one Belleville-type spring, wherein the Belleville-type spring includes a central opening for receiving the reduced diameter section of the pin;

means defining an end limit of movement of the cam means toward the slide, the means engageable between the pin and the body to establish an end limit of movement of the pin toward the slide; and

means engageable between the pin and the body for restraining the pin against rotation within the guide passage.

Other objects and features of the invention will become apparent by reference to the following specification and to the drawings, wherein like reference numerals refer to like parts throughout the various views, and where:

Fig. 1 is a side elevational view showing a portion of a cutting tool with which the present invention is employed, with certain parts broken away or omitted;

Fig. 2 is a cross-sectional view taken on line 2-2 of Fig. 1;

Fig. 2A is an enlarged view of a portion of Fig. 2;

Fig. 3 is a side view of the cutter carrying

4e

slide of the tool;

. Fig. 4 is an exploded perspective view showing components of the anti-backlash device of the present invention, with certain parts broken away or omitted;

Fig. 5 is a side elevational view of the anti-backlash pin and a roll pin; and

Fig. 6 is an end view of the pin of Fig. 5.

The portion of the tool shown in Fig. 1 includes elements of the tool disclosed in the above-mentioned U.S. Patent No. 5,086,676 to which reference
5 may be had for further details of the tool.

The tool as shown in Fig. 1, for purposes of the present application, includes a shaft-like main body designated generally 20 which is mounted by appropriate means, not shown, for rotation about its longitudinal
10 axis. An elongate drawbar 22 is slidably received within a central longitudinal bore 24 in body 20 for sliding axial movement relative to body 20 in rotatively fixed relationship relative to body 20 in this particular tool. Mounted at axially spaced locations within body 20 are
15 two cutter carrying slide assemblies 26, 28, which carry cutters 30 and 32 respectively intended to machine certain surfaces such as S1, S2, S3 and S4 upon a workpiece W partially indicated in section in Fig. 1. The slide assemblies 26, 28 are received in slots such as
20 34, 36 which, as viewed in Fig. 1, extend vertically through the body 20 at locations which are typically slightly offset from the axis of body 20 as best seen in Fig. 2.

Referring now particularly to cutter carrying
25 slide assembly 26, shown in cross-section in Fig. 2, that side of slide assembly 26 closest to the axis of body 20 is formed with a slot 38 which, as best seen in Fig. 1, extends diagonally across the assembly 26 in an inclined relationship to the axis of body 20. As best seen in
30 Fig. 2, drawbar 22 is formed with a flat side surface section 40 having a key 42 projecting from surface 40 which is dimensioned and inclined relative to the axis of body 20 so as to be snugly, but slidably, received within the inclined slot 38 of slide assembly 26.

Referring now to Fig. 1, slide 26 is shown with its cutter 30 at an outwardly predetermined position with drawbar 22 shifted to a right-hand limit of movement, and slide 28 is shown in a retracted position. The inclined relationship between the key 42 on drawbar 22 and slot 38 in the cutter carrying slide 26 exerts a radial force on slide assembly 26 moving the slide upwardly or radially outwardly of the axis of body 20 as viewed in Fig. 1 when drawbar 22 is moved to the right. In Fig. 1, the drawbar 22 is shown at a right-hand limit of movement relative to body 20, and slide assembly 28 is positioned in a retracted position in which its cutter is substantially withdrawn into the interior of body 20. Movement of slide assembly 28 upwardly as viewed in Fig. 1 from the position shown moves the cutter 32 radially outwardly to a pre-determined distance from the axis of body 20 establishing the machining of surfaces S3 and S4 of a workpiece W to be machined by cutter 32 on rotation of body 20 and advancement of drawbar 22 to the left from the Fig. 1 position.

For purposes of the present application, the tooling structure described thus far may be assumed to be conventional, and further details of the structure and operation of this tooling may be found in U.S. Patent No. 5,086,676.

Control systems presently available for positioning a drawbar such as drawbar 22 relative to a tool body such as 20 are capable of axially positioning the drawbar with a high degree of precision. Such precision is a prerequisite to the use of the tool to machine surfaces such as the surfaces S1, S2, S3 and S4 of Fig. 1 to extremely close dimensional tolerances. In the case of cutter carrying slide 26, the positioning of cutter 30 radially of the axis of body 20 by axial movement of drawbar 22 will be precise as long as the upper side surface of key 42 of the drawbar remains in

contact with the opposed downwardly facing side surface at the upper side of slot 38 in the slide.

The control system which controls the drawbar positioning mechanism can be set up to reposition drawbar
5 22 as may be required to compensate for wear of cutter 30. However, even as originally manufactured, there must be a slight clearance between the opposite sides of the key 42 and the opposed side walls of slot 38 to accommodate free sliding movement between these opposed
10 surfaces, and with continued usage of the tool, this latter clearance will inevitably increase due to wear occasioned by the repeated sliding movement of the opposed surfaces against each other.

The existence of this latter clearance permits
15 the cutter carrying slide assembly to shift in either direction radially of the tool axis (vertically as viewed in Fig. 1) with the amount of such movement depending upon the magnitude of the clearance. The effect might perhaps be described as a "radial looseness" between the
20 slide 26 and body 20. Such "radial looseness" obviously will effect the precision and repeatability of dimensioning machine surfaces formed by the tool and will also make the tool extremely susceptible to chattering. The present invention is especially intended to eliminate
25 such "radial looseness".

The mechanism for eliminating this "radial looseness" will be referred to broadly as an anti-backlash device. Referring particularly to Figs. 2 and 4, the anti-backlash device includes a pressure pin
30 designated generally 50 which is slidably received in a bore 52 extending from the exterior of main body 20 normal to the path of movement of slide 26 to open into the slide receiving slot 34 which receives the cutter carrying slide 26. As best seen in Figs. 2 and 5, the
35 inner end of pin 50 is formed with an inclined planar surface 54 which engages a complementarily inclined plane

surface 56 on that side 58 of slide 26 which faces the pin.

Referring now particularly to Figs. 2 and 2A, the opposite end of pin 50 carries a locating pin or roll pin 60 fixedly secured in any suitable manner to the main body of pin 50 to project coaxially from the end of the pin. In the form shown, the pin 60 is press fitted within a bore 62 in pin 50. Locating pin 60 passes through the central openings of two (or more) frustoconical washers or spring washers 64 to locate the spring washers 64 radially relative to pin 50 and to each other. When the anti-backlash device is assembled to main body 20 as in Figs. 2 and 2A, a cover plate 66, fixedly secured to main body 20 as by screws 68 (Fig. 4) received in tapped bores 70 in body 20 compresses the spring washers 64 to apply a spring bias to pin 50 urging the inclined surface 54 of pin 50 against the opposed inclined surface 56 on the cutter carrying slide 26. The inner face of the cover plate 66 may be formed with a spot face bore 72 which receives the spring washer 64 in a manner best seen in the enlarged view of Fig. 2A.

Referring particularly now to Figs. 4, 5 and 6, a radially projecting tang 74 is formed on the spring engaging or outer end of pin 50, the tang 74 being formed with parallel flat opposed side surfaces 76 best seen in Fig. 6. A tang receiving pocket 78 conformed in shape to tang 74 is formed at the outer end of bore 52 so that when pin 50 is received in bore 52, the side walls 76 of tang 74 engaged opposed side walls of the pocket 78 to rotatively fix pin 50 in bore 52 so that the inclined surface 54 at the inner end of pin 50 is maintained in accurate sliding face-to-face relationship with the inclined surface 56 of the slider (Fig. 2).

Tang 74, as best seen in Fig. 2A, also functions as a stop limiting inward movement of pin 50 under the biasing action of spring washers 64 by the engagement of the inner side surface of tang 74 with the

shoulder 82 at the inner end of pocket 78 as shown in Fig. 2A. From Fig. 2A, it should be noted that the thickness of tang 74 in the axial direction is substantially less than the depth of pocket 78, this difference representing the end limit of axial movement of pin 50 outwardly (to the right as viewed in Figs. 2 and 2A) which would be established by engagement between the outer surface of pin 50 and the cover plate 66.

Referring now to Fig. 2, in Fig. 2 the cutter carrying slide 26 is shown in a retracted position in which the cutter 30 carried at the upper end of slide 26, as viewed in Fig. 2, is retracted to a position within the envelope of main body 20. Pin 50 is biased to its end limit of movement to the left as viewed in Fig. 2. In Fig. 2, the inclined surface 54 at the inner end of pin 50 is illustrated as being in face-to-face engagement with the opposed inclined surface 56 on slide assembly 26. This face-to-face relationship of the surfaces 54 and 56 in the inclined position may or may not exist in all cases when the slide 26 is in its fully retracted position which is determined by the inclined key-slot coupling 42, 38 between the drawbar 22 and slide 26. Slide 26 might, for example, be located slightly below the position shown in Fig. 2 so that the inclined surfaces 54, 56 were slightly disengaged from each other or, alternatively, slide 26 might be positioned slightly above the position shown in Fig. 2, in which case, the inclined surfaces would push pin 50 slightly to the right from the position shown in Fig. 2 against the biasing action of the spring washers 64.

In either case, when the drawbar is actuated to shift slide 26 upwardly from the position shown in Fig. 2 to a cutting position in which the cutter 30 projects outwardly beyond the outer surface of body 20, as slide 26 moves upwardly as viewed in Fig. 2, the inclined surface 56 of the slide will slide upwardly against the inclined surface 54 on pin 50 exerting a wedging action

which forces pin 50 to the right as viewed in Fig. 2 against the biasing action of spring washers 64. As slide assembly 26 moves upwardly as viewed in Fig. 2, pin 50 must move to the right to increasingly compress spring washers 64 and this increased compression of the spring washers 64 increases the force with which the inclined surface 54 on the pin is pressed against the inclined surface 56 on the slider. These two surfaces, when sliding relative to each other generate a frictional braking action resisting movement of slide assembly 26 upwardly as viewed in Fig. 2. This braking action in turn assures that the upper side surface of key 42 on drawbar 22 is firmly pressed against the opposed upper side surface of slot 38 on slide 26, hence eliminating any "radial looseness" between the slide and drawbar. In that the braking force exerted by pin 50 to extending (upward as viewed in Fig. 2) movement of slide assembly 26 increases with the amount of extension, the force maintaining the upper side surfaces of the drawbar key 42 and slide slot 38 in engagement likewise increases with the displacement of slide assembly 26 from its retracted position.

The invention as here disclosed is shown as being applied to a rotary cutting tool, however it is believed apparent that the anti-backlash device described above is not limited in application to the particular type of tool shown or to rotary tools in general, but is instead applicable to tools in general which employ a cutter carrying slide movable along a fixed path relative to a slide carrying body.

Thus, while one embodiment of the invention has been disclosed and described in detail, it will be apparent to those skilled in the art that the disclosed embodiment may be modified. Therefore, the foregoing description is to be considered exemplary rather than limiting, and the true scope of the invention is that defined in the following claims.

CLAIMS:

1. A cutting tool comprising a main body having a longitudinal axis, a cutter carrying slide slidably
5 received within a slide receiving slot in said body for sliding movement relative to said body along a first slide path extending generally normal to said axis, and slide positioning means for shifting said cutter carrying slide along said slide path between a retracted position
10 wherein a cutter carried by said slide is retracted into said body and a cutting position wherein a cutter carried by said slide projects outwardly from said body; wherein said cutting tool further comprises means defining a guide passage extending from said slot into said body
15 along a guide path perpendicular to said slide path, a pin slidably received in said guide passage for movement along said guide path, spring means resiliently biasing said pin toward said slide, and opposed parallel cam surfaces on said slide and on said pin inclined relative
20 to said slide path and said guide path to urge said pin away from said slot into said guide passage against the biasing action of said spring means in response to movement of said slide toward said cutting position, and means engageable between said pin and said body to
25 establish an end limit of movement of said pin toward said slide, wherein said guide passage extends from an outer end opening at the exterior of said body to an inner end opening into said slot, a cover plate detachably mounted on said body in overlying relationship
30 to said outer end of said guide passage, and said spring means includes compression spring means engaged between said cover plate and the adjacent end of said pin.

2. The cutting tool defined in claim 1 wherein said compression spring means includes at least one Belleville-type spring.

5 3. The cutting tool defined in claim 2 wherein said Belleville-type spring includes a central opening and said pin includes means defining a reduced diameter section projecting from said adjacent end through said central opening.

10

4. A cutting tool comprising:

a main body having a longitudinal axis and at least one slide receiving slot;

15 a cutter carrying slide slidably received within said slide receiving slot in said body for sliding movement relative to said body along a first slide path extending generally normal to said axis;

20 slide positioning means for shifting said cutter carrying slide along said slide path between a retracted position and a cutting position;

25 anti-backlash means for establishing and maintaining firm contact between opposing surfaces of said slide and said slide positioning means during movement of said slide toward said cutting position, wherein said anti-backlash means increases a force urging said opposing surfaces into contact with each other as radial displacement of said slide from an axis of rotation increases, said anti-backlash means including said slide having a first cam surface formed thereon, cam means
30 carried by said main body having a second cam surface for engaging said first cam surface of said slide as said slide moves toward said cutting position, and biasing means for urging said second cam surface toward said

first cam surface, wherein said cam means includes said main body having a guide passage extending from said slot into said body along a guide path intersecting said slide path, and a pin slidably received in said guide passage
5 for movement along said guide pat, said pin having said second cam surface, wherein said guide passage extends from an outer end opening at the exterior of said body to an inner end opening into said slot, a cover plate detachably mounted on said body in overlying relationship
10 to said outer end of said guide passage, and said biasing means includes compression spring means engaged between said cover plate and the adjacent end of said pin; and means engageable between said pin and said body to establish an end limit of movement of said pin toward
15 said slide.

5. The invention defined in claim 4 wherein said compression spring means includes at least one Belleville-type spring.

20

6. The invention defined in claim 5 wherein said Belleville-type spring includes a central opening and said pin includes means defining a reduced diameter section projecting from said adjacent end through said
25 central opening.

7. A cutting tool comprising:

a main body having a longitudinal axis and a slide receiving slot defining a first slide path, said main
30 body having a guide passage extending from said slot into said body along a guide path intersecting said slide path, wherein said guide passage extends from an outer

end opening at the exterior of said body to an inner end opening into said slot;

a cover plate detachably mounted on said body in overlying relationship to said outer end of said guide
5 passage;

a cutter carrying slide slidably received within said slide receiving slot in said body for sliding movement relative to said body along said first slide path extending generally normal to said axis, said slide
10 having a first cam surface formed thereon;

slide positioning means for shifting said cutter carrying slide along said slide path between a retracted position and a cutting position, wherein said positioning means includes a positioning member mounted within said
15 body for movement axially of said body, means defining a first inclined plane surface on said positioning member slidably engageable with a second complementary inclined plane surface on said slide to drive said slide toward said cutting position in response to axial movement of
20 said positioning member in a first direction; and

anti-backlash means for establishing and maintaining firm contact between opposing surfaces of said slide and said slide positioning means during movement of said slide toward said cutting position, wherein said anti-backlash means increases a force urging said opposing
25 surfaces into contact with each other as radial displacement of said slide from an axis of rotation increases, said anti-backlash means including:

cam means carried by said main body having a second
30 cam surface for engaging said first cam surface of said slide as said slide moves toward said cutting position, said cam means being in a sliding frictional engagement with each other to exert a braking force upon movement of

said slide toward said cutting position for maintaining said first and said second surfaces engaged with each other, wherein said force increases with an increase in displacement of said slide from said retracted position,
5 said cam means including a pin slidably received in said guide passage for movement along said guide path, said pin having said second cam surface, wherein said pin includes means defining a reduced diameter section projecting from said adjacent end;

10 biasing means for urging said second cam surface toward said first cam surface, wherein said biasing means includes compression spring means engaged between said cover plate and the adjacent end of said pin, and wherein said spring means includes at least one Belleville-type
15 spring, wherein said Belleville-type spring includes a central opening for receiving said reduced diameter section of said pin;

means defining an end limit of movement of said cam means toward said slide, said means engageable between
20 said pin and said body to establish an end limit of movement of said pin toward said slide; and

means engageable between said pin and said body for restraining said pin against rotation within said guide passage.




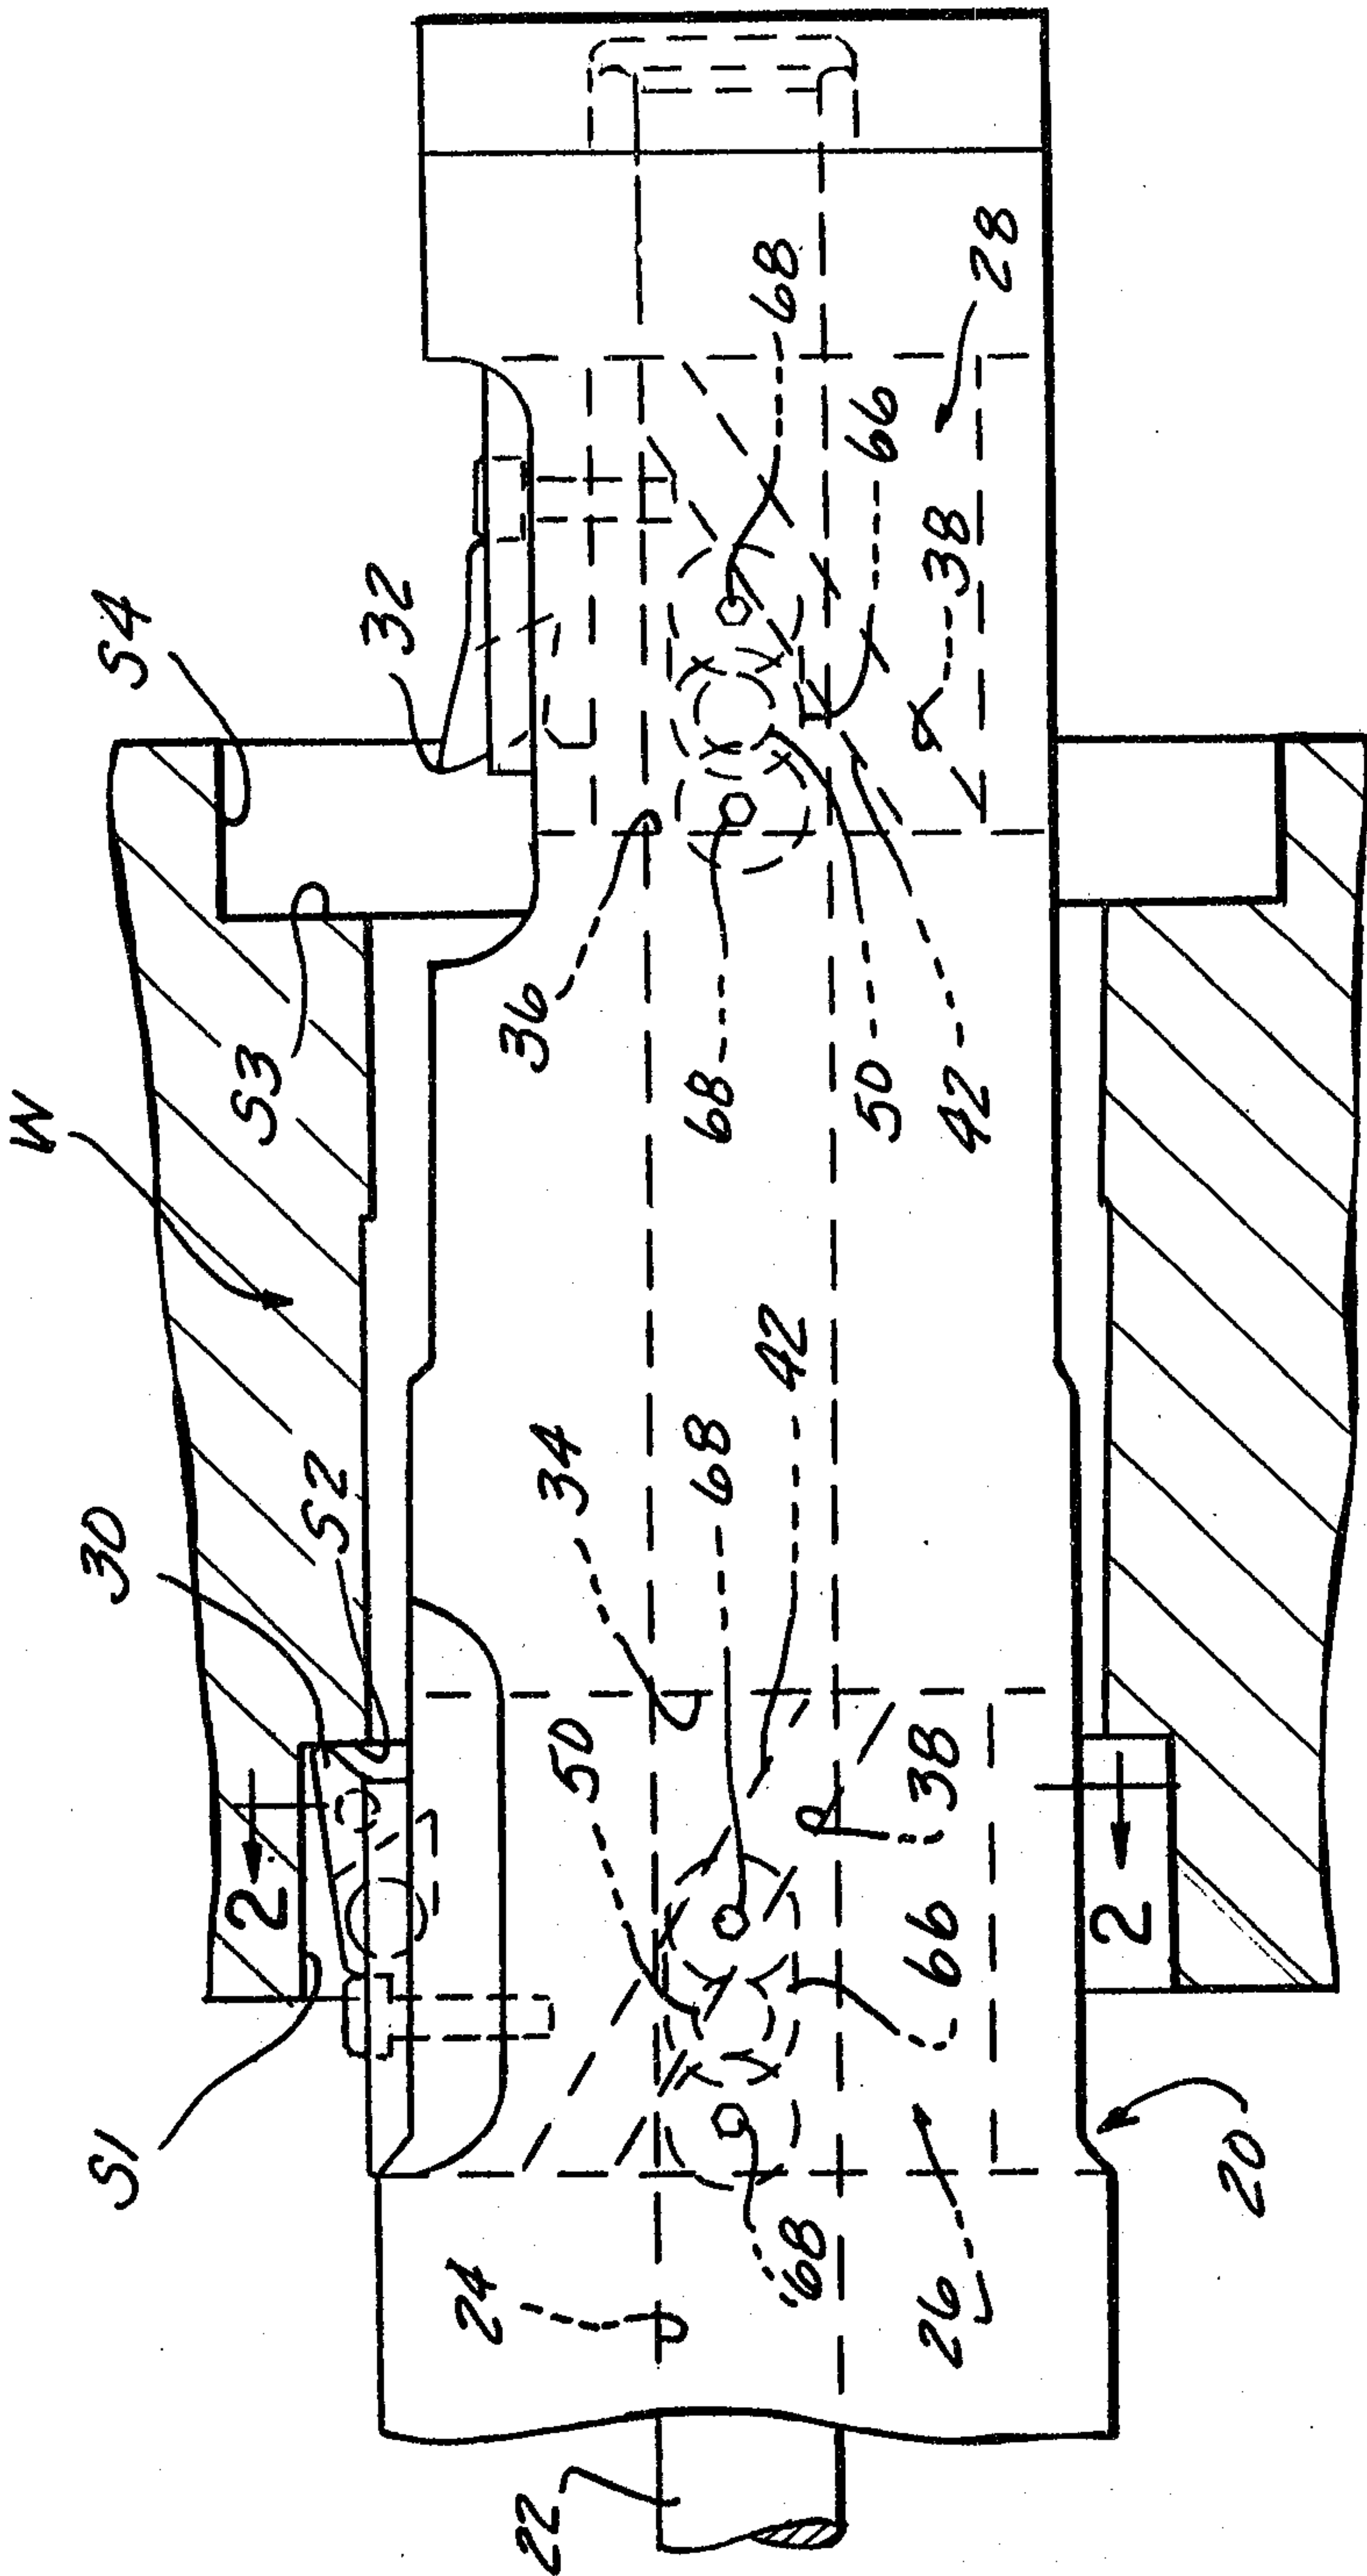


FIG-1

2079219

See 1/2 of drawing

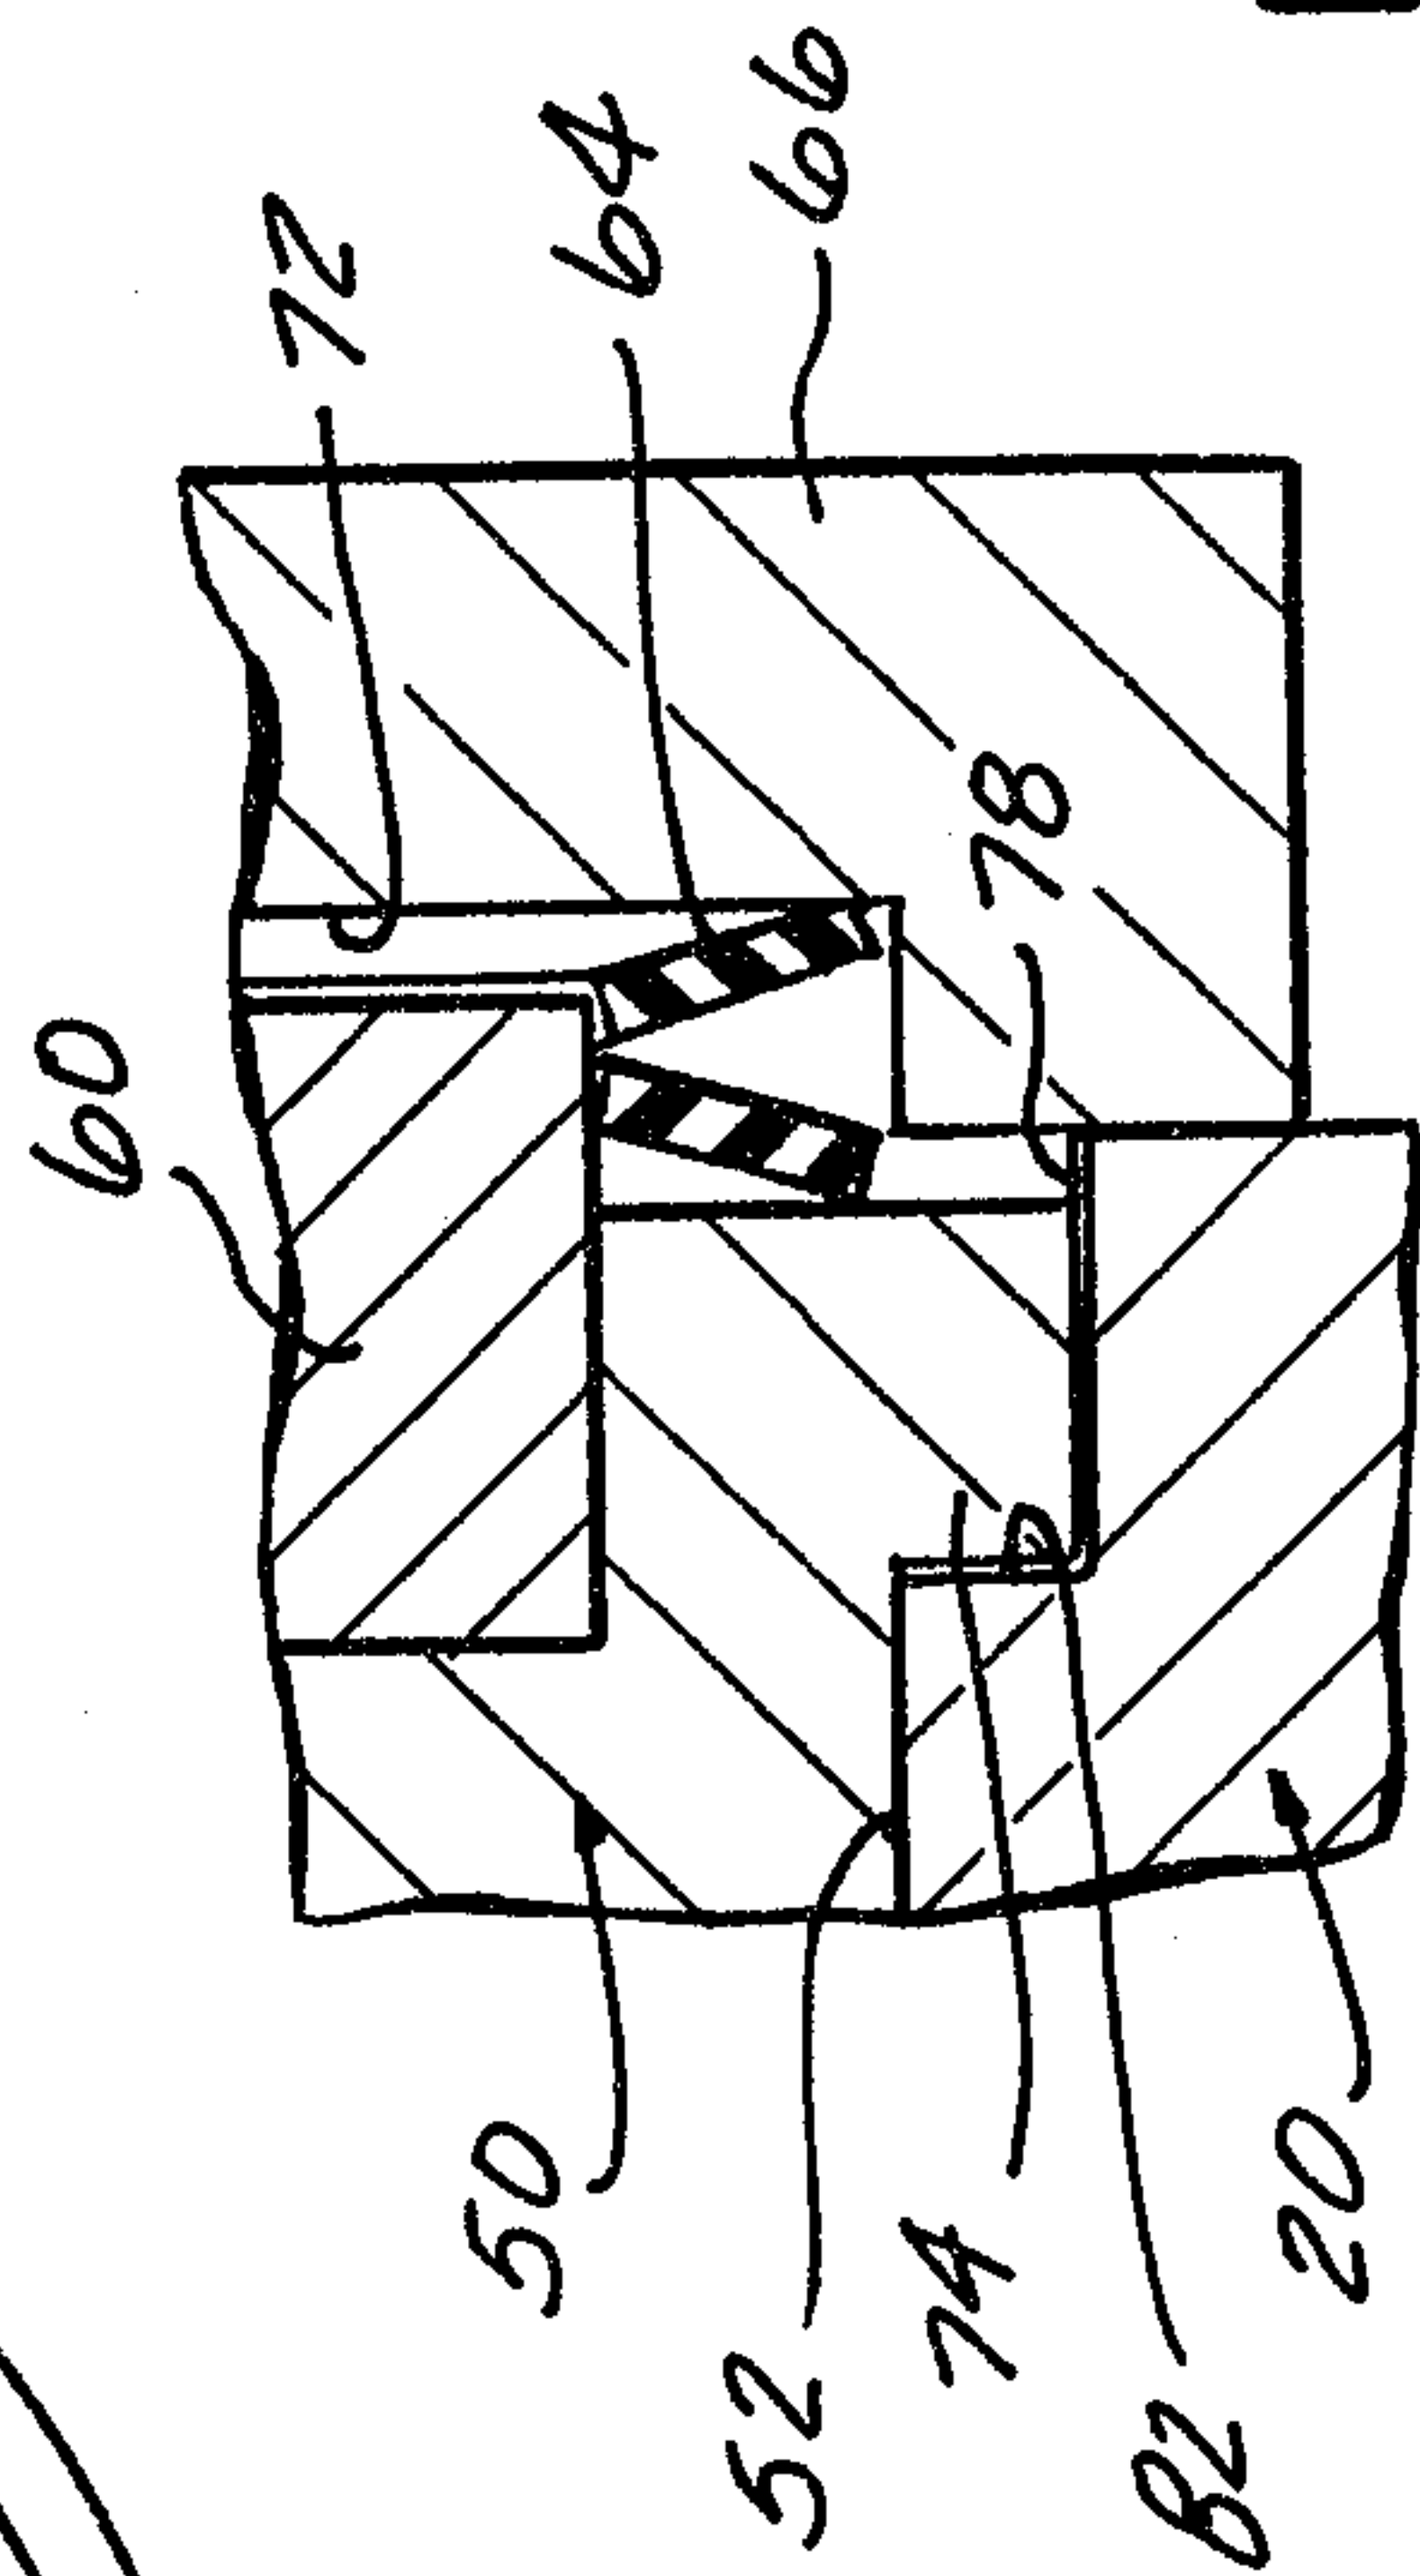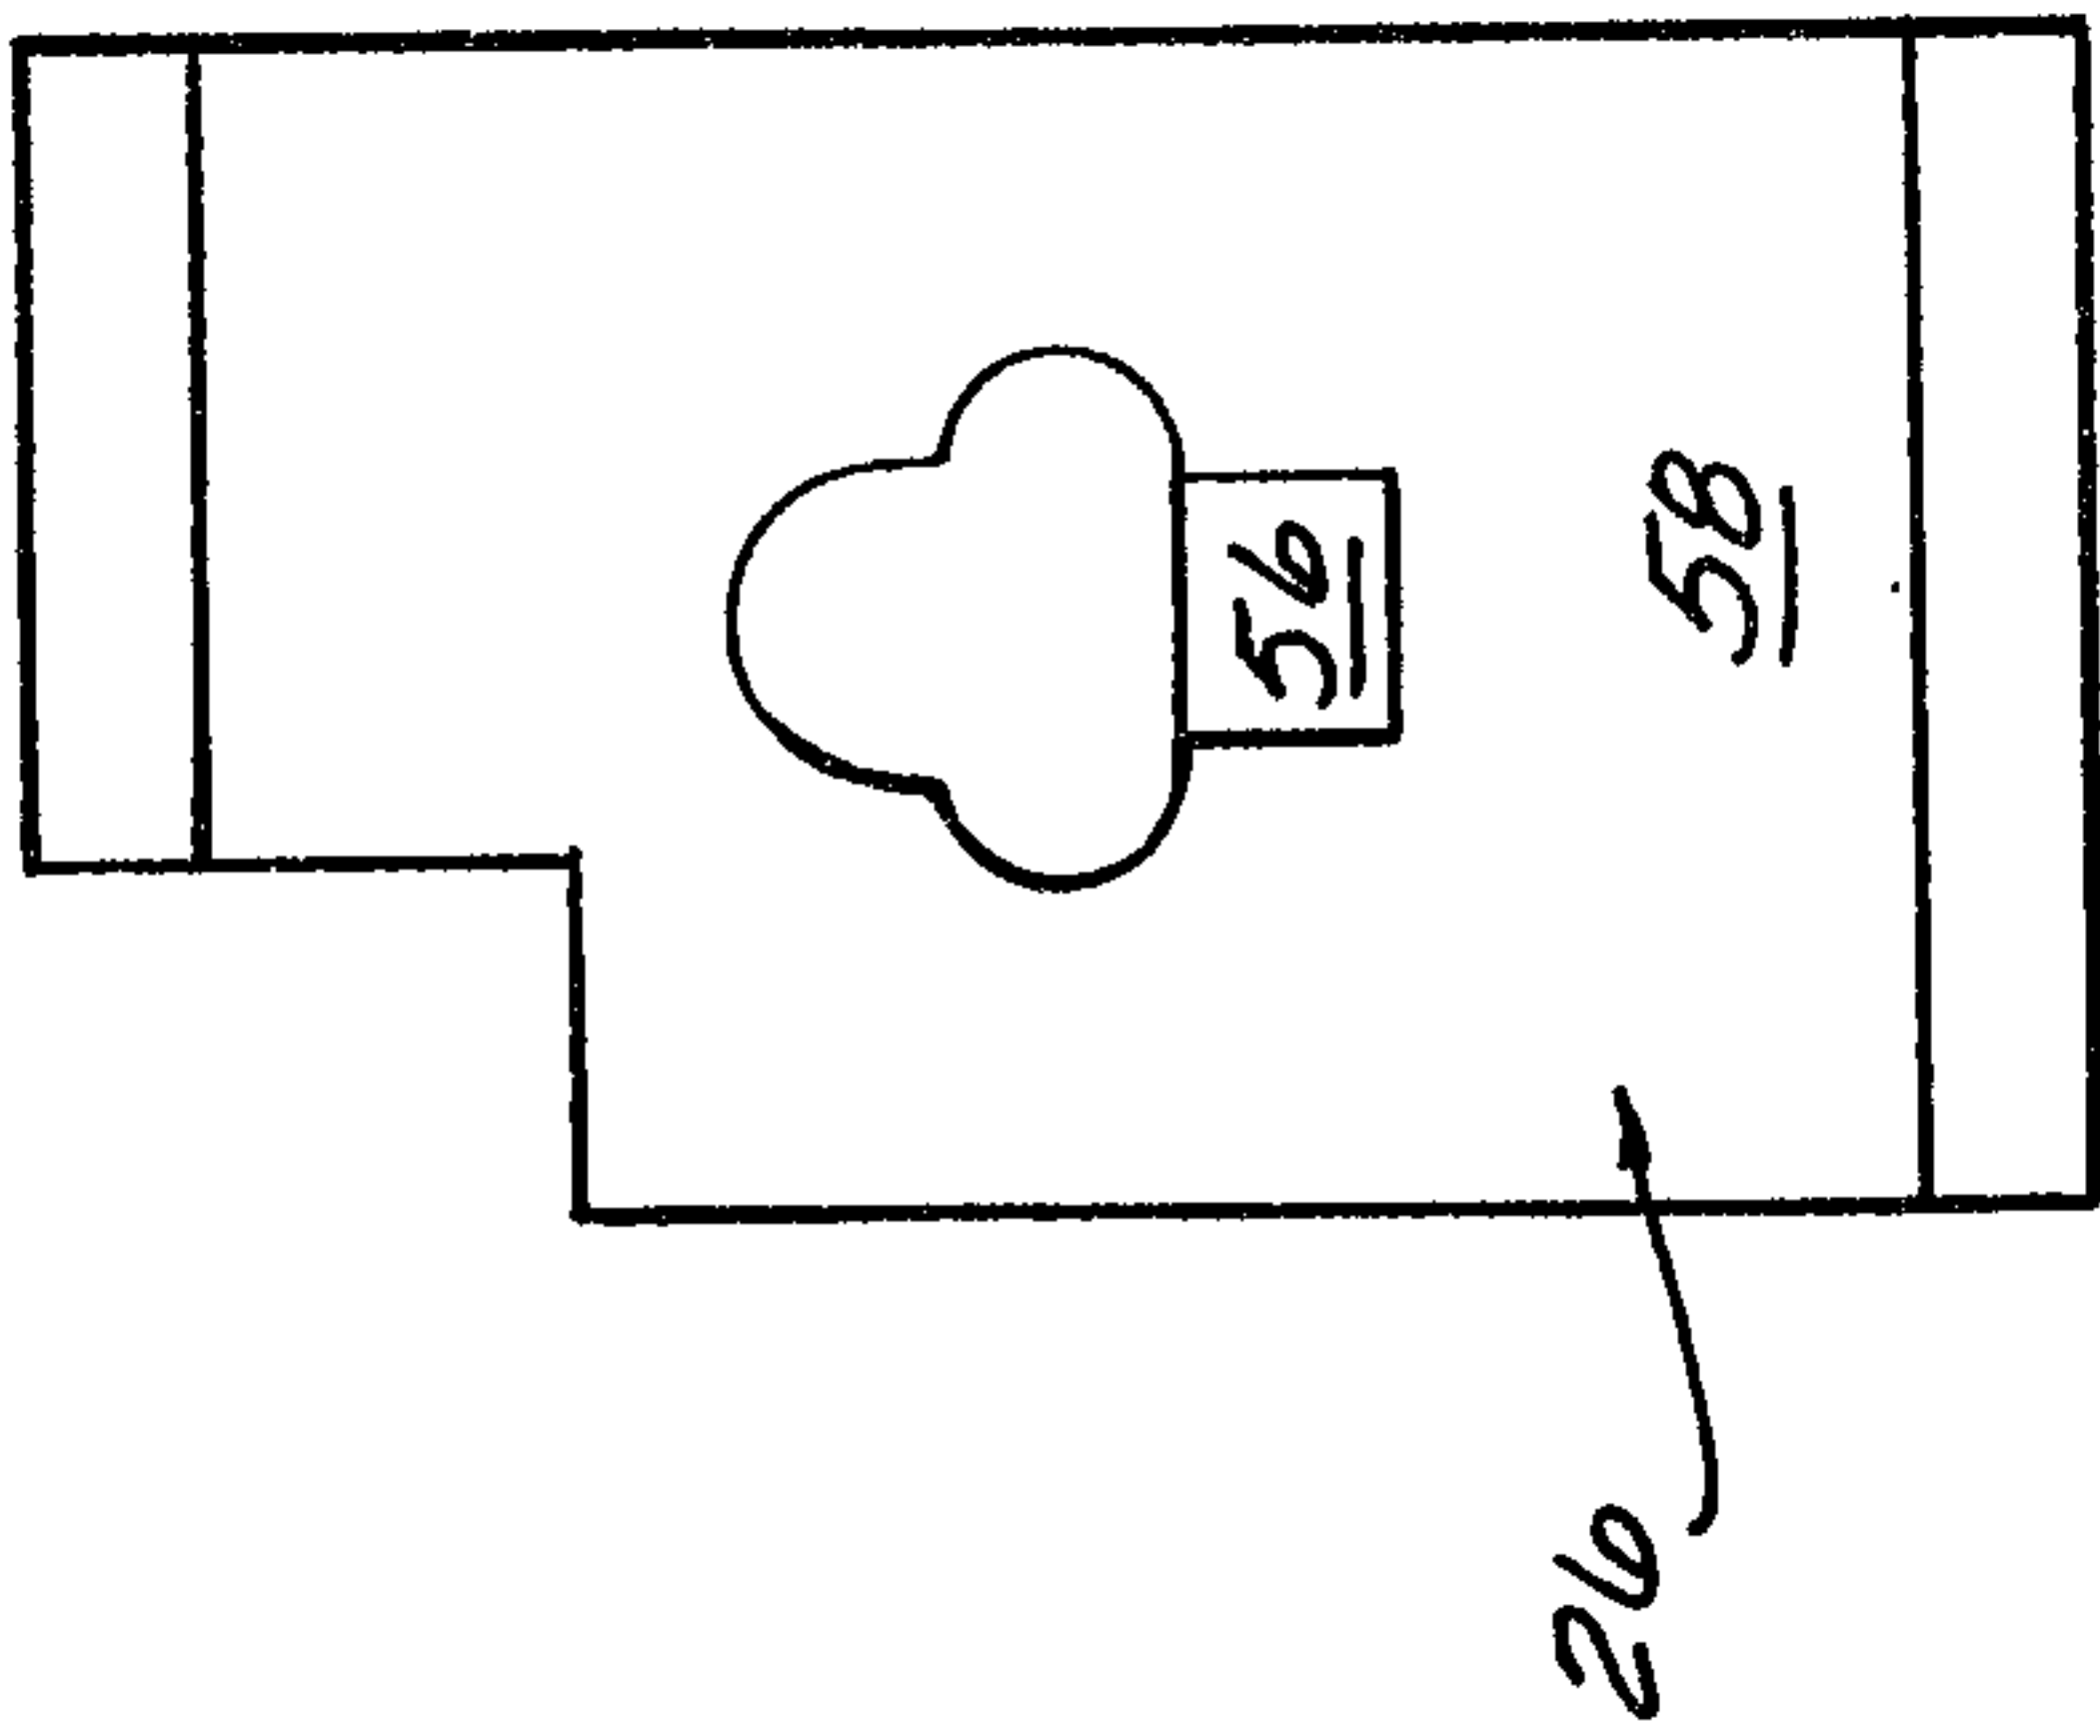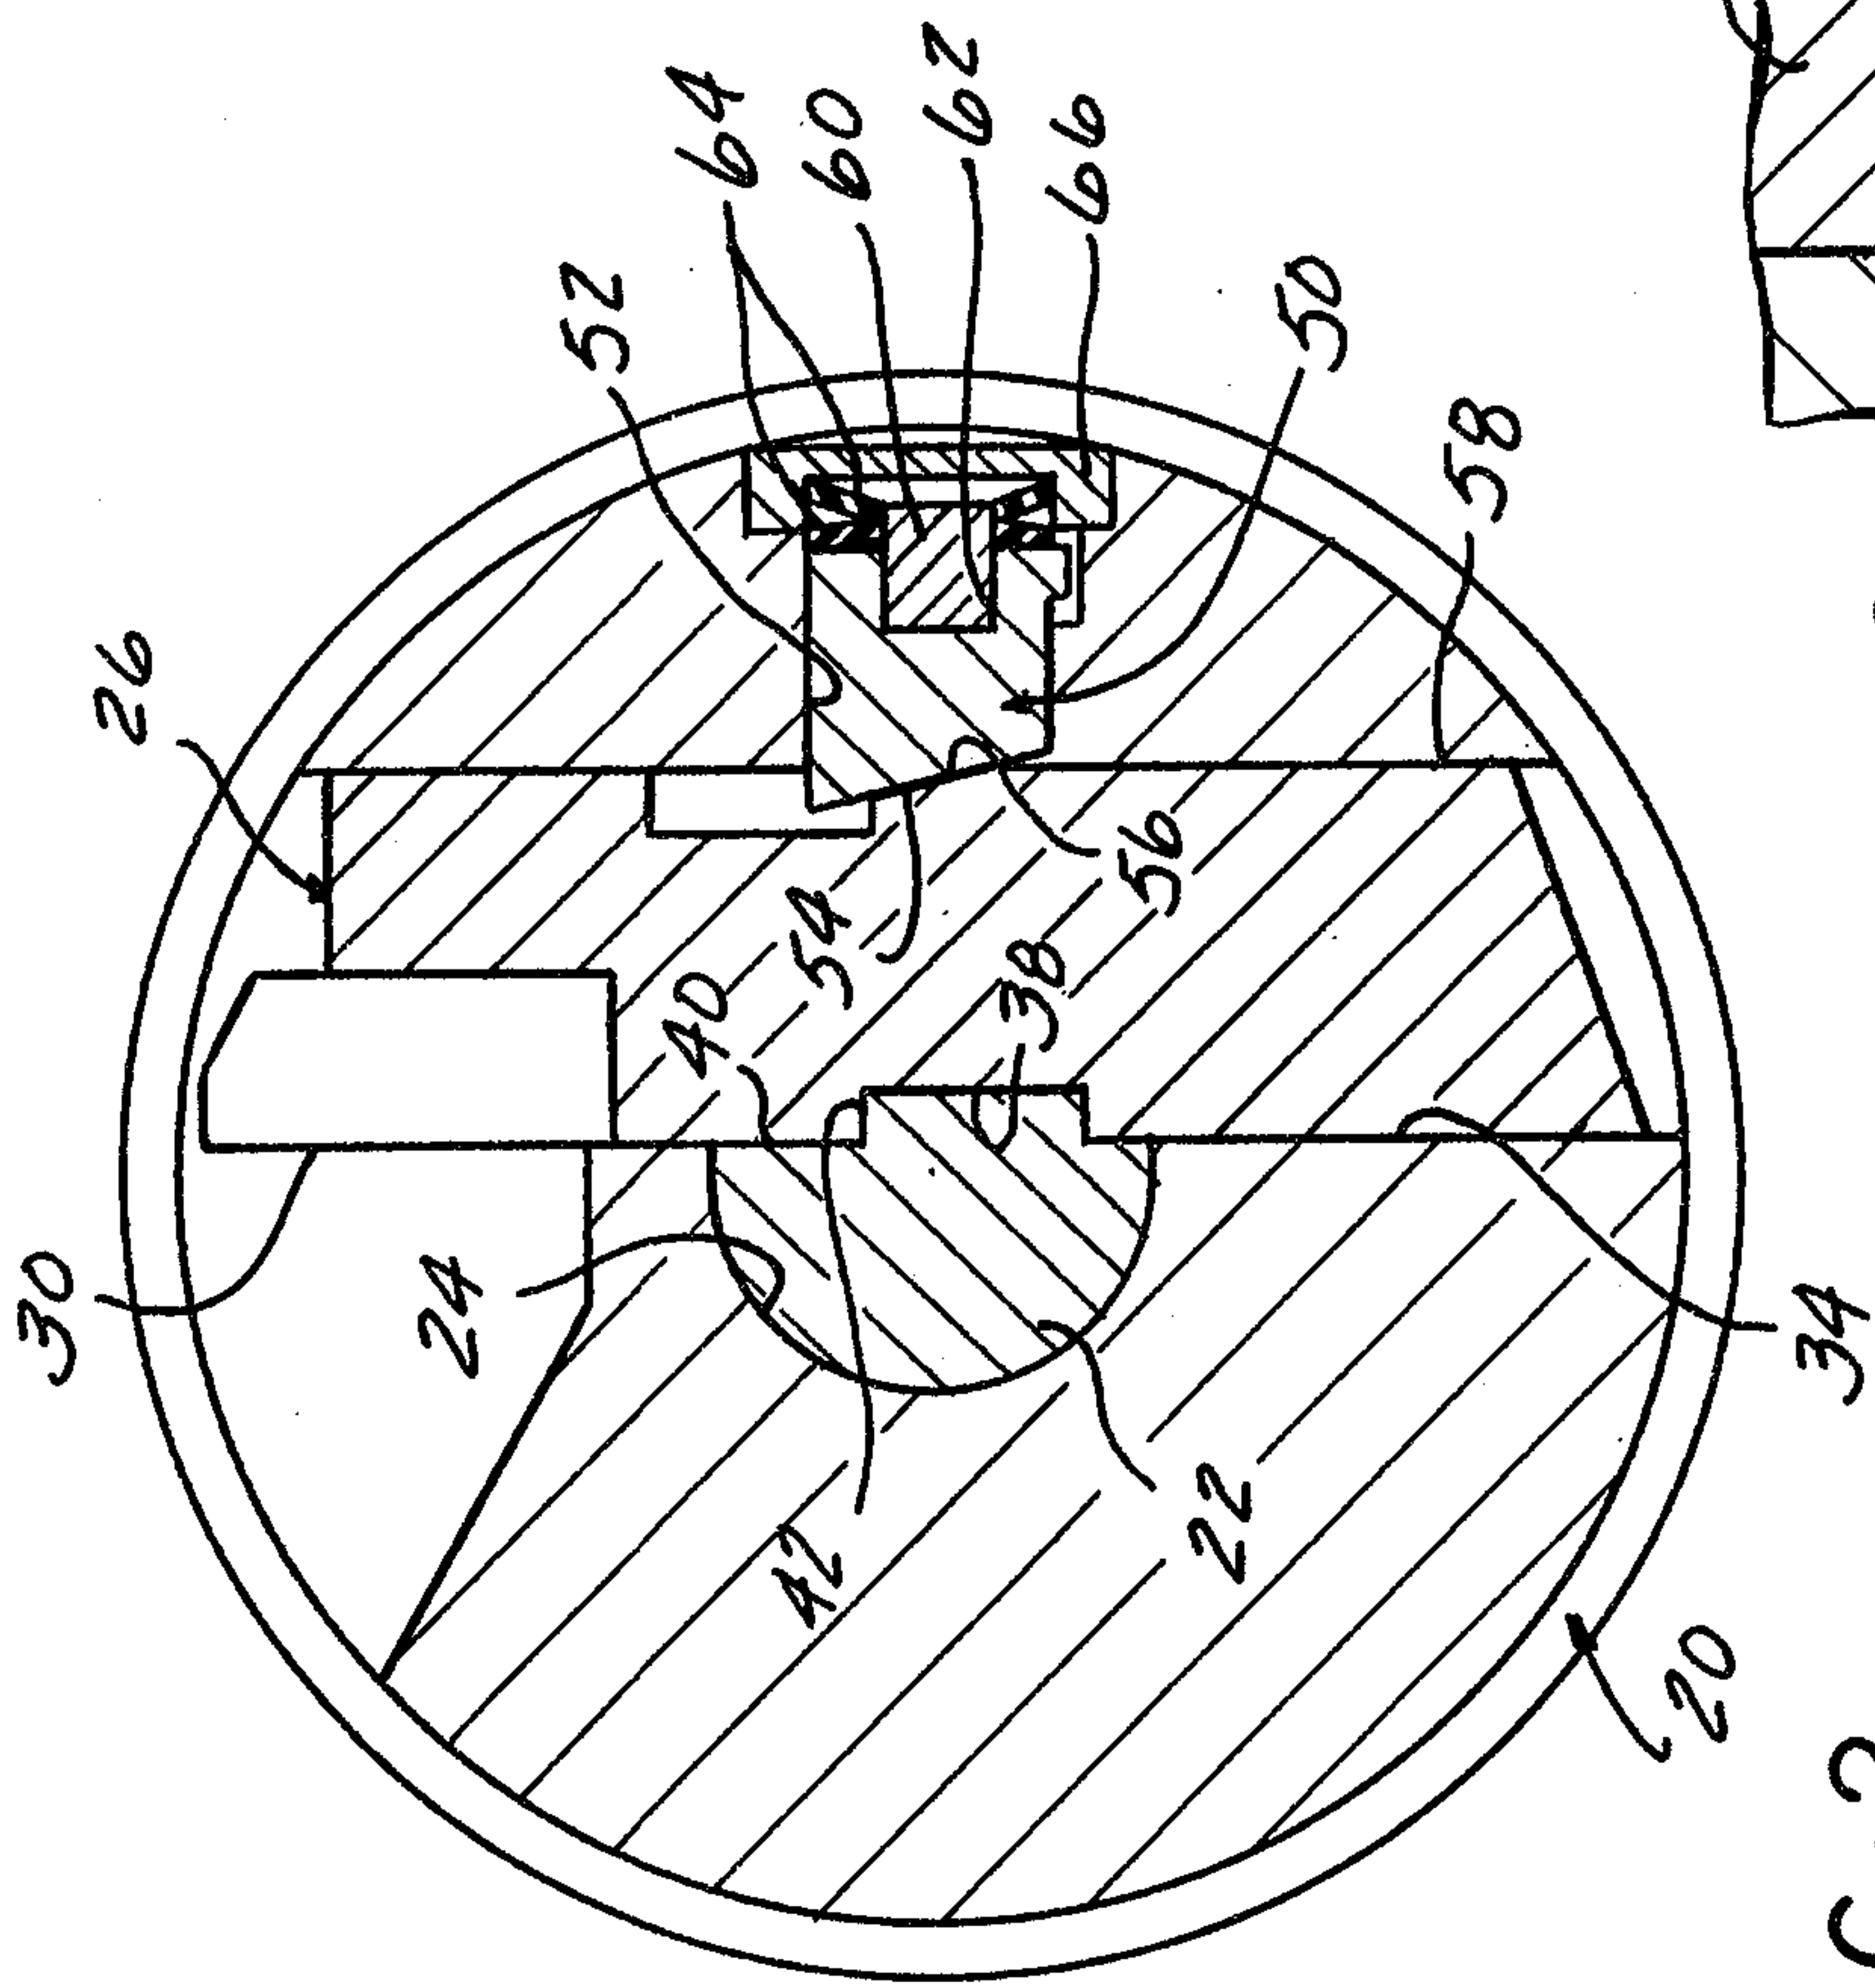

2079229

Secd. E. J. Burnard

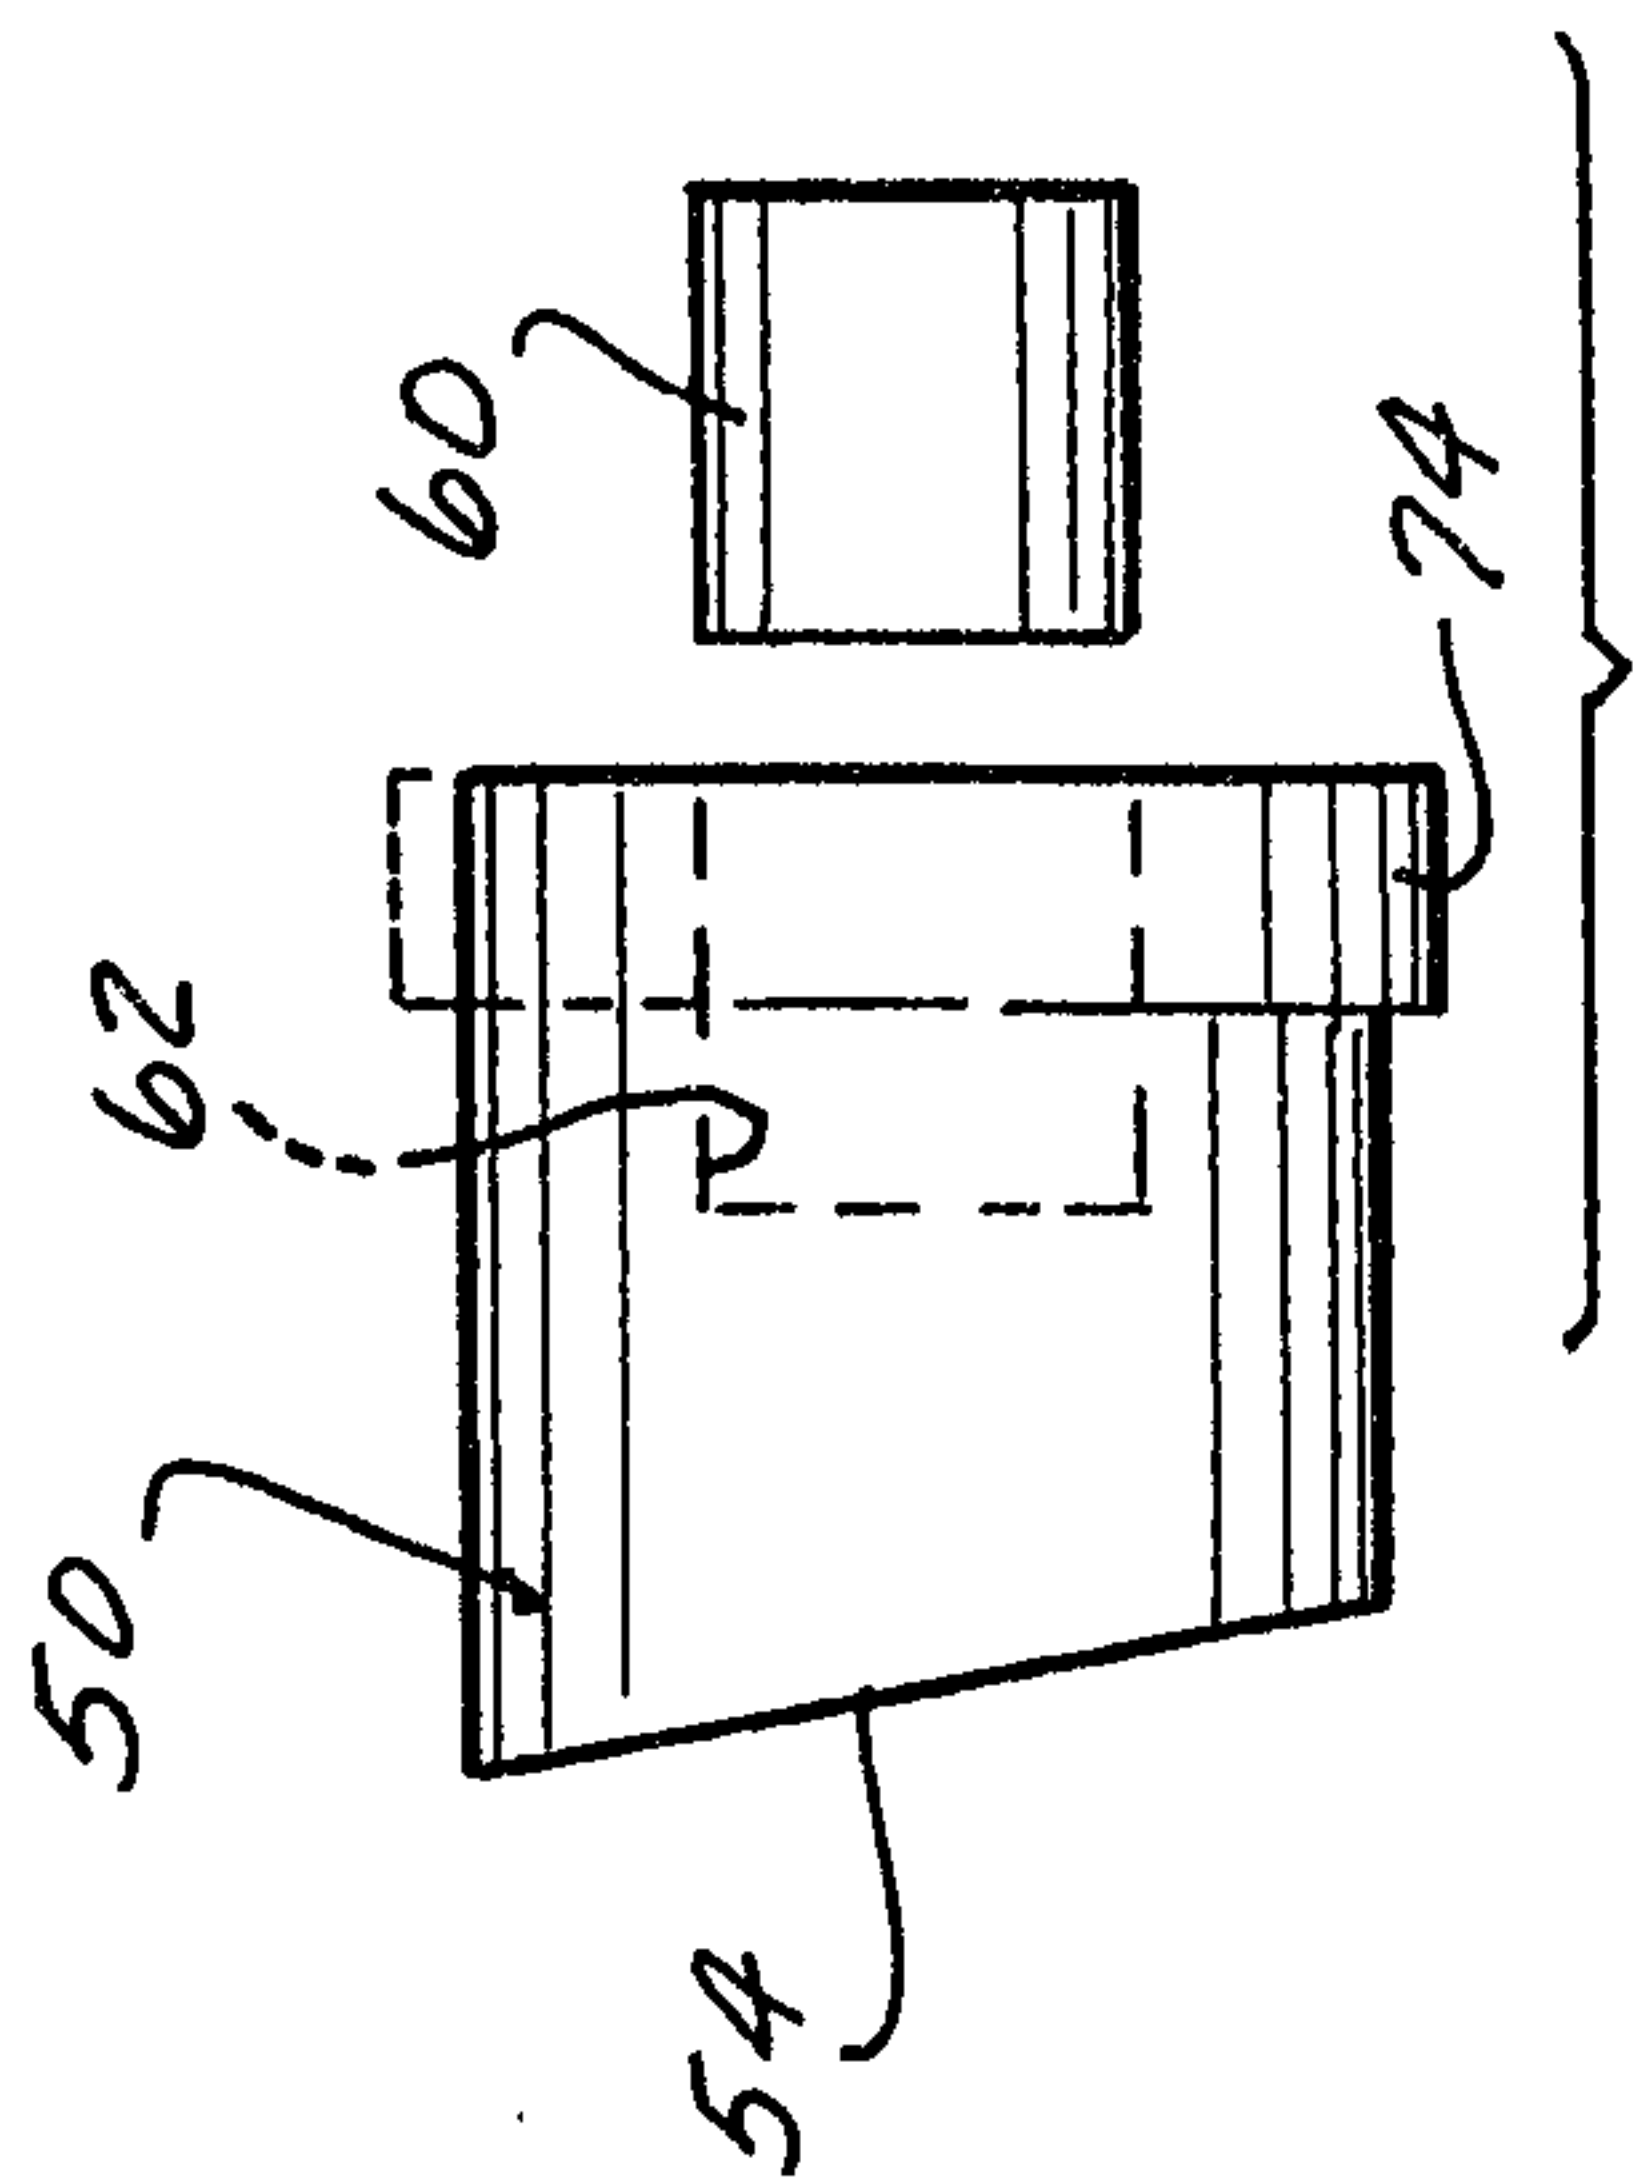


FIG-5

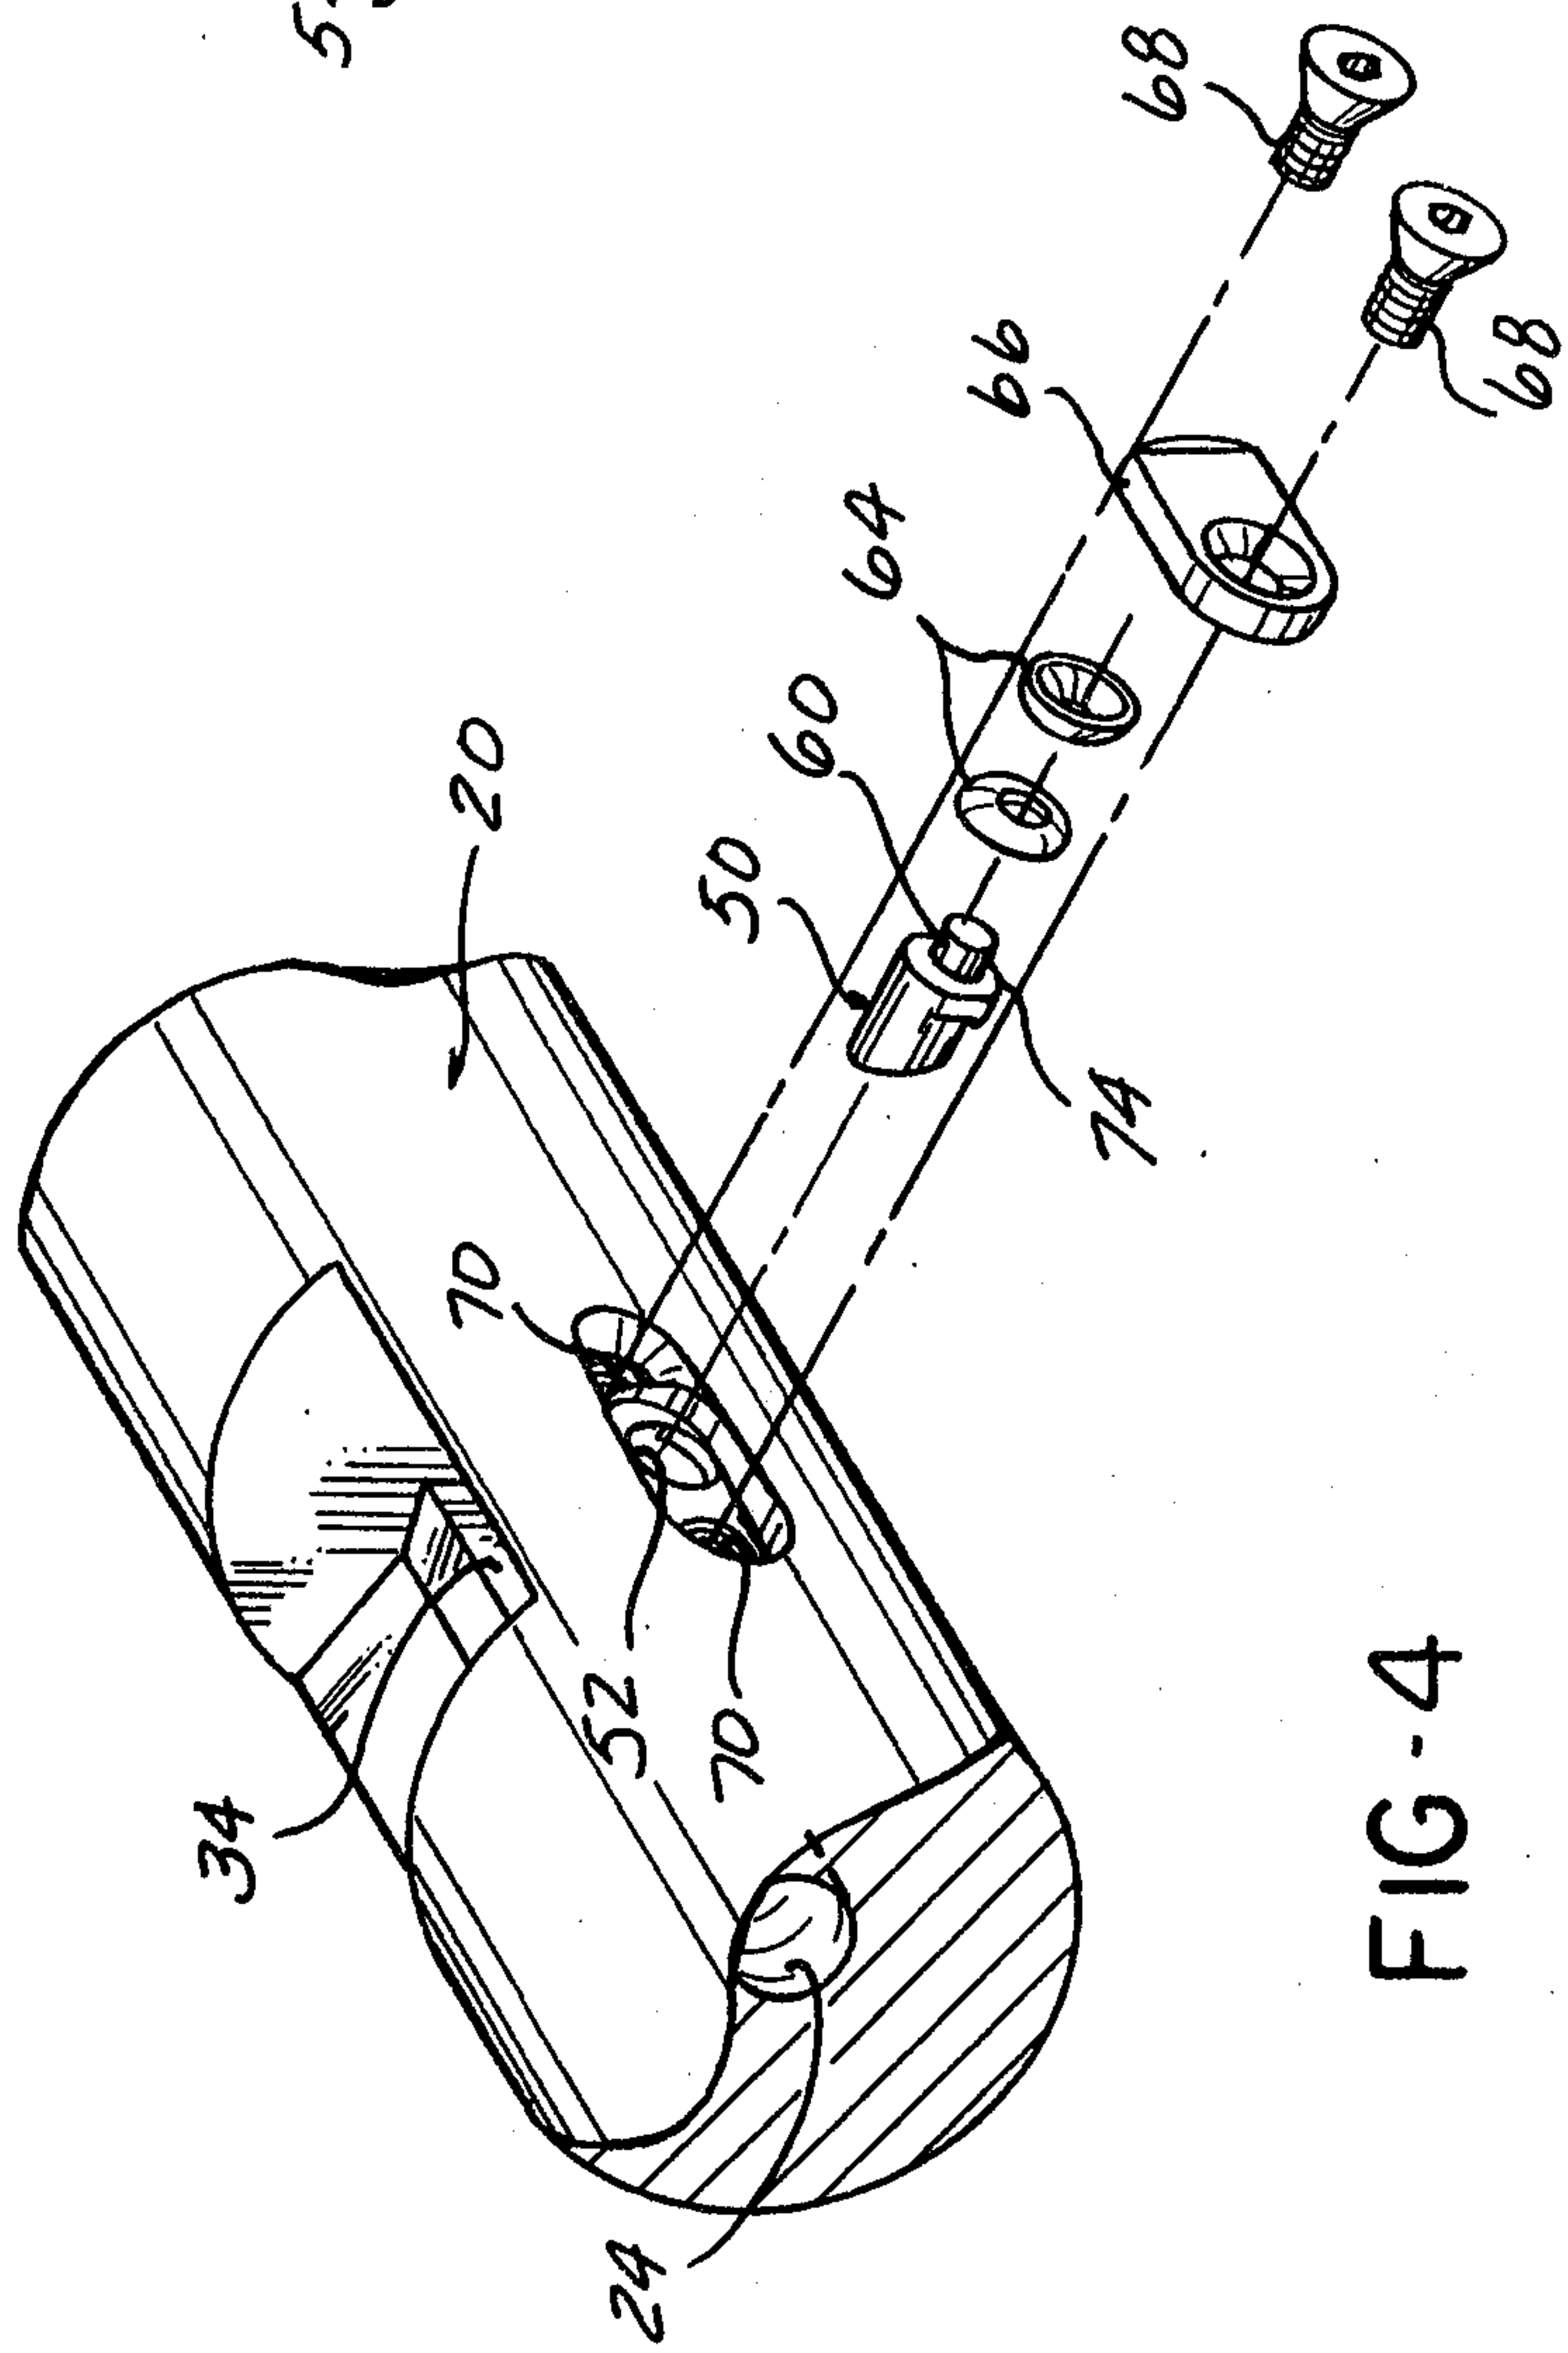


FIG-4

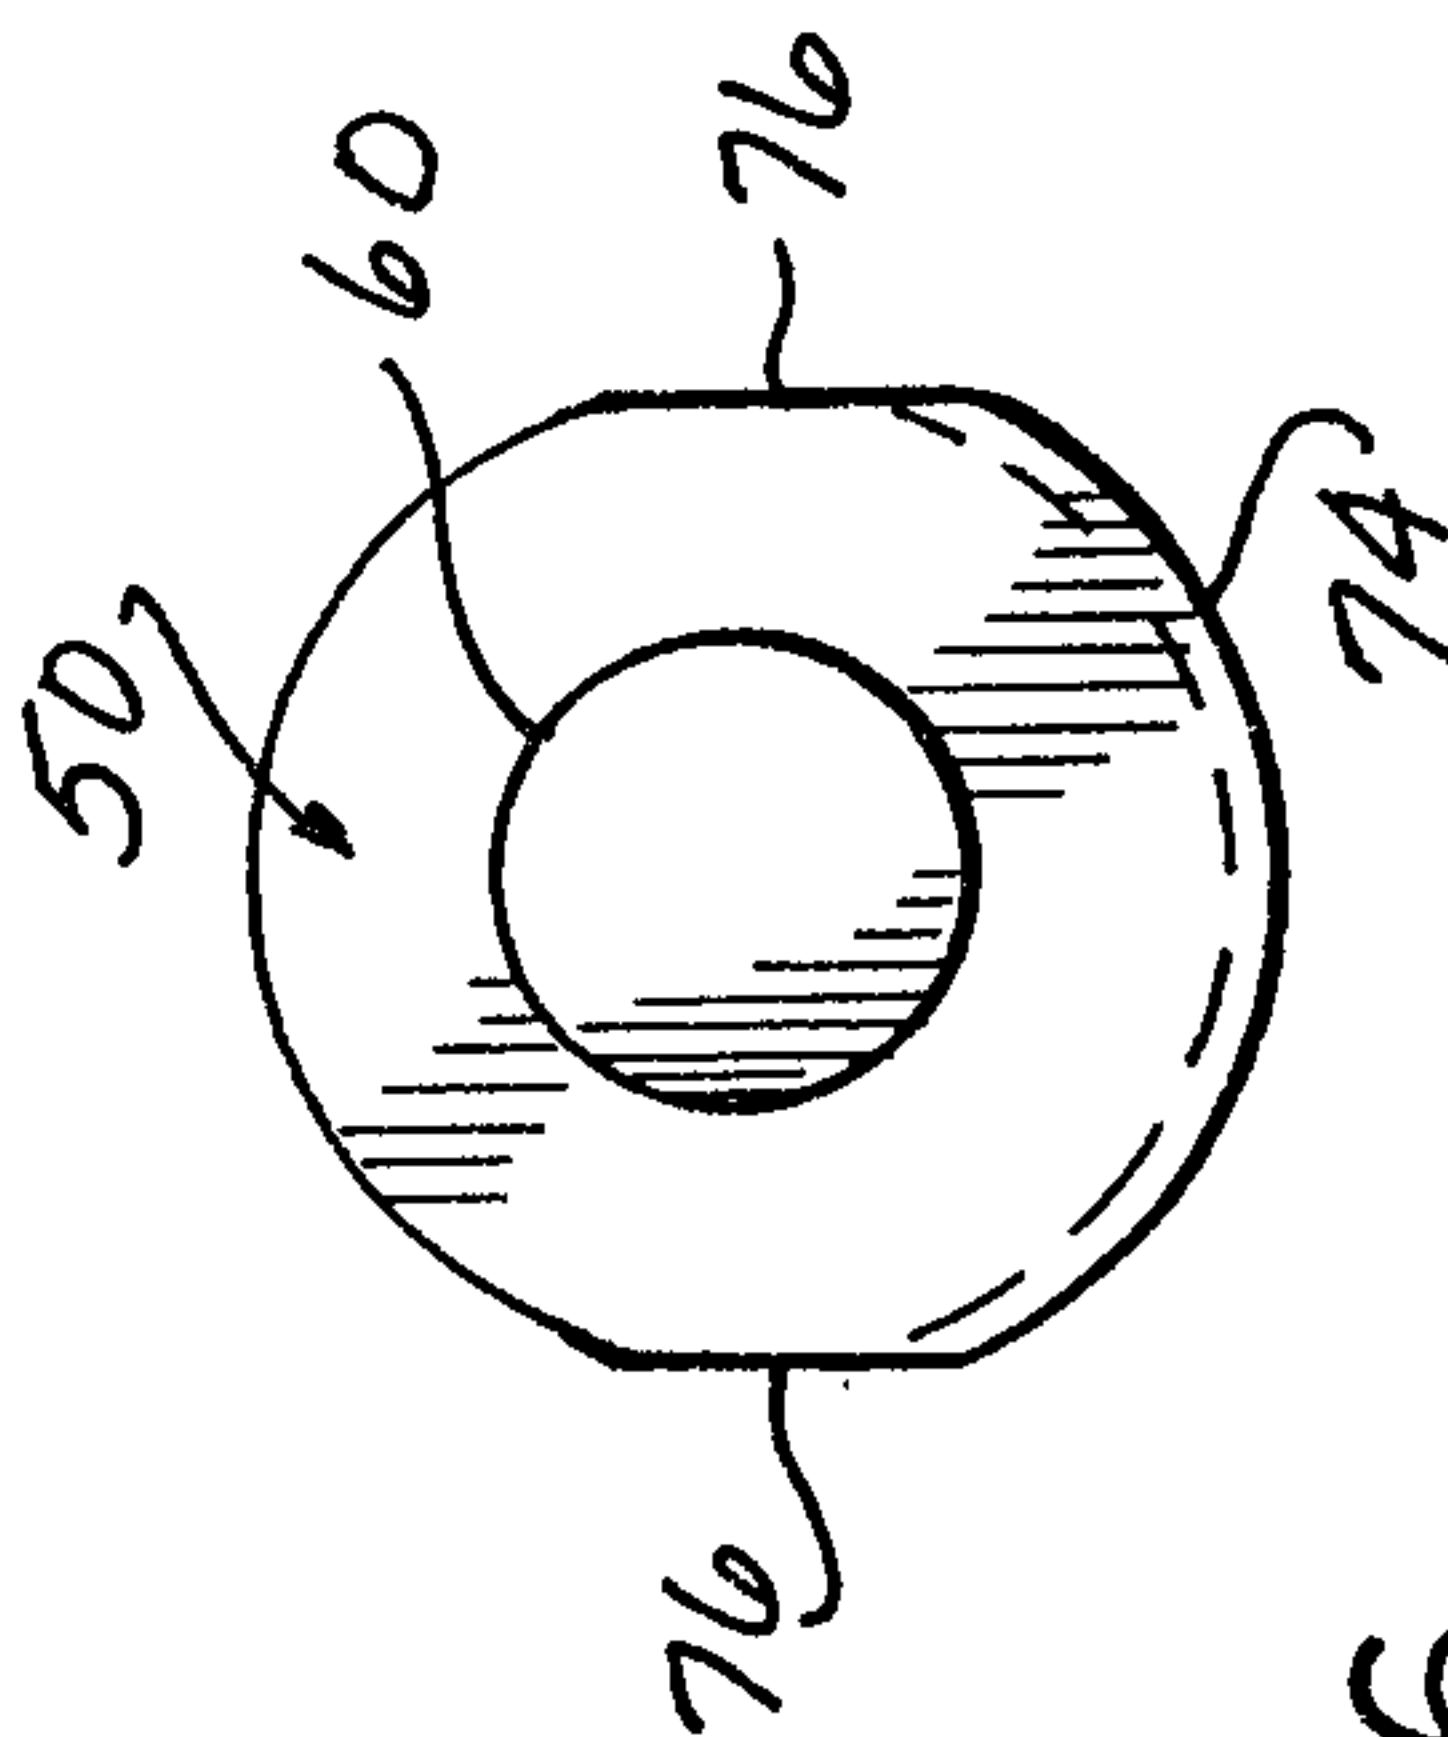


FIG-6

Sam. E. Mc. Lennan

